

**OFFICE OF THE EXECUTIVE ENGINEER (SEWERAGE) KEMARI TOWN  
KARACHI WATER & SEWERAGE BOARD**

Issued to M/S, \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

Vide Token No. \_\_\_\_\_  
Dated, \_\_\_\_\_  
Vide P.O. No. \_\_\_\_\_  
Dated, \_\_\_\_\_

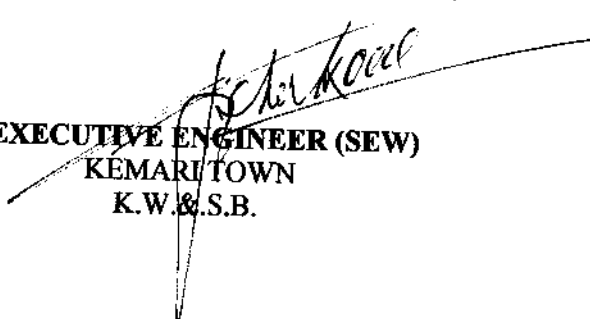
**SUB: URGENT REPLACEMENT OF 12"/8"/15" DIA RCC SEWERAGE LINE AND RE-CONSTRUCTION OF DAMEGE MANHOLES IN DIFFERENT AREA OF UC-01 AND UC-02 KEAMARI TOWN**

1. Tender can be dropped on 13-03-2014 upto to 2:00 P.M. and opened at 02:30 P.M. Office of the chief Engineer (IP&D), KW&SB at Block "B" at 9<sup>th</sup> Mile, Karsaz, Shahrah-e-Faisal, Karachi.
2. Time Allowed: 20 days
3. Earnest Money: 2% of quoted amount in shape of pay Order/Bank Draft in favor of Karachi Water & Sewerage Board.
4. Tender Fee Rs. 1000/- (Non-Refundable)
5. Penalty Rs. 1000/- Per day on delay.
6. Estimated amount. (on Item rate basis)

**SUPERINTENDENT (REVENUE)**

S. No.	DESCRIPTION OF WORKS.	QTY.	RATE		UNIT	AMOUNT IN RUPEES.
			Rs. In Figure	Rupees In Words.		
1	2	3	4	5	6	7
1.	Dismantling and removing road metal ling.	3150 CFT			% CFT	
2.	Excavation for pipe line trenches in all kind of soil and pits i/c trimming and dressing sides to true alignment and shapes leveling of bed Trenches to correct level and grade, cutting joint holes and disposal of surplus earth within a one chain as directed by engineer in charge. Providing fence guards lights, flags and temporary crossing for non-vehicular traffic where ever required lift upto 5ft (1.52 m) and lead up to one chain (30.5 m) 0-5'.	12200 CFT			%0 CFT	
3.	Additional lift every 3' FT, 5' to 8'	5700 CFT			% 0CFT	
	8' to 11'	5700 CFT			% 0CFT	
4.	Providing laying RCC pipes with (Rubber Ring joint and fitting in trench I/C cutting, fitting and jointing with rubber ring me I/C testing with water to specified pressure.  (08" Dia) (12" Dia) (15" Dia)	500 RFT 400 RFT 200 RFT			P / RFT P/ RFT P/ RFT	
5.	Full hire charges of the pumping sets I/c wages of driver and assistant fuel electric energy plate from required for placing out water from various depth I/c cost of dismantling after completion of the job up to 10 HP pumping out water from 15' ft deep trench.	34 Days			P-Day	
6.	Providing main hole 4'. Inside with C.I frame (15 Kg) 5 ft clear depth 1:2:4 cast in situ in 9" thick wall 1:4:8 c/c in 6 ft. dia in 6" thick in foundation, 1:2:4 c/c in benching ½" thick C.P 1:3 mortar on in					

	side walls and surface of channel/ benching I/C making required nose of main and branch channel, 3/4" dia bars M.S foot rest at 12" c/c including cost of excavated staff etc complete, as per design and instruction of the engineer in charge.	15 Nos.				
	Add/ Deduct per Ft depth	(+59' FT				Each. P / FT
7.	Making connection with the existing m/hole I/c the cost of cutting holes in walls making them good in cement concrete 1:2:4 and making the required channel etc, complete.	16 NOS.				EACH.
8.	Refilling the excavated staff in trenches 6" thick layer I/c watering ramming to full compaction etc, complete.	22485.74 CFT				%0 CFT
9.	Manufacturing and supplying of R.C.C Ring slab of 21" Dia inside 36" Dia outside 7.5 width and 6' thick I/c 3/8" Dia for steel bars two concentric ring with 3/8" dia 8 nose, cross linked bars welded and two sunk type hooks coated in 1:1 - 1/2 : 3 concrete with embedded 15 Kg C.I frame in perfect position I/c transportation charges for an average lead of 20 Km per trip from casting yard to Town Offices (A minimum of 25 slabs per trip will be transported)	15 NOS.				EACH.
10.	Shifting to the side and fixing of 36" dia ring slab in perfect position on damaged manhole I/c cutting of damaged portion of manhole in proper shape and laying in layer of cement mortar of 2" thickness and disposal of debris.	15 NOS.				EACH.

  
**EXECUTIVE ENGINEER (SEW)**  
**KEMARI TOWN**  
**K.W.&S.B.**

I/ We total amount quoted to Rs. \_\_\_\_\_ Inwards Rupees,( \_\_\_\_\_

\_\_\_\_\_ ) the rules and regulation of Karachi Water & Sewerage Board.

Sign. Of Contractor: \_\_\_\_\_

Name of Firm: \_\_\_\_\_

Address: \_\_\_\_\_

\_\_\_\_\_