

**KARACHI METROPOLITAN CORPORATION**  
**OFFICE OF THE DIRECTOR SAFARI PARK, CS&R KMC**



Tender Reference No.

**BILL OF QUANTITIES**

**Name of Work: Construction of Food Court at Safari Park . CS&R KMC**

**Estimated Cost:- 19.86 Million**

**Bid Security:-**

**Tender cost:- 3,000/=**

**Note:**

**This Document Contains 06 pages excluding this page.**

No. \_\_\_\_\_

Dated: \_\_\_\_\_

Issue to M/s. \_\_\_\_\_

P.O No. \_\_\_\_\_

\_\_\_\_\_

Dated: \_\_\_\_\_

\_\_\_\_\_

Bank: \_\_\_\_\_

**Signature & Stamp of Issuing Authority**

# KARACHI METROPOLITAN CORPORATION

OFFICE OF THE DIRECTOR SAFARI PARK, CS&R KMC

Tender Reference

Name of Work: Construction of Food Court at Safari Park . CS&R KMC

(Part - A Items Based on Schedule Rate)

S.No.	Description	Quantity	Rate in Figure	Rate in Words	Per	Amount
1	Dismantling of Cement block masonry. 11-14	1,080	1,134.38		% Cft.	12,251
2	Dismantling of cement concrete plain 1 : 2 : 4. 11-19 (c)	29,340	3,327.50		% Cft.	976,289
3	Dismantling of Cement Concrete Reinforcement separating reinforcement from concrete cleaning straightening the same. Ch-2 P-10/20	720.00	5,445.00		% Cft.	39,204
4	Dismantling of Iron work of trusses shades, water tanks, etc excluding C&W cutting of. Ch-2 P-13/41	17.16	278.30		Per Cwt.	4,776
5	Dismantling of existing Asphalt Concrete Road i/c base sub-base & disposal of Dismantled materials to designated placed. Highway Work. P-15/11	4,800	773.86		% Sft.	37,145
6	Removing windows and sky light with Door with chowkets. Ch-2 P-10/33 (b)	5	102.85		Each	514
7	Removing Door with chowket. Ch-2 P-10/33 (a)	5	142.18		Each	711
8	Excavation for foundation of building bridges and other structures i/c degelling dassing refilling around structure with excavated earth watering and remming leas upto 5 ft. 4 - 18 (b)	22,341.9	3,176.25		0% Cft.	70,963
9	Cement Concrete brick or stone blast 1-1/2 inch to 2 inch gauge. Ratio 1 : 4 : 8 - 17 - 4 (b)	15,882.08	9,416.20		% Cft.	1,495,488
10	Damp proof course with cement sand Ratio (1:2) mix with dampo 3/4 inches thick.	1,297.50	2,401.58		% Sft.	31,161
11	Erection & removal of centering for R.C.C or plain C.C. work of deodar wood (2nd class). Ch-4 P-18/19-B (Horizontal)	1,103	3,588.48		% Sft.	39,572
12	Cement Concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate	551	14,429.25		% Cft.	79,559
13	Reinforced Cement Concrete including all labour and material except the cost of steel reinf.and its labour for bending and binding which will be paid separately. This rate also includes all kind of forms moulds lifting, shuttering, curing , rendering and finishing; the exposed surface (including screening and washing of shingle). 19 - 6 (i)	12,562.4	258.62		Per Cft.	3,248,879
14	Fabrication of Mild Steel reinforcement for cement concrete i/c cutting bending laying in position making joints and fastenings i/c cost of binding wire (also i/c removal of rust from bars). 20 - 7 - ii (ii)	504.74	4,820.20		Per Cwt.	2,432,938

# KARACHI METROPOLITAN CORPORATION

## OFFICE OF THE DIRECTOR SAFARI PARK, CS&R KMC

Tender Reference

Name of Work: Construction of Food Court at Safari Park . CS&R KMC

(Part - A Items Based on Schedule Rate)

S.No.	Description	Quantity	Rate in Figure	Rate in Words	Per	Amount
15	P/L 1:3:6 cement concrete Solid Block masonry wall 6" and below in thickness set in 1:6 cement mortar in ground floor super structure i/c raking out jointd & curing etc. Complete. 22 - 23	5,026.00	15,771.10		% Cft.	792,655
16	Cement Plaster 1:4 upto 20' height. 58 - 11	28,793.5	2,283.93		% Sft.	657,623
17	Cartage of 100 Cft/5 ton of all material likes on aggregates spawl coal lime surkhi etc., B.G. Rail fastening points and crossing bridges guarders, Pipes sheets rains, M.S. Bars etc., or 1000 Nos. bricks 10x5x3 pr 100 moulds of fuel wood by trucks	53,481.9	714.29		% Cft.	382,016
18	Small Iron work such as gusset plate, knees bends, stirrup, rings, etc,i/c cutting drilling reverting handling assembelling & fixing but excluding erection in position. Ch-17 P-91/1	186.98	6,420.61		Per Cwt.	1,200,535
19	Erection & Fitting in position of iron trusses staging of water tanks etc. Ch-17 - P-91-3	186.98	271.04		Per Cwt.	50,679
20	Excavation for pipes line in treaches in all kind of soil. 47- 5	9,000	4,650.00		% OCft.	41,850
21	P/F R.C.C pipe & collars of class B and fixing in trench i/c cutting, fitting and jointing with mixphalt composition and cement mortar ( 1 : 1 ) i/c testing with water to ahead of 22.5 meter or 75 ft. 17 - 2 (c) & (e) 12" Dia	600	412.00		Per Rft.	247,200
22	Construction manhole or inspection chamber for req. dai and speci. circular sewer and 3'-6" deep with wall of B.B in cement mortar 1:3 cement plaster 1:3:1/2" thick inside wall 1" thick over benching and channel i/c fixing. C.I main hole cover with frame of clear opening 1/2' x 1-1/2 of 1.75 cwt. (88.9 K.g) embeded in plain C.C 1:2:4 and fixing 1" dia M.S steps 6" wide projecting 4" from the face of wall at 12" C/C duly painted etc. com. as per spec. and drawing. 39 - 1 (a).	12	14,748.00		Each	176,976
23	Refiling of excavated staff in tranches i/c watering etc complete. 53- 24	9,000	2,760.00		% OCft.	24,840
24	P/F G.I pipes specials and clamps etc. i/c fixing cutting and fitting complete i/c the cost of breaking through walls and roof making good etc. painting two coats after cleaning the pipe etc. with white zink paint with pigment to match the color of the building					
	1/2" Dia	200	73.21		Per Rft.	14,642
	3/4" Dia	200	95.79		Per Rft.	19,158
	1" Dia	100	128.55		Per Rft.	12,855
	1-1/2" Dia	100	188.97		Per Rft.	18,897

# KARACHI METROPOLITAN CORPORATION

## OFFICE OF THE DIRECTOR SAFARI PARK, CS&R KMC

### Tender Reference

Name of Work: Construction of Food Court at Safari Park . CS&R KMC

(Part - A Items Based on Schedule Rate)

S.No.	Description	Quantity	Rate in Figure	Rate in Words	Per	Amount
25	P/F full way gun metal valves with wheels threaded or flanged ends with rubber washing .14 - 6					
	1/2" Dia	8	200.42		Each	1,603
	3/4" Dia	8	271.92		Each	2,175
	1" Dia	8	365.42		Each	2,923
	1-1/2" Dia	4	640.42		Each	2,562
26	P/L 2 thick Flooring Cement Concrete 1 : 2 : 4 i/c surface finishing and curing complete and dividing into panels. 47 - 16 (a) (b)					
	2" Thick	7,133	3,275.50		% Sft.	233,625
27	P / L white glaze tiles 6" x 6" 1/4" on floor or wall facing in req patten of STILE specification jointed in white cement and pigment over base a of 1:2 gray cement mortar 3/4" thick i/c washing & filling of joints with slurry of white cement & pigment desire shape with finishing cleaning & cost of wax polish etc. complete i/c cutting tiles to proper profile 53-60	4,606	30,509.77		% Sft.	1,405,280
28	Supplying & Fixing in position aluminium channels framing for hinged windows & ventilators of aldrop made with 5 mm thick tinted glass glazing (belgium) and alpha (japan) locks i/c handles stopers & locking	222	1,450.76		Per Sft.	322,069
29	Supplying & Fixing in position aluminium channels framing for hinged doors, of alcop made with 5 mm thick tinted glass glazing (belgium) and alpha (japan) locks i/c handles					
a	Deluxe Model (white)	196	1,450.76		Per Sft.	284,349
30	P/F collapsible gate with channel framing of section 3/4" x 5/16" at 4" i/c rivited with 3/4" x 1/8" flat iron patti placed diagonally and provided with top & bottom T-Section 1" x 1" 1/8" along with rollers also i/c locking	140	387.04		Per Sft.	54,186
31	P/Fixing 1-1/2" thick best quality deodar wood shutters glazed or fully glazed approved iron hings and tower bolts etc. as required.	46	1,131.11		Per Sft.	52,031
32	Proving & fixing of G.I frames / chowkhats of size 7" x 2" x 4-1/2" x 3" for door using 20 gauge G.I sheet i/c welded hinges and fixing at site with necessary hold fasts. Filling with cement sand slurry of ratio 1:6 & repairing the jambs. The cost also i/c all carriage, tools and plants used in making and fixing. Ch-17 P/93-28	172	240.50		Per Rft.	41,366
33	P/F Aluminum sheet on doors pasted with glue as per requirement. 73 - 61	38	63.77		Per Sft.	2,423
34	Preparing surface Distempering. - 60 - 24 (c).					
	Three coat.	28,794	1,079.65		% Sft.	310,869

# KARACHI METROPOLITAN CORPORATION

OFFICE OF THE DIRECTOR SAFARI PARK, CS&R KMC

Tender Reference

Name of Work: Construction of Food Court at Safari Park . CS&R KMC

(Part - A Items Based on Schedule Rate)

S.No.	Description	Quantity	Rate in Figure	Rate in Words	Per	Amount
35	P/F equating type white glazed of flushing cistern with internal laying flush pipe with bend and making required numbers of holes in wall plinth & floor for connection &	6	5,044.60		Each	30,268
36	P/F European type white glazed of flushing cistern with internal laying flush pipe with bend and making required numbers of holes in wall plinth & floor for connection &	2	5,339.40		Each	10,679
37	S/F bib cocks of superior quality with c.p head 1/2" dai. 15 - 15 (a)	8	1,109.46		Each	8,876
38	Providing & Fixing 4" dia C.I vent pipes i/c cutting, fitting etc. complete. 8 - 1 & 9 - 13					
	3" dia C.I Pipes	100	289.25		Per Rft.	28,925
39	P/F 4" dia C.I plain bend 45 degree of the required degree with i/c extra painting to match the color of the building. 9 - 9					
	3" dia C.I Pipes	4	566.70		Each	2,267
40	Supplying and Fixing swan type pillar cock of superior quality single c.p head 1/2" dai. 16 - 19 (a)	15	795.30		Each	11,930
41	Supplying and Fixing mixture of superior quality single c.p head 1/2" dai. 15 - 16 (a)	4	2,745.60		Each	10,982
42	Supplying and Fixing Fibre Glass Tank of app. Quality and design and wall thickness as specf. i/c cost of nut bolts and fixing in plate form of cement concrete 1:3:6 and making connecting for in-let and outlet & over flow pipe etc. com. 18 - 3 (d)					
	1000 Gls.	2	58,962.94		Each	117,926
43	Preparing surface and painting with Emulsion paint 78-29 a+b+c Three coat	3,039	1762.75		% Sft.	53,570
44	P/Fixing chrome plated brass towel rail complete with fixing on wood cleats with 1 inches long C.P brass screws (iii) Tower rail 24 inches long.	4	972.95		Each	3,892
45	P/Fixing C.P brass toilet paper holding of standard size with chrome plate brass brackets complete.	4	572.0		Each	2,288
46	P/Fixing soap tray of made of plastic of superior quality & design with fine finishing with C.P screw etc. complete.	4	497.20		Each	1,989
47	P/Fixing bathroom accessoires set (7 pices) i/c towel rod, brush holder soap try shelf of approved design i/c cost of screw, nuts etc	4	10,322.40		Each	41,290
48	P/F window printed blinds (Horizanal / Vertical) with plain design & app colour i/c fitting in windows with necessary	240	91.11		P/Sft.	21,866
49	P/F precast Edage Block 3750 psi industrial made size 6" thick x 12" long & 12" high i/c the cost of cartage, excavation, form work.	474	279.01		Per Rft.	132,273

# KARACHI METROPOLITAN CORPORATION

OFFICE OF THE DIRECTOR SAFARI PARK, CS&R KMC

Tender Reference

Name of Work: Construction of Food Court at Safari Park . CS&R KMC

(Part - A Items Based on Schedule Rate)

S.No.	Description	Quantity	Rate in Figure	Rate in Words	Per	Amount
50	Providing and fixing cement paving blocks flooring having a size of (197 x 97 x 60 (mm) of city/quddra/cobble shape with natural colour having a strenght of b/w (5000 psi to	33,219	199.77		Per Sft.	6,636,184
51	P/F Colour Crete to wall surface to provide durable crest & aesthetics having thickness upto 3/4" with specified colour having a water fire & termite resistance (Upto 20 Height). Ch-9 P-56/44	1,400	6,319.50		% Sft.	88,473
52	Filling, watering & remming earth in floor with new earth (Excavated from out side) lead upto one chain & lift upto 5 ft. Ch-1-P-4/22	16,699.03	3630.0		0% Cf.	60,617
<b>Deduct 20% Below on Schedule Items (-) Rs.</b>						<b>17,671,306</b>

# KARACHI METROPOLITAN CORPORATION

OFFICE OF THE DIRECTOR SAFARI PARK, CS&R KMC

Tender Reference

Name of Work: Construction of Food Court at Safari Park . CS&R KMC

(Part - A Items Based on Offer Rate)

S.No.	Description	Quantity	Rate in Figure	Rate in Words	Per	Amount
53	P/Fixing ceramic bowel wash basin having a size 21" 18" or any other app. Size table top fitted in 3/4" thick chemical polish BOTICINA creame / Tevera marble (5.50 x 2.50) with bowel wash basin PVC plastic pipe bottle trape etc complete in all respect.	4	10,000.0		O.R Each	40,000
54	P/F 60" x 48" Looking mirror i/c the cost of fitting & its fixture etc complete as directed by the Engineer Incharge.	4	5,000.00		O.R Each	20,000
55	P/Fixing Marble Top having a size 12'-6"x 2'-6" or any shad for service counter top fitted in 3/4" thick chemical polish BOTICINA creame / Tevera marble etc complete in all respect.	24	20,000.0		O.R Each	480,000
56	P/F porcing tiles of prime quality size 18" x 18" & shade over a 1:2:4 cc bed with white cement mortar i/c the cost of curring, filling by matching granite pigment. As per direction by the Engineer Incharge.	3,850.5	250.00		O.R Per Sft.	962,625
57	P/F G.I Pipe Railing of 2" (50mm) diameter, comperising, vertical posts & horizontal breacing at G.I pipe at the same as per design i/c cost of special bends threading, cutting & making good the floor or wall at any kind in cement concrete 1:2:4 etc. complete as per direction by the Engineer Incharge.	450.0	350.00		O.R Per Rft.	157,500
58	P/F G.I Pipe Railing of 1-1/2" (37.5mm) diameter, comperising, vertical posts & horizontal breacing at G.I pipe at the same as per design i/c cost of special bends threading, cutting & making good the floor or wall at any kind in cement concrete 1:2:4 etc. complete as per direction by the Engineer Incharge.	1,230.0	350.00		O.R Per Rft.	430,500
59	P/F G.I Pipe Railing of 1" (25mm) diameter, comperising, vertical posts & horizontal breacing at G.I pipe at the same as per design i/c cost of special bends threading, cutting & making good the floor or wall at any kind in cement concrete 1:2:4 etc. complete as per direction by the Engineer Incharge.	288.0	250.00		O.R Per Rft.	72,000
60	P/L cement concrete 1:2:4 using 3/4" (19mm) down gaug screened graded making in patties (panel strips) at recived size in floors 7 dado at any description of any colour & design in all floors i/c formwork, curing etc. complete as per direction by the Engineer Incharge.	238.0	145.0		O.R Per Cft.	34,510

# KARACHI METROPOLITAN CORPORATION

## OFFICE OF THE DIRECTOR SAFARI PARK, CS&R KMC

Name of Work: Construction of Food Court at Safari Park . CS&R KMC

Tender Reference No.

Estimated Cost:- 19.86 Million

I/We hereby quoted as follows:

1	Part - A (Item Based on S/R) Amounting to Rs. 1,76,71,306/=	
	% Above / Below S / Rate	
2	Part - B (Item Based on O/R) Amounting to Rs. 21,97,135/=	
GRAND TOTAL ( A + B ) Rs.		

The total amount is Rs. \_\_\_\_\_ Rupees.

\_\_\_\_\_ for the complete job for all Schedule of Rates, Offer Rates & Electric Rates.

I/We have attached a pay order bearing No. \_\_\_\_\_ Dated. \_\_\_\_\_ Issue from \_\_\_\_\_  
(Bank Name)

Bank Amounting to Rs. \_\_\_\_\_ /= as per NIT.

Time Limit: 180 Days


Penalty Per Day: Rs. 3,000/=


#### NOTE:


1. 2% earnest money / all deposit (in shape of pay order as specified against each above must be accompanied with the tender, which shall remain valid for period of 28 days beyond the validity period for bid .The bid security shall be released to the unsuccessful bidders once the contract has been signed with the successful bidder or the validity period has expired.
2. In case bidder submits a seriously unbalanced bid then he may be required to deposit extra performance security to a level sufficient to protect the agency against financial loses or as determined and asked by the procuring agency ,failing which his bid security will be forfeited.
3. The bidder shall have to submit proof /reference to the effect that he has already carried out work of similar nature during last 5 years.
4. The bidder shall be required to furnish bank certificate confirming therein that he is maintaining a sound account duly supported with bank statement.

Signature of the Contractor with Stamp

Address: \_\_\_\_\_

  
Executive Engineer (Civil)  
Safari Park CS&R KMC

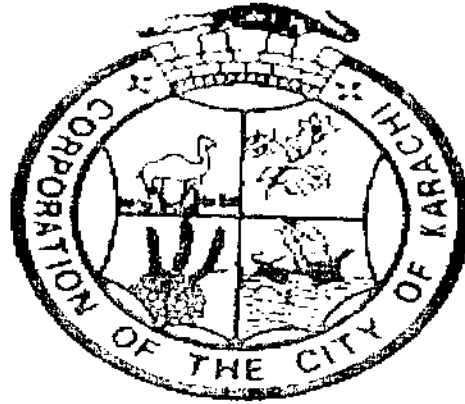
  
Director  
Safari Park CS&R KMC

  
Director  
(A & A) CS&R KMC



# KARACHI METROPOLITAN CORPORATION

OFFICE OF THE DIRECTOR SAFARI PARK, CS&R KMC



Tender Reference No.

## BILL OF QUANTITIES

Name of Work: Providing & Laying Stone Pitching in Road Shoulders from Safari Gate to White House at Safari Park, CS&R, KMC

Estimated Cost:- 19.99 Million

Bid Security:-

Tender cost:- 3,000/=

### Note:

This Document Contains 02 pages excluding this page.

No. \_\_\_\_\_

Dated: \_\_\_\_\_

Issue to M/s. \_\_\_\_\_

P.O No. \_\_\_\_\_

Dated: \_\_\_\_\_

Bank: \_\_\_\_\_

Signature & Stamp of Issuing Authority

# KARACHI METROPOLITAN CORPORATION

OFFICE OF THE DIRECTOR SAFARI PARK, CS&R KMC

Name of Work: Providing & Laying Stone Pitching in Road Shoulders from Safari Gate to White House at Safari Park, CS&R, KMC

Tender Reference No.

## (PART - A: ITEMS BASED ON SCHEDULE RATE)

S.No.	Description	Quantity	Rate in Figure	Rate in Words	Unit	Amount
1	Stone pitching i/c sub-base with hammer dressed stone on surface laid in courses i/c carriage of materials chains. Ch-8 P-32/23	2,52,000	5,377.63		%Cft.	1,35,51,628
2	Cement Pointing flush upto 20 height. (Ratio 1:3)	2,52,000	1,077.45		%Sft.	27,15,174
3	Filling, watering & remming earth in floor with new earth (Excavated from out side) lead upto one chain & lift upto 5 ft. Ch-1-P-4/22	2,52,000	3,630.0		%0Cft.	9,14,760
4	Excavation for Pipe line in trenches, & pits in soft soil i/c tremming & dressing sides to ture alignment & shape Leveling of bed of trenches to correct level & grade cutting jointing holes & disposal of surplus earth within a one chain as directed by the Engineer in charge. Proving fences, guards, lights, flags & temporary crossings for non-vehcular traffice where ever required lift up to 5ft & lead upto one chain (20 Sms) vol.III P/LIII Ch-	54,000	4,650.00		%0Cft.	2,51,100
5	P/L R.C.C pipe ASTM C-76-62 T/C 76-70 of class II wall B and fixing in trench i/c cutting, fitting and jointing with rubber ring i/c testing with water to specified pressure. vol III P/LIII Ch-II,P-17 B-1					
	12" Dia	3,200	412.00		P/Rft	13,18,400
6	P/F Precast Edage Block 3750 psi industrial made size 6" thick x 12" long & 12" high i/c the cost of cartage, excavation, form work, for haunching, 1450 psi lean concrete 2250 psi concrete for haunching 1:4 cement sand mortar. Ch.Highway works, Page 16/14	21,000	297.01		P/Rft	62,37,210
<b>Total Amount After 20% Below Rs.</b>						<b>1,99,90,617</b>

Signature & Stamp of Contractor

# KARACHI METROPOLITAN CORPORATION

## OFFICE OF THE EXECUTIVE ENGINEER (Civil) SAFARI PARK, CS&R KMC

Name of Work: Providing & Laying Stone Pitching in Road Shoulders from Safari Gate to White House at Safari Park, CS&R, KMC

Tender Reference No. \_\_\_\_\_

Estimated Cost:-19.99 Million

I/We hereby quoted as follows:

1	Part - A (Item Based on S/R) after 20% Below ( - ) Amounting to Rs.19,998,272/=	
	_____ % Above / Below S/Rate	
	Note	
	20% Below is the Maximum Calling on Schedule item CSR 2012 by the Authority	
	<b>GRAND TOTAL ( A ) Rs.</b>	

The total amount is Rs. \_\_\_\_\_ Rupees. \_\_\_\_\_

\_\_\_\_\_ for the complete job for all Schedule of Rates.

I/We have attached a pay order bearing No. \_\_\_\_\_ Dated. \_\_\_\_\_ Issue from \_\_\_\_\_  
(Bank Name)

Bank Amounting to Rs. \_\_\_\_\_ = as per NIT.

Time Limit: 180 Days

Penalty Per Day: Rs. 3,000/=


**NOTE:**


- \* Tender must be quoted in figure & in word both otherwise liable to be cancelled.
- \* All over writing & correction (if any) must be initiated & stamped by the bidder.
- \* 2% earnest money call deposit (in shape of pay order as specified against each above must be accompanied with the tender which shall remain valid for a period of 28 days beyond the validity for a bid .The bid security shall be released to the unsuccessful bidders once the contract has been signed with the successful bidder or the validity period has expired .
- \* In case a bidder submit a seriously unbalanced bid then he may be required to deposit extra performance security to a level sufficient to protect the agency against financial loses or as determined and asked by the procuring agency, failing which his bid security will be forfeited.
- \* The bidder shall have to submit proof/reference to the effect that he has already carried out work of similar nature during last 5 years.
- \* The bidder shall be required to furnish Bank Certificate confirming therein that he is maintaining a sound account duly supported with Bank Statement.


Signature of the Contractor with Stamp

Address: \_\_\_\_\_

\_\_\_\_\_

  
Executive Engineer(Civil)  
Safari,CS&R,KMC

  
Director  
Safari,CS & R ,KMC

  
Director  
A&A,CS&R,KMC

# KARACHI METROPOLITAN CORPORATION

OFFICE OF THE DIRECTOR SAFARI PARK, CS&R KMC



Tender Reference No.

## BILL OF QUANTITIES

Name of Work: Providing & Laying Stone Pitching in Road Shoulders from Safari Gate to White House at Safari Park, CS&R, KMC

Estimated Cost:- 19.99 Million

Bid Security:-

Tender cost:- 3,000/=

### Note:

This Document Contains 02 pages excluding this page.

No. \_\_\_\_\_

Dated: \_\_\_\_\_

Issue to M/s. \_\_\_\_\_

P.O No. \_\_\_\_\_

Dated: \_\_\_\_\_

Bank: \_\_\_\_\_

Signature & Stamp of Issuing Authority

# KARACHI METROPOLITAN CORPORATION

OFFICE OF THE DIRECTOR SAFARI PARK, CS&R KMC

Name of Work: Providing & Laying Stone Pitching in Road Shoulders from Safari Gate to White House at Safari Park, CS&R, KMC

Tender Reference No.

## (PART - A: ITEMS BASED ON SCHEDULE RATE)

S.No.	Description	Quantity	Rate in Figure	Rate in Words	Unit	Amount
1	Stone pitching i/c sub base with hammer dressed stone on surface laid in courses i/c carriage of materials chains. Ch-8 P-32/23	2,52,000	5,377.63		%Cft.	1,35,51,628
2	Cement Pointing flush upto 20 height. (Ratio 1:3)	2,52,000	1,077.45		%Sft.	27,15,174
3	Filling, watering & ramming earth in floor with new earth (Excavated from out side) lead upto one chain & lift upto 5 ft. Ch-1-P-4/22	2,52,000	3,630.0		%0Cft.	9,14,760
4	Excavation for Pipe line in trenches. & pits in soft soil i/c tremming & dressing sides to ture alignment & shape Leveling of bed of trenches to correct level & grade cutting jointing holes & disposal of surplus earth within a one chain as directed by the Engineer in charge. Proving fences, guards, lights, flags & temporary crossings for non-vehetular traffice where ever required lift up to 5ft & lead upto	54,000	4,650.00		%0Cft.	2,51,100
5	P/L R.C.C pipe ASTM C-76-62 T/C 76-70 of class II wall B and fixing in trench i/c cutting, fitting and jointing with rubber ring i/c testing with water to specified pressure. vol III P-III Ch-II, P-17 B-1	3,200	412.00		P/Rft	13,18,400
6	P/F Precast Edge Block 3750 psi industrial made size 6" thick x 12" long & 12" high i/c the cost of cartage, excavation, form work, for haunching. 1450 psi lean concrete 2250 psi concrete for haunching 1:4 cement sand mortar. Ch.Highway works. Page 16/14	21,000	297.01		P/Rft	62,37,210
<b>Total Amount After 20% Below Rs.</b>						<b>1,99,90,617</b>

Signature & Stamp of Contractor

# KARACHI METROPOLITAN CORPORATION

## OFFICE OF THE EXECUTIVE ENGINEER (Civil) SAFARI PARK, CS&R KMC

Name of Work: Providing & Laying Stone Pitching in Road Shoulders from Safari Gate to White House at Safari Park, CS&R, KMC

Tender Reference No. \_\_\_\_\_

Estimated Cost:-19.99 Million

I/We hereby quoted as follows:

1	Part - A (Item Based on S/R) after 20% Below (-) Amounting to Rs.19,998,272/=	
	% Above - Below S/R rate	
	Note	
	20% Below is the Maximum Calling on Schedule item CSR 2012 by the Authority	
<b>GRAND TOTAL (A) RS.</b>		

The total amount is Rs. \_\_\_\_\_ Rupees.

\_\_\_\_\_ for the complete job for all Schedule of Rates.

I/We have attached a pay order bearing No. \_\_\_\_\_ Dated \_\_\_\_\_ Issue from \_\_\_\_\_  
(Bank Name)

Bank Amounting to Rs. \_\_\_\_\_ /=- as per NIT.

Time Limit: 180 Days

Penalty Per Day: Rs. 3,000/=


**NOTE:**

- \* Tender must be quoted in figure & in word both otherwise liable to be cancelled.
- \* All over writing & correction (if any) must be initiated & stamped by the bidder.
- \* 2% earnest money call deposit (in shape of pay order as specified against each above must be accompanied with the tender which shall remain valid for a period of 28 days beyond the validity for a bid .The bid security shall be released to the unsuccessful bidders once the contract has been signed with the successful bidder or the validity period has expired .
- \* In case a bidder submit a seriously unbalanced bid then he may be required to deposit extra performance security to a level sufficient to protect the agency against financial loses or as determined and asked by the procuring agency, failing which his bid security will be forfeited.
- \* The bidder shall have to submit proof/reference to the effect that he has already carried out work of similar nature during last 5 years.
- \* The bidder shall be required to furnish Bank Certificate confirming therein that he is maintaining a sound account duly supported with Bank Statement.

Signature of the Contractor with Stamp

Address: \_\_\_\_\_

\_\_\_\_\_

  
Executive Engineer(Civil)  
Safari,CS&R,KMC

  
Director  
Safari,CS & R ,KMC

  
Director  
A&A,CS&R,KMC