

TENDER DOCUMENTS

**P/L 4" DIA 3" DIA BY PASS LINE IN
BLOCK 'L' FOR IMPROVEMENT OF
WATER SUPPLY IN NORTH NAZIMABAD**


KARACHI WATER & SEWERAGE BOARD

BIDDING DATA

- (a) Name of Procuring Agency Karachi Water & Sewerage Board
- (b) Brief Description of Work P/L 4" DIA 3" DIA BY PASS LINE IN BLOCK 'L' FOR IMPROVEMENT OF WATER SUPPLY IN NORTH NAZIMABAD.
- (c) Procuring Agency Address North Nazimabad (Water),KW&SB
- (d) Estimate Cost On item rate basis
- (e) Amount of Bid Security 2% of Bid amount
- (f) Period of Bid Validity 90 Days
- (g) Security Deposit (including Bid Security) 10%
- (h) Venue, Time and Date of Bid Opening The Tender in sealed cover super scribed with the name of the work should be dropped in the Tender Box kept in office of the Chief Engineer (IP&D) at Block-"E" 9th Mile Karsaz, Karachi on 18-06-2014 at 2:00 PM by Procurement Committee
- (i) Deadline for submission of Bid along with time. 18-06-2014 2:00 P.M
- (j) Time for completion from written order commence 20 Days
- (k) Liquidity damage 0.5% of Bid Cost per day of delay
- (l) Bid issued to Firm M/s. _____
- (m) Deposit Receipt No. & Date _____

Amount:

Rs. 1,000/=


Executive Engineer (Water)
North Nazimabad ,KW&SB,

Authority Issuing Bidding Document

OFFICE OF THE EXECUTIVE ENGINEER (Water) NORTH NAZIMABAD DIVISION KW&SB
ST-1 Block-C Near KDA Round About North Nazimabad Karachi

NAME OF WORK: P/L 4" DIA 3" DIA BY PASS LINE IN BLOCK 'L' FOR IMPROVEMENT OF WATER SUPPLY IN NORTH NAZIMABAD

Estimate: On Item Rate Basis

Penalty: 500/- Per Day


Tender Cost: Rs.1,000/-

Date of Receiving 18-06-2014 at 2:00 P.M and Opened at 18-06-2014 2:30 P.M in the office of Chief Engineer (IP&D),
 Block E 9th Mile Shahrah-e-Faisal Karachi

S.No	Description of Work	Quantity	Rate		Per Unit/Item	Amount In Rupees
			Rupees in Figures	Rs in Words		
1	Dismantling & Removing road matalling	8525.00 Cft			% Cft	
2	Excavation for pipe line intrenches and pits in all kinds of soil murum i/c dressing side to ture alignment and shape leveling of bed of tranches to correct level & good cutting joint hole & disposal of surplus earth within a one chain as desired by Engineer Incharge providing fence guards lights flag and temporary corrsing for non vehicular t'afice where every request lift upto 5' ft (1.52m) and lead upto one chain (3.5m)	21312.50 Cft			% 0 Cft	
3	Providing Laying UPVC Pipes of Class "C" fixing in trenches i/c cutting fitting and jointing with Z Joint with one rubber ring i/c testing with water to a head 91.5 meter or 300 ft	790.00 Rft			P/Rft	
	80 MM	915.00 Rft			P/Rft	
	100 MM					
4	C.I sluice valve heavy pattern test pressure 21.0Kg/sq or 300 lb/sq inch (imported)				Each	
	3" Dia	3.00 Nos			Each	
	4" Dia	3.00 Nos				
5	Fixing of slice valve with 2 cost iron picese one flanged and other with socket including the cost of nuts bolts and rubber packing, labour etc.Complete.				Each	
	3" Dia	3.00 Nos			Each	
	4" Dia	3.00 Nos				
6	Repair of leaking joints (External Vatta) of PRCC pipe i/c cost of excavat on, labour, sealing materia de-watering refilling of excavated stuff				Each	
	15" dia	9.00 Nos			Each	
	12" dia	7.00 Nos				

S.No	Description of Work	Quantity	Rate		Per Unit/Item	Amount In Rupees
			Rupees in Figures	Rs in Words		
7	Providing chamber inside dimension with 24"x24" C.I cover & frame (weight-65 Kg) fixed on RCC 1:2:4 slab 6" thick with steel 1/2" Dia main bars 06" C/C & 1/4" dia @ 8" C.C distribution bars 6" thick C.C 1:3:6 block masonry wall set in 1:6 C.M 6" thick 1:4:8 in foundation 2" thick C.C 1:2:4 flooring 1/2" thick C.Plaster 1:6 to all in side wall surface top i/c Providing / fixing foot rest and every one foot of depth beyond 2 1/2 depth i/c curing excavation back filling and disposal of surplus earth 4' x 4' x 4' 6' x 6' x 6'	2.00 Nos 4.00 Nos			Each Each	
8	Full hire charges of pumping set per day inclusive of the wages of driver and assistant, fuel and electric energy plate form required for placing the pump etc, at lower depth with suction and delivery pipe for pumping out water pound at various depth from trenches including the cost of erection and dismantling after completion of job of 10 HP pumping cut water from 10 ft deep trenches.	21.00 Day			Each	
9	P/F Split Collar 9" wide on AC pipe fabricated with 1/4" thick MS Plate weighing as mentioned against each item i/c the cost of 4 nos 1/4" thick MS flanges, nut bolts, rubber packing labour and sealling material etc complete 3" dia (7.77 Kg) 4" Dia (8.68 Kg)	4.00 Nos 6.00 Nos			Each Each	
10	Providing and fixing (0-9") 3/8" thick M.S neck to existing M.S Pipe or to a split collar tee having a i/c the cost of fabrication and welding to the split collar tee 3" dia (4.773 Kg) 4" Dia (6.665 Kg)	4.00 Nos 6.00 Nos			Each Each	
11	Providing and fixing MS bend fabricated with 3/8" thick MS plate having an outer length and total weight as mentioned. 3" Dia (3.571 Kg) 4" Dia (9.349 Kg)	1.00 Nos 3.00 Nos			Each Each	

S.No	Description of Work	Quantity	Rate		Per Unit/Item	Amount In Rupees
			Rupees in Figures	Rs in Words		
12	Refilling the excavated stuff in trenches 6" thick layer i/c watering ramming to full compaction etc complete	21193.94 Cft			% 0 Cft	

 Total Rs _____
Executive Engineer (Water)
North Nazimabad, KW&SB

I/we hereby quoted Rs _____ in word (

NOTE: All existing SPPRA Rule will be abide.

Contractor Signature

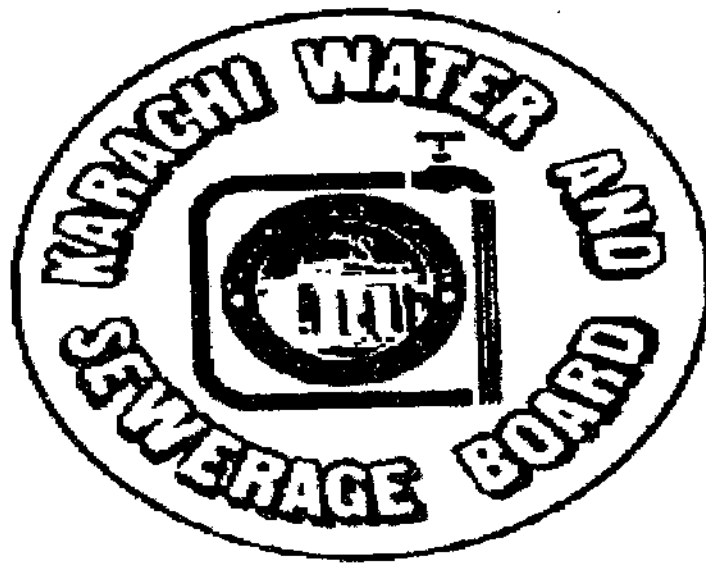
Address _____

Cell No. _____

Seal.

Evaluation Criteria of the tender up to 2.5 million

- 1. Contractor having NTN and copy must be available with tender in case of supply item the GST registration must be available with tender.**
- 2. The Pay Order of Bid security as mentioned in NIT and must be available with tender.**
- 3. Experience certificate of similar nature of job must be available with the tender.**
- 4. Similar nature of Bidding Document form upto 2.5 Million of SPPRA with filling Bidding Data & Contractor Data must be available with BOQ otherwise the tender cannot be accepted**
- 5. Rate must be quoted in figure & Words by contractor.**
- 6. Bid shall be properly signed by contractor with stamped, address and contact No. #**
- 7. If the estimate are based on Sch:2012 and premium can be allowed within allowable limit.**
- 8. If the estimate are preparing on M.R and 10% profit is included in R.A & excess quoted cost cannot be concenter.**
- 9. Conditional bid cannot be accepted.**
- 10. Bid must be submitted in sealed cover.**
- 11. Contractor firm cannot be debarred in KW&SB**



TENDER DOCUMENTS

**EMERGENT LEAKAGES OF 15" DIA & 12"
DIA PRCC PIPE IN SHAHRAH-E-NOOR
JEHAN PEOPLES CHOWRANGI TO
NAMAK BANK & DIFFERENT PLACES OF
NORTH NAZIMABAD**


KARACHI WATER & SEWERAGE BOARD

BIDDING DATA

- (a) Name of Procuring Agency Karachi Water & Sewerage Board
- (b) Brief Description of Work EMERGENT LEAKAGES OF 15" DIA & 12" DIA PRCC PIPE IN SHAHRAH-E-NOOR JEHAN PEOPLES CHOWRANGI TO NAMAK BANK & DIFFERENT PLACES OF NORTH NAZIMABAD.
- (c) Procuring Agency Address North Nazimabad (Water),KW&SB
- (d) Estimate Cost On item rate basis
- (e) Amount of Bid Security 2% of Bid amount
- (f) Period of Bid Validity 90 Days
- (g) Security Deposit (including Bid Security) 10%
- (h) Venue, Time and Date of Bid Opening The Tender in sealed cover super scribed with the name of the work should be dropped in the Tender Box kept in office of the Chief Engineer (IP&D) at Block-"E" 9th Mile Karsaz, Karachi on 18-06-2014 at 2:00 PM by Procurement Committee
- (i) Deadline for submission of Bid along with time. 18-06-2014 2:00 P.M
- (j) Time for completion from written order commence 20 Days
- (k) Liquidity damage 0.5% of Bid Cost per day of delay
- (l) Bid issued to Firm M/s. _____
- (m) Deposit Receipt No. & Date _____

Amount:

Rs. 1,000/=


Executive Engineer (Water)
North Nazimabad ,KW&SB,

Authority Issuing Bidding Document

OFFICE OF THE EXECUTIVE ENGINEER (Water) NORTH NAZIMABAD DIVISION KW&SB
ST-1 Block-C Near KDA Round About North Nazimabad Karachi

NAME OF WORK: EMERGENT LEAKAGES OF 15" DIA & 12" DIA PRCC PIPE IN SHAHRAH-E-NOOR JEHAN PEOPLES CHOWRANGI TO NAMAK BANK & DIFFERENT PLACES OF NORTH NAZIMABAD

Estimate: On Item Rate Basis

Penalty: 500/- Per Day

Tender Cost: Rs.1,000/-

Date of Receiving 18-06-2014 at 2:00 P.M and Opened at 18-06-2014 2:30 P.M in the office of Chief Engineer (IP&D), Block E 9th Mile Shahrah-e-Faisal Karachi

S.No	Description of Work	Quantity	Rate		Per Unit/Item	Amount In Rupees
			Rupees in Figures	Rs in Words		
1	Dismantling & Removing road matalling	7445.00 Cft			% Cft	
2	Excavation for pipe line intrenches and pits in all kinds of soil murum i/c dressing side to ture alignment and shape leveling of bed of tranches to correct level & good cutting joint hole & disposal of surplus earth within a one chain as desired by Engineer Incharge providing fence guards lights flag and temporary corrsing for non vehicular traffice where every request 1 ft upto 5' ft (1.52m) and lead upto one chain (3.5m)	18612.50 Cft			% D Cft	
3	Providing Laying UPVC Pipes of Class "C" fixing in trenches i/c cutting fitting and jointing with Z Joint with one rubber ring i/c testing with water to a head 91.5 meter or 300 ft	685.00 Rft			P/Rft	
	80 MM	720.00 Rft			P/Rft	
	100 MM					
4	P/L & fixing in trench i/c fitting jointing & testing etc complete in all respect the high density polyeth ene PE pipe (HDPE-100) for w/s confirming ISO 4427/Din 8074/8075 B.s 3580 & PSI 3051 (PN-10) 160 MM	84 Rft			P/Rft	
5	C.I slice valve heavy pattern test pressure 21.0Kg/sq or 300 lb/sq ir.ch (imported)	4.00 Nos			Each	
	3" Dia	3.00 Nos			Each	
	4" Dia					
6	Fixing of slice valve with 2 cost iron picese one flanged and other with socket including the cost of nuts bolts and rubber packing, labour etc.Complete.	4.00 Nos			Each	
	3" Dia	3.00 Nos			Each	
	4" Dia					

S.No	Description of Work	Quantity	Rate		Per Unit/Item	Amount In Rupees
			Rupees In Figures	Rs in Words		
7	Repair of leaking joints (External Vatta) of PRCC pipe i/c cost of excavation. labour, sealing material de-watering refilling of excavated stuff	9.00 Nos			Each	
	15" dia	6.00 Nos			Each	
8	Providing chamber inside dimension with 24"x24" C.I cover & frame (weight-65 Kg) fixed on RCC 1:2:4 slab 6" thick with steel 1/2" Dia main bars 06" C/C & 1/4" dia @ 8" C.C distribution bars 6" thick C.C 1:3:6 block masonry wall set in 1:6 C.M 6" thick 1:4:8 in foundation 2" thick C.C 1:2:4 flooring 1/2" thick C.Plaster 1:6 to all in side wall surface top i/c Providing / fixing foot rest and every one foot of depth beyond 2 1/2 depth i/c curing excavation back filling and disposal of surplus earth	3.00 Nos			Each	
	4' x 4' x 4'	4.00 Nos			Each	
9	Full hire charges of pumping set per day inclusive of the wages of driver and assistant, fuel and electric energy plate form required for placing the pump etc, at lower depth with suction and delivery pipe for pumping out water pound at various depth from trenches including the cost of erect on and dismantling after completion of job of 10 HP pumping out water from 10 ft deep trenches.	23.00 Day			Each	
		6' x 6' x 6'				
10	P/F Split Collar 9" wide on AC pipe fabricated with 1/4" thick MS Plate weighing as mentioned against each item i/c the cost of 4 nos 1/4" thick MS flanges, nut bolts, rubber packing labour and sealing material etc complete	4.00 Nos			Each	
	3" dia (7.77 Kg)	6.00 Nos			Each	
11	Providing and fixing (0-9") 3/8" thick M.S neck to existing M.S Pipe or to a split collar tee having a i/c the cost of fabrication and welding to the split collar tee	4.00 Nos			Each	
	3" dia (4.773 Kg)	6.00 Nos			Each	
	4" Dia (6.665 Kg)					

S.No	Description of Work	Quantity	Rate		Per Unit/Item	Amount In Rupees
			Rupees in Figures	Rs in Words		
12	Providing and fixing MS bend fabricated with 3/8" thick MS plate having an outer length and total weight as mentioned. 3" Dia (3.571 Kg)	1.00 Nos			Each	
		3.00 Nos			Each	
	4" Dia (9.349 Kg)					
13	Refilling the excavated stuff in trenches 6" thick layer i/c watering ramming to full compaction etc complete	18498.24 Cft			% 0 Cft	

Total Rs _____


Executive Engineer (Water)
North Nazimabad, KW&SB

I/we hereby quoted Rs. _____ in word (

NOTE: All existing SPPRA Rule will be abide.

Contractor Signature _____

Address _____

Cell No. _____

Seal.

Evaluation Criteria of the tender up to 2.5 million

- 1. Contractor having NTN and copy must be available with tender in case of supply item the GST registration must be available with tender.**
- 2. The Pay Order of Bid security as mentioned in NIT and must be available with tender.**
- 3. Experience certificate of similar nature of job must be available with the tender.**
- 4. Similar nature of Bidding Document form upto 2.5 Million of SPPRA with filling Bidding Data & Contractor Data must be available with BOQ otherwise the tender cannot be accepted**
- 5. Rate must be quoted in figure & Words by contractor.**
- 6. Bid shall be properly signed by contractor with stamped, address and contact No. #**
- 7. If the estimate are based on Sch:2012 and premium can be allowed within allowable limit.**
- 8. If the estimate are preparing on M.R and 10% profit is included in R.A & excess quoted cost cannot be concenter.**
- 9. Conditional bid cannot be accepted.**
- 10. Bid must be submitted in sealed cover.**
- 11. Contractor firm cannot be debarred in KW&SB**