

EXECUTIVE ENGINEER, (CIVIL) SHAH FAISAL ZONE
DISTRICT MUNICIPAL CORPORATION (KORANGI).

Bid Document:-

S. No. 02

Name of work:- **Improvement/Patch of Roads UC, No-2 Shah Faisal Zone DMC**
Korangi.

Estimate Cost:- **Rs. 9,36,882/- + O/R** Cost of Bidding Document Rs. 2000/-
Bid Security 2% of Total Bid amount.

S. No.	Description	Quantity	Rate	Unit	Amount (Rs)
1.	Earth work excavation undressed lead up to a single throw of Kasi Phawarah or shavel in ordinary soil.	3900 cft	Rs. 1361.25	%Cft	5,309/-
2.	Cartage of 100 cft/5 ton of all material likes on aggregates spawl coal lime system etc complete	3900 cft	Rs. 579.41	% cft	22,597/-
3.	P/L base course aggregate CBR 80 % its as per (AASHTO) Standard size specification i/c compesting to required density by approved mechanical means (Vibrating ruler, Road packer & smooth wheel roller) i/c watering with all needs and lift completed.	4950 cft	Rs. 5542.24	% cft	2,74,341/-
4.	Prime coat providing and spraying prime coat with medium curing asphalt of grade 60/70 prime coat shall be penetration used as of 11 Liters / 100 sft. At 70 degree centigrade mixed with adequate quantity of kerosene oil..... Materials and methodology shall fully comply the tests etc..... as directed by Engineer Incharge.	13200 sft	Rs. 7.00	P/ Sft	92,400/-
5.	Providing 1" (Consolidated) Premixed carpet in proper chamber i/c grade supplying 15 Cft bajri 5 Cft hill sand of approved quality and grade between of 80/100 penetration i/c mixing in mechanical mixture in required proportion i/c heating materials and cleaning the road surface (hill sand 3 Cft for mixing 3.0 Cft for desalting (rate i/c of all cost of materials T & P and carriage upto 3 chain.	13200 sft	Rs. 4107.84	% sft	5,42,235/-

6.	P/L single layer of 3cm compacting thickness wearing course on the following job mix formula: Asphalt (60/70 grade) content weight 4.5 % of Total mix. i/c rolling and finishing etc complete.	1000 sft	O/R	% Sft	
----	--	----------	-----	-------	--

Time limit 60 Day penalty Rs. 2000/- P. Day.

I/We hereby quoted _____% above / below the Sch: of Rate, Plus open rates.

Cost of schedule items


(i/c quoted premium Rs:.....

Cost of Offer Rates Rs:

Total Bid Amount... Rs:.....

Name of Contractor. _____ Signature. _____

Address. _____


Executive Engineer, (Civil)
Shah Faisal Zone
DMC Korangi.

Assistant Executive Engineer, (B&R)
Shah Faisal Zone
DMC Korangi.

EXECUTIVE ENGINEER, (CIVIL) SHAH FAISAL ZONE
DISTRICT MUNICIPAL CORPORATION (KORANGI).

Bid Document:-

S. No. 03

Name of work:- **Patch Repair of Roads UC, No-3 Shah Faisal Zone DMC**
Korangi.

Estimate Cost:- **Rs. 9,36,864/-+O/R Cost of Bidding Document Rs. 2000/-**
Bid Security 2% of Total Bid amount.

S. No.	Description	Quantity	Rate	Unit	Amount (Rs)
1.	Earth work excavation undressed lead up to a single throw of Kasi Phawarah or shavel in ordinary soil.	3900 cft	Rs. 1361.25	%Cft	5,309/-
2.	Cartage of 100 cft/5 ton of all material likes on aggregates spawl coal lime system etc complete	3900 cft	Rs. 579.41	% cft	22,597/-
3.	P/L base course aggregate CBR 80 % its as per (AASHTO) Standard size specification i/c compesting to required density by approved mechanical means (Vibrating ruler, Road packer & smooth wheel roller) i/c watering with all needs and lift completed.	4950 cft	Rs. 5542.24	% cft	2,74,341/-
4.	Prime coat providing and spraying prime coat with medium curing asphalt of grade 60/70 prime coat shall be penetration used as of 11 Liters / 100 sft. At 70 degree centigrade mixed with adequate quantity of kerosene oil..... Materials and methodology shall fully comply the tests etc..... as directed by Engineer incharge.	13200 sft	Rs. 7.00	P/ Sft	92,400/-
5.	Providing 1" (Consolidated) Premixed carpet in proper chamber i/c grade supplying 15 Cft bajri 5 Cft hill sand of approved quality and grade between of 80/100 penetration i/c mixing in mechanical mixture in required proportion i/c heating materials and cleaning the road surface (hill sand 3 Cft for mixing 3.0 Cft for desalting (rate i/c of all cost of materials T & P and carriage upto 3 chain.	13200 sft	Rs. 4107.84	% sft	5,42,235/-

6.	P/L. single layer of 3cm compacting thickness wearing course on the following job mix formula: Asphalt (60/70 grade) content weight 4.5 % of Total mix. i/c rolling and finishing etc complete.	1000 sft	O/R	% Sft	
----	---	----------	-----	-------	--

Time limit 60 Day penalty Rs. 2000/- P. Day.

I/We hereby quoted _____% above / below the Sch: of Rate, Plus open rates.

Cost of schedule items


(i/c quoted premium Rs:.....

Cost of Offer Rates Rs:

Total Bid Amount... Rs:.....

Name of Contractor. _____ Signature. _____

Address. _____


Executive Engineer, (Civil)
Shah Faisal Zone
DMC Korangi.

Assistant Executive Engineer, (B&R)
Shah Faisal Zone
DMC Korangi.

63

EXECUTIVE ENGINEER, (CIVIL) SHAH FAISAL ZONE
DISTRICT MUNICIPAL CORPORATION (KORANGI).

Bid Document:-

S. No. 01

Name of work:- Improvement of Roads UC, No-1 Shah Faisal Zone DMC Korangi.

Estimate Cost:- Rs. 9,42,675/- + O/R Cost of Bidding Document Rs. 2000/-
Bid Security 2% of Total Bid amount.

S. No.	Description	Quantity	Rate	Unit	Amount (Rs)
1.	Earth work excavation undressed lead up to a single throw of Kasi Phawarah or shavel in ordinary soil.	3900 cft	Rs. 1361.25	%Cft	5,309/-
2.	Cartage of 100 cft/5 ton of all material likes on aggregates spawl coal lime system etc complete	4900 cft	Rs. 579.41	% cft	28,391/-
3.	P/L base course aggregate CBR 80 % its as per (AASHTO) Standard size specification i/c compesting to required density by approved mechanical means (Vibrating ruler, Road packer & smooth wheel roller) i/c watering with all needs and lift completed.	4950 cft	Rs. 5542.24	% cft	2,74,341/-
4.	Prime coat providing and spraying prime coat with medium curing asphalt of grade 60/70 prime coat shall be penetration used as of 11 Liters / 100 sft. At 70 degree centigrade mixed with adequate quantity of kerosene oil..... Materials and methodology shall fully comply the tests etc..... as directed by Engineer Incharge.	13200 sft	Rs. 7.00	P/ Sft	92,400/-
5.	Providing 1" (Consolidated) Premixed carpet in proper chamber i/c grade supplying 15 Cft bajri 5 Cft hill sand of approved quality and grade between of 80/100 penetration i/c mixing in mechanical mixture in required proportion i/c heating materials and cleaning the road surface (hill sand 3 Cft for mixing 3.0 Cft for desalting (rate i/c of all cost of materials T & P and carriage upto 3 chain.	13200 sft	Rs. 4107.84	% sft	5,42,234/-

6.	P/L single layer of 3cm compacting thickness wearing course on the following job mix formula: Asphalt (60/70 grade) content weight 4.5 % of Total mix. i/c rolling and finishing etc complete.	2000 sft	O/R	% Sft	
----	--	----------	-----	-------	--

Time limit 60 Day penalty Rs. 2000/- P. Day.

I/We hereby quoted _____ % above / below the Sch: of Rate, Plus open rates.

Cost of schedule items


(i/c quoted premium Rs:.....

Cost of Offer Rates Rs:

Total Bid Amount... Rs:.....

Name of Contractor. _____ Signature. _____

Address. _____


Executive Engineer, (Civil)
Shah Faisal Zone
DMC Korangi.

Assistant Executive Engineer, (B&R)
Shah Faisal Zone
DMC Korangi.

64

EXECUTIVE ENGINEER, (CIVIL) SHAH FAISAL ZONE
DISTRICT MUNICIPAL CORPORATION (KORANGI).

Bid Document:-

S. No. 04

Name of work:- Patch Repair of Roads in UC, No-4 Shah Faisal Zone DMC
Korangi.

Estimate Cost:- Rs. 9,36,880/- + O/R Cost of Bidding Document Rs. 2000/-
Bid Security 2% of Total Bid amount.

S. No.	Description	Quantity	Rate	Unit	Amount (Rs)
1.	Earth work excavation undressed lead up to a single throw of Kasi Phawarah or shovel in ordinary soil.	3900 cft	Rs. 1361.25	%Cft	5,309/-
2.	Cartage of 100 cft/5 ton of all material likes on aggregates spawl coal lime system etc complete	3900 cft	Rs. 579.41	% cft	22,597/-
3.	P/L base course aggregate CBR 80 % its as per (AASHTO) Standard size specification i/c compesting to required dens ty by approved mechanical means (Vibrating ruler, Road packer & smooth wheel roller) i/c watering with all needs and lift completed.	4950 cft	Rs. 5542.24	% cft	2,74,341/-
4.	Prime coat providing and spraying prime coat with medium curing asphalt of grade 60/70 prime coat shall be penetration used as of 11 Liters / 100 sft. At 70 degree centigrade mixed with adequate quantity of kerosene oil..... Materials and methodology shall fully comply the tests etc..... as directed by Engineer Incharge.	13200 sft	Rs. 7.00	P/ Sft	92,400/-
5.	Providing 1" (Consolidated) Premixed carpet in proper chamber i/c grade supplying 15 Cft bajri 5 Cft hill sand of approved quality and grade between of 80/100 penetration i/c mixing in me:hanical mixture in required proportion i/c heating materials and cleaning the road surface (hill sand 3 Cft for mixing 3.0 Cft for desalting (rate i/c of all cost of materials T & P and carriage upto 3 chain.	13200 sft	Rs. 4107.84	% sft	5,42,235/-

6.	P/L single layer of 3cm compacting thickness wearing course on the following job mix formula: Asphalt (60/70 grade) content weight 4.5 % of Total mix. i/c rolling and finishing etc complete.	1020 sft	O/R	% Sft	
----	--	----------	-----	-------	--

Time limit 60 Day penalty Rs. 2000/- P. Day.

I/We hereby quoted _____ % above / below the Sch: of Rate, Plus open rates.

Cost of schedule items


(i/c quoted premium Rs:.....

Cost of Offer Rates Rs:

Total Bid Amount... Rs:.....

Name of Contractor. _____ Signature. _____

Address. _____


Executive Engineer, (Civil)
Shah Faisal Zone
DMC Korangi.

Assistant Executive Engineer, (B&R)
Shah Faisal Zone
DMC Korangi.

(65)

EXECUTIVE ENGINEER, (CIVIL) SHAH FAISAL ZONE
DISTRICT MUNICIPAL CORPORATION (KORANGI).

Bid Document:-

S. No. 07

Name of work:- Patch Repair of Roads in UC, No-7 Shah Faisal Zone DMC
Korangi.

Estimate Cost:- Rs. 9,38,490/- + O/R Cost of Bidding Document Rs. 2000/-
Bid Security 2% of Total Bid amount.

S. No.	Description	Quantity	Rate	Unit	Amount (Rs)
1.	Earth work excavation undressed lead up to a single throw of Kasi Phawarah or shavel in ordinary soil.	4125 cft	Rs. 1361.25	%Cft	5,615/-
2.	Cartage of 100 cft/5 ton of all material lkes on aggregates spawl coal lime system etc complete	4125 cft	Rs. 579.41	% cft	23,901/-
3.	P/L base course aggregate CBR 80 % its as per (AASHTO) Standard size specification i/c compesting to required density by approved mechanical means (Vibrating ruler, Road packer & smooth wheel roller) i/c watering with all needs and lift completed.	4950 cft	Rs. 5542.24	% cft	2,74,341/-
4.	Prime coat providing and spraying prime coat with medium curing asphalt of grade 60/70 prime coat shall be penetration used as of 11 Liters / 100 sft. At 70 degree centigrade mixed with adequate quantity cf kerosene oil..... Materials and methodology shall fully comply the tests etc..... as directed by Engineer Incharge.	13200 sft	Rs. 7.00	P/ Sft	92,400/-
5.	Providing 1" (Consolidated) Premixed carpet in proper chamber i/c grade supplying 15 Cft bajri 5 Cft hill sand of approved quality and grade between of 80/100 penetration i/c mixing in mechanical mixture in required proportion i/c heating materials and cleaning the road surface (hill sand 3 Cft for mixing 3.0 Cft for desalting (rate i/c of all cost of materials T & P and carriage upto 3 chain.	13200 sft	Rs. 4107.84	% sft	5,42,235/-

6.	P/L single layer of 3cm compacting thickness wearing course on the following job mix formula: Asphalt (60/70 grade) content weight 4.5 % of Total mix. i/c roll ng and finishing etc complete.	1000 sft	O/R	% Sft	
----	--	----------	-----	-------	--

Time limit 60 Day penalty Rs. 2000/- P. Day.

I/We hereby quoted _____% above / below the Sch: of Rate, Plus open rates.

Cost of schedule items

(i/c quoted premium Rs:.....

Cost of Offer Rates Rs:

Total Bid Amount... Rs:.....

Name of Contractor. _____ Signature. _____

Address. _____



Executive Engineer, (Civil)
Shah Faisal Zone
DMC Korangi.

Assistant Executive Engineer, (B&R)
Shah Faisal Zone
DMC Korangi.

EXECUTIVE ENGINEER, (CIVIL) SHAH FAISAL ZONE
DISTRICT MUNICIPAL CORPORATION (KORANGI).

66

Bid Document:-

S. No. 06

Name of work:- Patch Repair of Roads in UC, No-6 Shah Faisal Zone DMC
Korangi.

Estimate Cost:- Rs. 9,39,028/- + O/R Cost of Bidding Document Rs. 2000/-
Bid Security 2% of Total Bid amount.

S. No.	Description	Quantity	Rate	Unit	Amount (Rs)
1.	Earth work excavation undressed lead up to a single throw of Kasi Phawarah or shavel in ordinary soil.	4200 cft	Rs. 1361.25	%Cft	5,717/-
2.	Cartage of 100 cft/5 ton of all material likes on aggregates spawl coal lime system etc complete	4200 cft	Rs. 579.41	% cft	24,335/-
3.	P/L base course aggregate CBR 80 % its as per (AASHTO) Standard size specification i/c compesting to required density by approved mechanical means (Vibrating ruler, Road packer & smooth wheel roller) i/c watering with all needs and lift completed.	4950 cft	Rs. 5542.24	% cft	2,74,341/-
4.	Prime coat providing and spraying prime coat with medium curing asphalt of grade 60/70 prime coat shall be penetration used as of 11 Liters / 100 sft. At 70 degree centigrade mixed with adequate quantity of kerosene oil..... Materials and methodology shall fully comply the tests etc..... as directed by Engineer Incharge.	13200 sft	Rs. 7.00	P/ Sft	92,400/-
5.	Providing 1" (Consolidated) Premixed carpet in proper chamber i/c grade supplying 15 Cft bajri 5 Cft hill sand of approved quality and grade between of 80/100 penetration i/c mixing in mechanical mixture in required proportion i/c heating materials and cleaning the road surface (hill sand 3 Cft for mixing 3.0 Cft for desalting (rate i/c of all cost of materials T & P and carriage upto 3 chain.	13200 sft	Rs. 4107.84	% sft	5,42,235/-

6.	P/L single layer of 3cm compacting thickness wearing course on the following job mix formula: Asphalt (60/70 grade) content weight 4.5 % of Total mix. i/c rolling and finishing etc complete.	1000 sft	O/R	% Sft	
----	--	----------	-----	-------	--

Time limit 60 Day penalty Rs. 2000/- P. Day.

I/We hereby quoted _____ % above / below the Sch: of Rate, Plus open rates.

Cost of schedule items


(/c quoted premium Rs:.....

Cost of Offer Rates Rs:

Total Bid Amount... Rs:.....

Name of Contractor. _____ Signature. _____

Address. _____


Executive Engineer, (Civil)
Shah Faisal Zone
DMC Korangi.

Assistant Executive Engineer, (B&R)
Shah Faisal Zone
DMC Korangi.

EXECUTIVE ENGINEER, (CIVIL) SHAH FAISAL ZONE
DISTRICT MUNICIPAL CORPORATION (KORANGI).

Bid Document:-

S. No. 05

Name of work:- Patch Repair of Roads in UC, No-5 Shah Faisal Zone DMC
Korangi.

Estimate Cost:- Rs. 9,36,878/- + O/R Cost of Bidding Document Rs. 2000/-
Bid Security 2% of Total Bid amount.

S. No.	Description	Quantity	Rate	Unit	Amount (Rs)
1.	Earth work excavation undressed lead up to a single throw of Kasi Phawarah or shavel in ordinary soil.	3900 cft	Rs. 1361.25	%Cft	5,309/-
2.	Cartage of 100 cft/5 ton of all material likes on aggregates spawl coal lime system etc complete	3900 cft	Rs. 579.41	% cft	22,597/-
3.	P/L base course aggregate CBR 80 % its as per (AASHTO) Standard size specification i/c compesting to required density by approved mechanical means (Vibrating ruler, Road packer & smooth wheel roller) i/c watering with all needs and lift completed.	4950 cft	Rs. 5542.24	% cft	2,74,341/-
4.	Prime coat providing and spraying prime coat with medium curing asphalt of grade 60/70 prime coat shall be penetration used as of 11 Liters / 100 sft. At 70 degree centigrade mixed with adequate quantity of kerosene oil..... Materials and methodology shall fully comply the tests etc..... as directed by Engineer Incharge.	13200 sft	Rs. 7.00	P/ Sft	92,400/-
5.	Providing 1" (Consolidated) Premixed carpet in proper chamber i/c grade supplying 15 Cft bajri 5 Cft hill sand of approved quality and grade between of 30/100 penetration i/c mixing in mechanical mixture in required proportion i/c heating materials and cleaning the road surface (hill sand 3 Cft for mixing 3.0 Cft for desalting (rate i/c of all cost of materials T & P and carriage upto 3 chain.	13200 sft	Rs. 4107.84	% sft	5,42,235/-

6.	P/L single layer of 3cm compacting thickness wearing course on the following job mix formula: Asphalt (60/70 grade) content weight 4.5 % of Total mix. i/c rolling and finishing etc complete.	1040 sft	O/R	% Sft	
----	--	----------	-----	-------	--

Time limit 60 Day penalty Rs. 2000/- P. Day.

I/We hereby quoted _____% above / below the Sch: of Rate, Plus open rates.

Cost of schedule items


(i/c quoted premium Rs:.....

Cost of Offer Rates Rs:

Total Bid Amount... Rs:.....

Name of Contractor. _____ Signature. _____

Address. _____


Executive Engineer, (Civil)
Shah Faisal Zone
DMC Korangi.

Assistant Executive Engineer, (B&R)
Shah Faisal Zone
DMC Korangi.

EXECUTIVE ENGINEER, (CIVIL) SHAH FAISAL ZONE
DISTRICT MUNICIPAL CORPORATION (KORANGI).

68

Bid Document:-

S. No. 08

Name of work:- Construction of 2 dust bin UC No-1 Shah Faisal Zone DMC Korangi.Estimate Cost:- Rs. 8,96,050/- Cost of Bidding Document Rs. 2000/-
Bid Security 2% of Total Bid amount.

S. No.	Description	Quantity	Rate	Unit	Amount (Rs)
1.	Excavation in foundation of Building bridges and other structure i/c dagbelling dressing refilling with excavated earth watering and ramming lead up to 5 feet a) In ordinary soil	800 cft	Rs. 3176.25	% Cft	2,541/-
2.	Cement concrete brick or stone ballasts 1.5 to 2" gauge (b). Ratio 1;4;8	1060 cft	Rs. 9416.28	% cft	99,813/-
3.	Reinforcement cement concrete work i/c all labor and material except the cost of steel reinforcement and its labor for bending and binding which will paid separately this rate also i/c all kinds of forms moulds lifting shuttering curing rendering (including screening and washing of shingle) a) R.C.C work in roof slab, beams columns raft, lintels and other structure members laid in situ or pre cast laid in situ or position complete in all respects 1;2;4	1088 cft	Rs. 337.00	P/Cft	3,66,656/-
4.	Fabrication of mild steel reinforcement for cement concrete i/c cutting, bending, laying in position making joints and fastening i/c cost of binding wire (also includes removal of rust from bars) B Using tor bars.	48.57 cwt	Rs. 5001.70	P/cwt	2,42,933/-
5.	Filling, watering and ramming earth in floors with new earth(excavated from outside) lead up to one chain lift up to 5 feet.	3000 Cft	Rs. 3630.00	% cft	10,890 /-
6.	P/L Stone pitching/stone soling including sub-base with hammer dressed stone on surface laid in course i/c carriage of materials chain etc.(32/23)	900cft	Rs. 5377.63	% cft	48,399/-
7.	Providing and laying topping cement concrete (1:2:4) including surface finishing and dividing into panel(42/16) (a) A" thick	1200 sft	Rs. 3275.50	% sft	39,306/-

8.	Cement plasters 1:4 up to 20 feet height (52/11) ½" thick	2720 sft	Rs. 2283.93	% sft	62,123/-
9.	Colour washing (54/25) (a) Two coat	2720 sft	Rs. 859.90	% sft	23,389/-

Time limit 60 Day penalty Rs. 2000/- P. Day.

I/We hereby quoted _____% above / below the Sch: of Rate, Plus open rates.

Cost of schedule items


(i/c quoted premium Rs:.....

Cost of Offer Rates Rs:

Total Bid Amount... Rs:.....

Name of Contractor. _____ Signature. _____

Address. _____


Executive Engineer, (Civil)
Shah Faisal Zone
DMC Korangi.

Assistant Executive Engineer, (B&R)
Shah Faisal Zone
DMC Korangi.

EXECUTIVE ENGINEER, (CIVIL) SHAH FAISAL ZONE
DISTRICT MUNICIPAL CORPORATION (KORANGI).

69

Bid Document:-

S. No. 09

Name of work:- Construction of 2 dust bin UC No-2 Shah Faisal Zone DMC Korangi.Estimate Cost:- Rs. 8,96,049/- Cost of Bidding Document Rs. 2000/-
Bid Security 2% of Total Bid amount.

S. No.	Description	Quantity	Rate	Unit	Amount (Rs)
1.	Excavation in foundation of Building bridges and other structure i/c dagbelling dressing refilling with excavated earth watering and ramming lead up to 5 feet a) In ordinary soil	800 cft	Rs. 3176.25	%o Cft	2,541/-
2.	Cement concrete brick or stone ballasts 1.5 to 2" gauge (b). Ratio 1;4;8	1060 cft	Rs. 9416.28	% cft	99,813/-
3.	Reinforcement cement concrete work i/c all labor and material except the cost of steel reinforcement and its labor for bending and binding which will paid separately this rate also i/c all kinds of forms moulds lifting shuttering curing rendering (including screening and washing of shingle) a) R.C.C work in roof slab, beams columns raft, lintels and other structure members laid in situ or pre cast laid in situ or position complete in all respects 1;2;4	1088 cft	Rs. 337.00	P/Cft	3,66,656/-
4.	Fabrication of mild steel reinforcement for cement concrete i/c cutting, bending, laying in position making joints and fastening i/c cost of binding wire (also includes removal of rust from bars) B Using tor bars.	48.57 cwt	Rs. 5001.70	P/cwt	2,42,933/-
5.	Filling, watering and ramming earth in floors with new earth(excavated from out side) lead up to one chain lift up to 5 feet.	3000 Cft	Rs. 3630.00	%o cft	10,890 /-
6.	P/L Stone pitching/stone soling including sub-base with hammer dressed stone on surface laid in course i/c carriage of materials chain etc.(32/23)	900cft	Rs. 5377.63	% cft	48,399/-
7.	Providing and laying topping cement concrete (1:2:4) including surface finishing and dividing into panel(42/16) (a) A" thick	1200 sft	Rs. 3275.50	% sft	39,306/-

8.	Cement plasters 1:4 up to 20 feet height (52/11) ½" thick	2720 sft	Rs. 2283.93	% sft	62,123/-
9.	Colour washing (54/25) (a) Two coat	2720 sft	Rs. 859.90	% sft	23,389/-

Time limit 60 Day penalty Rs. 2000/- P. Day.

I/We hereby quoted _____ % above / below the Sch: of Rate, Plus open rates.

Cost of schedule items


(i/c quoted premium Rs:.....

Cost of Offer Rates Rs:

Total Bid Amount... Rs:.....

Name of Contractor. _____ Signature. _____

Address. _____


Executive Engineer, (Civil)
Shah Faisal Zone
DMC Korangi.

Assistant Executive Engineer, (B&R)
Shah Faisal Zone
DMC Korangi.

EXECUTIVE ENGINEER, (CIVIL) SHAH FAISAL ZONE
DISTRICT MUNICIPAL CORPORATION (KORANGI).

Bid Document:-

S. No. 10

Name of work:- Construction of 2 dust bin UC No-3 Shah Faisal Zone DMC Korangi.Estimate Cost:- Rs. 8,96,050/- Cost of Bidding Document Rs. 2000/-
Bid Security 2% of Total Bid amount.

70

S. No.	Description	Quantity	Rate	Unit	Amount (Rs)
1.	Excavation in foundation of Building bridges and other structure i/c dagbelling dressing refilling with excavated earth watering and ramming lead up to 5 feet a) In ordinary soil	800 cft	Rs. 3176.25	% Cft	2,541/-
2.	Cement concrete brick or stone ballasts 1.5 to 2" gauge (b). Ratio 1;4;8	1060 cft	Rs. 9416.28	% cft	99,813/-
3.	Reinforcement cement concrete work i/c all labor and material except the cost of steel reinforcement and its labor for bending and binding which will paid separately this rate also i/c all kinds of forms moulds lifting shuttering curing rendering (including screening and washing of shingle) a) R.C.C work in roof slab, beams columns raft, lintels and other structure members laid in situ or pre cast laid in situ or position complete in all respects 1;2;4	1088 cft	Rs. 337.00	P/Cft	3,66,656/-
4.	Fabrication of mild steel reinforcement for cement concrete i/c cutting, bending, laying in position making joints and fastening i/c cost of binding wire (also includes removal of rust from bars) B Using tor bars.	48.57 cwt	Rs. 5001.70	P/cwt	2,42,933/-
5.	Filling, watering and ramming earth in floors with new earth(excavated from out side) lead up to one chain lift up to 5 feet.	3000 Cft	Rs. 3630.00	% cft	10,890 /-
6.	P/L Stone pitching/stone soling including sub-base with hammer dressed stone on surface laid in course i/c carriage of materials chain etc.(32/23)	900cft	Rs. 5377.63	% cft	48,399/-
7.	Providing and laying topping cement concrete (1:2:4) including surface finishing and dividing into panel(42/16) (a) A" thick	1200 sft	Rs. 3275.50	% sft	39,306/-

8.	Cement plasters 1:4 up to 20 feet height (52/11) ½" thick	2720 sft	Rs. 2283.93	% sft	62,123/-
9.	Colour washing (54/25) (a) Two coat	2720 sft	Rs. 859.90	% sft	23,389/-

Time limit 60 Day penalty Rs. 2000/- P. Day.

I/We hereby quoted _____% above / below the Sch: of Rate, Plus open rates.

Cost of schedule items


(i/c quoted premium Rs:.....

Cost of Offer Rates Rs:

Total Bid Amount... Rs:.....

Name of Contractor. _____ Signature. _____

Address. _____


Executive Engineer, (Civil)
Shah Faisal Zone
DMC Korangi.

Assistant Executive Engineer, (B&R)
Shah Faisal Zone
DMC Korangi.

EXECUTIVE ENGINEER, (CIVIL) SHAH FAISAL ZONE
DISTRICT MUNICIPAL CORPORATION (KORANGI).

71

Bid Document:-

S. No. 11

Name of work:- Construction of 2 dust bin UC No-4 Shah Faisal Zone DMC Korangi.

Estimate Cost:- Rs. 8,96,048/- Cost of Bidding Document Rs. 2000/-
Bid Security 2% of Total Bid amount.

S. No.	Description	Quantity	Rate	Unit	Amount (Rs)
1.	Excavation in foundation of Building bridges and other structure i/c dagbelling dressing refilling with excavated earth watering and ramming lead up to 5 feet a) In ordinary soil	800 cft	Rs. 3176.25	% Cft	2,541/-
2.	Cement concrete brick or stone ballasts 1.5 to 2" gauge (b). Ratio 1;4;8	1060 cft	Rs. 9416.28	% cft	99,813/-
3.	Reinforcement cement concrete work i/c all labor and material except the cost of steel reinforcement and its labor for bending and binding which will paid separately this rate also i/c all kinds of forms moulds lifting shuttering curing rendering (including screening and washing of shingle) a) R.C.C work in roof slab, beams columns raft, lintels and other structure members laid in situ or pre cast laid in situ or position complete in all respects 1;2;4	1088 cft	Rs. 337.00	P/Cft	3,66,656/-
4.	Fabrication of mild steel reinforcement for cement concrete i/c cutting, bending, laying in position making joints and fastening i/c cost of binding wire (also includes removal of rust from bars) B Using tor bars.	48.57 cwt	Rs. 5001.70	P/cwt	2,42,933/-
5.	Filling, watering and ramming earth in floors with new earth(excavated from out side) lead up to one chain lift up to 5 feet.	3000 Cft	Rs. 3630.00	% cft	10,890 /-
6.	P/L Stone pitching/stone soling including sub-base with hammer dressed stone on surface laid in course i/c carriage of materials chain etc.(32/23)	900cft	Rs. 5377.63	% cft	48,399/-
7.	Providing and laying topping cement concrete (1:2:4) including surface finishing and dividing into panel(42/16) (a) A" thick	1200 sft	Rs. 3275.50	% sft	39,306/-

8.	Cement plasters 1:4 up to 20 feet height (52/11) ½" thick	2720 sft	Rs. 2283.93	% sft	62,123/-
9.	Colour washing (54/25) (a) Two coat	2720 sft	Rs. 859.90	% sft	23,389/-

Time limit 60 Day penalty Rs. 2000/- P. Day.

I/We hereby quoted _____ % above / below the Sch: of Rate, Plus open rates.

Cost of schedule items


(i/c quoted premium Rs:.....

Cost of Offer Rates Rs:

Total Bid Amount... Rs:.....

Name of Contractor. _____ Signature. _____

Address. _____


Executive Engineer, (Civil)
Shah Faisal Zone
DMC Korangi.

Assistant Executive Engineer, (B&R)
Shah Faisal Zone
DMC Korangi.

EXECUTIVE ENGINEER, (CIVIL) SHAH FAISAL ZONE
DISTRICT MUNICIPAL CORPORATION (KORANGI).

73

Bid Document:-

S. No. 12

Name of work:- Construction of 2 dust bin UC No-5 Shah Faisal Zone DMC Korangi.Estimate Cost:- Rs. 8,96,047/-

Cost of Bidding Document Rs. 2000/-

Bid Security 2% of Total Bid amount.

S. No.	Description	Quantity	Rate	Unit	Amount (Rs)
1.	Excavation in foundation of Building bridges and other structure i/c dagbelling dressing refilling with excavated earth watering and ramming lead up to 5 feet a) In ordinary soil	800 cft	Rs. 3176.25	% Cft	2,541/-
2.	Cement concrete brick or stone ballasts 1.5 to 2" gauge (b). Ratio 1;4;8	1060 cft	Rs. 9416.28	% cft	99,813/-
3.	Reinforcement cement concrete work i/c all labor and material except the cost of steel reinforcement and its labor for bending and binding which will paid separately this rate also i/c all kinds of forms moulds lifting shuttering curing rendering (including screening and washing of shingle) a) R.C.C work in roof slab, beams columns raft, lintels and other structure members laid in situ or pre cast laid in situ or position complete in all respects 1;2;4	1088 cft	Rs. 337.00	P/Cft	3,66,656/-
4.	Fabrication of mild steel reinforcement for cement concrete i/c cutting, bending, laying in position making joints and fastening i/c cost of binding wire (also includes removal of rust from bars) B Using tor bars.	48.57 cwt	Rs. 5001.70	P/cwt	2,42,933/-
5.	Filling, watering and ramming earth in floors with new earth(excavated from out side) lead up to one chain lift up to 5 feet.	3000 Cft	Rs. 3630.00	% cft	10,890 /-
6.	P/L Stone pitching/stone soling including sub-base with hammer dressed stone on surface laid in course i/c carriage of materials chain etc.(32/23)	900cft	Rs. 5377.63	% cft	48,399/-
7.	Providing and laying topping cement concrete (1:2:4) including surface finishing and dividing into panel(42/16) (a) A" thick	1200 sft	Rs. 3275.50	% sft	39,306/-

8.	Cement plasters 1:4 up to 20 feet height (52/11) ½" thick	2720 sft	Rs. 2283.93	% sft	62,123/-
9.	Colour washing (54/25) (a) Two coat	2720 sft	Rs. 859.90	% sft	23,389/-

Time limit 60 Day penalty Rs. 2000/- P. Day.

I/We hereby quoted _____ % above / below the Sch: of Rate, Plus open rates.


Cost of schedule items
(i/c quoted premium Rs:.....

Cost of Offer Rates Rs:

Total Bid Amount... Rs:.....

Name of Contractor. _____ Signature. _____

Address. _____


Executive Engineer, (Civil)
Shah Faisal Zone
DMC Korangi.

Assistant Executive Engineer, (B&R)
Shah Faisal Zone
DMC Korangi.

EXECUTIVE ENGINEER, (CIVIL) SHAH FAISAL ZONE
DISTRICT MUNICIPAL CORPORATION (KORANGI).

Bid Document:-

S. No. 16

72

Name of work:- Construction of dust bin at Pathar wala Road Green Town
Shah Faisal Zone DMC Korangi.

Estimate Cost:- Rs. 8,96,050/- Cost of Bidding Document Rs. 2000/-
Bid Security 2% of Total Bid amount.

S. No.	Description	Quantity	Rate	Unit	Amount (Rs)
1.	Excavation in foundation of Building bridges and other structure i/c dagbelling dressing refilling with excavated earth watering and ramming lead up to 5 feet a) In ordinary soil	800 cft	Rs. 3176.25	% Cft	2,541/-
2.	Cement concrete brick or stone ballasts 1.5 to 2" gauge (b). Ratio 1;4;8	1060 cft	Rs. 9416.28	% cft	99,813/-
3.	Reinforcement cement concrete work i/c all labor and material except the cost of steel reinforcement and its labor for bending and binding which will paid separately this rate also i/c all kinds of forms moulds lifting shuttering curing rendering (including screening and washing of shingle) a) R.C.C work in roof slab, beams columns raft, lintels and other structure members laid in situ or pre cast laid in situ or position complete in all respects 1;2;4	1088 cft	Rs. 337.00	P/Cft	3,66,656/-
4.	Fabrication of mild steel reinforcement for cement concrete i/c cutting, bending, laying in position making joints and fastening i/c cost of binding wire (also includes removal of rust from bars) B U sing tor bars.	48.57 cwt	Rs. 5001.70	P/cwt	2,42,933/-
5.	Filling, watering and ramming earth in floors with new earth(excavated from out side) lead up to one chain lift up to 5 feet.	3000 Cft	Rs. 3630.00	% cft	10,890 /-
6.	P/L Stone pitching/stone soling including sub-base with hammer dressed stone on surface laid in course i/c carriage of materials chain etc.(32/23)	900cft	Rs. 5377.63	% cft	48,399/-
7.	Providing and laying topping cement concrete (1:2:4) including surface finishing and dividing into panel(42/16) (a) A" thick	1200 sft	Rs. 3275.50	% sft	39,306/-

8.	Cement plasters 1:4 up to 20 feet height (52/11) ½" thick	2720 sft	Rs. 2283.93	% sft	62,123/-
9.	Colour washing (54/25) (a) Two coat	2720 sft	Rs. 859.90	% sft	23,389/-

Time limit 60 Day penalty Rs. 2000/- P. Day.

I/We hereby quoted _____ % above / below the Sch: of Rate, Plus open rates.


Cost of schedule items
(i/c quoted premium Rs:.....

Cost of Offer Rates Rs:

Total Bid Amount... Rs:.....

Name of Contractor. _____ Signature. _____

Address. _____


Executive Engineer, (Civil)
Shah Faisal Zone
DMC Korangi.

Assistant Executive Engineer, (B&R)
Shah Faisal Zone
DMC Korangi.

EXECUTIVE ENGINEER, (CIVIL) SHAH FAISAL ZONE
DISTRICT MUNICIPAL CORPORATION (KORANGI).

Bid Document:-

S. No. 13

73

Name of work:- Construction of Pathar Wala Road UC No-5 Shah Faisal Zone DMC Korangi.

Estimate Cost:- Rs. 8,96,050/-Cost of Bidding Document Rs. 2000/-Bid Security 2% of Total Bid amount.

S. No.	Description	Quantity	Rate	Unit	Amount (Rs)
1.	Excavation in foundation of Building bridges and other structure i/c dagbelling dressing refilling with excavated earth watering and ramming lead up to 5 feet a) In ordinary soil	800 cft	Rs. 3176.25	% Cft	2,541/-
2.	Cement concrete brick or stone ballasts 1.5 to 2" gauge (b). Ratio 1;4;8	1060 cft	Rs. 9416.28	% cft	99,813/-
3.	Reinforcement cement concrete work i/c all labor and material except the cost of steel reinforcement and its labor for bending and binding which will paid separately this rate also i/c all kinds of forms moulds lifting shuttering curing rendering (including screening and washing of shingle) a) R.C.C work in roof slab, beams columns raft, lintels and other structure members laid in situ or pre cast laid in situ or position complete in all respects 1;2;4	1088 cft	Rs. 337.00	P/Cft	3,66,656/-
4.	Fabrication of mild steel reinforcement for cement concrete i/c cutting, bending, laying in position making joints and fastening i/c cost of binding wire (also includes removal of rust from bars) B Using tor bars.	48.57 cwt	Rs. 5001.70	P/cwt	2,42,933/-
5.	Filling, watering and ramming earth in floors with new earth(excavated from out side) lead up to one chain lift up to 5 feet.	3000 Cft	Rs. 3630.00	% cft	10,890 /-
6.	2/L Stone pitching/stone soling including sub-base with hammer dressed stone on surface laid in course i/c carriage of materials chain etc.(32/23)	900cft	Rs. 5377.63	% cft	48,399/-
7.	Providing and laying topping cement concrete (1:2:4) including surface finishing and dividing into panel(42/16) (a) A" thick	1200 sft	Rs. 3275.50	% sft	39,306/-

8.	Cement plasters 1:4 up to 20 feet height (52/11) ½" thick	2720 sft	Rs. 2283.93	% sft	62,123/-
9.	Colour washing (54/25) (a) Two coat	2720 sft	Rs. 859.90	% sft	23,389/-

Time limit 60 Day penalty Rs. 2000/- P. Day.

I/We hereby quoted _____% above / below the Sch: of Rate, Plus open rates.


Cost of schedule items
(i/c quoted premium Rs:.....

Cost of Offer Rates Rs:

Total Bid Amount... Rs:.....

Name of Contractor. _____ Signature. _____

Address. _____


Executive Engineer, (Civil)
Shah Faisal Zone
DMC Korangi.

Assistant Executive Engineer, (B&R)
Shah Faisal Zone
DMC Korangi.

**EXECUTIVE ENGINEER, (CIVIL) SHAH FAISAL ZONE
DISTRICT MUNICIPAL CORPORATION (KORANGI).**

Bid Document:-

S. No. 14

Name of work:- Construction of 2 dust bin UC No-6 Shah Faisal Zone DMC Korangi.Estimate Cost:- Rs. 8,96,046/-Cost of Bidding Document Rs. 2000/-Bid Security 2% of Total Bid amount.

74

S. No.	Description	Quantity	Rate	Unit	Amount (Rs)
1.	Excavation in foundation of Building bridges and other structure i/c dagbelling dressing refilling with excavated earth watering and ramming lead up to 5 feet a) In ordinary soil	800 cft	Rs. 3176.25	% Cft	2,541/-
2.	Cement concrete brick or stone ballasts 1.5 to 2" gauge (b). Ratio 1;4;8	1060 cft	Rs. 9416.28	% cft	99,813/-
3.	Reinforcement cement concrete work i/c all labor and material except the cost of steel reinforcement and its labor for bending and binding which will paid separately this rate also i/c all kinds of forms moulds lifting shuttering curing rendering (including screening and washing of shingle) a) R.C.C work in roof slab, beams columns raft, lintels and other structure members laid in situ or pre cast laid in situ or position complete in all respects 1;2;4	1088 cft	Rs. 337.00	P/Cft	3,66,656/-
4.	Fabrication of mild steel reinforcement for cement concrete i/c cutting, bending, laying in position making joints and fastening i/c cost of binding wire (also includes removal of rust from bars) B Using tor bars.	48.57 cwt	Rs. 5001.70	P/cwt	2,42,933/-
5.	Filling, watering and ramming earth in floors with new earth(excavated from out side) lead up to one chain lift up to 5 feet.	3000 Cft	Rs. 3630.00	% cft	10,890 /-
6.	F/L Stone pitching/stone soling including sub-base with hammer dressed stone on surface laid in course i/c carriage of materials chain etc.(32/23)	900cft	Rs. 5377.63	% cft	48,399/-
7.	Providing and laying topping cement concrete (1:2:4) including surface finishing and dividing into panel(42/16) (a) A" thick	1200 sft	Rs. 3275.50	% sft	39,306/-

8.	Cement plasters 1:4 up to 20 feet height (52/11) ½" thick	2720 sft	Rs. 2283.93	% sft	62,123/-
9.	Colour washing (54/25) (a) Two coat	2720 sft	Rs. 859.90	% sft	23,389/-

Time limit 60 Day penalty Rs. 2000/- P. Day.

I/We hereby quoted _____% above / below the Sch: of Rate, Plus open rates.


Cost of schedule items
(i/c quoted premium Rs:.....

Cost of Offer Rates Rs:

Total Bid Amount... Rs:.....

Name of Contractor. _____ Signature. _____

Address. _____


Executive Engineer, (Civil)
Shah Faisal Zone
DMC Korangi.

Assistant Executive Engineer, (B&R)
Shah Faisal Zone
DMC Korangi.

**EXECUTIVE ENGINEER, (CIVIL) SHAH FAISAL ZONE
DISTRICT MUNICIPAL CORPORATION (KORANGI).**

Bid Document:-

S. No. 15

Name of work:- Construction of 2 dust bin UC No-7 Shah Faisal Zone DMC Korangi.Estimate Cost:- Rs. 8,96,050/-Cost of Bidding Document Rs. 2000/-Bid Security 2% of Total Bid amount.

75

S. No.	Description	Quantity	Rate	Unit	Amount (Rs)
1.	Excavation in foundation of Building bridges and other structure i/c dagbelling dressing refilling with excavated earth watering and ramming lead up to 5 feet a) In ordinary soil	800 cft	Rs. 3176.25	% Cft	2,541/-
2.	Cement concrete brick or stone ballasts 1.5 to 2" gauge (b). Ratio 1;4;8	1060 cft	Rs. 9416.28	% cft	99,813/-
3.	Reinforcement cement concrete work i/c all labor and material except the cost of steel reinforcement and its labor for bending and binding which will paid separately this rate also i/c all kinds of forms moulds lifting shuttering curing rendering (including screening and washing of shingle) a) R.C.C work in roof slab, beams columns raft, lintels and other structure members laid in situ or pre cast laid in situ or position complete in all respects 1;2;4	1088 cft	Rs. 337.00	P/Cft	3,66,656/-
4.	Fabrication of mild steel reinforcement for cement concrete i/c cutting, bending, laying in position making joints and fastening i/c cost of binding wire (also includes removal of rust from bars) B Using tor bars.	48.57 cwt	Rs. 5001.70	P/cwt	2,42,933/-
5.	Filling, watering and ramming earth in floors with new earth(excavated from out side) lead up to one chain lift up to 5 feet.	3000 Cft	Rs. 3630.00	% cft	10,890 /-
6.	P/L Stone pitching/stone soling including sub-base with hammer dressed stone on surface laid in course i/c carriage of materials chain etc.(32/23)	900cft	Rs. 5377.63	% cft	48,399/-
7.	Providing and laying topping cement concrete (1:2:4) including surface finishing and dividing into panel(42/16) (a) A" thick	1200 sft	Rs. 3275.50	% sft	39,306/-

8.	Cement plasters 1:4 up to 20 feet height (52/11) ½" thick	2720 sft	Rs. 2283.93	% sft	62,123/-
9	Colour washing (54/25) (a) Two coat	2720 sft	Rs. 859.90	% sft	23,389/-

Time limit 60 Day penalty Rs. 2000/- P. Day.

I/We hereby quoted _____ % above / below the Sch: of Rate, Plus open rates.


Cost of schedule items
(i/c quoted premium Rs:.....

Cost of Offer Rates Rs:

Total Bid Amount... Rs:.....

Name of Contractor. _____ Signature. _____

Address. _____


Executive Engineer, (Civil)
Shah Faisal Zone
DMC Korangi.

Assistant Executive Engineer, (B&R)
Shah Faisal Zone
DMC Korangi.

DISTRICT MUNICIPAL CORPORATION (KORANGI) KARACHI.
SHAH FAISAL ZONE.

76

Estimate Cost: Rs: 9,96,830/-
 2% Earnest Money: 2 % Quoted Amount
 Tender Cost: Rs: 2,000/-
 Penalty Per day: Rs: 2,000/-
 Time Limit: 01 Month

S. No. 01

Subject: Repair/Maintenance of Different Parks in Uc, No-1 Shah Faisal Zone D.M.C Korangi.

S. No.	Description	Quantity	Rate	Unit	Amount (Rs)
1.	Dismantling cement concrete plain 1;2;4	402 cft	Rs. 3327.50	% Cft	13,377/-
2.	Excavation in foundation of Building bridges and other structure i/c dagbelling dressing refilling with excavated earth watering and ramming lead up to 5 feet a) In ordinary soil	6000 cft	Rs. 3176.25	% Cft	19,058/-
3.	Cement concrete brick or stone ballasts 1.5 to 2" gauge (b). Ratio 1;4;8	1800 cft	Rs. 9416.28	% cft	1,69,493/-
4.	Cement concrete plain including placing compacting finishing and curing complete (including searching and washing of stone Aggregate) without shuttering. (18/5) Ratio 1:2:4	5000 cft	Rs. 14429.25	% cft	7,21,463/-
5.	Exaction of removal of centering of RCC for plain cement concurrent work of portal wood vertical.	2350 cft	Rs. 3127.41	% Cft	73,494/-

I/We hereby quoted the Total Amount for items on Open Rate Rs: _____

And also shall undertake to abide by prescribed terms and condition of the Contractor.

Contractor Signature

Address _____

Assistant Director (Parks)
D.M.C Korangi

Deputy Director (Parks)
Shah Faisal Zone D.M.C Korangi

DISTRICT MUNICIPAL CORPORATION (KORANGI) KARACHI.
SHAH FAISAL ZONE.

77

Estimate Cost: Rs: 9,96,889/-
 2% Earnest Money: 2 % Quoted Amount
 Tender Cost: Rs: 2,000/-
 Penalty Per day: Rs: 2,000/-
 Time Limit: 01 Month

S. No. 02

Subject: Improvement of Boundary wall in Azam Foot Ball Ground in UC., No-1 Shah Faisal Zone
D.M.C Korangi.

S. No.	Description	Quantity	Rate	Unit	Amount (Rs)
1.	Dismantling cement Block masonry etc.	158 Cft	Rs. 1134.38	% Cft	1,792/-
2.	Earth work excavation in foundation of buildings.	320 Cft	Rs. 5445.00	% cft	17,424/-
3.	Excavation in foundation of Building bridges and other structure i/c dagbelling dressing refilling with excavated earth water ng and ramming lead up to 5 feet a) In ordinary soil	600 cft	Rs. 3176.25	% Cft	817/-
4.	Cement concrete brick or stone ballasts 1.5 to 2" gauge (b). Ratio 1;4;8	200 cft	Rs. 9416.28	% cft	18,833/-
5.	Providing & laying 1:3:6 cement concrete solid block masonry wall 6" and below in thickness set in 1.6 cement sand mortar in ground floor super structure including raking out joints and curing etc. complete more than 6" think (22/23)	500 Cft	Rs. 15771.08	% cft	78,855/-
6.	Cement plasters 1:4 up to 20 feet height. (58/1) ½" thick	3000 Sft	Rs. 2283.93	% Cft	68,518/-
7.	S/Spreading Ordinary earth from approved out side source laid in layers of free from organic matters.	23731 cft	O/R 30/-	P/cft	7,11,930/-
8.	Boring 100 ft deep with PVC pipe 4" dia for core & 2" dia for suction of water with 2 HP electric motor pump of app; specification i/c construction of pump Room. of 5'x5'x5' i/c ½" thickness cement plaster & 2 coats Painting as per direction of Engineer incharge	1 No	O/R 1,00,000/-	Each	1,00,000/-

I /We hereby quoted the Total Amount for items on Open Rate Rs: _____

And also shall undertake to abide by prescribed terms and condition of the Contractor.

 Contractor Signature

Address _____

 Assistant Director (Parks)

D.M.C Korangi

 Deputy Director (Parks)

Shah Faisal Zor e D.M.C Korangi

DISTRICT MUNICIPAL CORPORATION (KORANGI) KARACHI.
SHAH FAISAL ZONE.

Estimate Cost: Rs: 9, 99,168/-
 2% Earnest Money: 2 % Quoted Amount
 Tender Cost: Rs: 2,000/-
 Penalty Per day: Rs: 2,000/-
 Time Limit: 01 Month

S. No. 03

78

Subject: Repair/Maintenance of Different Parks in Uc, No-2 Shah Faisal Zone D.M.C Korangi.

S.NO.	DESCRIPTION OF WORK	Quantity	RATE	AMOUNT
1.	Dismantling cement Block masonry etc.	125 Cft	1134.38 % cft	1,418/-
2.	Earth work excavation in foundation of buildings.	2200 Cft	1361.25 % cft	2,995/-
3.	Cement concrete brick on stone ballast 1.5 to 2" gauge 1;4;8.	1300 cft	9416.28 % cft	1,22,412/-
4.	Cement concrete plain including placing compacting finishing and curing complete (including searching and washing of stone Aggregate) without shuttering. (18/5) Ratio 1:2:4	1050 Cft	14429.25 % cft	1,51,507/-
5.	Exaction of removal of centering of RCC for plain cement concurrent work of portal wood vertical.	2100 Sft	3127.41 % sft	65,676/-
6.	P/Fixing industrially manufactured Kerb Block of size 18x12x6 having strength of 4700 psi, fixed in proper alignment and level on 2" thick base of 1;3;6 set in mortar of 1;4	130 rft	297.01 P/rft	38,6,11/-
7.	Reinforcement Cement concrete work i/c all labor (a) RCC work in roof slab, beam column rafts and other structure members laid in situ or pre cast laid in position complete in all respect. (i) Ratio 1;2;4	216 cft	337/- P/cft	72,792/-
8.	Fabrication of Mild steel re enforcement for cement concrete i/c cutting, bending, laying in position, making joints & lashing i/c cost of binding wire etc.	7.71 cwt	5001.70 P/cwt	38,563/-
9.	Providing and laying topping cement concrete (1:2:4) including surface finishing and dividing into panel 2" thick.	4000 Sft	3275.50 % sft	1,31,020/-
10.	Cement plasters 1:4 up to 20 feet height. (58/11) ½" thick	1460 Sft	2283.93 % sft	33,345/-
11.	Painting with enamel paint on masonry (plastered) tow coats (Old Surface).	600 Sft	1014.14 % Sft	6,085/-
12.	Distemping two coats with distemper of app; quality and shade, i/c priming coat. (Old surface)	2600 sft	602.25 % Sft	15,659/-


13.	S/S approved sweet earth (Garden Soil) free from salts, pebbles, suitable for plants brought from app: query near Noori Abad, i/c loading, carriage, unloading at site of work and spreading in even layer of req: thickness to proper level as required/ directed by concerned Officer in charge.	2640 Cft	35/-	P/Cft	92,400/-
14.	S /S and spreading appr: well decayed cow dung i/c mixing in earth, laying spreading in even layers of req: thickness as required/ directed by concerned Officer in charge.	2300 Cft	30/-	P/Cft	69,000/-
15	Providing of Dhaka grass and trufing lawns i/c watering and cutting at least once after growing up more then 3 inches.	1554 sft	15/-	P/Cft	23,310/-
16.	Providing supplying and spreading in even layer of required thickness red murum of approved quality from app; query as desired by Engineer In charge	1875 Cft	45/-	P/Cft	84,375/-
17.	Repair/Maintenance of Steel grill using solid aqr, bars of size ½" thick i/c welding & fixing of door/window any type 2 coats painting & direction of Engineer In charge etc.	500 sft	100/-	P/sft	50,000/-

I /We hereby quoted the Total Amount for items on Open Rate Rs: _____


And also shall undertake to abide by prescribed terms and condition of the Contractor.

Contractor Signature

Address _____



Deputy Director (Parks)
Shah Faisal Zone D.M.C Korangi



Assistant Director (Parks)
D.M.C Korangi

DISTRICT MUNICIPAL CORPORATION (KORANGI) KARACHI.
SHAH FAISAL ZONE.

Estimate Cost: Rs: 9,98,256/-
 2% Earnest Money: 2 % Quoted Amount
 Tender Cost: Rs: 2,000/-
 Penalty Per day: Rs: 2,000/-
 Time Limit: 01 Month

S. No. 04

79

Subject: Repair/Maintenance of Different Parks in Uc, No-3 Shah Faisal Zone D.M.C Korangi.

S.NO.	DESCRIPTION OF WORK	Quantity	RATE	AMOUNT
1.	Dismantling cement Block masonry etc.	125 Cft	1134.38 % cft	1,418/-
2.	Earth work excavation in foundation of buildings.	2200 Cft	1361.25 % cft	2,995/-
3.	Cement concrete brick on stone ballast 1.5 to 2" gauge 1;4;8.	1300 cft	9416.28 % cft	1,22,412/-
4.	Cement concrete plain including placing compacting finishing and curing complete (including searching and washing of stone Aggregate) without shuttering. (18/5) Ratio 1:2:4	1050 Cft	14429.25 % cft	1,51,507/-
5.	Exaction of removal of centering of RCC for plain cement concurrent work of portal wood vertical.	2100 Sft	3127.41 % sft	65,676/-
6.	P/Fixing industrially manufactured Kerb Block of size 18x12x6 having strength of 4700 psi, fixed in proper alignment and level on 2" thick base of 1;3;6 set in mortar of 1;4	130 rft	297.01 P/rft	38,611/-
7.	Reinforcement Cement concrete work i/c all labor (a) RCC work in roof slab, beam column rafts and other structure members laid in situ or pre cast laid in position complete in all respect. (i) Ratio 1;2;4	200 cft	337/- P/cft	67,400/-
8.	Fabrication of Mild steel re enforcement for cement concrete i/c cutting, bending, laying in position, making joints & fasting i/c cost of binding wire etc.	7.5 cwt	5001.70 P/cwt	37,513/-
9.	Providing and laying topping cement concrete (1:2:4) including surface finishing and dividing into panel 2" thick.	4000 Sft	3275.50 % sft	1,31,020/-
10.	Cement plasters 1:4 up to 20 feet height. (58/11) ½" thick	1460 Sft	2283.93 % sft	33,345/-
11.	Fainting with enamel paint on masonry (plastered) tow coats (Old Surface).	600 Sft	1014.14 % Sft	6,085/-
12.	Distempering two coats with distemper of app; quality and shade, i/c priming coat. (Old surface)	2600 sft	602.25 % Sft	15,659/-

12-A	P /fixing cement paving blocks flooring having size of 197x97x60 of city / quadra / cobble /shape with pigment having strength b/w 5000 psi to 8500 psi i/c filling the joints with hill sand and laying in specified manner / pattern and design etc. P#72/56	107 sft	223.97	P/sft	23,695/-
13.	S/S approved sweet earth (Garden Soil) free from salts, pebbles, suitable for plants brought from app: query near Noori Abad, i/c loading, carriage, unloading at site of work and spreading in even layer of req: thickness to proper level as required/ directed by concerned Officer in charge.	2650 Cft	35/-	P/Cft	92,750/-
14.	S /S and spreading appr: well decayed cow dung i/c mixing in earth, laying spreading in even layers of req: thickness as required/ directed by concerned Officer in charge.	2300 Cft	30/-	P/Cft	69,000/-
15.	Providing of Dhaka grass and trufing lawns i/c watering and cutting at least once after growing up more then 3 inches.	1560 sft	15/-	P/Cft	23,400/-
16.	Providing supplying and spreading in even layer of required thickness red murum of approved quality from app; query as desired by Engineer In charge	1900 Cft	45/-	P/Cft	85,500/-
17.	Repair/Maintenance of Steel grill using solid aqr, bars of size ½" thick i/c welding & fixing of door/window any type 2 coats painting & direction of Engineer In charge etc.	300 sft	100/-	P/sft	30,000/-

I/We hereby quoted the Total Amount for items on Open Rate Rs: _____

And also shall undertake to abide by prescribed terms and condition of the Contractor.

Deputy Director (Parks)
Shah Faisal Zone D.M.C Korangi

Contractor Signature

Address _____

Assistant Director (Parks)
D.M.C Korangi

DISTRICT MUNICIPAL CORPORATION (KORANGI) KARACHI.
SHAH FAISAL ZONE.

Estimate Cost: Rs: 9, 98,972/-
2% Earnest Money: 2 % Quoted Amount
Tender Cost: Rs: 2,000/-
Penalty Per day: Rs: 2,000/-
Time Limit: 01 Month

S. No. 05

80

Subject: Repair/Maintenance of Different Parks in Uc, No-4 Shah Faisal Zone D.M.C Korangi.

S.NO.	DESCRIPTION OF WORK	Quantity	RATE	AMOUNT
1.	Dismantling cement Block masonry etc.	200 Cft	1134.38 % cft	2,269/-
2.	Earth work excavation in foundation of buildings.	2200 Cft	1361.25 % cft	2,995/-
3.	Cement concrete brick on stone ballast 1.5 to 2" gauge 1;4;8.	1300 cft	9416.28 % cft	1,22,412/-
4.	Cement concrete plain including placing compacting finishing and curing complete (including searching and washing of stone Aggregate) without shuttering. (18/5) Ratio 1:2:4	1100 Cft	14429.25 % cft	1,58,722/-
5.	Exaction of removal of centering of RCC for plain cement concurrent work of portal wood vertical.	2200 Sft	3127.41 % sft	68,803/-
6.	P/Fixing industrially manufactured Kerb Block of size 18x12x6 having strength of 4700 psi, fixed in proper alignment and level on 2" thick base of 1;3;6 set in mortar of 1;4	110 rft	297.01 P/rft	32,671/-
7.	Reinforcement Cement concrete work i/c all labor (a) RCC work in roof slab, beam column rafts and other structure members laid in situ or pre cast laid in position complete in all respect. (i) Ratio 1;2;4	200 cft	337/- P/cft	67,400/-
8.	Fabrication of Mild steel re enforcement for cement concrete i/c cutting, bending, laying in position, making joints & fasting i/c cost of binding wire etc.	6.5 cwt	5001.70 P/cwt	32,511/-
9.	Providing and laying topping cement concrete (1:2:4) including surface finishing and dividing into panel 2" thick.	4000 Sft	3275.50 % sft	1,31,020/-
10.	Cement plasters 1:4 up to 20 feet height. (58/11) ½" thick	1460 Sft	2283.93 % sft	33,345/-
11.	Painting with enamel paint on masonry (plastered) tow coats (Old Surface).	600 Sft	1014.14 % Sft	6,085/-
12.	Distemping two coats with distemper of app; quality and shade, i/c priming coat. (Old surface)	2800 sft	602.25 % Sft	16,863/-

13.	Providing & laying 1:3:6 cement concrete solid block masonry wall 6" and below in thickness set in 1.6 cement sand mortar in ground floor super structure including raking out joints and curing etc. complete more than 6" thick (22/23)	600 Cft	15771.08	% cft	94,626/-
14.	S/S approved sweet earth (Garden Soil) free from salts, pebbles, suitable for plants brought from app: query near Noori Abad, i/c loading, carriage, unloading at site of work and spreading in even layer of req: thickness to proper level as required/ directed by concerned Officer in charge.	2650 Cft	35/-	P/Cft	92,750/-
15.	S/S and spreading appr: well decayed cow dung i/c mixing in earth, laying spreading in even layers of req: thickness as required/ directed by concerned Officer in charge.	2300 Cft	30/-	P/Cft	69,000/-
16.	Providing of Dhaka grass and trufing lawns i/c watering and cutting at least once after growing up more then 3 inches.	1530 sft	15/-	P/Cft	22,950/-
17.	Providing supplying and spreading in even layer of required thickness red murum of approved quality from app; query as desired by Engineer In charge	990 Cft	45/-	P/Cft	44,550/-

I/We hereby quoted the Total Amount for items on Open Rate Rs: _____

And also shall undertake to abide by prescribed terms and condition of the Contractor.

Contractor Signature

Address _____

Deputy Director (Parks)
Shah Faisal Zone D.M.C Korangi

Assistant Director (Parks)
D.M.C Korangi

DISTRICT MUNICIPAL CORPORATION (KORANGI) KARACHI.
SHAH FAISAL ZONE.

Estimate Cost: Rs: 9,98,522/-
 2% Earnest Money: 2 % Quoted Amount
 Tender Cost: Rs: 2,000/-
 Penalty Per day: Rs: 2,000/-
 Time Limit: 01 Month

S. No. 06

81

Subject: Repair/Maintenance of Different Parks in Uc, No-5 Shah Faisal Zone D.M.C Korangi.

S.NO.	DESCRIPTION OF WORK	Quantity	RATE	AMOUNT
1.	Dismantling cement Block masonry etc.	200 Cft	1134.38 % cft	2,269/-
2.	Earth work excavation in foundation of buildings.	2200 Cft	1361.25 % cft	2,995/-
3.	Cement concrete brick on stone ballast 1.5 to 2" gauge 1;4;8.	1300 cft	9416.28 % cft	1,22,412/-
4.	Cement concrete plain including placing compacting finishing and curing complete (including searching and washing of stone Aggregate) without shuttering. (18/5) Ratio 1:2:4	1100 Cft	14429.25 % cft	1,58,722/-
5.	Exaction of removal of centering of RCC for plain cement concurrent work of portal wood vertical.	2200 Sft	3127.41 % sft	68,803/-
6.	P/Fixing industrially manufactured Kerb Block of size 18x12x6 having strength of 4700 psi, fixed in proper alignment and lvlcl on 2" thick base of 1;3;6 set in mortar of 1;4	110 rft	297.01 P/rft	32,671/-
7.	Reinforcement Cement concrete work i/c all labor (a) RCC work in roof slab, beam column rafts and other structure members laid in situ or pre cast laid in position complete in all respect. (i) Ratio 1;2;4	200 cft	337/- P/cft	67,400/-
8.	Fabrication of Mild steel re enforcement for cement concrete i/c cutting, bending, laying in position, making joints & fasting i/c cost of binding wire etc.	6.5 cwt	5001.70 P/cwt	32,511/-
9.	Providing and laying topping cement concrete (1:2:4) including surface finishing and dividing into panel 2" thick.	4000 Sft	3275.50 % sft	1,31,020/-
10.	Cement plasters 1:4 up to 20 feet height. (58/11) ½" thick	1460 Sft	2283.93 % sft	33,345/-
11.	Painting with enamel paint on masonry (plastered) tow coats (Old Surface).	600 Sft	1014.14 % Sft	6,085/-
12.	Distempering two coats with distemper of app; quality and shade, i/c priming coat. (Old surface)	2800 sft	602.25 % Sft	16,863/-

13.	Providing & laying 1:3:6 cement concrete solid block masonry wall 6" and below in thickness set in 1.6 cement sand mortar in ground floor super structure including raking out joints and curing etc. complete more than 6" thick (22/23)	600 Cft	15771.08	% cft	94,626/-
14.	S/S approved sweet earth (Garden Soil) free from salts, pebbles, suitable for plants brought from app: query near Noori Abad, i/c loading, carriage, unloading at site of work and spreading in even layer of req: thickness to proper level as required/ directed by concerned Officer in charge.	2650 Cft	35/-	P/Cft	92,750/-
15.	S/S and spreading appr: well decayed cow dung i/c mixing in earth, laying spreading in even layers of req: thickness as required/ directed by concerned Officer in charge.	2300 Cft	30/-	P/Cft	69,000/-
16.	Providing of Dhaka grass and trufing lawns i/c watering and cutting at least once after growing up more then 3 inches.	1500 sft	15/-	P/Cft	22,500/-
17.	Providing supplying and spreading in even layer of required thickness red murum of approved quality from app; query as desired by Engineer In charge	990 Cft	45/-	P/Cft	44,550/-

I/We hereby quoted the Total Amount for items on Open Rate Rs: _____


And also shall undertake to abide by prescribed terms and condition of the Contractor.



Deputy Director (Parks)
Shah Faisal Zone D.M.C Korangi

Contractor Signature

Address



Assistant Director (Parks)
D.M.C Korangi

DISTRICT MUNICIPAL CORPORATION (KORANGI) KARACHI.
SHAH FAISAL ZONE.

82

Estimate Cost: Rs: 9,99,556/-
 2% Earnest Money: 2 % Quoted Amount
 Tender Cost: Rs: 2,000/-
 Penalty Per day: Rs: 2,000/-
 Time Limit: 01 Month

S.No. 07

Subject: Improvement of Playground / Parks in different area Shah Faisal Zone D.M.C Korangi.


S.NO.	DESCRIPTION OF WORK	Quantity	RATE	AMOUNT
1.	Cement concrete plain including placing compacting finishing and curing complete (including searching and washing of stone Aggregate) without shuttering. (18/5) Ratio 1:2:4	4410 Cft	14429.25 % cft	6,36,330/-
2.	Exaction of removal of centering of RCC for plain cement concurrent work of portal wood vertical.	9920 Sft	3127.41 % sft	3,10,239/-
3.	Cement plasters 1:4 up to 20 feet height. (58/11) ½" thick	2320 Sft	2283.93 % sft	52,987/-

I/We hereby quoted the Total Amount for items on Open Rate Rs: _____

And also shall undertake to abide by prescribed terms and condition of the Contractor.

 Contractor Signature

Address _____



 Assistant Director (Parks)
 D.M.C Korangi

 Deputy Director (Parks)
 Shah Faisal Zone D.M.C Korangi

DISTRICT MUNICIPAL CORPORATION (KORANGI) KARACHI.
SHAH FAISAL ZONE.

Estimate Cost: Rs: 9,99,200/-
 2% Earnest Money: 2 % Quoted Amount
 Tender Cost: Rs: 2,000/-
 Penalty Per day: Rs: 2,000/-
 Time Limit: 01 Month

S. No. 08

83

Subject: Providing Fixing Nylon green net & earth pots different size for Nursery Shah Faisal Zone
D.M.C Korangi.

S.NO.	DESCRIPTION OF WORK	Quantity	RATE	AMOUNT
1.	Providing Fixing best quality Mailon Net Green Color i/c the cost of cutting fitting with binding wire etc.	11000 Sft	32/- P/Sft	3,52,000/-
2.	Supplying & stacking fine quality different size earthen pots i/c all leads and lifts			
	A) 9" Ordinary	5000 Nos	10/- Each	50,000/-
	B) 12" Ordinary	5000 Nos	18/- Each	90,000/-
	C) 12" Special	5000 Nos	25/- Each	1,25,000/-
	D) 14" Special	1500 Nos	45/- Each	67,500/-
	E) 18" Special	1000 Nos	75/- Each	75,000/-
	F) 24" Special	110 Nos	720/- Each	29,700/-
3.	Supplying of fine quality polythen bag as per app;			
	A) 4" x 6" size	50 Kgs	300/- P/Kg	15,000/-
	B) 6" x 8" size	50 Kgs	300/- P/Kg	15,000/-
4.	Supplying of Manual Lawn mover machine 14" size with five blades and grass box with best quality made by Pakistan as per app; sample etc.	15 Nos	12000/- P/No	1,80,000/-

I/We hereby quoted the Total Amount for items on Open Rate Rs: _____

And also shall undertake to abide by prescribed terms and condition of the Contractor.

Contractor Signature

Address _____

Deputy Director (Parks)
 Shah Faisal Zone D.M.C Korangi

Assistant Director (Parks)
 D.M.C Korangi

DISTRICT MUNICIPAL CORPORATION (KORANGI) KARACHI.
SHAH FAISAL ZONE.

84

Estimate Cost: Rs: 9, 94,350/-
2% Earnest Money: 2 % Quoted Amount
Tender Cost: Rs: 2,000/-
Penalty Per day: Rs: 2,000/-
Time Limit: 01 Month

S. No. 09

Subject: Providing of Garden Equipment for different parks & Recreation Shah Faisal Zone
D.M.C Korangi.

S.NO.	DESCRIPTION OF WORK	Quantity	RATE	AMOUNT
1.	Supplying of Plastic Pipe fine quality as per App; sample etc a) 1" Ø b) ¾" Ø	7000 rft 4000 rft	40/- P/rft 35/- P/rft	2,80,000/- 1,74,650/-
2.	Supplying of Hage Seasors Best Quality made by china as per app; sample etc.	30 Nos	1500/- Each	45,000/-
3.	Supplying of Prooning Seasors Best Quality made by china as per app; sample etc.	30 Nos	300/- Each	9,000/-
4.	Supplying of Shawals Seasors Best Quality made by china as per app; sample etc.	50 Nos	900/- Each	45,000/-
5.	Supplying of Tickems (Ganti) Best Quality made by china as per app; sample etc.	50 Nos	300/- Each	15,000/-
6.	Supplying of Phaoerra Best Quality made by china as per app; sample etc.	50 Nos	500/- Each	25,000/-
7.	Supplying of Shawar (Water Can) Best Quality made by china as per app; sample etc.	12 Nos	600/- Each	7,200/-
8.	Supplying of Basket of Date Best Quality made by china as per app; sample etc.	100 Nos	50/- Each	5,000/-
9.	Supplying of Exe Best Quality made by china as per app; sample etc.	40 Nos	700/- Each	28,000/-
10.	Supplying of Khurpees Best Quality made by china as per app; sample etc.	100 Nos	200/- Each	20,000/-
11.	Supplying of Spray pumps 10 Litters capacity made by Italy as per app; sample etc.	04 Nos	3500/- Each	14,000/-
12.	Supplying of Jharoo Sticks of date fine Quality as per app; sample etc.	200 Nos	300/- Each	60,000/-
13.	Supplying of Urea manure F.F.C as per app; sample etc.	100 Nos	90/- Each	9,000/-
14.	Supplying of D.A.P manure as per app; sample etc.	100 Nos	120/- Each	12,000/-
15.	Supplying of Wheel barrow Trolley Best Quality made by china as per app; sample etc.	18 Nos	300/- Each	54,000/-

16.	Supplying of Malathin spray medicine for plants Best Quality etc.	12 Nos	125/-	Each	1,500/-
17.	Supplying of Thiodan spray medicine for plants Best Quality etc.	12 Nos	125/-	Each	1,500/-
18.	Supplying of Panjass Best Quality made by Pak as per app; sample etc.	30 Nos	450/-	Each	13,500/-
19.	Supplying of Manual lawn mover machine 24" size with five blades and grass box with best quality made by Pakistan as per app; sample etc.	05 Nos	35000/-	Each	1,75,000/-

I/We hereby quoted the Total Amount for items on Open Rate Rs: _____

And also shall undertake to abide by prescribed terms and condition of the Contractor.

Contractor Signature

Address _____

Deputy Director (Parks)
Shah Faisal Zone D.M.C Korangi

Assistant Director (Parks)
D.M.C Korangi

DISTRICT MUNICIPAL CORPORATION (KORANGI) KARACHI.
SHAH FAISAL ZONE.

Estimate Cost: Rs: 9, 94,107/-
 2% Earnest Money: 2 % Quoted Amount
 Tender Cost: Rs: 2,000/-
 Penalty Per day: Rs: 2,000/-
 Time Limit: 01 Month

S. No. 10

85

Subject: Supplying & Fitting of 100 ft boring with d-well pump 2 HP with pump room & electric fitting and garden equipment for departmental parks in Shah Faisal Zone DMC Korangi.

S. No.	Description	Quantity	Rate	Unit	Amount (Rs)	
1.	Earth work excavation in foundation building etc.	2400 Cft	Rs. 1361.25	% Cft	3,267/-	
2.	S/S approved sweet earth (Garden Soil) free from salts, pebbles, suitable for plants brought from app: query near Noori Abad, i/c loading, carriage, un-loading at site of work and spreading in even layer of req: thickness to proper level as required/ directed by concerned Officer in charge.	1200 Cft	Rs. 35/-	A/R P/Cft	42,000/-	
3.	S/S and spreading appr: well decayed cow dung i/c mixing in earth, laying spreading in even layers of req: thickness as required/ directed by concerned Officer	528 cft	Rs. 30/-	A/R P/Cft	15,840/-	
4.	Boring 100 ft deep with PVC pipe 4" dia for core & 2" dia for suction of water with 2 HP electric motor pump of app; specification i/c construction of pump Room of 5'x5'x5' i/c ½" thickness cement plaster & 2 coats Painting as per direction of Engineer incharge	5 No	Rs. 100000/-	A/R Each	5,00,000/-	
5.	Supplying of Plastic pipe fine quality as per app; etc	a) 1" ø b) ¾ ø	Rs. 40/- Rs. 35/-	A/R A/R	P/rft P/rft	1,60,000/- 1,05,000/-
6.	Supplying of Tidcems (Ganti) best quality	50 No	Rs. 300/-	A/R	Each	15,000/-
7.	Supplying of Phawrra best quality etc.	50 No	Rs. 500/-	A/R	Each	25,000/-
8.	Supplying of Shawals seasons best quality	50 No	Rs. 900/-	A/R	Each	45,000/-
9.	Supplying of Khurpees best quality etc	100 No	Rs. 300/-	A/R	Each	30,000/-
10.	Supplying of Spray pumps 10 letters capacity made by Italy best quality etc.	04 No	Rs. 3500/-	A/R	Each	14,000/-
11.	Supplying of Jharoo sticks of date fine quality etc.	40 No	Rs. 300/-	A/R	Each	12,000/-
12.	Supplying of wheel berow trolley best quality etc.	10 No	Rs. 400/-	A/R	Each	4,000/-
13.	Supplying of Panjass best quality etc.	50 No	Rs. 460/-	A/R	Each	23,000/-

I/We hereby quoted the Total Amount for items on Open Rate Rs: _____

And also shall undertake to abide by prescribed terms and condition of the Contractor.

Contractor Signature

Address _____

Deputy Director (Parks)
 Shah Faisal Zone D.M.C Korangi

Assistant Director (Parks)
 D.M.C Korangi

EXECUTIVE ENGINEER, (CIVIL) SHAH FAISAL ZONE
DISTRICT MUNICIPAL CORPORATION (KORANGI).

Bid Document:-

S. No. 19

86

Name of work:- De-Silting of Nallah from Shamma Chowk up to Malir River
Shah Faisal Zone DMC Korangi.

Estimate Cost:- Rs. 8,90,955/- Cost of Bidding Document Rs. 2000/-
Bid Security 2% of Total Bid amount.

S. No.	Description	Quantity	Rate	Unit	Amount (Rs)
1.	Earth work excavation in ashes, Sand soft soil or silt clearance undressed lead up to 50 ft.	126900 cft	Rs. 1663.75	% Cft	2,11,130/-
2.	Cartage of 100 cft/5 ton of all material likes on aggregates spawl coal lime system etc complete	95175 cft	Rs. 714.29	% cft	6,79,825/-

Time limit 60 Day penalty Rs. 2000/- P. Day.

I/We hereby quoted _____ % above / below the Sch: of Rate, Plus open rates.

Cost of schedule items


(i/c quoted premium Rs:.....

Cost of Offer Rates Rs:

Total Bid Amount... Rs:.....

Name of Contractor. _____ Signature. _____

Address. _____


 Executive Engineer, (Civil)
 Shah Faisal Zone
 DMC Korangi.

Assistant Executive Engineer, (B&R)
 Shah Faisal Zone
 DMC Korangi.

EXECUTIVE ENGINEER, (CIVIL) SHAH FAISAL ZONE
DISTRICT MUNICIPAL CORPORATION (KORANGI).

Bid Document:-

S. No. 20

87

Name of work:- De-Silting of Nallah from Mustafai Masjid up to Malir River
Near Pathar wali Road Shah Faisal Zone DMC Korangi.

Estimate Cost:- Rs. 8,17,235/- Cost of Bidding Document Rs. 2000/-
Bid Security 2% of Total Bid amount.

S. No.	Description	Quantity	Rate	Unit	Amount (Rs)
1.	Earth work excavation in ashes, Sand soft soil or silt clearance undressed lead up to 50 ft.	116400 cft	Rs. 1663.75	%o Cft	1,93,660/-
2.	Cartage of 100 cft/5 ton of all material likes on aggregates spawl coal lime system etc complete	87300 cft	Rs. 714.29	% cft	6,23,575/-

Time limit 60 Day penalty Rs. 2000/- P. Day.

I/We hereby quoted _____ % above / below the Sch: of Rate, Plus open rates.

Cost of schedule items


(i/c quoted premium Rs:.....

Cost of Offer Rates Rs:

Total Bid Amount... Rs:.....

Name of Contractor. _____ Signature. _____

Address. _____


 Executive Engineer, (Civil)
 Shah Faisal Zone
 DMC Korangi.

Assistant Executive Engineer, (B&R)
 Shah Faisal Zone
 DMC Korangi.

EXECUTIVE ENGINEER, (CIVIL) SHAH FAISAL ZONE
DISTRICT MUNICIPAL CORPORATION (KORANGI).

88

Bid Document:-

S. No. 21

Name of work:- De-Silting of Nallah from Qadri Masjid up to Malir River
Shah Faisal Zone DMC Korangi.

Estimate Cost:- Rs. 8,06,002/- Cost of Bidding Document Rs. 2000/-
Bid Security 2% of Total Bid amount.

S. No.	Description	Quantity	Rate	Unit	Amount (Rs)
1.	Earth work excavation in ashes, Sand soft soil or silt clearance undressed lead up to 50 ft.	114800 cft	Rs. 1663.75	% Cft	1,90,985/-
2.	Cartage of 100 cft/5 ton of all material likes on aggregates spawl coal lime system etc complete	86100 cft	Rs. 714.29	% cft	6,15,004/-

Time limit 60 Day penalty Rs. 2000/- P. Day.

I/We hereby quoted _____ % above / below the Sch: of Rate, Plus open rates.

Cost of schedule items


(i/c quoted premium Rs:.....

Cost of Offer Rates Rs:.....

Total Bid Amount... Rs:.....

Name of Contractor. _____ Signature. _____

Address. _____


 Executive Engineer, (Civil)
 Shah Faisal Zone
 DMC Korangi.

Assistant Executive Engineer, (B&R)
 Shah Faisal Zone
 DMC Korangi.

EXECUTIVE ENGINEER, (CIVIL) SHAH FAISAL ZONE
DISTRICT MUNICIPAL CORPORATION (KORANGI).

Bid Document:-

S. No. 22

Name of work:- De-Silting of Nallah from Qaid Park to Chakur Nallah
Shah Faisal Zone DMC Korangi.

Estimate Cost:- Rs. 7,95,996/- Cost of Bidding Document Rs. 2000/-
Bid Security 2% of Total Bid amount.

S. No.	Description	Quantity	Rate	Unit	Amount (Rs)
1.	Earth work excavation in ashes, Sand soft soil or silt clearance undressed lead up to 50 ft.	113375 cft	Rs. 1663.75	%o Cft	1,88,628/-
2.	Cartage of 100 cft/5 ton of all material likes on aggregates spawl coal lime system etc complete	85031 cft	Rs. 714.29	% cft	6,07,368/-

Time limit 60 Day penalty Rs. 2000/- P. Day.

I/We hereby quoted _____ % above / below the Sch: of Rate, Plus open rates.

Cost of schedule items


(i/c quoted premium Rs:.....

Cost of Offer Rates Rs:

Total Bid Amount... Rs:.....

Name of Contractor. _____ Signature. _____

Address. _____


 Executive Engineer, (Civil)
 Shah Faisal Zone
 DMC Korangi.

Assistant Executive Engineer, (B&R)
 Shah Faisal Zone
 DMC Korangi.

(90)

EXECUTIVE ENGINEER, (CIVIL) SHAH FAISAL ZONE
DISTRICT MUNICIPAL CORPORATION (KORANGI).

Bid Document:-

S. No. 18

Name of work:- De-Silting of Nallah from Azeem Pura Grave yard up to Nasran Imam
Bargah UC, No-4 Shah Faisal Zone DMC Korangi.

Estimate Cost:- Rs. 8,12,282/- Cost of Bidding Document Rs. 2000/-
Bid Security 2% of Total Bid amount.

S. No.	Description	Quantity	Rate	Unit	Amount (Rs)
1.	Earth work excavation in ashes, Sand soft soil or silt clearance undressed lead up to 50 ft.	115694 cft	Rs. 1663.75	%o Cft	1,92,786/-
2.	Cartage of 100 cft/5 ton of all material likes on aggregates spawl coal lime system etc complete	4900 cft	Rs. 714.29	% cft	6,19,796/-

Time limit 60 Day penalty Rs. 2000/- P. Day.

I/We hereby quoted _____ % above / below the Sch: of Rate, Plus open rates.

Cost of schedule items


(i/c quoted premium Rs:.....

Cost of Offer Rates Rs:.....

Total Bid Amount... Rs:.....

Name of Contractor. _____ Signature. _____

Address. _____


 Executive Engineer, (Civil)
 Shah Faisal Zone
 DMC Korangi.

Assistant Executive Engineer, (B&R)
 Shah Faisal Zone
 DMC Korangi.

EXECUTIVE ENGINEER, (CIVIL) SHAH FAISAL ZONE
DISTRICT MUNICIPAL CORPORATION (KORANGI).

91

Bid Document:-

Name of work:- Providing & Laying RCC pipe drain in different area UC,
Shah Faisal Zone DMC Korangi.

S. No.17

Estimate Cost:- Rs. 9,30,250/- Cost of Bidding Document Rs. 2000/-
Bid Security 2% of Total Bid amount.

S. No.	Description	Quantity	Rate	Unit	Amount (Rs)
1.	Excavation for pipe line in trenches and pits in wet soil clay or mud etc complete. 0' to 5'	18995 cft	Rs. 4650.00	% Cft	88,328/-
2.	P/ Laying RCC pipes with rubber rings confirming to ASTM C-76 Class II wall B i/c loading un loading cartage up to site of work i/c cutting fitting fixing in trenches etc complete. 8" dia 12" dia	800 rft 400 rft	Rs. 206.00 Rs. 367.00	P/rft P/rft	1,64,800/- 1,46,800/-
3.	Making/ Construction of Man Holes of 4' internal dia at bottom 5' clear depth in cc 1:2:4, 6" thick in bottom and 9" thick walls i/c making channels and benching in required Nos and required No of foot rests with 3/4" dia M/S bars painted 3coats complete in all respects.	32 No	Rs. 14529.00	Each	4,64,928/-
4.	Add or deduct for depth of man hole beyond specified in its description.	42 rft	Rs. 2538.62	P/rft	10,154/-
5.	Making connection with the existing Manholes i/c cutting holes in walls and making good in CC 1;2;4 and making required channels etc.	10 No	Rs. 280.00	Each	2,800/-
6.	Refilling and disposal of excavated stuff in trenches in layers not more than 6" thick ramming to full compaction.	19000 cft	Rs. 2760.00	% cft	52,440/-

Time limit 60 Day penalty Rs. 2000/- P. Day.

I/We hereby quoted _____ % above / below the Sch: of Rate, Plus open rates.


Cost of schedule items
(i/c quoted premium Rs:.....

Cost of Offer Rates Rs:.....

Total Bid Amount... Rs:.....

Name of Contractor. _____ Signature. _____

Address. _____


 Executive Engineer, (Civil)
 Shah Faisal Zone
 DMC Korangi.

Assistant Executive Engineer, (B&R)
 Shah Faisal Zone
 DMC Korangi.

OFFICE OF THE EXECUTIVE ENGINEER (B&R) SHAH FAISAL ZONE D.M.C KORANGI

Estimated Cost Rs.143,102/- (+) O/Rate

2% Earnest Money Rs.2862/-

Tender Cost Rs.1500/-

**Subject:- Rehabilitation of Dust Bins Near Superior Science College UC No.03
Shah Faisal Zone DMC Korangi.**

S. No	Description of Work	Quantity	Rate	Unit	Amount
1.	Dismantling RCC work 1:2:4 etc.	38-0 Cft	5445.0	% 0Cft	Rs.2069/-
2.	Excavation in foundation of Building bridges and other structure i/c degbelling dressing refilling with in ordinary soil.	56-0 Cft	3176.25	% Cft	Rs.1771/-
3.	Carriage of 100 Cft / 5tons of all material like stone aggregate Sprawls coal time Surkhi etc complete. (3 mile)	94-0 Cft	714.29	% Cft	Rs.671/-
4.	Cement concrete brick or stone ballasts 1.5 to 2" gauge (b) ratio 1:4:8(17/4)	11-0 Cft	11288.75	% Cft	Rs.1242/-
5.	Reinforcement cement concrete work i/c all labour (a) RCC wor roof, slab, beam, column rafts and (b) Precast reinforcement cement concrete in columns beams, lintels stair cases etc complete (l) Ratio 1:2:4.	233-0 Cft	337.0	P. Cft	Rs.78,521/-
6.	Fabrication of mild steel reinforcement for cement concrete i/c cutting bending, lying in position making joints and fasting i/c cost of bending wire (also includes removal of rust form bars)B.using Tor Bars. 17/8 (a).	7.28 Cwt	5001.70	Cwt	Rs.36,412/-
7.	Erection and removal of centering for RCC or plain cement concrete works of portal woo.(b) Vertical (18/19).	150-0 Sft	3127.41	% Sft	Rs.4691/-
8.	Providing & laying 1.36 cement concrete solid block masonry wall 6" & below in thickness set in complete more than 6" thick(22/23)	50-0 Cft	14268.53	% Cft	Rs.7134 /-
9.	Cement plaster 1:4 upto 20 feet height. (58/11)	180-0 Sft	2283.93	% Sft	Rs.4111/-
10.	White washing two coats	1896-0 Sft	425.84	% Sft	Rs.8074/-
11.	Providing & Fixing Nylon Green netting with main frame of M.S. Pipe of 2 dia 18 guage at 8" APART AND SUPPOTING NETWORK OF ms pipe of 1" & ½" dia complete i/c welding cutting bending as per required or as per direction of engineer incharge.	1190.0 Sft	150	P.Sft	Rs.178,500/-
			O/Rate		

1) Time Limit: One Month

2) Penalty: Rs.1000/- per day

I/ we hereby Quoted the our rate at _____ %Above / Below the schedule of rate.

Contractor's Signature _____

Address _____


EXECUTIVE ENGINEER (B&R)
 (Shah Faisal Zone) D.M.C Korangi

OFFICE OF THE EXECUTIVE ENGINEER (B&R) SHAH FAISAL ZONED.M.C KORANGI

Estimated Cost Rs.250,245/-

2% Earnest Money Rs.5005/-

Tender Cost Rs.1500/-

Subject:- Re-Construction of Culvert Near Govt. Degree College UC No.3 and Near Masjid-e- Fazul Gafur UC No.03 Shah Faisal Zone DMC Korangi.

S. No	Description of Work	Quantity	Rate	Unit	Amount
1.	Dismantling RCC work 1:2:4 etc.	230-0 Cft	5445.0	% 0Cft	Rs.12,523/-
2.	Excavation in foundation of Building bridges and other structure i/c degbelling dressing refilling with in ordinary soil.	240-0 Cft	3176.25	% Cft	Rs.7,623/-
3.	Carriage of 100 Cft / 5tons of all material like stone aggregate Sprawls coal time Surkhi etc complete.(3 mile)	470-0 Cft	714.29	% Cft	Rs.3357/-
4.	Cement concrete brick or stone ballasts 1.5 to 2" gauge (b) ratio 1:4:8(17/4)	60-0 Cft	11288.75	% Cft	Rs.6,773/-
5.	Reinforcement cement concrete work i/c all labour (a) RCC wor roof, slab, beam, column rafts and (b) Precast reinforcement cement concrete in columns beams, lintels stair cases etc complete (l) Ratio 1:2:4.	405-0 Cft	337.0	P. Cft	Rs.1,36,485/-
6.	Fabrication of mild steel reinforcement for cement concrete i/c cutting bending, lying in position making joints and fasting i/c cost of bending wire (also includes removal of rust form bars)B. using Tor Bars. 17/8 (a).	13 Cwt	5001.70	Cwt	Rs.65,022/-
7.	Erection and removal of centering for RCC or plain cement concrete works of portal woo.(b) Vertical (18/19).	380-0 Sft	3127.41	% Sft	Rs.11,884/-
9.	Cement plaster 1:4 upto 20 feet height. (58/11)	288-0 Sft	2283.93	% Sft	Rs.6.578/-


1) Time Limit: One Month

2) Penalty: Rs.1000/- per day

I/ we hereby Quoted the our rate at _____ %Above / Below the schedule of rate.

Contractor's Signature _____

Address _____


EXECUTIVE ENGINEER (B&R)
(Shah Faisal Zone) D.M.C Korangi



OFFICE OF THE EXECUTIVE ENGINEER KORANGI ZONE DMC KORANGI

Tender Reference No. ADMTR/K/247/2014-15 Dated: 06-05-2015

DATE OF OPENING: 29-05-2015

VOLUME-II BILL OF QUANTITIES (SINGLE STAGE ONE ENVELOPE METHOD)

**CLEANING OF STORM WATER DRAIN AT KPT INTER CHANGE MAIN
KORANGI ROAD KORANGI ZONE DMC KORANGI.**

PC Cost:-	Rs, 13,99,594/-
Bid Security:-	Rs, 28,000/-/-
Tender Cost:-	Rs .2500/-

NOTE:

- 1) This Document contains 02 page excluding this page
- 2) The Standard Terms & Condition of Bidding Documents (Volume-I) available in the office & website of DMC Korangi

[Signature]
Executive Engineer
District Municipal Corporation
Korangi Karachi.

Issue to M/S. _____

P.No _____
Dated: _____
Bank: _____

Signature & Stamp of Issuing Authority.



OFFICE OF THE EXECUTIVE ENGINEER

KORANGI ZONE DMC KORANGI

CLEANING OF STROM WATER DRAIN AT KPT INTER CHANGE MAIN
KORANGI ROAD KORANGI ZONE DMC KORANGI.

Tender Reference No. ADMTR/K/247/2014-15 Dated : 06-05-2015

(A)

S.No.	DESCRIPTION.	QUANTITY	RATE.	UNIT.	AMOUNT
01	Cleaning inside sewerage lines completely restoring original silt free space/diameter of pipes line by labour and equipment (Mechanically / electrically driven). i/c accessories, like pulley's steel rope, bucket and craggers sizing from 6" to 18" dia their to and fro" pulling action (No of passes shall be as many as required) would be taken in two phases (first phase entire length from down stream to up stream bringing down stream of entire length ensuring no silt is observed in buckets 6" dia to 18" dia) except only sewerage water and finally passing a steel ball of dia 12" lesser that the diameter pf pipe but not exceeding 48" dia ball even for larger dia pipe to ensure perfect cleaning. The job includes all the hire cost of equipments and accessories of above winching machine / devices along with / engine with winching drum set having steel rope pully mounted over it, steel bucket fro 6" dia hooks and other protection likes safety barriers, traffic signals, traffic cones ensuing no damaged 24" Dia	6184.63	209.30	P/Rft	12,94,445/-
02	Cleaning de-silting of main hole inspection chambers i/c cleaning of and rodding of connected sewers (Average 50-0 per M.Hole Removing sewage and solid wastes and throwing outside KMC limits.	25.0	474.83	P/No	11,871/-
03	Carriage of 100 Cft/5 tones of all material like stone aggregate, spawl, coal Lime, sukhi etc. B.G rail fastenings points and crossing bridge, Girders, pipes, sheet rails, M.S bar etc, or 1000Nos bricks, 10" x 5" x 3" or 1000Nos etc.	10472.0	714.29	%Cft	74,800/-
04	RC work in roof slab, beams columns rafts, lintels (1:2:4) etc complete (P# 16 item 6 a)	25.0	337.0	P/Cft	8,425/-
05	Fabrication of mild steel reinforcement for CC i/c sutting, bending etc complete	2.01	5001.70	P/CWT	10,053/-
Total Rs. 13,99,594/-					

2

**CLEANING OF STROM WATER DRAIN AT KPT INTER CHANGE MAIN
KORANGI ROAD KORANGI ZONE DMC KORANGI.**

(94)

(SUMMARY OF BILL OF QUANTITIES)

I/We hereby quoted as follows:

		<u>In Figure</u>	<u>In Words</u>
<u>01</u>	Part .A (item based on S/R) _____ %Below/ Above	Rs.	
<u>02</u>	Part .B (item based on A/R)	Rs.	
<u>03</u>	Part .C (item based on O/R)		
Grand Total (A+B+C)		Rs.	

The Total amount is

Rs. _____ (Rupees _____)

_____ for the complete job for all schedule of rate & offer rates (which ever is included in the BOQ)

I/We have attached a Bid Security amounting to Rs. _____/- as per NIT in shape of pay order bearing No. _____ dated _____ issued from _____ (Bank)


Time Limit : 60 Calendar Days

Penalty Per Day: Rs. 9,327/- per day (Max.10% of Sanctioned Cost)

Validity : 90+30 Days as per SPP Rules 2010

NOTE:

- Tender must be quoted in figure & in words both otherwise liable to be cancelled.
- All over writing & correction if any must be initialed & stamped by the bidder.
- We/I read the standard bidding Documents (Volume-I) and available DCM Korangi and agreed to abide all of them and also provide all these documents with our signatures as & when directed.

For Office Use of DMC Korangi
Verified BOQ by: 
A.E.E Korangi Signature with Stamp

Signature of the contractor with stamp

Address: _____



OFFICE OF THE EXECUTIVE ENGINEER

KORANGI ZONE DMC KORANGI

Tender Reference No. ADMTR/K/247/2014-15 Dated : 06-05-2015

DATE OF OPENING: 29-05-2015

VOLUME-II BILL OF QUANTITIES (SINGLE STAGE ONE ENVELOPE METHOD)

REPAIR OF DAMAGED WALL OF NALLAH & CLEANING OF
NALLAH IN QUYYUMABAD KORANGI ZONE DMC KORANGI.

PC Cost:-	Rs, 38,57,091/-
Bid Security:-	Rs, 77,142/-
Tender Cost:-	Rs, 3,000/-

NOTE:

- 1) This Document contains 03 page excluding this page
- 2) The Standard Terms & Condition of Bidding Documents (Volume-I) available in the office & website of DMC Korangi

[Signature]
Executive Engineer
District Municipal Corporation
Korangi Karachi.
Executive Engineer
(S&R) DMC Korangi

Issue to M/S. _____

P.No _____
Dated: _____
Bank: _____

Signature & Stamp of Issuing Authority.



OFFICE OF THE EXECUTIVE ENGINEER


KORANGI ZONE DMC KORANGI

95

REPAIR OF DAMAGED WALL OF NALLAH & CLEANING OF NALLAH IN QUYYUMABAD KORANGI ZONE DMC KORANGI.

Tender Reference No. ADMTR/K/247/2014-15 Dated : 06-05-2015


S.No.	DESCRIPTION	QUANTITY	RATE (Rs.)	UNIT	AMOUNT
01	Excavation in foundation of building bridges and other structure including dag belling dressing .refiling around structure with excavated earth watering and remaining lead upto 5 ft (P# 4 ltrm 18 b)	1500.0	3176.25	% Cft	4,764/-
02	C C brick or stone ballast in 1:4:8	375.0	9416.28	% Cft	35,311/-
03	Erection and Removal of centering for C.C Plain	3500.0	3127.41	% Sft	1,09,459/-
04	Cement concrete plain i/c finishing & carrying etc complete without shutting 1:2:4 (situ)	2188.0	14429.25	% Sft	3,15,712/-
05	P/L 1:3:6 c.c solid block masonry wall above 6" thick set in 1:6 c: mortar in G/F superstructure i/c ranking out joint etc	1157.0	14621.44	% Cft	1,69,170/-
06	Cement Plaster 1:4 1/2 " thick etc complete.	2105.0	2283.93	% Cft	48,077/-
07	Clearing inside sewerage lines completely restoring original silt free space/diameter of pipes line (42" Dia)	3233.75 3300.00	209.30 322.00	P/Rft P/Rft	6,76,825/- 10,62,600/-
08	Carriage of 100 Cft/5 tones of all material like stone aggregate, spawl, coal Lime, sukhi etc. B.G rail fasteners points and crossing bridge, Girders, pipes, sheet rails, M.S bar etc ,or 1000Nos bricks, 10" x 5" x 3" or 1000Nos etc.	52800.0	714.29	%Cft	3,77,145/-
09	Excavation for pipe line in trenches and pits in wet soils clay or mud i/c trimming and dressing sides to true alignment and shape leveling of beds of trenches to correct level and grade cutting joint holes and disposal of surplus earth within a one chain as directed by engineer incharge. Providing fence guards, light flags and temporary crossings for non-vehicular traffic where ever requires lift upto 5ft (1.25m) and lead upto one chain (30.5m)	10500	4650.00	%Cft	48,825/-
10	Providing / Laying of RCC with Rubber ring joints and fitting in trenches including cutting fitting and jointing with rubber ring i/c testing with water to specified pressure 21 " dia	700	367/-	P/Rft	2,56,900/-


Assistant Executive Engineer
KORANGI ZONE DMC KORANGI

95

11	Providing manhole 4' internal dia without RCC cover, with C.I frame (15kg) & 5 feet clear depth cast in situ 1:2:4 bajri 9" thick wall 1:4:8 CC in 5' dia 6" thick in foundation 1:2:4 CC in benching 1/2" thick cement plaster 1:3 on inside wall & surface of channel & i/c making required nos of main branches channel i/c excavation in all kind soil, back filling disposal of surplus stuff complete as per drawing & dressing & instruction of the Engineer Incharge	21	14,529/-	Each	3,05,109/-
12	Manufacturing and supplying of RCC ring slab 21" dia inside 36" dia outside 7.5 width and 6" thick 3'8" dia 8 Nos Cross Linked bars welded and two sunk type hooks. Casted in a 1.13 Conc. With embedded 15kg C.I frame in perfect position i/c transportation charges for an average lead of 20 KM per trip from cast yard to town officer (A minimum of 25 slabs per trip will be transported)	176.44.0 Nos	1906.60	P/Nos	1,61,203/-
13	Manufacturing and supplying of 21" RCC man hole covers cast in 1:2:4 cement concrete (Ratio 50% Crush .50% G. Bajri) 3" in deep at centre reinforced with 1/2" dia tor steer bars at 4" C/C welded to 3/16" thick 2 inch deep M.S Plate and 2 hook of 3/8 dia baar i/c cutting stacking and transportation within 10 miles etc complete 21 "Dia	135.0	913.63	P/Nos	2,57,391/-
14	Making connection with the existing manhole i/c the cost of cutting hole in wall making them good in CC 1:2:4 & making required channel etc complete.	28	90/-	P/Nos	2,520/-
15	Refilling the excavated stuff in trenches 6" thick layer i/c watering ramming to full compacting etc complete. "(Pub-53, Page # 77/24 Sched-2012.)	9450	2760/-	%0 Cft	26,080/-

Total Amount Rs. 38,57,091/-


Assistant Executive Engineer
(B&R) DMC Korang

**REPAIR OF DAMAGED WALL OF NALLAH & CLEANING OF
NALLAH IN QUYYUMABAD KORANGI ZONE DMC KORANGI.**

(95)

(SUMMARY OF BILL OF QUANTITIES)

I/We hereby quoted as follows:

		<u>In Figure</u>	<u>In Words</u>
01	Part A (item based on S/R) _____ % Below/ Above	Rs.	
02	Part B (item based on A/R)	Rs.	
03	Part C (item based on O/R)		
Grand Total (A+B+C)		Rs.	

The Total amount is

Rs. _____ (Rupees)

_____ for the complete job for all schedule of rate & offer rates (which ever is included in the BOQ)

I/We have attached a Bid Security amounting to Rs. _____/- as per NIT in shape of pay order bearing No. _____ dated _____ issued from _____ (Bank)


Time Limit : 60 Calendar Days

Validity : 90±0 Days as per SPP Rules 2010

Penalty Per Day: Rs. 25,715/- per day (Max. 10% of Sanctioned Cost)

NOTE:

- Tender must be quoted in figure & in words both otherwise liable to be cancelled.
- All over writing & correction if any must be initialed & stamped by the bidder.
- We/I read the standard bidding Documents (Volume-I) and available DCM Korangi and agreed to abide all of them and also provide all these documents with our signatures as & when directed.

For Office Use of DMC Korangi
Verified BOQ by: 
Assistant Executive Engineer
A.E.E Korangi
Signature with Stamp

Signature of the contractor with stamp

Address: _____



OFFICE OF THE EXECUTIVE ENGINEER

KORANGI ZONE DMC KORANGI

Tender Reference No. ADMTR/K/247/2014-15 Dated : 06-05-2015

DATE OF OPENING: 29-05-2015

VOLUME-II BILL OF QUANTITIES (SINGLE STAGE ONE ENVELOPE METHOD)

PATCH WORK/REPAIR OF 5000 ROAD KORANGI ZONE DMC KORANGI

PC Cost:- Rs, 31,37,588/-
 Bid Security:- Rs, 62,752
 Tender Cost: - Rs.3000/-

NOTE:

- 1) This Document contains 03 page excluding this page
- 2) The Standard Terms & Condition of Bidding Documents (Volume-I) available in the office & website of DMC Korangi

[Signature]
 Executive Engineer

District Municipal Corporation
 Korangi Karachi.

Issue to M/S. _____

P.No _____

Dated: _____

Bank: _____

Signature & Stamp of Issuing Authority.



OFFICE OF THE EXECUTIVE ENGINEER

KORANGI ZONE DMC KORANGI

96

PATCH WORK/REPAIR OF 5000 ROAD KORANGI ZONE DMC KORANGI

Tender Reference No. ADMTR/K/247/2014-15 Dated : 06-05-2015

S#	Particular	Quantity	Rate	Unit	Total
01	Dismantling Stone metal road.	14000.0	605.0	% Cft	84,700/-
02	Carriage of 100 Cft/5 tones of all material like stone aggregate, spawl, coal Lime, sukhi etc. B.G rail fastenings points and crossing bridge, Girders, pipes, sheet rails, M.S bar etc ,or 1000Nos bricks, 10" x 5" x 3" or 1000Nos etc.	14000.0	714.29	%Cft	1,00,001/-
03	P/L aggregate base course in proper grade and chamber having CBR 80% as per AASHTO standard specification i/c spreading mechanical means (Motor grader, vibratory roller and smooth wheel roller etc.	12964.	5542.24	%Cft	7,18,501/-
04	Providing and spraying prime coat with medium curing asphalt of penetration grade 60/70. prime coat shall be used @ kerosene oil. using uniformly pressure spray distributor /boiler with automatic temperature controller prior to application of the prime coat all user material shall be removed from the base course and the same shall be cleaned by means of approved mechanical sweeper, blowers, hard brooms and disposal the laying of bituminous course material and methodology shall fully comply the tests and specification of AASHTO and as directed by the engineer incharge.(rates include all cost of material labour all test T&P and all lead and lifts) (app:rate from the govt).	28000.0	700.0	% Sft	1,96,000/-
05	Providing 1 1/2 " Thick " (Consolidated) premixed carpet with paver in proper chamber and grade i/c supplying 15 cft bajri 5cft hill sand (of approved quality and grade) between of 80/100 penetration i/c mixing in mechanical mixture in required proportion i/c heating material and cleaning the road surface (hill sand 3.cft for mixing 3.0 cft for desalting (rate includes all cost of materials T&P and carriage upto 3 chains)(Items #19 / P#8)	28000.0	6488.32	%Sft	18,16,730/-
Total Rs. 29,15,932/-					

06	Excavation for pipe line in trenches and pits in wet soils clay or mud i/c trimming and dressing sides to true alignment and shape leveling of beds of trenches to correct level and grade cutting joint holes and disposal of surplus earth within a one chain as directed by engineer incharge. Providing fence guards, light flags and temporary crossings for non-vehicular traffic where ever requires lift upto 5ft (1.25m) and lead upto one chain (30.5m)	3000.0	4650/-	%0 Cft	13,950/-
07	Providing / Laying of RCC with Rubber ring joints and fitting in trenches including cutting fitting and jointing with rubber ring i/c testing with water to specified pressure 21 " dia	200.0	367/-	P/ Rft	73,400/-
08	Providing manhole 4' internal dia without RCC cover, with C.I frame (15kg) & 5 feet clear depth cast in situ 1:2:4 bajri 9" thick wall 1:4:8 CC in 5' dia 6" thick in foundation 1:2:4 CC in benching ½" thick cement plaster 1:3 on inside wall & surface of channel & i/c making required nos of main branches channel i/c excavation in all kind soil , back filling disposal of surplus stuff complete as per drawing & dressing & instruction of the Engineer Incharge	06 Nos	14,529/-	Each	87,174/-
09	Manufacturing and supplying of RCC ring slab 21" dia inside 36" dia outside 7.5 width and 6" thick 3'8" dia 8 Nos Cross Linked bars welded and two sunk type hooks. Casted in a 1.13 Conc. With embedded 15kg C.I frame in perfect position i/c transportation chages for an average lead of 20 Km. per trip from cast yard to town officer (A minimum of 25 labs per trip will be transported)	10.0	1906.60	P/Nos	19,066/-
10	Shifting & Fixing of 36 dia Ring Slabs in perfect position on damaged manholes i/c cutting of damaged portion of the manholes in proper shape and laying a layer of cement mortar of 2" thickness and disposal of debris.	10.0	563.09	P/ Nos	5,636/-
11	Manufacturing and supplying of 21 "RCC man hole covers cast in 1:2:4 cement concrete (Ration 50 % Crush ,50 % G .Bajri)3" in deep at centre reinforced with ½ dir tor steer bars at 4" C/C welded to 3/16" thick 2 inch deep M.S Plate and 2 hook of 3/8 dia baar i/c cutting stacking and transportation within 10 miles etc complete 21 "Dia	16.0	913.63	P/NOS	14,618/-
12	Making connection with the existing manhole i/c the cost of cutting hole in wall making them good in CC 1:2:4 & making required channel etc complete.	04.0	90/-	P/Nos	360/-
13	Refilling the excavated stuff in trenches 6" thick layer i/c watering ramming to full compacting etc complete. "(Pub-53, Page # 77/24 Sched-2012.)	2700.0	2760/-	%0 Cft	7,452/-
Total Rs. 2,21,656/-					

PATCH WORK/REPAIR OF 5000 ROAD KORANGI ZONE DMC KORANGI

(SUMMARY OF BILL OF QUANTITIES)

96

I/We hereby quoted as follows:

		<u>In Figure</u>	<u>In Words</u>
<u>01</u>	Part .A (item based on S/R) _____ %Below/ Above	Rs.	
<u>02</u>	Part .B (item based on A/R)	Rs.	
<u>03</u>	Part .C (item based on O/R)		
Grand Total (A+B+C)		Rs.	

The Total amount is

Rs. _____ (Rupees _____
_____ for the complete job for all schedule of rate & offer rates (which ever is included in the BOQ)

I/We have attached a Bid Security amounting to Rs. _____/- as per NIT in shape of pay order bearing No. _____ dated _____ issued from _____ (Bank)

Time Limit : 60 Calendar Days

Penalty Per Day: Rs. 20,920/- per day (Max.10% of Sanctioned Cost)

Validity : 90+30 Days as per SPP Rules 2010

NOTE:

- Tender must be quoted in figure & in words both otherwise liable to be cancelled.
- All over writing & correction if any must be initialed & stamped by the bidder.
- We/I read the standard bidding Documents (Volumn-I) and available DCM Korangi and agreed to abide all of them and also provide all these documents with our signatures as & when directed.

For Office Use of DMC Korangi

Verified BOQ by: A. E. E Korangi

A.E.E Korangi
Signature with Stamp

Signature of the contractor with stamp

Address: _____



OFFICE OF THE DIRECTOR PARKS KORANGI ZONE DMC KORANGI

REPAIR & MAINTENANCE OF FAMILY PARK 33-D UC-07, FAROOQUI PARK UC-03 KORANGI AND PROVIDING & SUPPLYING OF GARDEN ACCESSORIES AND MATERIAL FOR VARIOUS PARKS AND NURSERY OF KORANGI ZONE

Tender Reference NO. ADTR/K/247 Dated 06-05-2015

Part "A"

S.No	Description	Quantity	Rate	Unit	Amount
	Schedule items:				
1	Dismantling Cement Concrete. (10/19-c)	136	3327.50	%cft	4525 /-
2	Excavation in foundation of building bridges and other structure including dig belling dressing refilling around structure with excavated earth watering and ramming lead upto 5 feet 4/18 (b).	6000	3176.25	%cft	19058 /-
3	Providing and laying 1:3:6 Cement concrete solid block masonry wall above 6" in thickness set in 1:6 cement mortar in G.F ground floor super structure i/c raking out joints & ceiling etc. complete. Above 6" thick (19/23).	315	14621.44	%cft	46058 /-
	Pre - Cast Slab With Girders. (17/6-ii-i)	105	309.78	PCFT	32527 /-
5	471 / 4½" thick cement plaster 1:4 on walls and columns etc 58/11 (b).				
	(b) ½" thick cement plaster.	4300	2283.93	%Sft	98209 /-
6	P/F iron steel grill using solid square bars of size ½" placed at 4" i/c and frame of flat iron patti of ¾" x ¾" i/c circle shape at 1-0 apart equivalent fitted with screws or i/c painting 3 coats with 1 st coat of red oxide paint (94/30).	64	194.16	Psft	12425 /-

S.No	Description	Quantity	Rate	Unit	Amount
7	M ² steel grated doors complete with locking arrangement angle iron frame 2" x 2" x 3/8" and 3/4" Sq: bars 4" center to center (92/23).	120	726.72	Psft	87206 /-
8	P/L 2" topping CC 1:2:4 i/c surface finishing & dividing into panels 1 1/2 thick (42/16-c)	320	3327.50	%cft	10648 /-
9	Providing and fixing of kerb stone size 12" x 18" x 6" making joints the kerbs with 1:6 cement mortar 5mm thick over 1:6 mortar base (2" thick) including fixing in correct alignment, jointing and curing etc. complete as directly by the engineer Incharge.	300	297.00	Prft	89100 /-
10	Painting Iron work surface painting etc. (70/5c)	2600	1499.68	%Sft	38992 /-
11	Distemping three coats i/c one coat over priming coat etc.(68/4a)	16500	1072.06	%Sft	176890 /-
12	Weather Shield Paint	17800	1948.10	%Sft	346762 /-
12	Providing & Fixing of GI Pipe 1-1/2" Dia 12 / 1(v)	500	188.97	Prft	94485
12	Providing & Fixing of GI Pipe 1-1/4" Dia 12 / 1(v)	1500	153.19	Prft	229785
13	Colored cement tiles (pattern 12" x 12" x 1") of approved shade and pattern laid flat in 1:2 grey cement mortar. (47/59)	1660	9427.84	%Sft	156502 /-
14	Khaprail Manglore Tiles 15" x 8" x 1-1/2" of approved design / shape laid flat in 1 : 2 grey cement mortar over a bed of 3/4" thick grey cement mortar. (38 / 39)	276.81	8977.90	%Sft	24852 /-
15	Supplying earth from approve outside sources within a radius of 5 miles.	1400	10772.90	%Cft	150821 /-

S.No	Description	Quantity	Rate	Unit	Amount
16	Providing & Fixing of Cement Paving Blocks Flooring having size of 197 x 97 x 60 (mm) of City / Quddra / Cobble shape with natural colors, having strength b/w 5000 psi to 8500 psi i/c filling the joints with hill sand and laying in specified manner / pattern and design etc complete.(49 / 71)	600	199.77	Psft	119862
17	Boring (41 / O (a))	240	160.00	Prft	38400
	Total of Scheduled Items (a)				1777110 /-
	Add 2% Contengency				35542 /-
	Total Cost of Scheduled Items (a)				1812652 /-
	Part "C"				
b.	<u>Non-Scheduled Items</u>				
18	S/S of garden soil (sweet earth) in uniform thickness i.c mixing & breading etc.	37000		Pcft	
19	S/S of garden soil (sweet earth) in uniform thickness upto any depth in the prepared used i/c breaking clods dressing fine for grassing i/c disposal of rubbish within 3 chains.	19880		Pcft	
20	P/F 4 seated white mosaic benches (new stylisn & colored).	30		Each	
21	Providing & Supplying of Plastic Rubber Pipe 1" Dia	5000		Prft	
22	Providing & Supplying of Plastic Rubber Pipe 1-1/4" Dia	1500		Prft	
23	Providing & Supplying of Plastic Rubber Pipe 3" Dia	300		Prft	
24	Providing & Fixing of Mono Block Motor 2HP.	3		Each	
25	Providing & Fixing of Mono Block Motor 1HP.	2		Each	

S.No	Description	Quantity	Rate	Unit	Amount
26	Providing & Supplying of Generator for Lawn Mover Machine (Honda 1.5 KVA)	2		Each	
27	Providing & Supplying of Generator for Water Tanker (Robin)	2		Each	
28	Providing & Supplying of Plant Pots Special (Size 14")	2000		Each	
29	Providing & Supplying of Earthen Pots (Size 12")	2000		Each	
30	Providing & Supplying of Earthen Pots (Size 14')	1500		Each	
31	Providing & Supplying of Large Bottle (Size 20")	500		Each	
32	Repairing of Lawn Mover Machine.	4		Each	
33	Providing & Supplying of Plastic Bags for Korangi Nursery.	25		Pkg	
34	Repairing of Motor Winding.	6		Each	
35	Repairing & Refixing of Main Gate.	2		Each	
36	Providing & Supplying of Lime (Choona).	6000		Pkg	
37	Providing & Applying of Plant Spray (Brand MALOTHENE).	1		Pjob	
38	Providing & Fixing of Playing Equipments				
	a. Sliding	2		Each	
	b. Seesaw	2		Each	
	c. Maryground	2		Each	
	Total of Non Schedule Items (b)			Rs.	
	+ Add (a)			Rs.	
	Total Cost of A + B			Rs.	
	Total Cost (a + b)				

NAME OF WORK: REPAIR & MAINTENANCE OF FAMILY PARK SECTOR 33-D UC-07, FAROOQUI PARK UC-03 KORANGI & PROVIDING & SUPPLYING OF GARDEN ACCESSORIES & MATERIAL FOR VARIOUS PARKS & NURSERY OF KORANGI ZONE.

97

(SUMMARY OF BILL OF QUANTITIES)


I/We hereby quoted as follows:		<u>In Figure</u>	<u>In Words</u>
<u>A</u>	Part .A (item based on S/R) _____ %Below/ Above	Rs.	
<u>B</u>	Part .B (item based on O/R)		
Grand Total (A+B)		Rs.	

The Total amount is
Rs. _____ (Rupees)
_____ for the complete job for all schedule of rate & offer rates (which ever is included in the BOQ)

I/We have attached a Bid Security amounting to Rs. _____/- as per NIT in shape of pay order bearing No. _____ dated _____ issued from _____ (Bank)

Time Limit : 60 Calendar Days Penalty Per Day: Rs. 3,100/- per day (Max.10% of Sanctioned Cost)
Validity : 90+30 Days as per SPP Rules 2010

- NOTE:**
- Tender must be quoted in figure & in words both otherwise liable to be cancelled.
 - All over writing & correction if any must be initialed & stamped by the bidder.
 - We/I read the standard bidding Documents (Volume-I) and available DCM Korangi and agreed to abide all of them and also provide all these documents with our signatures as & when directed.

For Office Use of DMC Korangi
Verified BOQ by


Dy. Director (Parks) Korangi Zone
Signature with Stamp

Signature of the contractor with stamp
Address: _____

Dy. Director (Parks) Korangi Zone

OFFICE OF THE DIRECTOR PARK (P&R) DMC KORANGI

Estimated Cost: 9,99,500/- 02% Earnest Money Tender Cost Rs. 2000/=

Subject: **Repair And Maintenance Of Parks/Play Ground In Different Area Korangi Zone Dmc Korangi**

S #	Description	Qty	Rate	UNIT	Amount
1	Dismantling cement Block masonry etc	125.0	1134.38	%cft	1418/-
2	Dismantling & Removal of CC @1:2:4	480.0	@1360.80	%cft	6273/-
3	Earth work excavation in foundation of buildings.	2200.0	@1361.25	%Cft	2995/-
4	Cement concrete bricks on stone ballast 1.5 to 2" guage 1:4:8	1300.0	@9416.28	%Cft	1,22,412/-
5	Cement concrete plain including placing compacting finishing and curing complete (including searching and washing of stone aggregate) without shuttering (18/5) ratio 1:2:4	1050.0	14429.25	%cft	1,51,507/-
6	Erection and removal of centring of RCC for plain cement concurrent work of portal wood vertical.	2100.0	3127.41	%sft	65,676/-
7	Providing and lying topping cement concrete (1:2:4) including surface finishing and dividing into panel.	4000.0	3275.50	%sft	1,31,020/-
8	Cement plaster 1:4 up to 20 feet height (58/11), 1/2 thick.	1460.0	2283.93	%sft	33,345/-
9	Painting with Enamel paint on masonry (plastered) two coats (old surface).	600.0	1014.14	%sft	6085/-
10	Distemping two coats with distemper of app :Quality and shade, i/c priming coat.	2600.0	602.25	%sft	15,659/-
11	P/ fixing industrially manufactured Kerb Block of size 18*12*6 having strength of 4700psi,	9.0	297.01	rft	2670/-
12	Reinforcement cement concrete work I/C all labour (a) RCC work in roof slab, beam, column rafts.	216.0	337	cft	72,792/-
13	Supplying and spreading Garden Soil (sweet earth) free for salt and grass roots etc. complete	2640.0	@35/-	P / Cft	92,400/-
14	Supplying and spreading cowdung manure same up to any dept etc. complete	2300.0	@30/-	P / Cft	69,000/-


15	Providing of Dhaka Grass and Turfing lawns i/c watering and cutting at least one after growing up more then 3 inches.	1554.0	@15/-	P / sft	23,310/-
16	Providing and supplying and spreading in even layer of required thickness Red mourum of approved quality from app:query as desired by Engineer In charge.	1875.0	@45/-	P / cft	84,375/-
17	Fabrication of mild steel Rainforment of cement concrete i/c cutting bending lying in position etc complete.	7.71	@5001.7/-	P/cwt	38,563/-
18	Repairing and maintenance of still grill using solid surface etc complete.	800.0	@100/-	p/sft	80,000/-

- 1) Time Limit : One Month
- 2) Penalty : Rs. 1000/= Per Day

I/we hereby Quoted the our rate at _____ % above / below the schedule of rate.

Contractor's Signature

Address:



**DIRECTOR PARK (P&R)
DMC KORANGI**

OFFICE OF THE DIRECTOR PARK (P&R) DMC KORANGI

Estimated Cost: 9,94,350/-

02% Earnest Money

Tender Cost Rs. 2000/=

Subject: Providing Of Garden Equipments For Different Parks Of Park & Recreation Korangi Zone Dmc Korangi

S #	Description	Qty	Rate	UNIT	Amount
1	Supplying of plastic nylon pipe fine quality etc complete. A)1" dia B)3/4' dia	7000.0Rft 5000.0Rft	@40/- @35/-	P / Rft P / Rft	2,80,000/- 1,74,650/-
2	Supplying of Hedge seasons best quality as per china etc complete	30.0 Nos	@1500/-	P / No	45,000/-
3	Supplying of Prooning seasons best quality as per china etc complete	30.0Nos	@300/-	P/No	9,000/-
4	Supply ng of shawals sewasors best quality as per china etc complete	50.0Nos	@900/-	P/No	45,000/-
5	Supply ng of Tickems Seasons best quality as per china etc complete	50.0Nos	@300/-	P/No	15,000/-
6	Supplying of Phaowarra best quality as per china etc complete	50.0 Nos	@500/-	P/No	25,000/-
7	Supplying of shawar (water cane)best quality as per china etc complete	12Nos	@600/-	P/No	7200/-
8	Supplying of Basket date best quality as per pakistan etc complete	100Nos	@50/-	P/No	5000/-
9	Supplying of Exe best quality as per china etc complete	40.0Nos	@700/-	P/No	28,000/-
10	Supplying of Khurpee best quality as per Pakistan etc complete	100.0Nos	@200/-	P/No	20,000/-
11	Supplying of Spray pump 10 ltrs capacity made by itally etc complete	4.0Nos	@3500/-	P/No	14,000/-
12	Supplying of Jharoo sticks of date fine quality etc complete	200.0	@300/-	P/No	60,000/-
13	Supplying of Urea manure F.F.C as per app: quality etc complete.	100kgs	@90/-	P/kg	9,000/-
14	Supplying of D.A.P manure as per app: quality etc complete.	100kgs	@120/-	P/kg	12,000/-
15	Supplying of Wheel barrow Trolley Best quality as per app:etc complete.	18.Nos	@300/-	P/No	54,000/-

16	Supplying of malathin spray medicine for plant best quality etc.	12ltr	@125/-	P/ltr	1500/-
17	Supplying of thalodan spray medicine for plant best quality etc.	12ltr	@125/-	P/ltr	1500/-
18	Supplying of punjass best quality made by Pakistan as per app:etc complete.	30Nos	@450/-	P/Nos	13500/-
19	Supplying of manual lawn mover machine 24" size with five blades and grass box with best quality made by Pakistan as per app:sample etc.	05Nos	35,000/-	P/No	1,75,000/-
TOTAL:					9,94,350/-

- 1) Time Limit : One Month
- 2) Penalty : Rs. 1000/= Per Day

I/we hereby Quoted the our rate at _____ % above / below the schedule of rate.

Contractor's Signature

Address: _____


DIRECTOR PARK (P&R)
DMC KORANGI



1
100

OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

NO: EE/M&E/DMC/K/ /2015

Dated: - _____

Tender Reference No. _____ Dated : _____

DATE OF OPEANING: _____

VOLUME-II BILL OF QUANTITIES
(SINGLE STAGE ONE ENVELOPE METHOD)

Repair and Maintenance of Garden Lights by Replacing of Damaged /worn-out i/c electrical accessories of fountains for UC No.03,UC NO.04,UC No.07, and Korangi 3 ½ Model Park Korangi Zone DMC Korangi.

PC Cost: -	Open Rate
Bid Security: -	02% of Quoted Bid
Tender Cost: -	Rs, 3000.00

NOTE:

- 1) This Document contains 04 pages including this page
- 2) The Standard Terms &Condition of Bidding Documents (Volume-I) available in the office & website of DMC Korangi

Executive Engineer (M&E),
District Municipal Corporation
Korangi Karachi.

Issue to M/S. _____ P.No. _____

Dated: _____ Bank: _____ Branch: _____

Signature & Stamp of Issuing Authority.



OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

NAME OF WORK: Repair and Maintenance of Garden Lights by Replacing of Damaged /worn-out i/c electrical accessories of fountains for UC No.03,UC NO.04,UC No.07, and Korangi 3 ½ Model Park Korangi Zone DMC Korangi.

Tender Reference: No. _____ Dated: _____

(PART "A" SCHEDULE RATE ITEMS)

S. No.	Description	Quantity	Rate	Unit	Amount
	<u>R/M of Model Parks 3 ½ No, UC-04, UC-07 K.Zone</u>				
01	Replacement of damage / broken and providing fixing of new globe lights fixtures (APS).	164 Nos			
02	Providing and fixing of Saver bulbs 24 watts (Philips).	164 Nos			
03	Providing and fixing of Saver bulbs 85 watts (Philips).	10 Nos			
04	Painting of garden poles as per colour suggested by E/I.	141 Nos			
05	Providing fixing of garden poles canopy for lights fixture.	80 Nos			
06	Providing fixing of brass holder (APS) for lights.	80 Nos			
07	Repairing / maintenance of existing HPIT 400 watts (Son) lights with replacement of damage worn out and providing fixing of new following accessories:-				
	a) P/F of Tube 400 watts (Philips) (Son).	20 Nos			
	b) P/F of Choke 400 watts (Philips) (Son).	20 Nos			
	c) P/F of Ignator (Philips).	20 Nos			
	d) Cleaning and washing of HPIT fixtures.	20 Nos			
08	Providing and Laying of overhead Pvc / Pvc Insolated copper cable size 7/029 2 core for energizing of lights	1540 Mtrs			

S. No.	Description	Quantity	Rate	Unit	Amount
09	Providing and Laying of Pvc / Pvc Insolated copper cable size 3/029 single core for connection of light fixture.	1500 Mtrs			
10	Repairing / maintenance of main panel board system with replacement of damage worn out and providing fixing of new circuit breakers of 10 Amps and 100 Amps i/c of internal wiring complete in all respect.	03 Job			
11	Repairing of C.C foundations of existing garden poles with 1:3:6 ratio including from work rodding and curing etc complete.	132 Nos			
12	Replacement of damage worn out and providing fixing of new circuit breakers 30 amps (Terasaki).	20 Nos			
13	Providing and laying of Pvc / Pvc insolated copper cable size 7/036 2 core overhead for energizing of HPIT 400 watts lights.	270 Mtrs			
14	Providing and laying of Pvc / Pvc cable copper size 7/044 2 core with Pvc conduit pipe.	270 Mtrs			
15	Providing and fixing of HPIT 400 watts (Son) light fixture complete with Lamp, Choke and ignator (Philips).	04 Nos			



OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

(SUMMARY OF BILL OF QUANTITIES)

I/We hereby quoted as follows:		<u>In Figure</u>	<u>In Words</u>
01	Part .A (item based on S/R) % Below / Above	Rs.	
02	Part .B (item based on O/R)	Rs.	
Grand Total (A+B)		Rs.	

The Total amount is Rs. _____ Rupees (_____)

for the complete job for all schedule of rate & offer rates (which ever is included in the BOQ)

I/We have attached a Bid Security amounting to Rs. _____/- as per NIT is shape of pay

order bearing No. _____ dated _____ issued from _____.

(Bank)

Time Limit : 30 Calendar Days

Penalty Per Day: Rs. 3000/- per day (Max.10% of Sanctioned Cost)

Validity : 90+30 Days as per SPP Rules 2010

NOTE:

- Tender must be quoted in figure & in words both otherwise liable to be cancelled.
- All over writing & correction if any must be initialed & stamped by the bidder.
- We/I read the standard bidding Documents (Volume n-I) and available DCM Korangi and agreed to abide all of them and also provide all these documents with our signatures as & when directed.

For Office Use of DMC
Korangi

Verified BOQ by:

A.E.E (M &E) D.M.C. Korangi
 Signature with Stamp

Signature of the contractor with stamp

Address: _____



DISTRICT MUNICIPAL CORPORATION KORANGI.

SUBJECT: - ANNUAL CONTRACT FOR LIFTING OF GARBAGE FROM GARBAGE TRANSFER STATION BEHIND AZEEM PURA GRAVE YARD OF SHAH FAISAL ZONE D.M.C KORANGI. TO LAND FILL SITE AT DEH JAM CHAKRO. FOR THE PERIOD ONE YEAR FROM THE AWARD OF CONTRACT.

TENDER DOCUMENTS

Bid Security: - 02 % OFFER RATE
Tender Cost: - Rs, 3,000/-

Signature
Municipal Corporation
District Municipal Corporation
Korangi

TENDER OPENING ON



**DISTRICT MUNICIPAL CORPORATION KORANGI.
SHAH FAISAL ZONE**

SUBJECT: - ANNUAL CONCRAT FOR LIFTING OF GARBAGE FROM GARBAGE TRANSFAR STATION BEHIND AZEEM PURA GRAVE YARD OF SHAH FAISAL ZONE D.M.C KORANGI. TO LAND FILL SITE AT DEH JAM CHAKRO. FOR THE PERIOD ONE YRAR FROM THE AWARD OF CONTRACT.

S #	Description	Unit	Quantity	Rate	Amount
1)	Lifting and transportation of all sort of solid waste i.e garbage, rubbish shrubs tree cutting of any condition mechanical means (by means of Dumper, Loader etc) Including loading, unloading, haulage transportation etc. complete from Garbage transfer station behind Azeem Pura Grave Yard of Shah Faisal Zone to land fill site Jam Chakro, including all charges and the cost of weighting the solid waste complete as directed by in-charge officer for the work.	P/Ton (1000 kg)	62,400 Tons		
	Total				

Amount per year in Figures Rupees _____

Amount per year in words Rupees _____

_____ Only

Name of Contractor _____

Address _____

Authorized Signature: _____ Date: _____

DEPUTY DIRECTOR HEALTH SERVICES
SHAH FAISAL ZONE D.M.C KORANGI.




02

DISTRICT MUNICIPAL CORPORATION KORANGI

SUBJECT: ANNUAL CONTRACT FOR LIFTING OF GARBAGE FROM 100 QUARTER OF KORANGI ZONE TO LAND FILL SITE AT DEH JAM CHAKRO. FOR THE PERIOD ONE YEAR FROM THE AWARD OF CONTRACT.

TENDER DOCUMENTS

Bid Security:- 02 % OFFER RATE
Tender Cost: - Rs, 3,000/-



TENDER OPENING ON



BILL OF QUANTITY

SCHEDULE OF : ANNUAL CONTRACT FOR LIFTING OF GARBAGE FROM 100 QUARTER OF KORANGI ZONE TO LAND FILL SITE AT DEH JAM CHAKRO. FOR THE PERIOD ONE YEAR FROM THE AWARD OF CONTRACT.

S.#	Description	Unit	Quantity	Rate	Amount
01	Lifting and transportation of all sort of solid waste i.e garbage, rubbish shrubs tree cutting of any condition mechanical means (by means of Dumper, loader etc) including loading, unloading, haulage transportation etc. complete from transfer station with in the jurisdiction of korangi zone to land fill site jam chakro, including all charges and the cost of weighting the solid waste complete as directed by in-charge officer for the work.	P/Ton (1000 kg)	85,800/- Tons		
	TOTAL				


Amount per year in Figures Rupees _____

Amount per year in words Rupees _____
_____ only

Name of Contractor _____

Addressed : _____

Authorized Signature: _____ Date: _____
(with Stamp)


DEPUTY DIRECTOR HEALTH SERVICES
KORANGI ZONE DMC KORANGI

**OFFICE OF THE EXECUTIVE ENGINEER (B&R) LANDHI ZONE D.M.C
KORANGI**

Estimated Cost Open Rate

2% Earnest Money Quoted Amounts

Tender Cost Rs.2000/-

Subject:- Providing and Supplying of Furniture for the Council Hall of D.M.C. Korangi.

S. No	Description of Work	Quantity	Rate	Unit	Amount
1.	Supplying and fixing shesham wooden Table with 9MM thick uppas side glass and Polishing all accessory fitting. (Size 19x7)	1 Nos	Open Rate	-	
2.	Supplying and fixing Shesham wood chair with Leather sheet couchan in all accessory fitting.	60 Nos	Open Rate	-	
3.	Supplying and fixing Sound system Hifi with speaker all accessory fitting. (Japan Made)	1 Job	Open Rate	-	
4.	Supplying and fixing "LED" size 55" (Japan Made).	1 Nos	Open Rate	-	
5.	Supplying and fixing MIC in all accessory fitting. (Japan Made)	2 Nos	Open Rate	-	
	'A' Cordless Mic	2 Nos	Open Rate	-	
	'B' wire Mic	25 Nos	Open Rate	-	
	'C' Reteam Mic				
6.	Supplying and fixing Split AC in all accessory fitting. (Japan Made) 1 ½ Ton.	3 Nos	Open Rate	-	
7.	Supplying and fixing wooden sofa seats with table 5MM glass.	2 Nos	Open Rate	-	
8.	Supplying and fixing Breaket fans all accessory fitting.	16 Nos	Open Rate	-	
9.	Providing & Supplying of Revolving chair Hi Class with all accessories.	3 Nos	Open Rate		
10.	Providing & Supplying of Stabilizer for A C 5000 volt (Universal)	3 Nos	Open Rate		

1) Time Limit: **One Month**

2) Penalty: **Rs.1000/- per day**

I/ we hereby Quoted the our rate at Rs. _____ open Rate.

Contractor's Signature _____

Address _____


EXECUTIVE ENGINEER (B&R)
(Landhi Zone) D.M.C Korangi

(4)

OFFICE OF THE EXECUTIVE ENGINEER B&R LANDHI ZONE D.M.C KORANGI

Estimated Cost Rs.8,96,050/-

Earnest Money Rs: .17,921/-

Tender Cost Rs.2000/-

Subject:- Construction of two Dust Bins UC No.01 Landhi Zone D.M.C Korangi.

S. No	Description of Work	Quantity	Rate	Unit	Amount
1.	Excavation in foundation of building bridges and other structure/c dagbelling dressing refilling with excavated earth watering and ramming lead up to 5 feet. a) in ordinary soil b) in hard soil on soft soil.	800-0Cft	3176.25 3554.38	% 0 Cft % 0 Cft	Rs.2541/- -
2.	Cement concrete bricks or stone ballast 1.5" to 2" gauge (b) Ratio 1:4:8 etc complete.	1060-0 Cft	9416.28	% Cft	Rs.99,813/-
3.	Reinforcement cement concrete work i/c all labour and material except the cost of steel reinforcement and its labour for bending and binding, which will paid separately. This rate also including all kinds of forms moulds: lifting shuttering curing rendering and finishing the exposed surface (including screening and washing of shingle). 16/6 a) RCC work in , roof, Slab beams, coloums lintel and other structure member laid in situ or precast laid in position Complete in all respects. 1:2:4	1088-0Cft	337.0	P. Cft	Rs.3,66,656/-
4.	Fabrication of mild steel reinforcement for cement concrete i/c cutting bending, lying in position making joints and fasting i/c cost of bending wire (also includes removal of rust form bars) B. using Tor Bars. 17/8 (a).	48.57Cwt	5001.70	Cwt	Rs.2,42,933/-
5.	Filling watering and ramming earth in floors with new earth (excavated from out side) lead upto one chain, lift upto 5 feet.	3000-0 Cft	3630.0	% 0Cft	Rs.10,890/-
6.	P/L stone pitching / stone soling including sub-base with hammer dressed stone on surface laid in course i/c carriage of material chain etc. (32/23)	900-0 Cft	5377.63	% Cft	Rs.48,399/-
7.	Providing and Lying topping cement concrete (1:2:4) including surface finishing and dividing into panel (42/16) a) 1 1/2" thick..... b) 2" thick.....	- 1200 -0Sft	2548.29 3275.50	% Sft % Sft	- Rs.39,306/-
8.	Cement plaster 1:4 upto 20 feet height. 1/2" thick..... 3/4" thick.....	2720-0Sft -	2283.93 3015.76	% Sft % Sft	Rs.62,123/- -
9.	Colour Washing (54/25) a) One Coat b) Two Coat	- 2720-0Sft	443.27 859.90	% Sft % Sft	- Rs.23,389/-


1) Time Limit: **One Month**

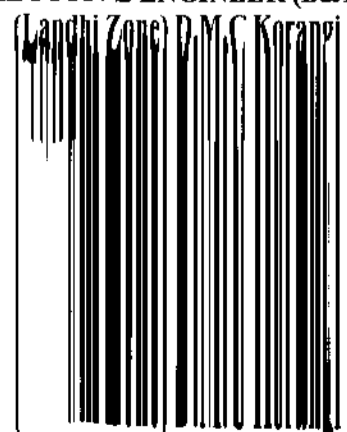
2) Penalty: **Rs.1000/- per day**

I/ we hereby Quoted the our rate at _____ %Above / Below the schedule of rate.

Contractor's Signature _____

Address _____


EXECUTIVE ENGINEER (B&R)



OFFICE OF THE EXECUTIVE ENGINEER B&R LANDHI ZONE D.M.C KORANGI

Estimated Cost **Rs.8,96,050/-**

Earnest Money **Rs: .17,921/-**

Tender Cost **Rs.2000/-**

Subject:- Construction of two Dust Bins UC No.02 Landhi Zone D.M.C Korangi.

S. No	Description of Work	Quantity	Rate	Unit	Amount
1.	Excavation in foundation of building bridges and other structure/c dagbelling dressing refilling with excavated earth watering and ramming lead up to 5 feet. a)in ordinary soil b) in hard soil on soft soil.	800-0Cft	3176.25 3554.38	% 0 Cft	Rs.2541/-
2.	Cement concrete bricks or stone ballast 1.5" to 2" gauge (b) Ratio 1:4:8 etc complete.	1060-0 Cft	9416.28	% Cft	Rs.99,813/-
3.	Reinforcement cement concrete work i/c all labour and material except the cost of steel reinforcement and its labour for bending and binding, which will paid separately. This rate also including all kinds of forms moulds: lifting shuttering curring rendering and finishing the exposed surface (including screening and washing of shingle). 16/6 a)RCC work in , roof, Slab beams, coloums lintel and othe: structure member laid in situ or precast laid in position Complete in all respects. 1:2:4	1088-0Cft	337.0	P. Cft	Rs.3,66,656/-
4.	Fabrication of mild steel reinforcement for cement concrete i/c cutting bending, lying in position making joints and fasting i/c cost of bending wire (also includes removal of rust form bars)B.using Tor Bars. 17/8 (a).	48.57Cwt	5001.70	Cwt	Rs.2,42,933/-
5.	Filling watering and ramming earth in floors with new earth (excavated from out side) lead upto one chain, lift upto 5 feet.	3000-0 Cft	3630.0	% 0Cft	Rs.10,890/-
6.	P/L stone pitching / stone soling including sub-base with hammer dressed stone on surface laid in course i/c carriage of material chain etc. (32/23)	900-0 Cft	5377.63	% Cft	Rs.48,399/-
7.	Providing and Lying topping cement concrete (1:2:4) including surface finishing and dividing into panel (42/16) a) 1 1/2" thick..... b) 2" thick.....	- 1200 -0Sft	2548.29 3275.50	% Sft	- Rs.39,306/-
8.	Cement plaster 1:4 upto 20 feet height. 1/2" thick..... 3/4" thick.....	2720-0Sft -	2283.93 3015.76	% Sft	Rs.62,123/- -
9.	Colour Washing (54/25) a) One Coat b)Two Coat	- 2720-0Sft	443.27 859.90	% Sft	- Rs.23,389/-


1) Time Lir it: **One Month**

2) Penalty: **Rs.1000/- per day**

I/ we hereby Quoted the our rate at _____ %Above / Below the schedule of rate.

Contractor's Signature _____

Address _____


EXECUTIVE ENGINEER (B&R)
 (Landhi Zone) D.M.C Korangi

OFFICE OF THE EXECUTIVE ENGINEER B&R LANDHI ZONE D.M.C KORANGI

Estimated Cost Rs.8,96,050/-

Earnest Money Rs. :17,921/-

Tender Cost Rs.2000/-

Subject - Construction of two Dust Bins UC No.03 Landhi Zone D.M.C Korangi.

S.No	Description of Work	Quantity	Rate	Unit	Amount
1.	Excavation in foundation of building bridges and other structure/c dagbelling dressing refilling with excavated earth watering and ramming lead up to 5 feet. a)in ordinary soil b) in hard soil on soft soil.	800-0Cft	3176.25 3554.38	%0 Cft %0 Cft	Rs.2541/- -
2.	Cement concrete bricks or stone ballast 1.5" to 2" gauge (b) Ratio 1:4:8 etc complete.	1060-0 Cft	9416.28	% Cft	Rs.99,813/-
3.	Reinforcement cement concrete work i/c all labour and material except the cost of steel reinforcement and its labour for bending and binding, which will paid separately. This rate also including all kinds of forms moulds: lifting shuttering curring rendering and finishing the exposed surface (including screening and washing of shingle). 16/6 a)RCC work in , roof, Slab beams, coloums lintel and other structure member laid in situ or precast laid in position Complete in all respects. 1:2:4	1088-0Cft	337.0	P. Cft	Rs.3,66,656/-
4.	Fabrication of mild steel reinforcement for cement concrete i/c cutting bending, lying in position making joints and fasting i/c cost of bending wire (also includes removal of rust form bars)B.using Tor Bars. 17/8 (a).	48.57Cwt	5001.70	Cwt	Rs.2,42,933/-
5.	Filling watering and ramming earth in floors with new earth (excavated from out side) lead upto one chain, lift upto 5 feet.	3000-0 Cft	3630.0	% 0Cft	Rs.10,890/-
6.	P/L s one pitching / stone soling including sub-base with hammer dressed stone on surface laid in course i/c carriage of material chain etc. (32/23)	900-0 Cft	5377.63	% Cft	Rs.48,399/-
7.	Providing and Lying topping cement concrete (1:2:4) including surface finishing and dividing into panel (42/16) a) 1 1/2" thick..... b) 2" thick.....	- 1200 -0Sft	2548.29 3275.50	% Sft % Sft	- Rs.39,306/-
8.	Cement plaster 1:4 upto 20 feet height. 1/2" thick..... 3/4" thick.....	2720-0Sft -	2283.93 3015.76	% Sft % Sft	Rs.62,123/- -
9.	Color Washing (54/25) a) One Coat b)Two Coat	- 2720-0Sft	443.27 859.90	% Sft % Sft	- Rs.23,389/-

1) Time Limit: **One Month**

2) Penalty: **Rs.1000/- per day**

I/ we hereby Quoted the our rate at _____ %Above / Below the schedule of rate.

Contractor's Signature _____

Address _____


EXECUTIVE ENGINEER (B&R)
 (Landhi Zone) D.M.C Korangi

OFFICE OF THE EXECUTIVE ENGINEER B&R LANDHI ZONE D.M.C KORANGI

Estimated Cost Rs.8,96,050/-

Earnest Money Rs: .17,921/-

Tender Cost Rs.2000/-

Subject:- Construction of two Dust Bins UC No.04 Landhi Zone D.M.C Korangi.

S. No	Description of Work	Quantity	Rate	Unit	Amount
1.	Excavation in foundation of building bridges and other structure/c dagbelling dressing refilling with excavated earth watering and ramming lead up to 5 feet. a) in ordinary soil b) in hard soil on soft soil.	800-0Cft	3176.25 3554.38	%0 Cft %0 Cft	Rs.2541/- -
2.	Cement concrete bricks or stone ballast 1.5" to 2" gauge (b) Ratio 1:4:8 etc complete.	1060-0 Cft	9416.28	% Cft	Rs.99,813/-
3.	Reinforcement cement concrete work i/c all labour and material except the cost of steel reinforcement and its labour for bending and binding, which will paid separately. This rate also including all kinds of forms moulds: lifting shuttering curring rendering and finishing the exposed surface (including screening and washing of shingle). 16/6 a) RCC work in , roof, Slab beams, coloums lintel and other structure member laid in situ or precast laid in position Complete in all respects. 1:2:4	1088-0Cft	337.0	P. Cft	Rs.3,66,656/-
4.	Fabrication of mild steel reinforcement for cement concrete i/c cutting bending, lying in position making joints and fasting i/c cost of bending wire (also includes removal of rust form bars)B.using Tor Bars. 17/8 (a).	48.57Cwt	5001.70	Cwt	Rs.2,42,933/-
5.	Filling watering and ramming earth in floors with new earth (excavated from out side) lead upto one chain, lift upto 5 feet.	3000-0 Cft	3630.0	% 0Cft	Rs.10,890/-
6.	P/L stone pitching / stone soling including sub-base with hammer dressed stone on surface laid in course i/c carriage of material chain etc. (32/23)	900-0 Cft	5377.63	% Cft	Rs.48,399/-
7.	Providing and Lying topping cement concrete (1:2:4) including surface finishing and dividing into panel (42/16) a) 1/2" thick..... b) 2" thick.....	- 1200 -0Sft	2548.29 3275.50	% Sft % Sft	- Rs.39,306/-
8.	Cement plaster 1:4 upto 20 feet height. 1/2" thick..... 3/4" thick.....	2720-0Sft -	2283.93 3015.76	% Sft % Sft	Rs.62,123/- -
9.	Colour Washing (54/25) a) One Coat b) Two Coat	- 2720-0Sft	443.27 859.90	% Sft % Sft	- Rs.23,389/-

1) Time Limit: One Month

2) Penalty: Rs.1000/- per day

I/ we hereby Quoted the our rate at _____ %Above / Below the schedule of rate.

Contractor's Signature _____

Address _____


EXECUTIVE ENGINEER (B&R)
 (Landhi Zone) D.M.C Korangi

OFFICE OF THE EXECUTIVE ENGINEER B&R LANDHI ZONE D.M.C KORANGI

Estimated Cost Rs.8,96,050/-

Earnest Money Rs. :17,921/-

Tender Cost Rs.2000/-

Subject:- Construction of two Dust Bins in area ID,37B,37D Landhi Zone D.M.C Korangi.

S. No	Description of Work	Quantity	Rate	Unit	Amount
1.	Excavation in foundation of building bridges and other structure/c dagbelling dressing refilling with excavated earth watering and ramming lead up to 5 feet. a) in ordinary soil b) in hard soil on soft soil.	800-0Cft	3176.25 3554.38	% 0 Cft % 0 Cft	Rs.2541/- -
2.	Cement concrete bricks or stone ballast 1.5" to 2" gauge (b) Ratio 1:4:8 etc complete.	1060-0 Cft	9416.28	% Cft	Rs.99,813/-
3.	Reinforcement cement concrete work i/c all labour and material except the cost of steel reinforcement and its labour for bending and binding, which will be paid separately. This rate also including all kinds of forms moulds: lifting shuttering curring rendering and finishing the exposed surface (including screening and washing of shingle). 16/6 a) RCC work in , roof, Slab beams, coloums lintel and other structure member laid in situ or precast laid in position Complete in all respects. 1:2:4	1088-0Cft	337.0	P. Cft	Rs.3,66,656/-
4.	Fabrication of mild steel reinforcement for cement concrete i/c cutting bending, lying in position making joints and fasting i/c cost of bending wire (also includes removal of rust form bars) B. using Tor Bars. 17'8 (a).	48.57Cwt	5001.70	Cwt	Rs.2,42,933/-
5.	Filling watering and ramming earth in floors with new earth (excavated from out side) lead upto one chain, lift upto 5 feet.	3000-0 Cft	3630.0	% 0Cft	Rs.10,890/-
6.	P/I. stone pitching / stone soling including sub-base with hammer dressed stone on surface laid in course i/c carriage of material chain etc. (32/23)	900-0 Cft	5377.63	% Cft	Rs.48,399/-
7.	Providing and Lying topping cement concrete (1:2:4) including surface finishing and dividing into panel (42/16) a) 1/2" thick..... b) 3/4" thick.....	- 1200 -0Sft	2548.29 3275.50	% Sft % Sft	- Rs.39,306/-
8.	Cement plaster 1:4 upto 20 feet height. 1/2" thick..... 3/4" thick.....	2720-0Sft -	2283.93 3015.76	% Sft % Sft	Rs.62,123/- -
9.	Colour Washing (54/25) a) One Coat b) Two Coat	- 2720-0Sft	443.27 859.90	% Sft % Sft	- Rs.23,389/-


1) Time Limit: **One Month**

2) Penalty: **Rs.1000/- per day**

I/ we hereby Quoted the our rate at _____ %Above / Below the schedule of rate.

Contractor's Signature _____

Address _____


EXECUTIVE ENGINEER (B&R)
(Landhi Zone) D.M.C Korangi

OFFICE OF THE EXECUTIVE ENGINEER B&R LANDHI ZONE D.M.C KORANGI

Estimated Cost Rs.8,96,050/-

Earnest Money Rs: .17,921/-

Tender Cost Rs.2000/-

9

Subject:- Construction of two Dust Bins in Area 3A,2B,2C, 3B, Landhi Zone D.M.C Korangi.

S. No	Description of Work	Quantity	Rate	Unit	Amount
1.	Excavation in foundation of building bridges and other structure/c dagbelling dressing refilling with excavated earth watering and ramming lead up to 5 feet. a) in ordinary soil b) in hard soil on soft soil.	800-0Cft	3176.25 3554.38	%0 Cft %0 Cft	Rs.2,541/- -
2.	Cement concrete bricks or stone ballast 1.5" to 2" gauge (b) Ratio 1:4:8 etc complete.	1060-0 Cft	9416.28	% Cft	Rs.99,813/-
3.	Reinforcement cement concrete work i/c all labour and material except the cost of steel reinforcement and its labour for bending and binding, which will be paid separately. This rate also including all kinds of forms moulds: lifting shuttering curing rendering and finishing the exposed surface (including screening and washing of shingle). 16/6 a) RCC work in , roof, Slab beams, coloums lintel and other structure member laid in situ or precast laid in position Complete in all respects. 1:2:4	1088-0Cft	337.0	P. Cft	Rs.3,66,656/-
4.	Fabrication of mild steel reinforcement for cement concrete i/c cutting bending, lying in position making joints and fasting i/c cost of bending wire (also includes removal of rust form bars) B. using Tor Bars. 17/8 (a).	48.57 Cwt	5001.70	Cwt	Rs.2,42,933/-
5.	Filling watering and ramming earth in floors with new earth (excavated from out side) lead upto one chain, lift upto 5 feet.	3000-0 Cft	3630.0	% 0Cft	Rs.10,890/-
6.	P/L stone pitching / stone soling including sub-base with hammer dressed stone on surface laid in course i/c carriage of material chain etc. (32/23)	900-0 Cft	5377.63	% Cft	Rs.48,399/-
7.	Providing and Lying topping cement concrete (1:2:4) including surface finishing and dividing into panel (42/16) a) 1 1/2" thick..... b) 2" thick.....	- 1200 -0Sft	2548.29 3275.50	% Sft % Sft	- Rs.39,306/-
8.	Cement plaster 1:4 upto 20 feet height. 1/2" thick..... 3/4" thick.....	2720-0Sft -	2283.93 3015.76	% Sft % Sft	Rs.62,123/- -
9.	Colour Washing (54/25) a) One Coat b) Two Coat	- 2720-0Sft	443.27 859.90	% Sft % Sft	- Rs.23,389/-


1) Time Limit: One Month

2) Penalty: Rs.1000/- per day

I/ we hereby Quoted the our rate at _____ %Above / Below the schedule of rate.

Contractor's Signature _____

Address _____


EXECUTIVE ENGINEER (B&R)
 (Landhi Zone) D.M.C Korangi

OFFICE OF THE EXECUTIVE ENGINEER B&R LANDHI ZONE D.M.C KORANGI

Estimated Cost Rs.8,96,050/-

Earnest Money Rs: .17,921/-

Tender Cost Rs.2000/-

Subject:- Construction of two Dust Bins in area 5D,5B,5C Landhi Zone D.M.C Korangi.

S. No	Description of Work	Quantity	Rate	Unit	Amount
1.	Excavation in foundation of building bridges and other structure/c dagbelling dressing refilling with excavated earth watering and ramming lead up to 5 feet. a) in ordinary soil b) in hard soil on soft soil.	800-0Cft	3176.25 3554.38	%0 Cft %0 Cft	Rs.2541/- -
2.	Cement concrete bricks or stone ballast 1.5" to 2" gauge (b) Ratio 1:4:8 etc complete.	1060-0 Cft	9416.28	% Cft	Rs.99,813/-
3.	Reinforcement cement concrete work i/c all labour and material except the cost of steel reinforcement and its labour for bending and binding, which will be paid separately. This rate also including all kinds of forms moulds: lifting shuttering curring rendering and finishing the exposed surface (including screening and washing of shingle). 16/6 a) RCC work in , roof, Slab beams, coloums lintel and other structure member laid in situ or precast laid in position Complete in all respects. 1:2:4	1088-0Cft	337.0	P. Cft	Rs.3,66,656/-
4.	Fabrication of mild steel reinforcement for cement concrete i/c cutting bending, lying in position making joints and fasting i/c cost of bending wire (also includes removal of rust form bars)B.using Tor Bars. 17'8 (a).	48.57Cwt	5001.70	Cwt	Rs.2,42,933/-
5.	Filling watering and ramming earth in floors with new earth (excavated from out side) lead upto one chain, lift upto 5 feet.	3000-0 Cft	3630.0	% 0Cft	Rs.10,890/-
6.	P/L. stone pitching / stone soling including sub-base with haramer dressed stone on surface laid in course i/c carriage of material chain etc. (32/23)	900-0 Cft	5377.63	% Cft	Rs.48,399/-
7.	Providing and Lying topping cement concrete (1:2:4) including surface finishing and dividing into panel (42/16) a) 1 1/2" thick..... b) 2" thick.....	- 1200 -0Sft	2548.29 3275.50	% Sft % Sft	- Rs.39,306/-
8.	Cement plaster 1:4 upto 20 feet height. 1/2" thick..... 3/4" thick.....	2720-0Sft -	2283.93 3015.76	% Sft % Sft	Rs.62,123/- -
9.	Colour Washing (54/25) a) One Coat b) Two Coat	- 2720-0Sft	443.27 859.90	% Sft % Sft	- Rs.23,389/-


1) Time Limit: **One Month**

2) Penalty: **Rs.1000/- per day**

I/ we hereby Quoted the our rate at _____ %Above / Below the schedule of rate.

Contractor's Signature _____

Address _____


EXECUTIVE ENGINEER (B&R)
(Landhi Zone) D.M.C Korangi

OFFICE OF THE EXECUTIVE ENGINEER B&R LANDHI ZONE D.M.C KORANGI

Estimated Cost Rs.8,96,050/-

Earnest Money Rs: .17,921/-

Tender Cost Rs.2000/-

Subject:- Construction of two Dust Bins UC No.10 Landhi Zone D.M.C Korangi.

S. No	Description of Work	Quantity	Rate	Unit	Amount
1.	Excavation in foundation of building bridges and other structure/c dagbelling dressing refilling with excavated earth watering and ramming lead up to 5 feet. a) in ordinary soil b) in hard soil on soft soil.	800-0Cft	3176.25 3554.38	%0 Cft %0 Cft	Rs.2541/- -
2.	Cement concrete bricks or stone ballast 1.5" to 2" gauge (b) Ratio 1:4:8 etc complete.	1060-0 Cft	9416.28	% Cft	Rs.99,813/-
3.	Reinforcement cement concrete work i/c all labour and material except the cost of steel reinforcement and its labour for bending and binding, which will paid separately. This rate also including all kinds of forms moulds: lifting shuttering curring rendering and finishing the exposed surface (including screening and washing of shingle). 16/6 a)RCC work in , roof, Slab beams, coloums lintel and other structure member laid in situ or precast laid in position Complete in all respects.1:2:4	1088-0Cft	337.0	P. Cft	Rs.3,66,656/-
4.	Fabrication of mild steel reinforcement for cement concrete i/c cutting bending, lying in position making joints and fasting i/c cost of bending wire (also includes removal of rust form bars)B.using Tor Bars. 17/8 (a).	48.57Cwt	5001.70	Cwt	Rs.2,42,933/-
5.	Filling watering and ramming earth in floors with new earth (excavated from out side) lead upto one chain, lift upto 5 feet.	3000-0 Cft	3630.0	% 0Cft	Rs.10,890/-
6.	P/L stone pitching / stone soling including sub-base with hammer dressed stone on surface laid in course i/c carriage of material chain etc. (32/23)	900-0 Cft	5377.63	% Cft	Rs.48,399/-
7.	Providing and Lying topping cement concrete (1:2:4) including surface finishing and dividing into panel (42/16) a) 1 1/2" thick..... b) 2" thick.....	- 1200 -0Sft	2548.29 3275.50	% Sft % Sft	- Rs.39,306/-
8.	Cement plaster 1:4 upto 20 feet height. 1/2" thick..... 3/4" thick.....	2720-0Sft -	2283.93 3015.76	% Sft % Sft	Rs.62,123/- -
9.	Colour Washing (54/25) a) One Coat b) Two Coat	- 2720-0Sft	443.27 859.90	% Sft % Sft	- Rs.23,389/-

1) Time Limit: One Month

2) Penalty: Rs.1000/- per day

I/ we hereby Quoted the our rate at _____ %Above / Below the schedule of rate.

Contractor's Signature _____

Address _____


EXECUTIVE ENGINEER (B&R)
(Landhi Zone) D.M.C Korangi

OFFICE OF THE EXECUTIVE ENGINEER B&R LANDHI ZONE D.M.C KORANGI

Estimated Cost Rs.8,96,050/-

Earnest Money Rs: .17,921/-

Tender Cost Rs.2000/-

12

Subject - Construction of two Dust Bins UC No.12 Landhi Zone D.M.C Korangi.

S. No	Description of Work	Quantity	Rate	Unit	Amount
1.	Excavation in foundation of building bridges and other structure/c dagbelling dressing refilling with excavated earth watering and ramming lead up to 5 feet. a) in ordinary soil b) in hard soil on soft soil.	800-0Cft -	3176.25 3554.38	%0 Cft %0 Cft	Rs.2541/- -
2.	Cement concrete bricks or stone ballast 1.5" to 2" gauge (b) Ratio 1:4:8 etc complete.	1060-0 Cft	9416.28	% Cft	Rs.99,813/-
3.	Reinforcement cement concrete work i/c all labour and material except the cost of steel reinforcement and its labour for bending and binding, which will be paid separately. This rate also including all kinds of forms moulds: lifting shuttering curing rendering and finishing the exposed surface (including screening and washing of shingle). 16/6 a) RCC work in , roof, Slab beams, coloums lintel and other structure member laid in situ or precast laid in position Complete in all respects.1:2:4	1088-0Cft	337.0	P. Cft	Rs.3,66,656/-
4.	Fabrication of mild steel reinforcement for cement concrete i/c cutting bending, lying in position making joints and fasting i/c cost of bending wire (also includes removal of rust form bars)B.using Tor Bars. 17/8 (a).	48.57Cwt	5001.70	Cwt	Rs.2,42,933/-
5.	Filling watering and ramming earth in floors with new earth (excavated from outside) lead upto one chain, lift upto 5 feet.	3000-0 Cft	3630.0	% 0Cft	Rs.10,890/-
6.	P/L stone pitching / stone soling including sub-base with hammer dressed stone on surface laid in course i/c carriage of material chain etc. (32/23)	900-0 Cft	5377.63	% Cft	Rs.48,399/-
7.	Providing and Lying topping cement concrete (1:2:4) including surface finishing and dividing into panel (42/16) a) 1 1/2" thick..... b) 2" thick.....	- 1200 -0Sft	2548.29 3275.50	% Sft % Sft	- Rs.39,306/-
8.	Cement plaster 1:4 upto 20 feet height. 1/2' thick..... 3/4' thick.....	2720-0Sft -	2283.93 3015.76	% Sft % Sft	Rs.62,123/- -
9.	Cc flour Washing (54/25) a) One Coat b) Two Coat	- 2720-0Sft	443.27 859.90	% Sft % Sft	- Rs.23,389/-

1) Time Limit: One Month

2) Penalty: Rs.1000/- per day

I/ we hereby Quoted the our rate at _____ %Above / Below the schedule of rate.

Contractor's Signature _____

Address _____


EXECUTIVE ENGINEER (B&R)
(Landhi Zone) D.M.C Korangi

OFFICE OF THE EXECUTIVE ENGINEER (B&R) LANDHI ZONE D.M.C KORANGIEstimated Cost **Rs.9,85,250 /-(+) O/Rate**2% Earnest Money **Rs.19,705/-**Tender Cost **Rs.2000/-**

13

Subject:- Patch Repair of Roads in UC No.01 Landhi Zone D.M.C Korangi.


S. No	Description of Work	Quantity	Rate	Unit	Amount
1.	Disrnanthling of CC work in situ and basement Plaster and under floor including laid upto one chain etc. complete.(Chap.2 Page 10 Sr.19-A)	450 Cft	3327.50	% Cft	Rs.14,974/-
2.	Earth work excavation undressed upto a single throw of Kassi Phawra or Shovel in Ordinary Soil etc complete. (Chap.1,Page 1 Sr.1-A)	3850 Cft	1361.25	% Cft	Rs.5241/-
3.	Cariage of 100 Cft / 5tons of all material like stone aggregate Sprawls coal time System etc complete. (3 mile) (Chap.1 Page 10 Sr.1)	4300 Cft	579-41	% Cft	Rs.24915/-
4.	P/L base course agreed CBR 80% its as per (AASHTO) Standard size specification i/c composting to required density by approved mechanical means (Vibrating ruler, Road packer & smooth wheel roller) i/c watering with all needs and lift completed.(chap.1 Page 5 Sr.12-B)	4400 Cft	5542.24	% Cft	Rs.2,43,859/-
5.	Providing and spraying prime coat with medium curing asphalt of grade 60/70 prime coat shall be penetration used as of 11 Liters/100 sft. At 70 degree centigrade mixed with adequate quality of kerosene oil Materials and methodology shall fully comply the tests etc..... as directed by Engineer Incharge.	8800 Sft	7-0 A/R	% Sft	Rs.61600/-
6.	P/L 1" thick (consolidated) asphalted macadam using sheltie B.S or its equivalent grade in any other app: Propriety brand with remarked coat using bitumen 15 lbs % sft for tack coat 3 ½ lb per Cft (total bitumen 65 lbs i/c sft)	15450 Sft	4107-84	% Sft	Rs.6,34,661/-
7.	P/L single Layer of 3 CM compacting thickness wearing course on the following job mix formula : Asphalt (60/70 grade) content weight 4.5 % of Total mix. i/c rolling and finishing etc complete.	2000 Sft		% Sft	
			O/R		O/Rate

1) Time Limit: **One Month**2) Penalty: **Rs.1000/- per day**

I/ we hereby Quoted the our rate at _____%Above / Below the schedule of rate.

Contractor's Signature _____

Address _____


EXECUTIVE ENGINEER (B&R)
(Landhi Zone) D.M.C Korangi

OFFICE OF THE EXECUTIVE ENGINEER (B&R) LANDHI ZONE D.M.C KORANGIEstimated Cost **Rs.9,85,064 /-(+)** O/Rate2% Earnest Money **Rs:19,701/-**Tender Cost **Rs.2000/-****Subject:- Patch Repair of Roads in UC No.02 Landhi Zone D.M.C Korangi.**


S. No	Description of Work	Quantity	Rate	Unit	Amount
1.	Dismantling of CC work in situ and basement P aster and under floor including laid upto one chain etc. complete.(Chap.2 Page 10 Sr.19-A)	435 Cft	3327.50	% Cft	Rs.14,475/-
2.	Earth work excavation undressed upto a single throw of Kassi Phawra or Shovel in Ordinary Soil etc complete. (Chap.1,Page 1 Sr.1-A)	3906 Cft	1361.25	% Cft	Rs.5317/-
3.	Carriage of 100 Cft / 5tons of all material like stone aggregate Sprawls coal time System etc complete. (3 mile) (Chap.1 Page 10 Sr.1)	4341 Cft	579-41	% Cft	Rs.25152/-
4.	P/L base course agreed CBR 80% its as per (ASHTO) Standard size specification i/c composting to required density by approved mechanical means (Vibrating ruler, Road packer & smooth wheel roller) i/c watering with all needs and lift completed.(chap.1 Page 5 Sr.12-B)	4400 Cft	5542.24	% Cft	Rs.2,43,859/-
5.	Providing and spraying prime coat with medium curing asphalt of grade 60/70 prime coat shall be penetration used as of 11 Liters/100 sft. At 70 degree centigrade mixed with adequate quality of kerosene oil Materials and methodology shall fully comply the tests etc..... as directed by Engineer Incharge.	8800 Sft	7-0 A/R	% Sft	Rs.61600/-
6.	P/L 1" thick (consolidated) asphalted macadam using sheltie B.S or its equivalent grade in any other app: Propriety brand with remarked coat using bitumen 15 lbs % sft for tack coat 3 ½ lb per Cft (total bitumen 65 lbs i/c sft)	15450 Sft	4107-84	% Sft	Rs.6,34,661/-
7.	P/L single Layer of 3 CM compacting thickness wearing course on the following job mix formula : Asphalt (60/70 grade) content weight 4.5 % of Total mix. i/c rolling and finishing etc complete.	2000 Sft		% Sft	
			O/R		O/Rate

1) Time Limit: **One Month**2) Penalty: **Rs.1000/- per day**

I/ we hereby Quoted the our rate at _____%Above / Below the schedule of rate.

Contractor's Signature _____

Address _____


EXECUTIVE ENGINEER (B&R)
 (Landhi Zone) D.M.C Korangi

OFFICE OF THE EXECUTIVE ENGINEER (B&R) LANDHI ZONE D.M.C KORANGIEstimated Cost **Rs.9,23,113 /-(+) O/Rate**2% Earnest Money **Rs:19,705/-**Tender Cost **Rs.2000/-****Subject:- Patch Repair of Roads in UC No.03 Landhi Zone D.M.C Korangi.**


S. No	Description of Work	Quantity	Rate	Unit	Amount
1.	Dismantling of CC work in situ and basement Plaster and under floor including laid upto one chain etc. complete. (Chap.2 Page 10 Sr.19-A)	420 Cft	3327.50	% Cft	Rs.13,976/-
2.	Earth work excavation undressed upto a single throw of Kassi Phawra or Shovel in Ordinary Soil etc complete, (Chap.1, Page 1 Sr.1-A)	3850 Cft	1361.25	% Cft	Rs.5241/-
3.	Carriage of 100 Cft / 5 tons of all material like stone aggregate Sprawls coal time System etc complete. (3 mile) (Chap.1 Page 10 Sr.1)	4270 Cft	579-41	% Cft	Rs.24741/-
4.	P/L base course agreed CBR 80% its as per (AASHTO) Standard size specification i/c compacting to required density by approved mechanical means (Vibrating ruler, Road packer & smooth wheel roller) i/c watering with all needs and lift completed. (chap.1 Page 5 Sr.12-B)	3300 Cft	5542.24	% Cft	Rs.1,82,894/-
5.	Providing and spraying prime coat with medium curing asphalt of grade 60/70 prime coat shall be penetration used as of 11 Liters/100 sft. At 70 degree centigrade mixed with adequate quality of kerosene oil Materials and methodology shall fully comply the tests etc..... as directed by Engineer Incharge.	8800 Sft	7-0 A/R	% Sft	Rs.61600/-
6.	P/L 1" thick (consolidated) asphalted macadam using sheltie B.S or its equivalent grade in any other app: Propriety brand with remarked coat using bitumen 15 lbs % sft for tack coat 3 ½ lb per Cft (total bitumen 65 lbs i/c sft)	15450 Sft	4107-84	% Sft	Rs.6,34,661/-
7.	P/L single Layer of 3 CM compacting thickness wearing course on the following job mix formula : Asphalt (60/70 grade) content weight 4.5 % of Total mix. i/c rolling and finishing etc complete.	2000 Sft		% Sft	
			O/R		O/Rate

1) Time Limit: **One Month**2) Penalty: **Rs.1000/- per day**

I/ we hereby Quoted the our rate at _____ %Above / Below the schedule of rate.

Contractor's Signature _____

Address _____


EXECUTIVE ENGINEER (B&R)
(Landhi Zone) D.M.C Korangi

OFFICE OF THE EXECUTIVE ENGINEER (B&R) LANDHI ZONE D.M.C KORANGIEstimated Cost **Rs.9,31,813 /-(+)** O/Rate2% Earnest Money **Rs:18,636/-**Tender Cost **Rs.2000/-****Subject:- Patch Repair of Roads in UC No.04 Landhi Zone D.M.C Korangi.**


S. No	Description of Work	Quantity	Rate	Unit	Amount
1.	Dismantling of CC work in situ and basement Plaster and under floor including laid upto one chain etc. complete.(Chap.2 Page 10 Sr.19-A)	485 Cft	3327.50	% Cft	Rs.16,138/-
2.	Earth work excavation undressed upto a single throw of Kassi Phawra or Shovel in Ordinary Soil etc complete. (Chap.1,Page 1 Sr.1-A)	3850 Cft	1361.25	% Cft	Rs.5241/-
3.	Carriage of 100 Cft / 5tons of all material like stone aggregate Sprawls coal time System etc complete. (3 mile) (Chap.1 Page 10 Sr.1)	4335 Cft	579-41	% Cft	Rs.25,117/-
4.	P/L base course agreed CBR 80% its as per (AASHTO) Standard size specification i/c composting to required density by approved mechanical means (Vibrating ruler, Road packer & smooth wheel roller) i/c watering with all needs and lift completed.(chap.1 Page 5 Sr.12-B)	3300 Cft	5542.24	% Cft	Rs.1,82,894/-
5.	Providing and spraying prime coat with medium curing asphalt of grade 60/70 prime coat shall be penetration used as of 11 Liters/100 sft. At 70 degree centigrade mixed with adequate quality of kerosene oil Materials and methodology shall fully comply the tests etc..... as directed by Engineer Incharge.	8800 Sft	7-0 A/R	% Sft	Rs.61600/-
6.	P/L 1" thick (consolidated) asphalted macadam using sheltie B.S or its equivalent grade in any other app: Propriety brand with remarked coat using bitumen 15 lbs % sft for tack coat 3 ½ lb per Cft (total bitumen 65 lbs i/c sft)	15600 Sft	4107-84	% Sft	Rs.6,40,823/-
7.	P/L single Layer of 3 CM compacting thickness wearing course on the following job mix formula : Asphalt (60/70 grade) content weight 4.5 % of Tctal mix. i/c rolling and finishing etc complete.	2000 Sft		% Sft	
			O/R		O/Rate

1) Time Limit: **One Month**2) Penalty: **Rs.1000/- per day**

I/ we hereby Quoted the our rate at _____%Above / Below the schedule of rate.

Contractor's Signature _____

Address _____


EXECUTIVE ENGINEER (B&R)
(Landhi Zone) D.M.C Korangi

OFFICE OF THE EXECUTIVE ENGINEER (B&R) LANDHI ZONE D.M.C KORANGIEstimated Cost **Rs.7,88,621 /- (+) O/Rate**2% Earnest Money **Rs:15,772/-**Tender Cost **Rs.2000/-**

17

**Subject:- Patch Repair of Roads in area CL, IC, ID, 37B, UC No.06 Landhi Zone
D.M.C Korangi.**


S. No	Description of Work	Quantity	Rate	Unit	Amount
1.	Dis mantling of CC work in situ and basement Plaster and under floor including laid upto one chain etc. complete.(Chap.2 Page 10 Sr.19-A)	264 Cft	3327.50	% Cft	Rs.8785/-
2.	Earth work excavation undressed upto a single throw of Kassi Phawra or Shovel in Ordinary Soil etc complete. (Chap.1,Page 1 Sr.1-A)	2000 Cft	1361.25	% Cft	Rs.2722/-
3.	Carriage of 100 Cft / 5tons of all material like stone aggregate Sprawls coal time System etc complete. (3 mile) (Chap.1 Page 10 Sr.1)	2264 Cft	579-41	% Cft	Rs.13,118/-
4.	P/L base course agreed CBR 80% its as per (AASHTO) Standard size specification i/c composting to required density by approved mechanical means (Vibrating ruler, Road packer & smooth wheel roller) i/c watering with all needs and lift completed.(chap.1 Page 5 Sr.12-B)	3060 Cft	5542.24	% Cft	Rs.1,69,593/-
5.	Providing and spraying prime coat with medium curing asphalt of grade 60/70 prime coat shall be penetration used as of 11 Liters/100 sft. At 70 degree centigrade mixed with adequate quality of kerosene oil Materials and methodology shall fully comply the tests etc..... as directed by Engineer Incharge.	6800 Sft	7-0 A/R	% Sft	Rs.47,600/-
6.	P/L 1" thick (consolidated) asphalted macadam using sheltie B.S or its equivalent grade in any other app: Propriety brand with remarked coat using bitumen 15 lbs % sft for tack coat 3 ½ lb per Cft (total bitumen 65 lbs i/c sft)	13200 Sft	4107-84	% Sft	Rs.5,42,235/-
7.	P/L single Layer of 3 CM compacting thickness wearing course on the following job mix formula : Asphalt (60/70 grade) content weight 4.5 % of Total mix. i/c rolling and finishing etc complete.	2000 Sft		% Sft	
			O/R		O/Rate

1) Time Limit: **One Month**2) Penalty: **Rs.1000/- per day**

I/ we hereby Quoted the our rate at _____%Above / Below the schedule of rate.

Contractor's Signature _____

Address _____


EXECUTIVE ENGINEER (B&R)
(Landhi Zone) D.M.C Korangi

OFFICE OF THE EXECUTIVE ENGINEER (B&R) LANDHI ZONE D.M.C KORANGIEstimated Cost **Rs.7,88,346 /- (+) O/Rate**2% Earnest Money **Rs:15,767/-**Tender Cost **Rs.2000/-****Subject:- Patch Repair of Roads in Sector 37A, 37C, UC No.07 Landhi Zone
D.M.C Korangi.**


S. No	Description of Work	Quantity	Rate	Unit	Amount
1.	Dismantling of CC work in situ and basement Plaster and under floor including laid upto one chain etc. complete.(Chap.2 Page 10 Sr.19-A)	264 Cft	3327.50	% Cft	Rs.8785/-
2.	Earth work excavation undressed upto a single throw of Kassi Phawra or Shovel in Ordinary Soil etc complete. (Chap.1,Page 1 Sr.1-A)	2600 Cft	1361.25	% Cft	Rs.3539/-
3.	Carriage of 100 Cft / 5tons of all material like stone aggregate Sprawls coal time System etc complete. (3 mile) (Chap.1 Page.10 Sr.1)	2864 Cft	579-41	% Cft	Rs.16,594/-
4.	P/L base course agreed CBR 80% its as per (AASHTO) Standard size specification i/c composting to required density by approved mechanical means (Vibrating ruler, Road packer & smooth wheel roller) i/c watering with all needs and lift completed.(chap.1 Page 5 Sr.12-B)	3060 Cft	5542.24	% Cft	Rs.1,69,593/-
5.	Providing and spraying prime coat with medium curing asphalt of grade 60/70 prime coat shall be penetration used as of 11 Liters/100 sft. At 70 degree centigrade mixed with adequate quality of kerosene oil Materials and methodology shall fully comply the tests etc..... as directed by Engineer Incharge.	6800 Sft	7-0 A/R	% Sft	Rs.47,600/-
6.	P/L 1" thick (consolidated) asphalted macadam using sheltie B.S or its equivalent grade in any other app: Propriety brand with remarked coat using bitumen 15 lbs % sft for tack coat 3 ½ lb per Cft (total bitumen 65 lbs i/c sft)	13200 Sft	4107-84	% Sft	Rs.5,42,235/-
7.	P/L single Layer of 3 CM compacting thickness wearing course on the following job mix formula : Asphalt (60/70 grade) content weight 4.5 % of Total mix. i/c rolling and finishing etc complete.	2000 Sft		% Sft	
			O/R		O/Rate

1) Time Limit: **One Month**2) Penalty: **Rs.1000/- per day**

I/ we hereby Quoted the our rate at _____%Above / Below the schedule of rate.

Contractor's Signature _____

Address _____


EXECUTIVE ENGINEER (B&R)
(Landhi Zone) D.M.C Korangi

OFFICE OF THE EXECUTIVE ENGINEER (B&R) LANDHI ZONE D.M.C KORANGIEstimated Cost **Rs.7,89,752 /-(+) O/Rate**2% Earnest Money **Rs:15,795/-**Tender Cost **Rs.2000/-****Subject:- Patch Repair of Roads in area 5A,36E,36F,5D UC No.08 Landhi Zone D.M.C Korangi.**


S. No	Description of Work	Quantity	Rate	Unit	Amount
1.	Dismantling of CC work in situ and basement Plaster and under floor including laid upto one chain etc. complete.(Chap.2 Page 10 Sr.19-A)	300 Cft	3327.50	% Cft	Rs.9982/-
2.	Earth work excavation undressed upto a single throw of Kassi Phawra or Shovel in Ordinary Soil etc complete. (Chap.1,Page 1 Sr.1-A)	2600 Cft	1361.25	% Cft	Rs.3539/-
3.	Carriage of 100 Cft / 5tons of all material like stone aggregate Sprawls coal time System etc complete. (3 mile) (Chap.1 Page 10 Sr.1)	2900 Cft	579-41	% Cft	Rs.16,803/-
4.	P/L base course agreed CBR 80% its as per (AASHTO) Standard size specification i/c composting to required density by approved mechanical means (Vibrating ruler, Road packer & smooth wheel roller) i/c watering with all needs and lift completed.(chap.1 Page 5 Sr.12-B)	3060 Cft	5542.24	% Cft	Rs.1,69,593/-
5.	Providing and spraying prime coat with medium curing asphalt of grade 60/70 prime coat shall be penetration used as of 11 Liters/100 sft. At 70 degree centigrade mixed with adequate quality of kerosene oil Materials and methodology shall fully comply the tests etc..... as directed by Engineer Incharge.	6800 Sft	7-0 A/R	% Sft	Rs.47,600/-
6.	P/L 1" thick (consolidated) asphalted macadam using sheltie B.S or its equivalent grade in any other app: Propriety brand with remarked coat using bitumen 15 lbs % sft for tack coat 3 ½ lb per Cft (total bitumen 65 lbs i/c sft)	13200 Sft	4107-84	% Sft	Rs.5,42,235/-
7.	P/L single Layer of 3 CM compacting thickness wearing course on the following job mix formula : Asphalt (60/70 grade) content weight 4.5 % of Total mix. i/c rolling and finishing etc complete.	2000 Sft		% Sft	
			O/R		O/Rate

1) Time Limit: **One Month**2) Penalty: **Rs.1000/- per day**

I/ we hereby Quoted the our rate at _____%Above / Below the schedule of rate.

Contractor's Signature _____

Address _____


EXECUTIVE ENGINEER (B&R)
(Landhi Zone) D.M.C Korangi

OFFICE OF THE EXECUTIVE ENGINEER (B&R) LANDHI ZONE D.M.C KORANGI

Estimated Cost **Rs.9,27,214 /-(+)** O/Rate

2% Earnest Money **Rs.18,544/-**

Tender Cost **Rs.2000/-**

20

**Subject:- Improvement and Repair of Roads in 4A,36B,& Awami Colony UC No.09
Landhi Zone D.M.C Korangi.**

S. No	Description of Work	Quantity	Rate	Unit	Amount
1.	Dismantling of CC work in situ and basement Plaster and under floor including laid upto one chain etc. complete.(Chap.2 Page 10 Sr.19-A)	525 Cft	3327.50	% Cft	Rs.17469/-
2.	Earth work excavation undressed upto a single throw of Kassi Phawra or Shovel in Ordinary Soil etc complete. (Chap.1,Page 1 Sr.1-A)	3850 Cft	1361.25	% Cft	Rs.5241/-
3.	Carriage of 100 Cft / 5tons of all material like stone aggregate Sprawls coal time System etc complete. (3 mile) (Chap.1 Page 10 Sr.1)	4375 Cft	579-41	% Cft	Rs.25349/-
4.	F/L base course agreed CBR 80% its as per (AASHTO) Standard size specification i/c composting to required density by approved mechanical means (Vibrating ruler, Road packer & smooth wheel roller) i/c watering with all needs and lift completed.(chap.1 Page 5 Sr.12-B)	3300 Cft	5542.24	% Cft	Rs.182894/-
5.	Providing and spraying prime coat with medium curing asphalt of grade 60/70 prime coat shall be penetration used as of 11 Liters/100 sft. At 70 degree centigrade mixed with adequate quality of kerosene oil Materials and methodology shall fully comply the tests etc..... as directed by Engineer Incharge.	8800 Sft	7-0 A/R	% Sft	Rs.61600/-
6.	P/L 1" thick (consolidated) asphalted macadam using sheltie B.S or its equivalent grade in any other app: Propriety brand with remarked coat using bitumen 15 lbs % sft for tack coat 3 ½ lb per Cft (total bitumen 65 lbs i/c sft)	15450 Sft	4107-84	% Sft	Rs.6,34,661/-
7.	P/L single Layer of 3 CM compacting thickness wearing course on the following job mix formula : Asphalt (60/70 grade) content weight 4.5 % of Total mix. i/c rolling and finishing etc complete.	2000 Sft		% Sft	
			O/R		O/Rate


1) Time Limit: **One Month**

2) Penalty: **Rs.1000/- per day**

I/ we hereby Quoted the our rate at _____ %Above / Below the schedule of rate.

Contractor's Signature _____

Address _____


EXECUTIVE ENGINEER (B&R)
(Landhi Zone) D.M.C Korangi

OFFICE OF THE EXECUTIVE ENGINEER (B&R) LANDHI ZONE D.M.C KORANGIEstimated Cost **Rs.9,23,113 /-(+)** O/Rate 2% Earnest Money **Rs.18,462/-**Tender Cost **Rs.2000/-****Subject:- Patch Repair of Roads in UC No.10 Landhi Zone D.M.C Korangi.**

S. No	Description of Work	Quantity	Rate	Unit	Amount
1.	Dismantling of CC work in situ and basement Plaster and under floor including laid upto one chain etc. complete.(Chap.2 Page 10 Sr.19-A)	420 Cft	3327.50	% Cft	Rs.13,971/-
2.	Earth work excavation undressed upto a single throw of Kassi Phawra or Shovel in Ordinary Soil etc complete. (Chap.1,Page 1 Sr.1-A)	3850 Cft	1361.25	% Cft	Rs.5241/-
3.	Carriage of 100 Cft / 5tons of all material like stone aggregate Sprawls coal time System etc complete. (3 mile) (Chap.1 Page 10 Sr.1)	4270 Cft	579-41	% Cft	Rs.24741/-
4.	P/L base course agreed CBR 80% its as per (AASHTO) Standard size specification i/c composting to required density by approved mechanical means (Vibrating ruler, Road packer & smooth wheel roller) i/c watering with all needs and lift completed.(chap.1 Page 5 Sr.12-B)	3300 Cft	5542.24	% Cft	Rs.1,82,894/-
5.	Providing and spraying prime coat with medium curing asphalt of grade 60/70 prime coat shall be penetration used as of 11 Liters/100 sft. At 70 degree centigrade mixed with adequate quality of kerosene oil Materials and methodology shall fully comply the tests etc..... as directed by Engineer Incharge.	8800 Sft	7-0 A/R	% Sft	Rs.61600/-
6.	F/L 1" thick (consolidated) asphalted macadam using sheltie B.S or its equivalent grade in any other app: Propriety brand with remarked coat using bitumen 15 lbs % sft for tack coat 3 ½ lb per Cft (total bitumen 65 lbs i/c sft)	15450 Sft	4107-84	% Sft	Rs.6,34,661/-
7.	F/L single Layer of 3 CM compacting thickness wearing course on the following job mix formula : Asphalt (60/70 grade) content weight 4.5 % of Total mix. i/c rolling and finishing etc complete.	2000 Sft		% Sft	
			O/R		O/Rate

1) Time Limit: **One Month**2) Per alty: **Rs.1000/- per day**

I/ we hereby Quoted the our rate at _____ %Above / Below the schedule of rate.

Contractor's Signature _____

Address _____


EXECUTIVE ENGINEER (B&R)
(Landhi Zone) D.M.C Korangi

OFFICE OF THE EXECUTIVE ENGINEER (B&R) LANDHI ZONE D.M.C KORANGIEstimated Cost **Rs.7,86,544 /-(+)** O/Rate 2% Earnest Money **Rs:15,731/-**Tender Cost **Rs.2000/-****Subject:- Patch Repair of Roads in 'C' 'F' 'M' Korangi UC No.11 Landhi Zone
D.M.C Korangi.**

S. No	Description of Work	Quantity	Rate	Unit	Amount
1.	Dismantling of CC work in situ and basement Plaster and under floor including laid upto one chain etc. complete.(Chap.2 Page 10 Sr.19-A)	402 Cft	3327.50	% Cft	Rs.13376/-
2.	Earth work excavation undressed upto a single throw of Kassi Phawra or Shovel in Ordinary Soil etc complete. (Chap.1,Page 1 Sr.1-A)	2000 Cft	1361.25	% Cft	Rs.2722/-
3.	Carriage of 100 Cft / 5tons of all material like stone aggregate Sprawls coal time System etc complete. (3 mile) (Chap.1 Page 10 Sr.1)	2402 Cft	579-41	% Cft	Rs.13917/-
4.	F/L base course agreed CBR 80% its as per (AASHTO) Standard size specification i/c composting to required density by approved mechanical means (Vibrating ruler, Road packer & smooth wheel roller) i/c watering with all needs and lift completed.(chap.1 Page 5 Sr.12-B)	3000 Cft	5542.24	% Cft	Rs.1,66,267/-
5.	Providing and spraying prime coat with medium curing asphalt of grade 60/70 prime coat shall be penetration used as of 11 Liters/100 sft. At 70 degree centigrade mixed with adequate quality of kerosene oil Materials and methodology shall fully comply the tests etc..... as directed by Engineer Incharge.	7800 Sft	7-0 A/R	% Sft	Rs.54600/-
6.	P/L 1" thick (consolidated) asphalted macadam using sheltie B.S or its equivalent grade in any other app: Propriety brand with remarked coat using bitumen 15 lbs % sft for tack coat 3 ½ lb per Cft (total bitumen 65 lbs i/c sft)	13040 Sft	4107-84	% Sft	Rs5,35,662/-
7.	P/L single Layer of 3 CM compacting thickness wearing course on the following job mix formula : Asphalt (60/70 grade) content weight 4.5 % of Total mix. i/c rolling and finishing etc complete.	2000 Sft		% Sft	
			O/R		O/Rate

1) Time Limit: **One Month**2) Penalty: **Rs.1000/- per day**

I/ we hereby Quoted the our rate at _____ %Above / Below the schedule of rate.

Contractor's Signature _____

Address _____


EXECUTIVE ENGINEER (B&R)
(Landhi Zone) D.M.C Korangi

OFFICE OF THE EXECUTIVE ENGINEER (B&R) LANDHI ZONE D.M.C KORANGIEstimated Cost **Rs.9,23,385 /-(+)** O/Rate 2% Earnest Money **Rs.18,468/-**Tender Cost **Rs.2000/-****Subject:- Patch Repair of Roads in UC No.12 Landhi Zone D.M.C Korangi.**


S. No	Description of Work	Quantity	Rate	Unit	Amount
1.	Dismantling of CC work in situ and basement Plaster and under floor including laid upto one chain etc. complete.(Chap.2 Page 10 Sr.19-A)	427 Cft	3327.50	% Cft	Rs.14,208/-
2.	Earth work excavation undressed upto a single throw of Kassi Phawra or Shovel in Ordinary Soil etc complete. (Chap.1,Page 1 Sr.1-A)	3850 Cft	1361.25	% Cft	Rs.5241/-
3.	Carriage of 100 Cft / 5tons of all material like stone aggregate Sprawls coal time System etc complete. (3 mile) (Chap.1 Page 10 Sr.1)	4277 Cft	579-41	% Cft	Rs.24781/-
4.	P/L base course agreed CBR 80% its as per (AASHTO) Standard size specification i/c composting to required density by approved mechanical means (Vibrating ruler, Road packer & smooth wheel roller) i/c watering with all needs and lift completed.(chap.1 Page 5 Sr.12-B)	3300 Cft	5542.24	% Cft	Rs.1,82,894/-
5.	Providing and spraying prime coat with medium curing asphalt of grade 60/70 prime coat shall be penetration used as of 11 Liters/100 sft. At 70 degree centigrade mixed with adequate quality of kerosene oil Materials and methodology shall fully comply the tests etc..... as directed by Engineer Incharge.	8800 Sft	7-0 A/R	% Sft	Rs.61600/-
6.	P/L 1" thick (consolidated) asphalted macadam using sheltie B.S or its equivalent grade in any other app: Propriety brand with remarked coat using bitumen 15-lbs % sft for tack coat 3 ½ lb per Cft (total bitumen 65 lbs i/c sft)	15450 Sft	4107-84	% Sft	Rs.6,34,661/-
7.	P/L single Layer of 3 CM compacting thickness wearing course on the following job mix formula : Asphalt (60/70 grade) content weight 4.5 % of Total mix. i/c rolling and finishing etc complete.	2000 Sft		% Sft	
			O/R		O/Rate

1) Time Limit: **One Month**2) Penalty: **Rs.1000/- per day**

I/ we hereby Quoted the our rate at _____%Above / Below the schedule of rate.

Contractor's Signature _____

Address _____


EXECUTIVE ENGINEER (B&R)
(Landhi Zone) D.M.C Korangi

OFFICE OF THE EXECUTIVE ENGINEER (B&R) LANDHI ZONE D.M.C KORANGIEstimated Cost **Rs.9,98,621/-**2% Earnest Money **Rs.19,972/-**Tender Cost **Rs.2000/-****Subject:- Patch Repair/Trench Repair along 6000 Roads from Gird Station 13000 Roads in Landhi Zone D.M.C Korangi.**

S. No	Description of Work	Quantity	Rate	Unit	Amount
1.	Dismantling of CC work in situ and basement Plaster and under floor including laid upto one chain etc. complete.(Chap.2 Page 10 Sr.19-A)	562 Cft	3327.50	% Cft	Rs.18,700/-
2.	Earth work excavation undressed upto a single throw of Kassi Phawra or Shovel in Ordinary Soil etc complete. (Chap.1,Page 1 Sr.1-A)	4000 Cft	1361.25	% Cft	Rs.5,445/-
3.	Carriage of 100 Cft / 5tons of all material like stone aggregate Sprawls coal time Surkhi etc complete.(3 mile) (Chap.1 Page 10 Sr.1)	4562 Cft	579-41	% Cft	Rs.26,433/-
4.	F/L base course agreed CBR 80% its as per (AASHTO) Standard size specification i/c composting to required density by approved mechanical means (Vibrating ruler, Road packer & smooth wheel roller) i/c watering with all needs and lift completed.(chap.1 Page 5 Sr.12-B)	3300 Cft	5542.24	% Cft	Rs.1,82,893 /-
5.	Providing and spraying time coat with medium curing asphalt of grade 60/70 prime coat shall be penetration used as of 11 Liters/100 sft. At 70 degree centigrade mixed with adequate quality of kerosene oil Materials and methodology shall fully comply the tests etc..... as directed by Engineer Incharge.	8800 Sft	7-0 A/R	P/Sft	Rs.61,600 /-
6.	P/L 1" thick (consolidated) asphalted macadam using sheltie B.S or its equivalent grade in any other app: Propriety brand with remarked coat using bitumen 15 lbs % sft for tack coat 3 ½ lb per Cft (total bitumen 65 lbs i/c sft)	17127-Sft	4107-84	% Sft	Rs.7,03,550/-

1) Time Limit: **One Month**2) Penalty: **Rs.1000/- per day**

I/ we hereby Quoted the our rate at _____%Above / Below the schedule of rate.

Contractor's Signature _____

Address _____


EXECUTIVE ENGINEER (B&R)
(Landhi Zone) D.M.C Korangi

OFFICE OF THE EXECUTIVE ENGINEER (B&R) LANDHI ZONE D.M.C KORANGIEstimated Cost **Rs.19,99,979/-**2% Earnest Money **Rs:40,000/-**Tender Cost **Rs.2500/-**

25

**Subject:- Improvement / Patch Repair of Main Link Roads in Landhi Zone
D.M.C Korangi.**


S. No	Description of Work	Quantity	Rate	Unit	Amount
1.	Dismantling of CC work in situ and basement Plaster and under floor including laid upto one chain etc. complete.(Chap.2 Page 10 Sr.19-A)	787 Cft	3327.50	% Cft	Rs.26,187/-
2.	Dismantling CC Block Masonry.	220Cft	1134.38	% Cft	Rs.2,496/-
3.	Earth work excavation undressed upto a single throw of Kassi Phawra or Shovel in Ordinary Soil etc complete. (Chap.1,Page 1 Sr.1-A)	9600 Cft	1361.25	% Cft	Rs.13,068/-
4.	Carriage of 100 Cft / 5tons of all material like stone aggregate Sprawls coal time Surkhi etc complete. (3 rule) (Chap.1 Page 10 Sr.1)	1060 Cft	714.29	% Cft	Rs.75,765/-
5.	F/L granular sub-base Course as per (AASHTO Standard specification)including compacting to the required density by approved mechanical means (Vibratory roller road Packer and smooth wheel roller etc.) including watering with all lead and lift etc. Complete. (Chap.1 Page 5 Sr.12-B)	1650-Cft	3341.71	% Cft	Rs.55,138/-
6.	F/L base course agreed CBR 80% its as per (AASHTO) Standard size specification i/c composting to required density by approved mechanical means (Vibrating ruler, Road packer & smooth wheel roller) i/c watering with all needs and lift completed.(chap.1 Page 5 Sr.12-B)	7425Cft	5542.24	% Cft	Rs.4,11,511/-
7.	Providing and spraying prime coat with medium curing asphalt of grade 60/70 prime coat shall be penetration used as of 11 Liters/100 sft. At 70 degree centigrade mixed with adequate quality of kerosene oil Materials and methodology shall fully comply the tests etc..... as directed by Engineer Incharge.	22500sft	700.00	% Sft	Rs.15,7500/-
8.	F/L single Layer of 1 thick compacting thickness wearing course on the following job mix formula : Asphalt (60/70 grade) content weight 4.5 % of Total mix. i/c rolling and finishing etc complete.	30632 Sft	4107.84	% Sft	Rs.12,58,314/-

1) Time Limit: **One Month**2) Penalty: **Rs.1000/- per day**

I/ we hereby Quoted the our rate at _____%Above / Below the schedule of rate.

Contractor's Signature _____

Address _____


EXECUTIVE ENGINEER (B&R)
(Landhi Zone) D.M.C Korangi

OFFICE OF THE EXECUTIVE ENGINEER (B&R) LANDHI ZONE D.M.C KORANGI

Estimated Cost Rs.7,82,494/- (+) O/Rate

2% Earnest Money Rs:15,650/-

Tender Cost Rs.2000/-

25

**Subject:- Patch Repair of Link & Major Roads area 36-C,4-A, 5D,J1 & Baber Market Landhi Zone
D.M.C. Korangi**

S. No	Description of Work	Quantity	Rate	Unit	Amount
1.	Dismantling of CC work in situ and basement Plaster and under floor including laid upto one chain etc. complete.(Chap.2 Page 10 Sr.19-A)	360 Cft	3327.50	% Cft	Rs.11,979/-
2.	Earth work excavation undressed upto a single throw of Kassi Phawra or Shovel in Ordinary Soil etc complete. (Chap.1,Page 1 Sr.1-A)	2250 Cft	1361.25	% Cft	Rs.3,063/-
3.	Carriage of 100 Cft / 5tons of all material like stone aggregate Sprawls coal time System etc complete. (3 mile) (Chap.1 Page 10 Sr.1)	2610 Cft	579-41	% Cft	Rs.15,123/-
4.	P/L base course agreed CBR 80% its as per (AASHTO) Standard size specification i/c con posting to required density by approved mechanical means (Vibrating ruler, Road packer & smooth wheel roller) i/c watering with all needs and lift completed.(chap.1 Page 5 Sr.12-B)	3000 Cft	5542.24	% Cft	Rs.1,66,267/-
5.	Providing and spraying prime coat with medium curing asphalt of grade 60/70 prime coat shall be per etration used as of 11 Liters/100 sft. At 70 degree centigrade mixed with adequate quality of kerosene oil Materials and methodology shall fully comply the tests etc..... as directed by Engineer Incharge.	7200 Sft	7-0 A/R	% Sft	Rs.50,400/-
6.	P/L 1" thick (consolidated) asphalted macadam using sheltie B.S or its equivalent grade in any other app: Propriety brand with remarked coat using bitumen 15 lbs % sft for tack coat 3 ½ lb per Cft (total bitumen 65 lbs i/c sft)	13040 Sft	4107-84	% Sft	Rs.5,35,662/-
7.	P/L single Layer of 3 CM compacting thickness wearing course on the following job mix formula : Asphalt (60/70 grade) content weight 4.5 % of Total m x. i/c rolling and finishing etc complete.	4500 Sft		% Sft	
			O/R		O/Rate

- 1) Time Limit: **One Month**
- 2) Penalty: **Rs.1000/- per day**

I/ we hereby Quoted the our rate at _____ %Above / Below the schedule of rate.

Contractor's Signature _____

Address _____


EXECUTIVE ENGINEER (B&R)
(Landhi Zone) D.M.C Korangi

OFFICE OF THE EXECUTIVE ENGINEER (B&R) LANDHI ZONE D.M.C KORANGIEstimated Cost **Rs.9,98,842/-**2% Earnest Money **Rs:19,977/-**Tender Cost **Rs.2000/-**

27

Subject:- Improvement / Laying R.C.C Pipe drain different area Landhi Zone D.M.C Korangi.


S. No	Description of Work	Quantity	Rate	Unit	Amount
1.	Excavation for pipe line in trenches and pits in wet soil clay or mud etc complete. 0' to 5'	15575-0 Cft	4650-0	%0Cft	Rs.72,424/-
2.	Providing and Laying of RCC Pipe with (Rubber ring Joint and fitting in trenches i/c cutting fitting and Jointing with rubber Ring i/c testing with water specified pressure). 08" Dia 12" Dia	700-0 Rft 600-0 Rft	206.0 367.0	P.Rft P.Rft	Rs.1,44,200/- Rs.2,20,200/-
3.	Providing Main holes 4'feet internal diameter without RCC cover CI frame (15Kg)and 5'feet clear depth cast in situ 1:2:4 using 50% crush store and 50% graded bajri 9"thick wall 1:4:8 cement concrete in 6'feet dia and 6"inch thick in foundation 1:2:4 CC in benching to top i/c making req: No of main and branches channels etc complete.	27 Nos	14529-0	Each	Rs.3,92,283/-
4.	A/R Add /deduct for Extra Depth per fit	27-0 Rft	2538-62	P.Rft	Rs.68,543/-
5.	Manufacturing and Supplying RCC ring slab 21" inside diameter 36"outside diameter 7 1/2"width etc complete.	20 Nos	1906.60	Each	Rs.38,132/-
6.	Manufacturing and supplying of 21" diameter RCC Main Hole covers cast in 1:2:4 cement concrete ratio (50%) graded Bajri and 50% crush) 3" deep at centre reinforced with 1/2" dia M.S tor bars with 4" C/C welded i/c complete.	20-0 Nos	913.63	Each	Rs.18,273/-
7.	Re-filling the excavated stuff in trenches 6" thick Layer included watering ramming to full compaction etc complete.	15575-0Cft	2760-0	%0Cft	Rs.42,987/-
8..	Making connection in the existing manholes i/c the cost of cutting holes in wall Making good in CC 1:2:4 etc complete.	10 Nos	180-0	Each	Rs.1800/-

1) Time Limit: **One Month**2) Penalty: **Rs.1000/- per day**

I/ we hereby Quoted the our rate at _____%Above / Below the schedule of rate.

Contractor's Signature _____

Address _____



EXECUTIVE ENGINEER (B&R)
(Landhi Zone) D.M.C Korangi

OFFICE OF THE EXECUTIVE ENGINEER (B&R) LANDHI ZONE D.M.C KORANGI

Estimated Cost Rs.9,98,902/-

2% Earnest Money Rs:19,978/-

Tender Cost Rs.2000/-

29

Subject:- Providing / Laying R.C.C Pipe Drain 36-B, 37B,36D,37C in Landhi Zone D.M.C Korangi.

S. No	Description of Work	Quantity	Rate	Unit	Amount
1.	Scarifying the existing Road Surface.	3000 Sft	116-16	% Sft	Rs.3485
2.	Excavation for pipe line in trenches and pits in wet soil clay or mud etc complete. 0' to 3' 5' to 3'	13500-0 Cft 13500-0 Cft	4650-0 5950-0	%0Cft %0Cft	Rs.62,775/- Rs.23,205/-
3.	Providing and Laying of RCC Pipe with (Rubber ring Joint and fitting in trenches i/c cutting fitting and Jointing with rubber Ring i/c testing with water specified pressure Complete). 08" Dia 12" Dia	700-0 Rft 850-0 Rft	206.0 367.0	P.Rft P.Rft	Rs.1,44,200/- Rs.1,83,500/-
4.	Providing Main holes 4'feet internal diameter without RCC cover C/I frame (15Kg)and 5'feet clear depth cast in situ 1:2:4 using 50% crush store and 50% graded bajri 9"thick wall 1:4:8 cement concrete in 6'feet dia and 6"inch thick in foundation 1:2:4 CC in benching to top i/c making req: No of main and branches channels etc complete.	32 Nos	14529-0	Each	Rs.4,64,928/-
5.	Manufacturing and supplying of 21" diameter RCC Main Hole covers cast in 1:2:4 cement concrete ratio (50%) graded Bajri and 50% crush) 3" deep at center reinforced with 1/2" dia MS tor bars with 4" C/C welded etc complete.	25 Nos.	913.63	Each	Rs.22,840/-
6.	Manufacturing and Supplying RCC ring slab 21" inside diameter 36"outside diameter 7 1/2"width etc complete.	10 Nos.	1906.60	Each	Rs.19,066/-
7.	Refilling the excavated stuff in trenches 6" thick Layer included watering ramming to full compaction etc complete.	18150-0 Cft	2760-0	%0Cft	Rs.50,094/-
8.	Making connection in the existing manholes i/c the cost of cutting holes in wall Making good in CC 1:2:4 etc complete.	25 Nos	180-0	Each	Rs.4500/-
9.	Add or deduct for Depth of Manhole layered specified in its description.	(+)8 ft	2538-62	P. ft	Rs.20,309/-

1) Time Limit: **One Month**

2) Penalty: **Rs.1000/- per day**

I/ we hereby Quoted the our rate at _____%Above / Below the schedule of rate.

Contractor's Signature _____

Address _____

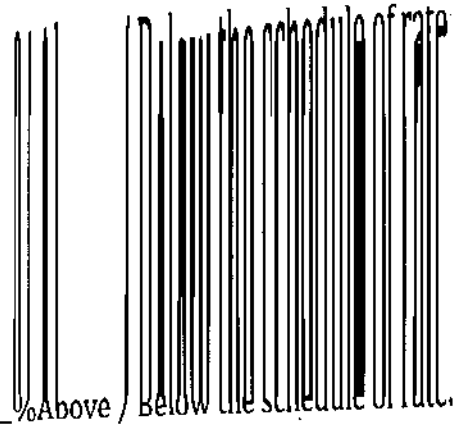

EXECUTIVE ENGINEER (B&R)

OFFICE OF THE EXECUTIVE ENGINEER (B&R) LANDHI ZONE D.M.C KORANGIEstimated Cost **Rs.8,24,644/-**2% Earnest Money **Rs:16,493/-**Tender Cost **Rs.2000/-**

29

Subject:- Providing / Laying R.C.C Pipe Drain in Majeed Colony UC No.01 Landhi Zone D.M.C Korangi.


S. No	Description of Work	Quantity	Rate	Unit	Amount
1.	Excavation for pipe line in trenches and pits in wet soil clay or mud etc complete. 0' to 3' 5' to 3'	12750-0 Cft	4650-0	%0Cft	Rs.59,288/-
2.	Providing and Laying of RCC Pipe with (Rubber ring joint and fitting in trenches i/c cutting fitting and Jointing with rubber Ring i/c testing with water specified pressure Complete). 08" Dia 12" Dia	Rft 850-0 Rft	206.0 367.0	P.Rft P.Rft	Rs.11,950/-
3.	Providing Main holes 4'feet internal diameter without RCC cover C/I frame (15Kg)and 5'feet clear depth cast in situ 1:2:4 using 50% crush stone and 50% graded bajri 9"thick wall 1:4:8 cement concrete in 6'feet dia and 6"inch thick in foundation 1:2:4 CC in benching to top i/c making req: No of main and branches channels etc complete.	22 Nos	14529-0	Each	Rs.3,19,638/-
4.	Add or deduct for Depth of Manhole layered specified in its description.	22 ft	2538-62	P. ft	Rs.55,850/-
5.	Refilling the excavated stuff in trenches 6" thick Layer included watering ramming to full compaction etc complete.	22490-0 Cft	2760-0	%0Cft	Rs.62,072/-
6.	Making connection in the existing manholes i/c the cost of cutting holes in wall Making good in CC 1:2:4 etc complete.	7 Nos	180-0	Each	Rs.1,260/-
7	P./ Granular sub base covers (AASHTO Standard Specification)	1275-0 Cft	3341-71	% Cft	Rs.42,607/-

1) Time Limit: **One Month**2) Penalty: **Rs.1000/- per day**

I/ we hereby Quoted the our rate at _____ %Above / Below the schedule of rate.

Contractor's Signature _____

Address _____


EXECUTIVE ENGINEER (B&R)
 (Landhi Zone) D.M.C Korangi

OFFICE OF THE EXECUTIVE ENGINEER (B&R) LANDHI ZONE D.M.C KORANGIEstimated Cost **Rs.9,07,759/-**2% Earnest Money **Rs.18,155/-**Tender Cost **Rs.2000/-**

130

**Subject:- Providing / Laying R.C.C Sewerage Line in Area 89 UC No.6 & area 82 UC No.10
Landhi Zone D.M.C Korangi.**


S. No	Description of Work	Quantity	Rate	Unit	Amount
1.	Excavation for pipe line in trenches and pits in wet soil clay or mud etc complete. 0' to 5' 5' to 8'	13500-0 Cft	4650-0	%0Cft	Rs.71,745/-
2.	Providing and Laying of RCC Pipe with (Rubber ring joint and fitting in trenches i/c cutting fitting and Jointing with rubber Ring i/c testing with water specified pressure Complete). 08" Dia 12" Dia	1020-0 Rft	206.0 367.0	P.Rft P.Rft	Rs.3,74,340/-
3.	Providing Main holes 4'feet internal diameter without RCC cover C/I frame (15Kg)and 5'feet clear depth cast in situ 1:2:4 using 50% crush stone and 50% graded bajri 9"thick wall 1:4:8 cement concrete in 6'feet dia and 6"inch thick in foundation 1:2:4 CC in benching to top i/c making req: No of main and branches channels etc complete.	26 Nos	14529-0	Each	Rs.377754/-
4.	A/R add/deduct for Extra Depth per fit	15.0 ft	2538-62	Each	(+) Rs38,079/-
5.	Manufacturing and supplying of 21" diameter RCC Main Hole covers cast in 1:2:4 cement concrete ratio (50% graded Bajri and 50% crush) 3' deep at center reinforced with ½" dia MS tor bars with 4" C/C welded etc complete.	3.0 Nos.	913.63	Each	Rs. 2741/-
6.	Manufacturing and Supplying RCC ring slab 21" inside diameter 36"outside diameter 7 ½"width etc complete.	3.0 Nos.	1906.60	Each	Rs.5720/-
7.	Refilling the excavated stuff in trenches 6" thick Layer included watering ramming to full compaction etc complete.	13500-0 Cft	2760-0	%0Cft	Rs.37260/-
8.	Making connection in the existing manholes i/c the cost of cutting holes in wall Making good in CC 1:2:4 etc complete.	4.0 Nos	180-0	Each	Rs.720/-

1) Time Limit: **One Month**2) Penalty: **Rs.1000/- per day**

I/ we hereby Quoted the our rate at _____%Above / Below the schedule of rate.

Contractor's Signature _____

Address _____


EXECUTIVE ENGINEER (B&R)
(Landhi Zone) D.M.C Korangi

OFFICE OF THE EXECUTIVE ENGINEER (B&R) LANDHI ZONE D.M.C KORANGIEstimated Cost **Rs.8,97,246/-**2% Earnest Money **Rs:17,945/-**Tender Cost **Rs.2000/-****Subject:- Providing / Laying R.C.C Sewerage Line in Area 85 UC No.7 Landhi Zone D.M.C Korangi.**


S. No	Description of Work	Quantity	Rate	Unit	Amount
1.	Excavation for pipe line in trenches and pits in wet soil clay or mud etc complete. 0' to 5' 5' to 8'	18000-0 Cft	4650-0	%0Cft	Rs.83700/-
2.	Providing and Laying of RCC Pipe with (Rubber ring joint and fitting in trenches i/c cutting fitting and Jointing with rubber Ring i/c testing with water specified pressure Complete). 08" Dia 12" Dia	1500-0Rft 1020-0Rft	206.0 367.0	P.Rft P.Rft	Rs.30,9000/- Rs.73400/-
3.	Providing Main holes 4'feet internal diameter without RCC cover C/l frame (15Kg)and 5'feet clear depth cast in situ 1:2:4 using 50% crush stone and 50% graded bajri 9"thick wall 1:4:8 cement concrete in 6'feet dia and 6"inch thick in foundation 1:2:4 CC in benching to top i/c making req; No of main and branches channels etc complete.	28 Nos	14529-0	Each	Rs.406812/-
4.	A/R add/deduct for Extra Depth per fit	15.0 ft	2538-62	Each	(-) Rs38,079/-
5.	Manufacturing and supplying of 21" diameter RCC Main Hole covers cast in 1:2:4 cement concrete ratio (50%) graded Bajri and 50% crush) 3" deep at center reinforced with ½" dia MS tor bars with 4" C/C welded etc complete.	5.0 Nos.	913.63	Each	Rs. 4568/-
6.	Manufacturing and Supplying RCC ring slab 21" ir side diameter 36"outside diameter 7 ½"width etc complete.	5.0 Nos.	1906.60	Each	Rs.9533/-
7.	Refilling the excavated stuff in trenches 6" thick Layer included watering ramming to full compaction etc complete.	16200-0 Cft	2760-0	%0Cft	Rs.44712/-
8.	Making connection in the existing manholes i/c the cost of cutting holes in wall Making good in CC 1:2:4 etc complete.	20.0 Nos	180-0	Each	Rs.3600/-

1) Time Limit: **One Month**2) Penalty: **Rs.1000/- per day**

I/ we hereby Quoted the our rate at _____%Above / Below the schedule of rate.

Contractor's Signature _____

Address _____


EXECUTIVE ENGINEER (B&R)
(Landhi Zone) D.M.C Korangi

OFFICE OF THE EXECUTIVE ENGINEER (B&R) LANDHI ZONE D.M.C KORANGI

Estimated Cost Rs.9.03.388/-

2% Earnest Money Rs:18,068/-

Tender Cost Rs.2000/-

52

Subject:- Providing / Laying R.C.C Sewerage Line in Area 36B UC No.9 & Sector 10 UC No.10 Landhi Zone D.M.C Korangi.

S. No	Description of Work	Quantity	Rate	Unit	Amount
1.	Excavation for pipe line in trenches and pits in wet soil clay or mud etc complete. 0' to 5' 5' to 8'	15500-0 Cft	4650-0	%0Cft	Rs.72075/-
2.	Providing and Laying of RCC Pipe with (Rubber ring Joint and fitting in trenches i/c cutting fitting and Jointing with rubber Ring i/c testing with water specified pressure Complete). 08" Dia 12" Dia	1000-0Rft 206-0 Rft	206.0 367.0	P.Rft P.Rft	Rs.206000/- Rs.73400/-
3.	Providing Main holes 4'feet internal diameter without RCC cover C/I frame (15Kg)and 5'feet clear depth cast in situ 1:2:4 using 50% crush stone and 50% graded bajri 9"thick wall 1:4:8 cement concrete in 6'feet dia and 6"inch thick in foundation 1:2:4 CC in benching to top i/c making req: No of main and branches channels etc complete.	33 Nos	14529-0	Each	Rs.479457/-
4.	A/R add/deduct for Extra Depth per fit	6.0 ft	2538-62	Each	Rs.15232/-
5.	Manufacturing and supplying of 21" diameter RCC Main Hole covers cast in 1:2:4 cement concrete ratio (50%) graded Bajri and 50% crush) 3" deep at center reinforced with 1/2" dia MS tor bars with 4" C/C welded etc complete.	6.0 Nos.	913.63	Each	Rs. 5482/-
6.	Manufacturing and Supplying RCC ring slab 21" inside diameter 36"outside diameter 7 1/2"width etc complete.	6.0 Nos.	1906.60	Each	Rs.11440/-
7.	Refilling the excavated stuff in trenches 6" thick Layer included watering ramming to full compaction etc complete.	13950-0 Cft	2760-0	%0Cft	Rs.38502/-
8.	Making connection in the existing manholes i/c the cost of cutting holes in wall Making good in CC 1:2:4 etc complete.	10.0 Nos	180-0	Each	Rs.1800/-


1) Time Limit: **One Month**

2) Penalty: **Rs.1000/- per day**

I/ we hereby Quoted the our rate at _____%Above / Below the schedule of rate.

Contractor's Signature _____

Address _____


EXECUTIVE ENGINEER (B&R)
(Landhi Zone) D.M.C Korangi

OFFICE OF THE EXECUTIVE ENGINEER (B&R) LANDHI ZONE D.M.C KORANGIEstimated Cost **Rs.9.02.409/-**2% Earnest Money **Rs:18.048/-**Tender Cost **Rs.2000/-****Subject:- Providing / Laying R.C.C Sewerage Line in Area of C-I UC No.06 Landhi Zone
D.M.C Korangi.****33**

S. No	Description of Work	Quantity	Rate	Unit	Amount
1.	Scarifying the existing Road Surface.	3870 Sft	116-16	% Sft	Rs.4,495/-
2.	Excavation for pipe line in trenches and pits in wet soil clay or mud etc complete. C' to 5' 5' to 8'	14403-0 Cft 2250-0 Cft	4650-0 5950-0	%0Cft %0Cft	Rs.66,974/- Rs.13,387/-
3.	Providing and Laying of RCC Pipe with (Rubber ring Joint and fitting in trenches i/c cutting fitting and jointing with rubber Ring i/c testing with water specified pressure Complete). C8" Dia 12" Dia	206-0 Rft 600-0 Rft	206.0 367.0	P.Rft P.Rft	Rs.41,200/- Rs.2,20,200/-
4.	Providing Main holes 4'feet internal diameter without RCC cover C/I frame (15Kg)and 5'feet clear depth cast in situ 1:2:4 using 50% crush stone and 50% graded bajri 9"thick wall 1:4:8 cement concrete in 6'feet dia and 6"inch thick in foundation 1:2:4 CC in benching to top i/c making req: No of main and branches channels etc complete.	26 Nos	14529-0	Each	Rs.3,77,754/-
5.	A/R Add / deduct for Extra Depth per fit.	(+)30.0 Rft	2538.62	P.Rft	(+)Rs.76,159/-
6.	Manufacturing and supplying of 21" diameter RCC Main Hole covers cast in 1:2:4 cement concrete ratio (50% graded Bajri and 50% crush) 3" deep at center reinforced with ½" dia MS tor bars with 4" C/C welded etc complete.	10 Nos.	913.63	Each	Rs.9136/-
7.	Manufacturing and Supplying RCC ring slab 21" inside diameter 36"outside diameter 7 ½"width etc complete.	10 Nos.	1906.60	Each	Rs.19,066/-
8.	Refilling the excavated stuff in trenches 6" thick Layer included watering ramming to full compaction etc complete.	20523-0 Cft	2760-0	%0Cft	Rs.56,643/-
9.	Making connection in the existing manholes i/c the cost of cutting holes in wall Making good in CC 1:2:4 etc complete.	25 Nos	180-0	Each	Rs.4500/-

1) Time Limit: **One Month**2) Penalty: **Rs.1000/- per day**

I/ we hereby Quoted the our rate at _____ %Above / Below the schedule of rate.

Contractor's Signature _____

Address _____


EXECUTIVE ENGINEER (B&R)
(Landhi Zone) D.M.C Korangi

OFFICE OF THE EXECUTIVE ENGINEER B&R LANDHI ZONE D.M.C KORANGI

Estimated Cost **Rs.9,60,767/-**

2% Earnest Money **Rs.19,215/-**

Tender Cost **Rs.3000/-**

Subject:- Cleaning of Sewerage Line 24" 18" 12" 8" in different areas at Landhi Zone
D.M.C Korangi.

34

S. No	Description	Quantity	Rate	Unit	Amount	
1.	Cleaning inside sewerage lines completely restoring original silt free space /diameter of pipe lines by labour & equipment i/c steel bucket fro 6" to18" hooks and other protection like safety basis, traffic sign, traffic cones ensuring no damage to pipe along with ensuring safety to Labour & other public property lives and removal of silts/sold buring desisting and clearance of site etc.					
		i) 8" Dia	2000-0 Rft	68-50	Rft	Rs.1,37,000/-
		ii) 12" Dia	300-0 Rft	80-50	Rft	Rs.24,150/-
		iii) 18" Dia	1600-0 Rft	128-80	Rft	Rs.2,06,080/-
		iv) 24" Dia	2000-0 Rft	209-30	Rft	Rs.4,18,600/-
2.	Cleaning / De-silting of Manholes inspection chamber i/c cleaning & rodding of connected sewerage (Average 50 per M. hole removing sewage & solid wastes & throwing outside KMC Limits.	120 Nos	474-83	P. Nos	Rs.56,980/-	
3.	M/s of RCC Ring Slab of 21" inside 36" outside 7.5 width & 6" thick i/c 3/8" tor steel bars two concentric rings i/c 15 kg C.I frame etc.	30 Nos	1906.6	Each	Rs.57,198/-	
4.	M/s of RC Manhole cover cast in 1:2:4 concrete ratio 3' deep at center i/c curing etc.	a) 21" Dia	25 Nos	913.63	Each	Rs. 22,841/-
		b) 24" Dia	20 Nos	1051.25	Each	Rs.21,025/-
5.	Shifting to the site & fixing of 36" Ting Slab in perfect position on damaged manholes i/c cutting etc.	30 Nos	563.09	Each	Rs.16,893/-	

1) Time Limit: **One Month**

2) Penalty: **Rs.1000/- per day**

I/ we hereby Quoted the our rate at _____%Above / Below the schedule of rate.

Contractor's Signature _____

Address _____


EXECUTIVE ENGINEER (B&R)
 (Landhi Zone) D.M.C Korangi.

OFFICE OF THE EXECUTIVE ENGINEER B&R LANDHI ZONE D.M.C KORANGI

Estimated Cost Rs.9,88,895/-

2% Earnest Money Rs.19,778/-

Tender Cost Rs.2000/-

35

Subject:- Improvement and Repair of Nallahs in 362 Road, 351 & 352 Roads in Landhi Zone D.M.C Korangi.

S. No	Description	Quantity	Rate	Unit	Amount
1.	Dismantling Cement block Masonry.	263-0 Cft	1134-38	% Cft	Rs.2,983/-
2.	Dismantling Cement concrete Plain 1:2:4	366-0Cft	3327.50	% Cft	Rs.12,179/-
3.	Earth work excavation in ashes, sand soft soil or silt clearance undresses lead upto 50 feet	11000-0Cft	1663.75	% Cft	Rs.18,301/-
4.	Excavation in foundation of building bridges and other structure/c dagbelling dressing refilling with excavated earth watering and ramming lead up to 5 feet. a) in ordinary soil b) in hard soil on soft soil.	2000-0Cft	3176.25	%0 Cft	Rs.6,353/-
		-	3554.38	%0 Cft	-
5.	Carriage of 100cft 5 tons of all material like stone aggregate sprawl coal lime surkhi etc. (3 miles)	11429-0 Cft	579-41	% Cft	Rs.66,221/-
6.	Cement concrete bricks or stone ballast 1.5" to 2" gauge (b) Ratio 1:4:8 etc complete.	500-0 Cft	9416.28	% Cft	Rs.47,081/-
7.	Erection and removal of centering for RCC or plain cement concrete works of portal woo.(b) Vertical (18/19).	3000-Sft	3127.41	% Sft	Rs.93,822/-
8.	Cement concrete plain including placing compacting finishing and curing complete (including screening and washing of stone aggregate) without stutte ring (A) Ratio 1:2:4(16/5).	1125-Cft	14429.25	% Cft	Rs.1,62,329/-
9.	Providing & Lying 1:3:6 cement concrete solid block masonry set in 1:6 cement sand mortar including rakig out joints and curing etc. a. In P inth and foundation. b. in wall above 6" thickness in G.floor/Super structure etc. c. In wall 6" and below thickness in G.floor /super Structure etc.	670-0Cft	14268.53	%Cft	Rs.95,599/-
		1750-0Cft	14621.44	%Cft	Rs.2,55,875/-
10.	Cement plaster 1:4 upto 20 feet height. 1/2" thick..... 3/4" thick.....	9500-0Sft	2283.93	% Sft	Rs.2,16,973/-
11.	Color Washing (54/25) a) One Coat b) Two Coat	1300-0Sft	859.90	% Sft	Rs.11,179/-


1) Time Limit: One Month

2) Penalty: Rs.1000/- per day

I/ we hereby Quoted the our rate at _____%Above / Below the schedule of rate.

Contractor's Signature _____

Address _____


EXECUTIVE ENGINEER (B&R)
 (Landhi Zone) D.M.C Korangi

OFFICE OF THE EXECUTIVE ENGINEER B&R LANDHI ZONE D.M.C KORANGI

Estimated Cost Rs.9,98,466/-

2% Earnest Money Rs:19,969/-

Tender Cost Rs.2000/-

36

Subject:- Improvement & Repair of Nallah & R.C.C Culvert in different area Landhi Zone D.M.C Korangi.

S. No	Description	Quantity	Rate	Unit	Amount
1.	Dismantling Cement block Masonry.	150-0 Cft	1134-38	% Cft	Rs.1,702 /-
2.	Dismantling Cement concrete Plain 1:2:4	181.0Cft	3327.50	%Cft	Rs.6,023 /-
3.	Dismantling of Cement concrete reinforcement separating reinforcement from concrete cleaning & Straightening the stone.	674-0 Cft	5445.0	% Cft	Rs.36,699/-
4.	Excavation in foundation of building bridges and other structure/c dagbelling dressing refilling with excavated earth watering and ramming lead up to 5 feet. a) in ordinary soil b) in hard soil on soft soil.	1000-0 Cft -	3176.25 3554.38	%0 Cft %0 Cft	Rs.3,176/- -
5.	Earth work excavation in ashes, sand soft soil or silt clearance undresses lead upto 50 feet	7000-0cft	1663.75	% Cft	Rs.11,646/-
6.	Carriage of 100cft 5 tons of all material like stone aggregate sprawl coal lime surkhi etc. (3 miles)	9005-0 Cft	579-41	% Cft	Rs.52,176/-
7.	Cement concrete bricks or stone ballast 1.5" to 2" gauge (b) Ratio 1:4:8 etc complete.	100-0 Cft	9416.28	% Cft	Rs.9,416/-
8.	Cement concrete plain including placing compacting finishing and curing complete (including screening and washing of stone aggregate) without stuttering (A) Ratio 1:2:4(16/5).	450-0 Cft	14429.25	% Cft	Rs.64,932/-
9.	Erection and removal of centering for RCC or plain cement concrete works of portal woo.(b) Vertical (18/19).	1200-0 Sft	3127.41	% Sft	Rs.37,529/-
10.	Reinforcement cement concrete work i/c all labour and material except the cost of steel reinforcement and its labour for bending and binding, which will paid separately. This rate also including all kinds of forms moulds: lifting shuttering curing rendering and finishing the exposed surface (including screening and washing of shingle). 16/6 a) RCC work in, roof, Slab beams, coloums lintel and other structure member laid in situ or precast laid in position Complete in all respects. 1:2:4	1362-0 Cft	337.0	P. Cft	Rs.4,58,994/-
11.	Fabrication of mild steel reinforcement for cement concrete i/c cutting bending, lying in position making joints and fasting i/c cost of bending wire (also includes removal of rust form bars) B. using Tor Bars. 17/8 (a).	48.64 Cwt	5001.71	Cwt	Rs.2,43,283/-
12.	Cement plaster 1:4 upto 20 feet height. ½" thick..... ¼" thick.....	468-0 Sft	2283.93	% Sft	Rs.10,689/-
13.	Providing and Lying topping cement concrete (1:2:4) including surface finishing and dividing into panel (42/16) a) 1 ½" thick..... b) 2" thick.....	300-0 Sft	3275.50	% Sft	Rs.9,826/-
14.	P/F Pre Cast R.C.C Slab / Beam i/c fitting Jointing i/c ½" thick C.C Flooring and curing etc.	419-0 Sft	125 A/R	% Sft	Rs.52,375/-

26

- 1) Time Limit: **One Month**
- 2) Penalty: **Rs.1000/- per day**

I/ we hereby Quoted the our rate at _____%Above / Below the schedule of rate.

Contractor's Signature _____

Address _____



EXECUTIVE ENGINEER (B&R)
(Landhi Zone) D.M.C Korangi

25/11/17

OFFICE OF THE EXECUTIVE ENGINEER B&R LANDHI ZONE D.M.C KORANGI

Estimated Cost Rs.9,99,367/-

2% Earnest Money Rs.19,987/-

Tender Cost Rs.2000/-

Subject:- Improvement and Repair of Nallahs in area ID. 2B,37D,5A, and 10000 Road in Landhi Zone D.M.C Korangi.

S. No	Description	Quantity	Rate	Unit	Amount
1.	Dismantling Cement block Masonry.	315-0 Cft	1134-38	% Cft	Rs.3,573/-
2.	Dismantling Cement concrete Plain 1:2:4	450-0Cft	3327.50	% Cft	Rs.14,974/-
3.	Earth work excavation in ashes, sand soft soil or silt clearance undresses lead upto 50 feet	12000-0Cft	1663.75	% Cft	Rs.19,965/-
4.	Excavation in foundation of building bridges and other structure/c dagbelling dressing refilling with excavated earth watering and ramming lead up to 5 feet. a) in ordinary soil b) in hard soil on soft soil.	2000-0Cft -	3176.25 3554.38	%0 Cft %0 Cft	Rs.6,353/- -
5.	Carriage of 100cft 5 tons of all material like stone aggregate sprawl coal lime surkhi etc. (3 miles)	12365-0 Cft	579-41	% Cft	Rs.71,644/-
6.	Cement concrete bricks or stone ballast 1.5" to 2" gauge (b) Ratio 1:4:8 etc complete.	500-0 Cft	9416.28	% Cft	Rs.47,081/-
7.	Erection and removal of centering for RCC or plain cement concrete works of portal woo.(b) Vertical (18/19).	3000-Sft	3127.41	% Sft	Rs.93,822/-
8.	Cement concrete plain including placing compacting finishing and curing complete (including screening and washing of stone aggregate) without stuttering.(A) Ratio 1:2:4(16/5).	1125-Cft	14429.25	% Cft	Rs.1,62,329/-
9.	Providing & Lying 1:3:6 cement concrete solid block masonry set in 1:6 cement sand mortar including rakig out joints and curing etc. a. In Plinth and foundation. b. in wall above 6" thickness in G.floor/Super structure etc. c. In wall 6" and below thickness in G.floor /super Structure etc.	670-0Cft 1750-0Cft -	14268.53 14621.44 -	% Cft % Cft -	Rs.95,599/- Rs.2,55,875/- -
10.	Cement plaster 1:4 upto 20 feet height. ½" thick..... ¼" thick.....	9500-0Sft	2283.93	% Sft	Rs.2,16,973/-
11.	Colour Washing (54/25) a) One Coat b) Two Coat	1300-0Sft	859.90	% Sft	Rs.11,179/-


1) Time Limit: **One Month**

2) Penalty: **Rs.1000/- per day**

I/ we hereby Quoted the our rate at _____ %Above / Below the schedule of rate.

Contractor's Signature _____

Address: _____


EXECUTIVE ENGINEER (B&R)
(Landhi Zone) D.M.C Korangi

OFFICE OF THE EXECUTIVE ENGINEER B&R LANDHI ZONE D.M.C KORANGI

38

Estimated Cost Rs.6.54.300/-

2% Earnest Money Rs:13.086/-

Tender Cost Rs.2000/-

Subject:- Improvement / Maintenance of Johar Library at Landhi No.2 UC No.06 Landhi Zone D.M.C Korangi.

S. No	Description	Quantity	Rate	Unit	Amount
1	Scraping a) White /colour wash: b) Ordinary distemper, oil band distemper or paint on wall:	4866.0 Sft	226.88	% Sft	Rs.11040/-
2	Excavation in foundation of building bridges and other structure/c dabling dressing refilling with excavated earth watering and ramming lead up to 5 feet. a) in ordinary soil b) in hard soil on soft soil.	1400-0 Cft -	3176.25 3554.38	%0 Cft %0 Cft	Rs.4447/- -
3	Cement Concrete brick or stone ballast 1:5 to 2" gauge 'b' Ratio 1:4:8 -	350-0Cft	9416.28	%Cft	Rs.32957/-
4	Cement concrete plain including placing compacting finishing and curing complete (including screening and washing of stone aggregate) without stuttering.(A) Ratio 1:2:4(16/5).	840-0 Cft	14429.25	% Cft	Rs.121206/-
5	Erection and removal of centering for RCC or plain cement concrete works of portal woo.(b) Vertical (18/19).	2240-0 Sft	3127.41	% Sft	Rs.70054/-
6	Providing & Laying 1:3:6 cement concrete solid block masonry set in 1:6 cement mortar i/c ranking out joints and curing etc. a) In plinth and foundation b) In wall above 6" thickness in G.floor / Super structure etc. c) In wall 6" and below thickness in G.floor / Super structure etc.	111-0	15771-0	% Cft	Rs.17506/-
7	Cement Plaster 1:4 upto 20 feet height. (52/11) ½" thick ¾" thick	5715-0 Sft	2283.93	% Sft	Rs.130527/-
8	Removing door with chowket etc.	5 Nos	142-18	Each	Rs.711/-
9	P/F G.I frame / chukhats of sizee 7"x2"x4 ½" x 3 for door using 20 gauge G.I sheet i/c fixing on walls etc.	72-0 Rft	228-90	P.Rft	Rs.16481/-
10.	First class deodar wood formed and fixed in place i/c old fast, tower bolts handle ,cord with hooks i/c paneled or paneled & glazed of fully glazed 1 ½" thick etc.	112-0 Sft	1131-11	% Sft	Rs.126684/-
11.	Glazing with panes (24 oz to 26 oz) using putting & deodar wooden 1 st class fill etc.	96-0 Sft	163-90	% Sft	Rs.15734/-
12.	Painting door & windows any type two coats etc.	544-0 Sft	1160-06	% Sft	Rs.6311/-
13.	Preparing surface & painting guard bars, gates of Iron bars, grating, ranking etc.	3840-0 Sft	896-39	% Sft	Rs.34421/-

- 1) Time limit: **One Month**
- 2) Penalty: **Rs.1000/- per day**

I/ we hereby Quoted the our rate at _____%Above / Below the schedule of rate.

Contractor's Signature _____

Address _____



EXECUTIVE ENGINEER (B&R)
(Landhi Zone) D.M.C Korangi.

OFFICE OF THE EXECUTIVE ENGINEER B&R LANDHI ZONE D.M.C KORANGI (39)

Estimated Cost Rs.7.71.723/- (+)O/Rate

2% Earnest Money Rs.15,434/-

Tender Cost Rs.2000/-

Subject:- Improvement of Fatima Library at 36-B Area UC No.09 Landhi Zone D.M.C Korangi.

S. No	Description	Quantity	Rate	Unit	Amount
1.	Excavation in foundation of building bridges and other structure/c dabling dressing refilling with excavated earth watering and ramming lead up to 5 feet. a) in ordinary soil b) in hard soil on soft soil.	1400-0 Cft	3176.25 3554.38	%0 Cft %0 Cft	Rs.3337/- -
2.	Cement Concrete brick or stone ballast 1:5 to 2" gauge 'b' Ratio 1:4:8 -	350-0Cft	9416.28	%Cft	Rs.32957/-
3.	Cement concrete plain including placing compacting finishing and curing complete (including screening and washing of stone aggregate) without stuttering.(A) Ratio 1:2:4(16/5).	840-0 Cft	14429.25	% Cft	Rs.121206/-
4.	Erection and removal of centering for RCC or plain cement concrete works of portal woo.(b) Vertical (18/19).	2240-0 Sft	3127.41	% Sft	Rs.70054/-
5.	Cement plaster 1:4 upto 20 feet height. ½" thick..... ¼" thick.....	5715-0 Sft	2283.93	% Sft	Rs.130527/-
6.	Removing door with chowkhat etc.	5 Nos	142-18	Each	Rs.710/-
7.	Scraping a) White /colour wash: b) Ordinary distemper, oil band distemper or paint on wall:	4866.0 Sft	226.88	% Sft	Rs.11,040/-
8.	P/F G.I frmes /chowkhats of size 7" x2"x4 ½" 3" for Door using 20 guage G.I Sheet i/c fixing of walls etc.	72-0 Rft	228-90	P.Rft	Rs.16481/-
9.	First class deodar wood frmed and fixed place i/c old fast tower bolts handle, card with hooks i/c paneled or paneled & glazed or fully glazed 1 ½" thick etc	112-0 Sft	1131.11	P.Sft	Rs.126684/-
10.	Glazing with panes (24 oz to 26 oz) using putting & deoder wooder 1 st class fill etc.	96.0 Sft	163-90	P.Sft	Rs.15734/-
11.	Painting old surface door & window any type etc. (two coats)	544-0 Sft	1160-06	%Sft	Rs.6311/-
12.	Painting guard bars,gates iron bars grating , railing i/c standard braces etc.(two coats)	3840-0 Sft	674-6	%Sft	Rs.25905/-
13.	Making & fixing steel grated doors complete with locking arrengegment angle iron frme 2"x 2 3/8" & ¼" Sq bars4" C/C etc.	25-0 Sft	594.75	P.Sft	Rs.14864/-
14.	Preparing the surface & paints with matt finished paint of app: mak two old matt finished surface two coats etc.	1600-0 Sft	1772.38	%Sft	Rs.28358/-
15.	Colour Washing (54/25) a) One Coat t) Two Coat	5500-0Sft	859.90	% Sft	Rs.47295/-
16.	Distemperring two coats etc.	6336-0 Sft	1043-90	%Sft	Rs.66142/-
17.	Repair / Maintenance of Iron grill ¾" & ½" thick Sq bars & flat Iron Patties i/c cutting fitting & welding etc.	400-0 Sft		%Sft	
			O/Rate		O/Rate

- 1) Time Limit: **One Month**
- 2) Penalty: **Rs.1000/- per day**

I/ we hereby Quoted the our rate at _____%Above / Below the schedule of rate.

Contractor's Signature _____

Address _____


EXECUTIVE ENGINEER (B&R)
(Landhi Zone) D.M.C Korangi.

OFFICE OF THE EXECUTIVE ENGINEER B&R LANDHI ZONE D.M.C KORANGI

Estimated Cost **Rs.9.17.085/- (+) 10/Rate**

% Earnest Money **Rs.18.342/-**

Tender Cost **Rs.2000/-**

Subject:- Improvement of Iqra Library UC No.11 Landhi Zone D.M.C Korangi.

S. No	Description	Quantity	Rate	Unit	Amount
1	Dismantling cement block masonry (10/14)	382-0 Cft	1134-38	% Cft	Rs.4333/-
2	Dismantling Cement concrete Plain 1:2:4	150-0 Cft	3327.50	% Cft	Rs.4991/-
3	Earth work excavation in ashes, sand soft soil or silt clearance undressed lead upto Dismantling lime or concrete.	600-0 Cft	3176.25	% Cft	Rs.19058/-
4	Scraping a) White /colour wash: b) Ordinary distemper, oil band distemper or paint on wall:	6504.0 Sft	226.88	% Sft	Rs.14756/-
5	P/L 1:3:6 Cement concrete solid block Masonry wall 6" and below set in 1:6 cement mortar i/c raking out joints and curing etc. In wall 6" and below thickness in G.floor /super structure etc.	417--0 Cft	15771-01	%0 Cft	Rs.65,765/-
6	Cement concrete plain including placing compacting finishing and curing complete (including screening and washing of stone aggregate) without stuttering.(A) Ratio 1:2:4(16/5).	350-0 Cft	14429.25	% Cft	Rs.50502/-
7	Erection and removal of centering for RCC or plain cement concrete works of portal woo.(b) Vertical (18/19).	800-0 Sft	3127.41	% Sft	Rs.25019/-
8	P/L Topping cement concrete (1:2:4) including surface finishing and dividing into panels etc. 2" thick.	6400-0Sft	3275.50	%Sft	Rs.209632/-
9	Removing cement or Lime plaster etc.	1400-0 Sft	121-0	%Sft	Rs.1694/-
10	Cement Plaster 1:4 upto 20 feet height. (52/11) ½" thick ¾" thick	3096-0 Sft	2283.93	% Sft	Rs.70710/-
11	P/F G.I frme / chukhats of sizee 7"x2"x4 ½" x 3 for door using 20 gauge G.I sheet i/c fixing on walls etc.	36-0 Rft	228-90	P.Rft	Rs.8240/-
12	First class deodar wood formed and fixed in place i/c old fast, tower bolts handle ,cord with hooks i/c paneled or paneled & glazed of fully glazed 1 ½" thick etc.	56-0 Sft	1131-11	% Sft	Rs.63342/-
13	Glazing with panes (24 oz to 26 oz) using putting & deodar wooden 1 st class fill etc.	34-0 Sft	163-90	% Sft	Rs.5573/-
14	Dismantling (54/24) a) One coat b) Two coat c) Three coat	7896-0 Sft	1043-90	% Sft	Rs.82426/-
15	Painting old surface doors & windows any type etc (Two coat).	872-0 Sft	1160-0	% Sft	Rs.10116/-
16	Painting guard bars, gates Iron bars grating, railing i/c standard braces two coats etc.	3000-0 Sft	896-39	% Sft	Rs.26892/-
17	White washing (54/24) a) One coat b) Two coat c) Three coat	3556-0 Sft	425-84	% Sft	Rs.15143/-
18	Colour washing (54/24) a) One coat b) Two coat	9800-0 Sft	859-90	% Sft	Rs.84270/-

Continue Next Page

19.	P/F squatting type white / colour glazed earthen ware w. c pan with front flash inlet w. c pan 23" & low level earthen ware flush tank 3 galleons etc.	2-0 Nos	5772-80	Each	Rs.11546/-
20.	P/F 24"x18" lavatory basion in white/colour glazed earthen ware wash basin etc.	2-0 Nos	4253-70	Each	Rs.8507/-
21.	P/F of earthen wearer pedestal white / colour.	2-0 Nos	938-47	Each	Rs.1877/-
22.	Laying floors of app coloured glazed tiles ¼" thick laid in white cement and pigment on a bed of ¾" thick cement mortar 1:2 etc.	160-0 Sft	27747-06	% Sft	Rs.44395/-
23.	Glazed tiles dado ¼" thick laid in pigment over 1:2 cement sand mortar ¾" thick i/c finishing etc.	318-0 Sft	28299-30	% Sft	Rs.89992/-
24.	P/F G.I sheet plain 22 guage G.I sheet for shutter using for window shutter i/c welding for flat Iron putting i/c cutting fitting and welding etc.	120-0 Sft		Each	
			O/Rate		O/Rate
25.	P/F position pumping set 1 H.P single phase 220 volts with 1 ¼" x ¼" sanction & delivery system etc.	1 Nos		Each	
			O/Rate		O/Rate
26.	Construction of Pump room of size 4'x4'x4'x in side made with 4" thick 1:3:6 block masonry i/c per-cast slab 2" thick, CC 1:2:4 1 ½" thick & ½" cement plaster two coats painting etc.	1 Nos		Each	
			O/Rate		O/Rate
27.	P/F chequered tiles 12" x12" laid over bed of 1"x 1 ½" thick CC 1:3:6 & a coat of cement meesu 1/8" thick i/c filling joints with cement meesu, i/c curing etc.	800-0 Sft			
			O/Rate		O/Rate


1) Time Limit: **One Month**

2) Penalty: **Rs.1000/- per day**

I/ we hereby Quoted the our rate at _____%Above / Below the schedule of rate.

Contractor's Signature _____

Address _____


EXECUTIVE ENGINEER (B&R)
 (Landhi Zone) D.M.C Korangi.

OFFICE OF THE EXECUTIVE ENGINEER B&R LANDHI ZONE D.M.C KORANGI

Estimated Cost Rs.9,53,830/-

2% Earnest Money Rs.19,077/-

Tender Cost Rs.2000/-

Subject:- De-silting of Nallah in Area 3/A, 2/B,4/A, 4/C, I/D, 37/D Landhi Zone D.M.C Korangi.

(41)

S. No	Description of Work	Quantity	Rate	Unit	Amount
1.	Earth work excavation in ashes ,sand ,soft ,soil or silt, clearances undressed lead upto 50 feet.	151425-0 Cft	1663.75	% 0Cft	Rs.251933/-
2.	Carriage of 100 Cft / 5tons of all material like stone aggregate Sprals coal time Surkhi etc complete.(3 mile)	121140-0 Cft	579.41	% Cft	Rs.701897/-


1) Time Limit: One Month

2) Penalty: Rs.1000/- per day

I/ we hereby Quoted the our rate at _____ %Above / Below the schedule of rate.

Contractor's Signature _____

Address _____



EXECUTIVE ENGINEER (B&R)
(Landhi Zone) D.M.C Korangi

OFFICE OF THE EXECUTIVE ENGINEER B&R LANDHI ZONE D.M.C KORANGI

Estimated Cost Rs.9,90,207/-

2% Earnest Money Rs.19,804/-

Tender Cost Rs.2000/-

42

Subject:- De-silting of Nallah along 11000 Road 13000 Road 14000 Road Landhi Zone D.M.C Korangi.

S. No	Description of Work	Quantity	Rate	Unit	Amount
1.	Earth work excavation in ashes ,sand ,soft ,soil or silt, clearances undressed lead upto 50 feet.	157200-0 Cft	1663.75	% 0Cft	Rs.261541/-
2.	Carriage of 100 Cft / 5tons of all material like stone aggregate Sprals coal time Surkhi etc complete.(3 mile)	12576-0 Cft	579.41	% Cft	Rs.728666/-

1) Time Limit: **One Month**

2) Penalty: **Rs.1000/- per day**

I/ we hereby Quoted the our rate at _____%Above / Below the schedule of rate.

Contractor's Signature _____

Address _____


EXECUTIVE ENGINEER (B&R)
(Landhi Zone) D.M.C Korangi

OFFICE OF THE EXECUTIVE ENGINEER B&R LANDHI ZONE D.M.C KORANGI

Estimated Cost Rs.9,60,287/-

2% Earnest Money Rs.19,206/-

Tender Cost Rs.2000/-

Subject:- De-silting of Nallah along 10000 Road Sector 37/B, 37/A & 36/B , in Landhi Zone D.M.C Korangi.

S. No	Description of Work	Quantity	Rate	Unit	Amount
1.	Earth work excavation in ashes ,sand ,soft ,soil or silt, clearances undressed lead upto 50 feet.	152450-0 Cft	1663.75	% 0Cft	Rs.253639/-
2.	Carriage of 100 Cft / 5tons of all material like stone aggregate Sprals coal time Surkhi etc complete.(3 mile)	121960-0 Cft	579.41	% Cft	Rs.706648/-


1) Time Limit: One Month

2) Penalty: Rs.1000/- per day

I/ we hereby Quoted the our rate at _____ %Above / Below the schedule of rate.

Contractor's Signature _____

Address _____


EXECUTIVE ENGINEER (B&R)
(Landhi Zone) D.M.C Korangi

OFFICE OF THE EXECUTIVE ENGINEER B&R LANDHI ZONE D.M.C KORANGI

Estimated Cost Rs.9,98,000/-

2% Earnest Money Rs.19,960/-

Tender Cost Rs.2000/-

**Subject:- De-silting of Nallah along 362 Road Area 4/B, 36/C and Sector 36/G Nallah
Landhi Zone D.M.C Korangi.**

44

S. No	Description of Work	Quantity	Rate	Unit	Amount
1.	Earth work excavation in ashes ,sand ,soft ,soil or silt, clearances undressed lead upto 50 feet.	166070-0 Cft	1663.75	% 0Cft	Rs.276299/-
2.	Carriage of 100 Cft / 5tons of all material like stone aggregate Sprals coal time Surkhi etc complete.(3 mile).	124552-0 Cft	579.41	% Cft	Rs.721666/-

1) Time Limit: One Month

2) Penalty: Rs.1000/- per day

I/ we hereby Quoted the our rate at _____%Above / Below the schedule of rate.

Contractor's Signature _____

Address _____



**EXECUTIVE ENGINEER (B&R)
(Landhi Zone) D.M.C Korangi**

OFFICE OF THE EXECUTIVE ENGINEER B&R LANDHI ZONE D.M.C KORANGI

Estimated Cost Rs.9,83,909/-

2% Earnest Money Rs.19,678/-

Tender Cost Rs.2000/-

Subject:- De-silting of Nallah Inam Memorial ground 17/J Bus Stop Navy Road & Shahi Masjid Landhi Zone D.M.C Korangi.

45

S. No	Description of Work	Quantity	Rate	Unit	Amount
1.	Earth work excavation in ashes ,sand ,soft ,soil or silt, clearances undressed lead upto 50 feet.	156200-0 Cft	1663.75	% 0Cft	Rs.259818/-
2.	Carriage of 100 Cft / 5tons of all material like stone aggregate Sprals coal time Surkhi etc complete.(3 mile)	124960-0 Cft	579.41	% Cft	Rs.724031/-

1) Time Limit: **One Month**

2) Penalty: **Rs.1000/- per day**

I/ we hereby Quoted the our rate at _____ %Above / Below the schedule of rate.

Contractor's Signature _____

Address _____


EXECUTIVE ENGINEER (B&R)
(Landhi Zone) D.M.C Korangi

OFFICE OF THE EXECUTIVE ENGINEER B&R LANDHI ZONE D.M.C KORANGI

Estimated Cost Rs.9,95,505/-

2% Earnest Money Rs.19,910/-

Tender Cost Rs.2000/-

46

Subject:- De-silting of Nallah along 6000 Road to X-23, Bus Stop Gulshan-e-Latif & awami colony Masjid Landhi Zone D.M.C Korangi.

S. No	Description of Work	Quantity	Rate	Unit	Amount
1.	Earth work excavation in ashes ,sand ,soft ,soil or silt, clearances undressed lead upto 50 feet.	165660-0 Cft	1663.75	% 0Cft	Rs.275617/-
2.	Carriage of 100 Cft / 5tons of all material like stone aggregate Sprals coal time Surkhi etc complete.(3 mile)	124245-0 Cft	579.41	% Cft	Rs.719888/-

1) Time Limit: **One Month**

2) Penalty: **Rs.1000/- per day**


I/ we hereby Quoted the our rate at _____ %Above / Below the schedule of rate.

Contractor's Signature _____

Address _____



EXECUTIVE ENGINEER (B&R)



OFFICE OF THE EXECUTIVE ENGINEER B&R LANDHI ZONE D.M.C KORANGI

Estimated Cost Rs.8,64,590/-

2% Earnest Money Rs. 17,292/-

Tender Cost Rs.2000/-

Subject:- **De-silting of Nallah from Rice Godown to Graveyard to Sherpao Colony and Railway Pathak to Hospital Chowrangi UC No.3 Landhi Zone D.M.C Korangi.**

477

S. No	Description of Work	Quantity	Rate	Unit	Amount
1.	Earth work excavation in ashes ,sand ,soft ,soil or silt, clearances undressed lead upto 50 feet.	143875-0 Cft	1663.75	% 0Cft	Rs.2,39,372
2.	Carriage of 100 Cft / 5tons of all material like s.one aggregate Sprals coal time Surkhi etc complete.(3 mile)	107906-0 Cft	579.41	% Cft	Rs.6,25,218/-

1) Time Limit: **One Month**

2) Penalty: **Rs.1000/- per day**

I/ we hereby Quoted the our rate at _____%Above / Below the schedule of rate.

Contractor's Signature _____

Address _____


EXECUTIVE ENGINEER (B&R)
(Landhi Zone) D.M.C Korangi

OFFICE OF THE EXECUTIVE ENGINEER B&R LANDHI ZONE D.M.C KORANGI

Estimated Cost Rs.7,75,799/-(+) O/Rate

2% Earnest Money Rs. :15,516/-

Tender Cost Rs.2000/-

Subject:- Construction of Room in UC No.7 Landhi Zone D.M.C Korangi Karachi.

S. No	Description of Work	Quantity	Rate	Unit	Amount
1.	Dismantling Cement concrete Plain 1:2:4	510-0 Cft	3327.50	% Cft	Rs.16970/-
2.	Excavation in foundation of building bridges and other structure etc complete.	456-0 Cft	3176.25	%0 Cft	Rs.1448/-
3.	Cement Concrete brick or stone ballast 1:5 to 2" gauge 'b' Ratio 1:4:8 etc.	485-0 Cft	9416.28	% Cft	Rs.45,669/-
4.	Erection and removal of centering for RCC or Plain cement concrete work of portal wood (b) vertical .	553-0 Sft	3127.41	% Cft	Rs.17295/-
5.	Cement concrete to plain i/c placing compacting i/c curing complete. i/c screening and washing of stone aggregate) without shattering (Ratio 1:2:4)	345-0 Cft	14429.25	% Cft	Rs.49780/-
6.	Filling watering and ramming earth in floor with New earth lead upto one chain lift upto 5' feet.	663-0 Cft	3630-0	%0 Cft	Rs.2407/-
7.	P/L 1:3:6 Cement concrete solid block Masonry wall 6" and below set in 1:6 cement sand Mortar in G/F superstructure i/c raking out joints and curing etc complete.	654-0 Cft	15771-01	%0 Cft	Rs.103142/-
8.	Cement Plaster 1:4 upto 20 feet Height from Ground floor etc.	2644 Sft	2283-93	%Sft	Rs.60387/-
9.	P/F G.I Frmes /Chowkat of size 7"x2" or 4 1/4" for using 20 gauge GI sheet i/c welding hanger & fixing at site with necessary hold fast i/c filling with cement sand i/c all carriage etc.	145-0Rft	228-90	P.Rft	Rs.33,190/-
10.	P/F in position Doors & window of first class wood shatter (commercial Ply wood) 3 Ply on bath side etc complete.	167-0 Sft		P.Sft	
			Open Kale		Open Kale
11.	P/L in Topping cement concrete (1:2:4) i/c surface finishing and pants etc complete. 2" thick	1207 Sft	3275-50	%Sft	Rs.41271/-
12.	Laying of approved colourd glazed tile 1/4" thick in white cement 1:2 over 3/4" cement mortar 1/2" complete.	537-0 Sft	27747-06	%Sft	Rs.149002/-
13.	P/L RCC pipe & fixing in trenches to correct alignment jointing with rubber ring etc complete. 6" Dia 8" Dia	50-0 Rft 100-0 Rft	199-25 206-0	P.Rft P.Rft	Rs.9963/- Rs.20600/-
14.	Construction of Masonry Chamber for 2x2x1.6" clear in side depth of 9" thick BM in cement mortar 1:3 1/2 cement plaster or 3"thick etc complete.	2 Nos	14592-0	Each	Rs.29184/-
15.	Providing G.I Pipe Special & Clamp etc complete. 1/2" Dia 3/4" Dia	100-0Rft 160-0Rft	73-21 95-99	P.Rft P.Rft	Rs.7321/- Rs.15326/-
16.	Providing and fixing handle valves etc. 3/4" Dia	5 Nos	271-92	Each	Rs.1360/-

Continue Next Page

25

17.	Providing and fixing in position bib cocks etc.	5 Nos	348-92	Each	Rs.1745/-
18.	S/F fibber Glass tank of approve quality design and wall thinkness as specified i/c gurts of nuts bults and fixing in plat form of CC 1:3:6 and making connection for in let out and over flow pipes etc. 350 gallons	1 Nos	30773-42	Each	Rs.30773/-
19.	P/F app: quality rim lock adjustable over the style surface	5 Nos	408-14	Each	Rs.2040/-
20.	Distempering Two coats at any height any floor etc.	2884-0 Sft	1043-90	% Sft	Rs.30106/-
21.	Painting of wood work door & window of any type i/c edges.	310-0Sft	1160-06	% Sft	Rs.3596/-
22.	P/F chequered Tile i/c CC floor under bad CM Jointing gray cement etc complete.	500-0 Sft		P.Sft	
			O/Rate		O/Rate
23.	P/F Precast I beam and Precast tile 2'x2' and cement mortar jointing etc complete.	640-0 Sft		P.Sft	
			O/Rate		O/Rate
24.	S/F in position Iron of Steel grill of 3/4" x 1/2" x 1/2" size of flat Iron of app: design etc.	142-0 Sft	194-16	P.Sft	Rs.27571/-
25.	P/F of wooden partition with wood frame 2" x 1 1/2" thick portal wood and 3/4" thick MDF portal sheet double side i/c making door with same material of required: with all fitting & f xing /fixture etc.	120-0 Sft		P.Sft	
			O/Rate		O/ Rate
26.	P/F Squatting type white glazes earthen ware WC etc complete.	3 Nos	5044-60	Each	Rs.15134/-
27.	P/F 22"x16" Lavatory bassoon in white glazed earthen ware complete.	3 Nos	4694-80	Each	Rs.14084/-
28.	Color washing two coats at any height any floor.	5400-0 Sft	859-90	% Sft	Rs.46435/-

1) Time Limit: **One Month**

2) Penalty: **Rs.1000/- per day**

I/ we hereby Quoted the our rate at _____ %Above / Below the schedule of rate.

Contractor's Signature _____

Address _____

EXECUTIVE ENGINEER (B&R)
(Landhi Zone) D.M.C Korangi

OFFICE OF THE EXECUTIVE ENGINEER B&R LANDHI ZONE D.M.C KORANGI

Estimated Cost Rs.8,45,179/-

2% Earnest Money Rs. 16,904/-

Tender Cost Rs.2000/-

Subject:- **De-silting of Nallah Gul Ahmed Chowrangi to Bin Qasim School Muslimabad UC No.2 Landhi Zone D.M.C Korangi.**

49

S. No	Description of Work	Quantity	Rate	Unit	Amount
1.	Earth work excavation in ashes ,sand ,soft ,soil or silt, clearances undressed lead upto 50 feet.	120380-0 Cft	1663.75	% 0Cft	Rs.2,00,282/-
2.	Carriage of 100 Cft / 5tons of all material like stone aggregate Sprals coal time Surkhi etc complete.(3 mile)	90285-0 Cft	714.29	% Cft	Rs.6,44,897/-

1) Time Limit: **One Month**

2) Penalty: **Rs.1000/- per day**

I/ we hereby Quoted the our rate at _____ %Above / Below the schedule of rate.

Contractor's Signature _____

Address _____


EXECUTIVE ENGINEER (B&R)
(Landhi Zone) D.M.C Korangi

OFFICE OF THE EXECUTIVE ENGINEER B&R LANDHI ZONE D.M.C KORANGI

Estimated Cost Rs.7,44,527/-

2% Earnest Money Rs.14,891/-

Tender Cost Rs.2000/-

Subject:- **De-silting of Nallah in Old Muzzafarabad and New Muzzafarabad Landhi Zone D.M.C Korangi.**

(50)

S.No	Description of Work	Quantity	Rate	Unit	Amount
1.	Earth work excavation in ashes ,sand ,soft ,soil o: silt, clearances undressed lead upto 50 feet.	106044-0 Cft	1663.75	% 0Cft	Rs.1,76,431/-
2.	Carriage of 100 Cft / 5tons of all material like stone aggregate Sprals coal time Surkhi etc complete.(3 mile)	79533-0 Cft	714.29	% Cft	Rs.5,68,096/-

1) Time Limit: **One Month**

2) Penalty: **Rs.1000/- per day**

I/ we hereby Quoted the our rate at _____ %Above / Below the schedule of rate.

Contractor's Signature _____

Address _____


EXECUTIVE ENGINEER (B&R)
(Landhi Zone) D.M.C Korangi

OFFICE OF THE EXECUTIVE ENGINEER B&R LANDHI ZONE D.M.C KORANGI

Estimated Cost Rs.8,44,270/-

2% Earnest Money Rs.16,885/-

Tender Cost Rs.2000/-

Subject:- **De-silting of Nallah for Hospital Chowrangi to Govt Primary School Via Rehri Road and Gulshan-e- Buneer Landhi Zone D.M.C Korangi.**

(51)

S. No	Description of Work	Quantity	Rate	Unit	Amount
1.	Earth work excavation in ashes ,sand ,soft ,soil or silt, clearances undressed lead upto 50 feet.	120250-0 Cft	1663.75	% 0Cft	Rs.2,00,066/-
2.	Carriage of 100 Cft / 5tons of all material like stone aggregate Sprals coal time Surkhi etc complete.(3 mile)	90188-0 Cft	714.29	% Cft	Rs.6,44,204/-

1) Time Limit: **One Month**

2) Penalty: **Rs.1000/- per day**

I/ we hereby Quoted the our rate at _____ %Above / Below the schedule of rate.

Contractor's Signature _____

Address _____


EXECUTIVE ENGINEER (B&R)
(Landhi Zone) D.M.C Korangi

OFFICE OF THE DIRECTOR PARK (P&R) LANDHI ZONE DMC KORANGI

Estimated Cost: 9,86,331/-

02% Earnest Money

Tender Cost Rs. 2000/=

Subject: **PROVIDING HYDRAULIC BORING DIFFERENT PARK UC 01 TO UC 06 (P&S) LANDHI ZONE DMC KORANGI**


S #	Description	Qty	Rate	UNIT	Amount
1	Boring for tube well in all water bearing soil from depth 100 rft to 200 rft or 30.51 meter below ground level i/c sinking and with drawing of casing pipe etc. complete	1400 Rft	@516/-	P / Rft	7,22,400
2	P/F sumber saible pump phase 220 volt with shelling and water proof wire made by china etc. complete	07 Nos	@25704/-	P / Nft	1,79,928
3	P/F 1.25" dia plastic pipe made by pak Arab etc complete.	1400Rft	@60.002/-	P / Rft	84003
TOTAL AMOUNT					9,86,331

- 1) Time Limit : One Month
 2) Penalty : Rs. 1000/= Per Day

I/we hereby Quoted the our rate at _____ % above / below the schedule of rate.

Contractor's Signature

Address:



**DIRECTOR PARK (P&R)
DMC KORANGI**

OFFICE OF THE DIRECTOR PARK (P&R) LANDHI ZONE DMC KORANGI

Estimated Cost: 9,86,331/-

02% Earnest Money

Tender Cost Rs. 2000/=

Subject: **PROVIDING HYDRAULIC BORING DIFFERENT PARK UC 07 TO UC 12 (P&S) LANDHI ZONE DMC KORANGI**

S #	Description	Qty	Rate	UNIT	Amount
1	Boring for tube well in all water bearing soil from depth 100 rft to 200 rft or 30.51 meter below ground level i/c sinking and with drawing of casing pipe etc. complete	1400 Rft	@516/-	P / Rft	7,22,400
2	P/F sumber saible pump phase 220 volt vith shelling and water proof wire made by china etc. complete	07 Nos	@25704/-	P / Nft	1,79,928
3	P/F 1.25" dia plastic pipe made by pak Arab etc complete.	1400Rft	@60.002/-	P / Rft	84003
TOTAL AMOUNT					9,86,331

- 1) Time Limit : One Month
- 2) Penalty : Rs. 1000/= Per Day

I/we hereby Quoted the our rate at _____ % above / below the schedule of rate.

Contractor's Signature

Address:



**DIRECTOR PARK (P&R)
DMC KORANGI**

OFFICE OF THE DIRECTOR PARK (P&R) LANDHI ZONE DMC KORANGI

Estimated Cost: 9,51,600/- 02% Earnest Money Tender Cost Rs. 2000/=

Subject: **IMPROVEMENT OF DIFFERENT PARKS UC 01 TO UC 06 (P&S) LANDHI ZONE DMC KORANGI**


S #	Description	Qty	Rate	UNIT	Amount
1	Supplying and spreading Garden Soil (sweet earth) free for salt and grass roots etc. complete	13440cft	@35/-	P / Cft	4,70,400
2	Supplying and spreading cowdung manure same up to any dept etc. complete	8400cft	@18/-	P / Cft	1,51,200
3	Supplying 1 HP electric motor with piston pump etc complete	10 Nos	@15000/-	P / No	1,50,000
4	Supplying plastic naylor pipe 1" diamade by national company etc. complete	6000 Rft	@30/-	P / Rft	1,80,000
TOTAL AMOUNT					9,51,600

- 1) Time Limit : One Month
- 2) Penalty : Rs. 1000/= Per Day

I/we hereby Quoted the our rate at _____ % above / below the schedule of rate.

Contractor's Signature

Address: _____



**DIRECTOR PARK (P&R)
DMC KORANGI**

OFFICE OF THE DIRECTOR PARK (P&R) LANDHI ZONE DMC KORANGI

Estimated Cost: 9,81,600/- 02% Earnest Money Tender Cost Rs. 2000/=

Subject: **IMPROVEMENT OF DIFFERENT PARKS UC 07 TO UC 12 (P&S) LANDHI ZONE DMC KORANGI**

S #	Description	Qty	Rate	UNIT	Amount
1	Supplying and spreading Garden Soil (sweet earth) free for salt and grass roots etc. complete	13440cft	@35/-	P / Cft	4,70,400
2	Supplying and spreading cowdung manure same up to any dept etc. complete	8400cft	@18/-	P / Cft	1,51,200
3	Supplying 1 HP electric motor with piston pump etc complete	10 Nos	@15000/-	P / No	1,50,000
4	Supplying plastic naylor pipe 1" diamade by national company etc. complete	7000 Rft	@30/-	P / Rft	2,10,000
TOTAL AMOUNT					9,81,600

- 1) Time Limit : One Month
- 2) Penalty : Rs. 1000/= Per Day

I/we hereby Quoted the our rate at _____ % above / below the schedule of rate.

Contractor's Signature

Address: _____



**DIRECTOR PARK (P&R)
DMC KORANGI**



1

56

OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

NO: EE/M&E/DMC/K/ /2015

Dated: - _____

Tender Reference No. _____ Dated: _____

DATE OF OPENING: _____

VOLUME-II BILL OF QUANTITIES
(SINGLE STAGE ONE ENVELOPE METHOD)

Temporary Lighting Arrangement in Different
Graveyards in References of Shab-e-Barat in Landhi Zone
DMC Korangi.

PC Cost: -	Open Rate
Bid Security: -	02% of Quoted Bid.
Tender Cost: -	Rs, 1,500.00

NOTE:

- 1) This Document contains 03 pages including this page
- 2) The Standard Terms & Condition of Bidding Documents (Volume-I) available in the office & website of DMC Korangi

Executive Engineer (M&E),
District Municipal Corporation
Korangi Karachi.

Issue to M/S. _____ P.No. _____

Dated: _____ Bank: _____ Branch: _____

Signature & Stamp of Issuing Authority.



OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

NAME OF WORK: Temporary Lighting Arrangement in Different Graveyards in References of Shab-e-Barat in Landhi Zone DMC Korangi.

Tender Reference: No. _____ **Dated:** _____

(OPEN RATE ITEMS)

S. No.	Description	Quantity	Rate	Unit	Amount
01	Temporary Illumination with 400-Watt Flood Lights with clamping arrangement, On-Off Switch, as per instructions of E.I. the job includes the cost of labor and transportation etc.	400 Nos.	@	Per Job	Rs.
02	Temporary Illumination with 24/25 Watts Energy Savor Lamp Chain with clamping arrangement On-Off Switch, as per instructions of E.I. the job includes the cost of labor and transportation etc.	550 Nos.	@	Per Job	Rs.
03	Temporary Illumination with 1000-Watt Flood Lights with clamping arrangement, On-Off Switch, as per instructions of E.I. the job includes the cost of labor and transportation etc.	100 Nos.	@	Per Job	Rs.
04	P/L Main Power Supply on temporary basis with 06mm ² , 4-wire PVC Insulated and PVC Sheeted copper conductor from source of power to distribution point, as per instructions of E.I. the job includes the cost of labor and transportation etc.	2700 Meters	@	Per Job	Rs.
05	Arrangement of 100-KVA Generator on temporary basis for 24 Hours including Fuel, operator and 100-AMP change over complete in all respect. the job includes the cost of labor and transportation etc.	05 Nos.	@	Per Job	Rs.
06	Arrangement of 50-KVA Generator on temporary basis for 24 Hours including Fuel, operator and 100-AMP change over complete in all respect. the job includes the cost of labor and transportation etc.	04 Nos.	@	Per Job	Rs.
07	Arrangement of 10-KVA Generator on temporary basis for 24 Hours including Fuel, operator and 100-AMP change over complete in all respect. the job includes the cost of labor and transportation etc.	08 Nos.	@	Per Job	Rs.
08	Temporary installation of Light Post with 2' Long nail and 10' Long pipe for support of lamp chain and fixing of light etc as per site requirement and instruction of E.I.	500 Nos.	@	Per Job	Rs.



OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

(SUMMARY OF BILL OF QUANTITIES)

I/We hereby quoted as follows:

		<u>In Figure</u>	<u>In Words</u>
01	Part .A (item based on S/R) % Below / Above	Rs.	
02	Part .B (item based on O/R)	Rs.	
Grand Total (A+B)		Rs.	

The Total amount is Rs. _____ Rupees (_____)

for the complete job for all schedule of rate & offer rates (which ever is included in the BOQ)

I/We have attached a Bid Security amounting to Rs. _____/- as per NIT in shape of pay order bearing No. _____ dated _____ issued from _____ (Bank)


Time Limit : 30 Calendar Days

Penalty Per Day: Rs. 3000/- per day (Max.10% of Sanctioned Cost)

Validity : 90+30 Days as per SPP Rules 2010

NOTE:

- Tender must be quoted in figure & in words both otherwise liable to be cancelled.
- All over writing & correction if any must be initialed & stamped by the bidder.
- We/I read the standard bidding Documents (Volume n-I) and available DCM Korangi and agreed to abide all of them and also provide all these documents with our signatures as & when directed.

<p><u>For Office Use of DMC</u> <u>Korangi</u></p> <p>Verified BOQ by:</p> <p align="center"></p> <p>A.E.E (M&E) D.M.C. Korangi Signature with Stamp</p>

Signature of the contractor with stamp

Address: _____

OFFICE OF THE DIRECTOR PARK (P&R) LANDHI ZONE DMC KORANGI

Estimated Cost: 9,00,000/- 02% Earnest Money Tender Cost Rs. 2000/=

Subject: **Supplying of C.C. Benches in different parks uc 01 to 12 park deptt Landhi Zone DMC Korangi.**

S #	Description	Qty	Rate	UNIT	Amount
1	Supplying of C.C Benches size (6x1/2x1)with Clouring,Fixing etc complete.	100Nos	@6,000/-	P /Nos	6,00,000
2	Supplying of 24" C.C pots with colour etc complete.	50 Nos	@6,000/-	P /Nos	3,00,000
TOTAL AMOUNT					9,00,000/-

- 1) Time Limit : One Month
- 2) Penalty : Rs. 1000/= Per Day

I/we hereby Quoted the our rate at _____ % above / below the schedule of rate.

Contractor's Signature

Address:



**DIRECTOR PARK (P&R)
DMC KORANGI**

**OFFICE OF THE DIRECTOR PARK (P&R) LANDHI ZONE DMC
KORANGI**

Estimated Cost: 10,00,000/- 02% Earnest Money Tender Cost Rs. 2000/=

Subject: **Supplying Of Electric motors in Different Parks Uc 01 To 12 Park Deptt
Landhi Zone DMC Korangi.**

#	Description	Qty	Rate	UNIT	Amount
1	Supplying of 1 HP electric motor (mono block)best quality made by Pakistan etc Complete.	25 Nos	@20,000/-	P / Nos	5,00,000/-
2	Supplying of 1 HP electric motor (piston pump)best quality made by Pakistan etc Complete.	25Nos	@20,000/-	P / Nos	5,00,000/-
TOTAL AMOUNT					10,00,000/-

- 1) Time Limit : One Month
- 2) Penalty : Rs. 1000/= Per Day

I/we hereby Quoted the our rate at _____ % above / below the schedule of rate.

Contractor's Signature

Address: _____



**DIRECTOR PARK (P&R)
DMC KORANGI**

OFFICE OF THE DIRECTOR PARK (P&R) LANDHI ZONE DMC KORANGI

Estimated Cost: 12,00,000/-

02% Earnest Money Tender Cost Rs. 2500/=

Subject: **Supplying of Date Palm for Darul-ullom Road Green Belt park deptt Landhi Zone DMC Korangi.**

S #	Description	Qty	Rate	UNIT	Amount
1	Supplying of Best Quality Date Palm 12fit Height with Loading Unloading ,digging and supplying sweet earth free for all dieses etc complete.	120Nos	@10,000/-	P /Nos	12,00,000
TOTAL AMOUNT					12,00,000/-

- 1) Time Limit : One Month
 2) Penalty : Rs. 1000/= Per Day

I/we hereby Quoted the our rate at _____ % above / below the schedule of rate.

Contractor's Signature

Address:

Jawid


**DIRECTOR PARK (P&R)
 DMC KORANGI**

OFFICE OF THE DIRECTOR PARK (P&R) LANDHI ZONE DMC KORANGI

Estimated Cost: 10,00,000/-

02% Earnest Money Tender Cost Rs. 2000/=


Subject: **Supplying Of Different Kind of Mother plants for Landhi Zone Nursery park
Deptt Landhi Zone DMC Korangi.**

S #	Description	Qty	Rate	UNIT	Amount
1	Supplying of best Quality Different kind of mother Plants are as below.				
	1)Malaysia Palm 9" Earth Pots	300 Nos	@100/-	P / Nos	30,000/-
	2)Areca Palm 9" Earth Pots	300 Nos	@100/-	P / Nos	30,000/-
	3)Saiqus palm 20" Earth Pots	20 Nos	@2,000/-	P / Nos	40,000/-
	4)Comb palm 20" Earth Pots	50 Nos	@500/-	P / Nos	25,000/-
	5)Tremeria Palm 12" Earth Pots	70 Nos	@1000/-	P / Nos	70,000/-
	6)Carcton 12" Earth Pots	100 Nos	@1000/-	P / Nos	1,00,000/-
	7)Aexora 12" Earth Pots	50 Nos	@500/-	P / Nos	25,000/-
	8)Spara Grass 9" Earth Pots	250 Nos	@100/-	P / Nos	25,000/-
	9)Malam kodium 12" Earth Pots	50 Nos	@1000/-	P / Nos	50,000/-
	10)Coconut Tree 12" Earth Pots	50 Nos	@2,000/-	P / Nos	1,00,000/-
	11)Galfaminum 12" Earth Pots	30 Nos	@2,000/-	P / Nos	60,000/-
	12)Hemeliya 12" Earth Pots a	50 Nos	@1000/-	P / Nos	50,000/-
	13)Bogan Bella F1 12" Earth Pots	50 Nos	@500/-	P / Nos	25,000/-
	14)Foxtail Plam 9" Earth Pots	100 Nos	@500/-	P / Nos	50,000/-
	15)Aerogeria 12" Earth Pots	100 Nos	@500/-	P / Nos	50,000/-
	16)Champa 12" Earth Pots	100 Nos	@500/-	P / Nos	50,000/-
	17)Druckceena 12" Earth Pots	100 Nos	@500/-	P / Nos	50,000/-
	18)Song of Thai 9" Earth Pots	100 Nos	@500/-	P / Nos	50,000/-
	19)Song of India 9" Earth Pots	100 Nos	@500/-	P / Nos	50,000/-
	20)Ficus Benjuman 12" Earth Pots	100 Nos	@300/-	P / Nos	30,000/-
	21)Zembia Palm 12" Earth Pots	50 Nos	@1500/-	P / Nos	75,000/-
TOTAL AMOUNT					10,00,000/-

- 1) Time Limit : One Month
- 2) Penalty : Rs. 1000/= Per Day

I/we hereby Quoted the our rate at _____ % above / below the schedule of rate.

Contractor's Signature
Address: _____



**DIRECTOR PARK (P&R)
DMC KORANGI**



OFFICE OF THE EXECUTIVE ENGINEER KORANGI ZONE DMC KORANGI

99
101

Tender Reference ADTR/K/247/2014-15 Dated: 06-05-2015

DATE OF OPENING: 29-05-2015

VOLUME-II BILL OF QUANTITIES (SINGLE STAGE ONE ENVELOPE METHOD)

CONSTRUCTION OF DUSTBIN IN UC-01,02,03,04,05 & 09 KORANGI ZONE
DMC KORANGI.

PC Cost:-

Rs, 32,11,751/-

Bid Security:-

Rs, 64,235/-

Tender Cost:-

Rs, 3,000/-

NOTE:

- 1) This Document contains 02 page excluding this page
- 2) The Standard Terms & Condition of Bidding Documents (Volume-I) available in the office & website of DMC Korangi

[Signature]
Executive Engineer
District Municipal Corporation
Korangi Karachi.

Executive Engineer
(R&R) DMC Korangi

Issue to M/S. _____

P.No _____

Dated: _____

Bank: _____

Signature & Stamp of Issuing Authority.



OFFICE OF THE EXECUTIVE ENGINEER

KORANGI ZONE DMC KORANGI

CONSTRUCTION OF DUSTBIN IN UC-01,02,03,04,05 & 09 KORANGI ZONE
DMC KORANGI.

97
101

Tender Reference No. ADTR/K/247/2014-15

Dated : 06-05-2015

S.No.	DESCRIPTION.	QTY.	RATE.	UNIT.	TOTAL
01	Excavation in foundation of building bridges and other structure i/c rebelling, dressing, refilling around structure with excavation earth watering and ramming etc complete.	4379.0	3176.25	%0 Cft	13,908/-
02	Cement Concrete brick or stone blast 1 1/2 " to gauge 1:4:8	5190.0	9416.28	% Cft	4,88,703/-
	P/L Stone Soling for sub base , hammer dressed etc comp.	1371.31	5377.63	% Cft	73,744/-
04	Cement Concrete plain including placing compacting, finishing and curing complete 1:2:4 etc.	7056.0	14429.25	%Cft	10,18,129/-
05	Erection and removal of centering for RCC or plain cement concrete work of parallel wood.	8208.0	3127.41	% Sft	2,65,698/-
06	RCC work in roof slab, beams columns rafts, lintels (1:2:4) etc comp.	772.0	337	P Cft	2,60,164/-
07	Fabrication of mild steel reinforcement for cement concrete i/c cutting, bending, laying etc complete.	27.57	5001.70	P/CWT	1,37,896/-
08	Providing and laying 1:3:6 Cement Concrete Solid Block Masonry wall set in 1:6 Cement sand mortar in plaint etc comp.	1149.0	14621.44	% Cft	1,68,000/-
09	Earth filling watering ramming earth under floor from out souk s de etc complete.	16531.0	3630.0	%0 Cft	60,007/-
10	P/L 3" thick topping cement concrete 1:2:4 i/c surface finishing etc.	8256.0	4411.82	% Sft	3,64,240/-
	1/2" thick cement plaster 1:4 etc	11008.0	2283.93	% Sft	2,51,415/-
12	Distemping 3 Coats etc	11008.0	1079.65	% Sft	1,38,848/-

Total Amount Rs. 32,11,751/-

Assistant Executive Engineer
(Block) DMC Korangi

**CONSTRUCTION OF DUSTBIN IN UC-01,02,03,04,05 & 09 KORANGI ZONE
DMC KORANGI.**

97

(SUMMARY OF BILL OF QUANTITIES)

I/We hereby quoted as follows:

		<u>In Figure</u>	<u>In Words</u>
<u>01</u>	Part .A (item based on S/R) _____ %Below/ Above	Rs.	
<u>02</u>	Part .B (item based on A/R)	Rs.	
<u>03</u>	Part .C (item based on O/R)		
Grand Total (A+B+C)		Rs.	

101

The Total amount is Rs. _____ In Words _____
_____ for the complete job for all schedule of rate & offer rates(which ever is included in the BOQ).


I/We have attached a Bid Security amounting to Rs. _____/- as per NIT in shape of pay order bearing No. _____ dated _____ issued from _____ (Bank)

Time Limit : 60 Calendar Days
Validity : 90+30 Days as per SPP Rules 2010

Penalty Per Day: Rs. _____/- per day (Max.10% of Sanctioned Cost)

NOTE:

- Tender must be quoted in figure & in words both otherwise liable to be cancelled.
- All over writing & correction if any must be initialed & stamped by the bidder.
- We/I read the standard bidding Documents (Volumn-I) and available DMC Korangi and agreed to abide all of them and also provide all these documents with our signatures as & when directed.

For Office Use of DMC Korangi
Verified BOQ by: Assistant Engineer 
A.E.E Korangi Signature with Stamp

Signature of the contractor with stamp

Address: _____



1

102

OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

NO: EE/M&E/DMC/K/ /2015

Dated: - _____.

Tender Reference No. _____ Dated : _____

DATE OF OPEANING: _____

VOLUME-II BILL OF QUANTITIES
(SINGLE STAGE ONE ENVELOPE METHOD)

**P/F Street Lights and Other Electrical Accessories at Different Areas of
Korangi Zone, DMC Korangi.**

PC Cost: - Rs, 14,07,485.00

Bid Security: - Rs, 28,150.00

Tender Cost: - Rs, 2,500.00

NOTE:

- 1) This Document contains 03 pages including this page
- 2) The Standard Terms & Condition of Bidding Documents
(Volume-I) available in the office & website of DMC Korangi

Executive Engineer (M&E),
District Municipal Corporation
Korangi Karachi.

Issue to M/S. _____ P.No. _____

Dated: _____ Bank: _____ Branch: _____

Signature & Stamp of Issuing Authority.



OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

NAME OF WORK: P/F Street Lights and other Electrical Accessories at different Areas of Korangi Zone, DMC Korangi.

Tender Reference: No. _____ Dated: _____

(PART "A" SCHEDULE RATE ITEMS)

S. No.	Description	Quantity	Rate	Unit	Amount
01	Providing & Fixing Street light 125 watts (HPMV) Having IP54 classification with 125-W Lamp, Choke, capacitor & internal wiring complete in all respect at the height up to 31-ft as per site Requirement & instruction of engineer in charge. Make of the above Light is as follow.	75 Nos.	@6,365.00	Per No.	Rs.477,375/-
02	Providing & Fixing Street light 250 watts (SON) Having IP54 classification with 250-W Lamp, Ballast, capacitor & internal wiring complete in all respect at the height up to 31-ft as per site Requirement & instruction of engineer in charge.	50 Nos.	@10,105.00	Per No.	Rs.505,250/-
03	Providing & Fixing Flood light 400 watts (HPIT) Having IP54 classification with 400-W Lamp, Ballast, capacitor & internal wiring complete in all respect at the height up to 40-ft as per site Requirement & instruction of engineer in charge.	20 Nos.	@15,440.00	Per No.	Rs.308,800/-
04	Providing & laying (MAIN or SUB MAIN) PVC insulated & PVC Sheeted with two core copper conductor 300/500 volt size 2.5mm ² .	900 Meters.	@118.00	Per Mtr.	Rs.106,200/-
05	Providing & fixing one way SP 10/15amp switch surface type.	170 Nos.	@58.00	Per No.	Rs.9,860/-

Rs.14,07,485/-



OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

(SUMMARY OF BILL OF QUANTITIES)

I/We hereby quoted as follows:

		<u>In Figure</u>	<u>In Words</u>
01	Part .A (item based on S/R) % Below / Above	Rs.	
02	Part .B (item based on O/R)	Rs.	
Grand Total (A+B)		Rs.	

The Total amount is Rs. _____ Rupees (_____)

for the complete job for all schedule of rate & offer rates (which ever is included in the BOQ)

I/We have attached a Bid Security amounting to Rs. _____/- as per NIT is shape of pay order bearing No. _____ dated _____ issued from _____.

(Bank)

Time Limit : 30 Calendar Days

Penalty Per Day: Rs. 1500/- per day (Max.10% of Sanctioned Cost)

Validity : 90+30 Days as per SPP Rules 2010

NOTE:

- Tender must be quoted in figure & in words both otherwise liable to be cancelled.
- All over writing & correction if any must be initialed & stamped by the bidder.
- We/I read the standard bidding Documents (Volume n-1) and available DCM Korangi and agreed to abide all of them and also provide all these documents with our signatures as & when directed.

For Office Use of DMC
Korangi

Verified BOQ by:

A.E.E (M&E) D.M.C. Korangi
Signature with Stamp

Signature of the contractor with stamp

Address: _____



1

103

OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

NO: EE/M&E/DMC/K/ /2015

Dated: - _____

Tender Reference No. _____ Dated: _____

DATE OF OPENING:

VOLUME-II BILL OF QUANTITIES
(SINGLE STAGE ONE ENVELOPE METHOD)

Temporary Lighting Arrangement in Different Graveyards in
References of Shab-e-Barat in Korangi Zone DMC Korangi.

PC Cost: -

Open Rate

Bid Security: -

02% of Quoted Bid.

Tender Cost: -

Rs, 1,500.00

NOTE:

- 1) This Document contains 03 pages including this page
- 2) The Standard Terms & Condition of Bidding Documents (Volume-I) available in the office & website of DMC Korangi

Executive Engineer (M&E),
District Municipal Corporation
Korangi Karachi.

Issue to M/S. _____ P.No. _____

Dated: _____ Bank: _____ Branch: _____

Signature & Stamp of Issuing Authority.



OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

NAME OF WORK: Temporary Lighting Arrangement in Different Graveyards in References of Shab-e-Barat in Korangi Zone DMC Korangi.

Tender Reference: No. _____ **Dated:** _____

(OPEN RATE ITEMS)

S. No.	Description	Quantity	Rate	Unit	Amount
01	Temporary Illumination with 400-Watt Flood Lights with clamping arrangement, On-Off Switch, as per instructions of E.I. the job includes the cost of labor and transportation etc.	400 Nos.	@	Per Job	Rs.
02	Temporary Illumination with 24/25 Watts Energy Savor Lamp Chain with clamping arrangement On-Off Switch, as per instructions of E.I. the job includes the cost of labor and transportation etc.	500 Nos.	@	Per Job	Rs.
03	Temporary Illumination with 1000-Watt Flood Lights with clamping arrangement, On-Off Switch, as per instructions of E.I. the job includes the cost of labor and transportation etc.	100 Nos.	@	Per Job	Rs.
04	P/L Main Power Supply on temporary basis with 06mm ² , 4-wire PVC Insulated and PVC Sheeted copper conductor from source of power to distribution point, as per instructions of E.I. the job includes the cost of labor and transportation etc.	2700 Meters	@	Per Job	Rs.
05	Arrangement of 100-KVA Generator on temporary basis for 24 Hours including Fuel, operator and 100-AMP change over complete in all respect. the job includes the cost of labor and transportation etc.	04 Nos.	@	Per Job	Rs.
06	Arrangement of 50-KVA Generator on temporary basis for 24 Hours including Fuel, operator and 100-AMP change over complete in all respect. the job includes the cost of labor and transportation etc.	06 Nos.	@	Per Job	Rs.
07	Arrangement of 10-KVA Generator on temporary basis for 24 Hours including Fuel, operator and 100-AMP change over complete in all respect. the job includes the cost of labor and transportation etc.	10 Nos.	@	Per Job	Rs.
08	Temporary installation of Light Post with 2' Long nail and 10' Long pipe for support of lamp chain and fixing of light etc as per site requirement and instruction of E.I.	500 Nos.	@	Per Job	Rs.

Rs. _____



OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

(SUMMARY OF BILL OF QUANTITIES)

I/We hereby quoted as follows:

		<u>In Figure</u>	<u>In Words</u>
01	Part .A (item based on S/R) % Below / Above	Rs.	
02	Part .B (item based on O/R)	Rs.	
Grand Total (A+B)		Rs.	

The Total amount is Rs. _____ Rupees (_____)

for the complete job for all schedule of rate & offer rates (which ever is included in the BOQ)

I/We have attached a Bid Security amounting to Rs. _____/- as per NIT in shape of pay order bearing No. _____ dated _____ issued from _____
 (Bank)

Time Limit : 30 Calendar Days

Penalty Per Day: Rs. 1500/- per day (Max.10% of Sanctioned Cost)

Validity : 90+30 Days as per SPP Rules 2010

NOTE:

- Tender must be quoted in figure & in words both otherwise liable to be cancelled.
- All over writing & correction if any must be initialed & stamped by the bidder.
- We/I read the standard bidding Documents (Volume n-1) and available DCM Korangi and agreed to abide all of them and also provide all these documents with our signatures as & when directed.

For Office Use of DMC
Korangi

Verified BOQ by:

A.E.E (M&E) D.M.C. Korangi
 Signature with Stamp

Signature of the contractor with stamp

Address: _____



OFFICE OF THE EXECUTIVE ENGINEER

KORANGI ZONE DMC KORANGI

Tender Reference. ADTR/K/247/2014-15 Dated: 06-05-2015

DATE OF OPENING: 29-05-2015

VOLUME-II BILL OF QUANTITIES (SINGLE STAGE ONE ENVELOPE METHOD)

CONSTRUCTION OF DUST BIN IN SHREEFABAD & UC-01 02 & 03 KORANGI ZONE DMC KORANGI

PC Cost:-	Rs, 21,59,739/-
Bid Security:-	Rs, 43,195/-
Tender Cost:-	Rs, 3,000/-

NOTE:

- 1) This Document contains 02 page excluding this page
- 2) The Standard Terms & Condition of Bidding Documents (Volume-I) available in the office & website of DMC Korangi

[Signature]
Executive Engineer
District Municipal Corporation
Korangi Karachi.

Executive Engineer
(B&R) DMC Korangi

Issue to M/S. _____

P.No _____
Dated: _____
Bank: _____

Signature & Stamp of Issuing Authority.



OFFICE OF THE EXECUTIVE ENGINEER

KORANGI ZONE DMC KORANGI


CONSTRUCTION OF DUST BIN IN SHREEFABAD & UC-01 02 & 03
KORANGI ZONE DMC KORANGI

100

Tender Reference No. ADTR/K/247/2014-15

Dated: 06-05-2015

S.No.	DESCRIPTION.	QTY.	RATE.	UNIT.	TOTAL.
01	Excavation in foundation of building bridges and other structure i/c rebelling, dressing, refilling around structure with excavation earth watering and ramming etc complete.	1908.0	3176.25	%0 Cft	6,060/-
02	Cement Concrete brick or stone blast 1 1/2" to gauge 1:4:8	1293.0	9416.28	% Cft	1,21,752/-
03	P/L stone soling for sub-base.	2760.0	5377.63	% Cft	1,48,422/-
04	RCC work in roof slab, beams columns rafts, lintels (1:2:4) etc comp.	3120.0	337	P Cft	10,51,440/-
05	Fabrication of mild steel reinforcement for cement concrete i/c cutting, bending, laying etc complete.	111.42	5001.70	P/CWT	5,57,284/-
06	Earth filling watering ramming earth under floor from out souk side etc complete.	2400.0	3630.0	% Cft	8,712/-
07	P/L 3" thick topping cement concrete 1:2:4 i/c surface finishing etc.	2760.0	4411.82	% Sft	1,21,766/-
08	1/2" thick cement plaster 1:4 etc	4290.0	2283.93	% Sft	97,980/-
09	Distemping 3 Coats etc	4290.0	1079.65	% Sft	46,317/-
Total Amount Rs. 21,59,739/-					


Assistant Executive Engineer
(B&R) DMC Korangi

**CONSTRUCTION OF DUST BIN IN SHREEFABAD & UC-01 02 & 03
KORANGI ZONE DMC KORANGI**

104

(SUMMARY OF BILL OF QUANTITIES)

I/We hereby quoted as follows:

		<u>In Figure</u>	<u>In Words</u>
01	Part .A (item based on S/R) _____ %Below/ Above	Rs.	
02	Part .B (item based on A/R)	Rs.	
03	Part .C (item based on O/R)		
Grand Total (A+B+C)		Rs.	

The Total amount is Rs. _____ In Words _____
_____ for the complete job for all schedule of rate & offer rates(which ever is included in the BOQ).


I/We have attached a Bid Security amounting to Rs. _____/- as per NIT in shape of pay order bearing No. _____ dated _____ issued from _____ (Bank)

Time Limit : 60 Calendar Days
Validity : 90+30 Days as per SPP Rules 2010

Penalty Per Day: Rs. _____/- per day (Max.10% of Sanctioned Cost)

NOTE:

- Tender must be quoted in figure & in words both otherwise liable to be cancelled.
- All over writing & correction if any must be initialed & stamped by the bidder.
- We/I read the standard bidding Documents (Volumn-I) and available DMC Korangi and agreed to abide all of them and also provide all these documents with our signatures as & when directed.

<p>For Office Use of DMC Korangi</p> <p>Verified BOQ by </p> <p>Assistant Executive Engineer</p> <p align="center">A.E.F Korangi Signature with Stamp</p>

Signature of the contractor with stamp

Address: _____



OFFICE OF THE EXECUTIVE ENGINEER

KORANGI ZONE DMC KORANGI

Tender Reference ADTE/K/247/2014-15 Dated: 06-05-2015

DATE OF OPENING: 29-05-2015

VOLUME-II BILL OF QUANTITIES (SINGLE STAGE ONE ENVELOPE METHOD)

HIRING OF MACHINERY FOR DE-SILTING OF NALLAH FROM BILAL CHOWRANGI TO SHAN CHOWRANGI AT JOINTING AREA INCLUDING LEVELING AND DRESSING OF MAIN BAZAR ROAD UC-01 KORANGI ZONE DMC KORANGI

PC Cost:- Rs, 5,15,754/- + Open Rate
 Bid Security:- Rs, 10,315/- + Open Rate
 Tender Cost:- Rs, 3,000/-

NOTE:

- 1) This Document contains 02 page excluding this page
- 2) The Standard Terms & Condition of Bidding Documents (Volume-I) available in the office & website of DMC Korangi

[Signature]
 Executive Engineer
 District Municipal Corporation
 Korangi Karachi.

Executive Engineer
 (B&R) DMC Korangi

Issue to M/S. _____

P.No _____
 Dated: _____
 Bank: _____

Signature & Stamp of Issuing Authority.



OFFICE OF THE EXECUTIVE ENGINEER

KORANGI ZONE DMC KORANGI

HIRING OF MACHINERY FOR DE-SILTING OF NALLAH FROM BILAL CHOWRANGI TO SHAN CHOWRANGI AT JOINTING AREA INCLUDING LEVELING AND DRESSING OF MAIN BAZAR ROAD UC-01 KORANGI ZONE DMC KORANGI

104


Tender Reference No. ADTR/K/247/2014-15 Dated: 06-05-2015

Part "A"

S.No	Particular	Quantity	Rate	Amount
01	Earth Work Excavation Road saide undressed lead up to etc comp.	58800.00 Cft	1361.25	80,042/-
	Carrige of 100 Cft/5 tones of all material like stone aggregate, spawl, coal Lime, sukhi etc. B.G rail fastenings points and crossing bridge, Girders, pipes, sheet rails, M.S bar etc, or 1000Nos bricks, 10" x 5" x 3" or 1000Nos etc.	58800.0 Cft	579.41	3,40,693/-
03	Prepa ing sub grade i/c earth excavation or filling to and average depth of 9" dressing to chamber and consolidation with power roller. Finished item (Pg#2)	18055.0 Sft	526.28	95,019/-
Total Amount				Rs.5,15,754/-

Part "B"

S.No	Particular	Quantity	Rate	Amount
04	Providing of wheel excavator for cleaning of Nallahs i/c all accessories P-O-L operator cleaners helper 08 hrs a day i-c from 9-am to 5 p.m	08 Days		
05	Providing of wheel Loader for removal of slush of Nallahs i/c all accessories P-O-L operator cleaners helper 08 hrs a day i-c from 9-am to 5 p.m	04 Days		
06	Providing of wheel Dumper tracks for transport of Nallahs i/c all accessories P-O-L operator cleaners helper 08 hrs a day i-c from 9-am to 5 p.m	24 Nos		
07	Providing Blade Tractor for collection of debries leveling of Land i/c all accessories P-O-L operator cleaners helper 08 hrs a day i-c from 9-am to 5 p.m	01 Days		
08	Providing Skilled labour for cleaning of chowking point of nallah along with tool, spawl, phawras with long bamboo handle: s bamboo.	123 Nos		
OPEN RATE				


Assistant Executive Engineer
(B&R) DMC Korangi

104

HIRING OF MACHINERY FOR DE-SILTING OF NALLAH FROM BILAL CHOWRANGI TO SHAN CHOWRANGI AT JOINTING AREA INCLUDING LEVELING AND DRESSING OF MAIN BAZAR ROAD UC-01 KORANGI ZONE DMC KORANGI

(SUMMARY OF BILL OF QUANTITIES)

I/We hereby quoted as follows:

		<u>In Figure</u>	<u>In Words</u>
<u>01</u>	Part .A (item based on S/R) _____ %Below/ Above	Rs.	
<u>02</u>	Part .B (item based on A/R)	Rs.	
<u>03</u>	Part .C (item based on O/R)		
Grand Total (A+B+C)		Rs.	

The Total amount is Rs. _____ In Words _____

_____ for the complete job for all schedule of rate & offer rates (which ever is included in the BOQ).

I/We have attached a Bid Security amounting to Rs. _____/- as per NIT in shape of pay order bearing No. _____ dated _____ issued from _____ (Bank)


Time Limit : 60 Calendar Days

Penalty Per Day: Rs. _____/- per day (Max. 10% of Sanctioned Cost)

Validity : 90+30 Days as per SPP Rules 2010

NOTE:

- Tender must be quoted in figure & in words both otherwise liable to be cancelled.
- All over writing & correction if any must be initialed & stamped by the bidder.
- We/I read the standard bidding Documents (Volumn-I) and available DMC Korangi and agreed to abide all of them and also provide all these documents with our signatures as & when directed.

For Office Use of DMC Korangi
 Verified BOQ by 
Assistant Executive Engineer
 A.E.E Korangi
 Signature with Stamp

Signature of the contractor with stamp

Address: _____

OFFICE OF THE EXECUTIVE ENGINEER

KORANGI ZONE DMC KORANGI

106

PATCH REPAIR/TRENCH REPAIR OF MAIN LINK ROAD INDUSTRIAL AREA KORANGI ZONE

Tender Reference No. _____ Dated : _____

Part "A"

S.No.	DESCRIPTION	QUANTITY	RATE (Rs.)	UNIT	AMOUNT
C1	Dismantling cement concrete plan 1:2:4	450.0	3327.50	%Cft	14,974/-
C2	Earth work excavation undressed lead upto a single throw of kassi phawara Shovel in Ordinary Soil etc Complete.	3850.0	1361.25	%0 Cft	5,241/-
C3	Carriage of 100 Cft/5 tones of all material like stone aggregate, spawl, coal Lime, sukhi etc. B.G rail fastenings points and crossing bridge, Girders, pipes, sheet rails, M.S bar etc, or 1000Nos bricks, 10" x 5" x 3" or 1000Nos etc.	4300.0	579.41	%Cft	24,915/-
C4	P/L aggregate base course in proper grade and chamber having CBR 80% as per AASHTO standard specification i/c spreading mechanical means (Motor grader, vibratory roller and smooth wheel roller etc.	4400.0	5542.24	%Cft	2,43,859/-
C5	P/L 1" thick (consolidated) asphalted macadam using sheltie B.S or its equivalent grade in any other app: Propriety brand with remarked coat using bitumen 15 lbs % sft for tack coat 3 1/2 lbs per Cft (total bitumen 65 lbs i/c sft)	15450.0	4107.84	% Sft	6,34,661/-

Total Amount Rs. 9,23,650/-

Part "B"

S.No.	DESCRIPTION	QUANTITY	RATE (Rs.)	UNIT	AMOUNT
06	Providing & Fixing Precast KERB Block with Ratio 1:1.5:3 C C having minimum cube crushing strength of 3750 PSI after 28 days and having minimum cube crushing strength of 3750 PSI after 28 days and having weight 60 kg per piece of kerb block of size height = 45 cm, width at bases= 20cm width at top=15 cm and length = 30 cm, up stand kerb shall be laid on 2 cm thick CM1:4 level and alignment shall be properly maintained or as direction by the engineer incharge.	8800.0	7-0 A/R	% Sft	61,600/-

Total Amount Rs. 61,600/-

Part "C"

S.No.	DESCRIPTION	QUANTITY	RATE (Rs.)	UNIT	AMOUNT
07	P/L single layer of 1" thick compacting thickness wearing course on the following job mix formula : Asphalt (60/70 grade) content weight 4.5 % of Total mix. i/c rolling and finishing etc complete.	2000.0	0/R	% Sft	

PATCH REPAIR/TRENCH REPAIR OF ROAD INUC NO.02 AND 03 KORANGI ZONE

106

(SUMMARY OF BILL OF QUANTITIES)

I/We hereby quoted as follows:

	<u>In Figure</u>	<u>In Words</u>
01 Part .A (item based on S/R) _____ %Below/ Above	Rs.	
02 Part .B (item based on A/R)	Rs.	
03 Part .C (item based on O/R)		
Grand Total (A+B+C)	Rs.	

The Total amount is Rs. _____ In Words _____

_____ for the complete job for all schedule of rate & offer rates (which ever is included in the BOQ).

I/We have attached a Bid Security amounting to Rs. _____/- as per NIT in shape of pay order bearing No. _____ dated _____ issued from _____ (Bank)

Time Limit : 60 Calendar Days

Penalty Per Day: Rs. _____/- per day (Max. 10% of Sanctioned Cost)

Validity : 90+30 Days as per SPP Rules 2010

NOTE:

- Tender must be quoted in figure & in words both otherwise liable to be cancelled.
- All over writing & correction if any must be initialed & stamped by the bidder.
- We/I read the standard bidding Documents (Volume-I) and available DMC Korangi and agreed to abide all of the terms and also provide all these documents with our signatures as & when directed.

For Office Use of DMC Korangi

Verified BOQ by:

A.E.E Korangi
Signature with Stamp

Signature of the contractor with stamp

Address: _____



1
107

OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

NO: EE/M&E/DMC/K/ /2015

Dated: - _____.

Tender Reference No. M.C./D.M.C./K/ / Dated: _____

DATE OF OPENING: _____

VOLUME-II BILL OF QUANTITIES
(SINGLE STAGE ONE ENVELOPE METHOD)

**P/F Street Lights and Other Electrical Accessories at Different Areas of
Landhi Zone, DMC Korangi.**

PC Cost: - Rs, 14,07,485.00

Bid Security: - Rs, 28,150.00

Tender Cost: - Rs, 2,500.00

NOTE:

- 1) This Document contains 03 pages including this page
- 2) The Standard Terms & Condition of Bidding Documents (Volume-I) available in the office & website of DMC Korangi

Executive Engineer (M&E),
District Municipal Corporation
Korangi Karachi.

Issue to M/S. _____ P.No. _____

Dated: _____ Bank: _____ Branch: _____

Signature & Stamp of Issuing Authority.



OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

NAME OF WORK: P/F Street Lights and other Electrical Accessories at different Areas of Landhi Zone, DMC Korangi.

Tender Reference: No. M.C./D.M.C./K/_____ / _____ Dated: _____

(PART "A" SCHEDULE RATE ITEMS)

S. No.	Description	Quantity	Rate	Unit	Amount
01	Providing & Fixing Street light 125 watts (HPMV) Having IP54 classification with 125-W Lamp, Choke, capacitor & internal wiring complete in all respect at the height up to 31-ft as per site Requirement & instruction of engineer in charge. Make of the above Light is as follow.	75 Nos.	@6,365.00	Per No.	Rs.477,375/-
02	Providing & Fixing Street light 250 watts (SON) Having IP54 classification with 250-W Lamp, Ballast, capacitor & internal wiring complete in all respect at the height up to 31-ft as per site Requirement & instruction of engineer in charge.	50 Nos.	@10,105.00	Per No.	Rs.505,250/-
03	Providing & Fixing Flood light 400 watts (HPIT) Having IP54 classification with 400-W Lamp, Ballast, capacitor & internal wiring complete in all respect at the height up to 40-ft as per site Requirement & instruction of engineer in charge.	20 Nos.	@15,440.00	Per No.	Rs.308,800/-
04	Providing & laying (MAIN or SUB MAIN) PVC insulated & PVC Sheeted with two core copper conductor 300/500 volt size 2.5mm ² .	900 Meters.	@118.00	Per Mtr.	Rs.106,200/-
05	Providing & fixing one way SP 10/15amp switch surface type.	170 Nos.	@58.00	Per No.	Rs.9,860/-

Rs.14,07,485/-



OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

(SUMMARY OF BILL OF QUANTITIES)

I/We hereby quoted as follows:

		<u>In Figure</u>	<u>In Words</u>
01	Part .A (item based on S/R) % Below / Above	Rs.	
02	Part .B (item based on O/R)	Rs.	
Grand Total (A+B)		Rs.	

The Total amount is Rs. _____ Rupees (_____)

for the complete job for all schedule of rate & offer rates (which ever is included in the BOQ)

I/We have attached a Bid Security amounting to Rs. _____/- as per NIT in shape of pay order bearing No. _____ dated _____ issued from _____.

(Bank)

Time Limit : 30 Calendar Days
Validity : 90+30 Days as per SPP Rules 2010

Penalty Per Day: Rs. 1500/- per day (Max.10% of Sanctioned Cost)

NOTE:

- Tender must be quoted in figure & in words both otherwise liable to be cancelled.
- All over writing & correction if any must be initialed & stamped by the bidder.
- We/I read the standard bidding Documents (Volume n-1) and available DCM Korangi and agreed to abide all of them and also provide all these documents with our signatures as & when directed.

For Office Use of DMC
Korangi

Verified BOQ by:

A.E.E (M&E) D.M.C. Korangi
 Signature with Stamp

Signature of the contractor with stamp

Address: _____



1

108

OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

NO: EE/M&E/DMC/K/ /2015
Dated: - _____

Tender Reference No. _____ Dated: _____

DATE OF OPENING: _____

VOLUME-II BILL OF QUANTITIES
(SINGLE STAGE ONE ENVELOPE METHOD)

**P/F Street Lights and Other Electrical Accessories at Different Areas of
Shah Faisal Zone, DMC Korangi.**

PC Cost: -	Rs, 14,07,485.00
Bid Security: -	Rs, 28,150.00
Tender Cost: -	Rs, 2,500.00

NOTE:

- 1) This Document contains 03 pages including this page
- 2) The Standard Terms & Condition of Bidding Documents
(Volume-I) available in the office & website of DMC Korangi

Executive Engineer (M&E),
District Municipal Corporation
Korangi Karachi.

Issue to M/S. _____ P.No. _____

Dated: _____ Bank: _____ Branch: _____

Signature & Stamp of Issuing Authority.



OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

NAME OF WORK: P/F Street Lights and other Electrical Accessories at different Areas of Shah Faisal Zone, DMC Korangi.

Tender Reference: No. _____ Dated: _____

(PART "A" SCHEDULE RATE ITEMS)

S. No.	Description	Quantity	Rate	Unit	Amount
01	Providing & Fixing Street light 125 watts (HPMV) Having IP54 classification with 125-W Lamp, Choke, capacitor & internal wiring complete in all respect at the height up to 31-ft as per site Requirement & instruction of engineer in charge. Make of the above Light is as follow.	75 Nos.	@6,365.00	Per No.	Rs.477,375/-
02	Providing & Fixing Street light 250 watts (SON) Having IP54 classification with 250-W Lamp, Ballast, capacitor & internal wiring complete in all respect at the height up to 31-ft as per site Requirement & instruction of engineer in charge.	50 Nos.	@10,105.00	Per No.	Rs.505,250/-
03	Providing & Fixing Flood light 400 watts (HPIT) Having IP54 classification with 400-W Lamp, Ballast, capacitor & internal wiring complete in all respect at the height up to 40-ft as per site Requirement & instruction of engineer in charge.	20 Nos.	@15,440.00	Per No.	Rs.308,800/-
04	Providing & laying (MAIN or SUB MAIN) PVC insulated & PVC Sheeted with two core copper conductor 300/500 volt size 2.5mm ² .	900 Meters.	@118.00	Per Mtr.	Rs.106,200/-
05	Providing & fixing one way SP 10/15amp switch surface type.	170 Nos.	@58.00	Per No.	Rs.9,860/-

Rs.14,07,485/-



OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

(SUMMARY OF BILL OF QUANTITIES)

I/We hereby quoted as follows:

		<u>In Figure</u>	<u>In Words</u>
01	Part .A (item based on S/R) % Below / Above	Rs.	
02	Part .B (item based on O/R)	Rs.	
Grand Total (A+B)		Rs.	

The Total amount is Rs. _____ Rupees (_____)

for the complete job for all schedule of rate & offer rates (which ever is included in the BOQ)

I/We have attached a Bid Security amounting to Rs. _____/- as per NIT in shape of pay order bearing No. _____ dated _____ issued from _____.

(Bank)

Time Limit : 30 Calendar Days

Penalty Per Day: Rs. 1500/- per day (Max.10% of Sanctioned Cost)

Validity : 90+30 Days as per SPP Rules 2010

NOTE:

- Tender must be quoted in figure & in words both otherwise liable to be cancelled.
- All over writing & correction if any must be initialed & stamped by the bidder.
- We/I read the standard bidding Documents (Volume n-1) and available DCM Korangi and agreed to abide all of them and also provide all these documents with our signatures as & when directed.

For Office Use of DMC
Korangi

Verified BOQ by:

A.E.E (M&E) D.M.C. Korangi
Signature with Stamp

Signature of the contractor with stamp

Address: _____



1

108

OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

NO: EE/M&E/DMC/K/ /2015

Dated: - _____

Tender Reference No. _____ Dated : _____

DATE OF OPEANING: _____

VOLUME-II BILL OF QUANTITIES
(SINGLE STAGE ONE ENVELOPE METHOD)

R/M of Street Lights Installed at Different Areas of Korangi Zone, DMC Korangi.

PC Cost: -	Rs. 14, 17,500 + Open Rate
Bid Security: -	Rs. 28,350.00 + 02% of Quoted Bid.
Tender Cost: -	Rs. 2,500.00

NOTE:

- 1) This Document contains 03 pages including this page
- 2) The Standard Terms & Condition of Bidding Documents (Volume-I) available in the office & website of DMC Korangi

Executive Engineer (M&E),
District Municipal Corporation
Korangi Karachi.

Issue to M/S. _____ P.No. _____

Dated: _____ Bank: _____ Branch: _____

Signature & Stamp of Issuing Authority.



OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

NAME OF WORK: R/M of Street Lights Installed at Different Areas of Korangi Zone, DMC Korangi.

Tender Reference: No. _____

Dated: _____

(PART "A" SCHEDULE RATE ITEMS)

S. No.	Description	Quantity	Rate	Unit	Amount
01	Providing & Fixing 125 watts (HPMV) Lamp @ the height as per site Requirement & instruction of engineer in charge.	300 Nos.	@470.00	Per No.	Rs.141,000/-
02	Providing & Fixing 125 watts (HPMV) choke @ the height as per site Requirement & instruction of engineer in charge.	250 Nos.	@1,020.00	Per No.	Rs.255,000/-
03	Providing & fixing 250 watts (SON-T) Lamp @ the height with the help of hydraulic crane as per site Requirement & instruction of engineer in charge.	150 Nos.	@2105.00	Per No.	Rs.315,750/-
04	Providing & fixing 250 watts (SON-T) chowk @ the height with the help of hydraulic crane as per site Requirement & instruction of engineer in charge.	100 Nos.	@3990.00	Per No.	Rs.399,000/-
05	Providing & Fixing 250/400 watts (SON) igniter in all respect at the height up to 40ft with the help of hydraulic crane & manual labor as per site Requirement & instruction of EI.	100 Nos.	@1202.00	Per No.	Rs.120,200/-
06	Providing & laying (MAIN or SUB MAIN) PVC insulated & PVC Sheeted with two core copper conductor 300/500 volt size 2.5mm ² .	900 Meters.	@118.00	Per Mtr.	Rs.106,200/-
07	Providing & fixing one way SP 10/15amp switch surface type.	400 Nos.	@58.00	Per No.	Rs.23,200/-
08	Providing & Fixing Acrylic Cover 125 watts Light @ the height as per site Requirement & instruction of engineer in charge.	100 Nos.	@470/-	Per No.	Rs.47,000/-

S. No.	Description	Quantity	Rate	Unit	Amount
09	Providing & Fixing Holder 125 watts Light @ the height as per site Requirement & instruction of engineer in charge.	50 Nos.	@203/-	Per No.	Rs.10,150/-

Rs.14,17,500/-

(PART "B" OPEN RATE ITEMS)

S. No.	Description	Quantity	Rate	Unit	Amount
10	Providing & Fixing Moon Light with Lamp 125watt and Ballast 125 watt @ height as per site Requirement & instruction of engineer in charge.	100 Nos.	@	Per No.	Rs.

Rs. _____

(SUMMARY OF BILL OF QUANTITIES)

I/We hereby quoted as follows:

		<u>In Figure</u>	<u>In Words</u>
01	Part .A (item based on S/R) % Below / Above	Rs.	
02	Part .B (item based on O/R)	Rs.	
Grand Total (A+B)		Rs.	

The Total amount is Rs. _____ Rupees (_____)

for the complete job for all schedule of rate & offer rates (which ever is included in the BOQ)

I/We have attached a Bid Security amounting to Rs. _____/- as per NIT in shape of pay

order bearing No. _____ dated _____ issued from _____.

(Bank)

Time Limit : 30 Calendar Days

Penalty Per Day: Rs. 1500/- per day (Max.10% of Sanctioned Cost)

Validity : 90+30 Days as per SPP Rules 2010**NOTE:**

- Tender must be quoted in figure & in words both otherwise liable to be cancelled.
- All over writing & correction if any must be initialed & stamped by the bidder.
- We/I read the standard bidding Documents (Volume n-I) and available DCM Korangi and agreed to abide all of them and also provide all these documents with our signatures as & when directed.

**For Office Use of DMC
Korangi**

Verified BOQ by:


A.E.E (N & E) D.M.C. Korangi
Signature with Stamp

Signature of the contractor with stamp

Address: _____



1
110

OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

NO: EE/M&E/DMC/K/ /2015

Dated: - _____

Tender Reference No. _____

Dated: _____

DATE OF OPENING: _____

VOLUME-II BILL OF QUANTITIES
(SINGLE STAGE ONE ENVELOPE METHOD)

R/M of Street Lights Installed at Different Areas of Landhi Zone, DMC Korangi.

PC Cost: -

Rs. 14, 17,500 + Open Rate

Bid Security: -

Rs. 28,350.00 + 02% of Quoted Bid.

Tender Cost: -

Rs. 2,500.00

NOTE:

- 1) This Document contains 03 pages including this page
- 2) The Standard Terms & Condition of Bidding Documents
(Volume-I) available in the office & website of DMC Korangi

Executive Engineer (M&E),
District Municipal Corporation
Korangi Karachi.

Issue to M/S. _____ P.No. _____

Dated: _____ Bank: _____ Branch: _____

Signature & Stamp of Issuing Authority.



OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

NAME OF WORK: R/M of Street Lights Installed at Different Areas of Landhi Zone, DMC Korangi.

Tender Reference: No. _____ Dated: _____

(PART "A" SCHEDULE RATE ITEMS)

S. No.	Description	Quantity	Rate	Unit	Amount
01	Providing & Fixing 125 watts (HPMV) Lamp @ the height as per site Requirement & instruction of engineer in charge.	300 Nos.	@470.00	Per No.	Rs.141,000/-
02	Providing & Fixing 125 watts (HPMV) choke @ the height as per site Requirement & instruction of engineer in charge.	250 Nos.	@1,020.00	Per No.	Rs.255,000/-
03	Providing & fixing 250 watts (SON-T) Lamp @ the height with the help of hydraulic crane as per site Requirement & instruction of engineer in charge.	150 Nos.	@2105.00	Per No.	Rs.315,750/-
04	Providing & fixing 250 watts (SON-T) chowk @ the height with the help of hydraulic crane as per site Requirement & instruction of engineer in charge.	100 Nos.	@3990.00	Per No.	Rs.399,000/-
05	Providing & Fixing 250/400 watts (SON) igniter in all respect at the height up to 40ft with the help of hydraulic crane & manual labor as per site Requirement & instruction of EI.	100 Nos.	@1202.00	Per No.	Rs.120,200/-
06	Providing & laying (MAIN or SUB MAIN) PVC insulated & PVC Sheeted with two core copper conductor 300/500 volt size 2.5mm ² .	900 Meters.	@118.00	Per Mtr.	Rs.106,200/-
07	Providing & fixing one way SP 10/15amp switch surface type.	400 Nos.	@58.00	Per No.	Rs.23,200/-
08	Providing & Fixing Acrylic Cover 125 watts Light @ the height as per site Requirement & instruction of engineer in charge.	100 Nos.	@470/-	Per No.	Rs.47,000/-

Continue on next page.....

S. No.	Description	Quantity	Rate	Unit	Amount
09	Providing & Fixing Holder 125 watts Light @ the height as per site Requirement & instruction of engineer in charge.	50 Nos.	@203/-	Per No.	Rs.10,150/-

Rs.14,17,500/-

(PART "B" OPEN RATE ITEMS)

S. No.	Description	Quantity	Rate	Unit	Amount
10	Providing & Fixing Moon Light with Lamp 125watt and Ballast 125 watt @ height as per site Requirement & instruction of engineer in charge.	100 Nos.	@	Per No.	Rs.

Rs. _____

(SUMMARY OF BILL OF QUANTITIES)

I/We hereby quoted as follows:

		<u>In Figure</u>	<u>In Words</u>
01	Part .A (item based on S/R) % Below / Above	Rs.	
02	Part .E (item based on O/R)	Rs.	
Grand Total (A+B)		Rs.	

The Total amount is Rs. _____ Rupees (_____)

for the complete job for all schedule of rate & offer rates (which ever is included in the BOQ)

I/We have attached a Bid Security amounting to Rs. _____/- as per NIT in shape of pay

order bearing No. _____ dated _____ issued from _____.

(Bank)

Time Limit : 30 Calendar Days

Penalty Per Day: Rs. 1500/- per day (Max.10% of Sanctioned Cost)

Validity : 90+30 Days as per SPP Rules 2010**NOTE:**

- Tender must be quoted in figure & in words both otherwise liable to be cancelled.
- All over writing & correction if any must be initialed & stamped by the bidder.
- We/I read the standard bidding Documents (Volume n-I) and available DCM Korangi and agreed to abide all of them and also provide all these documents with our signatures as & when directed.

**For Office Use of DMC
Korangi**

Verified BOQ by:



A.E.E (N&E) D.M.C. Korangi
Signature with Stamp

Signature of the contractor with stamp

Address: _____



1

111

OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

NO: EE/M&E/DMC/K/ /2015

Dated: - _____

Tender Reference No. _____ Dated : _____

DATE OF OPENING: _____

VOLUME-II BILL OF QUANTITIES
(SINGLE STAGE ONE ENVELOPE METHOD)

**R/M of Street Lights Installed at Different Areas of Shah Faisal Zone,
DMC Korangi.**

PC Cost: - Rs, 14, 17,500 + Open Rate

Bid Security: - Rs, 28,350.00 + 02% of Quoted Bid.

Tender Cost: - Rs, 2,500.00

NOTE:

- 1) This Document contains 03 pages including this page
- 2) The Standard Terms & Condition of Bidding Documents
(Volume-I) available in the office & website of DMC Korangi

Executive Engineer (M&E),
District Municipal Corporation
Korangi Karachi.

Issue to M/S. _____ P.No. _____

Dated: _____ Bank: _____ Branch: _____

Signature & Stamp of Issuing Authority.



OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

NAME OF WORK: R/M of Street Lights Installed at Different Areas of Shah Faisal Zone, DMC Korangi.

Tender Reference: No. _____ Dated: _____

(PART "A" SCHEDULE RATE ITEMS)

S. No.	Description	Quantity	Rate	Unit	Amount
01	Providing & Fixing 125 watts (HPMV) Lamp @ the height as per site Requirement & instruction of engineer in charge.	300 Nos.	@470.00	Per No.	Rs.141,000/-
02	Providing & Fixing 125 watts (HPMV) choke @ the height as per site Requirement & instruction of engineer in charge.	250 Nos.	@1,020.00	Per No.	Rs.255,000/-
03	Providing & fixing 250 watts (SON-T) Lamp @ the height with the help of hydraulic crane as per site Requirement & instruction of engineer in charge.	150 Nos.	@2105.00	Per No.	Rs.315,750/-
04	Providing & fixing 250 watts (SON-T) chowk @ the height with the help of hydraulic crane as per site Requirement & instruction of engineer in charge.	100 Nos.	@3990.00	Per No.	Rs.399,000/-
05	Providing & Fixing 250/400 watts (SON) igniter in all respect at the height up to 40ft with the help of hydraulic crane & manual labor as per site Requirement & instruction of EI.	100 Nos.	@1202.00	Per No.	Rs.120,200/-
06	Providing & laying (MAIN or SUB MAIN) PVC insulated & PVC Sheeted with two core copper conductor 300/500 volt size 2.5mm ² .	900 Meters.	@118.00	Per Mtr.	Rs.106,200/-
07	Providing & fixing one way SP 10/15amp switch surface type.	400 Nos.	@58.00	Per No.	Rs.23,200/-
08	Providing & Fixing Acrylic Cover 125 watts Light @ the height as per site Requirement & instruction of engineer in charge.	100 Nos.	@470/-	Per No.	Rs.47,000/-

Continue on next page.....

S. No.	Description	Quantity	Rate	Unit	Amount
09	Providing & Fixing Holder 125 watts Light @ the height as per site Requirement & instruction of engineer in charge.	50 Nos.	@203/-	Per No.	Rs.10,150/-

Rs.14,17,500/-

(PART "B" OPEN RATE ITEMS)

S. No.	Description	Quantity	Rate	Unit	Amount
10	Providing & Fixing Moon Light with Lamp 125watt and Ballast 125 watt @ height as per site Requirement & instruction of engineer in charge.	100 Nos.	@	Per No.	Rs.

Rs. _____

(SUMMARY OF BILL OF QUANTITIES)

I/We hereby quoted as follows:

		<u>In Figure</u>	<u>In Words</u>
01	Part .A (item based on S/R) % Below / Above	Rs.	
02	Part .B (item based on O/R)	Rs.	
Grand Total (A+B)		Rs.	

The Total amount is Rs. _____ Rupees (_____)

for the complete job for all schedule of rate & offer rates (which ever is included in the BOQ)

I/We have attached a Bid Security amounting to Rs. _____/- as per NIT is shape of pay

order bearing No. _____ dated _____ issued from _____.

(Bank)

Time Limit : 30 Calendar Days

Penalty Per Day: Rs. 1500/- per day (Max.10% of Sanctioned Cost)


Validity : 90+30 Days as per SPP Rules 2010

NOTE:

- Tender must be quoted in figure & in words both otherwise liable to be cancelled.
- All over writing & correction if any must be initialed & stamped by the bidder.
- We/I read the standard bidding Documents (Volume n-1) and available DCM Korangi and agreed to abide all of them and also provide all these documents with our signatures as & when directed.

**For Office Use of DMC
Korangi**

Verified BOQ by:



A.E.E (M&E) D.M.C. Korangi
Signature with Stamp

Signature of the contractor with stamp

Address: _____



1
112

OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

NO: EE/M&E/DMC/K/ /2015

Dated: - _____

Tender Reference No. _____ Dated: _____

DATE OF OPENING: _____

VOLUME-II BILL OF QUANTITIES
(SINGLE STAGE ONE ENVELOPE METHOD)

**R/M & Engine Overhauling of Vehicle No: CH-00929 (APK-02) of
Korangi Zone DMC Korangi.**

PC Cost: - Open Rate

Bid Security: - 02% of Quoted Bid.

Tender Cost: - Rs, 1,500.00

NOTE:

- 1) This Document contains 05 pages including this page
- 2) The Standard Terms & Condition of Bidding Documents
(Volume-I) available in the office & website of DMC Korangi

Executive Engineer (M&E),
District Municipal Corporation
Korangi Karachi.

Issue to M/S. _____ P.No. _____

Dated: _____ Bank: _____ Branch: _____

Signature & Stamp of Issuing Authority.



1
112

OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

NO: EE/M&E/DMC/K/ /2015

Dated: - _____

Tender Reference No. _____ Dated: _____

DATE OF OPENING: _____

VOLUME-II BILL OF QUANTITIES
(SINGLE STAGE ONE ENVELOPE METHOD)

**R/M & Engine Overhauling of Vehicle No: CH-00929 (APK-02) of
Korangi Zone DMC Korangi.**

PC Cost: - Open Rate

Bid Security: - 02% of Quoted Bid.

Tender Cost: - Rs, 1,500.00

NOTE:

- 1) This Document contains 05 pages including this page
- 2) The Standard Terms & Condition of Bidding Documents (Volume-I) available in the office & website of DMC Korangi

**Executive Engineer (M&E),
District Municipal Corporation
Korangi Karachi.**

Issue to M/S. _____ P.No. _____

Dated: _____ Bank: _____ Branch: _____

Signature & Stamp of Issuing Authority.



OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

NAME OF WORK: R/M & Engine Overhauling of Vehicle No: CH-00929 (APK-02) of Korangi Zone DMC Korangi.

Tender Reference: No. _____ **Dated:** _____

(OPEN RATE ITEMS)

S. No.	Description	Quantity	Rate	Unit	Amount
01	Dismantling the complete Engine Assemblies to carry out the repairing / overhauling work. which Includes the cost of lath machine work i.e. facing, polishing work of head piece, including dismantling the valve, valve seats, valve guides, Sleeves Set and Replacing the same with provided (inlet / exhaust) valve, valve seats, valve guides including polishing and fitting of main and big-end piece of block object and reassembling the same. The job also includes the cost of labour, cotton, Engine oil and kerosene oil and greasing etc as required, complete in all respect.	01 Job.	@	Per No.	Rs.
02	Engine overhauling work to be completed with repairing / replacing of following engine parts and components complete in all respect:- i. P/F complete Liner Kit / block Sleeves for 04 Cylinder Engine with new piston, Piston pins, Ring set and Piston Locks etc. 01 Kit. ii. P/F Connecting rods. 04 Nos. iii. P/F connecting Rod Bushes. 04 Nos. iv. P/F Main end Begin Piece. 04 Sets. v. P/F Thrust collars. 04 Nos. vi. P/F Cam set including cam bushes. 01set. vii. P/F Oil pump 01 No. viii. P/F water Pump 01 No. ix. P/F valves with seats and guides. 08 Nos. x. P/F Full packing Kit. xi. P/F all other required bushes and bearings as required. xii. P/F all other required Nut-bolts pertains to engine fittings.	01 Job.	@	Per No.	Rs.
03	Repair / Maintenance of Fuel Injection Pump by means dismantling, servicing / replacing / repairing plungers, injectors, injector nozzles, delivery valves, spacers, springs, bearings and other parts as required and refitting the same. The work includes the cost of replacing pump seal kit and pump packing kit as required.	01 Job.	@	Per No.	Rs.
04	Repair / Maintenance of existing electric circuits by means of re-establishing of open electric circuits with replacing of worn out wires, relays and fuses as required. The work includes the cost of replacing indicator light bulbs and rear light bulbs etc as required	01 Job.	@	Per No.	Rs.

Continue on next page.....

S. No.	Description	Quantity	Rate	Unit	Amount
05	Wheel Servicing / Brake repairing of both side 04 wheels by means of dismantling wheel drums, replacing Cylinder pistons, cylinder kits, brake shoe and worn down bearings etc and refitting the same. The work includes the cost of labor, grease, cotton, kerosene oil, and refilling the brake fluid with adjusting and bleeding of brake lining and replacing of master cylinder kit complete in all respect.	01 Job.	@	Per No.	Rs.
06	Dismantling/ repairing and refitting of clutch portion with replacing / repairing of following parts as required. i. P/F Clutch plate. 01 No ii. P/F Pressure Plate 01 No. iii. Facing of fly wheel. 01 No. iv. P/F Thrust bearing. 01 No.	01 Job.	@	Per No.	Rs.
	Repair / Maintenance of both Sides 04 Springs Leaf sets, with repairing / replacing of following parts and components and refitting the same as required. i. Replacement Broken Spring Leafs. ii. Replacement of Leaf Bracts. iii. Replacement of Center Bolts. iv. Replacement of U-Clamps. v. Replacement of Leaf Bushes. vi. Replacement of Center Pin / Leaf Pin.	01 Job.	@	Per No.	Rs.
08	P/F 130Amp Battery with Battery Terminals as required.	02 Nos.	@	Per No.	Rs.
09	Denting / Shaping / refurbishing of Driver's Cabin to be completed as per following specifications complete in all respect: - i) Removing dents from all panels of body surface in actual shape. The work includes the cost of Welding / Grinding and replacing of rusty MS Panels from the damaged portions such as, door panels, roof top, front & rear portions as per instructions of EI. 01 Job. ii) Replacing Door Locks. 02 Nos. iii) Replacing Door Window Glasses (L/R) 02 Nos. iv) Repairing / Replacing of Seats with new covers. 01 Job. v) Replacing of door seal rubbers L/R 02 Nos vi) Replacing of Floor Rubber Sheet. 01 No. vii) Finishing / Painting work with filling material with leveling of dented portions, undercoating, and two coats best quality japani paint in white color. The work includes the cost of rubbing polish work complete in all respect. 01 Job.	01 Job.	@	Per No.	Rs.

Continue on next page.....

S.No.	Description	Quantity	Rate	Unit	Amount
10	<p>R/M Complete Cargo Body (Dump Truck Body) on the Given Isuzu FTR Truck with the following specifications and components complete in all respect, as per instructions of Engineer Incharge.</p> <p>i) Repairing of Longitude Rafter of 4.5 mm Rolled Channels. 02 Nos. All Cross members should be in 4.5mm Rolled Channel. 01 Job</p> <p>ii) Repairing of Cargo Body (Dump Truck Body) supported with U-shape stiffeners in 3.25mm² MS Sheet having size 16'X4.5'X3' with sub-frame, side panels, Front Panels, floor sheet and cab protector the floor sheet must be in 5mm² thickness as required. Complete in all respect. 01 Job</p> <p>iii) M/P/MS Mudguards on rear wheels in 16SWG MS Sheet as required. 01 Job</p> <p>iv) R/M PTO Pump / Tipping Gear Kit with replacing of plungers / pistons and complete repair kit, packing kit and refitting same as required. 01 Job</p> <p>v) R/M of Hydraulic lift cylinder assembly by means replacing of complete seal kit, 'O' rings and refitting the same. 01 Job</p> <p>vi) Finishing the body with best quality rust preventive paint i.e. 02 coats of Red Oxide and 02 Coats Air drying Spray painting in yellow color. The job includes the cost of necessary undercoat as required. 01 Job.</p> <p>vii) Identification marking i.e. writing of District Municipal Corporation Korangi, Korangi Zone in English and Urdu wordings on both side body and Driver's cabin portion as required. 01 Job.</p>	01 Job.	@	Per No.	Rs.

Rs. _____

Continue on next page.....



OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

(SUMMARY OF BILL OF QUANTITIES)

I/We hereby quoted as follows:

		<u>In Figure</u>	<u>In Words</u>
01	Part .A (item based on S/R) % Below / Above	Rs.	
02	Part .B (item based on O/R)	Rs.	
Grand Total (A+B)		Rs.	

The Total amount is Rs. _____ Rupees (_____)

for the complete job for all schedule of rate & offer rates (which ever is included in the BOQ)

I/We have attached a Bid Security amounting to Rs. _____/- as per NIT in shape of pay order bearing No. _____ dated _____ issued from _____.

(Bank)

Time Limit : 30 Calendar Days

Penalty Per Day: Rs. 1500/- per day (Max.10% of Sanctioned Cost)

Validity : 90+30 Days as per SPP Rules 2010

NOTE:

- Tender must be quoted in figure & in words both otherwise liable to be cancelled.
- All over writing & correction if any must be initialed & stamped by the bidder.
- We/I read the standard bidding Documents (Volume n-1) and available DCM Korangi and agreed to abide all of them and also provide all these documents with our signatures as & when directed.

For Office Use of DMC
Korangi

Verified BOQ by:

A.E.E (M &E) D.M.C. Korangi
Signature with Stamp

Signature of the contractor with stamp

Address: _____



1

113

OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

NO: EE/M&E/DMC/K/ /2015

Dated: - _____.

Tender Reference No. _____ Dated: _____

DATE OF OPENING: _____

VOLUME-II BILL OF QUANTITIES
(SINGLE STAGE ONE ENVELOPE METHOD)

R/M & Engine Overhauling of Vehicle No: CH-3601386 (APK-04)
of Korangi Zone DMC Korangi.

PC Cost: - Open Rate

Bid Security: - 02% of Quoted Bid.

Tender Cost: - Rs, 1,500.00

NOTE:

- 1) This Document contains 05 pages including this page
- 2) The Standard Terms & Condition of Bidding Documents
(Volume-I) available in the office & website of DMC Korangi

Executive Engineer (M&E),
District Municipal Corporation
Korangi Karachi.

Issue to M/S. _____ P.No. _____

Dated: _____ Bank: _____ Branch: _____

Signature & Stamp of Issuing Authority.



OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

NAME OF WORK: R/M & Engine Overhauling of Vehicle No: CH-3601386 (APK-04) of Korangi Zone DMC Korangi.

Tender Reference: No. _____

Dated: _____

(OPEN RATE ITEMS)

S. No.	Description	Quantity	Rate	Unit	Amount
01	Dismantling the complete Engine Assemblies to carry out the repairing / overhauling work. which Includes the cost of lath machine work i.e. facing, polishing work of head piece, including dismantling the valve, valve seats, valve guides, Sleeves Set and Replacing the same with provided (inlet / exhaust) valve, valve seats, valve guides including polishing and fitting of main and big-end piece of block object and reassembling the same. The job also includes the cost of labour, cotton, Engine oil and kerosene oil and greasing etc as required, complete in all respect.	01 Job.	@	Per No.	Rs.
02	Engine overhauling work to be completed with repairing / replacing of following engine parts and components complete in all respect:- i. P/F complete Liner Kit / block Sleeves for 04 Cylinder Engine with new piston, Piston pins, Ring set and Piston Locks etc. 01 Kit. ii. P/F Connecting rods. 04 Nos. iii. P/F connecting Rod Bushes. 04 Nos. iv. P/F Main end Begin Piece. 04 Sets. v. P/F Thrust collars. 04 Nos. vi. P/F Cam set including cam bushes. 01set. vii. P/F Oil pump 01 No. viii. P/F water Pump 01 No. ix. P/F valves with seats and guides. 08 Nos. x. P/F Full packing Kit. xi. P/F all other required bushes and bearings as required. xii. P/F all other required Nut-bolts pertains to engine fittings.	01 Job.	@	Per No.	Rs.
03	Repair / Maintenance of Fuel Injection Pump by means dismantling, servicing / replacing / repairing plungers, injectors, injector nozzles, delivery valves, spacers, springs, bearings and other parts as required and refitting the same. The work includes the cost of replacing pump seal kit and pump packing kit as required.	01 Job.	@	Per No.	Rs.
04	Repair / Maintenance of existing electric circuits by means of re-establishing of open electric circuits with replacing of worn out wires, relays and fuses as required. The work includes the cost of replacing indicator light bulbs and rear light bulbs etc as required	01 Job.	@	Per No.	Rs.

Continue on next page.....

S. No.	Description	Quantity	Rate	Unit	Amount
05	Wheel Servicing / Brake repairing of both side 04 wheels by means of dismantling wheel drums, replacing Cylinder pistons, cylinder kits, brake shoe and worn down bearings etc and refitting the same. The work includes the cost of labor, grease, cotton, kerosene oil, and refilling the brake fluid with adjusting and bleeding of brake lining and replacing of master cylinder kit complete in all respect.	01 Job.	@	Per No.	Rs.
06	Dismantling/ repairing and refitting of clutch portion with replacing / repairing of following parts as required. i. P/F Clutch plate. 01 No ii. P/F Pressure Plate 01 No. iii. Facing of fly wheel. 01 No. iv. P/F Thrust bearing. 01 No.	01 Job.	@	Per No.	Rs.
	Repair / Maintenance of both Sides 04 Springs Leaf sets, with repairing / replacing of following parts and components and refitting the same as required. i. Replacement Broken Spring Leafs. ii. Replacement of Leaf Bracts. iii. Replacement of Center Bolts. iv. Replacement of U-Clamps. v. Replacement of Leaf Bushes. vi. Replacement of Center Pin / Leaf Pin.	01 Job.	@	Per No.	Rs.
08	P/F 130Amp Battery with Battery Terminals as required.	02 Nos.	@	Per No.	Rs.
09	Denting / Shaping / refurbishing of Driver's Cabin to be completed as per following specifications complete in all respect: - i) Removing dents from all panels of body surface in actual shape. The work includes the cost of Welding / Grinding and replacing of rusty MS Panels from the damaged portions such as, door panels, roof top, front & rear portions as per instructions of EI. 01 Job. ii) Replacing Door Locks. 02 Nos. iii) Replacing Door Window Glasses (L/R) 02 Nos. iv) Repairing / Replacing of Seats with new covers. 01 Job. v) Replacing of door seal rubbers L/R 02 Nos vi) Replacing of Floor Rubber Sheet. 01 No. vii) Finishing / Painting work with filling material with leveling of dented portions, undercoating, and two coats best quality japani paint in white color. The work includes the cost of rubbing polish work complete in all respect. 01 Job.	01 Job.	@	Per No.	Rs.

Continue on next page.....

S.No.	Description	Quantity	Rate	Unit	Amount
10	<p>R/M Complete Cargo Body (Dump Truck Body) on the Given Isuzu FTR Truck with the following specifications and components complete in all respect, as per instructions of Engineer Incharge.</p> <p>i) Repairing of Longitude Rafter of 4.5 mm Rolled Channels. 02 Nos. All Cross members should be in 4.5mm Rolled Channel. 01 Job</p> <p>ii) Repairing of Cargo Body (Dump Truck Body) supported with U-shape stiffeners in 3.25mm² MS Sheet having size 16'X4.5'X3' with sub-frame, side panels, Front Panels, floor sheet and cab protector the floor sheet must be in 5mm² thickness as required. Complete in all respect. 01 Job</p> <p>iii) M/P/MS Mudguards on rear wheels in 16SWG MS Sheet as required. 01 Job</p> <p>iv) R/M PTO Pump / Tipping Gear Kit with replacing of plungers / pistons and complete repair kit, packing kit and refitting same as required. 01 Job</p> <p>v) R/M of Hydraulic lift cylinder assembly by means replacing of complete seal kit, 'O' rings and refitting the same. 01 Job</p> <p>vi) Finishing the body with best quality rust preventive paint i.e. 02 coats of Red Oxide and 02 Coats Air drying Spray painting in yellow color. The job includes the cost of necessary undercoat as required. 01 Job.</p> <p>vii) Identification marking i.e. writing of District Municipal Corporation Korangi, Korangi Zone in English and Urdu wordings on both side body and Driver's cabin portion as required. 01 Job.</p>	01 Job.	@	Per No.	Rs.

Rs. _____

Continue on next page.....



OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

(SUMMARY OF BILL OF QUANTITIES)

I/We hereby quoted as follows:

		<u>In Figure</u>	<u>In Words</u>
01	Part .A (item based on S/R) % Below / Above	Rs.	
02	Part .B (item based on O/R)	Rs.	
Grand Total (A+B)		Rs.	

The Total amount is Rs. _____ Rupees (_____)

for the complete job for all schedule of rate & offer rates (which ever is included in the BOQ)

I/We have attached a Bid Security amounting to Rs. _____/- as per NIT in shape of pay order bearing No. _____ dated _____ issued from _____.

(Bank)

Time Limit : 30 Calendar Days

Penalty Per Day: Rs. 1500/- per day (Max.10% of Sanctioned Cost)

Validity : 90+30 Days as per SPP Rules 2010

NOTE:

- Tender must be quoted in figure & in words both otherwise liable to be cancelled.
- All over writing & correction if any must be initialed & stamped by the bidder.
- We/I read the standard bidding Documents (Volume n-I) and available DCM Korangi and agreed to abide all of them and also provide all these documents with our signatures as & when directed.

For Office Use of DMC
Korangi

Verified BOQ by:

A.E.E (M &E) D.M.C. Korangi
 Signature with Stamp

Signature of the contractor with stamp

Address: _____



1

114

OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

NO: EE/M&E/DMC/K/ /2015

Dated: - _____

Tender Reference No. _____ Dated : _____

DATE OF OPENING: _____

VOLUME-II BILL OF QUANTITIES
(SINGLE STAGE ONE ENVELOPE METHOD)

R/M & Engine Overhauling of Vehicle No: CH-3601395 (APK-05)
of Korangi Zone DMC Korangi.

PC Cost: - Open Rate

Bid Security: - 02% of Quoted Bid.

Tender Cost: - Rs, 1,500.00

NOTE:

- 1) This Document contains 05 pages including this page
- 2) The Standard Terms & Condition of Bidding Documents (Volume-I) available in the office & website of DMC Korangi

Executive Engineer (M&E),
District Municipal Corporation
Korangi Karachi.

Issue to M/S. _____ P.No. _____

Dated: _____ Bank: _____ Branch: _____

Signature & Stamp of Issuing Authority.



OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

NAME OF WORK: R/M & Engine Overhauling of Vehicle No: CH-3601395 (APK-05) of Korangi Zone DMC Korangi.

Tender Reference: No. _____ **Dated:** _____

(OPEN RATE ITEMS)

S. No.	Description	Quantity	Rate	Unit	Amount
01	Dismantling the complete Engine Assemblies to carry out the repairing / overhauling work. which Includes the cost of lath machine work i.e. facing, polishing work of head piece, including dismantling the valve, valve seats, valve guides, Sleeves Set and Replacing the same with provided (inlet / exhaust) valve, valve seats, valve guides including polishing and fitting of main and big-end piece of block object and reassembling the same. The job also includes the cost of labour, cotton, Engine oil and kerosene oil and greasing etc as required, complete in all respect.	01 Job.	@	Per No.	Rs.
02	Engine overhauling work to be completed with repairing / replacing of following engine parts and components complete in all respect:- i. P/F complete Liner Kit / block Sleeves for 04 Cylinder Engine with new piston, Piston pins, Ring set and Piston Locks etc. 01 Kit. ii. P/F Connecting rods. 04 Nos. iii. P/F connecting Rod Bushes. 04 Nos. iv. P/F Main end Begin Piece. 04 Sets. v. P/F Thrust collars. 04 Nos. vi. P/F Cam set including cam bushes. 01set. vii. P/F Oil pump 01 No. viii. P/F water Pump 01 No. ix. P/F valves with seats and guides. 08 Nos. x. P/F Full packing Kit. xi. P/F all other required bushes and bearings as required. xii. P/F all other required Nut-bolts pertains to engine fittings.	01 Job.	@	Per No.	Rs.
03	Repair / Maintenance of Fuel Injection Pump by means dismantling, servicing / replacing / repairing plungers, injectors, injector nozzles, delivery valves, spacers, springs, bearings and other parts as required and refitting the same. The work includes the cost of replacing pump seal kit and pump packing kit as required.	01 Job.	@	Per No.	Rs.
04	Repair / Maintenance of existing electric circuits by means of re-establishing of open electric circuits with replacing of worn out wires, relays and fuses as required. The work includes the cost of replacing indicator light bulbs and rear light bulbs etc as required.	01 Job.	@	Per No.	Rs.

Continue on next page.....

S. No.	Description	Quantity	Rate	Unit	Amount
05	Wheel Servicing / Brake repairing of both side 04 wheels by means of dismantling wheel drums, replacing Cylinder pistons, cylinder kits, brake shoe and worn down bearings etc and refitting the same. The work includes the cost of labor, grease, cotton, kerosene oil, and refilling the brake fluid with adjusting and bleeding of brake lining and replacing of master cylinder kit complete in all respect.	01 Job.	@	Per No.	Rs.
06	Dismantling/ repairing and refitting of clutch portion with replacing / repairing of following parts as required. i. P/F Clutch plate. 01 No ii. P/F Pressure Plate 01 No. iii. Facing of fly wheel. 01 No. iv. P/F Thrust bearing. 01 No.	01 Job.	@	Per No.	Rs.
07	Repair / Maintenance of both Sides 04 Springs Leaf sets, with repairing / replacing of following parts and components and refitting the same as required. i. Replacement Broken Spring Leafs. ii. Replacement of Leaf Bracts. iii. Replacement of Center Bolts. iv. Replacement of U-Clamps. v. Replacement of Leaf Bushes. vi. Replacement of Center Pin / Leaf Pin.	01 Job.	@	Per No.	Rs.
08	P/F 130Amp Battery with Battery Terminals as required.	02 Nos.	@	Per No.	Rs.
09	Denting / Shaping / refurbishing of Driver's Cabin to be completed as per following specifications complete in all respect: - i) Removing dents from all panels of body surface in actual shape. The work includes the cost of Welding / Grinding and replacing of rusty MS Panels from the damaged portions such as, door panels, roof top, front & rear portions as per instructions of EI. 01 Job. ii) Replacing Door Locks. 02 Nos. iii) Replacing Door Window Glasses (L/R) 02 Nos. iv) Repairing / Replacing of Seats with new covers. 01 Job. v) Replacing of door seal rubbers L/R 02 Nos vi) Replacing of Floor Rubber Sheet. 01 No. vii) Finishing / Painting work with filling material with leveling of dented portions, undercoating, and two coats best quality japani paint in white color. The work includes the cost of rubbing polish work complete in all respect. 01 Job.	01 Job.	@	Per No.	Rs.

Continue on next page.....

S.No.	Description	Quantity	Rate	Unit	Amount
10	<p>R/M Complete Cargo Body (Dump Truck Body) on the Given Isuzu FTR Truck with the following specifications and components complete in all respect, as per instructions of Engineer Incharge.</p> <p>i) Repairing of Longitude Rafter of 4.5 mm Rolled Channels. 02 Nos. All Cross members should be in 4.5mm Rolled Channel. 01 Job</p> <p>ii) Repairing of Cargo Body (Dump Truck Body) supported with U-shape stiffeners in 3.25mm² MS Sheer having size 16'X4.5'X3' with sub-frame, side panels, Front Panels, floor sheet and cab protector the floor sheet must be in 5mm² thickness as required. Complete in all respect. 01 Job</p> <p>iii) M/P/F Mudguards on rear wheels in 16SWG MS Sheer as required.01 Job</p> <p>iv) R/M PTO Pump / Tipping Gear Kit with replacing of plungers / pistons and complete repair kit, packing kit and refitting same as required. 01 Job</p> <p>v) R/M of Hydraulic lift cylinder assembly by means replacing of complete seal kit, 'O' rings and refitting the same. 01 Job</p> <p>vi) Finishing the body with best quality rust preventive paint i.e. 02 coats of Red Oxide and 02 Coats Air drying Spray painting in yellow color. The job includes the cost of necessary undercoat as required. 01 Job.</p> <p>vii) Identification marking i.e. writing of District Municipal Corporation Korangi, Korangi Zone in English and Urdu wordings on both side body and Driver's cabin portion as required. 01 Job.</p>	01 Job.	@	Per No.	Rs.

Rs. _____

Continue on next page.....



OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

(SUMMARY OF BILL OF QUANTITIES)

I/We hereby quoted as follows:		<u>In Figure</u>	<u>In Words</u>
01	Part .A (item based on S/R) % Below / Above	Rs.	
02	Part .B (item based on O/R)	Rs.	
Grand Total (A+B)		Rs.	

The Total amount is Rs. _____ Rupees (_____)

for the complete job for all schedule of rate & offer rates (which ever is included in the BOQ)

I/We have attached a Bid Security amounting to Rs. _____/- as per NIT is shape of pay

order bearing No. _____ dated _____ issued from _____
 (Bank)

Time Limit : 30 Calendar Days
Validity : 90+30 Days as per SPP Rules 2010

Penalty Per Day: Rs. 1500/- per day (Max.10% of Sanctioned Cost)

NOTE:

- Tender must be quoted in figure & in words both otherwise liable to be cancelled.
- All over writing & correction if any must be initialed & stamped by the bidder.
- We/I read the standard bidding Documents (Volume n-l) and available DCM Korangi and agreed to abide all of them and also provide all these documents with our signatures as & when directed.

For Office Use of DMC
Korangi

Verified BOQ by:

A.E.E (M&E) D.M.C. Korangi
 Signature with Stamp

Signature of the contractor with stamp

Address: _____



1
115

OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

NO: EE/M&E/DMC/K/ /2015

Dated: - _____

Tender Reference No. _____ Dated: _____

DATE OF OPENING: _____

VOLUME-II BILL OF QUANTITIES
(SINGLE STAGE ONE ENVELOPE METHOD)

R/M & Engine Overhauling of Vehicle No: CH-3601396 (APK-07)
of Korangi Zone DMC Korangi.

PC Cost: - Open Rate

Bid Security: - 02% of Quoted Bid.

Tender Cost: - Rs, 1,500.00

NOTE:

- 1) This Document contains 05 pages including this page
- 2) The Standard Terms & Condition of Bidding Documents (Volume-I) available in the office & website of DMC Korangi

Executive Engineer (M&E),
District Municipal Corporation
Korangi Karachi.

Issue to M/S. _____ P.No. _____

Dated: _____ Bank: _____ Branch: _____

Signature & Stamp of Issuing Authority.



OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

NAME OF WORK: R/M & Engine Overhauling of Vehicle No: CH-3601396 (APK-07)
of Korangi Zone DMC Korangi.

Tender Reference: No. _____ **Dated:** _____

(OPEN RATE ITEMS)

S. No.	Description	Quantity	Rate	Unit	Amount
01	Dismantling the complete Engine Assemblies to carry out the repairing / overhauling work. which Includes the cost of lath machine work i.e. facing, polishing work of head piece, including dismantling the valve, valve seats, valve guides, Sleeves Set and Replacing the same with provided (inlet / exhaust) valve, valve seats, valve guides including polishing and fitting of main and big-end piece of block object and reassembling the same. The job also includes the cost of labour, cotton, Engine oil and kerosene oil and greasing etc as required, complete in all respect.	01 Job.	@	Per No.	Rs.
02	Engine overhauling work to be completed with repairing / replacing of following engine parts and components complete in all respect:- i. P/F complete Liner Kit / block Sleeves for 04 Cylinder Engine with new piston, Piston pins, Ring set and Piston Locks etc. 01 Kit. ii. P/F Connecting rods. 04 Nos. iii. P/F connecting Rod Bushes. 04 Nos. iv. P/F Main end Begin Piece. 04 Sets. v. P/F Thrust collars. 04 Nos. vi. P/F Cam set including cam bushes. 01set. vii. P/F Oil pump 01 No. viii. P/F water Pump 01 No. ix. P/F valves with seats and guides. 08 Nos. x. P/F Full packing Kit. xi. P/F all other required bushes and bearings as required. xii. P/F all other required Nut-bolts pertains to engine fittings.	01 Job.	@	Per No.	Rs.
03	Repair / Maintenance of Fuel Injection Pump by means dismantling, servicing / replacing / repairing plungers, injectors, injector nozzles, delivery valves, spacers, springs, bearings and other parts as required and refitting the same. The work includes the cost of replacing pump seal kit and pump packing kit as required.	01 Job.	@	Per No.	Rs.
04	Repair / Maintenance of existing electric circuits by means of re-establishing of open electric circuits with replacing of worn out wires, relays and fuses as required. The work includes the cost of replacing indicator light bulbs and rear light bulbs etc as required	01 Job.	@	Per No.	Rs.

Continue on next page.....

S. No.	Description	Quantity	Rate	Unit	Amount
05	Wheel Servicing / Brake repairing of both side 04 wheels by means of dismantling wheel drums, replacing Cylinder pistons, cylinder kits, brake shoe and worn down bearings etc and refitting the same. The work includes the cost of labor, grease, cotton, kerosene oil, and refilling the brake fluid with adjusting and bleeding of brake lining and replacing of master cylinder kit complete in all respect.	01 Job.	@	Per No.	Rs.
06	Dismantling/ repairing and refitting of clutch portion with replacing / repairing of following parts as required. i. P/F Clutch plate. 01 No ii. P/F Pressure Plate 01 No. iii. Facing of fly wheel. 01 No. iv. P/F Thrust bearing. 01 No.	01 Job.	@	Per No.	Rs.
07	Repair / Maintenance of both Sides 04 Springs Leaf sets, with repairing / replacing of following parts and components and refitting the same as required. i. Replacement Broken Spring Leafs. ii. Replacement of Leaf Bracts. iii. Replacement of Center Bolts. iv. Replacement of U-Clamps. v. Replacement of Leaf Bushes. vi. Replacement of Center Pin / Leaf Pin.	01 Job.	@	Per No.	Rs.
08	P/F 130Amp Battery with Battery Terminals as required.	02 Nos.	@	Per No.	Rs.
09	Denting / Shaping / refurbishing of Driver's Cabin to be completed as per following specifications complete in all respect: - i) Removing dents from all panels of body surface in actual shape. The work includes the cost of Welding / Grinding and replacing of rusty MS Panels from the damaged portions such as, door panels, roof top, front & rear portions as per instructions of EI. 01 Job. ii) Replacing Door Locks. 02 Nos. iii) Replacing Door Window Glasses (L/R) 02 Nos. iv) Repairing / Replacing of Seats with new covers. 01 Job. v) Replacing of door seal rubbers L/R 02 Nos vi) Replacing of Floor Rubber Sheet. 01 No. vii) Finishing / Painting work with filling material with leveling of dented portions, undercoating, and two coats best quality japani paint in white color. The work includes the cost of rubbing polish work complete in all respect. 01 Job.	01 Job.	@	Per No.	Rs.

Continue on next page.....

S.No.	Description	Quantity	Rate	Unit	Amount
10	<p>R/M Complete Cargo Body (Dump Truck Body) on the Given Isuzu FTR Truck with the following specifications and components complete in all respect, as per instructions of Engineer Incharge.</p> <p>i) Repairing of Longitude Rafter of 4.5 mm Rolled Char nels. 02 Nos. All Cross members should be in 4.5mm Rolled Channel. 01 Job</p> <p>ii) Repairing of Cargo Body (Dump Truck Body) supported with U-shape stiffeners in 3.25mm² MS Shee: having size 16'X4.5'X3' with sub-frame, side pane s, Front Panels, floor sheet and cab protector the floor sheet must be in 5mm² thickness as required. Complete in all respect. 01 Job</p> <p>iii) M/P/F Mudguards on rear wheels in 16SWG MS Shee: as required.01 Job</p> <p>iv) R/M PTO Pump / Tipping Gear Kit with replacing of plungers / pistons and complete repair kit, packing kit and refitting same as required. 01 Job</p> <p>v) R/M of Hydraulic lift cylinder assembly by means replacing of complete seal kit, 'O' rings and refitting the same. 01 Job</p> <p>vi) Finishing the body with best quality rust preventive paint i.e. 02 coats of Red Oxide and 02 Coats Air dying Spray painting in yellow color. The job includes the cost of necessary undercoat as required. 01 Job.</p> <p>vii) Identification marking i.e. writing of District Municipal Corporation Korangi, Korangi Zone in English and Urdu wordings on both side body and Driver's cabin portion as required. 01 Job.</p>	01 Job.	@	Per No.	Rs.

Rs. _____

Continue on next page.....



OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

(SUMMARY OF BILL OF QUANTITIES)

I/We hereby quoted as follows:

		<u>In Figure</u>	<u>In Words</u>
01	Part .A. (item based on S/R) % Below / Above	Rs.	
02	Part .E (item based on O/R)	Rs.	
Grand Total (A+B)		Rs.	

The Total amount is Rs. _____ Rupees (_____)

for the complete job for all schedule of rate & offer rates (which ever is included in the BOQ)

I/We have attached a Bid Security amounting to Rs. _____/- as per NIT in shape of pay order bearing No. _____ dated _____ issued from _____.

(Bank)

Time Limit : 30 Calendar Days

Penalty Per Day: Rs. 1500/- per day (Max.10% of Sanctioned Cost)

Validity : 90+30 Days as per SPP Rules 2010

NOTE:

- Tender must be quoted in figure & in words both otherwise liable to be cancelled.
- All over writing & correction if any must be initialed & stamped by the bidder.
- We/I read the standard bidding Documents (Volume n-1) and available DCM Korangi and agreed to abide all of them and also provide all these documents with our signatures as & when directed.

For Office Use of DMC
Korangi

Verified BOQ by:

A.E.E (M&E) D.M.C. Korangi
Signature with Stamp

Signature of the contractor with stamp

Address: _____



1
116

OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

NO: EE/M&E/DMC/K/ /2015

Dated: - _____

Tender Reference No. _____ Dated: _____

DATE OF OPENING: _____

VOLUME-II BILL OF QUANTITIES
(SINGLE STAGE ONE ENVELOPE METHOD)

**R/M & Engine Overhauling of Vehicle No: CH-11399 (APK-09) of
Korangi Zone DMC Korangi.**

PC Cost: - Open Rate

Bid Security: - 02% of Quoted Bid.

Tender Cost: - Rs, 1,500.00

NOTE:

- 1) This Document contains 05 pages including this page
- 2) The Standard Terms & Condition of Bidding Documents
(Volume-I) available in the office & website of DMC Korangi

Executive Engineer (M&E),
District Municipal Corporation
Korangi Karachi.

Issue to M/S. _____ P.No. _____

Dated: _____ Bank: _____ Branch: _____

Signature & Stamp of Issuing Authority.



OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

NAME OF WORK: R/M & Engine Overhauling of Vehicle No: CH-11399 (APK-09) of Korangi Zone DMC Korangi.

Tender Reference: No. _____ **Dated :** _____

(OPEN RATE ITEMS)

S. No.	Description	Quantity	Rate	Unit	Amount
01	Dismantling the complete Engine Assemblies to carry out the repairing / overhauling work. which Includes: the cost of lath machine work i.e. facing, polishing work of head piece, including dismantling the valve, valve seats, valve guides, Sleeves Set and Replacing the same with provided (inlet / exhaust) valve, valve seats, valve guides including polishing and fitting of main and big-end piece of block object and reassembling the same. The job also includes the cost of labour, cotton, Engine oil and kerosene oil and greasing etc as required, complete in all respect.	01 Job.	@	Per No.	Rs.
02	Engine overhauling work to be completed with repairing / replacing of following engine parts and components complete in all respect:- i. P/F complete Liner Kit / block Sleeves for 04 Cylinder Engine with new piston, Piston pins, Ring set and Piston Locks etc. 01 Kit. ii. P/F Connecting rods. 04 Nos. iii. P/F connecting Rod Bushes. 04 Nos. iv. P/F Main end Begin Piece. 04 Sets. v. P/F Thrust collars. 04 Nos. vi. P/F Cam set including cam bushes. 01set. vii. P/F Oil pump 01 No. viii. P/F water Pump 01 No. ix. P/F valves with seats and guides. 08 Nos. x. P/F Full packing Kit. xi. P/F all other required bushes and bearings as required. xii. P/F all other required Nut-bolts pertains to engine fittings.	01 Job.	@	Per No.	Rs.
03	Repair / Maintenance of Fuel Injection Pump by means dismantling, servicing / replacing / repairing plungers, injectors, injector nozzles, delivery valves, spacers, springs, bearings and other parts as required and refitting the same. The work includes the cost of replacing pump seal kit and pump packing kit as required.	01 Job.	@	Per No.	Rs.
04	Repair / Maintenance of existing electric circuits by means of re-establishing of open electric circuits with replacing of worn out wires, relays and fuses as required. The work includes the cost of replacing indicator light bulbs and rear light bulbs etc as required.	01 Job.	@	Per No.	Rs.

Continue on next page.....

S. No.	Description	Quantity	Rate	Unit	Amount
05	Wheel Servicing / Brake repairing of both side 04 wheels by means of dismantling wheel drums, replacing Cylinder pistons, cylinder kits, brake shoe and worn down bearings etc and refitting the same. The work includes the cost of labor, grease, cotton, kerosene oil, and refilling the brake fluid with adjusting and bleeding of brake lining and replacing of master cylinder kit complete in all respect.	01 Job.	@	Per No.	Rs.
06	Dismantling/ repairing and refitting of clutch portion with replacing / repairing of following parts as required. i. P/F Clutch plate. 01 No ii. P/F Pressure Plate 01 No. iii. Facing of fly wheel. 01 No. iv. P/F Thrust bearing. 01 No.	01 Job.	@	Per No.	Rs.
07	Repair / Maintenance of both Sides 04 Springs Leaf sets, with repairing / replacing of following parts and components and refitting the same as required. i. Replacement Broken Spring Leafs. ii. Replacement of Leaf Bracts. iii. Replacement of Center Bolts. iv. Replacement of U-Clamps. v. Replacement of Leaf Bushes. vi. Replacement of Center Pin / Leaf Pin.	01 Job.	@	Per No.	Rs.
08	P/F 130Amp Battery with Battery Terminals as required.	02 Nos.	@	Per No.	Rs.
09	Denting / Shaping / refurbishing of Driver's Cabin to be completed as per following specifications complete in all respect: - i) Removing dents from all panels of body surface in actual shape. The work includes the cost of Welding / Grinding and replacing of rusty MS Panels from the damaged portions such as, door panels, roof top, front & rear portions as per instructions of EI. 01 Job. ii) Replacing Door Locks. 02 Nos. iii) Replacing Door Window Glasses (L/R) 02 Nos. iv) Repairing / Replacing of Seats with new covers. 01 Job. v) Replacing of door seal rubbers L/R 02 Nos vi) Replacing of Floor Rubber Sheet. 01 No. vii) Finishing / Painting work with filling material with leveling of dented portions, undercoating, and two coats best quality japani paint in white color. The work includes the cost of rubbing polish work complete in all respect. 01 Job.	01 Job.	@	Per No.	Rs.

Continue on next page.....

S.No.	Description	Quantity	Rate	Unit	Amount
10	<p>R/M Complete Cargo Body (Dump Truck Body) on the Given Isuzu FTR Truck with the following specifications and components complete in all respect, as per instructions of Engineer Incharge.</p> <p>i) Repairing of Longitude Rafter of 4.5 mm Rolled Channels. 02 Nos. All Cross members should be in 4.5mm Rolled Channel. 01 Job</p> <p>ii) Repairing of Cargo Body (Dump Truck Body) supported with U-shape stiffeners in 3.25mm² MS Sheet having size 16'X4.5'X3' with sub-frame, side panels, Front Panels, floor sheet and cab protector the floor sheet must be in 5mm² thickness as required. Complete in all respect. 01 Job</p> <p>iii) M/P/F Mudguards on rear wheels in 16SWG MS Sheet as required.01 Job</p> <p>iv) R/M PTO Pump / Tipping Gear Kit with replacing of plungers / pistons and complete repair kit, packing kit and refitting same as required. 01 Job</p> <p>v) R/M of Hydraulic lift cylinder assembly by means replacing of complete seal kit, 'O' rings and refitting the same. 01 Job</p> <p>vi) Finishing the body with best quality rust preventive paint i.e. 02 coats of Red Oxide and 02 Coats Air dying Spray painting in yellow color. The job includes the cost of necessary undercoat as required. 01 Job.</p> <p>vii) Identification marking i.e. writing of District Municipal Corporation Korangi, Korangi Zone in English and Urdu wordings on both side body and Driver's cabin portion as required. 01 Job.</p>	01 Job.	@	Per No.	Rs.

Rs. _____

Continue on next page.....



OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

(SUMMARY OF BILL OF QUANTITIES)

I/We hereby quoted as follows:

		<u>In Figure</u>	<u>In Words</u>
01	Part .A (item based on S/R) % Below / Above	Rs.	
02	Part .B (item based on O/R)	Rs.	
Grand Total (A+B)		Rs.	

The Total amount is Rs. _____ Rupees (_____)

for the complete job for all schedule of rate & offer rates (which ever is included in the BOQ)

I/We have attached a Bid Security amounting to Rs. _____/- as per NIT in shape of pay

order bearing No. _____ dated _____ issued from _____.

(Bank)

Time Limit : 30 Calendar Days

Penalty Per Day: Rs. 1500/- per day (Max.10% of Sanctioned Cost)

Validity : 90+30 Days as per SPP Rules 2010

NOTE:

- Tender must be quoted in figure & in words both otherwise liable to be cancelled.
- All over writing & correction if any must be initialed & stamped by the bidder.
- We/I read the standard bidding Documents (Volume n-1) and available DCM Korangi and agreed to abide all of them and also provide all these documents with our signatures as & when directed.

For Office Use of DMC
Korangi

Verified BOQ by:

A.E.E (M&E) D.M.C. Korangi
 Signature with Stamp

Signature of the contractor with stamp

Address: _____



1
117

OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

NO: EE/M&E/DMC/K/ /2015

Dated: - _____

Tender Reference No. _____ Dated: _____

DATE OF OPENING: _____

VOLUME-II BILL OF QUANTITIES
(SINGLE STAGE ONE ENVELOPE METHOD)

**R/M & Engine Overhauling of Vehicle No: CH-11393 (APK-10) of
Korangi Zone DMC Korangi.**

PC Cost: -	Open Rate
Bid Security: -	02% of Quoted Bid.
Tender Cost: -	Rs, 1,500.00

NOTE:

- 1) This Document contains 05 pages including this page
- 2) The Standard Terms & Condition of Bidding Documents (Volume-I) available in the office & website of DMC Korangi

**Executive Engineer (M&E),
District Municipal Corporation
Korangi Karachi.**

Issue to M/S. _____ P.No. _____

Dated: _____ Bank: _____ Branch: _____

Signature & Stamp of Issuing Authority.



OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

NAME OF WORK: R/M & Engine Overhauling of Vehicle No: CH-11393 (APK-10) of Korangi Zone DMC Korangi.

Tender Reference: No. _____ **Dated:** _____

(OPEN RATE ITEMS)

S. No.	Description	Quantity	Rate	Unit	Amount
01	Dismantling the complete Engine Assemblies to carry out the repairing / overhauling work. which Includes the cost of lath machine work i.e. facing, polishing work of head piece, including dismantling the valve, valve seats, valve guides, Sleeves Set and Replacing the same with provided (inlet / exhaust) valve, valve seats, valve guides including polishing and fitting of main and big-end piece of block object and reassembling the same. The job also includes the cost of labour, cotton, Engine oil and kerosene oil and greasing etc as required, complete in all respect.	01 Job.	@	Per No.	Rs.
02	Engine overhauling work to be completed with repairing / replacing of following engine parts and components complete in all respect:- i. P/F complete Liner Kit / block Sleeves for 04 Cylinder Engine with new piston, Piston pins, Ring set and Piston Locks etc. 01 Kit. ii. P/F Connecting rods. 04 Nos. iii. P/F connecting Rod Bushes. 04 Nos. iv. P/F Main end Begin Piece. 04 Sets. v. P/F Thrust collars. 04 Nos. vi. P/F Cam set including cam bushes. 01set. vii. P/F Oil pump 01 No. viii. P/F water Pump 01 No. ix. P/F valves with seats and guides. 08 Nos. x. P/F Full packing Kit. xi. P/F all other required bushes and bearings as required. xii. P/F all other required Nut-bolts pertains to engine fittings.	01 Job.	@	Per No.	Rs.
03	Repair / Maintenance of Fuel Injection Pump by means dismantling, servicing / replacing / repairing plungers, injectors, injector nozzles, delivery valves, spacers, springs, bearings and other parts as required and refitting the same. The work includes the cost of replacing pump seal kit and pump packing kit as required.	01 Job.	@	Per No.	Rs.
04	Repair / Maintenance of existing electric circuits by means of re-establishing of open electric circuits with replacing of worn out wires, relays and fuses as required. The work includes the cost of replacing indicator light bulbs and rear light bulbs etc as required	01 Job.	@	Per No.	Rs.

Continue on next page.....

S. No.	Description	Quantity	Rate	Unit	Amount
05	Wheel Servicing / Brake repairing of both side 04 wheels by means of dismantling wheel drums, replacing Cylinder pistons, cylinder kits, brake shoe and worn down bearings etc and refitting the same. The work includes the cost of labor, grease, cotton, kerosene oil, and refilling the brake fluid with adjusting and bleeding of brake lining and replacing of master cylinder kit complete in all respect.	01 Job.	@	Per No.	Rs.
06	Dismantling/ repairing and refitting of clutch portion with replacing / repairing of following parts as required. i. P/F Clutch plate. 01 No ii. P/F Pressure Plate 01 No. iii. Facing of fly wheel. 01 No. iv. P/F Thrust bearing. 01 No.	01 Job.	@	Per No.	Rs.
07	Repair / Maintenance of both Sides 04 Springs Leaf sets, with repairing / replacing of following parts and components and refitting the same as required. i. Replacement Broken Spring Leafs. ii. Replacement of Leaf Bracts. iii. Replacement of Center Bolts. iv. Replacement of U-Clamps. v. Replacement of Leaf Bushes. vi. Replacement of Center Pin / Leaf Pin.	01 Job.	@	Per No.	Rs.
08	P/F 130Amp Battery with Battery Terminals as required.	02 Nos.	@	Per No.	Rs.
09	Denting / Shaping / refurbishing of Driver's Cabin to be completed as per following specifications complete in all respect: - i) Removing dents from all panels of body surface in actual shape. The work includes the cost of Welding / Grinding and replacing of rusty MS Panels from the damaged portions such as, door panels, roof top, front & rear portions as per instructions of EI. 01 Job. ii) Replacing Door Locks. 02 Nos. iii) Replacing Door Window Glasses (L/R) 02 Nos iv) Repairing / Replacing of Seats with new covers. 01 Job. v) Replacing of door seal rubbers L/R 02 Nos vi) Replacing of Floor Rubber Sheet. 01 No. vii) Finishing / Painting work with filling material with leveling of dented portions, undercoating, and two coats best quality japani paint in white color. The work includes the cost of rubbing polish work complete in all respect. 01 Job.	01 Job.	@	Per No.	Rs.

Continue on next page.....

S.No.	Description	Quantity	Rate	Unit	Amount
10	<p>R/M Complete Cargo Body (Dump Truck Body) on the Given Isuzu FTR Truck with the following specifications and components complete in all respect, as per instructions of Engineer Incharge.</p> <p>i) Repairing of Longitude Rafter of 4.5 mm Rolled Channels. 02 Nos. All Cross members should be in 4.5mm Rolled Channel. 01 Job</p> <p>ii) Repairing of Cargo Body (Dump Truck Body) supported with U-shape stiffeners in 3.25mm² MS Sheet having size 16'X4.5'X3' with sub-frame, side panels, Front Panels, floor sheet and cab protector the floor sheet must be in 5mm² thickness as required. Complete in all respect. 01 Job</p> <p>iii) M/P/F Mudguards on rear wheels in 16SWG MS Sheet as required. 01 Job</p> <p>iv) R/M PTO Pump / Tipping Gear Kit with replacing of plungers / pistons and complete repair kit, packing kit and refitting same as required. 01 Job</p> <p>v) R/M of Hydraulic lift cylinder assembly by means replacing of complete seal kit, 'O' rings and refitting the same. 01 Job</p> <p>vi) Finishing the body with best quality rust preventive paint i.e. 02 coats of Red Oxide and 02 Coats Air drying Spray painting in yellow color. The job includes the cost of necessary undercoat as required. 01 Job.</p> <p>vii) Identification marking i.e. writing of District Municipal Corporation Korangi, Korangi Zone in English and Urdu wordings on both side body and Driver's cabin portion as required. 01 Job.</p>	01 Job.	@	Per No.	Rs.

Rs. _____

Continue on next page.....



**OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.**

(SUMMARY OF BILL OF QUANTITIES)

I/We hereby quoted as follows:		<u>In Figure</u>	<u>In Words</u>
01	Part .A (item based on S/R) % Below / Above	Rs.	
02	Part .B (item based on O/R)	Rs.	
Grand Total (A+B)		Rs.	

The Total amount is Rs. _____ Rupees (_____)

for the complete job for all schedule of rate & offer rates (which ever is included in the BOQ)

I/We have attached a Bid Security amounting to Rs. _____/- as per NIT is shape of pay order bearing No. _____ dated _____ issued from _____.

(Bank)

Time Limit : 30 Calendar Days

Penalty Per Day: Rs. 1500/- per day (Max.10% of Sanctioned Cost)

Validity : 90+30 Days as per SPP Rules 2010

NOTE:

- Tender must be quoted in figure & in words both otherwise liable to be cancelled.
- All over writing & correction if any must be initialed & stamped by the bidder.
- We/I read the standard bidding Documents (Volume n-I) and available DCM Korangi and agreed to abide all of them and also provide all these documents with our signatures as & when directed.

**For Office Use of DMC
Korangi**

Verified 30Q by:

A.E.E (M&E) D.M.C. Korangi
Signature with Stamp

Signature of the contractor with stamp

Address: _____



1
118

OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

NO: EE/M&E/DMC/K/ /2015

Dated: - _____

Tender Reference No. _____ Dated : _____

DATE OF OPEANING: _____

VOLUME-II BILL OF QUANTITIES
(SINGLE STAGE ONE ENVELOPE METHOD)

**R/M & Engine Overhauling of Vehicle No: CH-3581275 of Landhi
Zone DMC Korangi.**

PC Cost: - Open Rate

Bid Security: - 02% of Quoted Bid.

Tender Cost: - Rs, 1,500.00

NOTE:

- 1) This Document contains 05 pages including this page
- 2) The Standard Terms & Condition of Bidding Documents
(Volume-I) available in the office & website of DMC Korangi

Executive Engineer (M&E),
District Municipal Corporation
Korangi Karachi.

Issue to M/S. _____ P.No. _____

Dated: _____ Bank: _____ Branch: _____

Signature & Stamp of Issuing Authority.



OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

NAME OF WORK: R/M & Engine Overhauling of Vehicle No: CH-3581275 of Landhi Zone DMC Korangi.

Tender Reference: No. _____

Dated: _____

(OPEN RATE ITEMS)

S. No.	Description	Quantity	Rate	Unit	Amount
01	Dismantling the complete Engine Assemblies to carry out the repairing / overhauling work. which Includes the cost of lath machine work i.e. facing, polishing work of head piece, including dismantling the valve, valve seats, valve guides, Sleeves Set and Replacing the same with provided (inlet / exhaust) valve, valve seats, valve guides including polishing and fitting of main and big-end piece of block object and reassembling the same. The job also includes the cost of labour, cotton, Engine oil and kerosene oil and greasing etc as required, complete in all respect.	01 Job.	@	Per No.	Rs.
02	Engine overhauling work to be completed with repairing / replacing of following engine parts and components complete in all respect:- i. P/F complete Liner Kit / block Sleeves for 04 Cylinder Engine with new piston, Piston pins, Ring set and Piston Locks etc. 01 Kit. ii. P/F Connecting rods. 04 Nos. iii. P/F connecting Rod Bushes. 04 Nos. iv. P/F Main end Begin Piece. 04 Sets. v. P/F Thrust collars. 04 Nos. vi. P/F Cam set including cam bushes. 01set. vii. P/F Oil pump 01 No. viii. P/F water Pump 01 No. ix. P/F valves with seats and guides. 16 Nos. x. P/F Full packing Kit. xi. P/F all other required bushes and bearings as required. xii. P/F all other required Nut-bolts pertains to engine fittings.	01 Job.	@	Per No.	Rs.
03	Repair / Maintenance of Fuel Injection Pump by means dismantling, servicing / replacing / repairing plungers, injectors, injector nozzles, delivery valves, spacers, springs, bearings and other parts as required and refitting the same. The work includes the cost of replacing pump seal kit and pump packing kit as required.	01 Job.	@	Per No.	Rs.

Continue on next page.....

S. No.	Description	Quantity	Rate	Unit	Amount
04	Repair / Maintenance of existing electric circuits by means of re-establishing of open electric circuits with replacing of worn out wires, relays and fuses as required. The work includes the cost of replacing indicator light bulbs and rear light bulbs etc as required	01 Job.	@	Per No.	Rs.
05	Wheel Servicing / Brake repairing of both side 04 wheels by means of dismantling wheel drums, replacing Cylinder pistons, cylinder kits, brake shoe and worn down bearings etc and refitting the same. The work includes the cost of labor, grease, cotton, kerosene oil, and refilling the brake fluid with adjusting and bleeding of brake lining and replacing of master cylinder kit complete in all respect.	01 Job.	@	Per No.	Rs.
06	Dismantling/ repairing and refitting of clutch portion with replacing / repairing of following parts as required. i. P/F Clutch plate. 01 No ii. P/F Pressure Plate 01 No. iii. Facing of fly wheel. 01 No. iv. P/F Thrust bearing. 01 No.	01 Job.	@	Per No.	Rs.
07	P/F 130Amp Battery with Battery Terminals as required.	02 Nos.			
08	Denting / Shaping / refurbishing of Driver's Cabin to be completed as per following specifications complete in all respect: - i) Removing dents from all panels of body surface in actual shape. The work includes the cost of Welding / Grinding and replacing of rusty MS Panels from the damaged portions such as, door panels, roof top, front & rear portions as per instructions of EI. 01 Job. ii) Replacing Door Locks. 02 Nos. iii) Replacing Door Window Glasses (L/R) 02 Ncs. iv) Repairing / Replacing of Seats with new covers. 01 Job. v) Replacing of door seal rubbers L/R 02 Nos vi) Replacing of Floor Rubber Sheet. 01 No. vii) Finishing / Painting work with filling material with leveling of dented portions, undercoating, and two coats best quality japani paint in white color. The work includes the cost of rubbing polish work complete in all respect. 01 Job.	01 Job.	@	Per No.	Rs.

Continue on next page.....

S.No.	Description	Quantity	Rate	Unit	Amount
09	<p>R/M Complete Cargo Body (Dump Truck Body) on the Given Isuzu FTR Truck with the following specifications and components complete in all respect, as per instructions of Engineer Incharge.</p> <p>i) Repairing of Longitude Rafter of 4.5 mm Rolled Channels. 02 Nos. All Cross members should be in 4.5mm Rolled Channel. 01 Job</p> <p>ii) Repairing of Cargo Body (Dump Truck Body) supported with U-shape stiffeners in 3.25mm² MS Sheet having size 16'X4.5'X3' with sub-frame, side panels, Front Panels, floor sheet and cab protector the floor sheet must be in 5mm² thickness as required. Complete in all respect. 01 Job</p> <p>iii) M/P/F Mudguards on rear wheels in 16SWG MS Sheet as required. 01 Job</p> <p>iv) R/M PTO Pump / Tipping Gear Kit with replacing of plungers / pistons and complete repair kit, packing kit and refitting same as required. 01 Job</p> <p>v) R/M of Hydraulic lift cylinder assembly by means replacing of complete seal kit, 'O' rings and refitting the same. 01 Job</p> <p>vi) Finishing the body with best quality rust preventive paint i.e. 02 coats of Red Oxide and 02 Coats Air drying Spray painting in yellow color. The job includes the cost of necessary undercoat as required. 01 Job.</p> <p>vii) Identification marking i.e. writing of District Municipal Corporation Korangi, Korangi Zone in English and Urdu wordings on both side body and Driver's cabin portion as required. 01 Job.</p>	01 Job.	@	Per No.	Rs.

Rs. _____

Continue on next page.....



OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

(SUMMARY OF BILL OF QUANTITIES)

I/We hereby quoted as follows:

		<u>In Figure</u>	<u>In Words</u>
01	Part .A (item based on S/R) % Below / Above	Rs.	
02	Part .B (item based on O/R)	Rs.	
Grand Total (A+B)		Rs.	

The Total amount is Rs. _____ Rupees (_____)

for the complete job for all schedule of rate & offer rates (which ever is included in the BOQ)

I/We have attached a Bid Security amounting to Rs. _____/- as per NIT in shape of pay order bearing No. _____ dated _____ issued from _____.

(Bank)

Time Limit : 30 Calendar Days
Validity : 90+30 Days as per SPP Rules 2010

Penalty Per Day: Rs. 1500/- per day (Max.10% of Sanctioned Cost)

NOTE:

- Tender must be quoted in figure & in words both otherwise liable to be cancelled.
- All over writing & correction if any must be initialed & stamped by the bidder.
- We/I read the standard bidding Documents (Volume n-1) and available DCM Korangi and agreed to abide all of them and also provide all these documents with our signatures as & when directed.

For Office Use of DMC
Korangi

Verified BOQ by:

A.E.E (M&E) D.M.C. Korangi
 Signature with Stamp

Signature of the contractor with stamp

Address: _____



1
118

OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

NO: EE/M&E/DMC/K/ /2015

Dated: - _____.

Tender Reference No. _____ Dated: _____

DATE OF OPENING: _____

VOLUME-II BILL OF QUANTITIES
(SINGLE STAGE ONE ENVELOPE METHOD)

**R/M of vehicles No: GL-7696, GL-6367, GL-7540, 202-779 and
CH-305335 of Landhi Zone DMC Korangi.**

PC Cost: - Open Rate

Bid Security: - 02% of Quoted Bid.

Tender Cost: - Rs, 1,500.00

NOTE:

- 1) This Document contains 08 pages including this page
- 2) The Standard Terms & Condition of Bidding Documents
(Volume-I) available in the office & website of DMC Korangi

Executive Engineer (M&E),
District Municipal Corporation
Korangi Karachi.

Issue to M/S. _____ P.No. _____

Dated: _____ Bank: _____ Branch: _____

Signature & Stamp of Issuing Authority.



OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

NAME OF WORK: R/M of vehicles No: GL-7696, GL-6367, GL-7540, 202-779 and CH-305335 of Landhi Zone DMC Korangi.

Tender Reference: No. _____ Dated: _____

(OPEN RATE ITEMS)

S. No.	Description	Quantity	Rate	Unit	Amount
01	GL-7696 Dismantling the complete Engine Assemblies to carry out the repairing / overhauling work. which Includes the cost of lath machine work i.e. facing, polishing work of head piece, including dismantling the valve, valve seats, valve guides, Sleeves Set and Replacing the same with provided (inlet / exhaust) valve, valve seats, valve guides including polishing and fitting of main and big-end piece of block object and reassembling the same. The job also includes the cost of labour, cotton, Engine oil and kerosene oil and greasing etc as required, complete in all respect.	01 Complete Job	@	Per Job	Rs.
02	Engine overhauling work to be completed with repairing / replacing of following engine parts and components complete in all respect:- i. P/F Piston 04 Nos.. ii. P/F Piston Rings 01 complete Set. iii. P/F Connecting rods 01 complete Set. iv. P/F connecting Rod Bushes 01 Set. v. P/F Main end Begin Piece 01 Set. vi. P/F Thrust collars Set. vii. P/F timing belt & Timing gear. 01 Set. viii. P/F Cam set including cam bushes. 01set. ix. P/F Oil pump 01 No. x. P/F water Pump 01 No. xi. P/F valves with seats and guides. 16 Nos. xii. P/F Full packing Kit. xiii. P/F all other required bushes and bearings as required. xiv. P/F all other required Nut-bolts pertains to engine fittings. xv. P/F Ignition coils as required. xvi. P/F Plug including wire 04 Nos.	01 Complete Job	@	Per Job	Rs.
03	R/M of Complete suspension With repairing / replacing of following parts and components as per Super specifications of Toyota Motors. i. Replacement of Front shock absorber L/R 02 Nos. ii. Replacement of Constant velocity Joints L/R (inner / outer) assemblies. iii. Replacement of Balancing rod Bushes, tie rod-end 02 Nos.	01 Complete Job	@	Per Job	Rs.

Continue on next page.....

S. No.	Description	Quantity	Rate	Unit	Amount
04	<p>GL-6367 Denting / Shaping / work to be completed as per following specifications complete in all respect: -</p> <p>i) Removing dents from all panels of body surface in actual shape. The work includes the cost of Welding / Grinding and replacing of rusty MS Sheet from the damaged portions, as per instructions of EI. 01 Job.</p> <p>ii) Replacing Door Locks. 02 Nos.</p> <p>iii) Replacing Door Window Glasses (L/R). 02 Nos.</p> <p>iv) Repairing of Seats with new covers. 01 Job</p> <p>v) Replacing of door seal rubbers L/R 02 Nos</p> <p>vi) Replacing of Floor Rubber Sheet. 01 No.</p> <p>vii) Finishing / Painting work with filling material with leveling of dented portions, uncoating, and two coats best quality air drying japani paint with same color. The work includes the cost of rubbing polish work complete in all respect. 01 Job.</p>	01 Complete Job	@	Per Job	Rs.
05	Dismantling the complete Head Assemblies to carry out the repairing / overhauling work. which Includes the cost of lath machine work i.e. facing, polishing work of head piece, including dismantling the valve, valve seats, valve guides, Sleeves Set and Replacing the same with New (inlet / exhaust) valve, valve seats, valve guides including polishing and fitting of main and big-end piece of block object and reassembling the same. The job also includes the cost of labour, cotton, Engine oil and kerosene oil and greasing etc as required, complete in all respect.	01 Complete Job	@	Per Job	Rs.
06	Repair of completing seats by means dismantling the seats replacing foam, seat cushions and refitting the same with replacing of seat channels as required.	01 Job	@	Per Job	Rs.
07	<p>GL-7540 Dismantling the complete Engine Assemblies to carry out the repairing / overhauling work. which Includes the cost of lath machine work i.e. facing, polishing work of head piece, including dismantling the valve, valve seats, valve guides, Sleeves Set and Replacing the same with provided (inlet / exhaust) valve, valve seats, valve guides including polishing and fitting of main and big-end piece of block object and reassembling the same. The job also includes the cost of labour, cotton, Engine oil and kerosene oil and greasing etc as required, complete in all respect.</p>	01 Complete Job	@	Per Job	Rs.

Continue on next page.....

S. No.	Description	Quantity	Rate	Unit	Amount
08	<p>Engine overhauling work to be completed with repairing / replacing of following engine parts and components complete in all respect:-</p> <p>a) P/F Pistons Set with Pins and Locks. b) P/F Rings Set. c) P/F Connecting rods complete Set. d) P/F connecting Rod Bushes. e) P/F Main end Begin Piece. f) P/F Thrust collars Set. g) P/F timing belt & Timing gear. h) P/F Cam bushes. i) P/F Oil pump. j) P/F water Pump. k) P/F valves with seats and guides. l) P/F Full packing Kit. m) P/F all other required seals, bushes and bearings. n) P/F all other required Nut-bolts pertains to engine fittings. o) P/F Ignition coils. p) P/F point. q) P/F 03 Spark Plugs. r) P/F Distributor Wires.</p>	01 Complete Job	@	Per Job	Rs.
09	<p>Dismantling/ repairing and refitting of clutch portion with replacing / repairing of following parts as required.</p> <p>i. P/F Clutch plate. 01 No ii. P/F Pressure Plate 01 No. iii. P/F Thrust bearing. 01 No</p>	01 Job	@	Per Job	Rs.
10	<p>R/M of Complete suspension With repairing / replacing of following parts and components as per Super specifications of Suzuki Motors.</p> <p>i. Replacement of Front shock absorber with Coil Springs L/R 02 Nos. ii. Servicing of Steering Box. iii. Replacement of Rack-end Bushes. iv. Replacement of Balancing rod Bushes. v. Replacement of tie rod-ends.</p>	01 Complete Job.		Per Job	
11	<p>Servicing of Radiator by means opening from top and bottom sides, cleaning all slide and soldering from the leak portion and refitting as required</p>	01 Job	@	Per Job	Rs.
12	<p>Repair / Maintenance of existing electric circuits by means of re-establishing of open electric circuits with replacing of worn out wires, relays and fuses as required. The work includes the cost of replacing indicator light bulbs and rear light bulbs etc as required.</p>	01 Job	@	Per Job	Rs.

Continue on next page.....

S. No.	Description	Quantity	Rate	Unit	Amount
13	Repair of completing seats by means dismantling the seats replacing foam, seat cushions and refitting the same with replacing of seat channels as required	01 Job	@	Per Job	Rs.
14	202-779 Mazda T3500 Dismantling the complete Engine Assemblies to carry out the repairing / overhauling work. which Includes the cost of lath machine work i.e. facing, polishing work of head piece, including dismantling the valve, valve seats, valve guides, Sleeves Set and Replacing the same with provided (inlet / exhaust) valve, valve seats, valve guides including polishing and fitting of main and big-end piece of block object and reassembling the same. The job also includes the cost of labour, cotton, Engine oil and kerosene oil and greasing etc as required, complete in all respect.	01 Job	@	Per Job	Rs.
15	Engine overhauling work to be completed with repairing / replacing of following engine parts and components complete in all respect:- a. P/F complete Liner Kit / block Sleeves for 04 Cylinder Engine with new piston, Piston pins, Ring set and Piston Locks etc. 01 Kit. b. P/F Connecting rods. 04 Nos. c. P/F connecting Rod Bushes. 04 Nos. d. P/F Main end Begin Piece. 04 Sets. e. P/F Thrust collars. 04 Nos. f. P/F timing belt & Timing gear. 01 Set. g. P/F Cam set including cam bushes. 01set. h. P/F Oil pump 01 No. i. P/F water Pump 01 No. j. P/F valves with seats and guides. 08 Nos. k. P/F Full packing Kit. l. P/F all other required bushes and bearings as required. m. P/F all other required Nut-bolts pertains to engine fittings.	01 Job	@	Per Job	Rs.
16	Repair / Maintenance of fuel injection pump by means of dismantling, servicing / replacing / repairing unserviceable / washed out plungers, injectors, nozzles, bearings, seal kit and packing kit and refitting the same as required.	01 Job	@	Per Job	Rs.
17	Repair of alternator assembly by means of dismantling the Generator replacing rectifier, armature carbons and armature bushes etc and refitting the same.	01 Job	@	Per Job	Rs.

Continue on next page.....

S. No.	Description	Quantity	Rate	Unit	Amount
18	Repair / Maintenance of existing electric circuits by means of re-establishing of open electric circuits with replacing of worn out wires, relays and fuses as required. The work includes the cost of replacing indicator light bulbs and rear light bulbs etc as required.	01 Job	@	Per Job	Rs.
19	P/F Complete New Radiator Assembly with top / bottom inlet and outlet connections complete in all respect.	01 Job	@	Per Job	Rs.
20	Wheel Servicing / Brake repairing of both side 04 wheels by means of dismantling wheel drums, replacing Cylinder pistons, cylinder kits, brake shoe and worn down bearings etc and refitting the same. The work includes the cost of labor, grease, cotton, kerosene oil, and refilling the brake fluid with adjusting and bleeding of brake lining and replacing of master cylinder kit complete in all respect.	01 Job	@	Per Job	Rs.
21	R/M Complete rear Body portion with the following specifications complete in all respect, as per instructions of Engineer Incharge. i) Repairing of Cargo Body by means Patch repair work from damaged portions with same size and gauge MS Sheet as required complete in all respect. ii) Finishing the body with best quality rust preventive paint i.e. 02 coats of Red Oxide and 02 Coats Air drying Spray painting in suitable color. The job includes the cost of necessary undercoat as required. iii) Identification i.e. writing of DMC Korangi, Korangi Zone in English and Urdu wordings on both side body and Driver's cabin portion as required.	01 Complete Job	@	Per Job	Rs.
22	P/F Complete new Silencer Assembly with muffler and collar complete in all respect.	01 Job	@	Per Job	Rs.
23	CH-305,335 Mazda T-3500 Dismantling/ repairing and refitting of clutch portion with replacing / repairing of following parts as required. a. P/F Clutch plate. 01 No b. P/F Pressure Plate 01 No. c. Facing of fly wheel. 01 No. d. P/F Thrust bearing. 01 No.	01 Job	@	Per Job	Rs.
24	Repair / Maintenance of fuel injection pump by means of dismantling, servicing / replacing / repairing unserviceable / washed out plungers, injectors, nozzles, bearings, seal kit and packing kit and refitting the same as required.	01 Job	@	Per Job	Rs.

Continue on next page.....

25	Repair of alternator assembly by means of dismantling the Generator replacing rectifier, armature carbons and armature bushes etc and refitting the same.	01 Job	@	Per Job	Rs.
26	Servicing of Radiator by means opening from top and bottom sides, cleaning all slide and soldering from the leak portion and refitting as required.	01 Job	@	Per Job	Rs.
27	R/M Hydraulic Pump / PTO Driven Pump Assembly by means of dismantling the same and replacing / repairing / servicing gear, bush, spacers, seals, 'O' rings, complete repair kit and packing kit and refitting the same as required.	01 Job	@	Per Job	Rs.
28	<p>Denting / Shaping / refurbishing of Driver's Cabin to be completed as per following specifications complete in all respect: -</p> <p>a) Removing dents from all panels of body surface in actual shape. The work includes the cost of Welding / Grinding and replacing of rusty MS Panels from the damaged portions such as, door panels, roof top, front & rear portions as per instructions of EI. 01 Job.</p> <p>b) Replacing Door Locks. 02 Nos.</p> <p>c) Replacing Door Window Glasses (L/R) 02 Nos.</p> <p>d) Repairing / Replacing of Seats with new covers. 01 Job.</p> <p>e) Replacing of door seal rubbers L/R 02 Nos</p> <p>f) Replacing of Floor Rubber Sheet. 01 No.</p> <p>g) Finishing / Painting work with filling material with leveling of dented portions, undercoating, and two coats best quality japani paint in suitable color. The work includes the cost of rubbing polish work complete in all respect. 01 Job.</p>	01 Job.	@	Per Job	Rs.

Rs. _____

Continue on next page



OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

(SUMMARY OF BILL OF QUANTITIES)

I/We hereby quoted as follows:

		<u>In Figure</u>	<u>In Words</u>
01	Part .A (item based on S/R) % Below / Above	Rs.	
02	Part .B (item based on O/R)	Rs.	
Grand Total (A+B)		Rs.	

The Total amount is Rs. _____ Rupees (_____)

for the complete job for all schedule of rate & offer rates (which ever is included in the BOQ)

I/We have attached a Bid Security amounting to Rs. _____/- as per NIT in shape of pay

order bearing No. _____ dated _____ issued from _____.

(Bank)

Time Limit : 30 Calendar Days

Penalty Per Day: Rs. 1500/- per day (Max.10% of Sanctioned Cost)

Validity : 90+30 Days as per SPP Rules 2010

NOTE:

- Tender must be quoted in figure & in words both otherwise liable to be cancelled.
- All over writing & correction if any must be initialed & stamped by the bidder.
- We/I read the standard bidding Documents (Volume n-I) and available DCM Korangi and agreed to abide all of them and also provide all these documents with our signatures as & when directed.

For Office Use of DMC
Korangi

Verified BOQ by:

A.E.E (M&E) D.M.C. Korangi
Signature with Stamp

Signature of the contractor with stamp

Address: _____



1
(120)

OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

NO: EE/M&E/DMC/K/ /2015

Dated: - _____.

Tender Reference No. _____ Dated : _____

DATE OF OPEANING:

VOLUME-II BILL OF QUANTITIES
(SINGLE STAGE ONE ENVELOPE METHOD)

**R/M & Engine Overhauling of Vehicle No: 3576901 of Shah Faisal
Zone DMC Korangi.**

PC Cost: - Open Rate

Bid Security: - 02% of Quoted Bid.

Tender Cost: - Rs, 1,500.00

NOTE:

- 1) This Document contains 05 pages including this page
- 2) The Standard Terms & Condition of Bidding Documents
(Volume-I) available in the office & website of DMC Korangi

Executive Engineer (M&E),
District Municipal Corporation
Korangi Karachi.

Issue to M/S. _____ P.No. _____

Dated: _____ Bank: _____ Branch: _____

Signature & Stamp of Issuing Authority.



OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

NAME OF WORK: R/M & Engine Overhauling of Vehicle No: 3576901 of Shah Faisal Zone DMC Korangi.

Tender Reference: No.

Dated:

(OPEN RATE ITEMS)

S. No.	Description	Quantity	Rate	Unit	Amount
01	Dismantling the complete Engine Assemblies to carry out the repairing / overhauling work. which Includes: the cost of lath machine work i.e. facing, polishing work of head piece, including dismantling the valve, valve seats, valve guides, Sleeves Set and Replacing the same with provided (inlet / exhaust) valve, valve seats, valve guides including polishing and fitting of main and big-end piece of block object and reassembling the same. The job also includes the cost of labour, cotton, Engine oil and kerosene oil and greasing etc as required, complete in all respect.	01 Job.	@	Per No.	Rs.
02	Engine overhauling work to be completed with repairing / replacing of following engine parts and components complete in all respect:- i. P/F complete Liner Kit / block Sleeves for 04 Cylinder Engine with new piston, Piston pins, Ring set and Piston Locks etc. 01 Kit. ii. P/F Connecting rods. 04 Nos. iii. P/F connecting Rod Bushes. 04 Nos. iv. P/F Main end Begin Piece. 04 Sets. v. P/F Thrust collars. 04 Nos. vi. P/F Cam set including cam bushes. 01set. vii. P/F Oil pump 01 No. viii. P/F water Pump 01 No. ix. P/F valves with seats and guides. 08 Nos. x. P/F Full packing Kit. xi. P/F all other required bushes and bearings as required. xii. P/F all other required Nut-bolts pertains to engine fittings.	01 Job.	@	Per No.	Rs.
03	Repair / Maintenance of Fuel Injection Pump by means dismantling, servicing / replacing / repairing plungers, injectors, injector nozzles, delivery valves, spacers, springs, bearings and other parts as required and refitting the same. The work includes the cost of replacing pump seal kit and pump packing kit as required.	01 Job.	@	Per No.	Rs.
04	Repair / Maintenance of existing electric circuits by means of re-establishing of open electric circuits with replacing of worn out wires, relays and fuses as required. The work includes the cost of replacing indicator light bulbs and rear light bulbs etc as required	01 Job.	@	Per No.	Rs.

Continue on next page.....

S. No.	Description	Quantity	Rate	Unit	Amount
05	Wheel Servicing / Brake repairing of both side 04 wheels by means of dismantling wheel drums, replacing Cylinder pistons, cylinder kits, brake shoe and worn down bearings etc and refitting the same. The work includes the cost of labor, grease, cotton, kerosene oil, and refilling the brake fluid with adjusting and bleeding of brake lining and replacing of master cylinder kit complete in all respect.	01 Job.	@	Per No.	Rs.
06	Dismantling/ repairing and refitting of clutch portion with replacing / repairing of following parts as required. i. P/F Clutch plate. 01 No ii. P/F Pressure Plate 01 No. iii. Facing of fly wheel. 01 No. iv. P/F Thrust bearing. 01 No.	01 Job.	@	Per No.	Rs.
07	Repair / Maintenance of both Sides 04 Springs Leaf sets, with repairing / replacing of following parts and components and refitting the same as required. i. Replacement Broken Spring Leafs. ii. Replacement of Leaf Bracts. iii. Replacement of Center Bolts. iv. Replacement of U-Clamps. v. Replacement of Leaf Bushes. vi. Replacement of Center Pin / Leaf Pin.	01 Job.	@	Per No.	Rs.
08	P/F 130Amp Battery with Battery Terminals as required.	02 Nos.	@	Per No.	Rs.
09	Denting / Shaping / refurbishing of Driver's Cabin to be completed as per following specifications complete in all respect: - i) Removing dents from all panels of body surface in actual shape. The work includes the cost of Welding / Grinding and replacing of rusty MS Panels from the damaged portions such as, door panels, roof top, front & rear portions as per instructions of EI. 01 Job. ii) Replacing Door Locks. 02 Nos. iii) Replacing Door Window Glasses (L/R) 02 Nos. iv) Repairing / Replacing of Seats with new covers. 01 Job. v) Replacing of door seal rubbers L/R 02 Nos vi) Replacing of Floor Rubber Sheet. 01 No. vii) Finishing / Painting work with filling material with leveling of dented portions, undercoating, and two coats best quality japani paint in white color. The work includes the cost of rubbing polish work complete in all respect. 01 Job.	01 Job.	@	Per No.	Rs.

Continue on next page.....

S.No.	Description	Quantity	Rate	Unit	Amount
10	<p>R/M Complete Cargo Body (Dump Truck Body) on the Given Isuzu FTR Truck with the following specifications and components complete in all respect, as per instructions of Engineer Incharge.</p> <p>i) Repairing of Longitude Rafter of 4.5 mm Rolled Channels. 02 Nos. All Cross members should be in 4.5mm Rolled Channel. 01 Job</p> <p>ii) Repairing of Cargo Body (Dump Truck Body) supported with U-shape stiffeners in 3.25mm² MS Sheet having size 16'X4.5'X3' with sub-frame, side panels, Front Panels, floor sheet and cab protector the floor sheet must be in 5mm² thickness as required. Complete in all respect. 01 Job</p> <p>iii) M/P/F Mudguards on rear wheels in 16SWG MS Sheet as required. 01 Job</p> <p>iv) R/M PTO Pump / Tipping Gear Kit with replacing of plungers / pistons and complete repair kit, packing kit and refitting same as required. 01 Job</p> <p>v) R/M of Hydraulic lift cylinder assembly by means replacing of complete seal kit, 'O' rings and refitting the same. 01 Job</p> <p>vi) Finishing the body with best quality rust preventive paint i.e. 02 coats of Red Oxide and 02 Coats Air drying Spray painting in yellow color. The job includes the cost of necessary undercoat as required. 01 Job.</p> <p>vii) Identification marking i.e. writing of District Municipal Corporation Korangi, Korangi Zone in English and Urdu wordings on both side body and Driver's cabin portion as required. 01 Job.</p>	01 Job.	@	Per No.	Rs.

Rs. _____

Continue on next page.....



**OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.**

(SUMMARY OF BILL OF QUANTITIES)

I/We hereby quoted as follows:

		<u>In Figure</u>	<u>In Words</u>
01	Part .A (item based on S/R) % Below / Above	Rs.	
02	Part .B (item based on O/R)	Rs.	
Grand Total (A+B)		Rs.	

The Total amount is Rs. _____ Rupees (_____)

for the complete job for all schedule of rate & offer rates (which ever is included in the BOQ)

I/We have attached a Bid Security amounting to Rs. _____/- as per NIT in shape of pay

order bearing No. _____ dated _____ issued from _____.

(Bank)

Time Limit : 30 Calendar Days

Penalty Per Day: Rs. 1500/- per day (Max.10% of Sanctioned Cost)

Validity : 90+30 Days as per SPP Rules 2010

NOTE:

- Tender must be quoted in figure & in words both otherwise liable to be cancelled.
- All over writing & correction if any must be initialed & stamped by the bidder.
- We/I read the standard bidding Documents (Volume n-I) and available DCM Korangi and agreed to abide all of them and also provide all these documents with our signatures as & when directed.

**For Office Use of DMC
Korangi**

Verified BOQ by:

A.E.E (M&E) D.M.C. Korangi
Signature with Stamp

Signature of the contractor with stamp

Address: _____



1
121

OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

NO: EE/M&E/DMC/K/ /2015

Dated: - _____

Tender Reference No. _____ Dated: _____

DATE OF OPENING: _____

VOLUME-II BILL OF QUANTITIES
(SINGLE STAGE ONE ENVELOPE METHOD)

**R/M & Engine Overhauling of Vehicle No: 3601410 of Shah Faisal
Zone DMC Korangi.**

PC Cost: - Open Rate

Bid Security: - 02% of Quoted Bid.

Tender Cost: - Rs, 1,500.00

NOTE:

- 1) This Document contains 05 pages including this page
- 2) The Standard Terms & Condition of Bidding Documents
(Volume-I) available in the office & website of DMC Korangi

Executive Engineer (M&E),
District Municipal Corporation
Korangi Karachi.

Issue to M/S. _____ P.No. _____

Dated: _____ Bank: _____ Branch: _____

Signature & Stamp of Issuing Authority.



OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

NAME OF WORK: R/M & Engine Overhauling of Vehicle No: 3601410 of Shah Faisal Zone DMC Korangi.

Tender Reference: No. _____

Dated: _____

(OPEN RATE ITEMS)

S. No.	Description	Quantity	Rate	Unit	Amount
01	Dismantling the complete Engine Assemblies to carry out the repairing / overhauling work. which Includes: the cost of lath machine work i.e. facing, polishing work of head piece, including dismantling the valve, valve seats, valve guides, Sleeves Set and Replacing the same with provided (inlet / exhaust) valve, valve seats, valve guides including polishing and fitting of main and big-end piece of block object and reassembling the same. The job also includes the cost of labour, cotton, Engine oil and kerosene oil and greasing etc as required, complete in all respect.	01 Job.	@	Per Job.	Rs.
02	Engine overhauling work to be completed with repairing / replacing of following engine parts and components complete in all respect:- i. P/F complete Liner Kit / block Sleeves for 04 Cylinder Engine with new piston, Piston pins, Ring set and Piston Locks etc. 01 Kit. ii. P/F Connecting rods. 04 Nos. iii. P/F connecting Rod Bushes. 04 Nos. iv. P/F Main end Begin Piece. 04 Sets. v. P/F Thrust collars. 04 Nos. vi. P/F Cam set including cam bushes. 01set. vii. P/F Oil pump 01 No. viii. P/F water Pump 01 No. ix. P/F valves with seats and guides. 16 Nos. x. P/F Full packing Kit. xi. P/F all other required bushes and bearings as required. xii. P/F all other required Nut-bolts pertains to engine fittings.	01 Job.	@	Per Job.	Rs.
03	Repair / Maintenance of Fuel Injection Pump by means dismantling, servicing / replacing / repairing plungers, injectors, injector nozzles, delivery valves, spacers, springs, bearings and other parts as required and refitting the same. The work includes the cost of replacing pump seal kit and pump packing kit as required.	01 Job.	@	Per Job.	Rs.
04	Repair / Maintenance of existing electric circuits by means of re-establishing of open electric circuits with replacing of worn out wires, relays and fuses as required. The work includes the cost of replacing indicator light bulbs and rear light bulbs etc as required	01 Job.	@	Per Job.	Rs.

Continue on next page.....

S. No.	Description	Quantity	Rate	Unit	Amount
05	Wheel Servicing / Brake repairing of both side 04 wheels by means of dismantling wheel drums, replacing Cylinder pistons, cylinder kits, brake shoe and worn down bearings etc and refitting the same. The work includes the cost of labor, grease, cotton, kerosene oil, and refilling the brake fluid with adjusting and bleeding of brake lining and replacing of master cylinder kit complete in all respect.	01 Job.	@	Per Job.	Rs.
06	Dismantling/ repairing and refitting of clutch portion with replacing / repairing of following parts as required. i. P/F Clutch plate. 01 No ii. P/F Pressure Plate 01 No. iii. Facing of fly wheel. 01 No. iv. P/F Thrust bearing. 01 No.	01 Job.	@	Per Job.	Rs.
07	Repair / Maintenance of both Sides 04 Springs Leaf sets, with repairing / replacing of following parts and components and refitting the same as required. i. Replacement Broken Spring Leafs. ii. Replacement of Leaf Bracts. iii. Replacement of Center Bolts. iv. Replacement of U-Clamps. v. Replacement of Leaf Bushes. vi. Replacement of Center Pin / Leaf Pin.	01 Job.	@	Per Job.	Rs.
08	P/F 130Amp Battery with Battery Terminals as required.	02 Nos.	@	Per No.	Rs.
09	Denting / Shaping / refurbishing of Driver's Cabin to be completed as per following specifications complete in all respect: - i) Removing dents from all panels of body surface in actual shape. The work includes the cost of Welding / Grinding and replacing of rusty MS Panels from the damaged portions such as, door panels, roof top, front & rear portions as per instructions of EI. 01 Job. ii) Replacing Door Locks. 02 Nos. iii) Replacing Door Window Glasses (L/R) 02 Nos. iv) Repairing / Replacing of Seats with new covers. 01 Job. v) Replacing of door seal rubbers L/R 02 Nos vi) Replacing of Floor Rubber Sheet. 01 No. vii) Finishing / Painting work with filling material with leveling of dented portions, undercoating, and two coats best quality japani paint in white color. The work includes the cost of rubbing polish work complete in all respect. 01 Job.	01 Job.	@	Per Job.	Rs.

Continue on next page.....

S.No.	Description	Quantity	Rate	Unit	Amount
10	<p>R/M Complete Cargo Body (Dump Truck Body) on the Given Isuzu FTR Truck with the following specifications and components complete in all respect, as per instructions of Engineer Incharge.</p> <p>i) Repairing of Longitude Rafter of 4.5 mm Rolled Channels. 02 Nos. All Cross members should be in 4.5mm Rolled Channel. 01 Job</p> <p>ii) Repairing of Cargo Body (Dump Truck Body) supported with U-shape stiffeners in 3.25mm² MS Sheet having size 16'X4.5'X3' with sub-frame, side panels, Front Panels, floor sheet and cab protector the floor sheet must be in 5mm² thickness as required. Complete in all respect. 01 Job</p> <p>iii) M/P/F Mudguards on rear wheels in 16SWG MS Sheet as required. 01 Job</p> <p>iv) R/M PTO Pump / Tipping Gear Kit with replacing of plungers / pistons and complete repair kit, packing kit and refitting same as required. 01 Job</p> <p>v) R/M of Hydraulic lift cylinder assembly by means replacing of complete seal kit, 'O' rings and refitting the same. 01 Job</p> <p>vi) Finishing the body with best quality rust preventive paint i.e. 02 coats of Red Oxide and 02 Coats Air drying Spray painting in yellow color. The job includes the cost of necessary undercoat as required. 01 Job.</p> <p>vii) Identification marking i.e. writing of District Municipal Corporation Korangi, Korangi Zone in English and Urdu wordings on both side body and Driver's cabin portion as required. 01 Job.</p>	01 Job.	@	Per Job.	Rs.

Rs. _____

Continue on next page.....



OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

(SUMMARY OF BILL OF QUANTITIES)

I/We hereby quoted as follows:

		<u>In Figure</u>	<u>In Words</u>
01	Part .A (item based on S/R) % Below / Above	Rs.	
02	Part .B (item based on O/R)	Rs.	
Grand Total (A+B)		Rs.	

The Total amount is Rs. _____ Rupees (_____)

for the complete job for all schedule of rate & offer rates (which ever is included in the BOQ)

I/We have attached a Bid Security amounting to Rs. _____/- as per NIT in shape of pay order bearing No. _____ dated _____ issued from _____.

(Bank)

Time Limit : 30 Calendar Days

Penalty Per Day: Rs. 1500/- per day (Max.10% of Sanctioned Cost)

Validity : 90+30 Days as per SPP Rules 2010

NOTE:

- Tender must be quoted in figure & in words both otherwise liable to be cancelled.
- All over writing & correction if any must be initialed & stamped by the bidder.
- We/I read the standard bidding Documents (Volume n-I) and available DCM Korangi and agreed to abide all of them and also provide all these documents with our signatures as & when directed.

For Office Use of DMC
Korangi

Verified BOQ by:

A.E.E (M&E) D.M.C. Korangi
 Signature with Stamp

Signature of the contractor with stamp

Address: _____



OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

122

NO: EE/M&E/DMC/K/ /2015

Dated: - _____

Tender Reference No. _____ Dated: _____

DATE OF OPENING: _____

VOLUME-II BILL OF QUANTITIES
(SINGLE STAGE ONE ENVELOPE METHOD)

Temporary Lighting Arrangement in Different Graveyards in
References of Shab-e-Barat in Shah Faisal Zone DMC Korangi.

PC Cost: - Open Rate
Bid Security: - 02% of Quoted Bid.
Tender Cost: - Rs, 1,500.00

NOTE:

- 1) This Document contains 03 pages including this page
- 2) The Standard Terms & Condition of Bidding Documents (Volume-I) available in the office & website of DMC Korangi

Executive Engineer (M&E),
District Municipal Corporation
Korangi Karachi.

Issue to M/S. _____ P.No. _____

Dated: _____ Bank: _____ Branch: _____

Signature & Stamp of Issuing Authority.



OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

NAME OF WORK: Temporary Lighting Arrangement in Different Graveyards in References of Shab-e-Barat in Shah Faisal Zone DMC Korangi.

Tender Reference: No. _____ **Dated:** _____

(OPEN RATE ITEMS)

S. No.	Description	Quantity	Rate	Unit	Amount
01	Temporary Illumination with 400-Watt Flood Lights with clamping arrangement, On-Off Switch, as per instructions of E.I. the job includes the cost of labor and transportation etc.	400 Nos.	@	Per Job	Rs.
02	Temporary Illumination with 24/25 Watts Energy Savor Lamp Chain with clamping arrangement On-Off Switch, as per instructions of E.I. the job includes the cost of labor and transportation etc.	400 Nos.	@	Per Job	Rs.
03	Temporary Illumination with 1000-Watt Flood Lights with clamping arrangement, On-Off Switch, as per instructions of E.I. the job includes the cost of labor and transportation etc.	100 Nos.	@	Per Job	Rs.
04	P/L Main Power Supply on temporary basis with 06mm ² , 4-wire PVC Insulated and PVC Sheeted copper conductor from source of power to distribution point, as per instructions of E.I. the job includes the cost of labor and transportation etc.	2700 Meters	@	Per Job	Rs.
05	Arrangement of 100-KVA Generator on temporary basis for 24 Hours including Fuel, operator and 100-AMP change over complete in all respect. the job includes the cost of labor and transportation etc.	06 Nos.	@	Per Job	Rs.
06	Arrangement of 50-KVA Generator on temporary basis for 24 Hours including Fuel, operator and 100-AMP change over complete in all respect. the job includes the cost of labor and transportation etc.	08 Nos.	@	Per Job	Rs.
07	Arrangement of 10-KVA Generator on temporary basis for 24 Hours including Fuel, operator and 100-AMP change over complete in all respect. the job includes the cost of labor and transportation etc.	06 Nos.	@	Per Job	Rs.
08	Temporary installation of Light Post with 2' Long nail and 10' Long pipe for support of lamp chain and fixing of light etc as per site requirement and instruction of E.I.	500 Nos.	@	Per Job	Rs.

Rs. _____



OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

(SUMMARY OF BILL OF QUANTITIES)

I/We hereby quoted as follows:

		<u>In Figure</u>	<u>In Words</u>
01	Part .A (item based on S/R) % Below / Above	Rs.	
02	Part .B (item based on O/R)	Rs.	
Grand Total (A+B)		Rs.	

The Total amount is Rs. _____ Rupees (_____)

for the complete job for all schedule of rate & offer rates (which ever is included in the BOQ)

I/We have attached a Bid Security amounting to Rs. _____/- as per NIT in shape of pay

order bearing No. _____ dated _____ issued from _____

(Bank)

Time Limit : 30 Calendar Days

Validity : 90+30 Days as per SPP Rules 2010

Penalty Per Day: Rs. 3000/- per day (Max.10% of Sanctioned Cost)

NOTE:

- Tender must be quoted in figure & in words both otherwise liable to be cancelled.
- All over writing & correction if any must be initialed & stamped by the bidder.
- We/I read the standard bidding Documents (Volume n-I) and available DCM Korangi and agreed to abide all of them and also provide all these documents with our signatures as & when directed.

For Office Use of DMC
Korangi

Verified BOQ by:

A.E.E (M&E) D.M.C. Korangi
 Signature with Stamp

Signature of the contractor with stamp

Address: _____



1
123

OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

NO: EE/M&E/DMC/K/ /2015

Dated: - _____

Tender Reference No. _____

Dated : _____

DATE OF OPENING:

VOLUME-II BILL OF QUANTITIES
(SINGLE STAGE ONE ENVELOPE METHOD)

R/M of vehicles No: GL-00392, TT-06, TT-04, CH-100977, CH-107462,
CH-3601398, TT-05, TT-02, CH-3600529, CH-16044, CH-16100,
CH-100981, CH-158405, TT-09, CH- 107429 and CH-1687187 of
Korangi Zone, DMC Korangi.

PC Cost: -

Open Rate

Bid Security: -

02% of Quoted Bid.

Tender Cost: -

Rs, 1,500.00

NOTE:

- 1) This Document contains 08 pages including this page
- 2) The Standard Terms & Condition of Bidding Documents
(Volume-I) available in the office & website of DMC Korangi

Executive Engineer (M&E),
District Municipal Corporation
Korangi Karachi.

Issue to M/S. _____

P.No. _____

Dated: _____

Bank: _____

Branch: _____

Signature & Stamp of Issuing Authority.



OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

NAME OF WORK: R/M of vehicles No:GL-00392, TT-06, TT-04, CH-100977, CH-107462, CH-3601398, TT-05, TT-02, CH-3600529, CH-16044, CH-16100, CH-100981, CH-158405, TT-09, CH-107429 and CH-1687187 of Korangi Zone DMC Korangi.

Tender Reference: No. _____ **Dated:** _____

(OPEN RATE ITEMS)

S. No.	Description	Quantity	Rate	Unit	Amount
01	<u>GL-00392 Hitachi LX-100 Wheel Loader</u> P/F Water pump assembly.	01 Job	@	Per Job	Rs.
02	Replacement of Transmission Pipe with same size and fitting as require.	02 Nos.	@	Per Job	Rs.
03	Replacement of Transmission Shaft with cross assembly.	01 Job	@	Per Job	Rs.
04	P/F Transmission Gear Seal as required.	01 Job	@	Per Job	Rs.
05	<u>TT-06</u> Repair of Hydraulic lift cylinder assembly by means dismantling the cylinder replacing oil seals, jack pistons, 'O' rings and refitting the same as required.	01 Job	@	Per Job	Rs.
06	Repair of alternator assembly by means of dismantling the Generator replacing rectifier, armature carbons and armature bushes etc and refitting the same.	01 Job	@	Per Job	Rs.
07	<u>TT-04</u> Replacement of Trolley Wheel Bearing as required.	01 Job	@	Per Job	Rs.
08	<u>CH-100977 Volvo</u> Dismantling/ repairing and refitting of clutch portion with replacing / repairing of following parts as required. i. P/F Clutch plate. 01 No ii. P/F Pressure Plate 01 No. iii. Facing of fly wheel. 01 No. iv. P/F Thrust bearing. 01 No.	01 Job	@	Per Job	Rs.
09	M/P/F Hydraulic pipe with required size and shape fittings as required.	02 Nos.	@	Per Job	Rs.
10	<u>CH-107467 Shehzore</u> Wheel Servicing / Brake repairing of both side 04 wheels by means of dismantling wheel drums, replacing Cylinder pistons, cylinder kits, brake shoe and worn down bearings etc and refitting the same. The work includes the cost of labor, grease, cotton, kerosene oil, and refilling the brake fluid with adjusting and bleeding of brake lining and replacing of master cylinder kit complete in all respect.	01 Complete Job	@	Per Job	Rs.

Continue on next page.....

S. No.	Description	Quantity	Rate	Unit	Amount
11	CH-3601398 FTR Dumper Dismantling/ repairing and refitting of clutch portion with replacing / repairing of following parts as required. a. P/F Clutch plate. 01 No b. P/F Pressure Plate 01 No. c. Facing of fly wheel. 01 No. d. P/F Thrust bearing. 01 No.	01 Complete Job	@	Per Job	Rs.
12	TT-05 P/F Tube size 900-20 as required.	01 No.	@	Per Job	Rs.
13	P/F Wheel Rim size 900-20 as required.	01 No.	@	Per Job	Rs.
14	TT-02 P/F Front Wheel Bearing as required.	01 Job	@	Per Job	Rs.
15	P/F Tube size 900-20 as required.	01 No.	@	Per Job	Rs.
16	CH-3600529 Isuzu FTR Dismantling the complete Engine Assemblies to carry out the repairing / overhauling work. which Includes the cost of lath machine work i.e. facing, polishing work of head piece, including dismantling the valve, valve seats, valve guides, Sleeves Set and Replacing the same with provided (inlet / exhaust) valve, valve seats, valve guides including polishing and fitting of main and big-end piece of block object and reassembling the same. The job also includes the cost of labour, cotton, Engine oil and kerosene oil and greasing etc as required, complete in all respect.	01 Complete Job	@	Per Job	Rs.
17	Engine overhauling work to be completed with repairing / replacing of following engine parts and components complete in all respect:- a) P/F Pistons Set with Pins and Locks. b) P/F Rings Set. c) P/F Connecting rods complete Set. d) P/F connecting Rod Bushes. e) P/F Main end Begin Piece. f) P/F Thrust collars Set. g) P/F timing belt & Timing gear. h) P/F Cam bushes. i) P/F Oil pump. j) P/F water Pump. k) P/F valves with seats and guides. l) P/F Full packing Kit. m) P/F all other required seals, bushes and bearings. n) P/F all other required Nut-bolts pertains to engine fittings. o) P/F Ignition coils. p) P/F point. q) P/F 03 Spark Plugs. r) P/F Distributor Wires.	01 Complete Job	@	Per Job	Rs.

Continue on next page.....

S. No.	Description	Quantity	Rate	Unit	Amount
18	Dismantling/ repairing and refitting of clutch portion with replacing / repairing of following parts as required. a. P/F Clutch plate. 01 No b. P/F Pressure Plate 01 No. c. Facing of fly wheel. 01 No. d. P/F Thrust bearing. 01 No.	01 Complete Job	@	Per Job	Rs.
19	Wheel Servicing / Brake repairing of both side 04 wheels by means of dismantling wheel drums, replacing Cylinder pistons, cylinder kits, brake shoe and worn down bearings etc and refitting the same. The work includes the cost of labor, grease, cotton, kerosene oil, and refilling the brake fluid with adjusting and bleeding of brake lining and replacing of master cylinder kit complete in all respect.	01 Complete Job	@	Per Job	Rs.
	P/F Complete New Radiator Assembly with top / bottom inlet and outlet connections complete in all respect.	01 Job	@	Per Job	Rs.
21	P/F Hydraulic Lift Pins with Bushes as required.	02 Nos.	@	Per Job	Rs.
22	CH-16044 Hino FB Dismantling/ repairing and refitting of clutch portion with replacing / repairing of following parts as required. a. P/F Clutch plate. 01 No b. P/F Pressure Plate 01 No. c. Facing of fly wheel. 01 No. d. P/F Thrust bearing. 01 No.	01 Complete Job	@	Per Job	Rs.
23	Repair / Maintenance of both Sides 04 Springs Leaf sets, with repairing / replacing of following parts and components and refitting the same as required. i) Replacement Broken Spring Leafs. ii) Replacement of Leaf Bracts. iii) Replacement of Center Bolts. iv) Replacement of U-Clamps. v) Replacement of Leaf Bushes. vi) Replacement of Center Pin / Leaf Pin.	01 Complete Job	@	Per Job	Rs.
24	CH-16100 Hino FB Dismantling/ repairing and refitting of clutch portion with replacing / repairing of following parts as required. a. P/F Clutch plate. 01 No b. P/F Pressure Plate 01 No. c. Facing of fly wheel. 01 No. d. P/F Thrust bearing. 01 No.	01 Complete Job	@	Per Job	Rs.

Continue on next page.....

S. No.	Description	Quantity	Rate	Unit	Amount
25	Wheel Servicing / Brake repairing of both side 04 wheels by means of dismantling wheel drums, replacing Cylinder pistons, cylinder kits, brake shoe and worn down bearings etc and refitting the same. The work includes the cost of labor, grease, cotton, kerosene oil, and refilling the brake fluid with adjusting and bleeding of brake lining and replacing of master cylinder kit complete in all respect.	01 Complete Job	@	Per Job	Rs.
26	P/F Complete New Radiator Assembly with top / bottom inlet and outlet connections complete in all respect.	01 Job	@	Per Job	Rs.
27	CH-100981 Volvo Arm Roll Repair of Hydraulic lift cylinder assembly by means dismantling the cylinder replacing oil seals, jack pistons, 'O' rings and refitting the same as required.	01 Job	@	Per Job	Rs.
28	Wheel Servicing / Brake repairing of both side 04 wheels by means of dismantling wheel drums, replacing Cylinder pistons, cylinder kits, brake shoe and worn down bearings etc and refitting the same. The work includes the cost of labor, grease, cotton, kerosene oil, and refilling the brake fluid with adjusting and bleeding of brake lining and replacing of master cylinder kit complete in all respect.	01 Complete Job	@	Per Job	Rs.
29	CH-158405 Volvo Arm Roll Repair of self assembly by means of dismantling the self replacing armature carbons and armature bushes etc and refitting the same.	01 Job	@	Per Job	Rs.
30	P/F Complete New Radiator Assembly with top / bottom inlet and outlet connections complete in all respect.	01 Job	@	Per Job	Rs.
31	TT-09 Dismantling the complete Engine Assemblies to carry out the repairing / overhauling work. which Includes the cost of lath machine work i.e. facing, polishing work of head piece, including dismantling the valve, valve seats, valve guides, Sleeves Set and Replacing the same with provided (inlet / exhaust) valve, valve seats, valve guides including polishing and fitting of main and big-end piece of block object and reassembling the same. The job also includes the cost of labour, cotton, Engine oil and kerosene oil and greasing etc as required, complete in all respect.	01 Job	@	Per Job	Rs.

Continue on next page....

S. No.	Description	Quantity	Rate	Unit	Amount
32	Engine overhauling work to be completed with repairing / replacing of following engine parts and components complete in all respect:- a) P/F Pistons Set with Pins and Locks. b) P/F Rings Set. c) P/F Connecting rods complete Set. d) P/F connecting Rod Bushes. e) P/F Main end Begin Piece. f) P/F Thrust collars Set. g) P/F timing belt & Timing gear. h) P/F Cam bushes. i) P/F Oil pump. j) P/F water Pump. k) P/F valves with seats and guides. l) P/F Full packing Kit. m) P/F all other required seals, bushes and bearings. n) P/F all other required Nut-bolts pertains to engine fittings. o) P/F Ignition coils. p) P/F point. q) P/F 03 Spark Plugs. r) P/F Distributor Wires.	01 Complete Job	@	Per Job	Rs.
33	Dismantling/ repairing and refitting of clutch portion with replacing / repairing of following parts as required. a. P/F Clutch plate. 01 No b. P/F Pressure Plate 01 No. c. Facing of fly wheel. 01 No. d. P/F Thrust bearing. 01 No.	01 Complete Job	@	Per Job	Rs.
34	R/M of Front-end bucket by means of dismantling / removing old / damaged scraper blade and M/P/F double edge front-end MS Scraper blade in same size and gage as required. The work includes the cost of repairing / welding / grinding of side panes and as per instructions of EI.	01 Job	@	Per Job	Rs.
35	<u>CH-107429 Shehzore</u> Repair / Maintenance of fuel injection pump by means of dismantling, servicing / replacing / repairing unserviceable / washed out plungers, injectors, nozzles, bearings, seal kit and packing kit and refitting the same as required.	01 Job	@	Per Job	Rs.
36	Wheel Servicing / Brake repairing of both side 04 wheels by means of dismantling wheel drums, replacing Cylinder pistons, cylinder kits, brake shoe and worn down bearings etc and refitting the same. The work includes the cost of labor, grease, cotton, kerosene oil, and refilling the brake fluid with adjusting and bleeding of brake lining and replacing of master cylinder kit complete in all respect.	01 Complete Job	@	Per Job	Rs.

Continue on next page.....

S. No.	Description	Quantity	Rate	Unit	Amount
37	Repair of iron cum wooden Ladder with repairing / replacement following parts & components complete in all respect: - a) Replacement of wooden arms. 04 Nos. b) Replacement of foot steps. 24 Nos. c) Repair of revolving base by means replacement of center pin, center bush, rollers with filling & grinding work complete as required.	01 Job	@	Per Job	Rs.
38	<u>CH-1687187 Isuzu TX</u> Repair of self assembly by means of dismantling the self replacing armature carbons and armature bushes etc and refitting the same.	01 Job	@	Per Job	Rs.
39	P/F Complete New Radiator Assembly with top / bottom inlet and outlet connections complete in all respect.	01 Job	@	Per Job	Rs.
40	Repair of alternator assembly by means of dismantling the Generator replacing rectifier, armature carbons and armature bushes etc and refitting the same.	01 Job	@	Per Job	Rs.
41	P/F water pump set with following specification complete in all respect:- a) Petrol Engine / Prime mover 5.5Hp b) Pump Suction and Delivery 3" dia. c) Necessary fitting with Nut-Bolts. d) P/F handle Valve set.	01 Complete Job	@	Per Job	Rs.
42	Wheel Servicing / Brake repairing of both side 04 wheels by means of dismantling wheel drums, replacing Cylinder pistons, cylinder kits, brake shoe and worn down bearings etc and refitting the same. The work includes the cost of labor, grease, cotton, kerosene oil, and refilling the brake fluid with adjusting and bleeding of brake lining and replacing of master cylinder kit complete in all respect.	01 Complete Job	@	Per Job	Rs.

Continue on next page.....



OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

(SUMMARY OF BILL OF QUANTITIES)

I/We hereby quoted as follows:

		<u>In Figure</u>	<u>In Words</u>
01	Part .A (item based on S/R) % Below / Above	Rs.	
02	Part .B (item based on O/R)	Rs.	
Grand Total (A+B)		Rs.	

The Total amount is Rs. _____ Rupees (_____)

for the complete job for all schedule of rate & offer rates (which ever is included in the BOQ)

I/We have attached a Bid Security amounting to Rs. _____/- as per NIT in shape of pay

order bearing No. _____ dated _____ issued from _____.

(Bank)

Time Limit : 30 Calendar Days

Penalty Per Day: Rs. 1500/- per day (Max.10% of Sanctioned Cost)

Validity : 90+30 Days as per SPP Rules 2010

NOTE:

- Tender must be quoted in figure & in words both otherwise liable to be cancelled.
- All over writing & correction if any must be initialed & stamped by the bidder.
- We/I read the standard bidding Documents (Volume n-1) and available DCM Korangi and agreed to abide all of them and also provide all these documents with our signatures as & when directed.

For Office Use of DMC
Korangi

Verified BOQ by:

A.E.E (M&E) D.M.C. Korangi
 Signature with Stamp

Signature of the contractor with stamp

Address: _____



1

(124)

OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

NO: EE/M&E/DMC/K/ /2015

Dated: - _____

Tender Reference No. _____ Dated: _____

DATE OF OPENING: _____

VOLUME-II BILL OF QUANTITIES
(SINGLE STAGE ONE ENVELOPE METHOD)

**R/M of vehicles No: CH-16057, CH-21278, CH-16103, CH-10048, 161-205,
CH-2529, CH-141303, CH-21280, CH-03247, CH-1864, CH-0048, and
CH-27108 of Shah Faisal Zone DMC Korangi.**

PC Cost: - **Open Rate**

Bid Security: - **02% of Quoted Bid.**

Tender Cost: - **Rs, 1,500.00**

NOTE:

- 1) This Document contains 10 pages including this page
- 2) The Standard Terms & Condition of Bidding Documents (Volume-I) available in the office & website of DMC Korangi

Executive Engineer (M&E),
District Municipal Corporation
Korangi Karachi.

Issue to M/S. _____ P.No. _____

Dated: _____ Bank: _____ Branch: _____

Signature & Stamp of Issuing Authority.



OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

NAME OF WORK: R/M of vehicles No: CH-16057, CH-21278, CH-16103, CH-10048, 161-205, CH-2529, CH-141303, CH-21280, CH-03247, CH-1864, CH-0048, and CH-27108 of Shah Faisal Zone DMC Korangi.

Tender Reference: No. _____ **Dated :** _____

(OPEN RATE ITEMS)

S. No.	Description	Quantity	Rate	Unit	Amount
01	CH-16057 Hino FB Repair / Maintenance of gear box Assembly by means of dismantling the gear box, replacing / repairing / servicing, broken / worn down gear piece, bearings, bushes, shafts, Shifters, Counters, brass cone, shims and other parts as required and refitting the same. The work includes the cost of oil, cotton, kerosene oil etc as required.	01 Job.	@	Per Job	Rs.
02	Dismantling/ repairing and refitting of clutch portion with replacing / repairing of following parts as required. a. P/F Clutch plate. 01 No b. P/F Pressure Plate 01 No. c. Facing of fly wheel. 01 No. d. P/F Thrust bearing. 01 No.	01 Job.	@	Per Job	Rs.
03	Repair of alternator assembly by means of dismantling the Generator replacing rectifier, armature carbons and armature bushes etc and refitting the same.	01 Job.	@	Per Job	Rs.
04	P/F PTO Cable as required.	01 Job.	@	Per Job	Rs.
05	P/F Gear Cable as required.	01 Job.	@	Per Job	Rs.
06	CH-21278 Hino FF R/M of Hydraulic Pump / Tipping Gear Kit by means of dismantling the same and replacing / repairing / servicing gear, bush, spacers, seals, 'O' rings, complete repair kit and packing kit and refitting the same as required.	01 Job.	@	Per Job	Rs.
07	Repair of self assembly by means of dismantling the self replacing armature carbons and armature bushes etc and refitting the same.	01 Job.	@	Per Job	Rs.
08	Repair of alternator assembly by means of dismantling the Generator replacing rectifier, armature carbons and armature bushes etc and refitting the same.	01 Job.	@	Per Job	Rs.

Continue on next page.....

S. No.	Description	Quantity	Rate	Unit	Amount
09	CH-16103 Hino FB Dismantling/ repairing and refitting of clutch portion with replacing / repairing of following parts as required. a. P/F Clutch plate. 01 No b. P/F Pressure Plate 01 No. c. Facing of fly wheel. 01 No. d. P/F Thrust bearing. 01 No.	01 Job.	@	Per Job	Rs.
10	M/P/F Hydraulic pipe with required size and shape fittings as required.	08 Nos.		Per Job	
11	CH-10048 Hino FF Dismantling the complete Engine assemblies and reassembling the same after repairing / overhauling work. The work includes the cost of following lath machine work as required, complete in all respect: a) Boring / Fitting of liner kit set in block object. b) Facing / polishing of block and head piece surfaces. c) Dismantling the sets of valve, valve seats, valve guide and replacing the same with polishing of provided new (inlet / exhaust) head components. d) Polishing of crankshaft and fitting of main and big-end pieces on crankshaft. e) Labor charges of dismantling and fitting with cartage, oil, cotton and kerosene oil etc. f) Before fitting work all parts from engine side should be Cleaned and carbon free.	01 Job.	@	Per Job	Rs.
12	Engine Overhauling work to be completed with replacing of following washed engine parts and components as per super specifications Complete in all respect :- a) P/F Crank shaft assembly slightly used not below than 10 size down. b) P/F Liner Kit complete with the following parts and Components: i. P/F kit Sleeves set. ii. P/F Pistons Set with Pins and Locks iii. P/F Rings Set. c) P/F Connecting Rods with Bushes. d) P/F Main and Big-end pieces set. e) P/F Thrust Collars set. f) P/F Timing Piece and Timing Gears with bushes and Belt. g) P/F Valves, Valve Seats and Valve Guide set. h) P/F Cam Shafts including Cam Bushes. i) P/F Rocker Arm with complete bushes. j) P/F all other required Bushes and Bearings as required. k) P/F Oil Pump. l) P/F Water Pump. m) P/F Full Seal kit and Packing Kit. n) P/F other required size Nut-Bolts. o) P/F Engine Foundation Set (F&R) p) P/F Fan Belt.	01 Job.	@	Per Job	Rs.

Continue on next page.....

S. No.	Description	Quantity	Rate	Unit	Amount
13	Repair / Maintenance of Fuel Injection Pump by means dismantling, servicing / replacing / repairing plungers, injectors, injector nozzles, delivery valves, spacers, springs, bearings and other parts as required and refitting the same. The work includes the cost of replacing pump seal kit and pump packing kit as required.	01 Job.	@	Per Job	Rs.
14	Wheel Servicing / Brake repairing of both side 04 wheels by means of dismantling wheel drums, replacing Cylinder pistons, cylinder kits, brake shoe and worn down bearings etc and refitting the same. The work includes the cost of labor, grease, cotton, kerosene oil, and refilling the brake fluid with adjusting and bleeding of brake lining and replacing of master cylinder kit complete in all respect.	01 Job.	@	Per Job	Rs.
15	<p>161-205 Mazda T-3500 Dismantling the complete Engine assemblies and reassembling the same after repairing / overhauling work. The work Includes the cost of following lath machine work as required, complete in all respect:</p> <p>g) Boring / Fitting of liner kit set in block object. h) Facing / polishing of block and head piece surfaces. i) Dismantling the sets of valve, valve seats, valve guide and replacing the same with polishing of provided new (inlet / exhaust) head components. j) Polishing of crankshaft and fitting of main and big-end pieces on crankshaft. k) Labor charges of dismantling and fitting with cartage, oil, cotton and kerosene oil etc. l) Before fitting work all parts form engine side should be Cleaned and carbon free.</p>	01 Complete Job	@	Per Job	Rs.

Continue on next page.....

S. No.	Description	Quantity	Rate	Unit	Amount
16	<p>Engine Overhauling work to be completed with replacing of following washed engine parts and components as per super specifications Complete in all respect : -</p> <p>a) P/F Crank shaft assembly slightly used not below than 10 size down.</p> <p>b) P/F Liner Kit complete with the following parts and Components:</p> <p>i. P/F kit Sleeves set.</p> <p>ii. P/F Pistons Set with Pins and Locks</p> <p>iii. P/F Rings Set.</p> <p>c) P/F Connecting Rods with Bushes.</p> <p>d) P/F Main and Beg-end pieces set.</p> <p>e) P/F Thrust Collars set.</p> <p>f) P/F Timing Piece and Timing Gears with bushes and Belt.</p> <p>g) P/F Valves, Valve Seats and Valve Guide set.</p> <p>h) P/F Cam Shafts including Cam Bushes.</p> <p>i) P/F Rocker Arm with complete bushes.</p> <p>j) P/F all other required Bushes and Bearings as required.</p> <p>k) P/F Oil Pump.</p> <p>l) P/F Water Pump.</p> <p>m) P/F Full Seal kit and Packing Kit.</p> <p>n) P/F other required size Nut-Bolts.</p> <p>o) P/F Engine Foundation Set (F&R)</p> <p>p) P/F Fan Belt.</p>	01 Complete Job	@	Per Job	Rs.
17	<p>Repair / Maintenance of Fuel Injection Pump by means dismantling, servicing / replacing / repairing plungers, injectors, injector nozzles, delivery valves, spacers, springs, bearings and other parts as required and refitting the same. The work includes the cost of replacing pump seal kit and pump packing kit as required.</p>	01 Job.	@	Per Job	Rs.
18	<p>Repair of alternator assembly by means of dismantling the Generator replacing rectifier, armature carbons and armature bushes etc and refitting the same.</p>	01 Job.	@	Per Job	Rs.

Continue on next page.....

S. No.	Description	Quantity	Rate	Unit	Amount
19	<p>CH-141303 Shehzore Open Truck Dismantling the complete Engine assemblies and reassembling the same after repairing / overhauling work. The work Includes the cost of following lath machine work as required, complete in all respect:</p> <p>a) Boring / Fitting of liner kit set in block object. b) Facing / polishing of block and head piece surfaces. c) Dismantling the sets of valve, valve seats, valve guide and replacing the same with polishing of provided new (inlet / exhaust) head components. d) Polishing of crankshaft and fitting of main and big-end pieces on crankshaft. e) Labor charges of dismantling and fitting with cartage, oil, cotton and kerosene oil etc. a) Before fitting work all parts form engine side should be Cleaned and carbon free.</p>	01 Complete Job	@	Per Job	Rs.
20	<p>Engine Overhauling work to be completed with replacing of following washed engine parts and components as per super specifications Complete in all respect :-</p> <p>a) P/F Crank shaft assembly slightly used not below than 10 size down. b) P/F Liner Kit complete with the following parts and Components: i) P/F Kit Sleeves set. ii) P/F Pistons Set with Pins and Locks iii) P/F Rings Set. c) P/F Connecting Rods with Bushes. d) P/F Main and Beg-end pieces set. e) P/F Thrust Collars set. f) P/F Timing Piece and Timing Gears with bushes and Belt. g) P/F Valves, Valve Seats and Valve Guide set. h) P/F Cam Shafts including Cam Bushes. i) P/F Rocker Arm with complete bushes. j) P/F all other required Bushes and Bearings as required. k) P/F Oil Pump. l) P/F Water Pump. m) P/F Full Seal kit and Packing Kit. n) P/F other required size Nut-Bolts. o) P/F Engine Foundation Set (F&R) p) P/F Fan Belt.</p>	01 Complete Job	@	Per Job	Rs.

Continue on next page.....

S. No.	Description	Quantity	Rate	Unit	Amount
21	Repair / Maintenance of Fuel Injection Pump by means dismantling, servicing / replacing / repairing plungers, injectors, injector nozzles, delivery valves, spacers, springs, bearings and other parts as required and refitting the same. The work includes the cost of replacing pump seal kit and pump packing kit as required.		@	Per Job	Rs.
22	Wheel Servicing / Brake repairing of both side 04 wheels by means of dismantling wheel drums, replacing Cylinder pistons, cylinder kits, brake shoe and worn down bearings etc and refitting the same. The work includes the cost of labor, grease, cotton, kerosene oil, and refilling the brake fluid with adjusting and bleeding of brake lining and replacing of master cylinder kit complete in all respect.	01 Job.	@	Per Job	Rs.
23	Repair of self assembly by means of dismantling the self replacing armature carbons and armature bushes etc and refitting the same.	01 Job.	@	Per Job	Rs.
24	Repair of alternator assembly by means of dismantling the Generator replacing rectifier, armature carbons and armature bushes etc and refitting the same.	01 Job.	@	Per Job	Rs.
25	Servicing of Radiator by means opening from top and bottom sides, cleaning all slide and soldering from the leak portion and refitting as required	01 Job.	@	Per Job	Rs.
26	P/F 130amp Battery with Battery Terminals as required.	01 Job.	@	Per Job	Rs.
27	CH-21280 Multi Loader Repair / Maintenance of both Sides 04 Springs Leaf sets, with repairing / replacing of following parts and components and refitting the same as required. i) Replacement Broken Spring Leafs. ii) Replacement of Leaf Bracts. iii) Replacement of Center Bolts. iv) Replacement of U-Clamps. v) Replacement of Leaf Bushes. vi) Replacement of Center Pin / Leaf Pin.	01 Job.	@	Per Job	Rs.

Continue on next page.....

S. No.	Description	Quantity	Rate	Unit	Amount
28	<p>CH-03247 UD Nissan Dismantling the complete Engine assemblies and reassembling the same after repairing / overhauling work. The work includes the cost of following lath machine work as required, complete in all respect:</p> <p>a) Boring / Fitting of liner kit set in block object. b) Facing / polishing of block and head piece surfaces. c) Dismantling the sets of valve, valve seats, valve guide and replacing the same with polishing of provided new (inlet / exhaust) head components. d) Polishing of crankshaft and fitting of main and big-end pieces on crankshaft. e) Labor charges of dismantling and fitting with cartage, oil, cotton and kerosene oil etc. f) Before fitting work all parts from engine side should be cleaned and carbon free.</p>	01 Job.	@	Per Job	Rs.
29	<p>Engine Overhauling work to be completed with replacing of following washed engine parts and components as per super specifications Complete in all respect :-</p> <p>b) P/F Crank shaft assembly slightly used not below than 10 size down. c) P/F Liner Kit complete with the following parts and Components: i. P/F kit Sleeves set. ii. P/F Pistons Set with Pins and Locks iii. P/F Rings Set. d) P/F Connecting Rods with Bushes. e) P/F Main and Big-end pieces set. f) P/F Thrust Collars set. g) P/F Timing Piece and Timing Gears with bushes and Belt. h) P/F Valves, Valve Seats and Valve Guide set. i) P/F Cam Shafts including Cam Bushes. j) P/F Rocker Arm with complete bushes. k) P/F all other required Bushes and Bearings as required. l) P/F Oil Pump. m) P/F Water Pump. n) P/F Full Seal kit and Packing Kit. o) P/F other required size Nut-Bolts. q) P/F Engine Foundation Set (F&R) r) P/F Fan Belt.</p>	01 Job.	@	Per Job	Rs.
30	<p>CH-1864 Hino Repair of self assembly by means of dismantling the self replacing armature carbons and armature bushes etc and refitting the same.</p>	01 Job.	@	Per Job	Rs.
31	<p>Repair of alternator assembly by means of dismantling the Generator replacing rectifier, armature carbons and armature bushes etc and refitting the same.</p>	01 Job.	@	Per Job	Rs.

Continue on next page.....

S. No.	Description	Quantity	Rate	Unit	Amount
32	Dismantling/ repairing and refitting of clutch portion with replacing / repairing of following parts as required. i. P/F Clutch plate. 01 No. ii. P/F Pressure Plate 01 No. iii. Facing of fly wheel. 01 No. iv. P/F Thrust bearing. 01 No.	01 Job.	@	Per Job	Rs.
33	Wheel Servicing / Brake repairing of both side 04 wheels by means of dismantling wheel drums, replacing Cylinder pistons, cylinder kits, brake shoe and worn down bearings etc and refitting the same. The work includes the cost of labor, grease, cotton, kerosene oil, and refilling the brake fluid with adjusting and bleeding of brake lining and replacing of master cylinder kit complete in all respect.	01 Job.	@	Per Job	Rs.
34	CH-0048 Tractor Trolley Repair of Hydraulic lift cylinder assembly by means dismantling the cylinder replacing oil seals, jack pistons, 'O' rings and refitting the same as required.	04 Jobs.	@	Per Job	Rs.
35	CH-2592 Loader R/M of Front-end bucket by means of dismantling / removing old / damaged scraper blade and M/P/F double edge front-end MS Scraper blade in same size and gage as required. The work includes the cost of repairing / welding / grinding of side panes and as per instructions of EI.	01 Job	@	Per Job	Rs.
36	M/P/F Hydraulic pipe with required size and shape fittings as required.	08 Nos.	@	Per Job	Rs.
37	CH-27108 Loader R/M of Front-end bucket by means of dismantling / removing old / damaged scraper blade and M/P/F double edge front-end MS Scraper blade in same size and gage as required. The work includes the cost of repairing / welding / grinding of side panes and as per instructions of EI.	01 Job	@	Per Job	Rs.

Continue on next page.....



OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

(SUMMARY OF BILL OF QUANTITIES)

I/We hereby quoted as follows:		<u>In Figure</u>	<u>In Words</u>
01	Part .A (item based on S/R) % Below / Above	Rs.	
02	Part .B (item based on O/R)	Rs.	
Grand Total (A+B)		Rs.	

The Total amount is Rs. _____ Rupees (_____)

for the complete job for all schedule of rate & offer rates (which ever is included in the BOQ)

I/We have attached a Bid Security amounting to Rs. _____/- as per NIT in shape of pay order bearing No. _____ dated _____ issued from _____.

(Bank)

Time Limit : 30 Calendar Days

Penalty Per Day: Rs. 1500/- per day (Max.10% of Sanctioned Cost)

Validity : 90+30 Days as per SPP Rules 2010

NOTE:

- Tender must be quoted in figure & in words both otherwise liable to be cancelled.
- All over writing & correction if any must be initialed & stamped by the bidder.
- We/I read the standard bidding Documents (Volume n-I) and available DCM Korangi and agreed to abide all of them and also provide all these documents with our signatures as & when directed.

For Office Use of DMC
Korangi

Verified BOQ by:

A.E.E (M&E) D.M.C. Korangi
Signature with Stamp

Signature of the contractor with stamp

Address: _____



1
125

OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

NO: EE/M&E/DMC/K/ /2015

Dated: - _____

Tender Reference No. _____ Dated: _____

DATE OF OPENING: _____

VOLUME-II BILL OF QUANTITIES
(SINGLE STAGE ONE ENVELOPE METHOD)

Fabrication of Garbage Containers for the vehicles of Health
Services Department DMC Korangi.

PC Cost: -	Open Rate
Bid Security: -	02% of Quoted Bid.
Tender Cost: -	Rs, 3,000.00

NOTE:

- 1) This Document contains 18 pages including this page
- 2) The Standard Terms & Condition of Bidding Documents (Volume-I) available in the office & website of DMC Korangi

Executive Engineer (M&E),
District Municipal Corporation
Korangi Karachi.

Issue to M/S. _____ P.No. _____

Dated: _____ Bank: _____ Branch: _____

Signature & Stamp of Issuing Authority.



OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

NAME OF WORK: Fabrication of Garbage Containers for the vehicles of Health Services
Department DMC Korangi.

Tender Reference: No. _____ **Dated:** _____

(OPEN RATE ITEMS)

S. No.	Description	Quantity	Rate	Unit	Amount
01	Fabrication of garbage containers For Hino FF Multi-Loaders as per provided sketches / diagrams, weight calculations chart identified for gauge, length, width and height complete in all respect, as per instructions of Engineer Incharge.	12 Complete Job.	@	Per Job	Rs.



OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

(SUMMARY OF BILL OF QUANTITIES)

I/We hereby quoted as follows:		<u>In Figure</u>	<u>In Words</u>
01	Part .A (item based on S/R) % Below / Above	Rs.	
02	Part .B (item based on O/R)	Rs.	
Grand Total (A+B)		Rs.	

The Total amount is Rs. _____ Rupees (_____)

for the complete job for all schedule of rate & offer rates (which ever is included in the BOQ)

I/We have attached a Bid Security amounting to Rs. _____/- as per NIT in shape of pay order bearing No. _____ dated _____ issued from _____.
(Bank)

Time Limit : 30 Calendar Days

Penalty Per Day: Rs. 3000/- per day (Max.10% of Sanctioned Cost)

Validity : 90+30 Days as per SPP Rules 2010

NOTE:

- Tender must be quoted in figure & in words both otherwise liable to be cancelled.
- All over writing & correction if any must be initialed & stamped by the bidder.
- We/I read the standard bidding Documents (Volume n-I) and available DCM Korangi and agreed to abide all of them and also provide all these documents with our signatures as & when directed.

For Office Use of DMC
Korangi

Verified B/Q by:

A.E.E (M&E) D.M.C. Korangi
Signature with Stamp

Signature of the contractor with stamp

Address: _____



126

OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

NO: EE/M&E/DMC/K/ /2015

Dated: - _____

Tender Reference No. _____ Dated: _____

DATE OF OPENING: _____

VOLUME-II BILL OF QUANTITIES
(SINGLE STAGE ONE ENVELOPE METHOD)

**P/F 30 KVA Electric Generator with sound proof canopy and
other Electrical Accessories for Shah Faisal Zone DMC Korangi.**

PC Cost: -	Open Rate
Bid Security: -	02% of Quoted Bid.
Tender Cost: -	Rs, 3,000.00

NOTE:

- 1) This Document contains 03 pages including this page
- 2) The Standard Terms & Condition of Bidding Documents
(Volume-I) available in the office & website of DMC Korangi

Executive Engineer (M&E),
District Municipal Corporation
Korangi Karachi

Issue to M/S. _____ P.No. _____

Dated: _____ Bank: _____ Branch: _____

Signature & Stamp of Issuing Authority.



OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

NAME OF WORK: P/F 30 KVA Electric Generator with sound proof canopy and other Electrical Accessories for Shah Faisal Zone DMC Korangi.

Tender Reference: No. _____ **Dated:** _____

(OPEN RATE ITEMS)

S. No.	Description	Quantity	Rate	Unit	Amount
01	Providing & Fixing 30KVA / 24KW Electric Generator set @1500 RPM water cooled Prime mover (Diesel) packed with radiator 50 °C coupled with Air Cooled 0.8 P.F, 50Hz 380 / 440 Volt AC Alternator along with sound proof MS canopy of suitable size and gauge with air shutters, display meters, circuit breaker and bus bar connections to accommodate complete generator set and accessories complete in all respect.	01 Set.	@	Per Set.	Rs.
02	Providing & laying (MAIN or SUB MAIN) PVC insulated & PVC sheathed with 4-Core copper conductor 600/1000 volts size 35mm ²	50 Meters	@	Per Mtr.	Rs.
03	Providing & laying (MAIN or SUB MAIN) PVC insulated & PVC sheathed with single core copper conductor 300/500 volts size 2-7/064.	90 Meters	@	Per Mtr.	Rs.
04	Providing & fixing 4-pole change over switch 500 Volts 200amp on a prepared wooden board on surface as per instructions of E.I.	01 No.	@	Per No.	Rs.
05	Earthing of Generator Set as per following specifications complete in all respect. i. Manual Boring / Machine drilling 8" Dia approximately 100ft deep and refilling the same. ii. P/F Earthing Electrode 1" dia 5ft Long with Brass nut-bolts and earthing material (Solid Coal, Salt and Lime Powder etc). iii. P/L 25mm ² Beard copper conductor 2X110ft. iv. P/F 6-Pole Bus Bar 100-Amps.	01 Complete Job.	@	Per Job.	Rs.
06	Construction of CC Foundation pad at ground with allied material suitable / sufficient for 30-KVA genset complete in all respect.	01 Job.	@	Per Job.	Rs.

Rs. _____



OFFICE OF THE EXECUTIVE ENGINEER, (M&E)
DISTRICT MUNICIPAL CORPORATION KORANGI, KARACHI.

(SUMMARY OF BILL OF QUANTITIES)

I/We hereby quoted as follows:		<u>In Figure</u>	<u>In Words</u>
01	Part .A (item based on S/R) % Below / Above	Rs.	
02	Part .B (item based on O/R)	Rs.	
Grand Total (A+B)		Rs.	

The Total amount is Rs. _____ Rupees (_____)

for the complete job for all schedule of rate & offer rates (which ever is included in the BOQ)

I/We have attached a Bid Security amounting to Rs. _____/- as per NIT in shape of pay order bearing No. _____ dated _____ issued from _____.

(Bank)

Time Limit : 30 Calendar Days

Penalty Per Day: Rs. 1500/- per day (Max.10% of Sanctioned Cost)

Validity : 90+30 Days as per SPP Rules 2010

NOTE:

- Tender must be quoted in figure & in words both otherwise liable to be cancelled.
- All over writing & correction if any must be initialed & stamped by the bidder.
- We/I read the standard bidding Documents (Volume n-1) and available DCM Korangi and agreed to abide all of them and also provide all these documents with our signatures as & when directed.

For Office Use of DMC
Korangi

Verified BOQ by:

A.E.E (M&E) D.M.C. Korangi
 Signature with Stamp

Signature of the contractor with stamp

Address: _____
