

**CONSTRUCTION OF 65 RFT HIGHT RAPPELLING TOWER OF PTC SAEEDABAD  
KARACHI (AS PER DRAWING.)**

**SCHEDULE BOOK DOCUMENT**



S.NO	DESCRIPTION	QTY	UNITS	RATE	AMOUNT
1.	Excavation as in H/ Soil up to 1.5 m depth in foundation and pipe trenches, holes up to 1.5 m wide, in shafts, well and independent holes up to 30 sqm each and throw earth clear of edges of excavation within 10m all as specified.	2257.00	CFT		
2.	Providing and laying of 6" stone soling as laying in foundation all as specified.	337.00	CFT		
3.	Providing and laying of CC type B 1:4:8, using crushed and broken stone graded as specified.	262.00	CFT		
4.	Providing and laying of RCC type A 1:1/2:3, as in raft foundation using crushed and broken stone graded as specified. USING SULPHATE RESISTANCE CEMENT all as specified.	450.00	CFT		
5.	Providing and laying of RCC type A 1:1/2:3, as in RCC COLUMNS using crushed and broken stone graded as specified. USING SULPHATE RESISTANCE CEMENT all as specified.	630.00	CFT		
6.	Providing and laying of RCC type B 1:2:4, as in RCC BEAMS/SLAB/PARDI WALL using crushed and broken stone graded as specified.	1438.00	CFT		
7.	Earth filling as in ordinary or hard soil filling in foundation pipe trenches, shafts, wells independents holes, under floors or around plinth etc. 1.5m below or above, ground level (GL), with spoil obtained from excavation in trenches / over areas within 10m including water and compaction in 150mm layer and dressing to required profile and shape.	2050.00	CFT		
8.	Providing and laying 19MM thick cement plaster 1:4 all as specified.	3914.00	SFT		
9.	Providing and laying of two coats of enamel paint as in plastered wall and iron work after the preparation of surface.	5414.00	SFT		
10	Providing and laying of CC flooring 2" to 2.5" thick smooth surface with steel trowel all as	281.00	CFT		

11.	Providing and fixing of steel railing and steel stair using 2" M/S pipe for railing and heavy gauge iron bars for stairs/ladders all as specified.	1500.00	KG		
12.	Providing and laying of steel bars round using ribbed or tor steel including cutting, binding, bending and placing all as specified.	6000.00	KG		
13.	Electrical work such as new points complete with lights, wiring, switch boards etc. using 3.29&7.29 wire from main and orange made box, switch ,socket, power plugs(Clipsal)all as specified.	L/S	POINT		
14.	Construction of sitting area shade complete with ,platform, stair.(stadium/pavilion type all as specified.(finished as A quality)complete job.	2500.00	SFT		
<b>TOTAL</b>					
<b>SAY AMOUNT IN MILLION</b>					




*Russol*

**SUB ENGINEER  
WORKS DEPARTMENT**

**CONSTRUCTION OF 40 RFT HIGHT RAPPELLING TOWER OF PTC SAEEDABAD  
KARACHI (AS PER DRAWING.)**

**SCHEDULE BOOK DOCUMENT**





S.NO	DESCRIPTION	QTY	UNITS	RATE	AMOUNT
1.	Excavation as in H/ Soil up to 1.5 m depth in foundation and pipe trenches, holes up to 1.5 m wide, in shafts, well and independent holes up to 30 sqm each and throw earth clear of edges of excavation within 10m all as specified.	3259.00	CFT		
2.	Providing and laying of 6" stone soling as laying in foundation all as specified.	294.00	CFT		
3.	Providing and laying of CC type B 1:4:8, using crushed and broken stone graded as specified.	163.00	CFT		
4.	Providing and laying of RCC type A 1:1/2:3, as in raft foundation using crushed and broken stone graded as specified. USING SULPHATE RESISTANCE CEMENT all as specified.	438.00	CFT		
5.	Providing and laying of RCC type A 1:1/2:3, as in RCC COLUMNS using crushed and broken stone graded as specified. USING SULPHATE RESISTANCE CEMENT all as specified.	445.00	CFT		
6.	Providing and laying of RCC type B 1:2:4, as in RCC BEAMS/SLAB/PARDI WALL using crushed and broken stone graded as specified.	630.00	CFT		
7.	Earth filling as in ordinary or hard soil filling in foundation pipe trenches, shafts, wells independents holes, under floors or around plinth etc. 1.5m below or above, ground level (GL), with spoil obtained from excavation in trenches / over areas within 10m including water and compaction in 150mm layer and dressing to required profile and shape.	1620.00	CFT		
8.	Providing and laying 19MM thick cement plaster 1:4 all as specified.	1844.00	SFT		
9.	Providing and laying of two coats of enamel paint as in plastered wall and iron work after the preparation of surface.	2860.00	SFT		
10.	Providing and laying of CC flooring 2" to 2.5"	191.00	CFT		

	specified.				
11.	Providing and fixing of steel railing and steel stair using 2" M/S pipe for railing and heavy gauge iron bars for stairs/ladders all as specified.	455.00	KG		
12.	Providing and laying of steel bars round using ribbed or tor steel including cutting, binding, bending and placing all as specified.	4200.00	KG		
13.	Electrical work such as new points complete with lights, wiring, switch boards etc. using 3.29&7.29 wire from main and orange made box, switch, socket, power plugs(Clipsal) all as specified.	L/S	POINT		
<b>TOTAL</b>					
<b>SAY AMOUNT IN MILLION</b>					



*Rizwan Hussain*  
**RIZWAN HUSSAIN**  
**WORKS DEPARTEMENT**

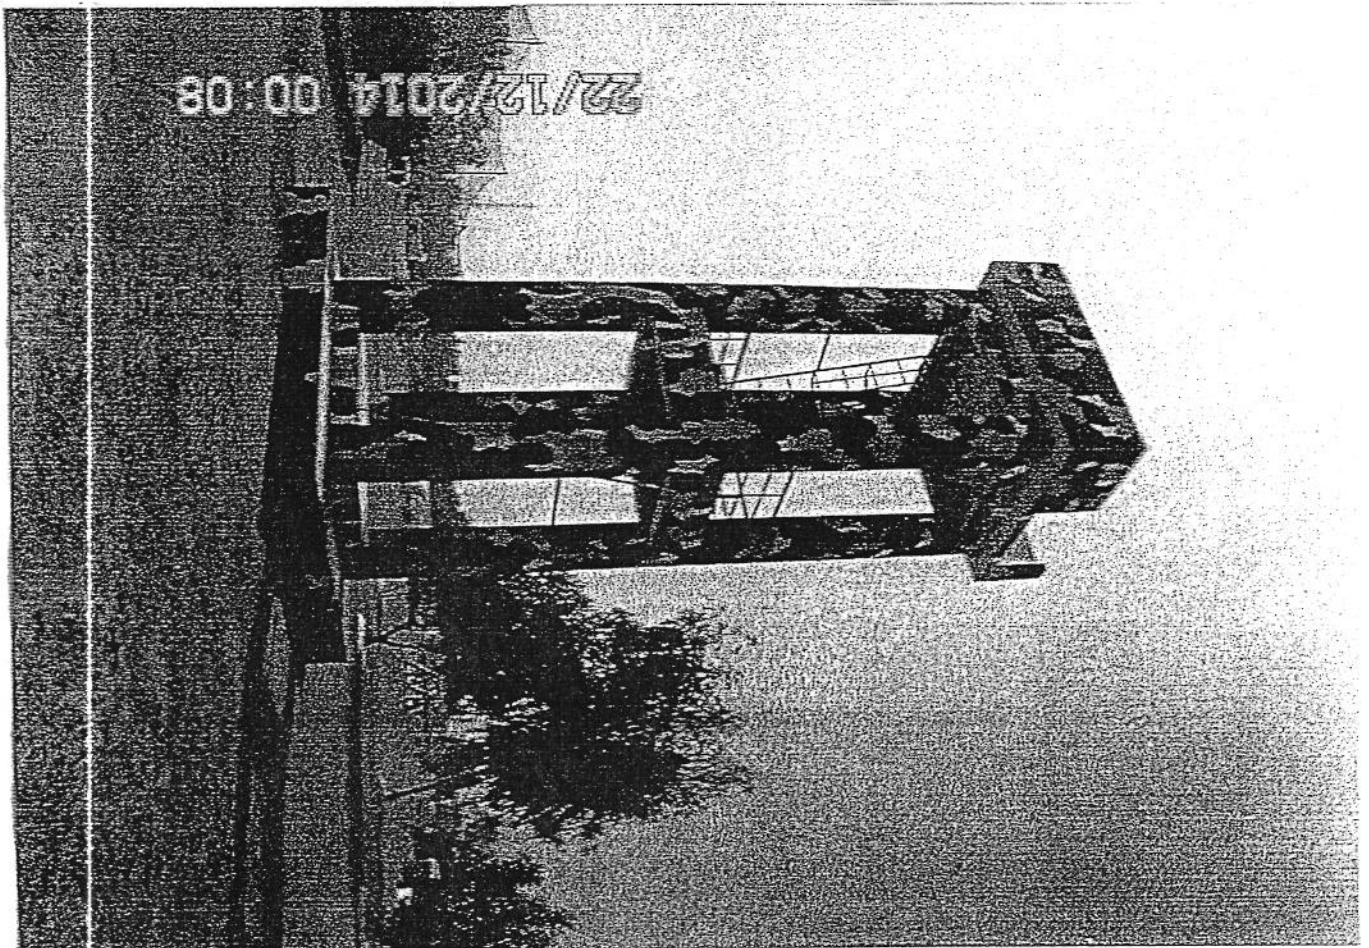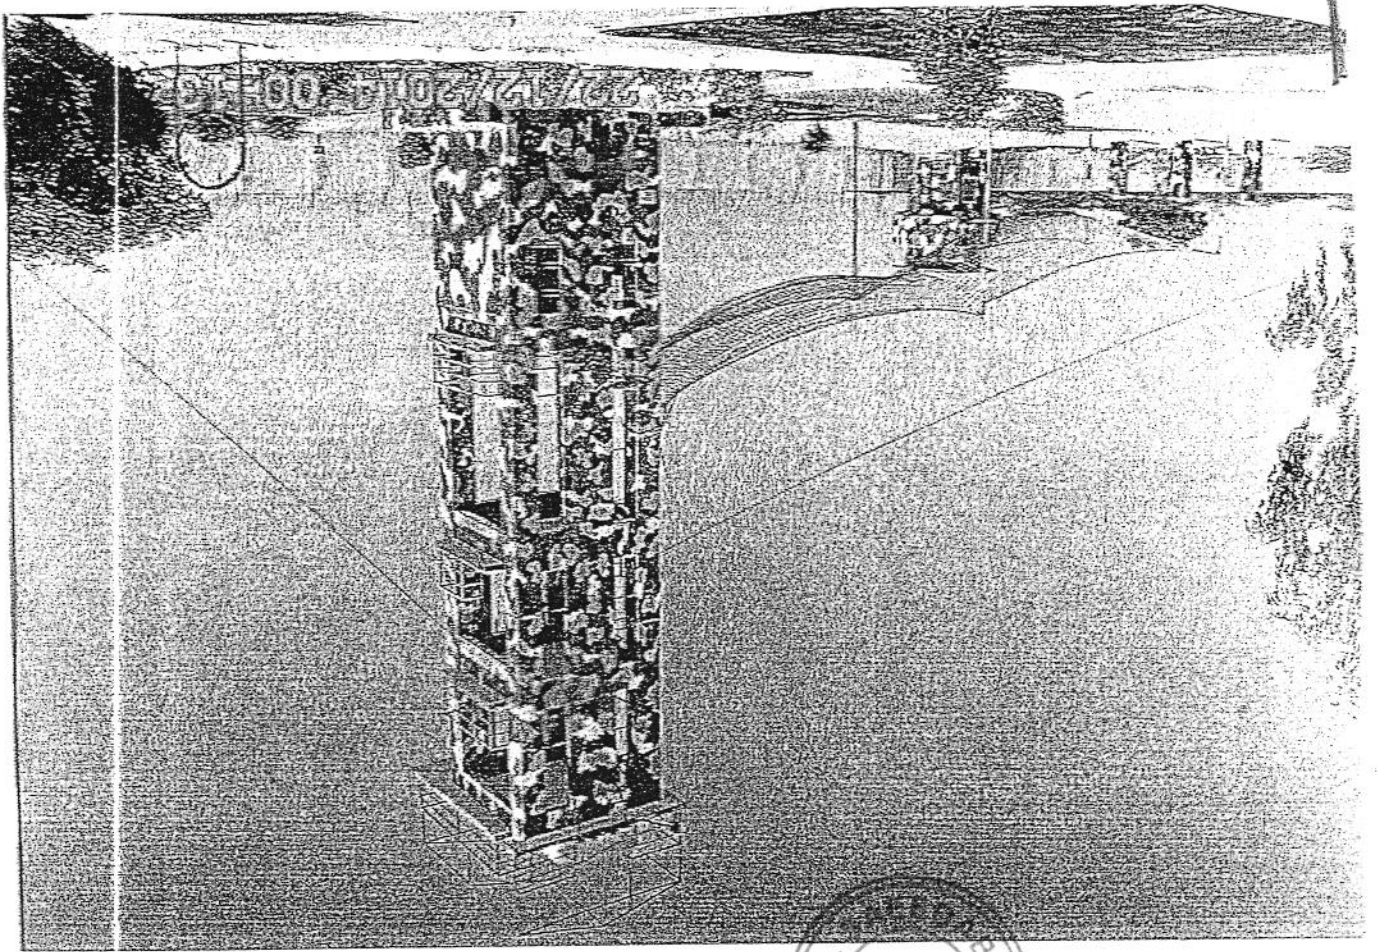

P.T.C. SAEEDABAD  
PRINCIPAL  
KARACHI

