



03/01 (4)

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI
PTCL # 36697869 / 36660102 & FAX # 36762519

TENDER REFERENCE // NIT/ **3** 2015

Dated: **1-12-2015**

SUBJECT: Improvement of sewerage system by repairing of damage portion of pipe near Usman-e-Ghani masjid in UC-01

BILL OF QUANTITIES

ESTIMATED COST
BID SECURITY
TENDER COST

RS. 8,28,800.00+OR
RS. 16575.00
RS. 1,000.00

Issued to M/S _____
Video pay order / Challan // _____ dated: _____ Rs. _____

Signature and stamp


Executive Engineer
Building & Roads
Karachi West



DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI

SUBJECT: Improvement of sewerage system by repairing of damage portion of pipe near Usman-e-Ghani masjid in UC-01

PART-A ITEM BASED ON SCHEDULE RATES

S #	DESCRIPTION	QUANTITY	UNIT	RATES	AMOUNT
01	Dismantling of cement concrete plain flooring	2418 cft	cft	3327.50 % cft	80459.00
02	Excavation for pipe line in trenches and pits in all kind of soils of murum i/c trimming and dressing sides to true alignment and shape leveling of beds trenches to correct level and grade cutting joints holes and disposal of surplus earth within one chain as directed by engineer in charge	4875	cft	4650.00 0%cft	22669.00
03	P/L RCC rubber ring pipe of class A and fixing in trenches i/c cutting, fitting and jointing with rubber ring etc 15" dia pipe	600 Rft	Rft	436.00	261600.00
04	Construction of manhole 4' dia inside i/c RCC ring slab 39" dia with manhole cover 21" dia of 5' clear depth in 1:2:4 in 9" thick wall and bedding cast in situ with fair face steel shuttering i/c excavation back filling and dispose of surplus stuff up to one chain its complete	25 Nos	Each	13064.00	326600.00
05	Add for extra depth beyond 5 ft depth less the 5 ft deduct the same rate	(-) 43.75	Rft	1540.00	(-) 67375.00
06	Refilling of excavation stuff in trenches 6" this compacting at all lead and lift	3815 cft	Cft	2760.00 0%cft	10529.00
07	Cartage of sand, bajri, lime surki murum building rubbish i/c loading and unloading and stacking at site	16428 cft	cft	1065.00% cft	174958.00
08	Earth work excavation in irrigation channels irrigation drain etc dressed to designed section and profile excavated materials deosed off and dressed with in 50 ft	8000 cft	cft	2420.00 %0 cft	19360.00
SUB TOTAL PART-A					828800.00 + OR

SIGNATURE OF CONTRACTOR

ADDRESS : _____

6

SUBJECT: Improvement of sewerage system by repairing of damage portion of pipe near Usman-e-Ghani masjid in UC-01

PART-B ITEM BASED ON OFFER RATES

S #	DESCRIPTION	QUANTITY	RATES	AMOUNT
01	P/L Aggregate base course material over the prepared sub grade in conformity with lines grade thickness and typical cross section shown in drawing for new pavement using well graded granular crushed stoen with asandand silt having a smooth gradation curve with tin the limit for grading A or B as per AASHTO M 142-62 and compacting to 100% of the minimum dry density accorign to AASHTO-T 180 method D using approved m\chanical means of i/c watering with all lead and lift as per specification and as per directed by engineer in charge	2200 cft	OR RS	
02	Imported earth within the radius of 5 miles i/d digging loading and unloading and stacking at site i/c leveling and compaction etc complete	2400 cft	OR Rs.	
SUB TOTAL PART-B				

SIGNATURE OF CONTRACTOR

I / WE HEREBY QUOTED RATES AS FOLLOWS:-

01	PART-A (ITEM RATES BASES ON SR) @ _____ % ABOVE / BELOW SR I/C THE COST OF CARRIAGE OF MATERIALS AND DIFFERENCE OF COST OF BITUMEN	RS. _____
02	PART-B (ITEM RATE BASES ON OFFER RATES / ITEM RATES THE ITEMS OTHER THEN SCHEDULE RATES	RS.- _____
GRAND TOTAL PART-A & B		RS. _____

TOTAL RS. _____ RUPEES _____

Signature of contractor _____

Address : _____

Cell # _____ / PTCL # _____

⑦
02/02

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI
PTCL # 36697869 / 36660102 & FAX # 36762519

TENDER REFERENCE # NIT/ 3 2015

Dated: 1-12-2015

SUBJECT: Repair and maintenance of ce street in front of Hanifa medical clinic and KS # 2335 in UC-07


BILL OF QUANTITIES

ESTIMATED COST
BID SECURITY
TENDER COST

RS. 6,49,100.00+OR
RS. 12988.00
RS. 1,000.00

Issued to M/S _____
Video pay order / Challan # _____ dated: _____ Rs. _____

Signature and stamp


Executive Engineer
Building & Roads
Orangi Phase D.M.C. (West)

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI

SUBJECT: Repair and maintenance of cc street in front of Hanifa medical clinic and KS # 2335 in UC-
07PART-A ITEM BASED ON SCHEDULE RATES

S #	DESCRIPTION	QUANTITY	UNIT	RATES	AMOUNT
01	Dismantling of cement concrete plain flooring	1024 cft	cft	3327.50 % cft	34074.00
02	Dismantling of cement concrete floiorngn 1:2:4 plain	1149 cft	cft	1306.80% cft	15016.00
03	Preparing of sub grade i/c earth excavation leveling to an average depth of 9" dressing to camber and consolidation with power roller	9000 sft	% sft	526.28	47366.00
04	P/L 2" topping CC 1:2:4 i/c surface finishing and dividing to panels	9000 sft	sft	3275.50 %sft	294795.00
05	Excavation for pipe line in trenches and pits i/c trimming and dressing sides to true alignment and shape leveling of beds trenches to correct level and grade cutting joints holes and disposal of surplus earth within one chain as directed by engineer in charge	750	cft	4650.00 0%cft	3488.00
06	Excavation for pipe line in trenches and pits in in hard rock by hammering and chieilling i/c alignment and shape to level and grade cutting joint holes etc to correct level and grade cutting joints holes and disposal of surplus earth within one chain as directed by engineer in charge	1125	cft	24510.00 0%cft	27574.00
07	P/L RCC rubber ring pipe of class A and fixing in trenches i/c cutting, fitting and jointing with rubber ring etc 15" dia pipe	250 Rft	Rft	367.00	91750.00
08	Construction of manhole 4' dia inside i/c RCC ring slab 39" dia with manhole cover 21" dia of 5' clear depth in 1:2:4 in 9" thick wall and bedding cast in situ with fair face steel shuttering i/c excavation back filling and dispose of surplus stuff up to one chain its complete	11 Nos	Each	13064.00	143704.00
09	Add for extra depth beyond 5 ft depth less the 5 ft deduct the same rate	(-) 22	Rft	1540.00	(-)33880.00
10	Refilling of excavation stuff in trenches 6" this compacting at all lead and lift	750 cft	Cft	2760.00 0%cft	2070.00
11	Cartage of sand, bajri, lime surki murum building rubbish i/c loading and unloading and stacking at site	2173 cft	cft	1065.00% cft	23143.00
SUB TOTAL PART-A					649100.00 + OR

SIGNATURE OF CONTRACTOR

SUBJECT: Repair and maintenance of ce street in front of Hanifa medical clinic and KS # 2335 in UC-07
PART-B ITEM BASED ON OFFER RATES

S #	DESCRIPTION	QUANTITY	RATES	AMOUNT
01	P/L Aggregate base course material over the prepared sub grade in conformity with lines grade thickness and typical cross section shown in drawing for new pavement using well graded granular crushed stoen with asandand silt having a smooth gradation curve with tin the limit for grading A or B as per AASHTO M 142-62 and compacting to 100% of the minimum dry density accorign to AASHTO-T 180 method D using approved m\chanical means of i/c watering with all lead and lift as per specification and as per directed by engineer in charge	3780 cft	OR RS	
02	Imported earth within the radius of 5 miles i/d digging loading and unloading and stacking at site i/c leveling and compaction etc complete	1136 cft	OR Rs.	
03	.P/L Granular sub base course material over prepared sub grade in conformity with line grade thickness and typical cross sections shown in drawing for new pavement at grade widening existing pavement using well graded granular crushed stone with and all silt having a smooth gradation curve with in the limit for grading C or I as per AASHTO-M 180 method D using approved mechanical means or i/c watering with all lead and lift as per specification and as per direction of Engineer incharge	1980 cft	OR Rs	
04	Extra for using SR cement in place of OPC	245 cwt	OR Rs.	
SUB TOTAL PART-B				

SIGNATURE OF CONTRACTOR _____

I / WE HEREBY QUOTED RATES AS FOLLOWS:-

01	PART-A (ITEM RATES BASES ON SR) @ _____ % ABOVE / BELOW SR I/C THE COST OF CARRIAGE OF MATERIALS AND DIFFERENCE OF COST OF BITUMEN	RS. _____
02	PART B (ITEM RATE BASES ON OFFER RATES / ITEM RATES THE ITEMS OTHER THEN SCHEDULE RATES	RS.- _____
GRAND TOTAL PART-A & B		RS. _____

TOTAL RS. _____ RUPEES _____

Signature of contractor _____

Address : _____

Cell # _____ / PTCL # _____

(10) 03/03

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI
PTCL # 36697869 / 36660102 & FAX # 36762519

TENDER REFERENCE # NIT/ 3 2015

Dated: 1-12-2015

SUBJECT: Rehabilitation of sewerage system wisdom grammar school and PMT to main road and Khalidad
In UC-07


BILL OF QUANTITIES

ESTIMATED COST
BID SECURITY
TENDER COST

RS. 8,93,835.00 +OR
RS. 17877.00
RS. 1,000.00

Issued to M/S _____
Video pay order / Challan # _____ dated: _____ Rs. _____

Signature and stamp


Executive Engineer
Building & Works
District Municipal Corporation
Karachi West

3/3

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI

SUBJECT: Rehabilitation of sewerage system wisdom grammar school and PMT to main road and Khalid.
In UC-07

PART-A ITEM BASED ON SCHEDULE RATES

S #	DESCRIPTION	QUANTITY	UNIT	RATES	AMOUNT
01	Dismantling of cement concrete floor ngn 1:2:4 plain	315 cft	cft	3327.50	10482.00
02	Excavation for pipe line in trenches and pits i/c trimming and dressing sides to true alignment and shape leveling of beds trenches to correct level and grade cutting joints holes and disposal of surplus earth within one chain as directed by engineer in charge	5063	cft	4650.00 0 %cft	23543.00
03	Excavation for pipe line in in hard rock by hammering and chiseling etc alignment and shape leveling of beds trenches to correct level and grade cutting joints holes and disposal of surplus earth within one chain as directed by engineer in charge	3938	cft	24510.00 0%cft	96520.00
04	P/L RCC rubber ring pipe of class A and fixing in trenches i/c cutting, fitting and jointing with rubber ring etc 12" dia pipe	900 Rft	Rft	367.00	330300.00
05	Construction of manhole 4' dia inside i/c RCC ring slab 39" dia with manhole cover 21" dia of 5' clear depth in 1:2:4 in 9" thick wall and bedding cast in situ with fair face steel shuttering i/c excavation back filling and dispose of surplus stuff up to one chain its complete	38 Nos	Each	13064.00	496432.00
06	Add for extra depth beyond 5 ft depth less the 5 ft deduct the same rate	(-) 60.50	Rft	1540.00	(-)93170.00
07	P/L 1:3:6 CC using GSB ¾" and d/g i/c consolidation curing etc complete without shuttering	63 cft	cft	12595.00	7935.00
08	Refilling of excavation stuff in trenches 6" this compacting at all lead and lift	7896 cft	Cft	2760.00 0%cft	21793.00
SUB TOTAL PART-A					8,93,835.00 + OR

SIGNATURE OF CONTRACTOR

SUBJECT: Rehabilitation of sewerage system wisdom grammar school and PMT to main road and Khalidad In UC 07

PART-B ITEM BASED ON OFFER RATES

S #	DESCRIPTION	QUANTITY	RATES	AMOUNT
01	Imported earth within the radius of 5 miles i/d digging loading and unloading and stacking at site i/c leveling and compaction etc complete	3150 cft	OR Rs.	
SUB TOTAL PART-B				

SIGNATURE OF CONTRACTOR

I / WE HEREBY QUOTED RATES AS FOLLOWS:-

01	PART-A (ITEM RATES BASES ON SR) @ _____ % ABOVE / BELOW SR I/C THE COST OF CARRIAGE OF MATERIALS AND DIFFERENCE OF COST OF BITUMEN	RS. _____
02	PART B (ITEM RATE BASES ON OFFER RATES / ITEM RATES THE ITEMS OTHER THEN SCHEDULE RATES	RS.- _____
GRAND TOTAL PART-A & B		RS. _____

TOTAL RS. _____ RUPEES _____

Signature of contractor _____

Address : _____

Cell # _____ / PTCL # _____

(B)

03/04

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI
PTCL # 36697869 / 36660102 & FAX # 36762519

TENDER REFERENCE # NIT/ 3 2015

Dated: 1-12-2015

SUBJECT: Fixing the sewerage problems near house of Muhammad Jaffar Raza and K-491 to Shahrah-e-Orangi in UC-07 and Tawakal milk shop KMC 540

BILL OF QUANTITIES

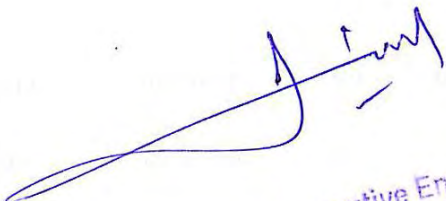
ESTIMATED COST
BID SECURITY
TENDER COST

RS. 8,89,546.00 +OR
RS. 17791.00
RS. 1,000.00

Issued to M/S

Video pay order / Challan # _____ dated: _____ Rs. _____

Signature and stamp



Executive Engineer
Building & Roads
Orangi Zone D.M.C (West)

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI

SUBJECT: Fixing the sewerage problems near house of Muhammad Jaffar Raza and K-191 to Shahrah-e-Orangi in UC-07 and Tawakal milk shop KMC 540

PART-A ITEM BASED ON SCHEDULE RATES

C #	DESCRIPTION	QUANTITY	UNIT	RATES	AMOUNT
01	Dismantling of cement concrete floor 1:2:4 plain	299 cft	cft	3327.50	9950.00
02	Excavation for pipe line in trenches and pits i/c trimming and dressing sides to true alignment and shape leveling of beds trenches to correct level and grade cutting joints holes and disposal of surplus earth within one chain as directed by engineer in charge	4556	cft	4650.00 0 %cft	21185.00
03	Excavation for pipe line in in hard rock by hammering and chiseling etc alignment and shape leveling of beds trenches to correct level and grade cutting joints holes and disposal of surplus earth within one chain as directed by engineer in charge	3938	cft	24510.00 0%cft	96520.00
04	P/L RCC rubber ring pipe of class A and fixing in trenches i/c cutting, fitting and jointing with rubber ring etc 15" dia pipe	900 Rft	Rft	367.00	330300.00
05	Construction of manhole 4' dia inside i/c RCC ring slab 39" dia with manhole cover 21" dia of 5' clear depth in 1:2:4 in 9" thick wall and bedding cast in situ with fair face steel shuttering i/c excavation back filling and dispose of surplus stuff up to one chain its complete	38 Nos	Each	13064.00	496432.00
06	Add for extra depth beyond 5 ft depth less the 5 ft deduct the same rate	(-) 60.50	Rft	1540.00	(-)93170.00
07	P/L 1:3:6 CC using GSB ¾" and d/g i/c consolidation curing etc complete without shuttering	63 cft	cft	12595.00	7935.00
08	Refilling of excavation stuff in trenches 6" this compacting at all lead and lift	7389 cft	Cft	2760.00 0%cft	20394.00
SUB TOTAL PART-A					8,89,546.00 + OR

SIGNATURE OF CONTRACTOR

(15) 3/4

SUBJECT: Fixing the sewerage problems near house of Muhammad Jaffar Raza and K-491 to Shahrah-e-Orangi in UC-07 and Tawakal milk shop KMC 540

PART-B ITEM BASED ON OFFER RATES

S.#	DESCRIPTION	QUANTITY	RATES	AMOUNT
01	Imported earth within the radius of 5 miles i/d digging loading and unloading and stacking at site i/c leveling and compaction etc complete	3347 cft	OR Rs.	
SUB TOTAL PART-B				

SIGNATURE OF CONTRACTOR

I / WE HEREBY QUOTED RATES AS FOLLOWS:-

01	PART-A (ITEM RATES BASES ON SR) @ _____ % ABOVE / BELOW SR I/C THE COST OF CARRIAGE OF MATERIALS AND DIFFERENCE OF COST OF BITUMEN	RS. _____
02	PART-B (ITEM RATE BASES ON OFFER RATES / ITEM RATES THE ITEMS OTHER THEN SCHEDULE RATES	RS.- _____
GRAND TOTAL PART-A & B		RS. _____

TOTAL RS. _____ RUPEES _____

Signature of contractor _____

Address : _____

Cell # _____ / PTCL # _____

16

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI
PTCL # 36697869 / 36660102 & FAX # 36762519

03/05

TENDER REFERENCE // NIT/ 3 2015

Dated: 1-12-2015

SUBJECT: IMPROVEMENT AND REPAIRING OF ROAD NEAR AL HIRA
PUMPING STATION IN UC-07 AND NEAR SALMAN FARSI
MASJID DOUBLE ROAD

BILL OF QUANTITIES

ESTIMATED COST

RS. 6,82,500.00 + OR

BID SECURITY

RS. 13650.00

TENDER COST

RS. 1,000.00

Issued to M/S

Video pay order / Challan //

dated: _____

Rs. _____

Signature and stamp

Executive Engineer
Building & Roads
Orangi Zone D.M.C (West)

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI

SUBJECT: IMPROVEMENT AND REPAIRING OF ROAD NEAR AL HIRA
PUMPING STATION IN UC-07 AND NEAR SALMAN FARSI
MASJID DOUBLE ROAD

PART-A ITEM BASED ON SCHEDULE RATES

S #	DESCRIPTION	QUANTITY	UNIT	RATES	AMOUNT
01	Dismantling of existing asphalt concrete road i/c base or sub base and disposal of dismantling material to designated place	6000	cft	773.86 % cft	46432.00
02	Earth work, excavation of roadside nails forming its bank or putting the same on the embankment as directed breaking clods dressing its complete in ordinary soil	12354	Cft	1437.00 0% cft	17753.00
03	Cartage of sand bajri lime surki murum and building rubbish i/c loading and unloading and stacking at site 10 miles	15354	cft	1065.04 % cft	163521.00
04	Preparing of sub grade i/c earth exaction leveling to an average depth of 9" dressing to camber and consolidation with power roller	8000 cft	cft	526.28 % cft	42103.00
05	Applying of prime coat or tack coat with approved binder at the required trate i/c cleaning the road surface thoroughly heating to the required temperature and spraying the binder with pressured as directed etc complete	8000 sft	sft	64.96 % sft	5197.00
06	Providing 1" thick consolidated premixed carpet in proper camber and grade i/c supplying 10 cft Bajri 4 cft hill sand of approved quality and grade bitumen of 8/100 penetration i/c missing in a mechanical mixer in required proportion i/c heating material and cleaning the road surface rate i/c all cost of material T&P and carrying up to 3 chain using crushed Bajri Laing premixed carpet	8000	Sft	4107.84 % cft 986.02 % cft 5093.86 % cft	407509.00
SUB TOTAL PART-A					682515.00+ OR

SIGNATURE OF CONTRACTOR

(12) 315

ADDRESS : _____

SUBJECT: IMPROVEMENT AND REPAIRING OF ROAD NEAR AL HIRA PUMPING STATION IN UC-07 AND NEAR SALMAN FARSI MASJID DOUBLE ROAD

PART-B ITEM BASED ON OFFER RATES

S #	DESCRIPTION	QUANTITY	RATES	AMOUNT
01	P/L Granular sub base course material over prepared sub grade in conformity with line grade thickness and typical cross sections shown in drawing for new pavement at grade widening existing pavement using well graded granular crushed stone with and all silt having a smooth gradation curve with in the limit for grading C or I as per AASHTO-M 180 method D using approved mechanical means or i/c watering with all lead and lift as per specification and as per direction of Engineer incharge	2576 cft	OR Rs	
02	P/L Aggregate base course material over the prepared sub grade in conformity with lines grade thickness and typical cross section shown in drawing for new pavement using well graded granular crushed stoen with asan dand silt having a smooth gradation curve with tin the limit for grading A or B as per AASHTO M 142-62 and compacting to 100% of the minimum dry density accorign to AASHTO-T 180 method D using approved m\chanical means of i/c watering with all lead and lift as per specification and as per directed by engineer in charge	3656 cft	OR Rs.	
SUB TOTAL PART-B				

SIGNATURE OF CONTRACTOR _____

I / WE HEREBY QUOTED RATES AS FOLLOWS:-

01	PART A (ITEM RATES BASES ON SR) @ _____ % ABOVE / BELOW SR I/C THE COST OF CARRIAGE OF MATERIALS AND DIFFERENCE OF COST OF BITUMEN	RS. _____
02	PART-B (ITEM RATE BASES ON OFFER RATES / ITEM RATES THE ITEMS OTHER THEN SCHEDULE RATES	RS.- _____
GRAND TOTAL PART-A & B		RS. _____

TOTAL RS. _____ RUPEES

Signature of contractor _____

Address : _____

Cell # _____ / PTCL # _____

(19) 03/10/15

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI
PTCL # 36697869 / 36660102 & FAX # 36762519

TENDER REFERENCE // NIT/ 3 2015

Dated: 1-12-2015


SUBJECT: REHABILITATION OF ROAD NEAR SYED BAKIR HUSSAIN LG 256645 KS1497
IN MANSOOR NAGAR IN UC-07 NEAR IMAM BARGAH ALI AKBAR

BILL OF QUANTITIES

ESTIMATED COST	RS. 6,91,855.00 + OR
BID SECURITY	RS. 13837.00
TENDER COST	RS. 1,000.00

Issued to M/S _____
Video pay order / Challan # _____ dated: _____ Rs. _____

Signature and stamp


Executive Engineer
Building & Roads
Orangi Zone 5, M.C. (West)

20

3/6

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI

SUBJECT: REHABILITATION OF ROAD NEAR SYED BAKIR HUSSAIN LG 256645 KS1497
IN MANSOOR NAGAR IN UC-07 NEAR IMAM BARGAH ALI AKBAR

PART-A ITEM BASED ON SCHEDULE RATES

S #	DESCRIPTION	QUANTITY	UNIT	RATES	AMOUNT
01	Dismantling of existing asphalt concrete road i/c base or sub base and disposal of dismantling material to designated place	6000	cft	773.86 % cft	46432.00
02	Earth work, excavation of roadside nails forming its bank or putting the same on the embankment as directed breaking clods dressing its complete in ordinary soil	12354	Cft	1437.00 0% cft	17753.00
03	Cartage of sand bajri lime surki murum and building rubbish i/c loading and unloading and stacking at site 10 miles	15354	cft	1065.04 % cft	163521.00
04	Preparing of sub grade i/c earth exaction leveling to an average depth of 9" dressing to camber and consolidation with power roller	8100 cft	cft	526.28 % cft	42629.00
05	Applying of prime coat or tack coat with approved binder at the required trate i/c cleaning the road surface thoroughly heating to the required temperature and spraying the binder with pressured as directed etc complete	8100 sft	sft	64.96 % sft	5262.00
06	Providing 1" thick consolidated premixed carpet in proper camber and grade i/c supplying 10 cft Bajri 4 cft hill sand of approved quality and grade bitumen of 8/100 penetration i/c missing in a mechanical mixer in required proportion i/c heating material and cleaning the road surface rate i/c all cost of material T&P and carrying up to 3 chain using crushed Bajri Laing premixed carpet	8100	Sft	4107.84 % cft 986.02 % cft 5093.86 % cft	412603.00
07	P/L 1:2:4 RCC manhole covers i/c tor bars frame using GSB ¾' and d/g etc complete	04	Nos	913.63	3655.00
SUB TOTAL PART-A					6,91,855.00 + OR

SIGNATURE OF CONTRACTOR

21

ADDRESS : _____

SUBJECT: REHABILITATION OF ROAD NEAR SYED BAKIR HUSSAIN LG 256645 KS1497
IN MANSOOR NAGAR IN UC-07 NEAR IMAM BARGAH ALI AKBAR

PART-B ITEM BASED ON OFFER RATES

S #	DESCRIPTION	QUANTITY	RATES	AMOUNT
01	P/L Granular sub base course material over prepared sub grade in conformity with line grade thickness and typical cross sections shown in drawing for new pavement at grade widening existing pavement using well graded granular crushed stone with and all silt having a smooth gradation curve with in the limit for grading C or I as per AASHTO-M 180 method D using approved mechanical means or i/c watering with all lead and lift as per specification and as per direction of Engineer incharge	2349 cft	OR Rs	
02	P/L Aggregate base course material over the prepared sub grade in conformity with lines grade thickness and typical cross section shown in drawing for new pavement using well graded granular crushed stoen with asan dand silt having a smooth gradation curve with tin the limit for grading A or B as per AASHTO M 142-62 and compacting to 100% of the minimum dry density accorign to AASHTO-T 180 method D using approved m\chanical means of i/c watering with all lead and lift as per specification and as per directed by engineer in charge	3038 cft	OR Rs.	
03	P/F RCC ring slab 39" dia with RCC manhole cover of 21" dia as per direction of engineer in charge	12 Nos	OR Rs.	
SUB TOTAL PART-B				

SIGNATURE OF CONTRACTOR _____

I / WE HEREBY QUOTED RATES AS FOLLOWS:-

01	PART-A (ITEM RATES BASES ON SR) @ _____ % ABOVE / BELOW SR I/C THE COST OF CARRIAGE OF MATERIALS AND DIFFERENCE OF COST OF BITUMEN	RS. _____
02	PART-B (ITEM RATE BASES ON OFFER RATES / ITEM RATES THE ITEMS OTHER THEN SCHEDULE RATES	RS.- _____
GRAND TOTAL PART-A & B		RS. _____

TOTAL RS. _____ RUPEES

Signature of contractor _____

Address : _____

22 03/07

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI
PTCL # 36697869 / 36660102 & FAX # 36762519

TENDER REFERENCE // NIT/ 3 2015

Dated: 1-12-2015

SUBJECT: REPAIRING AND MAINTENANCE OF SEWERAGE SYSTEM IN CHRISTIAN COLONY
BILAL MSJID NEAR HASSAN FABRIC SHOP IN UC-06

BILL OF QUANTITIES

ESTIMATED COST	RS. 8,91,700.00+OR
RID SECURITY	RS. 17834.00
TENDER COST	RS. 1,000.00

Issued to M/S _____
Video pay order / Challan // _____ dated: _____ Rs. _____

Signature and stamp


Executive Engineer
Building & Roads
Orangi Zone D.M.C. (Plus)



DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI

SUBJECT: REPAIRING AND MAINTENANCE OF SEWERAGE SYSTEM IN CHRISTIAN COLONY
BILAL MSJID NEAR HASSAN FABRIC SHOP IN UC-06

PART-A ITEM BASED ON SCHEDULE RATES

S #	DESCRIPTION	QUANTITY	UNIT	RATES	AMOUNT
01	Dismantling of cement concrete plain flooring CC 1:2:4	314 cft	cft	3327.50% cft	10449.00
02	Excavation for pipe line in trenches and pits in all kind of soils of murum i/c trimming and dressing sides to true alignment and shape leveling of beds trenches to correct level and grade cutting joints holes and disposal of surplus earth within one chain as directed by engineer in charge	4780	cft	4650.00 0%cft	22232.00
03	Excavation for pipe line in hard rock by hammering and chiseling i/c alignment dressing sides to true alignment and shape leveling of beds trenches to correct level and grade cutting joints holes and disposal of surplus earth within one chain as directed by engineer in charge	3938	cft	24150.00 0%cft	96520.00
04	P/L RCC rubber ring pipe of class A and fixing in trenches i/c cutting, fitting and jointing with rubber ring etc 12" dia pipe	900 Rft	Rft	367.00 RFT	330300.00
05	Construction of manhole 4' dia inside i/c RCC ring slab 39" dia with manhole cover 21" dia of 5' clear depth in 1:2:4 in 9" thick wall and bedding cast in situ with fair face steel shuttering i/c excavation back filling and dispose of surplus stuff up to one chain its complete	38 Nos	Each	13064.00	496432.00
06	Add for extra depth beyond 5 ft depth less the 5 ft deduct the same rate	(-) 60.50	Rft	1540.00	(-) 93170.00
07	P/L 1:3:6 CC using GSB ¾" and d/g i/consolidation curing etc complete without shuttering	63	cft	12595.00 % cft	7935.00
08	Refilling of excavation stuff in trenches 6" this compacting at all lead and lift	7614 cft	Cft	2760.00 0%cft	21015.00
SUB TOTAL PART-A					891700.00 + OR

SIGNATURE OF CONTRACTOR

ADDRESS : _____

24 3/7

SUBJECT: REPAIRING AND MAINTENANCE OF SEWERAGE SYSTEM IN CHRISTIAN COLONY
BI AL MSJID NEAR HASSAN FABRIC SHOP IN UC-06

PART-B ITEM BASED ON OFFER RATES

S #	DESCRIPTION	QUANTITY	RATES	AMOUNT
01	S/F imported sweet earth with in the radius of 5 miles i/c digging loading and un loading and stacking i/c leveling and dressing compacting with water etc complete	3000 cft	OR Rs	
SUB TOTAL PART-B				

SIGNATURE OF CONTRACTOR

I / WE HEREBY QUOTED RATES AS FOLLOWS:

01	PART-A (ITEM RATES BASES ON SR) @ _____ % ABOVE / BELOW SR I/C THE COST OF CARRIAGE OF MATERIALS AND DIFFERENCE OF COST OF BITUMEN	RS. _____
02	PART-B (ITEM RATE BASES ON OFFER RATES / ITEM RATES THE ITEMS OTHER THEN SCHEDULE RATES	RS.- _____
GRAND TOTAL PART-A & B		RS. _____

TOTAL RS. _____ RUPEES _____

Signature of contractor _____

Address : _____

Cell # _____ / PTCL # _____

(25/12/08)

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI
PTCL # 36697869 / 36660102 & FAX # 36762519

TENDER REFERENCE # NIT/ 3 2015

Dated: 1-12-2015

SUBJECT: PATCH REPAIR OF ROAD RIGHT SIDE OF IBRAHIM ALI BHAI SCHOOL AND
DJ PHOTO STUDIO AND HOUSE # 900 IN UC-03

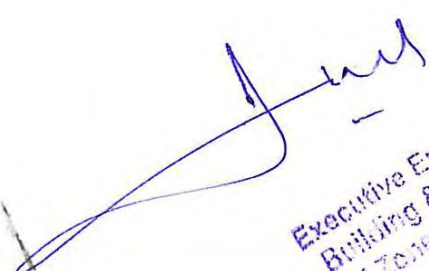
BILL OF QUANTITIES

ESTIMATED COST	RS. 682515.00 + OR
BID SECURITY	RS. 13650.00 ✓
TENDER COST	RS. 1,000.00

Issued to M/S

Video pay order / Challan # _____ dated: _____ Rs. _____

Signature and stamp


Executive Engineer
Building & Works
Orangi Zone D.M.C. (West)

26

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI

SUBJECT: PATCH REPAIR OF ROAD RIGHT SIDE OF IBRAHIM ALI BHAI SCHOOL AND DJ PHOTO STUDIO AND HOUSE # 900 IN UC-03

PART-A ITEM BASED ON SCHEDULE RATES

S #	DESCRIPTION	QUANTITY	UNIT	RATES	AMOUNT
01	Dismantling of existing asphalt concrete road i/c base or sub base and disposal of dismantling material to designated place	6000 ✓	cft	773.86 % cft	46432.00 ✓
02	Earth work, excavation of roadside nails forming its bank or putting the same on the embankment as directed breaking clods dressing its complete in ordinary soil	12354 ✓	Cft	1437.00 0% cft	17753.00 ✓
03	Cartage of sand bajri lime surki murum and building rubbish i/c loading and unloading and stacking at site 10 miles	15354 ✓	cft	1065.04 % cft	163521.00 ✓
04	Preparing of sub grade i/c earth exaction leveling to an average depth of 9" dressing to camber and consolidation with power roller	8000 cft ✓	cft	526.28 % cft ✓	42103.00 ✓
05	Applying of prime coat or tack coat with approved binder at the required trate i/c cleaning the road surface thoroughly heating to the required temperature and spraying the binder with pressured as directed etc complete	8000 sft ✓	sft	64.96 % sft ✓	5197.00 ✓
06	Providing 1" thick consolidated premixed carpet in proper camber and grade i/c supplying 10 cft Bajri 4 cft hill sand of approved quality and grade bitumen of 8/100 penetration i/c missing in a mechanical mixer in required proportion i/c heating material and cleaning the road surface rate i/c all cost of material T&P and carrying up to 3 chain using crushed Bajri Laing premixed carpet	8000 ✓	Sft	4107.84 % cft 986.02 % cft 5093.86 % cft ✓	407509.00 ✓
SUB TOTAL PART-A					682515.00 + OR

SIGNATURE OF CONTRACTOR

ADDRESS : _____

27

3/8

SUBJECT: PATCH REPAIR OF ROAD RIGHT SIDE OF IBRAHIM ALI BHAI SCHOOL AND DJ PHOTO STUDIO AND HOUSE # 900 IN UC-03

PART-B ITEM BASED ON OFFER RATES

S #	DESCRIPTION	QUANTITY	RATES	AMOUNT
01	P/L Granular sub base course material over prepared sub grade in conformity with line grade thickness and typical cross sections shown in drawing for new pavement at grade widening existing pavement using well graded granular crushed stone with and all silt having a smooth gradation curve with in the limit for grading C or I as per AASHTO-M 180 method D using approved mechanical means or i/c watering with all lead and lift as per specification and as per direction of Engineer incharge	2576 cft ✓	OR Rs	
02	P/L Aggregate base course material over the prepared sub grade in conformity with lines grade thickness and typical cross section shown in drawing for new pavement using well graded granular crushed stoen with asan dand silt having a smooth gradation curve with tin the limit for grading A or B as per AASHTO M 142-62 and compacting to 100% of the minimum dry density accorign to AASHTO-T 180 method D using approved m\chanical means of i/c watering with all lead and lift as per specification and as per directed by engineer in charge	3656 cft ✓	OR Rs.	
SUB TOTAL PART-B				

SIGNATURE OF CONTRACTOR _____

I / WE HEREBY QUOTED RATES AS FOLLOWS:-

01	PART-A (ITEM RATES BASES ON SR) @ _____ % ABOVE / BELOW SR I/C THE COST OF CARRIAGE OF MATERIALS AND DIFFERENCE OF COST OF BITUMEN	RS. _____
02	PART-B (ITEM RATE BASES ON OFFER RATES / ITEM RATES THE ITEMS OTHER THEN SCHEDULE RATES	RS.- _____
GRAND TOTAL PART-A & B		RS. _____

TOTAL RS. _____ RUPEES

Signature of contractor _____

Address : _____

Cell # _____ / PTCL # _____

(28)

03/09

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI
PTCL # 36697869 / 36660102 & FAX # 36762519

TENDER REFERENCE // NIT/ 3 2015

Dated: 1-12-2015

SUBJECT: REHABILITATION OF RAOD JAMA MASJID SUBHANI AND ARSHAD
BAKERY IN UC-10

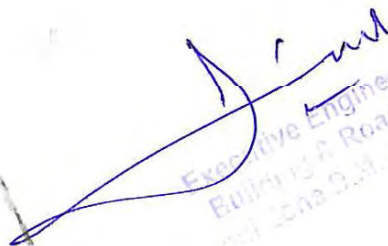
BILL OF QUANTITIES

ESTIMATED COST	RS. 6,84,360.00 + OR
BID SECURITY	RS. 13687.00
TENDER COST	RS. 1,000.00

Issued to M/S

Video pay order / Challan // _____ dated: _____ Rs. _____

Signature and stamp


Executive Engineer
Building & Roads
District Municipal Corporation (West)



DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI

SUBJECT: REHABILITATION OF RAOD JAMA MASJID SUBHANI AND ARSHAD
BAKERY IN UC-10

PART-A ITEM BASED ON SCHEDULE RATES

S #	DESCRIPTION	QUANTITY	UNIT	RATES	AMOUNT
01	Dismantling of existing asphalt concrete road i/c base or sub base and disposal of dismantling material to designated place	6000	cft	773.86 % cft	46432.00
02	Earth work, excavation of roadside nails forming its bank or putting the same on the embankment as directed breaking clods dressing its complete in ordinary soil	12280	Cft	1437.00 0% cft	17646.00
03	Cartage of sand bajri lime surki murum and building rubbish i/c loading and unloading and stacking at site 10 miles	15280	cft	1065.04 % cft	162732.00
04	Preparing of sub grade i/c earth exaction leveling to an average depth of 9" dressing to camber and consolidation with power roller	8000 cft	cft	526.28 % cft	42103.00
05	Applying of prime coat or tack coat with approved binder at the required trate i/c cleaning the road surface thoroughly heating to the required temperature and spraying the binder with pressured as directed etc complete	8000 sft	sft	64.96 % sft	5197.00
05	Providing 1" thick consolidated premixed carpet in proper camber and grade i/c supplying 10 cft Bajri 4 cft hill sand of approved quality and grade bitumen of 8/100 penetration i/c missing in a mechanical mixer in required proportion i/c heating material and cleaning the road surface rate i/c all cost of material T&P and carrying up to 3 chain using crushed Bajri Laing premixed carpet	8000	Sft	4107.84 % cft 986.02 % cft 5093.86 % cft	407509.00
07	P/L 1:2:4 RCC manhole covers i/c tor bars frame using GSB ¾' and d/g etc complete	03	Nos	913.63	2741.00
SUB TOTAL PART-A					684360.00 + OR

SIGNATURE OF CONTRACTOR

ADDRESS :

SUBJECT: REHABILITATION OF RAOD JAMA MASJID SUBHANI AND ARSHAD
BAKERY IN UC-10

PART-B ITEM BASED ON OFFER RATES

S #	DESCRIPTION	QUANTITY	RATES	AMOUNT
01	P/L Granular sub base course material over prepared sub grade in conformity with line grade thickness and typical cross sections shown in drawing for new pavement at grade widening existing pavement using well graded granular crushed stone with and all silt having a smooth gradation curve with in the limit for grading C or I as per AASHTO-M 180 method D using approved mechanical means or i/c watering with all lead and lift as per specification and as per direction of Engineer incharge	2320 cft	OR Rs	
02	P/L Aggregate base course material over the prepared sub grade in conformity with lines grade thickness and typical cross section shown in drawing for new pavement using well graded granular crushed stoen with asan dand silt having a smooth gradation curve with tin the limit for grading A or B as per AASHTO M 142-62 and compacting to 100% of the minimum dry density accorign to AASHTO-T 180 method D using approved m\chanical means of i/c watering with all lead and lift as per specification and as per directed by engineer in charge	3360 cft	OR Rs.	
03	P/F RCC ring slab 39" dia with RCC manhole cover of 21" dia as per direction of engineer in charge	03 Nos	OR Rs.	
SUB TOTAL PART-B				

SIGNATURE OF CONTRACTOR _____

I / WE HEREBY QUOTED RATES AS FOLLOWS:-

01	PART-A (ITEM RATES BASES ON SR) @ _____ % ABOVE / BELOW SR I/C THE COST OF CARRIAGE OF MATERIALS AND DIFFERENCE OF COST OF BITUMEN	RS. _____
02	PART-B.(ITEM RATE BASES ON OFFER RATES / ITEM RATES THE ITEMS OTHER THEN SCHEDULE RATES	RS.- _____
GRAND TOTAL PART-A & B		RS. _____

TOTAL RS. _____ RUPEES

Signature of contractor _____

Address : _____

Cell # _____ / PTCL # _____

(31) (3/10)

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI
PTCL # 36697869 / 36660102 & FAX # 36762519

TENDER REFERENCE # NIT/ 3 2015

Dated: 1-12-2015

SUBJECT: REPAIR AND MAINTENANCE OF BROKEN PIPE DRAIN AND OTHER WORKS IN SECTOR 11-E IN ORANGI ZONE.

BILL OF QUANTITIES

ESTIMATED COST
BID SECURITY
TENDER COST

RS. 2,10,500.00 +OR
RS. 4210.00
RS. 1,000.00

Issued to M/S _____
Video pay order / Challan // _____ dated: _____ Rs. _____

Signature and stamp


Executive Engineer
Planning & Roads
Orangi Zone D.M.C (West)

32



DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI

SUBJECT: REPAIR AND MAINTENANCE OF BROKEN PIPE DRAIN AND OTHER WORKS IN
SECTOR 11-E IN ORANGI ZONE.

PART-A ITEM BASED ON SCHEDULE RATES

S #	DESCRIPTION	QUANTITY	UNIT	RATES	AMOUNT
01	Dismantling of asphaltic concrete road i/c base sub base etc complete	429	sft	773.86% sft	3320.00
02	Earth work excavation in ashes sand and soft soil or scaled clearance undressed lead up to 50 ft	751	cft	1663.75% cft	1249.00
03	P/L 1:4:8 using GSB 2" and 3" and i/c leveling compacting curing etc complete with out shuttering	215 cft	cft	11288.75% cft	24271.00
04	Fabrication of tor steel reinforcement from cement concrete i/c cutting bending binding and laying in position making joints and fastening i/c the cost of binding works and removal of rust from bars	16.61	cwt	5001.70 cwt	83078.00
05	RCC work i/c all labour and material except the cost of reinforcement and its laboru for bending binding which will be paid separately i/c the cost of binding lifting shutterin cutting etc	858	cft	337.00 cft	289146.00
06	Errection and removal of centering fro RCC or plain cc work in partial wood	1144 sft	sft	3127.41 sft	35778.00
07	Cartage of sand bajri lime surki murum and building rubbish i/c loading and unloading and stacking at site 10 miles	1180	cft	1065.00 % cft	12567.00
SUB TOTAL PART-A					449409.00 + OR

SIGNATURE OF CONTRACTOR

ADDRESS :



SUBJECT: .. REPAIR AND MAINTENANCE OF BROKEN PIPE DRAIN AND OTHER WORKS IN SECTOR 11 IN ORANGI ZONE.

PART-B ITEM BASED ON OFFER RATES

S #	DESCRIPTION	QUANTITY	RATES	AMOUNT
01	Extra for using SR cement in place of OPC	171.40 cwt	OR	
02	Painting with out oil pain on kerb stone bloack / situ and subsequent coal make and shade as per direction of engineer in charge	10144 sft	OR	
03	P/F iron pole barriers on situ 1:2:4 properly fitted in ground and curing fixing etc complete as per direction of engineer incharge	01 No	OR	
04	Removal of slogan of wall chalking with distemping of two having of Suzuki helper ladder etc and full charge as per direction of engineer in charge	8000 sft	OR	
SUB TOTAL PART-B				

SIGNATURE OF CONTRACTOR

I / WE HEREBY QUOTED RATES AS FOLLOWS:-

01	PART A (ITEM RATES BASES ON SR) @ % ABOVE / BELOW SR I/C THE COST OF CARRIAGE OF MATERIALS AND DIFFERENCE OF COST OF BITUMEN	RS. _____
02	PART B (ITEM RATE BASES ON OFFER RATES / ITEM RATES THE ITEMS OTHER THEN SCHEDULE RATES	RS.- _____
GRAND TOTAL PART-A & B		RS. _____

TOTAL RS. _____ RUPEES _____

Signature of contractor _____

Address : _____

Cell # _____ / PTCL # _____

(34) 3/11

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI
PTCL # 36697869 / 36660102 & FAX # 36762519

TENDER REFERENCE # NIT/ 3 2015

Dated: 1-12-2015


SUBJECT: REHABILITATION OF ROAD CARPETING NEAR KARCHI MUSIC CENTER 5 NO CHOWRANGI IN UC-04 ORANGI ZONE

BILL OF QUANTITIES

ESTIMATED COST	RS. 7,51,672.00 + OR
BID SECURITY	RS. 15033.00
TENDER COST	RS. 1,000.00

Issued to M/S _____
Video pay order / Challan # _____ dated: _____ Rs. _____.

Signature and stamp


Executive Engineer
Highways & Roads
Orangi Zone D.M.C (West)



DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI

SUBJECT: REHABILITATION OF ROAD CARPETING NEAR KARCHI MUSIC CENTER 5 NO
CHOWRANGI IN UC-04 ORANGI ZONE

PART-A ITEM BASED ON SCHEDULE RATES

S #	DESCRIPTION	QUANTITY	UNIT	RATES	AMOUNT
01	Dismantling of existing asphalt concrete road i/c base or sub base and disposal of dismantling material to designated place	6500 ✓	cft	773.86 % cft	50301.00 ✓
02	Earth work, excavation of roadside nails forming its bank or putting the same on the embankment as directed breaking clods dressing its complete in ordinary soil	24413 ✓	Cft	1437.00 0% ✓ cft	35081.00 ✓
03	Cartage of sand bajri lime surki murum and building rubbish i/c loading and unloading and stacking at site 10 miles	27663 ✓	cft	1065.04 % cft	294611.00 ✓
04	Providing 1" thick consolidated premixed carpet in proper camber and grade i/c supplying 10 cft Bajri 4 cft hill sand of approved quality and grade bitumen of 8/100 penetration i/c missing in a mechanical mixer in required proportion i/c heating material and cleaning the road surface rate i/c all cost of material T&P and carrying up to 3 chain using crushed Bajri Laing premixed carpet	7800 ✓	Sft	4765.00% sft	371679.00 ✓
SUB TOTAL PART-A					751672.00 + OR

SIGNATURE OF CONTRACTOR

ADDRESS : _____

(26) 3/11

SUBJECT: REHABILITATION OF ROAD CARPETING NEAR KARCHI MUSIC CENTER 5 NO CHOWRANGI IN UC-04 ORANGI ZONE

PART-B ITEM BASED ON OFFER RATES

S #	DESCRIPTION	QUANTITY	RATES	AMOUNT
01	P/L Granular sub base course material over prepared sub grade in conformity with line grade thickness and typical cross sections shown in drawing for new pavement at grade widening existing pavement using well graded granular crushed stone with and all silt having a smooth gradation curve with in the limit for grading C or I as per AASHTO-M 180 method D using approved mechanical means or i/c watering with all lead and lift as per specification and as per direction of Engineer incharge	800 cft ✓	OR Rs	
02	P/L Aggregate base course material over the prepared sub grade in conformity with lines grade thickness and typical cross section shown in drawing for new pavement using well graded granular crushed stoen with asan dand silt having a smooth gradation curve with tin the limit for grading A or B as per AASHTO M 142-62 and compacting to 100% of the minimum dry density accorign to AASHTO-T 180 method D using approved m\chanical means of i/c watering with all lead and lift as per specification and as per directed by engineer in charge	3900 cft ✓	OR -Rs.	
SUB TOTAL PART-B				

SIGNATURE OF CONTRACTOR _____.

I / WE HEREBY QUOTED RATES AS FOLLOWS:-

01	PART-A (ITEM RATES BASES ON SR) @ _____ % ABOVE / BELOW SR I/C THE COST OF CARRIAGE OF MATERIALS AND DIFFERENCE OF COST OF BITUMEN	RS. _____
02	PART-B (ITEM RATE BASES ON OFFER RATES / ITEM RATES THE ITEMS OTHER THEN SCHEDULE RATES	RS.- _____
GRAND TOTAL PART-A & B		RS. _____

TOTAL RS. _____ RUPEES

Signature of contractor _____

Address : _____

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI
PTCL # 36697869 / 36660102 & FAX # 36762519

(37)
3/12

TENDER REFERENCE # NIT/ 3 2015

Dated: 1-12-2015

SUBJECT: REPAIR OF DAMAGE ROAD BY CARPETING AND FILLING NEAR SIDDQUI ✓
CENTER HUSSAIN OIL SECTOR 11-E IN UC-04


BILL OF QUANTITIES

ESTIMATED COST
BID SECURITY
TENDER COST

RS. 8,04,739.00 + OR ✓
RS. 16095.00 ✓
RS. 1,000.00 ✓

Issued to M/S _____
Video pay order / Challan # _____ dated: _____ Rs. _____ .

Signature and stamp


Executive Engineer
Building & Roads
Orangi Zone D.M.C (West)

38

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI

SUBJECT: REPAIR OF DAMAGE ROAD BY CARPETING AND FILLING NEAR SIDDQUI
CENTER HUSSAIN OIL SECTOR 11-E IN UC-04

PART-A ITEM BASED ON SCHEDULE RATES

S #	DESCRIPTION	QUANTITY	UNIT	RATES	AMOUNT
01	Dismantling of existing asphalt concrete road i/c base or sub base and disposal of dismantling material to designated place	7000 ✓	cft	773.86 % cft	54170.00 ✓
02	Earth work, excavation of roadside nails forming its bank or putting the same on the embankment as directed breaking clods dressing its complete in ordinary soil	28263 ✓	Cft	1437.00 0% cft	40614.00 ✓
03	Cartage of sand bajri lime surki murum and building rubbish i/c loading and unloading and stacking at site 10 miles	31763 ✓	cft	1065.04 % cft	338276.00 ✓
04	Providing 1" thick consolidated premixed carpet in proper camber and grade i/c supplying 10 cft Bajri 4 cft hill sand of approved quality and grade bitumen of 8/100 penetration i/c missing in a mechanical mixer in required proportion i/c heating material and cleaning the road surface rate i/c all cost of material T&P and carrying up to 3 chain using crushed Bajri Laing premixed carpet	7800 ✓	Sft	4765.00% sft	371679.00 ✓
SUB TOTAL PART-A					804739.00 + OR

SIGNATURE OF CONTRACTOR

ADDRESS :

(39) 3/12

SUBJECT: REPAIR OF DAMAGE ROAD BY CARPETING AND FILLING NEAR SIDDQUI CENTER HUSSAIN OIL SECTOR 11-E IN UC-04

PART-B ITEM BASED ON OFFER RATES

S #	DESCRIPTION	QUANTITY	RATES	AMOUNT
01	P/L Aggregate base course material over the prepared sub grade in conformity with lines grade thickness and typical cross section shown in drawing for new pavement using well graded granular crushed stoen with asan dand silt having a smooth gradation curve with tin the limit for grading A or B as per AASHTO M 142-62 and compacting to 100% of the minimum dry density accorign to AASHTO-T 180 method D using approved mechanical means of i/c watering with all lead and lift as per specification and as per directed by engineer in charge	2925 cft ✓	OR Rs.	
02	P/F RCC ring slab 39" dia with RCC manhole cover of 21" dia as per direction of engineer in charge	12 Nos ✓	OR Rs.	
SUB TOTAL PART-B				

SIGNATURE OF CONTRACTOR _____

I / WE HEREBY QUOTED RATES AS FOLLOWS:-

01	PART-A (ITEM RATES BASES ON SR) @ _____ % ABOVE / BELOW SR I/C THE COST OF CARRIAGE OF MATERIALS AND DIFFERENCE OF COST OF BITUMEN	RS. _____
02	PART-B (ITEM RATE BASES ON OFFER RATES / ITEM RATES THE ITEMS OTHER THEN SCHEDULE RATES	RS.- _____
GRAND TOTAL PART-A & B		RS. _____

TOTAL RS. _____ RUPEES

Signature of contractor _____

Address : _____

Cell # _____ / PTCL # _____

(40) 3/13

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI
PTCL # 36697869 / 36660102 & FAX # 36762519

TENDER REFERENCE # NIT/ 3 2015

Dated: 1-12-2015

SUBJECT: Maintenance of carpet near C4 computer graphic Ali computer city Fahim Autos UC-03

BILL OF QUANTITIES

ESTIMATED COST	RS. 683515.00 + OR
BID SECURITY	RS. 13670.00
TENDER COST	RS. 1,000.00

Issued to M/S _____
Video pay order / Challan # _____ dated: _____ Rs. _____

Signature and stamp


Executive Engineer
Building & Roads
Orangi Zone D.M.C (West)

3/13

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI

SUBJECT: Maintenance of carpet near C4 computer graphic Ali computer city Fahim Autos UC-03

PART-A ITEM BASED ON SCHEDULE RATES

S #	DESCRIPTION	QUANTITY	UNIT	RATES	AMOUNT
01	Dismantling of existing asphalt concrete road i/c base or sub base and disposal of dismantling material to designated place	6000 ✓	cft	773.86 % cft ✓	54170.00 216432.00
02	Earth work, excavation of roadside nails forming its bank or putting the same on the embankment as directed breaking clods dressing its complete in ordinary soil	12210 ✓	Cft	1437.00 0% cft	17546.00 ✓
03	Cartage of sand bajri lime surki murum and building rubbish i/c loading and unloading and stacking at site 10 miles	15210 ✓	cft	1065.04 % cft	161987.00 ✓
04	Preparing of sub grade i/c earth exaction leveling to an average depth of 9" dressing to camber and consolidation with power roller	8000 cft ✓	cft	526.28 % cft ✓	42103.00 ✓
05	Applying of prime coat or tack coat with approved binder at the required trate i/c cleaning the road surface thoroughly heating to the required temperature and spraying the binder with pressured as directed etc complete	8000 sft ✓	sft	64.96 % sft ✓	5197.00 ✓
06	Providing 1" thick consolidated premixed carpet in proper camber and grade i/c supplying 10 cft Bajri 4 cft hill sand of approved quality and grade bitumen of 8/100 penetration i/c missing in a mechanical mixer in required proportion i/c heating material and cleaning the road surface rate i/c all cost of material T&P and carrying up to 3 chain using crushed Bajri Laing premixed carpet	8000	Sft	4107.84 % cft 986.02 % cft 5093.86 % cft ✓	407509.00 ✓
07	P/L 1:2:4 RCC manhole cover i/c tor bars frame using GSB ¾" and d/g etc complete	03 ✓	Each	913.63 ✓	2741.00 ✓
SUB TOTAL PART-A					683515.00 + OR ✓

SIGNATURE OF CONTRACTOR

ADDRESS : _____

(42) 3/13

SUBJECT: Maintenance of carpet near C-4 computer graphic ali computer city Fahim Autos in UC-03

PART-B ITEM BASED ON OFFER RATES

S #	DESCRIPTION	QUANTITY	RATES	AMOUNT
01	P/L Granular sub base course material over prepared sub grade in conformity with line grade thickness and typical cross sections shown in drawing for new pavement at grade widening existing pavement using well graded granular crushed stone with and all silt having a smooth gradation curve with in the limit for grading C or I as per AASHTO-M 180 method D using approved mechanical means or i/c watering with all lead and lift as per specification and as per direction of Engineer incharge	2576 cft	OR Rs	
03	P/L Aggregate base course material over the prepared sub grade in conformity with lines grade thickness and typical cross section shown in drawing for new pavement using well graded granular crushed stoen with asan dand silt having a smooth gradation curve with tin the limit for grading A or B as per AASHTO M 142-62 and compacting to 100% of the minimum dry density accorign to AASHTO-T 180 method D using approved m\chanical means of i/c watering with all lead and lift as per specification and as per directed by engineer in charge	3360 cft	OR Rs.	
02	P/F RCC ring slab 39" dia with RCC manhole cover of 21" dia as per direction of engineer in charge	05 Nos	OR Rs.	
SUB TOTAL PART-B				

SIGNATURE OF CONTRACTOR _____

I / WE HEREBY QUOTED RATES AS FOLLOWS:-

01	PART-A (ITEM RATES BASES ON SR) @ _____ % ABOVE / BELOW SR I/C THE COST OF CARRIAGE OF MATERIALS AND DIFFERENCE OF COST OF BITUMEN	RS. _____
02	PART-B (ITEM RATE BASES ON OFFER RATES / ITEM RATES THE ITEMS OTHER THEN SCHEDULE RATES	RS.- _____
GRAND TOTAL PART-A & B		RS. _____

TOTAL RS. _____ RUPEES

Signature of contractor _____

Address : _____

43
03/14

**DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI
PTCL # 36697869 / 36660102 & FAX # 36762519**

TENDER REFERENCE // NIT/ **3** 2015

Dated: 1-12-2015

SUBJECT: REPAIR OF ROAD CARPETING NEAR PAK MEDICO CHIPPA IN UC-04

BILL OF QUANTITIES

ESTIMATED COST	RS. 7,61,202.00 + OR
BID SECURITY	RS. 15224.00
TENDER COST	RS. 1,000.00

Issued to M/S _____
Video pay order / Challan # _____ dated: _____ Rs. _____

Signature and stamp


Executive Engineer
Planning & Roads
Orangi Town D.M.C (West)

44

3/14

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI

SUBJECT: REPAIR OF ROAD CARPETING NEAR PAK MEDICO CHIPPA IN UC-04

PART-A ITEM BASED ON SCHEDULE RATE

S #	DESCRIPTION	QUANTITY	UNIT	RATES	AMOUNT
01	Dismantling of existing asphalt concrete road i/c base or sub base and disposal of dismantling material to designated place	6500	cft	773.86 % cft	50301.00
02	Earth work, excavation of roadside nails forming its bank or putting the same on the embankment as directed breaking clods dressing its complete in ordinary soil	24413	Cft	1437.00 0% cft	35081.00
03	Cartage of sand bajri lime surki murum and building rubbish i/c loading and unloading and stacking at site 10 miles	27663	cft	1065.04 % cft	294611.00
04	Providing 1" thick consolidated premixed carpet in proper camber and grade i/c supplying 10 cft Bajri 4 cft hill sand of approved quality and grade bitumen of 8/100 penetration i/c missing in a mechanical mixer in required proportion i/c heating material and cleaning the road surface rate i/c all cost of material T&P and carrying up to 3 chain using crushed Bajri Laing premixed carpet	8000	Sft	4765.00% sft	381209.00
SUB TOTAL PART-A					761202.00 + OR

SIGNATURE OF CONTRACTOR

ADDRESS :

(45) 3/14

SUBJECT: REPAIR OF ROAD CARPETING NEAR PAK MEDICO CHIPPA IN UC-04

PART-B ITEM BASED ON OFFER RATES

S #	DESCRIPTION	QUANTITY	RATES	AMOUNT
01	P/L Aggregate base course material over the prepared sub grade in conformity with lines grade thickness and typical cross section shown in drawing for new pavement using well graded granular crushed stoen with asan dand silt having a smooth gradation curve with tin the limit for grading A or B as per AASHTO M 142-62 and compacting to 100% of the minimum dry density accorign to AASHTO-T 180 method D using approved m\chanical means of i/c watering with all lead and lift as per specification and as per directed by engineer in charge	3900 cft ✓	OR Rs.	
02	P/F RCC ring slab 39" dia with RCC manhole cover of 21" dia as per direction of engineer in charge	08 Nos ✓	OR Rs.	
SUB TOTAL PART-B				

SIGNATURE OF CONTRACTOR _____

I / WE HEREBY QUOTED RATES AS FOLLOWS:-

01	PART-A (ITEM RATES BASES ON SR) @ _____ % ABOVE / BELOW SR I/C THE COST OF CARRIAGE OF MATERIALS AND DIFFERENCE OF COST OF BITUMEN	RS. _____
02	PART-B (ITEM RATE BASES ON OFFER RATES / ITEM RATES THE ITEMS OTHER THEN SCHEDULE RATES	RS.- _____
GRAND TOTAL PART-A & B		RS. _____

TOTAL RS. _____ RUPEES

Signature of contractor _____

Address : _____

Cell # _____ / PTCL # _____

(46) 27/15

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI
PTCL # 36697869 / 36660102 & FAX # 36762519

TENDER REFERENCE # NIT/ 3 2015

Dated: 1-12-2015

SUBJECT: Repairing and maintenance of road in front of Imam bargah haidary al Rasheed house
near Agha khan lab and Orangi police station Orangi zone

BILL OF QUANTITIES

ESTIMATED COST
BID SECURITY
TENDER COST

RS. 6,45,461.00 + OR
RS. 12909.00
RS. 1,000.00

Issued to M/S _____
Video pay order / Challan # _____ dated: _____ Rs. _____.

Signature and stamp


Executive Engineer
Building & Roads
Orangi Zone D.M.C (West)

57

**DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI**

SUBJECT: Repairing and maintenance of road in front of Imam bargah haidary al Rasheed house near Agha khan lab and Orangi police station Orangi zone

PART-A ITEM BASED ON SCHEDULE RATE

S #	DESCRIPTION	QUANTITY	UNIT	RATES	AMOUNT
01	Dismantling of existing asphalt concrete road i/c base or sub base and disposal of dismantling material to designated place	6225 ✓	cft	773.86 % cft ✓	48173.00 ✓
02	Earth work, excavation of roadside nails forming its bank or putting the same on the embankment as directed breaking clods dressing its complete in ordinary soil	12354 ✓	Cft	1437.00 0% ✓ cft	17753.00 ✓
03	Cartage of sand bajri lime surki murum and building rubbish i/c loading and unloading and stacking at site 10 miles	15467 ✓	cft	1065.04 % cft ✓	164724.00 ✓
04	Preparing of sub grade i/c earth exaction leveling to an average depth of 9" dressing to camber and consolidation with power roller	7200 cft ✓	cft	526.28 % cft ✓	37893.00 ✓
05	Applying of prime coat or tack coat with approved binder at the required trate i/c cleaning the road surface thoroughly heating to the required temperature and spraying the binder with pressured as directed etc complete	7200 sft ✓	sft	64.96 % sft ✓	4678.00 ✓
06	Providing 1" thick consolidated premixed carpet in proper camber and grade i/c supplying 10 cft Bajri 4 cft hill sand of approved quality and grade bitumen of 8/100 penetration i/c missing in a mechanical mixer in required proportion i/c heating material and cleaning the road surface rate i/c all cost of material T&P and carrying up to 3 chain using crushed Bajri Laing premixed carpet	7200 ✓	Sft	5093.86% sft ✓	366758.00 ✓
07	P/L 1:2:4 RCC manhole covers i/c tor bars frame using GSB ¾' and d/g etc complete	06 ✓	Nos	913.63 ✓	5482.00 ✓
SUB TOTAL PART-A					6,45,461.00 + OR

SIGNATURE OF CONTRACTOR

ADDRESS : _____

47

3/15

SUBJECT: Repairing and maintenance of road in front of Imam bargah haidary al Rasheed house near Agha khan lab and Orangi police station Orangi zone

PART-B ITEM BASED ON OFFER RATES

S #	DESCRIPTION	QUANTITY	RATES	AMOUNT
01	P/L Granular sub base course material over prepared sub grade in conformity with line grade thickness and typical cross sections shown in drawing for new pavement at grade widening existing pavement using well graded granular crushed stone with and all silt having a smooth gradation curve with in the limit for grading C or I as per AASHTO-M 180 method D using approved mechanical means or i/c watering with all lead and lift as per specification and as per direction of Engineer incharge	2376 cft ✓	OR Rs	
03	P/L Aggregate base course material over the prepared sub grade in conformity with lines grade thickness and typical cross section shown in drawing for new pavement using well graded granular crushed stoen with asan dand silt having a smooth gradation curve with tin the limit for grading A or B as per AASHTO M 142-62 and compacting to 100% of the minimum dry density accorign to AASHTO-T 180 method D using approved m\chanical means of i/c watering with all lead and lift as per specification and as per directed by engineer in charge	4176 cft ✓	OR Rs.	
02	P/F RCC ring slab 39" dia with RCC manhole cover of 21" dia as per direction of engineer in charge	06 Nos ✓	OR Rs.	
SUB TOTAL PART-B				

SIGNATURE OF CONTRACTOR _____

I / WE HEREBY QUOTED RATES AS FOLLOWS:-

01	PART-A (ITEM RATES BASES ON SR) @ _____ % ABOVE / BELOW SR I/C THE COST OF CARRIAGE OF MATERIALS AND DIFFERENCE OF COST OF BITUMEN	RS. _____
02	PART-B (ITEM RATE BASES ON OFFER RATES / ITEM RATES THE ITEMS OTHER THEN SCHEDULE RATES	RS.- _____
GRAND TOTAL PART-A & B		RS. _____

TOTAL RS. _____ RUPEES

Signature of contractor _____

Address : _____

Cell # _____ / PTCL # _____

(49) 2/16

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI
PTCL # 36697869 / 36660102 & FAX # 36762519

TENDER REFERENCE # NIT/ 5 2015

Dated: 1-12-2015


SUBJECT: P/F barbed wire and pre cast slab near Sangam electrical near old UC-3 office Hussain Bakers and Imam bargah Haidari in UC-03

BILL OF QUANTITIES

ESTIMATED COST	RS. 3,69,469.00 + OR
BID SECURITY	RS. 7389.00
TENDER COST	RS. 1,000.00

Issued to M/S _____
Video pay order / Challan # _____ dated: _____ Rs. _____.

Signature and stamp


Executive Engineer
Building & Roads
Orangi Zone D.M.C (West)

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACH.

SUBJECT: P/F barbed wire and pre cast slab near Sangam electrical near old UC-3 office Hussain Bakers and Imam bargah Haidari in UC-03

PART-A ITEM BASED ON SCHEDULE RATE

S #	DESCRIPTION	QUANTITY	UNIT	RATES	AMOUNT
01	Excavation for pipe line in trenches and pits in all kind of soils of murum i/c trimming and dressing sides to true alignment and shape leveling of beds trenches to correct level and grade cutting joints holes and disposal of surplus earth within one chain as directed by engineer in charge	875 ✓	cft	4650.00 ✓ 0%cft	4069.00 ✓
02	P/L RCC rubber ring pipe of class A and fixing in trenches i/c cutting, fitting and jointing with rubber ring etc 15" dia pipe	150Rft ✓	Rft	367.00 ✓	55050.00 ✓
03	Construction of manhole 4' dia inside i/c RCC ring slab 39" dia with manhole cover 21" dia of 5' clear depth in 1:2:4 in 9" thick wall and bedding cast in situ with fair face steel shuttering i/c excavation back filling and dispose of surplus stuff up to one chain its complete	07 Nos ✓	Each	13064.00 ✓	91448.00 ✓
04	Add for extra depth beyond 5 ft depth less the 5 ft deduct the same rate	(-) 10.50 ✓	Rft	1540.00 ✓	(-)16170.00 ✓
05	Refilling of excavation stuff in trenches 6" this compacting at all lead and lift	691 ✓	Cft	2760.00 ✓ 0%cft	1907.00 ✓
06	Dismantling of cement flooring 1:2:4 plain	980 ✓	cft	3327.50% cft ✓	32610.00 ✓
07	Dismantling of cement concrete plain 1:3:6	720 ✓	cft	1306.80 ✓	9409.00 ✓
08	Preparing of sub grade i/c earth exaction leveling to an average depth of 9" dressing to camber and consolidation with power roller	4500 cft ✓	cft	526.28 % cft ✓	23683.00 ✓
09	Cartage of sand bajri lime surki murum and building rubbish i/c loading and unloading and stacking at site 10 miles	1884 ✓	cft	1065.04 % cft ✓	23683.00 ✓ 20065.00
10	P/L 1 ½ " topping CC 1:2:4 i/c surface finishing and dividing to panels	4500 sft ✓	sft	3275.50 %sft ✓	147398.00 ✓
SUB TOTAL PART-A					3,69,469.00 + OR

SIGNATURE OF CONTRACTOR

ADDRESS : _____

SUBJECT: P/F barbed wire and pre cast slab near Sangam electrical near old UC-3 office Hussain Bakers an. Imam bargah Haidari in UC-03

PART-B ITEM BASED ON OFFER RATES

S #	DESCRIPTION	QUANTITY	RATES	AMOUNT
01	P/L Granular sub base course material over prepared sub grade in conformity with line grade thickness and typical cross sections shown in drawing for new pavement at grade widening existing pavement using well graded granular crushed stone with and all silt having a smooth gradation curve with in the limit for grading C or I as per AASHTO-M 180 method D using approved mechanical means or i/c watering with all lead and lift as per specification and as per direction of Engineer incharge	1320 cft ✓	OR Rs	
02	P/L Aggregate base course material over the prepared sub grade in conformity with lines grade thickness and typical cross section shown in drawing for new pavement using well graded granular crushed stone with as and silt having a smooth gradation curve with tin the limit for grading A or B as per AASHTO M 142-62 and compacting to 100% of the minimum dry density accorign to AASHTO-T 180 method D using approved mechanical means of i/c watering with all lead and lift as per specification and as per directed by engineer in charge	3784 cft ✓	OR Rs.	
03	Extra for using SR cement in place of OPC	122 cwt ✓	OR	
04	P/F barbed wire i/c iron angle i/c fixing cutting and hock on wall with iron nut and bolt etc complete 04 Nos brackets 02 Nos brackets	157 Rft ✓ 36 Rft ✓	OR OR	
05	P/F precast slab i/c I beam and slab i/c I beam i/c iron bars and 1:2:4 cement concrete leveling and curing etc complete	828 sft ✓	OR	
SUB TOTAL PART-B				

I / WE HEREBY QUOTED RATES AS FOLLOWS:-

01	PART-A (ITEM RATES BASES ON SR) @ _____ % ABOVE / BELOW SR I/C THE COST OF CARRIAGE OF MATERIALS AND DIFFERENCE OF COST OF BITUMEN	RS. _____
02	PART-B (ITEM RATE BASES ON OFFER RATES / ITEM RATES THE ITEMS OTHER THEN SCHEDULE RATES	RS.- _____
GRAND TOTAL PART-A & B		RS. _____

TOTAL RS. _____ RUPEES

Signature of contractor _____

Address : _____ Cell # _____

52 3/17

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI
PTCL # 36697869 / 36660102 & FAX # 36762519

TENDER REFERENCE # NIT/ 3 2015

Dated: 1-12-2015

SUBJECT: REPAIRING OF DAMAGE PORTION OF PIPE AND IMPROVEMENT OF CC
STREET NEAR GHOSIA CHOWK AND OTHER PLACES IN UC-03

BILL OF QUANTITIES

ESTIMATED COST

RS. 6,88,095.00 + OR

BID SECURITY

RS. 13762.00 ✓

TENDER COST

RS. 1,000.00 ✓

Issued to M/S _____
Video pay order / Challan # _____ dated: _____ Rs. _____.

Signature and stamp



Executive Engineer
S. H. Raza

53

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI

SUBJECT: REPAIRING OF DAMAGE PORTION OF PIPE AND IMPROVEMENT OF CC STREET NEAR GHOSHIA CHOWK AND OTHER PLACES IN UC-03

PART-A ITEM BASED ON SCHEDULE RATE

S #	DESCRIPTION	QUANTITY	UNIT	RATES	AMOUNT
01	Excavation for pipe line in trenches and pits in all kind of soils of murum i/c trimming and dressing sides to true alignment and shape leveling of beds trenches to correct level and grade cutting joints holes and disposal of surplus earth within one chain as directed by engineer in charge	750 ✓	cft	4650.00 ✓ 0%cft	3488.00 ✓
02	Excavation for pipe line in in hard rock by hammering and chiseling etc alignment and shape leveling of beds trenches to correct level and grade cutting joints holes and disposal of surplus earth within one chain as directed by engineer in charge	1125 ✓	cft	24510.00 ✓ 0%cft	27574.00 ✓
03	P/L RCC rubber ring pipe of class A and fixing in trenches i/c cutting, fitting and jointing with rubber ring etc 15" dia pipe	250 Rft ✓	Rft	367.00 ✓	91750.00 ✓
04	Construction of manhole 4' dia inside i/c RCC ring slab 39" dia with manhole cover 21" dia of 5' clear depth in 1:2:4 in 9" thick wall and bedding cast in situ with fair face steel shuttering i/c excavation back filling and dispose of surplus stuff up to one chain its complete	11 Nos ✓	Each	13064.00	143704.00 ✓
05	Add for extra depth beyond 5 ft depth less the 5 ft deduct the same rate	(-) 22 ✓	Rft	1540.00 ✓	(-)33800.00
06	Refilling of excavation stuff in trenches 6" this compacting at all lead and lift	443 ✓	Cft	2760.00 ✓ 0%cft	1223.00 ✓
07	Dismantling of cement concrete plain flooring	1730 cft ✓	cft	3327.50 % cft ✓	57566.00 ✓
08	Dismantling of cement concrete plain 1:3:6	1149 ✓	cft	1306.80 ✓	15016.00 ✓
09	Preparing of sub grade i/c earth exaction leveling to an average depth of 9" dressing to camber and consolidation with power roller	9000 cft	cft	526.28 % cft	47366.00
10	P/L 1 ½ " topping CC 1:2:4 i/c surface finishing and dividing to panels	9000 sft ✓	sft	3275.50 %sft ✓	294797.00 ✓
11	P/L 1:2:4 RCC manhole covers i/c tor bars frame using GSB ¾' and d/g etc complete	06 ✓	Nos	913.63 ✓	5482.00 ✓
12	Cartage of sand bajri lime surki murum and building rubbish i/c loading and unloading and stacking at site 10 miles	3186 ✓	cft	1065.00 % cft	33931.00 ✓
SUB TOTAL PART-A					688095.00 + OR

SIGNATURE OF CONTRACTOR

ADDRESS : _____

57

SUBJECT: REPAIRING OF DAMAGE PORTION OF PIPE AND IMPROVEMENT OF CC STREET NEAR GHOSHIA CHOWK AND OTHER PLACES IN UC-03

PART-B ITEM BASED ON OFFER RATES

S #	DESCRIPTION	QUANTITY	RATES	AMOUNT
01	P/L Granular sub base course material over prepared sub grade in conformity with line grade thickness and typical cross sections shown in drawing for new pavement at grade widening existing pavement using well graded granular crushed stone with and all silt having a smooth gradation curve with in the limit for grading C or I as per AASHTO-M 180 method D using approved mechanical means or i/c watering with all lead and lift as per specification and as per direction of Engineer incharge	2520 cft ✓	OR Rs	
02	P/L Aggregate base course material over the prepared sub grade in conformity with lines grade thickness and typical cross section shown in drawing for new pavement using well graded granular crushed stoen with asan dand silt having a smooth gradation curve with tin the limit for grading A or B as per AASHTO M 142-62 and compacting to 100% of the minimum dry density accorign to AASHTO-T 180 method D using approved m\chanical means of i/c watering with all lead and lift as per specification and as per directed by engineer in charge	3375 cft ✓	OR Rs.	
03	P/F RCC ring slab 39" dia with RCC manhole cover of 21" dia as per direction of engineer in charge	06 Nos ✓	OR Rs.	
04	Extra for using SR cement in place of OPC	245 cwt ✓	OR Rs	
05	S/F imported sweet earth with in a radius of 5 miles i/c digging and loading and unloading and stacking at site leveling and dressing and compaction etc	1125 Nos ✓	OR Rs	
SUB TOTAL PART-B				

SIGNATURE OF CONTRACTOR _____

I / WE HEREBY QUOTED RATES AS FOLLOWS:-

01	PART-A (ITEM RATES BASES ON SR) @ _____ % ABOVE / BELOW SR I/C THE COST OF CARRIAGE OF MATERIALS AND DIFFERENCE OF COST OF BITUMEN	RS. _____
02	PART-B (ITEM RATE BASES ON OFFER RATES / ITEM RATES THE ITEMS OTHER THEN SCHEDULE RATES	RS.- _____
GRAND TOTAL PART-A & B		RS. _____

TOTAL RS. _____ RUPEES

Signature of contractor _____

Address : _____

(55)

27/18

Dated: 1-12-2015

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI
PTCL # 36697869 / 36660102 & FAX # 36762519

TENDER REFERENCE # NIT/ 3 2015

Dated: 1-12-2015

SUBJECT: REPAIR AND RE CONSTRUCTIONO F RCC PIPE DRIAN IN UC-03

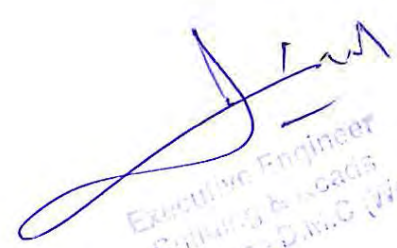
BILL OF QUANTITIES

ESTIMATED COST
BID SECURITY
TENDER COST

RS. 8,83,161.00+ OR
RS.17663.00
RS. 1,000.00

Issued to M/S _____
Video pay order / Challan # _____ dated: _____ Rs. _____.

Signature and stamp


Executive Engineer
Buildings & roads
Orangi Zone D.M.C (West)

3/18
56

SUBJECT: REPAIR AND RE CONSTRUCTION OF RCC PIPE DRAIN IN UC-03

01	P/L Granular sub base course material over prepared sub grade in conformity with line grade thickness and typical cross sections shown in drawing for new pavement at grade widening existing pavement using well graded granular crushed stone with and all silt having a smooth the limit for grading C or I as per gradation curve with in AASHTO-M 180 method D using approved mechanical means or i/c watering with all lead and lift as per specification and as per direction of Engineer incharge	1300 cft	OR Rs		
02	Imported earth within the radius of 5 miles i/d digging loading and unloading and stacking at site i/c leveling and compaction etc complete	1668 cft	OR Rs.		
03	P/F RCC ring slab 39" dia with RCC manhole of 21" dia as per direction of engineer in charge	05 Nos	OR		

I / WE HEREBY QUOTED RATES AS FOLLOWS:-

01	PART-A (ITEM RATES BASES ON SR) @ _____ % ABOVE / BELOW SR I/C THE COST OF CARRIAGE OF MATERIALS AND DIFFERENCE OF COST OF BITUMEN	RS. _____
02		
GRAND TOTAL PART-A		RS. _____

TOTAL RS. _____ RUPEES _____

Signature of contractor _____

Address : _____

Cell # _____ / PTCL # _____



DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI

57

SUBJECT: REPAIR AND RE CONSTRUCTION OF RCC PIPE DRAIN IN UC-03

PART-A ITEM BASED ON SCHEDULE RATES

S #	DESCRIPTION	QUANTITY	UNIT	RATES	AMOUNT
01	Dismantling of cement concrete plain flooring	874 cft ✓	cft	3327.50 % cft	29083.00 ✓
02	Dismantling of stone mantling and carpet	491 cft ✓	cft	605.00 ✓	2971.00 ✓
03	Excavation for pipe line in hard rock by hammering and chiseling alignment and shape leveling of beds trenches to correct level and grade cutting joints holes and disposal of surplus earth within one chain as directed by engineer in charge	4556 ✓	cft	4650.00 ✓ 0%cft	21185.00 ✓
04	Excavation for pipe line in hard rock by hammering and chiseling i/c trimming and dressing sides to true alignment and shape leveling of beds trenches to correct level and grade cutting joints holes and disposal of surplus earth within one chain as directed	1688 ✓	cft	24510.00 0 %cft	41373.00 ✓
05	P/L RCC rubber ring pipe of class A and fixing in trenches i/c cutting, fitting and jointing with rubber ring etc 12" dia pipe	900 Rft ✓	Rft	367.00 RFT ✓	330300.00 ✓
06	Construction of manhole 4' dia inside i/c RCC ring slab 39" dia with manhole cover 21" dia of 5' clear depth in 1:2:4 in 9" thick wall and bedding cast in situ with fair face steel shuttering i/c excavation back filling and dispose of surplus stuff up to one chain its	38 Nos ✓	Each	13064.00 ✓ Each	496432.00 ✓
07	Add for extra depth beyond 5 ft depth less the 5 ft deduct the same rate	(-) 55.75 ✓	Rft	1540.00 ✓ RFT	(-)85855.00 ✓
08	Refilling of excavation stuff in trenches 6" this compacting at all lead and lift	5139 cft ✓	Cft	2760.00 ✓ 0%cft	3527.00 ✓
09	P/L 1:3:6 CC using GSB ¾" and d/g i/c consolidation curing etc complete without shuttering	28 cft ✓	cft	12595.00 ✓	14184.00 ✓
10	Cartage of sand, bajri, lime surki murum building rubbish i/c loading and unloading and stacking at site	2470 cft ✓	cft	1065.00% cft	26306.00 ✓
11	P/L 1:2:4 RCC manhole covers i/c tor bars frame using GSB ¾" and d/g etc complete 21" dia /24" dia	04 Nos ✓	913.63 ✓	Each	3655.00 ✓
SUB TOTAL PART-A					883161.00 + OR

SIGNATURE OF CONTRACTOR

ADDRESS : _____

58

**DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI
PTCL # 36697869 / 36660102 & FAX # 36762519**

TENDER REFERENCE # NIT/ 3 2015

Dated: 1-12-2015

SUBJECT: REPAIRING AND MAINTENANCE OF CARPET HOUSE # 7 -166 AND IMAM BARGAH AL ABBAS IN UC-03


BILL OF QUANTITIES

ESTIMATED COST
BID SECURITY
TENDER COST

RS. 6,80,084.00+OR
RS. 13,602.00
RS. 1,000.00

Issued to M/S _____
Video pay order / Challan # _____ dated: _____ Rs. _____

Signature and stamp


Executive Engineer
Buildings & Roads
Orangi Zone (D.M.C. West)

59



DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI

SUBJECT: REPAIRING AND MAINTENANCE OF CARPET HOUSE # 7 -166 AND IMAM BARGAH
AL ABBAS IN UC-03

PART-A ITEM BASED ON SCHEDULE RATES

S #	DESCRIPTION	QUANTITY	UNIT	RATES	AMOUNT
01	Dismantling of existing asphaltic concrete	6075 cft ✓	cft	773.86 ✓	47012.00 ✓
02	Earth work, excavation of roadside nails forming its bank or putting the same on the embankment as directed breaking clods dressing its complete in ordinary soil	12482 ✓	Cft	1437.00 0% ✓ cft	17937.00 ✓
03	Cartage of sand, bajri, lime surki murum building rubbish i/c loading and unloading and stacking at site	15054 cft ✓	cft	1065.00% cft ✓	160326.00
04	Preparing of sub grade i/c earth exaction leveling to an average depth of 9" dressing to camber and consolidation with power roller	8000 cft ✓	cft	526.28 % cft ✓	42103.00 ✓
05	Applying of prime coat or tack coat with approved binder at the required trate i/c cleaning the road surface thoroughly heating to the required temperature and spraying the binder with pressured as directed etc complete	800 sft ✓	sft	64.96 % sft ✓	5197.00 ✓
06	Providing 1" thick consolidated premixed carpet in proper camber and grade i/c supplying 10 cft Bajri 4 cft hill sand of approved quality and grade bitumen of 8/100 penetration i/c missing in a mechanical mixer in required proportion i/c heating material and cleaning the road surface rate i/c all cost of material T&P and carrying up to 3 chain using crushed Bajri Laing premixed carpet	8000 ✓	Sft	4107.84 % cft ✓ 986.02 % cft 5093.86 % cft ✓	407509.00 ✓
SUB TOTAL PART-A					680084.00 + OR

SIGNATURE OF CONTRACTOR

ADDRESS :

3/19
60

SUBJECT: REHABILITATION OF CARPET HOUSE # F-110 NEAR MASJID AL HUSSAIN AND HOUSE # F-200 IN HUSSAINABAD IN UC-03

PART-B ITEM BASED ON OFFER RATES

S #	DESCRIPTION	QUANTITY	RATES	AMOUNT
01	P/L Granular sub base course material over prepared sub grade in conformity with line grade thickness and typical cross sections shown in drawing for new pavement at grade widening existing pavement using well graded granular crushed stone with and all silt having a smooth the limit for grading C or I as per gradation curve with in AASHTO-M 180 method D using approved mechanical means or i/c watering with all lead and lift as per specification and as per direction of Engineer incharge	2576 cft ✓	OR RS	
02	P/L Aggregate base course material over the prepared sub grade in conformity with lines grade thickness and typical cross section shown in drawing for new pavement using well graded granular crushed stoen with asandand silt having a smooth gradation curve with tin the limit for grading A or B as per AASHTO M 142-62 and compacting to 100% of the minimum dry density accorign to AASHTO-T 180 method D using approved m\chanical means of i/c watering with all lead and lift as per specification and as per directed by engineer in charge	3656 cft ✓	OR RS	
SUB TOTAL PART-B				

SIGNATURE OF CONTRACTOR

I / WE HEREBY QUOTED RATES AS FOLLOWS:-

01	PART-A (ITEM RATES BASES ON SR) @ _____ % ABOVE / BELOW SR I/C THE COST OF CARRIAGE OF MATERIALS AND DIFFERENCE OF COST OF BITUMEN	RS. _____
02	PART-B (ITEM RATE BASES ON OFFER RATES / ITEM RATES THE ITEMS OTHER THEN SCHEDULE RATES	RS.- _____
GRAND TOTAL PART-A & B		RS. _____

TOTAL RS. _____ RUPEES _____

Signature of contractor _____

Address : _____

(61) 3/20

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI
PTCL # 36697869 / 36660102 & FAX # 36762519

TENDER REFERENCE # NIT/ 3 2015

Dated: 1-12-2015

SUBJECT: REHABILITATION OF CC STREET AND FOOTH PATH AND SEWERAGE LINE HOUSE #
750 AND 743 NEAR OVAIS KIRYANA STORE IN UC-03.

BILL OF QUANTITIES

ESTIMATED COST
BID SECURITY
TENDER COST

RS. 6,71,411.00+OR
RS. 13,428.00
RS. 1,000.00

Issued to M/S _____
Video pay order / Challan # _____ dated: _____ Rs. _____.

Signature and stamp


Executive Engineer
Building & Works
Orangi Zone, D.M.C. (West)

62

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI

SUBJECT: REHABILITATION OF CC STREET AND FOOTH PATH AND SEWERAGE LINE HOUSE #
750 AND 743 NEAR OVAIS KIRYANA STORE IN UC-03.

PART-A ITEM BASED ON SCHEDULE RATES

S #	DESCRIPTION	QUANTITY	UNIT	RATES	AMOUNT
01	Excavation for pipe line in trenches in all kind of soil of murum i/c alignment and shape leveling of beds trenches to correct level and grade cutting joints holes and disposal of surplus earth within one chain as directed by engineer in charge	750	cft	4650.00 0%cft	3488.00
02	Excavation for pipe line in hard rock by hammering and chiseling alignment and shape leveling of beds trenches to correct level and grade cutting joints holes and disposal of surplus earth within one chain as directed by engineer in charge	1125	cft	24510.00 0%cft	27574.00
03	P/L RCC rubber ring pipe of class A and fixing in trenches i/c cutting, fitting and jointing with rubber ring etc 12" dia pipe	250 Rft	Rft	367.00 RFT	91750.00
04	Construction of manhole 4' dia inside i/c RCC ring slab 39" dia with manhole cover 21" dia of 5' clear depth in 1:2:4 in 9" thick wall and bedding cast in situ with fair face steel shuttering i/c excavation back filling and dispose of surplus stuff up to one chain its	11 Nos	Each	13064.00 Each	143704.00
05	Add for extra depth beyond 5 ft depth less the 5 ft deduct the same rate	(-) 22.00	Rft	1540.00 RFT	(-)33880.00
06	Refilling of excavation stuff in trenches 6" this compacting at all lead and lift	443 cft	Cft	2760.00 0%cft	1223.00
07	Dismantling of cement concrete plain flooring	1730 cft	cft	3327.50 % cft	57566.00
08	Dismantling of cement concrete flooring 1:2:4 plain	1149 cft	cft	1306.80% cft	15016.00
09	Cartage of sand, bajri, lime surki murum building rubbish i/c loading and unloading and stacking at site	3186 cft	cft	1065.00% cft	33931.00
10	Preparing of sub grade i/c earth excavation leveling to an average depth of 9" dressing to camber and consolidation with power roller	9000 sft	% sft	526.28	47366.00
11	P/L ½ & 2" topping CC 1:2:4 i/c surface finishing and dividing to panels	2409 sft 6591 sft	Sft sft	2548.29% sft 3275.50 %sft	61389.00 215889.00

63 3/20

12	P/L 1:2:4 RCC manhole covers i/c tor bars frame using GSB ¾" and d/g etc complete 21" dia /24" dia	07 Nos	913.63	6395.00
SUB TOTAL PART-A				671411.00 + OR

SIGNATURE OF CONTRACTOR _____
 ADDRESS : _____

PART-B ITEM BASED ON OFFER RATES

S #	DESCRIPTION	QUANTITY	RATES	AMOUNT
01	P/L Aggregate base course material over the prepared sub grade in conformity with lines grade thickness and typical cross section shown in drawing for new pavement using well graded granular crushed stoen with asandand silt having a smooth gradation curve with tin the limit for grading A or B as per AASHTO M 142-62 and compacting to 100% of the minimum dry density accorign to AASHTO-T 180 method D using approved m\chanical means of i/c watering with all lead and lift as per specification and as per directed by engineer in charge	3780 cft	OR Rs	
02	P/L Granular sub base course material over prepared sub grade in conformity with line grade thickness and typical cross sections shown in drawing for new pavement at grade widening existing pavement using well graded granular crushed stone with and all silt having a smooth the limit for grading C or I as per gradation curve with in AASHTO-M 180 method D using approved mechanical means or i/c watering with all lead and lift as per specification and as per direction of Engineer incharge	2520 cft	OR Rs	
03	P/F RCC ring slab 39" dia with RCC manhole of 21" dia as per direction of engineer in charge	04 Nos	OR	
04	Extra for using SR cement in place of OPC	245 cwt	OR	
05	S/F imported earth within the a radius of 5 miles i/c digging and loading and unloading and stacking at site complete as per direction o fengineer in charge	1125 cft	OR	
SUB TOTAL PART-B				

I / WE HEREBY QUOTED RATES AS FOLLOWS:-

01	PART-A (ITEM RATES BASES ON SR) @ _____ % ABOVE / BELOW SR I/C THE COST OF CARRIAGE OF MATERIALS AND DIFFERENCE OF COST OF BITUMEN	RS. _____
02	PART-B (ITEM RATE BASES ON OFFER RATES / ITEM RATES THE ITEMS OTHER THEN SCHEDULE RATES	RS.- _____
GRAND TOTAL PART-A & B		RS. _____

TOTAL RS. _____ RUPEES _____

Signature of contractor _____

Address : _____

03/21

64 3/21

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI
PTCL # 36697869 / 36660102 & FAX # 36762519

TENDER REFERENCE # NIT/ 3 2015

Dated: 1-12-2015

SUBJECT: SYSTEMATIC SEWERAGE SYSTEM K K WATER TANK SHOP AND SUTUDY
COACHING CENTER IN HANIFABAD IN UC-03.

BILL OF QUANTITIES

ESTIMATED COST	RS. 8,84,074.00+ OR
BID SECURITY	RS. 17681.00
TENDER COST	RS. 1,000.00

Issued to M/S _____
Video pay order / Challan # _____ dated: _____ Rs. _____

Signature and stamp


Executive Engineer
Building & Plumb
Orangi, D.D. (West)

65

3/21



DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI

SUBJECT: SYSTEMATIC SEWERAGE SYSTEM K K WATER TANK SHOP AND SUTUDY
COACHING CENTER IN HANIFABAD IN UC-03

PART-A ITEM BASED ON SCHEDULE RATES

S #	DESCRIPTION	QUANTITY	UNIT	RATES	AMOUNT
01	Dismantling of cement concrete plain flooring	874 cft	cft	3327.50 % cft	29083.00 ✓
02	Dismantling of stone and removing of stone metal and carpet	491 cft ✓	cft	605.00 % cft ✓	2971.00 ✓
03	Excavation for pipe line in hard rock by hammering and chiseling alignment and shape leveling of beds trenches to correct level and grade cutting joints holes and disposal of surplus earth within one chain as directed by engineer in charge	4556 ✓	cft	4650.00 ✓ 0%cft	21185.00 ✓
04	Excavation for pipe line in trenches hard rock by hammering and chiseling i/c trimming and dressing sides to true alignment and shape leveling of beds trenches to correct level and grade cutting joints holes and disposal of surplus earth within one chain as directed	1688 ✓	cft	24510.00 ✓ %cft	41373.00 ✓
05	P/L RCC rubber ring pipe of class A and fixing in trenches i/c cutting, fitting and jointing with rubber ring etc 12" dia pipe	900 Rft ✓	Rft	367.00 RFT	330300.00 ✓
06	Construction of manhole 4' dia inside i/c RCC ring slab 39" dia with manhole cover 21" dia of 5' clear depth in 1:2:4 in 9" thick wall and bedding cast in situ with fair face steel shuttering i/c excavation back filling and dispose of surplus stuff up to one chain its	38 Nos ✓	Each	13064.00 ✓ Each	496432.00 ✓
07	Add for extra depth beyond 5 ft depth less the 5 ft deduct the same rate	(-) 55.75 ✓	Rft	1540.00 ✓ RFT	(-)85855.00 ✓
08	Refilling of excavation stuff in trenches 6" this compacting at all lead and lift	5139cft ✓	Cft	2760.00 ✓ 0%cft	14184.00 ✓
09	P/L 1:3:6 CC using GSB ¾" and d/g i/c consolidation curing etc complete without shuttering	28 cft ✓	cft	12595.00 ✓	3527.00 ✓
10	Cartage of sand, bajri, lime surki murum building rubbish i/c loading and unloading and stacking at site	2470 cft ✓	cft	1065.00% cft	26306.00 ✓
11	P/L 1:2:4 RCC manhole covers i/c tor bars frame using GSB ¾" and d/g etc complete 21" dia /24" dia	05 Nos ✓	913.63	Each	4568.00 ✓
SUB TOTAL PART-A					8,84,074.00 + OR

SIGNATURE OF CONTRACTOR

ADDRESS : _____

69

SUBJECT: SYSTEMATIC SEWERAGE SYSTEM K K WATER TANK SHOP AND SUTUDY
COACHING CENTER IN HANIFABAD IN UC-03

01	P/L Granular sub base course material over prepared sub grade in conformity with line grade thickness and typical cross sections shown in drawing for new pavement at grade widening existing pavement using well graded granular crushed stone with and all silt having a smooth the limit for grading C or I as per gradation curve with in AASHTO-M 180 method D using approved mechanical means or i/c watering with all lead and lift as per specification and as per direction of Engineer incharge	1300 cft ✓	OR Rs		
02	Imported earth within the radius of 5 miles i/d digging loading and unloading and stacking at site i/c leveling and compaction etc complete	1688 cft ✓	OR Rs.		
03	P/F RCC ring slab 39" dia with RCC manhole of 21" dia as per direction of engineer in charge	05 Nos ✓	OR		

I / WE HEREBY QUOTED RATES AS FOLLOWS:-

01	PART-A (ITEM RATES BASES ON SR) @ _____ % ABOVE / BELOW SR I/C THE COST OF CARRIAGE OF MATERIALS AND DIFFERENCE OF COST OF BITUMEN	RS. _____
02		
GRAND TOTAL PART-A		RS. _____

TOTAL RS. _____ RUPEES _____

Signature of contractor _____

Address : _____

Cell # _____ / PTCL # _____

67

3/22

**DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI
PTCL # 36697869 / 36660102 & FAX # 36762519**

TENDER REFERENCE # NIT/ 3 2015

Dated: 1-12-2015

SUBJECT: REHABILITATION OF CARPET HOUSE # F-110 NEAR MASJID AL HUSSAIN AND HOUSE # F-200 IN HUSSAINABAD IN UC-03

BILL OF QUANTITIES

ESTIMATED COST
BID SECURITY
TENDER COST

RS. 6,80,774.00+OR ✓
RS. 13615.00 ✓
RS. 1,000.00 ✓

Issued to M/S _____
Video pay order / Challan # _____ dated: _____ Rs. _____.

Signature and stamp


Executive Engineer
Public Works Deptt

68

SUBJECT: REHABILITATION OF CARPET HOUSE # F-110 NEAR MASJID AL HUSSAIN AND HOUSE # F-200 IN HUSSAINABAD IN UC-03

PART-B ITEM BASED ON OFFER RATES

S #	DESCRIPTION	QUANTITY	RATES	AMOUNT
01	P/L Granular sub base course material over prepared sub grade in conformity with line grade thickness and typical cross sections shown in drawing for new pavement at grade widening existing pavement using well graded granular crushed stone with and all silt having a smooth the limit for grading C or I as per gradation curve with in AASHTO-M 180 method D using approved mechanical means or i/c watering with all lead and lift as per specification and as per direction of Engineer incharge	2576 cft ✓	OR Rs	
02	P/L Aggregate base course material over the prepared sub grade in conformity with lines grade thickness and typical cross section shown in drawing for new pavement using well graded granular crushed stoen with asandand silt having a smooth gradation curve with tin the limit for grading A or B as per AASHTO M 142-62 and compacting to 100% of the minimum dry density accorign to AASHTO-T 180 method D using approved m\chanical means of i/c watering with all lead and lift as per specification and as per directed by engineer in charge	3656 cft ✓	OR RS	
SUB TOTAL PART-B				

SIGNATURE OF CONTRACTOR

I / WE HEREBY QUOTED RATES AS FOLLOWS:-

01	PART-A (ITEM RATES BASES ON SR) @ _____ % ABOVE / BELOW SR I/C THE COST OF CARRIAGE OF MATERIALS AND DIFFERENCE OF COST OF BITUMEN	RS. _____
02	PART-B (ITEM RATE BASES ON OFFER RATES / ITEM RATES THE ITEMS OTHER THEN SCHEDULE RATES	RS.- _____
GRAND TOTAL PART-A & B		RS. _____

TOTAL RS. _____ RUPEES _____

Signature of contractor _____

Address : _____

Cell # _____ / PTCL # _____

69



DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI

SUBJECT: REHABILITATION OF CARPET HOUSE # F-110 NEAR MASJID AL HUSSAIN AND
HOUSE # F-200 IN HUSSAINABAD IN UC-03

PART-A ITEM BASED ON SCHEDULE RATES

S #	DESCRIPTION	QUANTITY	UNIT	RATES	AMOUNT
01	Dismantling of existing asphaltic concrete	6000 cft ✓	cft	773.86 % cft ✓	46432.00 ✓
02	Earth work, excavation of roadside nails forming its bank or putting the same on the embankment as directed breaking clods dressing its complete in ordinary soil	12354 12210 ✓	Cft	1437.00 0% cft	17546.00
03	Cartage of sand, bajri, lime surki murum building rubbish i/c loading and unloading and stacking at site	15210 cft ✓	cft	1065.00% cft ✓	161987.00 ✓
04	Preparing of sub grade i/c earth exaction leveling to an average depth of 9" dressing to camber and consolidation with power roller	8000 cft ✓	cft	526.28 % cft ✓	42103.00
05	Applying of prime coat or tack coat with approved binder at the required trate i/c cleaning the road surface thoroughly heating to the required temperature and spraying the binder with pressured as directed etc complete	8000 sft ✓	sft	64.96 % sft ✓	5197.00
06	Providing 1" thick consolidated premixed carpet in proper camber and grade i/c supplying 10 cft Bajri 4 cft hill sand of approved quality and grade bitumen of 8/100 penetration i/c missing in a mechanical mixer in required proportion i/c heating material and cleaning the road surface rate i/c all cost of material T&P and carrying up to 3 chain using crushed Bajri Laing premixed carpet	8000 ✓	Sft	4107.84 % cft 986.02 % cft 5093.86 % cft ✓	407509.00 ✓
SUB TOTAL PART-A					680774.00 + OR ✓

SIGNATURE OF CONTRACTOR

ADDRESS : _____

70 3/23.

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI
PTCL # 36697869 / 36660102 & FAX # 36762519

TENDER REFERENCE # NIT/ 3 2015

Dated: 1-12-2015


SUBJECT: FIXING AND SUPPLYING OF MAN HOLE COVERS WITH RING I/C FIXING CHARGES
ON DIFFERENT PLACES LOCATION AT ORANGI ZONE
BILL OF QUANTITIES

ESTIMATED COST
BID SECURITY
TENDER COST

RS. Offer rates
RS. 2% of cost
RS. 1,000.00

Issued to M/S _____
Video pay order / Challan # _____ dated: _____ Rs. _____

Signature and stamp


Executive Engineer
Estimate & Roads
(C. Must)

71

3/23

SUBJECT: FIXING AND SUPPLYING OF MAN HOLE COVERS WITH RING I/C FIXING CHARGES ON DIFFERENT PLACES LOCATION AT ORANGI ZONE

01					
02 ✓	Providing and fixing of pre cast RCC ring and RCC man hole covers 21" dia i/c fixing as per direction of engineer in charges	333 NOS	OR		

I / WE HEREBY QUOTED RATES AS FOLLOWS:-

01	PART-B (ITEM RATE BASES ON OFFER RATES / ITEM RATES THE ITEMS OTHER THEN SCHEDULE RATES	RS.- _____
02		
GRAND TOTAL PART-A		RS. _____

TOTAL RS. _____ RUPEES _____

Signature of contractor _____

Address : _____

Cell # _____ / PTCL # _____

(72)

3/24

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI
PTCL # 36697869 / 36660102 & FAX # 36762519

TENDER REFERENCE # NIT/ 3 2015

Dated: 1-12-2015

SUBJECT: REPAIR AND MAINTENANCE OF FOOT PATH I/C PAINTING OF REMOVAL OF SURPLUS STUFF IN NEAR SECTOR 9 & 6 IN ORANGI ZONE. ✓

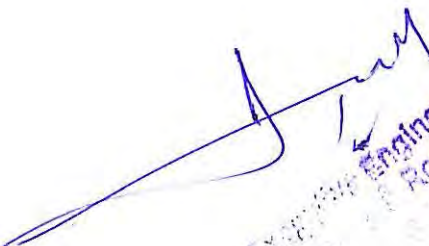
BILL OF QUANTITIES

ESTIMATED COST
BID SECURITY
TENDER COST

RS. 4,35,000.00+OR ✓
RS. 8700.00 ✓
RS. 1,000.00 ✓

Issued to M/S _____
Video pay order / Challan # _____ dated: _____ Rs. _____

Signature and stamp


Executive Engineer
District Municipal Corporation (West)



3/24

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI
SUBJECT: REPAIR AND MAINTENANCE OF FOOT PATH I/C PAINTING OF REMOVAL OF SURPLUS
STUFF IN NEAR SECTOR 9 & 6 IN ORANGI ZONE.

PART-A ITEM BASED ON SCHEDULE RATES

S #	DESCRIPTION	QUANTITY	UNIT	RATES	AMOUNT
01	Dismantling of cement concrete plain flooring	638 cft ✓	cft	3327.50 % cft ✓	21229.00 ✓
02	Dismantling of cement concrete floiorngn 1:2:4 plain	1238 cft ✓	cft	1306.80% cft ✓	16178.00 ✓
03	Preparing of sub grade i/c earth excavation leveling to an average depth of 9" dressing to camber and consolidation with power roller	3750 sft ✓	% sft	526.28 ✓	19736.00 ✓
04	Earth work, excavation of roadside nails forming its bank or putting the same on the embankment as directed breaking clods dressing its complete in ordinary soil	8910 ✓	Cft	1437.00 0% ✓ cft	12804.00 ✓
05	Cartage of sand, bajri, lime surki murum building rubbish i/c loading and unloading and stacking at site	18699 cft ✓	cft	1065.00% cft ✓	199144.00 ✓
06	P/L 2 " topping CC 1:2:4 i/c surface finishing and dividing to panels	3750 sft ✓	sft	3275.50 %sft ✓	122831.00 ✓
07	Construction of manhole 4' dia inside i/c RCC ring slab 39" dia with manhole cover 21" dia of 5' clear depth in 1:2:4 in 9" thick wall and bedding cast in situ with fair face steel shuttering i/c excavation back filling and dispose of surplus stuff up to one chain its	02 Nos ✓	Each	13064.00 ✓	26128.00 ✓
08	Add for extra depth beyond 5 ft depth less the 5 ft deduct the same rate	(-)01.428 ✓	Rft	1540.00 ✓	(-) 2199.00 ✓
09	Earth work, excavation of roadside nails forming its bank or putting the same on the embankment as directed breaking clods dressing its complete in ordinary soil	7913 ✓	Cft	2420.00 0% ✓ cft	19149.00 ✓
SUB TOTAL PART-A					8,53,928.00 + OR

SIGNATURE OF CONTRACTOR

ADDRESS : _____

435000/- 12
+ OR.

(74) 3/24

SUBJECT: REPAIR AND MAINTENANCE OF FOOT PATH I/C PAINTING OF REMOVAL OF SURPLUS STUFF IN NEAR SECTOR 9 & 6 IN ORANGI ZONE.

PART-B ITEM BASED ON OFFER RATES

S #	DESCRIPTION	QUANTITY	RATES	AMOUNT
01	P/L Aggregate base course material over the prepared sub grade in conformity with lines grade thickness and typical cross section shown in drawing for new pavement using well graded granular crushed stoen with asandand silt having a smooth gradation curve with tin the limit for grading A or B as per AASHTO M 142-62 and compacting to 100% of the minimum dry density accorign to AASHTO-T 180 method D using approved m\chanical means of i/c watering with all lead and lift as per specification and as per directed by engineer in charge	2788 cft ✓	OR Rs	
02	P/L Granular sub base course material over prepared sub grade in conformity with line grade thickness and typical cross sections shown in drawing for new pavement at grade widening existing pavement using well graded granular crushed stone with and all silt having a smooth the limit for grading C or I as per gradation curve with in AASHTO-M 180 method D using approved mechanical means or i/c watering with all lead and lift as per specification and as per direction of Engineer incharge	2000 cft ✓	OR Rs	
03	Painting of foot path kerb stone block situ with out paint 2 nd and sub requirement coat make and shade as per diction of engineer incharge	2500 sft ✓	OR	
04	Removal of slogan wall chalking with direction of two coat by skilled labour i/c having Suzuki helper and lodder etc full charges as per direction of engineer in charge	12800 sft ✓	OR	
SUB TOTAL PART-B				

I / WE HEREBY QUOTED RATES AS FOLLOWS:-

01	PART-A (ITEM RATES BASES ON SR) @ _____ % ABOVE / BELOW SR I/C THE COST OF CARRIAGE OF MATERIALS AND DIFFERENCE OF COST OF BITUMEN	RS. _____
02	PART-B (ITEM RATE BASES ON OFFER RATES / ITEM RATES THE ITEMS OTHER THEN SCHEDULE RATES	RS.- _____
GRAND TOTAL PART-A & B		RS. _____

TOTAL RS. _____ RUPEES _____

Signature of contractor _____

Address : _____

75 3/25

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI
PTCL # 36697869 / 36660102 & FAX # 36762519

TENDER REFERENCE # NIT/ 3 2015

Dated: 1-12-2015

SUBJECT: REPAIR OF BROKEN CURB STONE ON DIFFERENT LOCATION AND PAINTING 12/L ROAD AND OTHER PLACES IN ORANGI ZONE.

BILL OF QUANTITIES

ESTIMATED COST
BID SECURITY
TENDER COST

RS. 3,75,450.00+OR ✓
RS. 7509.00 ✓
RS. 1,000.00 ✓

Issued to M/S _____
Video pay order / Challan # _____ dated: _____ Rs. _____ .

Signature and stamp


Executive Engineer
Planning & Research
D.M.C. (Phase-I)

76

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI

SUBJECT: _____ REPAIR OF BROKEN CURB STONE ON DIFFERENT LOCATION AND PAINTING 12/L
ROAD AND OTHER PLACES IN ORANGI ZONE.

PART-A ITEM BASED ON SCHEDULE RATES

S #	DESCRIPTION	QUANTITY	UNIT	RATES	AMOUNT
01	Dismantling of cement concrete plain flooring	1091 cft ✓	cft	3327.50 % cft	36303.00 ✓
02	Dismantling of cement concrete floiorngn 1:2:4 plain	3938 cft ✓	cft	1306.80% cft ✓	51462.00 ✓
03	Cartage of sand, bajri, lime surki murum building rubbish i/c loading and unloading and stacking at site	7279 cft ✓	cft	1065.00% cft	77521.00 ✓
04	Preparing of sub grade i/c earth excavation leveling to an average depth of 9" dressing to camber and consolidation with power roller	2052 sft ✓	% sft	526.28 ^{70%} ₂	10799.00 ✓
05	P/L 2 " topping CC 1:2:4 i/c surface finishing and dividing to panels	2052 sft ✓	sft	3275.50 %sft ✓	67213.00 ✓
06	Construction of manhole 4' dia inside i/c RCC ring slab 39" dia with manhole cover 21" dia of 5' clear depth in 1:2:4 in 9" thick wall and bedding cast in situ with fair face steel shuttering i/c excavation back filling and dispose of surplus stuff up to one chain its	10 Nos ✓	Each	13064.00 ✓	130640.00 ✓
07	Add for extra depth beyond 5 ft depth less the 5 ft deduct the same rate	(-)17.41 ✓	Rft	1540.00 ✓	(-) 26811.00 ✓
08	P/L 1:2:4 RCC manhole covers i/c tor bars frame using GSB ¾" and d/g etc complete 21" dia 24" dia	31 Nos ✓	Each	913.63 ✓	28323.00 ✓
SUB TOTAL PART-A					375450.00 + OR ✓

SIGNATURE OF CONTRACTOR

ADDRESS : _____

SUBJECT: REPAIR AND MAINTENANCE OF FOOT PATH I/C PAINTING OF REMOVAL OF SURPLUS STUFF IN NEAR SECTOR 9 & 6 IN ORANGI ZONE.

PART-B ITEM BASED ON OFFER RATES

S #	DESCRIPTION	QUANTITY	RATES	AMOUNT
01	P/L Aggregate base course material over the prepared sub grade in conformity with lines grade thickness and typical cross section shown in drawing for new pavement using well graded granular crushed stoen with asandand silt having a smooth gradation curve with tin the limit for grading A or B as per AASHTO M 142-62 and compacting to 100% of the minimum dry density accorign to AASHTO-T 180 method D using approved m\chanical means of i/c watering with all lead and lift as per specification and as per directed by engineer in charge	2500 cft ✓	OR Rs	
02	P/L Granular sub base course material over prepared sub grade in conformity with line grade thickness and typical cross sections shown in drawing for new pavement at grade widening existing pavement using well graded granular crushed stone with and all silt having a smooth the limit for grading C or l as per gradation curve with in AASHTO-M 180 method D using approved mechanical means or i/c watering with all lead and lift as per specification and as per direction of Engineer incharge	2000 cft ✓	OR Rs	
03	Fair face per cast kerb stone block with ratio by weight 1:2:4 CC having cube crushing strength 2850 PSI after 28 days and having size 1.5 ft height 12 inch width 4" top i/c z20 cm 1:4 cm by jointing and leeling alignment shall be properly as per direction of engineer in charge	150 Rft ✓	OR	
04	Painting of foot path kerb stone block situ with out paint 2 nd and sub requirement coat make and shade as per diction of engineer incharge	2320 sft ✓	OR	
05	Removal of slogan wall chalking with direction of two coat by skilled labour i/c having Suzuki helper and lodder etc full charges as per direction of engineer in charge	12000 sft ✓	OR	
06	P/F RCC ring slab 39" dia with RCC manhole of 21" dia as per direction of engineer in charge	20 Nos ✓	OR	
SUB TOTAL PART-B				

19

SUBJECT: REPAIR AND MAINTENANCE OF FOOT PATH I/C PAINTING OF REMOVAL OF SURPLUS STUFF IN NEAR SECTOR 9 & 6 IN ORANGI ZONE.

I / WE HEREBY QUOTED RATES AS FOLLOWS:-

01	PART-A (ITEM RATES BASES ON SR) @ _____ % ABOVE / BELOW SR I/C THE COST OF CARRIAGE OF MATERIALS AND DIFFERENCE OF COST OF BITUMEN	RS. _____
02	PART-B (ITEM RATE BASES ON OFFER RATES / ITEM RATES THE ITEMS OTHER THEN SCHEDULE RATES	RS.- _____
GRAND TOTAL PART-A & B		RS. _____

TOTAL RS. _____ RUPEES _____

Signature of contractor _____

Address : _____

(79) 2/26

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI
PTCL # 36697869 / 36660102 & FAX # 36762519

TENDER REFERENCE # NIT/ 3 2015

Dated: 1-12-2015

SUBJECT: REPAIR AND MAINTENANCE OF BROKEN PIPE DRAIN AND OTHER WORKS IN SECTOR 11 ½ IN ORANGI ZONE. ✓


BILL OF QUANTITIES

ESTIMATED COST
BID SECURITY
TENDER COST

RS. 2,10,500.00 +OR ✓
RS. 4210.00 ✓
RS. 1,000.00 ✓

Issued to M/S _____
Video pay order / Challan # _____ dated: _____ Rs. _____

Signature and stamp


Executive Engineer
Water & Roads
Orangi East, East, (West)

80

3/26



DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI

SUBJECT: REPAIR AND MAINTENANCE OF BROKEN PIPE DRAIN AND OTHER WORKS IN
SECTOR 11 ½ IN ORANGI ZONE.

PART-A ITEM BASED ON SCHEDULE RATES

S #	DESCRIPTION	QUANTITY	UNIT	RATES	AMOUNT
01	Excavation for pipe line in trenches and pits in all kind of soils of murum i/c trimming and dressing sides to true alignment and shape leveling of beds trenches to correct level and grade cutting joints holes and disposal of surplus earth within one chain as directed by engineer in charge	198 ✓	cft	4650.00 ✓ 0% cft	921.00 ✓
02	P/L RCC rubber ring pipe of class A and fixing in trenches i/c cutting, fitting and jointing with rubber ring etc 12" dia pipe	36 Rft	Rft	367.00 RFT ✓	13212.00 ✓
03	Construction of manhole 4' dia inside i/c RCC ring slab 39" dia with manhole cover 21" dia of 5' clear depth in 1:2:4 in 9" thick wall and bedding cast in situ with fair face steel shuttering i/c excavation back filling and dispose of surplus stuff up to one chain its complete	02 Nos ✓	Each	13064.00 ✓ Each	26128.00 ✓
04	Add for extra depth beyond 5 ft depth less the 5 ft deduct the same rate	(-) 01.823 ✓	Rft	1540.00 ✓ RFT	(-) 2807.00 ✓
05	Earth work excavation in irrigation channels irrigation drains etc dressed to designed section and profile excavated materials disposed off and dressed within 50 ft lead	5000 cft ✓	cft	2420.00 ✓ %0 cft	12100.00 ✓
06	Earth work excavation of road side nails forming its bank or putting the same on embankment as directed breaking clods dressing etc complete	8910 ✓	cft	1437.00 % 0 ✓ cft	12804.00 ✓
07	Cartage of sand bajri lime surki murum and building rubbish i/c loading and unloading and stacking at site	13910 ✓	cft	1065.00 % cft	148142.00 ✓
SUB TOTAL PART-A					210500.00 + OR ✓

SIGNATURE OF CONTRACTOR

ADDRESS : _____

3/26

31

SUBJECT: REPAIR AND MAINTENANCE OF BROKEN PIPE DRAIN AND OTHER WORKS IN SECTOR 11 ½ IN ORANGI ZONE.

PART-B ITEM BASED ON OFFER RATES

S #	DESCRIPTION	QUANTITY	RATES	AMOUNT
01	P/L Aggregate base course material over the prepared sub grade in conformity with lines grade thickness and typical cross section shown in drawing for new pavement using well graded granular crushed stoen with asandand silt having a smooth gradation curve with tin the limit for grading A or B as per AASHTO M 142-62 and compacting to 100% of the minimum dry density accorign to AASHTO-T 180 method D using approved m\chanical means of i/c watering with all lead and lift as per specification and as per directed by engineer in charge	2000 cft ✓	OR RS	
02	P/L Granular sub base course material over prepared sub grade in conformity with line grade thickness and typical cross sections shown in drawing for new pavement at grade widening existing pavement using well graded granular crushed stone with and all silt having a smooth gradation curve with in the limit for grading C or I as per AASHTO-M 180 method D using approved mechanical means or i/c watering with all lead and lift as per specification and as per direction of Engineer incharge	4500 cft ✓	OR RS	
03	Fair face per cast kerb stone block with ratio by weight 1:2:4 CC having cube crushing strength 2850 PSI after 28 days and having size 1.5 ft height 12 inch width 4" top i/c z20 cm 1:4 cm by jointing and leeling alignment shall be properly as per direction of engineer in charge	250 Rft ✓	OR	
04	Painting of foot path kerb stone block situ with out paint 2 nd and sub requirement coat make and shade as per diction of engineer incharge	2750 sft	OR	
05	Removal of slogan wall chalking with direction of two coat by skilled labour i/c having Suzuki helper and lodder etc full charges as per direction of engineer in charge	13800 sft ✓	OR	
SUB TOTAL PART-B				

SIGNATURE OF CONTRACTOR

82

SUBJECT: REPAIR AND MAINTENANCE OF BROKEN PIPE DRAIN AND OTHER WORKS IN SECTOR 11 1/2 IN ORANGI ZONE.

I / WE HEREBY QUOTED RATES AS FOLLOWS:-

01	PART-A (ITEM RATES BASES ON SR) @ _____ % ABOVE / BELOW SR I/C THE COST OF CARRIAGE OF MATERIALS AND DIFFERENCE OF COST OF BITUMEN	RS. _____
02	PART-B (ITEM RATE BASES ON OFFER RATES / ITEM RATES THE ITEMS OTHER THEN SCHEDULE RATES	RS.- _____
GRAND TOTAL PART-A & B		RS. _____

TOTAL RS. _____ RUPEES _____

Signature of contractor _____

Address : _____

Cell # _____ / PTCL # _____

83

3/27

03/27

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI
PTCL # 36697869 / 36660102 & FAX # 36762519

TENDER REFERENCE # NIT/ **3** 2015

Dated: 1-12-2015


SUBJECT: REPAIR AND REPLACEMENT OF DAMAGE SEWERAGE SYSTEM NEAR POWER HOUSE I/C MAIN HOLES COVERS AND OTHER WORKS IN SECTOR 13 AND 15 IN ORANGI ZONE
BILL OF QUANTITIES

ESTIMATED COST
BID SECURITY
TENDER COST

RS. 8,20,515.00+OR
RS. 16410.00
RS. 1,000.00

Issued to M/S _____
Video pay order / Challan # _____ dated: _____ Rs. _____

Signature and stamp


Executive Engineer
Water & Roads
Orangi Zone D.M.C (West)

84

3/23



DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAIKRAH-E-ORANGI, ORANGI TOWN, KARACHI

SUBJECT: REPAIR AND REPLACEMENT OF DAMAGE SEWERAGE SYSTEM NEAR POWER HOUSE I/C MAIN HOLES COVERS AND OTHER WORKS IN SECTOR 13 AND 15 IN ORANGI ZONE

PART-A ITEM BASED ON SCHEDULE RATES

NO	DESCRIPTION	QUANTITY	UNIT	RATES	AMOUNT
01	Dismantling of cement concrete plain flooring CC 1:2:4	2466 cft ✓	cft	3327.50% cft ✓	82056.00 ✓
02	Excavation for pipe line in trenches and pits in all kind of soils of murum i/c trimming and dressing sides to true alignment and shape leveling of beds trenches to correct level and grade cutting joints holes and disposal of surplus earth within one chain as directed by engineer in charge	3188 ✓	cft	10770.00 ✓ 0%cft	34335.00 ✓
03	P/L RCC rubber ring pipe of class A and fixing in trenches i/c cutting, fitting and jointing with rubber ring etc 12" dia pipe	500 Rft ✓	Rft	367.00 RFT ✓	183500.00 ✓
04	Construction of manhole 4' dia inside i/c RCC ring slab 39" dia with manhole cover 21" dia of 5' clear depth in 1:2:4 in 9" thick wall and bedding cast in situ with fair face steel shuttering i/c excavation back filling and dispose of surplus stuff up to one chain its complete	20 Nos ✓	Each	13064.00 ✓	261280.00 ✓
05	Add for extra depth beyond 5 ft depth less the 5 ft deduct the same rate	(-)45.9806 ✓	Rft	1540.00 ✓	(-) 70810.00 ✓
06	Refilling of excavation stuff in trenches 6" this compacting at all lead and lift	1594cft ✓	Cft	2760.00 ✓ 0%cft	4399.00 ✓
07	Cartage of sand bajri lime surki murum and building rubbish i/c loading and unloading and stacking at site 10 miles	11845 ✓	cft	1065.00 % cft ✓	126149.00 ✓
08	Extra work excavation in irrigation channels drian etc ddressed to designed section and profile excavated material dispos off the dressed within 50 ft	6975 ✓	cft	2420.00 %0 cft ✓	16880.00 ✓
09	P/L 1:2:4 RCC manhole covers i/c tor bars frame using GSB ¼' and d/g etc complete	200 ✓	Nos	913.63	182726.00 ✓
SUB TOTAL PART-A					8,20,515.00 + OR

SIGNATURE OF CONTRACTOR

ADDRESS :

3/23

SUBJECT: REPAIR AND REPLACEMENT OF DAMAGE SEWERAGE SYSTEM NEAR POWER HOUSE I/C MAIN HOLES COVERS AND OTHER WORKS IN SECTOR 13 AND 15 IN ORANGI ZONE

PART-B ITEM BASED ON OFFER RATES

S #	DESCRIPTION	QUANTITY	RATES	AMOUNT
01	P/L Granular sub base course material over prepared sub grade in conformity with line grade thickness and typical cross sections shown in drawing for new pavement at grade widening existing pavement using well graded granular crushed stone with and all silt having a smooth gradation curve with in the limit for grading C or I as per AASHTO M 180 method D using approved mechanical means or i/c watering with all lead and lift as per specification and as per direction of Engineer incharge	1950 cft	OR	
02	P/F RCC slab pre cast 2" thick of required size and shape and racking out joints with curing etc complete as per direction of engineer incharge	350 sft	OR	
03	P/F RCC ring slab 39" dia with RCC man hole cover of 21" as per direction of Engineer incharge	10 Nos	OR	
SUB TOTAL PART-B				

SIGNATURE OF CONTRACTOR

I / WE HEREBY QUOTED RATES AS FOLLOWS:

01	PART A (ITEM RATES BASES ON SR) (a) % ABOVE / BELOW SR I/C THE COST OF CARRIAGE OF MATERIALS AND DIFFERENCE OF COST OF BITUMEN	RS. _____
02	PART B (ITEM RATE BASES ON OFFER RATES / ITEM RATES THE ITEMS OTHER THEN SCHEDULE RATES	RS.- _____
GRAND TOTAL PART-A & B		RS. _____

TOTAL RS. _____ RUPIES _____

Signature of contractor _____

Address : _____

Cell # _____ / PTCL # _____

(86)

03/28

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI
PTCL # 36697869 / 36660102 & FAX # 36762519

TENDER REFERENCE # NIT/ _____ 2015

Dated: _____



SUBJECT: REPAIR AND MAINTENANCE OF 12" DIA RCC PIPE LINE SHAHZAD HOUSE
TO USMAN CHICKEN HOUSE IN ORANGI ZONE.

BILL OF QUANTITIES

ESTIMATED COST	RS. 7,50,000.00 + OR
BID SECURITY	RS. 15000.00
TENDER COST	RS. 1,000.00

Issued to M/S _____
Video pay order / Challan # _____ dated: _____ Rs. _____.

Signature and stamp



DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI. ORANGI TOWN. KARACHI

SUBJECT: REPAIR AND MAINTENANCE OF 12" DIA RCC PIPE LINE SHAHZAD HOUSE
TO USMAN CHICKEN HOUSE IN ORANGI ZONE.

PART-A ITEM BASED ON SCHEDULE RATE

S #	DESCRIPTION	QUANTITY	UNIT	RATES	AMOUNT
01	Dismantling of cement concrete plain flooring CC 1:2:4	1980 cft	cft	3327.50	65885.00
02	Excavation for pipe line in in hard rock by hammering and chiseling etc alignment and shape leveling of beds trenches to correct level and grade cutting joints holes and disposal of surplus earth within one chain as directed by engineer in charge	4304	cft	10770.00 0%cft	46354.00
03	P/L RCC rubber ring pipe of class A and fixing in trenches i/c cutting, fitting and jointing with rubber ring etc 12" dia pipe	800 Rft	Rft	367.00	293600.00
04	Construction of manhole 4' dia inside i/c RCC ring slab 39" dia with manhole cover 21" dia of 5' clear depth in 1:2:4 in 9" thick wall and bedding cast in situ with fair face steel shuttering i/c excavation back filling and dispose of surplus stuff up to one chain its complete	36 Nos	Each	13064.00	470304.00
05	Add for extra depth beyond 5 ft depth less the 5 ft deduct the same rate	(-) 81.90	Rft	1540.00	(-)126126.00
SUB TOTAL PART-A					7,50,000.00 + OR

SIGNATURE OF CONTRACTOR

ADDRESS : _____

78

SUBJECT: REPAIR AND MAINTENANCE OF 12" DIA RCC PIPE LINE SHAHZAD HOUSE TO USMAN CHICKEN HOUSE IN ORANGI ZONE

.PART-B ITEM BASED ON OFFER RATES

S #	DESCRIPTION	QUANTITY	RATES	AMOUNT
01	P/L Granular sub base course material over prepared sub grade in conformity with line grade thickness and typical cross sections shown in drawing for new pavement at grade widening existing pavement using well graded granular crushed stone with and all silt having a smooth gradation curve with in the limit for grading C or I as per AASHTO-M 180 method D using approved mechanical means or i/c watering with all lead and lift as per specification and as per direction of Engineer incharge	2420 cft	OR Rs	
02	P/F RCC ring slab 39" dia with RCC manhole cover of 21" dia as per direction of engineer in charge	30 Nos	OR Rs.	
SUB TOTAL PART-B				

SIGNATURE OF CONTRACTOR _____

I / WE HEREBY QUOTED RATES AS FOLLOWS:-

01	PART-A (ITEM RATES BASES ON SR) @ _____ % ABOVE / BELOW SR I/C THE COST OF CARRIAGE OF MATERIALS AND DIFFERENCE OF COST OF BITUMEN	RS. _____
02	PART-B (ITEM RATE BASES ON OFFER RATES / ITEM RATES THE ITEMS OTHER THEN SCHEDULE RATES	RS.- _____
GRAND TOTAL PART-A & B		RS. _____

TOTAL RS. _____ RUPEES

Signature of contractor _____

Address : _____

87

3/29



DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI
PTCL # 36697869 / 36660102 & FAX # 36762519

TENDER REFERENCE # NIT/ 3 2015

Dated: 1-12-2015

SUBJECT: P/L RCC PIPE AND CC STREET IN SHAH MOHALLLAH IN UC-02 ✓

BILL OF QUANTITIES

ESTIMATED COST	RS. 7,34,340.00+OR ✓
BID SECURITY	RS. 14687.00
TENDER COST	RS. 1,000.00

Issued to M/S _____
Video pay order / Challan # _____ dated: _____ Rs. _____

Signature and stamp


Executive Engineer
Building & Roads
Orangi Zone D.M.C (West)



DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI

SUBJECT: P/L RCC PIPE AND CC STREET IN SHAH MOHALLLAH IN UC-02
PART-A ITEM BASED ON SCHEDULE RATES

S #	DESCRIPTION	QUANTITY	UNIT	RATES	AMOUNT
01	Excavation for pipe line in trenches and pits in all kind of soils of murum i/c trimming and dressing sides to true alignment and shape leveling of beds trenches to correct level and grade cutting joints holes and disposal of surplus earth within one chain as directed by engineer in charge	2300	cft	4650.00 0%cft	10695.00
02	P/L RCC rubbering ring pipe of class A and fixing in trenches i/c cutting, fitting and jointing with rubber ring etc 12" dia pipe	400 Rft	Rft	367.00	146800.00
03	Construction of manhole 4' dia inside i/c RCC ring slab 39" dia with manhole cover 21" dia of 5' clear depth in 1:2:4 in 9" thick wall and bedding cast in situ with fair face steel shuttering i/c excavation back filling and dispose of surplus stuff up to one chain its complete	18 Nos	Each	13064.00	235152.00
04	Add for extra depth beyond 5 ft depth less the 5 ft deduct the same rate	(-)27.00	Rft	1540.00	(-) 41580.00
05	Refilling of excavation stuff in trenches 6" this compacting at all lead and lift	1810 cft	Cft	2760.00 0%cft	4996.00
06	Preparing of sub grade i/c earth excavation leveling to an average depth of 9" dressing to camber and consolidation with power roller	9950 sft	% sft	526.28	52365.00
07	P/L 2 " topping CC 1:2:4 i/c surface finishing and dividing to panels	9950 sft	sft	3275.50 %sft	325912.00
SUB TOTAL PART-A					734340.00 + OR

SIGNATURE OF CONTRACTOR

ADDRESS :

91 3/29

SUBJECT: P/L RCC PIPE AND CC STREET IN SHAH MOHALLAH IN UC-02

PART-B ITEM BASED ON OFFER RATES

S #	DESCRIPTION	QUANTITY	RATES	AMOUNT
01	P/L Granular sub base course material over prepared sub grade in conformity with line grade thickness and typical cross sections shown in drawing for new pavement at grade widening existing pavement using well graded granular crushed stone with and all silt having a smooth gradation curve with in the limit for grading C or I as per AASHTO-M 180 method D using approved mechanical means or i/c watering with all lead and lift as per specification and as per direction of Engineer incharge	3333 cft /	OR Rs	
02	P/L Aggregate base course material over the prepared sub grade in conformity with lines grade thickness and typical cross section shown in drawing for new pavement using well graded granular crushed stoen with asandand silt having a smooth gradation curve with tin the limit for grading A or B as per AASHTO M 142-62 and compacting to 100% of the minimum dry density accorign to AASHTO-T 180 method D using approved m\chanical means of i/c watering with all lead and lift as per specification and as per directed by engineer in charge	2886 cft /	OR RS	
03	Using SR cement in place of OPC	288 cwt	Rs.	
SUB TOTAL PART-B				

SIGNATURE OF CONTRACTOR

I / WE HEREBY QUOTED RATES AS FOLLOWS:-

01	PART-A (ITEM RATES BASES ON SR) @ _____ % ABOVE / BELOW SR I/C THE COST OF CARRIAGE OF MATERIALS AND DIFFERENCE OF COST OF BITUMEN	RS. _____
02	PART B (ITEM RATE BASES ON OFFER RATES / ITEM RATES THE ITEMS OTHER THEN SCHEDULE RATES	RS.- _____
GRAND TOTAL PART-A & B		RS. _____

TOTAL RS. _____ RUPEES _____

Signature of contractor _____

Address : _____

Cell # _____ / PTCL # _____

(93)

2/20

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI
PTCL # 36697869 / 36660102 & FAX # 36762519

TENDER REFERENCE # NIT/ 3 2015

Dated: 1-12-2015

SUBJECT: REPAIR OF CC WORK NEAR COUNCILLOR FATIMA WALI GALI IN BALLOCH MOHALLAH IN ORANGI ZONE ✓

BILL OF QUANTITIES

ESTIMATED COST
BID SECURITY
TENDER COST

RS. 6,40,000.00+OR ✓
RS. 12800.00
RS. 1,000.00

Issued to M/S _____
Video pay order / Challan # _____ dated: _____ Rs. _____ .

Signature and stamp


Executive Engineer
Water & Roads
(West)

94 3/30

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI

SUBJECT: REPAIR OF CC WORK NEAR COUNCILLOR FATIMA WALI GALI IN BALLOCH
MOHALLAH IN ORANGI ZONE

PART-A ITEM BASED ON SCHEDULE RATES

S #	DESCRIPTION	QUANTITY	UNIT	RATES	AMOUNT
01	Dismantling of cement concrete plain flooring	4167 cft	cft	3327.50 % cft	138657.00
02	Cartage of sand, bajri, lime surki murum building rubbish i/c loading and unloading and stacking at site	4167 cft	cft	1065.00% cft	44378.00
03	Preparing of sub grade i/c earth excavation leveling to an average depth of 9" dressing to camber and consolidation with power roller	12020 sft	% sft	526.28	63259.00
04	P/L 2 " topping CC 1:2:4 i/c surface finishing and dividing to panels	12020 sft	sft	3275.50 %sft	393715.00
SUB TOTAL PART-A					6,40,000.00 + OR

SIGNATURE OF CONTRACTOR

ADDRESS : _____

95

SUBJECT: REPAIR OF CC WORK NEAR COUNCILLOR FATIMA WALI GALI IN BALLOCH MOHALLAH IN ORANGI ZONE

PART-B ITEM BASED ON OFFER RATES

S #	DESCRIPTION	QUANTITY	RATES	AMOUNT
01	P/L Aggregate base course material over the prepared sub grade in conformity with lines grade thickness and typical cross section shown in drawing for new pavement using well graded granular crushed stoen with asandand silt having a smooth gradation curve with tin the limit for grading A or B as per AASHTO M 142-62 and compacting to 100% of the minimum dry density accorign to AASHTO-T 180 method D using approved m\chanical means of i/c watering with all lead and lift as per specification and as per directed by engineer in charge	4500 cft ✓	OR Rs	
02	P/L Granular sub base course material over prepared sub grade in conformity with line grade thickness and typical cross sections shown in drawing for new pavement at grade widening existing pavement using well graded granular crushed stone with and all silt having a smooth the limit for grading C or I as per gradation curve with in AASHTO-M 180.method D using approved mechanical means or i/c watering with all lead and lift as per specification and as per direction of Engineer incharge	879 cft ✓	OR	
03	Extra for using SR cement in place of OPC	347 cwt ✓	OR	
04	P/F RCC ring slab 39" dia with RCC manhole of 21" dia as per direction of engineer in charge	25 Nos ✓	OR	
SUB TOTAL PART-B				

SIGNATURE OF CONTRACTOR

ADDRESS : _____

I / WE HEREBY QUOTED RATES AS FOLLOWS:-

01	PART-A (ITEM RATES BASES ON SR) @ _____ % ABOVE / BELOW SR I/C THE COST OF CARRIAGE OF MATERIALS AND DIFFERENCE OF COST OF BITUMEN	RS. _____
02	PART-B (ITEM RATE BASES ON OFFER RATES / ITEM RATES THE ITEMS OTHER THEN SCHEDULE RATES	RS.- _____
GRAND TOTAL PART-A & B		RS. _____

TOTAL RS. _____ RUPEES _____

Signature of contractor _____

Address : _____

**DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI**

96 3/31

3/31

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI
PTCL # 36697869 / 36660102 & FAX # 36762519

TENDER REFERENCE // NIT/ 3 2015

Dated: 1-12-2015

SUBJECT: REPAIR AND MAINTENANCE OF SEWERAGE SYSEM 12" DIA NOORANI
MOHALLAH BISMILLAH COLONY ORANGI ZONE

BILL OF QUANTITIES

ESTIMATED COST
BID SECURITY
TENDER COST

RS. 7,80,540.00 +OR
RS. 15611.00
RS. 1,000.00

Issued to M/S
Video pay order / Challan //

dated: _____ Rs. _____

Signature and stamp


Executive Engineer
Building & Roads

97

3/31



DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI

SUBJECT: REPAIR AND MAINTENANCE OF SEWERAGE SYSEM 12" DIA NOORANI
MOHALLAH BISMILLAH COLONY ORANGI ZONE

PART-A ITEM BASED ON SCHEDULE RATES

S #	DESCRIPTION	QUANTITY	UNIT	RATES	AMOUNT
01	Excavation for pipe line in soft rock by hammering and chiseling i/c trimming and dressing sides to true alignment and shape leveling of beds trenches to correct level and grade cutting joints holes and disposal of surplus earth within one chain as directed by engineer in charge	4800	cft	10770.00 0%cft	51695.00
02	P/L RCC rubber ring pipe of class A and fixing in trenches i/c cutting, fitting and jointing with rubber ring etc 15" dia pipe	800 Rft	Rft	367.00 Rft	293600.00
03	Construction of manhole 4' dia inside i/c RCC ring slab 39" dia with manhole cover 21" dia of 5' clear depth in 1:2:4 in 9" thick wall and bedding cast in situ with fair face steel shuttering i/c excavation back filling and dispose of surplus stuff up to one chain its complete	36 Nos	Each	13064.00 Each	470304.00
04	Add for extra depth beyond 5 ft depth less the 5 ft deduct the same rate	(-)81.54	Rft	1540.00 RFT	(-) 125574.00
05	Cartage of sand, bajri, lime surki murum building rubbish i/c loading and unloading and stacking at site	4800 cft	cft	1065.00% cft	51226.00
06	P/L 1:2:4 RCC manhole covers i/c tor bars frame using GSB ¾" and d/g etc complete 21" dia 24" dia	43 Nos	913.63	913.63 Each	39286.00
SUB TOTAL PART-A					7,80,540.00 + OR

SIGNATURE OF CONTRACTOR _____

ADDRESS : _____

98 3131

SUBJECT: REPAIR AND MAINTENANCE OF SEWERAGE SYSEM 12" DIA NOORANI MOHALLAH BISMILLAH COLONY ORANGI ZONE

S #	DESCRIPTION	QUANTITY	RATES	AMOUNT
01	P/L Granular sub base course material over prepared sub grade in conformity with line grade thickness and typical cross sections shown in drawing for new pavement at grade widening existing pavement using well graded granular crushed stone with and all silt having a smooth the limit for grading C or I as per gradation curve with in AASHTO-M 180 method D using approved mechanical means or i/c watering with all lead and lift as per specification and as per direction of Engineer incharge	2400 Nos	OR	
02	P/F RCC ring slab 39" dia with RCC manhole cover of 21" dia as per direction of engineer in charge	25 Nos	OR Rs.	
SUB TOTAL PART-B				

I / WE HEREBY QUOTED RATES AS FOLLOWS:

01	PART-A (ITEM RATES BASES ON SR) @ _____ % ABOVE / BELOW SR I/C THE COST OF CARRIAGE OF MATERIALS AND DIFFERENCE OF COST OF BITUMEN	RS. _____
02	PART-B (ITEM RATE BASES ON OFFER RATES / ITEM RATES THE ITEMS OTHER THEN SCHEDULE RATES	RS.- _____
GRAND TOTAL PART-A		RS. _____

TOTAL RS. _____ RUPEES _____

Signature of contractor _____

Address : _____

Cell # _____ / PTCL # _____

99 3/33

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI
PTCL # 36697869 / 36660102 & FAX # 36762519

TENDER REFERENCE # NIT/ 3 2015

Dated: 1-12-2015

SUBJECT: REPAIRING AND MAINTENANCE OF 15" DIA DAMAGE PIPE LINE NEAR GULZAR MUHAMMDI MASJID TO UMER BALLOCH MOHALLAH IN UC-02 ORANGI ZONE ✓

BILL OF QUANTITIES

ESTIMATED COST	RS. 7,70,000.00 +OR ✓
BID SECURITY	RS. 15400.00
TENDER COST	RS. 1,000.00

Issued to M/S _____
Video pay order / Challan # _____ dated: _____ Rs. _____

Signature and stamp


Executive Engineer
Building & Roads
Orangi Zone D.M.C (West)



DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI

SUBJECT: REPAIRING AND MAINTENANCE OF 15" DIA DAMAGE PIPE LINE NEAR GULZAR
MUHAMMDI MASJID TO UMER BALLOCH MOHALLAH IN UC-02 ORANGI ZONE

PART-A ITEM BASED ON SCHEDULE RATES

100 3/33

S #	DESCRIPTION	QUANTITY	UNIT	RATES	AMOUNT
01	Excavation for pipe line in soft rock by hammering and chiseling i/c trimming and dressing sides to true alignment and shape leveling of beds trenches to correct level and grade cutting joints holes and disposal of surplus earth within one chain as directed by engineer in charge	5333	cft	10770.00 0%cft	57436.00
02	P/L RCC rubber ring pipe of class A and fixing in trenches i/c cutting, fitting and jointing with rubber ring etc 15" dia pipe	790 Rft	Rft	436.00 Rft	344440.00
03	Construction of manhole 4' dia inside i/c RCC ring slab 39" dia with manhole cover 21" dia of 5' clear depth in 1:2:4 in 9" thick wall and bedding cast in situ with fair face steel shuttering i/c excavation back filling and dispose of surplus stuff up to one chain its complete	33 Nos	Each	13064.00 Each	431112.00
04	Add for extra depth beyond 5 ft depth less the 5 ft deduct the same rate	(-)40.588	Rft	1540.00 RFT	(-) 62506.00
SUB TOTAL PART-A					7,70,000.00 + OR

SIGNATURE OF CONTRACTOR _____

ADDRESS : _____

107

SUBJECT: REPAIRING AND MAINTENANCE OF 15" DIA DAMAGE PIPE LINE NEAR GULZAR MUHAMMDI MASJID TO UMER BALLOCH MOHALLAH IN UC-02 ORANGI ZONE

S #	DESCRIPTION	QUANTITY	RATES	AMOUNT
01	P/F RCC ring slab 39" dia with RCC manhole of 21" dia as per direction of engineer in charge	35 Nos ✓	OR ✓	
02	P/L Granular sub base course material over prepared sub grade in conformity with line grade thickness and typical cross sections shown in drawing for new pavement at grade widening existing pavement using well graded granular crushed stone with and all silt having a smooth gradation curve with in the limit for grading C or I as per AASHTO-M 180 method D using approved mechanical means or i/c watering with all lead and lift as per specification and as per direction of Engineer incharge	3160 cft ✓	OR Rs	
SUB TOTAL PART-B				

I / WE HEREBY QUOTED RATES AS FOLLOWS:-

01	PART-A (ITEM RATES BASES ON SR) @ _____ % ABOVE / BELOW SR I/C THE COST OF CARRIAGE OF MATERIALS AND DIFFERENCE OF COST OF BITUMEN	RS. _____
02	PART-B (ITEM RATE BASES ON OFFER RATES / ITEM RATES THE ITEMS OTHER THEN SCHEDULE RATES	RS.- _____
GRAND TOTAL PART-A		RS. _____

TOTAL RS. _____ RUPEES _____

Signature of contractor _____

Address : _____

Cell # _____ / PTCL # _____

102 3/34

3/34

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI
PTCL # 36697869 / 36660102 & FAX # 36762519

TENDER REFERENCE # NIT/ **3** 2015

Dated: **1-12-2015**

SUBJECT: P/L RCC PIPE BACK SIDE OF UNION COUNCIL OFFIC UC-08 NEAR HOUSE # 120
ORANGI ZONE

BILL OF QUANTITIES

ESTIMATED COST
BID SECURITY
TENDER COST

RS. 4,57,468.00 +OR ✓
RS. 9149.00 ✓
RS. 1,000.00 ✓

Issued to M/S
Video pay order / Challan #

dated: _____ Rs. _____

Signature and stamp


Executive Engineer
& Roads

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI

SUBJECT: REPAIR AND MAINTENANCE OF BROKEN PIPE DRAIN AND OTHER WORKS IN SECTOR 11-E IN ORANGI ZONE.

PART-A ITEM BASED ON SCHEDULE RATES

S.#	DESCRIPTION	QUANTITY	UNIT	RATES	AMOUNT
01	Dismantling of cement concrete flooring 1:3:6 plain	1386 cft ✓	cft	1306.80 %cft	18112.00 ✓
02	Excavation for pipe line in trenches and pits in all kind of soils of murum i/c trimming and dressing sides to true alignment and shape leveling of beds trenches to correct level and grade cutting joints holes and disposal of surplus earth within one chain as directed by engineer in charge	1850 ✓	cft	4650.00 ✓ 0%cft	8603.00 ✓
03	P/L RCC rubber ring pipe of class A and fixing in trenches i/c cutting, fitting and jointing with rubber ring etc 9" & 15" dia pipe	300 Rft ✓	Rft ✓	206.00 RFT ✓	61800.00 ✓
		200 Rft ✓	Rft ✓	436.00 RFT ✓	87200.00 ✓
04	Construction of manhole 4' dia inside i/c RCC ring slab 39" dia with manhole cover 21" dia of 5' clear depth in 1:2:4 in 9" thick wall and bedding cast in situ with fair face steel shuttering i/c excavation back filling and dispose of surplus stuff up to one chain its complete	25 Nos ✓	Each	13064.00 ✓ Each	326600.00 ✓
05	Add for extra depth beyond 5 ft depth less the 5 ft deduct the same rate	(-)45 ✓	Rft	1540.00 ✓ RFT	(-) 69300.00 ✓
06	p/l 1:3:6 using GSB ¾" and d/g i/c consolidation curing etc without shuttering	165 cft ✓	cft	12595.00% ✓ cft	20782.00 ✓
07	Refilling of excavation stuff in trenches 6" this compacting at all lead and lift	1330 cft ✓	Cft	2760.00 ✓ 0%cft	3671.00 ✓
SUB TOTAL PART-A					457468.00 + OR ✓

SIGNATURE OF CONTRACTOR

ADDRESS :

104 3/34

SUBJECT: REPAIR AND MAINTENANCE OF BROKEN PIPE DRAIN AND OTHER WORKS IN SECTOR 11 IN ORANGE ZONE.

I / WE HEREBY QUOTED RATES AS FOLLOWS:

01	PART-A (ITEM RATES BASES ON SR) @ % ABOVE / BELOW SR I/C THE COST OF CARRIAGE OF MATERIALS AND DIFFERENCE OF COST OF BITUMEN	RS. _____
02	PART-B (ITEM RATE BASES ON OFFER RATES / ITEM RATES THE ITEMS OTHER THEN SCHEDULE RATES	RS.- _____
	GRAND TOTAL PART-A & B	RS. _____

TOTAL RS. _____ RUPEES _____

Signature of contractor _____

Address : _____
Cell # _____ / PTCL # _____

3/35

105

3/35

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI
PTCL # 36697869 / 36660102 & FAX # 36762519

TENDER REFERENCE # NIT/ 3 2015

Dated: 1-12-2015

SUBJECT: P/L RCC PIPE BEHINGKMC WORK SHOP IN UC-06

BILL OF QUANTITIES

ESTIMATED COST
BID SECURITY
TENDER COST

RS. 7,56,043.00 +OR
RS. 15121.00 ✓
RS. 1,000.00 ✓

Issued to M/S _____
Video pay order / Challan # _____ dated: _____ Rs. _____ .

Signature and stamp


Executive Engineer
Building & Roads
District Municipal Corporation (West)

1001



DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI

SUBJECT: P/L RCC PIPE BEHINGKMC WORK SHOP IN UC-06

PART-A ITEM BASED ON SCHEDULE RATES

S #	DESCRIPTION	QUANTITY	UNIT	RATES	AMOUNT
01	Excavation for pipe line in trenches and pits in all kind of soils of murum i/c trimming and dressing sides to true alignment and shape leveling of beds trenches to correct level and grade cutting joints holes and disposal of surplus earth within one chain as directed by engineer in charge	4000 ✓	cft	4650.00 ✓ 0%cft	18600.00 ✓
02	Excavation for pipe line in soft rock by hammering and chiseling i/c trimming and dressing sides to true alignment and shape leveling of beds trenches to correct level and grade cutting joints holes and disposal of surplus earth within one chain as directed by engineer in charge	2000 ✓	cft	10770.00 ✓ 0%cft	21540.00 ✓
03	P/L RCC rubber ring pipe of class A and fixing in trenches i/c cutting, fitting and jointing with rubber ring etc 9"&12" dia pipe	600 Rft ✓ 400 Rft ✓	Rft Rft	206.00 RFT ✓ 347.00RFT ✓	123600.00 ✓ 146800.00 ✓
04	Construction of manhole 4' dia inside i/c RCC ring slab 39" dia with manhole cover 21" dia of 5' clear depth in 1:2:4 in 9" thick wall and bedding cast in situ with fair face steel shuttering i/c excavation back filling and dispose of surplus stuff up to one chain its complete	42 Nos ✓	Each	13064.00 ✓ Each	548688.00 ✓
05	Add for extra depth beyond 5 ft depth less the 5 ft deduct the same rate	(-)76 ✓	Rft	1540.00 ✓ RFT	(-) 117040.00 ✓
06	Refilling of excavation stuff in trenches 6" this compacting at all lead and lift	5020 cft ✓	Cft	2760.00 ✓ 0%cft	13855.00 ✓
SUB TOTAL PART-A					7,56,043.00 + OR ✓

SIGNATURE OF CONTRACTOR

ADDRESS : _____

107

3/35

SUBJECT: REPAIR AND MAINTENANCE OF BROKEN PIPE DRAIN AND OTHER WORKS IN SECTOR 11 1/2 IN ORANGI ZONE.

I / WE HEREBY QUOTED RATES AS FOLLOWS:-

01	PART-A (ITEM RATES BASES ON SR) @ _____ % ABOVE / BELOW SR I/C THE COST OF CARRIAGE OF MATERIALS AND DIFFERENCE OF COST OF BITUMEN	RS. _____
02		
GRAND TOTAL PART-A		RS. _____

TOTAL RS. _____ RUPEES _____

Signature of contractor _____

Address : _____

Cell # _____ / PTCL # _____

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI
PTCL # 36697869 / 36660102 & FAX # 36762519

TENDER REFERENCE # NIT/ 3 2015

Dated: 1-12-2015

SUBJECT: P/L RCC PIPE NEAR IMAM AUTOS SECTOR 15/A IN UC-08 ✓

BILL OF QUANTITIES

ESTIMATED COST
BID SECURITY
TENDER COST

RS. 4,72,152.00 +OR ✓
RS. 9443.00
RS. 1,000.00

Issued to M/S _____
Video pay order / Challan # _____ dated: _____ Rs. _____

Signature and stamp


Executive Engineer
Building & Roads
Orangi Zone D.M.C (West)

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI

SUBJECT: P/L RCC PIPE NEAR IMAM AUTOS SECTOR 15/A IN UC-08

PART-A ITEM BASED ON SCHEDULE RATES

S #	DESCRIPTION	QUANTITY	UNIT	RATES	AMOUNT
01	Dismantling of cement concrete flooring 1:3:6 plain	1645 cft ✓	cft	1306.80% cft	21497.00 ✓
02	Excavation for pipe line in soft rock by hammering and chiseling i/c trimming and dressing sides to true alignment and shape leveling of beds trenches to correct level and grade cutting joints holes and disposal of surplus earth within one chain as directed by engineer in charge	3000 ✓	cft	10770.00 ✓ 0%cft	32310.80 ✓
03	P/L RCC rubber ring pipe of class A and fixing in trenches i/c cutting, fitting and jointing with rubber ring etc 9" & 12" dia pipe	500 Rft ✓	Rft	206.00 RFT ✓	10300.00 ✓
04	Construction of manhole 4' dia inside i/c RCC ring slab 39" dia with manhole cover 21" dia of 5' clear depth in 1:2:4 in 9" thick wall and bedding cast in situ with fair face steel shuttering i/c excavation back filling and dispose of surplus stuff up to one chain its complete	22 Nos ✓	Each	13064.00 ✓ Each	287408.00 ✓
05	Add for extra depth beyond 5 ft depth less the 5 ft deduct the same rate	(-)22 ✓	Rft	1540.00 ✓ RFT	(-)33880.00 ✓
06	P/L 1:3:6 using GSB ¾" and d/g i/c consolidation cuirng etc without shuttering	296 cft ✓	cft	12595.00% ✓ cft	37281.00 ✓
07	Refilling of excavation stuff in trenches 6" this compacting at all lead and lift	2542 cft ✓	Cft	2760.00 ✓ 0%cft	7016.00 ✓
08	Cartage of sand, bajri, lime surki murum building rubbish i/c loading and unloading and stacking at site	1645 cft ✓	cft	1065.00% cft ✓	17520.00 ✓
SUB TOTAL PART-A					472152.00 + OR

SIGNATURE OF CONTRACTOR

ADDRESS :

110

SUBJECT: P/L RCC PIPE NEAR IMAM AUTOS SECTOR 15/A IN UC-08

I / WE HEREBY QUOTED RATES AS FOLLOWS:-

01	PART-A (ITEM RATES BASES ON SR) @ _____ % ABOVE / BELOW SR I/C THE COST OF CARRIAGE OF MATERIALS AND DIFFERENCE OF COST OF BITUMEN	RS. _____
02		
GRAND TOTAL PART-A		RS. _____

TOTAL RS. _____ RUPEES _____

Signature of contractor _____

Address : _____

Cell # _____ / PTCL # _____

3/37

111

3/37

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI
PTCL # 36697869 / 36660102 & FAX # 36762519

TENDER REFERENCE # NIT/ 3 2015

Dated: 1-12-2015

SUBJECT: P/L RCC PIPE NEAR JINNATI HOTEL CULVERT BENGAL BAZAR TO ALAM PARK
SECTOR 15-A IN UC-08

BILL OF QUANTITIES

ESTIMATED COST
BID SECURITY
TENDER COST

RS. 8,12,115.00 +OR
RS. 16242.00
RS. 1,000.00

Issued to M/S _____
Video pay order / Challan # _____ dated: _____ Rs. _____

Signature and stamp


Executive Engineer
Building & Roads
District Municipal Corporation (West)



DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI

SUBJECT: P/L RCC PIPE NEAR JINNATI HOTEL CULVERT BENGAL BAZAR TO ALAM PARK
SECTOR 15-A IN UC-08

PART-A ITEM BASED ON SCHEDULE RATES

S #	DESCRIPTION	QUANTITY	UNIT	RATES	AMOUNT
01	Dismantling of cement concrete flooring 1:3:6 plain	1279 cft ✓	cft	1306.80% cft ✓	16714.00 ✓
02	Excavation for pipe line in trenches and pits i/c trimming and dressing sides to true alignment and shape leveling of beds trenches to correct level and grade cutting joints holes and disposal of surplus earth within one chain as directed by engineer in charge	1750 ✓	cft	4650.00 0 %cft ✓	8138.00 ✓
02	Excavation for pipe line in soft rock by hammering and chiseling i/c trimming and dressing sides to true alignment and shape leveling of beds trenches to correct level and grade cutting joints holes and disposal of surplus earth within one chain as directed by engineer in charge	5250 ✓	cft	10770.00 0 %cft ✓	56543.00 ✓
03	P/L RCC rubber ring pipe of class A and fixing in trenches i/c cutting, fitting and jointing with rubber ring etc 15" dia pipe	700 Rft ✓	Rft	436.00 Rft ✓	305200.00 ✓
04	Construction of manhole 4' dia inside i/c RCC ring slab 39" dia with manhole cover 21" dia of 5' clear depth in 1:2:4 in 9" thick wall and bedding cast in situ with fair face steel shuttering i/c excavation back filling and dispose of surplus stuff up to one chain its complete	30 Nos ✓	Each	13064.00 ✓ Each	391920.00 ✓
05	Add for extra depth beyond 5 ft depth less the 5 ft deduct the same rate	(-) 35.00 ✓	Rft	1540.00 ✓ RFT	(-) 53900.00 ✓
06	P/L 1:3:6 using GSB ¾" and d/g i/c consolidation cuirng etc without shuttering	452 cft ✓	cft	12595.00% ✓ cft	56929.00 ✓
07	Refilling of excavation stuff in trenches 6" this compacting at all lead and lift	6141 cft ✓	Cft	2760.00 ✓ 0%cft	16949.00 ✓
08	Cartage of sand, bajri, lime surki murum building rubbish i/c loading and unloading and stacking at site	1279 cft ✓	cft	1065.00% cft ✓	13622.00 ✓
SUB TOTAL PART-A					812115.00 + OR

SIGNATURE OF CONTRACTOR

ADDRESS :

113 3/37

SUBJECT: P/L RCC PIPE NEAR JINNATI HOTEL CULVERT BENGAL BAZAR TO ALAM PARK
SECTOR 15-A IN UC-08

I / WE HEREBY QUOTED RATES AS FOLLOWS:-

01	PART-A (ITEM RATES BASES ON SR) @ _____ % ABOVE / BELOW SR I/C THE COST OF CARRIAGE OF MATERIALS AND DIFFERENCE OF COST OF BITUMEN	RS. _____
02		
GRAND TOTAL PART-A		RS. _____

TOTAL RS. _____ RUPEES _____

Signature of contractor _____

Address : _____

Cell # _____ / PTCL # _____

114 3/38

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI
PTCL # 36697869 / 36660102 & FAX # 36762519

TENDER REFERENCE # NIT/ 3 2015

Dated: 1-12-2015

SUBJECT: P/L RCC PIPE GALI # 11 GHAZIABAD IN UC-06

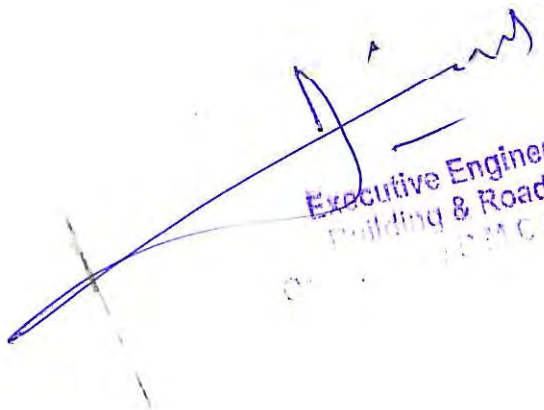
BILL OF QUANTITIES

ESTIMATED COST
BID SECURITY
TENDER COST

RS. 8,77,659.00+ OR
RS.17553.00
RS. 1,000.00

Issued to M/S _____
Video pay order / Challan # _____ dated: _____ Rs. _____.

Signature and stamp


Executive Engineer
Building & Roads
D.M.C. (West)

115 3/38

SUBJECT: P/L RCC PIPE GALI # 11 GHAZIABAD IN UC-06

01	S/F imported earth within the a radius of 5 miles i/c digging and loading and unloading and stacking at site complete as per direction o fengineer in charge	2600 cft	✓ OR		
02	P/F RCC ring slab 39" dia with RCC manhole of 21" dia as per direction of engineer in charge	25 Nos	✓ OR		

I / WE HEREBY QUOTED RATES AS FOLLOWS:-

01	PART-A (ITEM RATES BASES ON SR) @ _____ % ABOVE / BELOW SR I/C THE COST OF CARRIAGE OF MATERIALS AND DIFFERENCE OF COST OF BITUMEN	RS. _____
02		
GRAND TOTAL PART-A		RS. _____

TOTAL RS. _____ RUPEES _____

Signature of contractor _____

Address : _____

Cell # _____ / PTCL # _____

116



DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI

SUBJECT: P/L RCC PIPE GALI # 11 GHAZIABAD IN UC-06

PART-A ITEM BASED ON SCHEDULE RATES

S #	DESCRIPTION	QUANTITY	UNIT	RATES	AMOUNT
01	Dismantling of cement concrete plain flooring	2025 cft	cft	3327.50 % cft	67382.00
02	Excavation for pipe line in hard rock by hammering and chiseling alignment and shape leveling of beds trenches to correct level and grade cutting joints holes and disposal of surplus earth within one chain as directed by engineer in charge	3000	cft	4650.00 0%cft	13950.00
03	Excavation for pipe line in hard rock by hammering and chiseling alignment and shape leveling of beds trenches to correct level and grade cutting joints holes and disposal of surplus earth within one chain as directed by engineer in charge	3164	cft	10770.00 0%cft	34076.00
04	P/L RCC rubber ring pipe of class A and fixing in trenches i/c cutting, fitting and jointing with rubber ring etc 12" dia pipe	750 Rft	Rft	367.00 RFT	275250.00
05	Construction of manhole 4' dia inside i/c RCC ring slab 39" dia with manhole cover 21" dia of 5' clear depth in 1:2:4 in 9" thick wall and bedding cast in situ with fair face steel shuttering i/c excavation back filling and dispose of surplus stuff up to one chain its	35 Nos	Each	13064.00 Each	457240.00
06	Add for extra depth beyond 5 ft depth less the 5 ft deduct the same rate	(-) 61.25	Rft	1540.00 RFT	(-)94325.00
07	Refilling of excavation stuff in trenches 6" this compacting at all lead and lift	2207 cft	Cft	2760.00 0%cft	6091.00
08	Cartage of sand, bajri, lime surki murum building rubbish i/c loading and unloading and stacking at site	5503 cft	cft	1065.00% cft	58607.00
09	P/L 1:2:4 RCC manhole covers i/c tor bars frame using GSB ¾" and d/g etc complete 21" dia /24" dia	65Nos	913.63	Each	59386.00
SUB TOTAL PART-A					877659.00 + OR

SIGNATURE OF CONTRACTOR

ADDRESS :

117 31/39

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI
PTCL # 36697869 / 36660102 & FAX # 36762519

TENDER REFERENCE # NIT/ 3 2015

Dated: 1-12-2015

SUBJECT: CONSTRUCTION OF CC STREET IN GALI # 01 HOUSE # 371 IN SHAH WALI ULLAH NAGAR IN UC-07

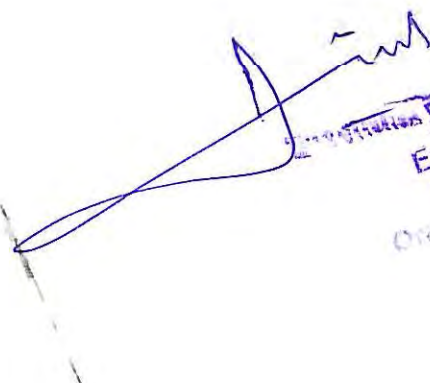
BILL OF QUANTITIES

ESTIMATED COST
BID SECURITY
TENDER COST

RS. 2,62,448.00+OR
RS. 5249.00
RS. 1,000.00

Issued to M/S _____
Video pay order / Challan # _____ dated: _____ Rs. _____

Signature and stamp


Executive Engineer
Building & Roads
Orangi Town D.M.C. (West)

118 3/39

SUBJECT: REPAIR AND MAINTENANCE OF FOOT PATH I/C PAINTING OF REMOVAL OF SURPLUS STUFF IN NEAR SECTOR 9 & 6 IN ORANGI ZONE.

I / WE HEREBY QUOTED RATES AS FOLLOWS:-

01	PART-A (ITEM RATES BASES ON SR) @ _____ % ABOVE / BELOW SR I/C THE COST OF CARRIAGE OF MATERIALS AND DIFFERENCE OF COST OF BITUMEN	RS. _____
02	PART-B (ITEM RATE BASES ON OFFER RATES / ITEM RATES THE ITEMS OTHER THEN SCHEDULE RATES	RS.- _____
GRAND TOTAL PART-A & B		RS. _____

TOTAL RS. _____ RUPEES _____

Signature of contractor _____

Address : _____

119 3/39

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI

SUBJECT: CONSTRUCTION OF CC STREET IN GALI # 01 HOUSE # 371 IN SHAH WALI ULLAH NAGAR IN UC-07.

PART-A ITEM BASED ON SCHEDULE RATES

S #	DESCRIPTION	QUANTITY	UNIT	RATES	AMOUNT
01	Dismantling of cement concrete plain flooring	840 cft ✓	cft	3327.50 % cft	27951.00 ✓
02	Dismantling of cement concrete floiornrgn 1:2:4 plain	489 cft ✓	cft	1306.80% cft ✓	6390.00 ✓
03	Preparing of sub grade i/c earth excavation leveling to an average depth of 9" dressing to camber and consolidation with power roller	6000 sft ✓	% sft	526.28 ✓	31577.00 ✓
04	P/L 2 " topping CC 1:2:4 i/c surface finishing and dividing to panels	6000 sft ✓	sft	3275.50 %sft ✓	196530.00 ✓
SUB TOTAL PART-A					262448.00 + OR ✓

SUBJECT: CONSTRUCTION OF CC STREET IN GALI # 01 HOUSE # 371 IN SHAH WALI ULLAH NAGAR IN UC-07

PART-B ITEM BASED ON OFFER RATES

S #	DESCRIPTION	QUANTITY	RATES	AMOUNT
01	P/L Aggregate base course material over the prepared sub grade in conformity with lines grade thickness and typical cross section shown in drawing for new pavement using well graded granular crushed stoen with asandand silt having a smooth gradation curve with tin the limit for grading A or B as per AASHTO M 142-62 and compacting to 100% of the minimum dry density accorign to AASHTO-T 180 method D using approved m\chanical means of i/c watering with all lead and lift as per specification and as per directed by engineer in charge	1740 cft ✓	OR Rs	
02	P/F RCC ring slab 39" dia with RCC manhole of 21" dia as per direction of engineer in charge	02 Nos ✓	OR	
03	Extra for using SR cement in place of OPC	173 cwt ✓	OR	
04	S/E imported earth within the a radiusof 5 miles i/c digging and loading and unloading and stacking at site complete as per direction o fengineer in charge	3000 cft ✓	OR	
SUB TOTAL PART-B				

SIGNATURE OF CONTRACTOR

ADDRESS : _____

120 3/40

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI
PTCL # 36697869 / 36660102 & FAX # 36762519

TENDER REFERENCE # NIT/ 3 2015

Dated: 1-12-2015

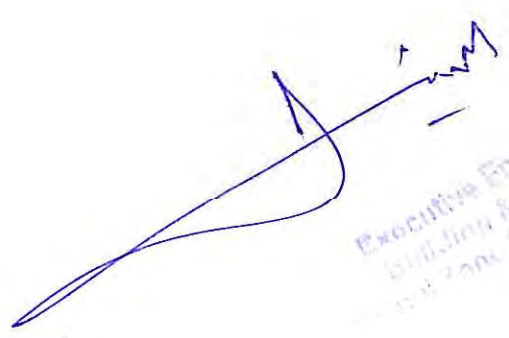
SUBJECT: R/M RCC PIPE AND CC STREET OPPOSITE RUBBANI MASJID IN ZIA COLONY IN UC-01

BILL OF QUANTITIES

ESTIMATED COST	RS. 8,53,928.00+OR
BID SECURITY	RS. 17,079.00
TENDER COST	RS. 1,000.00

Issued to M/S _____
Video pay order / Challan # _____ dated: _____ Rs. _____

Signature and stamp


Executive Engineer
Building & works
Sector 11-E, Orangi Town, Karachi

(121) 3/40

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI
SUBJECT: R/M RCC PIPE AND CC STREET OPPOSITE RUBBANI MASJID IN ZIA COLONY IN UC-01

PART-A ITEM BASED ON SCHEDULE RATES

S #	DESCRIPTION	QUANTITY	UNIT	RATES	AMOUNT
01	Dismantling of cement concrete plain flooring	2113 cft ✓	cft	3327.50 % cft	70310.00 ✓
02	Excavation for pipe line in trenches and pits in all kind of soils of murum i/c trimming and dressing sides to true alignment and shape leveling of beds trenches to correct level and grade cutting joints holes and disposal of surplus earth within one chain as directed by engineer in charge	1350 ✓	cft	4650.00 ✓ 0%cft	6278.00 ✓
03	Excavation for pipe line in hard soil by hammering and chiseling i/c trimming and dressing sides to true alignment and shape leveling of beds trenches to correct level and grade cutting joints holes and disposal of surplus earth within one chain as directed by engineer in charge	938 ✓	cft	10770.00 ✓ 0%cft	10102.00 ✓
04	P/L RCC rubbering ring pipe of class A and fixing in trenches i/c cutting, fitting and jointing with rubber ring etc 12" dia pipe	300 Rft ✓	Rft	367.00 ✓	110100.00 ✓
05	Construction of manhole 4' dia inside i/c RCC ring slab 39" dia with manhole cover 21" dia of 5' clear depth in 1:2:4 in 9" thick wall and bedding cast in situ with fair face steel shuttering i/c excavation back filling and dispose of surplus stuff up to one chain its	14 Nos ✓	Each	13064.00 ✓	182896.00 ✓
06	Add for extra depth beyond 5 ft depth less the 5 ft deduct the same rate	(-)24.50 ✓	Rft	1540.00 ✓	(-) 37730.00 ✓
07	Refilling of excavation stuff in trenches 6" this compacting at all lead and lift	1033 cft ✓	Cft	2760.00 ✓ 0%cft	2851.00 ✓
08	Cartage of sand, bajri, lime surki murum building rubbish i/c loading and unloading and stacking at site	7389 cft ✓	cft	1065.00% cft	78693.00 ✓
09	P/L manhole covers of 21" size as per direction of Engineer incharge	55 Nos ✓	Each	913.63 each ✓	50250.00 ✓
10	Preparing of sub grade i/c earth excavation leveling to an average depth of 9" dressing to camber and consolidation with power roller	10000 sft ✓	% sft	526.28 ✓	52628.00 ✓
11	P/L 2" topping CC 1:2:4 i/c surface finishing and dividing to panels	10000 sft ✓	sft	3275.50 %sft	327550.00 ✓
SUB TOTAL PART-A					8,53,928.00 + OR

SIGNATURE OF CONTRACTOR

ADDRESS : _____

122

SUBJECT: P/L RCC PIPE AND CC STREET IN SHAH MOHALLLAH IN UC-02

PART-B ITEM BASED ON OFFER RATES

S #	DESCRIPTION	QUANTITY	RATES	AMOUNT
01	P/L Aggregate base course material over the prepared sub grade in conformity with lines grade thickness and typical cross section shown in drawing for new pavement using well graded granular crushed stoen with asandand silt having a smooth gradation curve with tin the limit for grading A or B as per AASHTO M 142-62 and compacting to 100% of the minimum dry density accorign to AASHTO-T 180 method D using approved m\chanical means of i/c watering with all lead and lift as per specification and as per directed by engineer in charge	2900 cft ✓	OR Rs	
02	Using SR cement in place of OPC	289 cwt ✓	Rs.	
03	S/F imported earth within the a radiusof 5 miles i/c digging and loading and unloading and stacking at site complete as per direction o fengineer in charge	5000 cft ✓	OR	
04	P/F RCC ring slab 39" dia with RCC manhole of 21" dia as per direction of engineer in charge	33 Nos ✓	OR	
SUB TOTAL PART-B				

SIGNATURE OF CONTRACTOR

I / WE HEREBY QUOTED RATES AS FOLLOWS:-

01	PART-A (ITEM RATES BASES ON SR) @ _____ % ABOVE / BELOW SR I/C THE COST OF CARRIAGE OF MATERIALS AND DIFFERENCE OF COST OF BITUMEN	RS. _____
02	PART-B (ITEM RATE BASES ON OFFER RATES / ITEM RATES THE ITEMS OTHER THEN SCHEDULE RATES	RS.- _____
GRAND TOTAL PART-A & B		RS. _____

TOTAL RS. _____ RUPEES _____

Signature of contractor _____

Address : _____

Cell # _____ / PTCL # _____

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI
PTCL # 36697869 / 36660102 & FAX # 36762519

TENDER REFERENCE # NIT/ 3 2015Dated: 1-12-2015

SUBJECT: P/L RCC pipe gali # 01 and gali # 09 Allah waris wali gali sir syed colony union council -08
Arkan ground gulshan-e-behar and near mavati chowk Christian colony in union council-06


BILL OF QUANTITIES

ESTIMATED COST
BID SECURITY
TENDER COST

RS. 9,99,912.00 ✓
RS. 19858.00
RS. 1,000.00

Issued to M/S _____
Video pay order / Challan # _____ dated: _____ Rs. _____ .

Signature and stamp


Executive Engineer
Building & Roads
Orangi Zone D.M.C. (Nies-1)



124 3/41

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI

SUBJECT: P/L RCC pipe gali # 01 and gali # 09 Allah waris wali gali sir syed colony union council -08
Arkan ground gulshan-e-behar and near mavati chowk Christian colony in union council-06

PART-A ITEM BASED ON SCHEDULE RATES

S #	DESCRIPTION	QUANTITY	UNIT	RATES	AMOUNT
01	Dismantling of cement concrete flooring 1:3:6 plain	320 cft ✓	cft	1306.80% cft ✓	4182.00 ✓
02	Excavation for pipe line in trenches and pits i/c trimming and dressing sides to true alignment and shape leveling of beds trenches to correct level and grade cutting joints holes and disposal of surplus earth within one chain as directed by engineer in charge	3000 ✓	cft	4650.00 0% cft ✓	13950.00 ✓
02	Excavation for pipe line in soft rock by hammering and chiseling i/c trimming and dressing sides to true alignment and shape leveling of beds trenches to correct level and grade cutting joints holes and disposal of surplus earth within one chain as directed by engineer in charge	3000 ✓	cft	10770.00 0% cft ✓	32310.00 ✓
03	P/L RCC rubber ring pipe of class A and fixing in trenches i/c cutting, fitting and jointing with rubber ring etc 9" & 12" dia pipe	1000 Rft ✓	Rft	206.00 RFT 367.00 ✓	367000.00 ✓
04	Construction of manhole 4' dia inside i/c RCC ring slab 39" dia with manhole cover 21" dia of 5' clear depth in 1:2:4 in 9" thick wall and bedding cast in situ with fair face steel shuttering i/c excavation back filling and dispose of surplus stuff up to one chain its complete	49 Nos ✓	Each	13064.00 Each	640136.00 ✓
05	Add for extra depth beyond 5 ft depth less the 5 ft deduct the same rate	(-) 66 ✓	Rft	1540.00 RFT ✓	(-) 101640.00 ✓
06	P/L 1:3:6 using GSB ¾" and d/g i/c consolidation curing etc without shuttering	48 cft ✓	cft	12595.00% cft ✓	6046.00 ✓
07	Refilling of excavation stuff in trenches 6" this compacting at all lead and lift	4611 cft ✓	Cft	2760.00 0% cft ✓	12726.00 ✓
08	Cartage of sand, bajri, lime surki murum building rubbish i/c loading and unloading and stacking at site	1709 cft ✓	cft	1065.00% cft ✓	18202.00 ✓
SUB TOTAL PART-A					9,92,912.00 ✓

SIGNATURE OF CONTRACTOR

ADDRESS : _____

125

SUBJECT: P P/L RCC pipe gali # 01 and gali # 09 Allah waris wali gali sir syed colony union council -08
Arkan ground gulshan-e-behar and near mavati chowk Christian colony in union council-06

I / WE HEREBY QUOTED RATES AS FOLLOWS:-

01	PART-A (ITEM RATES BASES ON SR) @ _____ % ABOVE / BELOW SR I/C THE COST OF CARRIAGE OF MATERIALS AND DIFFERENCE OF COST OF BITUMEN	RS. _____
02		
GRAND TOTAL PART-A		RS. _____

TOTAL RS. _____ RUPEES _____

Signature of contractor _____

Address : _____

Cell # _____ / PTCL # _____

126 3/42

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI
PTCL # 36697869 / 36660102 & FAX # 36762519

TENDER REFERENCE # NIT/ 3 2015

Dated: 1-12-2015

SUBJECT: REPLACEMENT OF OLD DAMAGE SEWERAGE SYSTEM AND PRE CAST SLA AND OTHER WAROKS IN ORANGI ZONE


BILL OF QUANTITIES

ESTIMATED COST
BID SECURITY
TENDER COST

RS. 6,10,400.00+ OR
RS.12208.00
RS. 1,000.00

Issued to M/S _____
Video pay order / Challan # _____ dated: _____ Rs. _____

Signature and stamp


Executive Engineer
Building & Roads
Orangi Zone 2 D.M.C (West)

127 3/42

SUBJECT: REPLACEMENT OF OLD DAMAGE SEWERAGE SYSTEM AND PRE CAST SLA AND OTHER WAROKS IN ORANGI ZONE

01	P/F RCC pipe pre cast slab 2" thick of required size and shape and racking out joints with cement mortar curing etc complete as per direction of engineer in charge	180 sft ✓	OR		
02	P/F RCC pipe pre cast LINTER of required size and shape and racking out joints with cement mortar curing etc complete as per direction of engineer in charge	153 sft ✓	OR		
03	P/F RCC ring slab 39" dia with RCC manhole of 21" dia as per direction of engineer in charge	100 Nos ✓	OR		

I / WE HEREBY QUOTED RATES AS FOLLOWS:-

01	PART-A (ITEM RATES BASES ON SR) @ _____ % ABOVE / BELOW SR I/C THE COST OF CARRIAGE OF MATERIALS AND DIFFERENCE OF COST OF BITUMEN	RS. _____
02		
GRAND TOTAL PART-A		RS. _____

TOTAL RS. _____ RUPEES _____

Signature of contractor _____

Address : _____

Cell # _____ / PTCL # _____

128



DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI

SUBJECT: REPLACEMENT OF OLD DAMAGE SEWERAGE SYSTEM AND PRE CAST SLA AND OTHER WAROKS IN ORANGI ZONE PART-A ITEM BASED ON SCHEDULE RATES

S #	DESCRIPTION	QUANTITY	UNIT	RATES	AMOUNT
01	Dismantling of cement concrete plain flooring	1237 cft ✓	cft	3327.50 % cft ✓	41161.00 ✓
02	Excavation for pipe line in hard rock by hammering and chiseling alignment and shape leveling of beds trenches to correct level and grade cutting joints holes and disposal of surplus earth within one chain as directed by engineer in charge	3240 ✓	cft	4650.00 ✓ 0%cft	15066.00 ✓
03	P/L RCC rubber ring pipe of class A and fixing in trenches i/c cutting, fitting and jointing with rubber ring etc 12" dia pipe	480 Rft ✓	Rft	367.00 RFT ✓	176160.00 ✓
04	Construction of manhole 4' dia inside i/c RCC ring slab 39" dia with manhole cover 21" dia of 5' clear depth in 1:2:4 in 9" thick wall and bedding cast in situ with fair face steel shuttering i/c excavation back filling and dispose of surplus stuff up to one chain its	25 Nos ✓	Each	13064.00 ✓ Each	326600.00 ✓
05	Add for extra depth beyond 5 ft depth less the 5 ft deduct the same rate	(-) ✓ 37.9915 ✓	Rft	1540.00 ✓ RFT	(-)58507.00 ✓
06	Refilling of excavation stuff in trenches 6" this compacting at all lead and lift	2733 cft ✓	Cft	2760.00 ✓ 0%cft	7543.00 ✓
07	Cartage of sand, bajri, lime surki murum building rubbish i/c loading and unloading and stacking at site	4869 cft ✓	cft	1065.00% cft ✓	51855.00 ✓
08	Earth work excavation in irrigation channels irrigation drain etc dressed to designed section and profile excavated materials deosed off and dressed with in 50 ft	2000 cft ✓	cft	2420.00 %0 ✓ cft	4840.00 ✓
09	P/L 1:2:4 RCC manhole covers i/c tor bars frame using GSB ¾" and d/g etc complete 21" dia /24" dia	50 Nos ✓	913.63 ✓	Each	45682.00 ✓
SUB TOTAL PART-A					610400.00 + OR

SIGNATURE OF CONTRACTOR

ADDRESS :

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI
PTCL # 36697869 / 36660102 & FAX # 36762519

129

02/43

TENDER REFERENCE # NIT/_____ 2015

Dated: _____

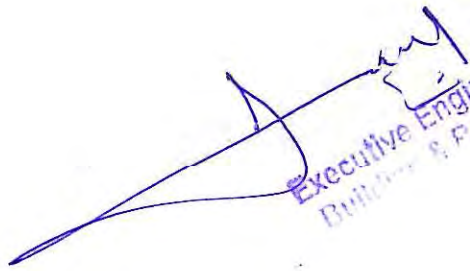
SUBJECT: REHABILITATION OF RCC PIPE GALI # 01 TO 17 IN ZIA COLONY SHEET # 1
UC-01

BILL OF QUANTITIES

ESTIMATED COST	RS. 8,88,175.00 + OR
BID SECURITY	RS. 17764.00
TENDER COST	RS. 1,000.00

Issued to M/S _____
Video pay order / Challan # _____ dated: _____ Rs. _____

Signature and stamp


Executive Engineer
Building & P...

130

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI

SUBJECT: REHABILITATION OF RCC PIPE GALI # 01 TO 17 IN ZIA COLONY SHEET # 1
UC-01

PART-A ITEM BASED ON SCHEDULE RATE

S #	DESCRIPTION	QUANTITY	UNIT	RATES	AMOUNT
01	Dismantling of cement concrete plain flooring CC 1:2:4	2068 cft	cft	3327.50	68813.00
02	Excavation for pipe line in trenches and pits in all kind of soils of murum i/c trimming and dressing sides to true alignment and shape leveling of beds trenches to correct level and grade cutting joints holes and disposal of surplus earth within one chain as directed by engineer in charge	5844	cft	4650.00 0%cft	27175.00
03	Excavation for pipe line in in hard rock by hammering and chiseling etc alignment and shape leveling of beds trenches to correct level and grade cutting joints holes and disposal of surplus earth within one chain as directed by engineer in charge	1688	cft	10770.00 0%cft	18180.00
04	P/L RCC rubber ring pipe of class A and fixing in trenches i/c cutting, fitting and jointing with rubber ring etc 9" dia pipe	1000 Rft	Rft	206.00	206000.00
05	Construction of manhole 4' dia inside i/c RCC ring slab 39" dia with manhole cover 21" dia of 5' clear depth in 1:2:4 in 9" thick wall and bedding cast in situ with fair face steel shuttering i/c excavation back filling and dispose of surplus stuff up to one chain its complete	45 Nos	Each	13064.00	587880.00
06	Add for extra depth beyond 5 ft depth less the 5 ft deduct the same rate	(-)78.75	Rft	1540.00	(-)121275.00
07	Refilling of excavation stuff in trenches 6" this compacting at all lead and lift	6475 cft	cft	2760.00 0%cft	17871.00
08	Cartage of sand, bajri, lime surki murum building rubbish i/c loading and unloading and stacking at site	3125 cft	cft	1065.00% cft	33281.00
09	P/L 1:2:4 RCC manhole covers i/c tor bars frame using GSB ¾' and d/g etc complete	55	Nos	913.63 each	50250.00
SUB TOTAL PART-A					8,88,175.00 + OR

SIGNATURE OF CONTRACTOR

ADDRESS : _____

131

SUBJECT: REHABILITATION OF RCC PIPE GALI # 01 TO 17 IN ZIA COLONY SHEET # 1 UC-01

PART-B ITEM BASED ON OFFER RATES

S #	DESCRIPTION	QUANTITY	RATES	AMOUNT
01	P/F RCC ring slab 39" dia with RCC manhole cover of 21" dia as per direction of engineer in charge	40 Nos	OR Rs.	
SUB TOTAL PART-B				

SIGNATURE OF CONTRACTOR _____.

I / WE HEREBY QUOTED RATES AS FOLLOWS:-

01	PART-A (ITEM RATES BASES ON SR) @ _____ % ABOVE / BELOW SR I/C THE COST OF CARRIAGE OF MATERIALS AND DIFFERENCE OF COST OF BITUMEN	RS. _____
02	PART-B (ITEM RATE BASES ON OFFER RATES / ITEM RATES THE ITEMS OTHER THEN SCHEDULE RATES	RS.- _____
GRAND TOTAL PART-A & B		RS. _____

TOTAL RS. _____ RUPEES

Signature of contractor _____

Address : _____

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI
PTCL # 36697869 / 36660102 & FAX # 36762519

132

02/11/14

TENDER REFERENCE # NIT/ _____ 2015

Dated: _____

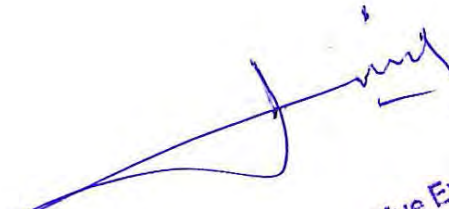
SUBJECT: REPAIR AND MAINTENANCE OF SEWERAGES SYSTEM NEAR SIKANDAR
MILL IN ZIA COLONY IN UC-01

BILL OF QUANTITIES

ESTIMATED COST	RS. 8,85,221.00 + OR
BID SECURITY	RS. 17,705.00
TENDER COST	RS. 1,000.00

Issued to M/S _____
Video pay order / Challan # _____ dated: _____ Rs. _____.

Signature and stamp


Executive Engineer
Buildings & Roads
Orangi T.C. (West)

133

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI

SUBJECT: REPAIR AND MAINTENANCE OF SEWERAGES SYSTEM NEAR SIKANDAR
MILL IN ZIA COLONY IN UC-01

PART-A ITEM BASED ON SCHEDULE RATE

S #	DESCRIPTION	QUANTITY	UNIT	RATES	AMOUNT
01	Dismantling of cement concrete palin flooring CC 1:2:4	1747 cft	cft	3327.50	58131.00
02	Excavation for pipe line in trenches and pits in all kind of soils of murum i/c trimming and dressing sides to true alignment and shape leveling of beds trenches to correct level and grade cutting joints holes and disposal of surplus earth within one chain as directed by engineer in charge	4967	cft	4650.00 0%cft	23097.00
03	P/L RCC rubber ring pipe of class A and fixing in trenches i/c cutting, fitting and jointing with rubber ring etc 12" dia pipe	850 Rft	Rft	367.00	311950.00
04	Construction of manhole 4' dia inside i/c RCC ring slab 39" dia with manhole cover 21" dia of 5' clear depth in 1:2:4 in 9" thick wall and bedding cast in situ with fair face steel shuttering i/c excavation back filling and dispose of surplus stuff up to one chain its complete	38 Nos	Each	13064.00	496432.00
05	Add for extra depth beyond 5 ft depth less the 5 ft deduct the same rate	(-)66.50	Rft	1540.00	(-)102410.00
06	Refilling of excavation stuff in trenches 6" this compacting at all lead and lift	4069 cft	Cft	2760.00 0%cft	11230.00
07	Cartage of sand, bajri, lime surki murum building rubbish i/c loading and unloading and stacking at site	3635 cft	cft	1065.00% cft	38713.00
08	P/L 1:2:4 RCC manhole covers i/c tor bars frame using GSB ¾' and d/g etc complete	50	Nos	913.63 each	45682.00
09	Earth work excavation in irriagation channels irrigation drain etc dressed to designed section and profile excavated materials dipossed off and dressed with in 50 ft	990	cft	2420.00 0 % cft	2396.00
SUB TOTAL PART-A					8,85,221.00 + OR

SIGNATURE OF CONTRACTOR

ADDRESS : _____

134

SUBJECT: REPAIR AND MAINTENANCE OF SEWERAGES SYSTEM NEAR SIKANDAR MILL IN ZIA COLONY IN UC-01

PART-B ITEM BASED ON OFFER RATES

S #	DESCRIPTION	QUANTITY	RATES	AMOUNT
01	P/F RCC ring slab 39" dia with RCC manhole cover of 21" dia as per direction of engineer in charge	40 Nos	OR Rs.	
SUB TOTAL PART-B				

SIGNATURE OF CONTRACTOR _____.

I / WE HEREBY QUOTED RATES AS FOLLOWS:-

01	PART-A (ITEM RATES BASES ON SR) @ _____ % ABOVE / BELOW SR I/C THE COST OF CARRIAGE OF MATERIALS AND DIFFERENCE OF COST OF BITUMEN	RS. _____
02	PART-B (ITEM RATE BASES ON OFFER RATES / ITEM RATES THE ITEMS OTHER THEN SCHEDULE RATES	RS.- _____
GRAND TOTAL PART-A & B		RS. _____

TOTAL RS. _____ RUPEES

Signature of contractor _____

Address : _____



5
135

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST

NAME OF WORK:

INSTRUCTION TO BIDDERS / PROCURING AGENCIES GENERAL RULES AND GUIDANCE TO CONTRACTORS

This section of the bidding documents should provide the information necessary for bidders to prepare responsive bids, in accordance to the requirement of the procuring agency. It should also give information on bid, submission, opening and evaluation, and on the award of contract. Mater governing the performance or the contract or payment under the contract or matters affecting the risks, rights and obligations of the payment under the contract is included as conditions of contract and bidding Data.

The instruction to bidders will not be part of the contract and will cease to have effect once the contract is signed.

1-Notice inviting / invitation for bid: All work proposed to be executed by contract shall be notified in a form of notice inviting tender (NIT) / Invitation to bid (IFB) hosted on the web site of authority and procuring of work and also in newspapers wherever require as per Rules. NIT must state the description of work, dates, time and place issuing tenders, submission, opening bids, completion time, cost of bidding documents and bid security either in lump sum or a percentage of estimated cost /bid cost. The interested bidders must have valid NTN also. 2-Content of bidding documents: it must include, but not limited to: Conditions of contract, **contract data, specification or its reference with premium to be filled in the form of percentage above / below or on item rates to be quoted, form of agreement and drawings.**

v

3-Fixed price contracts: The bid price and rates are fixed during the currency of the contract and under no circumstance shall any be entitled to claim enhance rates for any terms in this contract.

4- Right to rejection: The procuring agency shall have the right of rejecting all or any of the tender / bid as per provision of SPP Rules-2010 (amended-2013).

5- Conditional offer: Any person who submits a tender shall fill up the usual printed form stating at what percentage above or below on the rates specified in the bill of quantities for an item or work to be carried out he is willing to undertake the work and also quoted the rates for those items which are based on market rates. Only one rats of such percentage on all the scheduled rates shall be framed, The tender which proposes time, allowing for carrying out, eh work or which contain any other conditions will be liable to rejection, No printed form of tender shall include a tender for more than one work, but if contractor wish to tender for two or more works, they shall submit a separate tender for each, The envelope containing his tender documents shall refer the name and number of the work.

6-Measurements: All works shall be measured by standardized instruments according to the rules.

7-Evidence of eligibility: Bidders shall provide evidence of their eligibility as and when requested by the procuring agency. Experience of relevant works / turnover of at least last three years, managerial capability, resources, details who to execute the work and cop with technical difficulties, available machineries, Registration of Board, income tax department valid NTN number, registration in sale tax in case the procurement of goods and services, Registration of Sindh Revenue board and registration of Pakistan Engineering council and any other factor deemed to be relevant by the procuring agency subject to provision of Rule-44.

8-Late submission of bids: any bid received by the agency after the deadline for submission of bids shall be rejected and returned unopened to the bidder.

9- Bid security: Bid without the security of required amount and prescribed form shall be rejected.

136

10-Arithmetical errors: Bids determined to be substantially responsive shall be checked for any arithmetic errors. Arithmetical errors shall be rectified on the following basis:-

- In case of schedule rates, the amount of percentage quoted above or below will be checked and added or subtracted from the amount of bill of quantities to arrive the final bid cost.
- In case of item rates: if there is a discrepancy between the unit rates and the total cost that is obtained by multiplying the unit and quantities the unit rate shall prevail and the total cost will be corrected unless in the opinion of the agency there is any obvious misplacement of the decimal point in the unit rates, in which case the total cost as quoted will govern and the unit rates corrected. If there is a discrepancy between the total bid amount and the sum of total costs the sum of the total cost shall prevail and the total bid amount shall be corrected.
- Where there is a discrepancy between the amounts in figures and in words the amount in words shall be governed.

CONDITION OF CONTRACT.

5

137

Clause-1: **Commencement and completion dates of the work:** The contractor shall not enter upon or commence any portion of the work except with the written authority and instructions of the Engineer in charge or its subordinate officer / official of the work failing which authority the contract shall have no claim to ask for measurement or its payment the work executed by him on site.

Clause-2: **Liquidated damages:** The contractor shall pay liquidated damages to the agency at The contractor shall proceed with the work with due expedition and with delay and complete in the time allowed for carrying out he work as entered in the tender shall be strictly observed by the contractor and shall reckon from the date on which the order to commence the work, the contractor shall be bound, In all in which the time allowed for completion of at any work exceeds one month to achieve progress on the prorate basis.

The rate devastated in bidding data for each day that the completion date is later than the intended completion date the amount of liquidated damage paid by the contractor to the agency shall not exceed 10 percent of the contract amount / cost /price. Payment of liquidated damages does not affect the contractor's liabilities.

Clause-3: **Termination of the contract.**

Procuring agency / Executive Engineer may terminate the contract if either of the following conditions exist:-

1-Contractor causes a breach of any clause of the contract:

2-The progress of any particular portion of the work is unsatisfactory and notice of 10 days has expired.

3-in case of abandonment of the work owing to the serious illness or death of a contractor or any other cause.

4-contractor can also request for termination of contract if a payment certified by the Engineer in charge is not paid to the contractor within 60 days of the date of submission of the bill.

(B) The Executive Engineer / Procuring agency has power to adopt any of the following courses as may deem fit:

1- to forfeit the security deposit available except conditions mentioned at A(3) and (4) above.

2-to finalize the work by measuring the work done by the contractor.

(C) - In the event of any the above courses being adopted by the Engineer / procuring agency the contractors Have :-

- No claim to compensation for any loss sustained by him by reason of his having purchased or procured any materials or entered into any engagements or made any advances on account of or with a view to the execution of work or the performance of the contract.

- However, the contractor can claim for the work done on site duly certified by the Executive Engineer in writing regarding the performance of such work and has not been paid. The procuring Agency / Engineer may invite fresh bid for remaining work.

Clause-4: **Possession of the site and claims for compensation for delay.** The Executive Engineer shall give possession of all parts of the site to the contractor. If possession of the site is not given by the date stated in commencement order no compensation shall be allowed for any delay caused by starting to work on account of any acquisition of land water standing in borrow pits compartments or in accordance sanction to estimates. In such case, either date of commencement will be changed or period of completion is to be extended accordingly.

Clause -5: **Extension of intended completion date:** The procuring agency either on its initiative before the date of completion or on desired of the contractor may extend the intended from the completion date, if any event which hindrance the execution of contract accordance or a variation order if issued which make it impossible to complete the work by the intended completion date for such period as he may think necessary or proper. The decision of the Executive Engineer in this matter shall be final. Where time has been extended under this or any other clause of this agreement, the date of completion of the work shall be date fixed by the order given in the extension or by the aggregate of such orders, make under this agreement. When time has been extended as for said, it shall continue to be essence of the contract and all clauses of the contract shall continue to be operative during the extended period.

Clause-6: **Specification:** The contractor shall execute the whole or every part of the work in the most substantial and workman like manner and both as regard material or all other matters strict accordance with the specification lodge in the office the Executive Engineer and initialed by the parties, the said specification being a part of the contract. The contractor shall also confirm t fully and faithfully to the design, drawing and instruction in writing relating to the works signed by the Executive Engineer in-charge and lodge in his office in to which the contractor shall be entitled to have excess as such office or on the site of work for the purpose of inspection during office hours and the contractor shall, if he so required the entitled at his own expense to make or cost to be made copy of the specification, and all such design, drawing, and instruction as aforesaid.

Clause-7 **Payment :** (A) Interim fresh running bill a bill shall be submitted by the contractor as frequently as the progress of work may justified for all the work executed and not included any previous bill atleast one in a month and the Engineer in- charge shall take or cost to be taken requisite measurement for the purpose of having the same verified and the claim, as far as admissible, adjusted, if possible before the expiry of 10 days from the presentation from the bill, at any time depute a subordinate to measure up the said work in the presence of the contractor or his authorized agent, whose counter signature to the measurement list will be sufficient to warrant and the Engineer in-charge may prepare a bill from such list which shall be binding on the contractor in all respect. The engineer procuring agency shall pass/ certify the amount to be paid to the contractor, which he consider due and payable in respect thereof, subject to deduction of security deposit, advance payment if any make to him and taxes. All such intermediate payment shall be regarded as payment by way of advance against the final payment only and not as payment for work actually done and completed and shall not preclude the engineer in-charge from the recoveries from final bill and rectification of defects and unsatisfactory items of work pointed out to him during the defect liability period.

(B)- Final bill : A bill shall be submitted by the contractor within one month of the day fixed for the completion of work otherwise the Engineer in charge certificate of re-measurement and of the total amount payable for the work shall be final and binding on all parties.

Clause – 8 : **Reduced rates.** In cases where the items of works are not accepted as so completed, the engineer-in-charge may make payment on account of such items at such reduced rates as he may consider reasonable in the preparation of final or on running account bills with reasons recorded in writing.

Clause -9: **Issuance of variation and repeat orders.**

- (A) Agency may issue a variation order for procurement of works, physical services from the original contractor to cover any increase or decrease in quantities, including the introduction of new work items that are either due to change of plan, design or alignment to suit actual field conditions, within the general scope and physical boundaries of the contract.
- (B) Contractor shall not perform a variation until the procuring agency has authorized the variation in writing subject to the limit not exceeding the contract cost by of %15 on the same conditions in all respects on which he agreed to do item in the work, and at the same rates, as are specified in the tender for the main work. The contractor has no right to claim for compensation by reason of alterations and curtailment of the work.
- (C) In case the nature of the work in the variation does not correspond with items in the bill of quantities, the quotation by the contractor is to b in the form of few rates for the relevant item of work, and the engineer-in-charge is satisfied that the rate quoted is within the rate worked out by him on detailed rate analysis, and then only he shall allow him that rate after approval from higher authority.
- (D) The time of the work shall be extended in the proportion that the additional work bear to the original contract work. The price to be exceeded by more than 15% and then engineer can adjust the rates for those quantities causing excess the cost of contract beyond 15% after approval for superintending engineer.
- (E) Repeat order: Any cumulative beyond 15 % of initial contract amount shall be subject of any other contract to be tendered of if the works are separable from the original contract.

Clause 10: Quality control:

- A- Identifying defects if at any time before the security deposit is refunded to the contractor / during defect liability period mentioned in bid data, the Engineer in charge for his subordinate in charge of the work may instruct the contractor to uncover and test any part of the work which he considered may have a defect due to use of unsound material and unskilled workmanship and the contractor has to carry out a test at his own cost irrespective of work already approved or paid
- B- Correction of defect the contractor shall be bound forthwith to rectify or remove and reconstruct the work so specified in whole or in part, as the case may require. The contractor shall correct the notified defect within the defect correction period mentioned in notice.
- C- UNcorrected defects 1- in the case of any such failure, the Engineer in charge shall give the contractor at least 14 days' notice of intention to use the third party correct the defect. He may rectify and remove and re-execute the work or remove or replace material or articles complained of as the case may be as the risk and expense in all respects of the contractor.
2- if the engineer considers that the correction of the defect is not essential and it may be accepted or made use of, it shall be within his discretion to accept the same at such reduced rates as he may fix therefor.

Clause 11: A- Inspection of operations. The Engineer and his subordinate, shall at all reasonable times have access to the site for supervision and inspection of work under or in course of execution in pursuance of the contract and contractor shall afford every facility / assistance in obtaining the right to such access

B- Date for inspection: The Engineer shall give the contractor a reasonable notice of the intention of the Engineer in-charge or his subordinate staff to visit the work shall have given to the contractor, then he either himself be present to receive orders and instructions or have responsible agent duly accredited in writing present for that purpose orders given to the contractor's duly authorized agent shall be considered to have the same force and effect as if they had been given to the contractor himself.

Clause- 12: Examination of work before covering up:

A- No part of the work shall be covered up or put out of view / beyond the reach without giving notice of not less than days to the Engineer in charge when ever any such part of the works or foundation is or are ready or about to be ready for examination and the Engineer shall without delay unless he considers it unnecessary and advises the contractor accordingly, attend for the purpose of examining and measuring such part of the works or of examining such foundations.

B- if any work is covered up or placed beyond the reach of measurement without such notice having been given: the same shall be uncovered on the contractor's expenses and in default thereof no payment or allowance shall be made for such work or for the materials with which the same was executed.

Clause- 13: Risk: The contractor shall be responsible for all risks of loss of or damage to physical property or facilities or the related services at the premises and of personal injury and death without arise during and in consequence of its performance of the contract. If any damage is caused while the work is in progress or become apparent within months of the grant of the certificate of completion, final or otherwise the contractor shall make good the same at his own expense or in default the Engineer may cause the same to be made good by other workman and deduct the expenses from retention money lying with the Engineer.

Clause- 14: Measures for prevention of fire and safety measures: The contractor shall not set fire to any standing jungle, trees, bush wood or grass without a written permit from the Executive Engineer. When such permit is given, and also in all cases when destroying cutting or uprooting trees bush wood grass etc by fire, the contractor shall take necessary measures to prevent such fire of all its activities including protection of the environment on and off the site.

140

5

5

Compensation of all damage done intentionally or in intentionally on the site by the contractor's labors shall be paid by him.

Clause 15: **Sub contracting:** The contractor shall not subcontract the whole of the works except where otherwise provided by the contract. The contractor shall not subcontract any part of the works without the prior consent of the Engineer in-charge. Any such consent shall not relieve the contractor from any liability or obligation under the contract and he shall be responsible for the acts, default or neglects were those of the contractor his agent servants or workman. The provisions of this contractor shall apply to such subcontract or his employees as if he or it were employees of the contractor.

Clause- 16: **Disputes:** All disputes arising in connection with the present contract, and which cannot be amicably settled between the parties, the decision of the Superintending Engineer of the circle / officer one grade higher to awarding authority shall be final, conclusive and binding on all parties to the contractor upon all questions relating to the meaning of the specifications, designs, drawings and work or as to any other questions\, claim, rights, matter or things whatsoever in any way arising out of or relating to the contract design, drawings, specifications, estimates, instructions, orders or these conditions or otherwise concerning the works or the execution of failure to execute the same whether arising during the progress of the work or after the completion or abandonment thereof.

Clause- 17: **Site clearance:** On completion of the work the contractor shall furnish the certificate by the Engineer in-charge (hereinafter called the Engineer in-charge) of such completion, but neither such certificate shall be given nor shall the work be considered to be complete until the contractor shall have removed all temporary structures and materials brought at the site either fails to comply with the requirements of this clause then Engineer in-charge may on the expense of the contractor remove and dispose off the same as he thinks fit and shall deduct the amount of all expenses so incurred from the contractor retention money. The contractor shall have no claim in respect of any surplus materials as aforesaid except for any such actually realized by the sale thereof.

Clause-18: **Financial assistance / advance payment:**

- A- Mobilization advance in any condition, situation is not allowed.
- B- Secure advance against materials brought at site.
 - 1- Secured advance may be permitted only against imperishable materials/ quantities anticipated / utilized on the work within a period of three months from the date of issue of secured advance and definitely not full quantities of materials for the entire work/ contract. The sum payable for such material on site shall not exceed 75% of the materials of the market price of materials.
 - 2- Recovery of secured advance paid to the contractor under above provision shall be affected from the monthly payments on actual consumption basis but not later then period more the three months (even if unutilized).

Clause-19: **Recovery of arrears of land Revenue:** Any sum due to the government by the contractor shall liable for recovery as arrears of land Revenue.

Clause-20: **Refund of security Deposit / Retention Money :** On completion of the whole of the works (a work should be considered as complete for the purpose of refund of security deposit to a contractor form the last date on which its final measurement are checked by and competent authority, if such check is necessary otherwise from the last date of recording the final measurements, the defects notice period has also passed and the Engineer in-charge has certified that all defects notified to the contractor before the end of this period have been corrected, the security deposit lodged by a contractor in cash or recovered in installments from his bills) shall be refunded to him after the expiry of three months from the date on which the work is completed.

Divisional Accountant

Executive Engineer / Procuring Agency

Contractor _____