

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI
PTCL # 36697869 / 36660102 & FAX # 36762519

TENDER REFERENCE # NIT/ _____ 2015

Dated: _____

SUBJECT: CONSTRUCTION OF CC STREET IN GALI # 01 HOUSE # 371 IN SHAH WALI ULLAH
NAGAR IN UC-07

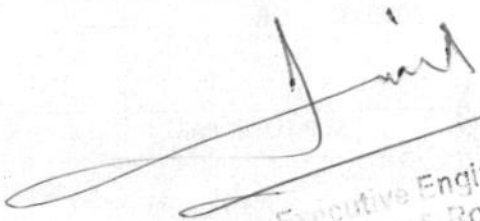
BILL OF QUANTITIES

ESTIMATED COST
BID SECURITY
TENDER COST

RS. 2,62,448.00+OR
RS. 5249.00
RS. 1,000.00

Issued to M/S _____
Video pay order / Challan # _____ dated: _____ Rs. _____

Signature and stamp


Executive Engineer
Building & Roads
Orangi Zone D.M.C (West)

DISTRICT MUNICIPAL CORPORATION, KARACHI WEST
SECTOR 11-E SHAHRAH-E-ORANGI, ORANGI TOWN, KARACHI

SUBJECT: CONSTRUCTION OF CC STREET IN GALI # 01 HOUSE # 371 IN SHAH WALI ULLAH NAGAR IN UC-07.

PART-A ITEM BASED ON SCHEDULE RATES

S #	DESCRIPTION	QUANTITY	UNIT	RATES	AMOUNT
01	Dismantling of cement concrete plain flooring	840 cft	cft	3327.50 % cft	27951.00
02	Dismantling of cement concrete floiorngn 1:2:4 plain	489 cft	cft	1306.80% cft	6390.00
03	Preparing of sub grade i/c earth excavation leveling to an average depth of 9" dressing to camber and consolidation with power roller	6000 sft	% sft	526.28	31577.00
04	P/L 2 " topping CC 1:2:4 i/c surface finishing and dividing to panels	6000 sft	sft	3275.50 %sft	196530.00
SUB TOTAL PART-A					262448.00 + OR

SUBJECT: CONSTRUCTION OF CC STREET IN GALI # 01 HOUSE # 371 IN SHAH WALI ULLAH NAGAR IN UC-07

PART-B ITEM BASED ON OFFER RATES

S #	DESCRIPTION	QUANTITY	RATES	AMOUNT
01	P/L Aggregate base course material over the prepared sub grade in conformity with lines grade thickness and typical cross section shown in drawing for new pavement using well graded granular crushed stoen with asandand silt having a smooth gradation curve with tin the limit for grading A or B as per AASHTO M 142-62 and compacting to 100% of the minimum dry density accorign to AASHTO-T 180 method D using approved m\chanical means of i/c watering with all lead and lift as per specification and as per directed by engineer in charge	1740 cft	OR Rs	
02	P/F RCC ring slab 39" dia with RCC manhole of 21" dia as per direction of engineer in charge	172 Nos	OR	
03	Extra for using SR cement in place of OPC	173 cwt	OR	
04	S/F imported earth within the a radiusof 5 miles i/c digging and loading and unloading and stacking at site complete as per direction o fengineer in charge	3000 cft	OR	
SUB TOTAL PART-B				

SIGNATURE OF CONTRACTOR

ADDRESS : _____

SUBJECT: CONSTRUCTION OF CC STREET IN GALI # 01 HOUSE # 371 IN SHAH WALI ULLAH NAGAR IN UC-07.

I / WE HEREBY QUOTED RATES AS FOLLOWS:-

01	PART-A (ITEM RATES BASES ON SR) @ _____ % ABOVE / BELOW SR I/C THE COST OF CARRIAGE OF MATERIALS AND DIFFERENCE OF COST OF BITUMEN	RS. _____
02	PART-B (ITEM RATE BASES ON OFFER RATES / ITEM RATES THE ITEMS OTHER THEN SCHEDULE RATES	RS.- _____
GRAND TOTAL PART-A & B		RS. _____

TOTAL RS. _____ RUPEES _____

Signature of contractor _____

Address : _____