

**OFFICE OF THE EXECUTIVE ENGINEER**  
**CHOTIARI RESERVOIR (I) DIVISION, SANGHAR**

No. SAC/G-2 (b)/CRDS/ 1059

Sanghar

Dated: 30/12/2016

To,

The Managing Director (SPPRA)  
Sindh Public Procurement Regularity Authority,  
Karachi.

Subject: **SUBMISSION OF BID REPORT (B.R).**

Reference: SPPRA ID NO.2147483647.

It is Submitted that the Bid Evolution report of the following works are given below.

**Package No.01** CONSTRUCTION OF CIVIL WORK OF MAKHI FARASH LINK CANAL PROJECT (CHOTIARI PHASE-II), FOR WATER SUPPLY TO THAR COAL FROM RD 104+000 TO 145+600, IN CHOTIARI RESERVOIR (I), DIVISION, SANGHAR

**Package No.02** CONSTRUCTION OF CIVIL WORK OF MAKHI FARASH LINK CANAL PROJECT (CHOTIARI PHASE-II), FOR WATER SUPPLY TO THAR COAL FROM RD 145+600 TO 171+400, IN CHOTIARI RESERVOIR (I), DIVISION, SANGHAR.

**Package No.03** CONSTRUCTION OF CIVIL WORK OF MAKHI FARASH LINK CANAL PROJECT (CHOTIARI PHASE-II), FOR WATER SUPPLY TO THAR COAL FROM RD 171+400 TO 208+000, IN CHOTIARI RESERVOIR (I), DIVISION, SANGHAR.

**Package No.04-A** CONSTRUCTION OF CIVIL WORK OF MAKHI FARASH LINK CANAL PROJECT (CHOTIARI PHASE-II), FOR WATER SUPPLY TO THAR COAL FROM RD 171+400 TO 208+000, IN CHOTIARI RESERVOIR (I), DIVISION, SANGHAR.

**Package No.04-B** CONSTRUCTION OF CIVIL WORK OF MAKHI FARASH LINK CANAL PROJECT (CHOTIARI PHASE-II), FOR WATER SUPPLY TO THAR COAL FROM RD 171+400 TO 208+000, IN CHOTIARI RESERVOIR (I), DIVISION, SANGHAR (PACKAGE-IV-B).

11  
02-01-17

  
**Executive Engineer**  
Chotiari Reservoir (I) Division  
Sanghar  


**OFFICE OF THE EXECUTIVE ENGINEER CHOTIARI RESERVOIR (I) DIVISION @ SANGHAR**

**BID EVALUATION REPORT**


1	Name of Procuring Agency:	EXECUTIVE ENGINEER CHOTIARI RESERVOIR (I) DIVISION @ SANGHAR
2	Tender Reference Number:	Supdt./PD/CRPC/1144, Dated: 08/12/2016
3	Tender Description:	Construction of Civil Work of Makhi Farash Link Canal Project (Chotiari Phase-II), For Water Supply to Thar Coal from RD 104+000 To 145+600, in Chotiari Reservoir (I), Division, Sanghar
4	Method of Procurement:	Single Stage (One Envelope)
5	Tender Published:	Through SPPRA Website (SPPRA ID-2147483647)
6	Total Bid Document Sold:	03 Nos.
7	Total Bid Received:	03 Nos.
8	Technical Bid Opening Date:	N/A
9	No. of Bid Technically Qualified	N/A
10	Bids Rejected	02 Nos.
11	Financial Bid opening date:	26.12.2016
12	<b>Bid Evaluation Report</b>	

S #	Name of Firm/ Bidder	Cost Offered by the Bidder	Ranking in terms of Cost	Comparison with Estimated Cost	Reason for Acceptance/Rejection	Remarks
1	M/S Hafiz Rabnawaz & Co.	Rs.293,471,766	1st Lowest	14.76% Above	Being Lowest. CDR #10515504 dt:26.12.2016 ABL	Accepted
2	M/s Agha Muhammad Khan & Co	Rs.296,617,984	2nd Lowest	15.99 % Above	Being Higher. CDR #17020024422 dt:23.12.2016 Mezan Bnk	Rejected
3	M/S MDS & Co.	Rs.297,666,724	3rd Lowest	16.40 % Above	Being Higher. CDR #10831951 dt:23.12.2016 ABL	Rejected

Certified that M/S Hafiz Rabnawaz & Co. declared as the lowest Bidder by the committee and recommended for the sanction from competent authority. All concerned bidders are informed accordingly.



**Altaf Hussain**  
Assistant Director  
Sindh Building Control Authority  
Hyderabad



**Suresh Kumar**  
Executive Engineer  
Chotiari Reservoir (I) Division  
Sanghar



**Zarif Iqbal Khoro**  
Project Director/SE  
Chotiari Reservoir Project Circle  
Sanghar

Comparative Statement

**Name of Work: CONSTRUCTION OF CIVIL WORK OF MAKHI FARASH LINK CANAL PROJECT (CHOTIARI PHASE-ID), FOR WATER SUPPLY TO THAR COAL FROM RD 104+000 TO 145+600, IN CHOTIARI RESERVOIR (I), DIVISION, SANGHAR**

S #	Description of Work	Estimated Cost			M/S Hafiz Rabnawaz & Co.		M/s Agha Muhammad Khan & Co		M/S MDS & Co	
		Qty	Rate	Per Unit	Rate	Amount	Rate	Amount	Rate	Amount
1	Construction of Civil Work of Makhi Farash Link Canal Project (Chotiari Phase-II), For Water Supply to Thar Coal from RD 104+000 To 145+600, in Chotiari Reservoir (I), Division, Sanghar	01	255717143	255717143	293471766	293471766	296617984	296617984	297666724	297666724
	<b>Total Quoted/Corrected</b>			<b>255717143</b>		<b>293471766</b>		<b>296617984</b>		<b>297666724</b>



**Altaf Hussain**  
Assistant Director  
Sindh Building Control Authority  
Hyderabad



**Suresh Kumar**  
Executive Engineer  
Chotiari Reservoir (I) Division  
Sanghar



**Zarif Iqbal Khero**  
Project Director/SE  
Chotiari Reservoir Project Circle  
Sanghar

NIT No.SPPRA Serial No. 2147483647

Method of Procurement: Single Stage One Envelope.

Name of Work: **CONSTRUCTION OF CIVIL WORK OF MAKHI FARASH LINK CANAL PROJECT (CHOTIARI PHASE-II), FOR WATER SUPPLY TO THAR COAL FROM RD 104+000 TO 145+600, IN CHOTIARI RESERVOIR (I), DIVISION, SANGHAR**

Date of opening: 26.12.2016

**BIDDERS'ELIGIBILITY/QUALIFICATION REPORT**

Eligibility/Qualification Criteria:

S #	Eligibility/Qualification Criteria	Bidders'Name		
		M/S Hafiz Rabnawaz & Co.	M/s Agha Muhammad Khan & Co	M/S MDS & Co
1	Registration with PEC (if appli.)	Yes	Yes	Yes
2	NTN	Yes	Yes	Yes
3	Sales Tax Registration (FBR)	Yes	Yes	Yes
4	Registration with Sindh Revenue	Yes	Yes	Yes
	Qualification Criteria			
5	Minimum 3 years' experience of relevant field	Yes	Yes	Yes
6	Turnover of at least last 3 years	Yes	Yes	Yes
7	Required Bid security is attached	Yes	Yes	Yes
8	Bid is signed, named and stamped by the authorized person of the firm along with the authorization letter.	Yes	Yes	Yes
9	Any other factor deemed to be relevant by the procuring agency subject to provision of Rule-44	N/A	N/A	N/A
10	Qualified/Disqualified	Qualified	Qualified	Qualified



**Altaf Hussain**  
Assistant Director  
Sindh Building Control Authority  
Hyderabad



**Suresh Kumar**  
Executive Engineer  
Chotiari Reservoir (I) Division  
Sanghar



**Zarif Iqbal Khoro**  
Project Director/SE  
Chotiari Reservoir Project Circle  
Sanghar



Name of Work: **CONSTRUCTION OF CIVIL WORK OF MAKHI FARASH LINK CANAL PROJECT (CHOTIARI PHASE-II), FOR WATER SUPPLY TO THAR COAL FROM RD 104+000 TO 145+600, IN CHOTIARI RESERVOIR (I), DIVISION, SANGHAR**

**Minutes of Bid Opening Meeting**

A meeting of the procurement committee of this department was held on 26.12.2016 for opening the bid received in respect of subject NIT till deadlines of submission. The meeting was attended by all/following members of Procurement Committee and the representative of Bidders.

(Attendance sheet is enclosed)

2. Three Bidders submitted their Bids till the deadline of submission.

- 1 M/S Hafiz Rabnawaz & Co.
- 2 M/S Agha Muhammad Khan & Co.
- 3 M/S MDS & Co

3. The bids were opened at 1:00 PM in the presence of the above mentioned participants and the rates quoted by bidders were read aloud and encircled by the Chairman of Procurement Committee.

S #	Name of Firm	Quoted Price	CDR No./ Date
1	M/S Hafiz Rabnawaz & Co.	Rs.293,471,766	CDR #10515504 dt:26.12.2016 ABL
2	M/s Agha Muhammad Khan & Co	Rs.296,617,984	CDR #17020024422 dt:23.12.2016 Mezan Bank
3	M/S MDS & Co.	Rs.297,666,724	CDR #10831951 dt:23.12.2016 ABL

4. The Bids do not contain any overwriting or cutting.

5. The Committee shall examine all the Bids as per the qualification/eligibility criteria provided in the bidding documents and verify the documents and Bid security submitted by the Bidders (if required).

The meeting ended with the vote of thanks to and from the Chair.

  
**Altaf Hussain**  
Assistant Director  
Sindh Building Control Authority  
Hyderabad

  
**Suresh Kumar**  
Executive Engineer  
Chotiari Reservoir (I) Division  
Sanghar

  
**Zafar Iqbal Khoro**  
Project Director/SE  
Chotiari Reservoir Project Circle  
Sanghar

**Attendance Sheet Date 26/12/2016**







Name of Work: **Construction of Civil Work of Makhi Farash Link Canal Project (Chotiari Phase-II), For Water Supply to Thar Coal from RD 104+000 To 208+000, in Chotiari Reservoir (I), Division, Sanghar**

NIT NO.

*Supdt: /PD/CARC/1144*  
FC/G-55/CRDS+

DATED: 08-12-2016

Date of Opening 26.12.2016


S #	Name of Contractor/Firm	Signature
1	M/s Hafiz Rabnawaz & Company, Government Contractor	
2	M/s Abdul Hakeem Chachar & Sons, Government Contractor	
3	M/s Agha Muhammad Khan & Co. Government Contractor	
4	M/s MDS & Company, Government Contractor	
5	M/s Goind Ram, Government Contractor	
6	M/s Haji Bashir Ahmed Soomro, Government Contractor	
8		
9		



**Altaf Hussain**  
Assistant Director  
Sindh Building Control Authority  
Hyderabad



**Suresh Kumar**  
Executive Engineer  
Chotiari Reservoir (I) Division  
Sanghar



**Zarif Iqbal Khoro**  
Project Director/SE  
Chotiari Reservoir Project Circle  
Sanghar

**OFFICE OF THE EXECUTIVE ENGINEER CHOTIARI RESERVOIR (I) DIVISION @ SANGHAR**

**BID EVALUATION REPORT**

1	Name of Procuring Agency:	EXECUTIVE ENGINEER CHOTIARI RESERVOIR (I) DIVISION @ SANGHAR
2	Tender Reference Number:	Supdt:/PD/CRPC/1144, Dated: 08/12/2016
3	Tender Description:	Construction of Civil Work of Makhi Farash Link Canal Project (Chotiari Phase-II), For Water Supply to Thar Coal from RD 145+600 To 171+400, in Chotiari Reservoir (I), Division, Sanghar ( <b>Package-02</b> )
4	Method of Procurement:	Single Stage (One Envelope)
5	Tender Published:	Through SPPRA Website ( <b>SPPRA ID-2147483647</b> )
6	Total Bid Document Sold:	03 Nos.
7	Total Bid Received:	03 Nos.
8	Technical Bid Opening Date:	N/A
9	No. of Bid Technically Qualified	N/A
10	Bids Rejected	02 Nos.
11	Financial Bid opening date:	26.12.2016
12	<b>Bid Evaluation Report</b>	

S #	Name of Firm/ Bidder	Cost Offered by the Bidder	Ranking in terms of Cost	Comparison with Estimated Cost	Reason for Acceptance/Rejection	Remarks
1	M/S Abdul Hakeem Chachar.	Rs.255,228,267	1st Lowest	14.77% Above	Being Lowest. CDR #10515503 dt:26.12.2016 ABL	Accepted
2	M/s Agha Muhammad Khan & Co	Rs.256,361,517	2nd Lowest	15.28 % Above	Being Higher. CDR #17020024423 dt:23.12.2016 Mezan Bnk	Rejected
3	M/S Goind Ram.	Rs.258,250,267	3rd Lowest	16.13 % Above	Being Higher. CDR #05899118 dt:23.12.2016 UBL	Rejected

Certified that M/S Abdul Hakeem Chachar declared as the lowest Bidder by the committee and recommended for the sanction from competent authority. All concerned bidders are informed accordingly.



**Altaf Hussain**  
Assistant Director  
Sindh Building Control Authority  
Hyderabad



**Suresh Kumar**  
Executive Engineer  
Chotiari Reservoir (I) Division  
Sanghar



**Zariq Iqbal Khoro**  
Project Director/SE  
Chotiari Reservoir Project Circle  
Sanghar

Comparative Statement

**Name of Work: CONSTRUCTION OF CIVIL WORK OF MAKHI FARASH LINK CANAL PROJECT (CHOTIARI PHASE-II), FOR WATER SUPPLY TO THAR COAL FROM RD 145+600 TO 171+400, IN CHOTIARI RESERVOIR (D), DIVISION, SANGHAR**

S #	Description of Work	Estimated Cost			M/S Abdul Hakeem Chachar.		M/s Agha Muhammad Khan & Co		M/S Goind Ram.		
		Qty	Rate	Per Unit	Amount	Rate	Amount	Rate	Amount	Rate	Amount
1	Construction of Civil Work of Makhi Farash Link Canal Project (Chotiari Phase-II), For Water Supply to Thar Coal from RD 145+600 To 171+400, in Chotiari Reservoir (D), Division, Sanghar	01	222364019		222364019	255228267	255228267	256361517	256361517	258250267	258250267
	<b>Total Quoted/Corrected</b>				<b>222364019</b>		<b>255228267</b>		<b>256361517</b>		<b>258250267</b>



**Altaf Hussain**  
Assistant Director  
Sindh Building Control Authority  
Hyderabad



**Suresh Kumar**  
Executive Engineer  
Chotiari Reservoir (D) Division  
Sanghar



**Zanir Iqbal Khero**  
Project Director/SE  
Chotiari Reservoir Project Circle  
Sanghar

NIT No.SPPRA Serial No. 2147483647

Method of Procurement: Single Stage One Envelope.

Name of Work: **CONSTRUCTION OF CIVIL WORK OF MAKHI FARASH LINK CANAL PROJECT (CHOTIARI PHASE-II), FOR WATER SUPPLY TO THAR COAL FROM RD 145+600 TO 171+400, IN CHOTIARI RESERVOIR (I), DIVISION, SANGHAR**

Date of opening: 26.12.2016

**BIDDERS' ELIGIBILITY/QUALIFICATION REPORT**

Eligibility/Qualification Criteria:

S #	Eligibility/Qualification Criteria	Bidders' Name		
		M/S Abdul Hakeem Chachar.	M/s Agha Muhammad Khan & Co	M/S Goind Ram.
1	Registration with PEC (if appli.)	Yes	Yes	Yes
2	NTN	Yes	Yes	Yes
3	Sales Tax Registration (FBR)	Yes	Yes	Yes
4	Registration with Sindh Revenue Qualification Criteria	Yes	Yes	Yes
5	Minimum 3 years' experience of relevant field	Yes	Yes	Yes
6	Turnover of at least last 3 years	Yes	Yes	Yes
7	Required Bid security is attached	Yes	Yes	Yes
8	Bid is signed, named and stamped by the authorized person of the firm along with the authorization letter.	Yes	Yes	Yes
9	Any other factor deemed to be relevant by the procuring agency subject to provision of Rule-44	N/A	N/A	N/A
10	Qualified/Disqualified	Qualified	Qualified	Qualified



**Altaf Hussain**  
Assistant Director  
Sindh Building Control Authority  
Hyderabad



**Suresh Kumar**  
Executive Engineer  
Chotiari Reservoir (I) Division  
Sanghar



**Zafar Iqbal Khoro**  
Project Director/SE  
Chotiari Reservoir Project Circle  
Sanghar

Name of Work: **CONSTRUCTION OF CIVIL WORK OF MAKHI FARASH LINK CANAL PROJECT (CHOTIARI PHASE-II), FOR WATER SUPPLY TO THAR COAL FROM RD 145+600 TO 171+400, IN CHOTIARI RESERVOIR (I), DIVISION, SANGHAR**

**Minutes of Bid Opening Meeting**

A meeting of the procurement committee of this department was held on 26.12.2016 for opening the bid received in respect of subject NIT till deadlines of submission. The meeting was attended by all/following members of Procurement Committee and the representative of Bidders.

(Attendance sheet is enclosed)

2. Three Bidders submitted their Bids till the deadline of submission.

- 1 M/S Abdul Hakeem Chachar..
- 2 M/s Agha Muhammad Khan & Co
- 3 M/S Goind Ram.

3. The bids were opened at 1:00 PM in the presence of the above mentioned participants and the rates quoted by bidders were read aloud and encircled by the Chairman of Procurement Committee.

S #	Name of Firm	Quoted Price	CDR No./ Date
1	M/S Abdul Hakeem Chachar.	Rs.255,228,267	CDR #10515503 dt:26.12.2016 ABL
2	M/s Agha Muhammad Khan & Co	Rs.256,361,517	CDR #17020024423 dt:23.12.2016 Mezan Bnk
3	M/S Goind Ram.	Rs.258,250,267	CDR #05899118 dt:23.12.2016 UBL

4. The Bids do not contain any overwriting or cutting.

5. The Committee shall examine all the Bids as per the qualification/eligibility criteria provided in the bidding documents and verify the documents and Bid security submitted by the Bidders (if required).

The meeting ended with the vote of thanks to and from the Chair.



**Altaf Hussain**  
Assistant Director  
Sindh Building Control Authority  
Hyderabad



**Suresh Kumar**  
Executive Engineer  
Chotiari Reservoir (I) Division  
Sanghar



**Zafiq Iqbal Khoro**  
Project Director/SE  
Chotiari Reservoir Project Circle  
Sanghar

**OFFICE OF THE EXECUTIVE ENGINEER CHOTIARI RESERVOIR (I) DIVISION @ SANGHAR**

**BID EVALUATION REPORT**

1	Name of Procuring Agency:	EXECUTIVE ENGINEER CHOTIARI RESERVOIR (I) DIVISION @ SANGHAR
2	Tender Reference Number:	Supdt:/PD/CRPC/1144, Dated: 08/12/2016
3	Tender Description:	Construction of Civil Work of Makhi Farash Link Canal Project (Chotiari Phase-II), For Water Supply to Thar Coal from RD 171+400 To 208+000, in Chotiari Reservoir (I), Division, Sanghar ( <b>Package-03</b> )
4	Method of Procurement:	Single Stage (One Envelope)
5	Tender Published:	Through SPPRA Website ( <b>SPPRA ID-2147483647</b> )
6	Total Bid Document Sold:	03 Nos.
7	Total Bid Received:	03 Nos.
8	Technical Bid Opening Date:	N/A
9	No. of Bid Technically Qualified	N/A
10	Bids Rejected	02 Nos.
11	Financial Bid opening date:	26.12.2016
12	<b>Bid Evaluation Report</b>	

S #	Name of Firm/ Bidder	Cost Offered by the Bidder	Ranking in terms of Cost	Comparison with Estimated Cost	Reason for Acceptance/Rejection	Remarks
1	M/S Goind Ram.	Rs.238,466,448	1st Lowest	14.83 % Above	Being Higher. CDR #05899117 dt:23.12.2016 UBL	Accepted
2	M/S Abdul Hakeem Chachar.	Rs.239,317,675	2 <sup>nd</sup> Lowest	15.20% Above	Being Lowest. CDR #10515506 dt:26.12.2016 ABL	Rejected
3	M/S Hafiz Rabnawaz & Co.	Rs.240,849,882	3rd Lowest	15.98% Above	Being Lowest. CDR #10515505 dt:26.12.2016 ABL	Rejected

Certified that M/S Goind Ram declared as the lowest Bidder by the committee and recommended for the sanction from competent authority. All concerned bidders are informed accordingly.



**Altaf Hussain**  
Assistant Director  
Sindh Building Control Authority  
Hyderabad



**Suresh Kumar**  
Executive Engineer  
Chotiari Reservoir (I) Division  
Sanghar



**Zafif Iqbal Khoro**  
Project Director/SE  
Chotiari Reservoir Project Circle  
Sanghar



Comparative Statement

**Name of Work: CONSTRUCTION OF CIVIL WORK OF MAKHI FARASH LINK CANAL PROJECT (CHOTIARI PHASE-II), FOR WATER SUPPLY TO THAR COAL FROM RD 171+400 TO 208+000, (HASHIM CHANIO DISTRY, HEAD REGULATOR & MFLC) IN CHOTIARI RESERVOIR (I), DIVISION, SANGHAR**

S #	Description of Work	Estimated Cost			M/S Goind Ram.		M/S Abdul Hakeem Chachar.		M/S Hafiz Rabnawaz & Co.		
		Qty	Rate	Per Unit	Amount	Rate	Amount	Rate	Amount	Rate	Amount
1	Construction of Civil Work of Makhi Farash Link Canal Project (Chotiari Phase-II), For Water Supply to Thar Coal from RD 171+400 To 208+000, in Chotiari Reservoir (I), Division, Sanghar	01	207652047	Unit	207652047	238466448	238466448	239317675	239317675	240849882	240849882
	Total Quoted/Corrected				207652047		238466448		239317675		240849882



**Altaf Hussain**  
Assistant Director  
Sindh Building Control Authority  
Hyderabad



**Suresh Kumar**  
Executive Engineer  
Chotiari Reservoir (I) Division  
Sanghar



**Zahir Iqbal Khuro**  
Project Director/SE  
Chotiari Reservoir Project Circle  
Sanghar

NIT No.SPPRA Serial No. 2147483647

Method of Procurement: Single Stage One Envelope.

Name of Work: **CONSTRUCTION OF CIVIL WORK OF MAKHI FARASH LINK CANAL PROJECT (CHOTIARI PHASE-II), FOR WATER SUPPLY TO THAR COAL FROM RD 171+400 TO 208+000, IN CHOTIARI RESERVOIR (I), DIVISION, SANGHAR**

Date of opening: 26.12.2016

**BIDDERS'ELIGIBILITY/QUALIFICATION REPORT**

Eligibility/Qualification Criteria:

S #	Eligibility/Qualification Criteria	Bidders'Name		
		M/S Goind Ram.	M/S Abdul Hakeem Chachar.	M/S Hafiz Rabnawaz & Co.
1	Registration with PEC (if appli.)	Yes	Yes	Yes
2	NTN	Yes	Yes	Yes
3	Sales Tax Registration (FBR)	Yes	Yes	Yes
4	Registration with Sindh Revenue	Yes	Yes	Yes
	Qualification Criteria			
5	Minimum 3 years' experience of relevant field	Yes	Yes	Yes
6	Turnover of at least last 3 years	Yes	Yes	Yes
7	Required Bid security is attached	Yes	Yes	Yes
8	Bid is signed, named and stamped by the authorized person of the firm along with the authorization letter.	Yes	Yes	Yes
9	Any other factor deemed to be relevant by the procuring agency subject to provision of Rule-44	N/A	N/A	N/A
10	Qualified/Disqualified	Qualified	Qualified	Qualified



**Altaf Hussain**  
Assistant Director  
Sindh Building Control Authority  
Hyderabad



**Suresh Kumar**  
Executive Engineer  
Chotiari Reservoir (I) Division  
Sanghar



**Zaffar Iqbal Khoro**  
Project Director/SE  
Chotiari Reservoir Project Circle  
Sanghar

Name of Work: **CONSTRUCTION OF CIVIL WORK OF MAKHI FARASH LINK CANAL PROJECT (CHOTIARI PHASE-II), FOR WATER SUPPLY TO THAR COAL FROM RD 171+400 TO 208+000, IN CHOTIARI RESERVOIR (I), DIVISION, SANGHAR**

**Minutes of Bid Opening Meeting**

A meeting of the procurement committee of this department was held on 26.12.2016 for opening the bid received in respect of subject NIT till deadlines of submission. The meeting was attended by all/following members of Procurement Committee and the representative of Bidders.

(Attendance sheet is enclosed)

2. Three Bidders submitted their Bids till the deadline of submission.

- 1 M/S Goind Ram.
- 2 M/S Abdul Hakeem Chachar.
- 3 M/S Hafiz Rabnawaz & Co.


3. The bids were opened at 1:00 PM in the presence of the above mentioned participants and the rates quoted by bidders were read aloud and encircled by the Chairman of Procurement Committee.

S #	Name of Firm	Quoted Price	CDR No./ Date
1	M/S Goind Ram.	Rs.238,466,448	CDR #05899117 dt:23.12.2016 UBL
2	M/S Abdul Hakeem Chachar.	Rs.239,317,675	CDR #10515506 dt:26.12.2016 ABL
3	M/S Hafiz Rabnawaz & Co.	Rs.240,849,882	CDR #10515505 dt:26.12.2016 ABL

4. The Bids do not contain any overwriting or cutting.

5. The Committee shall examine all the Bids as per the qualification/eligibility criteria provided in the bidding documents and verify the documents and Bid security submitted by the Bidders (if required).

The meeting ended with the vote of thanks to and from the Chair.

  
**Altaf Hussain**  
Assistant Director  
Sindh Building Control Authority  
Hyderabad

  
**Suresh Kumar**  
Executive Engineer  
Chotiari Reservoir (I) Division  
Sanghar

  
**Zafar Iqbal Khoro**  
Project Director/SE  
Chotiari Reservoir Project Circle  
Sanghar

**OFFICE OF THE EXECUTIVE ENGINEER CHOTIARI RESERVOIR (I) DIVISION @ SANGHAR**

**BID EVALUATION REPORT**

1	Name of Procuring Agency:	EXECUTIVE ENGINEER CHOTIARI RESERVOIR (I) DIVISION @ SANGHAR
2	Tender Reference Number:	Supdt:/PD/CRPC/1144, Dated: 08/12/2016
3	Tender Description:	Construction of Civil Work of Makhi Farash Link Canal Project (Chotiari Phase-II), For Water Supply to Thar Coal from RD 171+400 To 208+000, in Chotiari Reservoir (I), Division, Sanghar ( <b>Package-04-A</b> )
4	Method of Procurement:	Single Stage (One Envelope)
5	Tender Published:	Through SPPRA Website ( <b>SPPRA ID-2147483647</b> )
6	Total Bid Document Sold:	03 Nos.
7	Total Bid Received:	03 Nos.
8	Technical Bid Opening Date:	N/A
9	No. of Bid Technically Qualified	N/A
10	Bids Rejected	02 Nos.
11	Financial Bid opening date:	26.12.2016
12	<b>Bid Evaluation Report</b>	

S #	Name of Firm/ Bidder	Cost Offered by the Bidder	Ranking in terms of Cost	Comparison with Estimated Cost	Reason for Acceptance/Rejection	Remarks
1	M/S Haji Bashir Ahmed Soomro.	Rs.278,603,868	1st Lowest	14.87 % Above	Being Higher. CDR #0000001198 dt:23.12.2016 Faisal Bank	Accepted
2	M/S Hafiz Rabnawaz & Co.	Rs.280,385,034	2 <sup>nd</sup> Lowest	15.60% Above	Being Lowest. CDR #10515507 dt:26.12.2016 ABL	Rejected
3	M/S MDS & Company	Rs.281,498,263	3rd Lowest	16.06% Above	Being Lowest. CDR #10831953 dt:23.12.2016 ABL	Rejected

Certified that M/S Haji Bashir Ahmed Soomro declared as the lowest Bidder by the committee and recommended for the sanction from competent authority. All concerned bidders are informed accordingly.



**Altaf Hussain**  
Assistant Director  
Sindh Building Control Authority  
Hyderabad



**Suresh Kumar**  
Executive Engineer  
Chotiari Reservoir (I) Division  
Sanghar



**Zarif Iqbal Khoro**  
Project Director/SE  
Chotiari Reservoir Project Circle  
Sanghar

Comparative Statement

**Name of Work: CONSTRUCTION OF CIVIL WORK OF MAKHI FARASH LINK CANAL PROJECT (CHOTIARI PHASE-II), FOR WATER SUPPLY TO THAR COAL FROM RD 171+400 TO 208+000, IN CHOTIARI RESERVOIR (I), DIVISION, SANGHAR**

S #	Description of Work	Estimated Cost			M/S Haji Bashir Ahmed Soomro.		M/S Hafiz Rabnawaz & Co.		M/S MDS & Company		
		Qty	Rate	Per Unit	Amount	Rate	Amount	Rate	Amount	Rate	Amount
1	Construction of Civil Work of Makhi Farash Link Canal Project (Chotiari Phase-II), For Water Supply to Thar Coal from RD 171+400 To 208+000, in Chotiari Reservoir (I), Division, Sanghar	01	242535242		242535242	278603868	278603868	280385034	280385034	281498263	281498263
	Total Quoted/Corrected				242535242	278603868	278603868	280385034	280385034	281498263	281498263



**Altaf Hussain**  
Assistant Director  
Sindh Building Control Authority  
Hyderabad



**Suresh Kumar**  
Executive Engineer  
Chotiari Reservoir (I) Division  
Sanghar



**Zafar Iqbal Khoro**  
Project Director/SE  
Chotiari Reservoir Project Circle  
Sanghar

NIT No.SPPRA Serial No. 2147483647

Method of Procurement: Single Stage One Envelope.

Name of Work: **CONSTRUCTION OF CIVIL WORK OF MAKHI FARASH LINK CANAL PROJECT (CHOTIARI PHASE-II), FOR WATER SUPPLY TO THAR COAL FROM RD 171+400 TO 208+000, IN CHOTIARI RESERVOIR (I), DIVISION, SANGHAR**

Date of opening: 26.12.2016

**BIDDERS'ELIGIBILITY/QUALIFICATION REPORT**

Eligibility/Qualification Criteria:

S #	Eligibility/Qualification Criteria	Bidders'Name		
		M/S Haji Bashir Ahmed Soomro.	M/S Hafiz Rabnawaz & Co.	M/S MDS & Company
1	Registration with PEC (if appli.)	Yes	Yes	Yes
2	NTN	Yes	Yes	Yes
3	Sales Tax Registration (FBR)	Yes	Yes	Yes
4	Registration with Sindh Revenue	Yes	Yes	Yes
	Qualification Criteria			
5	Minimum 3 years' experience of relevant field	Yes	Yes	Yes
6	Turnover of at least last 3 years	Yes	Yes	Yes
7	Required Bid security is attached	Yes	Yes	Yes
8	Bid is signed, named and stamped by the authorized person of the firm along with the authorization letter.	Yes	Yes	Yes
9	Any other factor deemed to be relevant by the procuring agency subject to provision of Rule-44	N/A	N/A	N/A
10	Qualified/Disqualified	Qualified	Qualified	Qualified



**Altaf Hussain**  
Assistant Director  
Sindh Building Control Authority  
Hyderabad



**Suresh Kumar**  
Executive Engineer  
Chotiari Reservoir (I) Division  
Sanghar



**Zarif Iqbal Khoro**  
Project Director/SE  
Chotiari Reservoir Project Circle  
Sanghar

Name of Work: **CONSTRUCTION OF CIVIL WORK OF MAKHI FARASH LINK CANAL PROJECT (CHOTIARI PHASE-II), FOR WATER SUPPLY TO THAR COAL FROM RD 171+400 TO 208+000, IN CHOTIARI RESERVOIR (I), DIVISION, SANGHAR**

**Minutes of Bid Opening Meeting**

A meeting of the procurement committee of this department was held on 26.12.2016 for opening the bid received in respect of subject NIT till deadlines of submission. The meeting was attended by all/following members of Procurement Committee and the representative of Bidders.

(Attendance sheet is enclosed)

2. Three Bidders submitted their Bids till the deadline of submission.

- 1 M/S Haji Bashir Ahmed Soomro.
- 2 M/S Hafiz Rabnawaz & Co.
- 3 M/S MDS & Company

3. The bids were opened at 1:00 PM in the presence of the above mentioned participants and the rates quoted by bidders were read aloud and encircled by the Chairman of Procurement Committee.

S #	Name of Firm	Quoted Price	CDR No./ Date
1	M/S Haji Bashir Ahmed Soomro.	Rs.278,603,868	CDR #0000001198 dt:23.12.2016 Faisal Bank
2	M/S Hafiz Rabnawaz & Co.	Rs.280,385,034	CDR #10515507 dt:26.12.2016 ABL
3	M/S MDS & Company	Rs.281,498,263	CDR #10831953 dt:23.12.2016 ABL

4. The Bids do not contain any overwriting or cutting.

5. The Committee shall examine all the Bids as per the qualification/eligibility criteria provided in the bidding documents and verify the documents and Bid security submitted by the Bidders (if required).

The meeting ended with the vote of thanks to and from the Chair.

  
**Altaf Hussain**  
Assistant Director  
Sindh Building Control Authority  
Hyderabad

  
**Suresh Kumar**  
Executive Engineer  
Chotiari Reservoir (I) Division  
Sanghar

  
**Zarif Iqbal Khoro**  
Project Director/SE  
Chotiari Reservoir Project Circle  
Sanghar



**OFFICE OF THE EXECUTIVE ENGINEER CHOTIARI RESERVOIR (I) DIVISION @ SANGHAR**

**BID EVALUATION REPORT**

1	Name of Procuring Agency:	EXECUTIVE ENGINEER CHOTIARI RESERVOIR (I) DIVISION @ SANGHAR
2	Tender Reference Number:	Supdt./PD/CRPC/1144, Dated: 08/12/2016
3	Tender Description:	Construction of Civil Work of Makhi Farash Link Canal Project (Chotiari Phase-II), For Water Supply to Thar Coal from RD 171+400 To 208+000, in Chotiari Reservoir (I), Division, Sanghar ( <b>Package-04-B</b> )
4	Method of Procurement:	Single Stage (One Envelope)
5	Tender Published:	Through SPPRA Website ( <b>SPPRA ID-2147483647</b> )
6	Total Bid Document Sold:	03 Nos.
7	Total Bid Received:	03 Nos.
8	Technical Bid Opening Date:	N/A
9	No. of Bid Technically Qualified	N/A
10	Bids Rejected	02 Nos.
11	Financial Bid opening date:	26.12.2016
12	<b>Bid Evaluation Report</b>	

S #	Name of Firm/ Bidder	Cost Offered by the Bidder	Ranking in terms of Cost	Comparison with Estimated Cost	Reason for Acceptance/Rejection	Remarks
1	M/s Agha Muhammad Khan & Co	Rs.233,448,330	1st Lowest	14.51 % Above	Being Higher. CDR #17020024424 dt:23.12.2016 Mezan Bnk	Accepted
2	M/S MDS & Company	Rs.234,318,790	2 <sup>nd</sup> Lowest	14.94% Above	Being Lowest. CDR #10831952 dt:23.12.2016 ABL	Rejected
3	M/S Haji Bashir Ahmed Soomro.	Rs.235,189,250	3rd Lowest	15.37 % Above	Being Higher. CDR #0000001199 dt:23.12.2016 Faisal Bank	Rejected

Certified that M/S Agha Muhammad Khan & Co. declared as the lowest Bidder by the committee and recommended for the sanction from competent authority. All concerned bidders are informed accordingly.



**Altaf Hussain**  
Assistant Director  
Sindh Building Control Authority  
Hyderabad



**Suresh Kumar**  
Executive Engineer  
Chotiari Reservoir (I) Division  
Sanghar



**Zarif Iqbal Khoro**  
Project Director/SE  
Chotiari Reservoir Project Circle  
Sanghar

Comparative Statement

**Name of Work: CONSTRUCTION OF CIVIL WORK OF MAKHI FARASH LINK CANAL PROJECT (CHOTIARI PHASE-ID), FOR WATER SUPPLY TO THAR COAL FROM RD 145+600 TO 171+400, IN CHOTIARI RESERVOIR (D), DIVISION, SANGHAR**

S #	Description of Work	Estimated Cost			M/s Agha Muhammad Khan & Co		M/S MDS & Company		M/S Haji Bashir Ahmed Soomro.		
		Qty	Rate	Per Unit	Amount	Rate	Amount	Rate	Amount	Rate	Amount
1	Construction of Civil Work of Makhi Farash Link Canal Project (Chotiari Phase-ID), For Water Supply to Thar Coal from RD 171+400 To 208+000, in Chotiari Reservoir (I), Division, Sanghar	01	203852693		203852693	233448330	233448330	234318790	234318790	235189250	235189250
	<b>Total Quoted/Corrected</b>				<b>203852693</b>		<b>233448330</b>		<b>234318790</b>		<b>235189250</b>

  
**Altaf Hussain**  
 Assistant Director  
 Sindh Building Control Authority  
 Hyderabad

  
**Suresh Kumar**  
 Executive Engineer  
 Chotiari Reservoir (I) Division  
 Sanghar

  
**Zarif Iqbal Khoro**  
 Project Director/SE  
 Chotiari Reservoir Project Circle  
 Sanghar

NIT No.SPPRA Serial No. 2147483647

Method of Procurement: Single Stage One Envelope.

Name of Work: **CONSTRUCTION OF CIVIL WORK OF MAKHI FARASH LINK CANAL PROJECT (CHOTIARI PHASE-II), FOR WATER SUPPLY TO THAR COAL FROM RD 171+400 TO 208+000, IN CHOTIARI RESERVOIR (I), DIVISION, SANGHAR**

Date of opening: 26.12.2016


**BIDDERS'ELIGIBILITY/QUALIFICATION REPORT**

Eligibility/Qualification Criteria:


S #	Eligibility/Qualification Criteria	Bidders'Name		
		M/s Agha Muhammad Khan & Co	M/S MDS & Company	M/S Haji Bashir Ahmed Soomro.
1	Registration with PEC (if appli.)	Yes	Yes	Yes
2	NTN	Yes	Yes	Yes
3	Sales Tax Registration (FBR)	Yes	Yes	Yes
4	Registration with Sindh Revenue	Yes	Yes	Yes
	Qualification Criteria			
5	Minimum 3 years' experience of relevant field	Yes	Yes	Yes
6	Turnover of at least last 3 years	Yes	Yes	Yes
7	Required Bid security is attached	Yes	Yes	Yes
8	Bid is signed, named and stamped by the authorized person of the firm along with the authorization letter.	Yes	Yes	Yes
9	Any other factor deemed to be relevant by the procuring agency subject to provision of Rule-44	N/A	N/A	N/A
10	Qualified/Disqualified	Qualified	Qualified	Qualified



**Altaf Hussain**  
Assistant Director  
Sindh Building Control Authority  
Hyderabad



**Suresh Kumar**  
Executive Engineer  
Chotiari Reservoir (I) Division  
Sanghar



**Zarif Iqbal Khoro**  
Project Director/SE  
Chotiari Reservoir Project Circle  
Sanghar

Name of Work: **CONSTRUCTION OF CIVIL WORK OF MAKHI FARASH LINK CANAL PROJECT (CHOTIARI PHASE-II), FOR WATER SUPPLY TO THAR COAL FROM RD 171+400 TO 208+000, IN CHOTIARI RESERVOIR (I), DIVISION, SANGHAR**

**Minutes of Bid Opening Meeting**

A meeting of the procurement committee of this department was held on 26.12.2016 for opening the bid received in respect of subject NIT till deadlines of submission. The meeting was attended by all/following members of Procurement Committee and the representative of Bidders.

(Attendance sheet is enclosed)

2. Three Bidders submitted their Bids till the deadline of submission.

- 1 M/s Agha Muhammad Khan & Co
- 2 M/S MDS & Company
- 3 M/S Haji Bashir Ahmed Soomro.

3. The bids were opened at 1:00 PM in the presence of the above mentioned participants and the rates quoted by bidders were read aloud and encircled by the Chairman of Procurement Committee.

S #	Name of Firm	Quoted Price	CDR No./ Date
1	M/s Agha Muhammad Khan & Co	Rs.233,448,330	CDR #17020024424 dt:23.12.2016 Mezan Bnk
2	M/S MDS & Company	Rs.234,318,790	CDR #10831952 dt:23.12.2016 ABL
3	M/S Haji Bashir Ahmed Soomro.	Rs.235,189,250	CDR #0000001199 dt:23.12.2016 Faisal Bank

4. The Bids do not contain any overwriting or cutting.

5. The Committee shall examine all the Bids as per the qualification/eligibility criteria provided in the bidding documents and verify the documents and Bid security submitted by the Bidders (if required).

The meeting ended with the vote of thanks to and from the Chair.



**Altaf Hussain**  
Assistant Director  
Sindh Building Control Authority  
Hyderabad



**Suresh Kumar**  
Executive Engineer  
Chotiari Reservoir (I) Division  
Sanghar



**Zamil Iqbal Khoro**  
Project Director/SE  
Chotiari Reservoir Project Circle  
Sanghar

**SINDH PUBLIC PROCUREMENT REGULATORY AUTHORITY**

**CONTRACT EVALUATION FORM**

**TO BE FILLED IN BY ALL PROCURING AGENCIES FOR PUBLIC CONTRACTS OF WORKS, SERVICES & GOODS**

- 1) NAME OF THE ORGANIZATION / DEPTT. Irrigation Department
- 2) PROVINCIAL / LOCAL GOVT./ OTHER Government of Sindh
- 3) TITLE OF CONTRACT P-4B CIVIL WORKS OF MFLC FROM RD-171+400TO 208
- 4) TENDER NUMBER Supdt./PD/CRCP/1144 dated 08.12.2016
- 5) BRIEF DESCRIPTION OF CONTRACT P-4B CIVIL WORKS OF MFLC FROM RD-171+400TO 208
- 6) FORUM THAT APPROVED THE SCHEME
- 7) TENDER ESTIMATED VALUE 233,448,330/-
- 8) ENGINEER'S ESTIMATE 203,852,693/-  
(For civil works only)
- 9) ESTIMATED COMPLETION PERIOD (AS PER CONTRACT) 12 Months
- 10) TENDER OPENED ON (DATE & TIME) 26.12.2016 at 01:00 PM
- 11) NUMBER OF TENDER DOCUMENTS SOLD 03 Nos.  
(Attach list of buyers)
- 12) NUMBER OF BIDS RECEIVED 03 Nos
- 13) NUMBER OF BIDDERS PRESENT AT THE TIME OF OPENING OF BIDS 03 Nos.
- 14) BID EVALUATION REPORT Enclosed  
(Enclose a copy)
- 15) NAME AND ADDRESS OF THE SUCCESSFUL BIDDER M/S Agha Muhammad Khan & Co. Str#3 Sukkur.
- 16) CONTRACT AWARD PRICE 233,448,330/-
- 17) RANKING OF SUCCESSFUL BIDDER IN EVALUATION REPORT  
(i.e. 1<sup>st</sup>, 2<sup>nd</sup>, 3<sup>rd</sup> EVALUATION BID). 1st

18) METHOD OF PROCUREMENT USED : - (Tick one)

- a) SINGLE STAGE – ONE ENVELOPE PROCEDURE  Domestic/ Local
- b) SINGLE STAGE – TWO ENVELOPE PROCEDURE
- c) TWO STAGE BIDDING PROCEDURE
- d) TWO STAGE – TWO ENVELOPE BIDDING PROCEDURE

PLEASE SPECIFY IF ANY OTHER METHOD OF PROCUREMENT WAS ADOPTED i.e. EMERGENCY, DIRECT CONTRACTING ETC. WITH BRIEF REASONS:

COPIES INWARD  
NO: 350  
DATED: 16-01-17

19) APPROVING AUTHORITY FOR AWARD OF CONTRACT \_\_\_\_\_

20) WHETHER THE PROCUREMENT WAS INCLUDED IN ANNUAL PROCUREMENT PLAN?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

21) ADVERTISEMENT :

i) SPPRA Website  
(If yes, give date and SPPRA Identification No.)

Yes	08-12-2016 SPPRA ID: 2147483647 at Sr No. 30775
No	

ii) News Papers  
(If yes, give names of newspapers and dates)

Yes	
No	<input checked="" type="checkbox"/>

22) NATURE OF CONTRACT

Domestic / Local	<input checked="" type="checkbox"/>	Int.	<input type="checkbox"/>
------------------	-------------------------------------	------	--------------------------

23) WHETHER QUALIFICATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?  
(If yes, enclose a copy)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

24) WHETHER BID EVALUATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?  
(If yes, enclose a copy)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

25) WHETHER APPROVAL OF COMPETENT AUTHORITY WAS OBTAINED FOR USING A METHOD OTHER THAN OPEN COMPETITIVE BIDDING?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

26) WAS BID SECURITY OBTAINED FROM ALL THE BIDDERS?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

27) WHETHER THE SUCCESSFUL BID WAS LOWEST EVALUATED BID / BEST EVALUATED BID (in case of Consultancies)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

28) WHETHER THE SUCCESSFUL BIDDER WAS TECHNICALLY COMPLIANT?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

29) WHETHER NAMES OF THE BIDDERS AND THEIR QUOTED PRICES WERE READ OUT AT THE TIME OF OPENING OF BIDS?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

30) WHETHER EVALUATION REPORT GIVEN TO BIDDERS BEFORE THE AWARD OF CONTRACT?  
(Attach copy of the bid evaluation report)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

31) ANY COMPLAINTS RECEIVED  
(If yes, result thereof)

Yes	
No	✓

32) ANY DEVIATION FROM SPECIFICATIONS GIVEN IN THE TENDER NOTICE / DOCUMENT'S  
(If yes, give details)

Yes	
No	✓

33) WAS THE EXTENSION MADE IN RESPONSE TIME?  
(If yes, give reasons)

Yes	N/A
No	✓

34) DEVIATION FROM QUALIFICATION CRITERIA  
(If yes, give detailed reasons.)

Yes	
No	✓

35) WAS IT ASSURED BY THE PROCURING AGENCY THAT THE SELECTED FIRM IS NOT  
BLACK LISTED?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

36) WAS A VISIT MADE BY ANY OFFICER/OFFICIAL OF THE PROCURING AGENCY TO THE  
SUPPLIER'S PREMISES IN CONNECTION WITH THE PROCUREMENT? IF SO, DETAILS TO  
BE ASCERTAINED REGARDING FINANCING OF VISIT, IF ABROAD:  
(If yes, enclose a copy)

Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------


37) WERE PROPER SAFEGUARDS PROVIDED ON MOBILIZATION ADVANCE PAYMENT IN  
THE CONTRACT (BANK GUARANTEE ETC.)?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

38) SPECIAL CONDITIONS, IF ANY  
(If yes, give Brief Description)

Yes	
No	-

Signature & Official Stamp of  
Authorized Officer

  
Executive Engineer CRP Sanghar  
Sanjiv Kumar (I) Division  
Sanghar

FOR OFFICE USE ONLY

**SPPRA, Block. No.8, Sindh Secretariat No.4-A, Court Road, Karachi**

Tele: 021-9205356; 021-9205369 & Fax: 021-9206291

Print

Save

Reset



**OFFICE OF THE EXECUTIVE ENGINEER  
CHOTIARI RESERVOIR (I) DIVISION SANGHAR**

No. SKP/G-66/CRDS/

74

Sanghar Dated: 13/01/2017

To,

M/s Agha Muhammad Khan & Co.,  
Government Contractor,

Subject:

**WORK ORDER PACKAGE NO.4B FOR CONSTRUCTION OF CIVIL WORKS OF MAKHI FARASH LINK CANAL PROJECT (CHOTIARI PHASE-II) FOR WATER SUPPLY TO THAR COAL FROM RD-171+400 TO 208+000 IN CHOTIARI RESERVOIR (I) DIVISION SANGHAR.**

Reference: Your Bid for the subjected work on dated: 26.12.2016.

The lowest rates quoted by you for the subjected work @ Rate 25.16% Above (Twenty Five point Sixteen percent above) for amounting to Rs: 233,448,330/- have been approved by the Chief Engineer Irrigation Development Region-II Hyderabad vide No. CEI/DEV-II/WB/10 dated 02/01/2017 as received through Project Director / SE Chotiari Reservoir Project Circle Sanghar vide letter No. Supdt/PD/CRPC/22 dated 05/01/2017.

You are therefore requested to start the work within seven days of the receipt of this work order and complete the same within (12 Month) under the Supervision of Assistant Executive Engineer Chotiari Reservoir Sub-Division No.III Khipro.

The following conditions should be followed strictly.


- 1/- The execution of work shall be in accordance with the schedule of progress as provided in contract documents.
- 2/- No Expenditure is to be incurred in beyond the original Administrative Approval and available funds.
- 3/- No premium shall be allowed on Non-schedule items, if any.
- 4/- No separate payment for carriage of material shall be made.
- 5/- All materials required for construction shall be procured and brought at site by you at your own cost from approved source / quarries.
- 6/- Income tax shall be deducted from the bills as per latest orders / instructions of competent authority.
- 7/- Work will be carried out strictly as per PWD specifications.

You should also nominate your authorized agent to whom the instructions at site of work are issued.

If you are a corporate body or firm, you should submit necessary partnership deed and power of attorney in favor of someone, who is to receive cheques / materials.

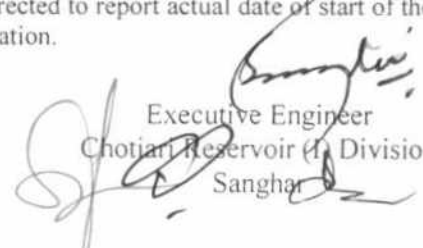
It is also believed that you have gone into the details of Contract Data before tendering for the work.

Copy of schedule 'B' is enclosed.

  
Executive Engineer  
Chotiari Reservoir (I) Division  
Sanghar

C.c.

- 1/- The Chief Engineer Irrigation Development Region-II Hyderabad for favor of his kind information.
- 2/- The Project Director / SE Chotiari Reservoir Project Circle Sanghar for favor of his kind information.
- 3/- The Director (A&F) Sindh Procurement Regulatory Authority (SPPRA) Barrack No. 8 Secretariat 4A Court Road Karachi
- 4/- The Assistant Executive Engineer Makhi / Chotiari Sub-Division No. III Khipro, along with the copy of Schedule 'B' for information. He is directed to report actual date of start of the work and ensure the execution of work according to specification.

  
Executive Engineer  
Chotiari Reservoir (I) Division  
Sanghar


## FORM OF CONTRACT AGREEMENT

THIS CONTRACT AGREEMENT (hereinafter called the —Agreement) made on the 10/01/17 day of 2017 in between Executive Engineer, Chotiari Reservoir (I), Division, Sanghar of the one part and M/S Agar Mulla & Khan Contractors (hereinafter called the "Contractor") of the other part.

WHEREAS the Procuring Agency is desirous that certain Works, viz "Makhi Farash Link Canal Project (Chotiari Phase-II), for Water Supply to Thar Coal" should be executed by the Contractor and has accepted a Bid by the Contractor for the execution and completion of such Works and the remedying of any defects therein.

NOW this Agreement witnesseth as follows:

1. In this Agreement words and expressions shall have the same meanings as are respectively assigned to them in the Conditions of Contract hereinafter referred to.
2. The following documents after incorporating addenda, if any except those parts relating to Instructions to Bidders, shall be deemed to form and be read and construed as part of this Agreement, viz:
  - (a) The Letter of Acceptance;
  - (b) The completed Form of Bid along with Schedules to Bid;
  - (c) Conditions of Contract & Contract Data;
  - (d) The priced Schedule of Prices/Bill of quantities (BoQ);
  - (e) The Specifications; and
  - (f) The Drawings
3. In consideration of the payments to be made by the Procuring Agency to the Contractor as hereinafter mentioned, the Contractor hereby covenants with the Procuring Agency to execute and complete the Works and remedy defects therein in conformity and in all respects within the provisions of the Contract.

  
AGH. AGAR MULLA & KHAN & CO  
General Contractor  
Military and Sukkur

4. The Procuring Agency hereby covenants to pay the Contractor, in consideration of the execution and completion of the Works as per provisions of the Contract, the Contract Price or such other sum as may become payable under the provisions of the Contract at the times and in the manner prescribed by the Contract.

IN WITNESS WHEREOF the parties hereto have caused this Contract Agreement to be executed on the day, month and year first before written in accordance with their respective laws.

*Rs. 23,48,330/-*

*[Signature]*  
 Signature of the Contactor  
**AGHA MOHAMMAD KHAN, CPO**  
 (Govt) Contactor  
 Military Road Sukkur HDP

*[Signature]*  
 Signature of the Procuring Agency  
 Executive Engineer  
 Cholani Reservoir (II) Division  
 (Seal) Sanghar

Signed, Sealed and Delivered in the presence of:

Witness:

Witness:

(Name, Title and Address)

(Name, Title and Address)

*[Signature]*  
 CHIEF ENGINEER  
 Irrigation Development Region-II  
 Hyderabad



No. *18* Date *16-11-27*

Issued to Mr. *[Signature]*

Address *[Signature]*

Value *7,00,000/-*

Rupees *[Signature]*

Store Depot *[Signature]*  
 Sanghar

NAME OF SCHEME CONSTRUCTION OF CIVIL WORK OF MAKHI FARASH LINK CANAL PROJECT (CHOTIARI PHASE-II), FOR WATER SUPPLY TO THAR COAL FROM RD 104+000 TO 208+000, IN CHOTIARI RESERVOIR (I), DIVISION, SANGHAR


NAME OF WORK WORK FROM RD 171+400 TO RD 208+000

Package-04-B

Position of Estimate		Position of Tender	
Schedule-B		Schedule-B	
Schedule Items	Rs. 174091984	Schedule Items	Rs. 174091984
Non-Schedule Items	Rs. 15556438	25.16% Above	43801543
Add Cartage	Rs. 14204271	Total Rs.	217893527
Total	Rs. 203852693	Add Non Schedule Item	Rs. 15556438
		Amount of Tender Cost	Rs. 233448330

$$\frac{\text{T.C - Estimate Cost} \times 100}{\text{Estimate Cost}}$$

$$\frac{233448330 - 203852693 \times 100}{203852693} = 14.51\%$$


  
 Assistant Director  
 Chotiari Reservoir (I) Division  
 Sanghar

  
 ASSISTNAT DIRECTOR  
 Sindh Building Control Authority  
 Hyderabad

  
 EXECUTIVE ENGINEER  
 Chotiari Reservoir (I) Division  
 Sanghar

  
 PROJECT DIRECTOR/SE  
 Chotiari Reservoir Project Circle  
 Sanghar

*As recommended by procurement committee the lowest bid is quoted by M/s Agha Mahmood Khan & Co 14.51% above the estimated cost is hereby approved.*

  
 CHIEF ENGINEER  
 Irrigation Development Region-II  
 Hyderabad.

## PACKAGE IV-B

### Bill No.1 Earth work of MFLC from RD 197+000 to 208+000

Sr. No.	Description of Items	Unit	Quantity	Rate	Amount (Rs.)
1	Jungle clearance and removing within 100ft (light) Provisional Quantity (page NO.100 item No.4 (a) from SCR 2012	%0 Sft	2,712,500	75.63	205,146
2	Ploughing (3 Times) (P-109/i-41)	P Acre	75	1,769.63	132,235
3	Earth work excavation in irrigation channels drains etc. Dressed to design section grades and profiles excavated material disposed off and dressed within 50ft lead (page 1, item No.5)	%0 Cft	979,317	2,420.00	2,369,947
4	Rehandling of earth work (b) Upto 50' (page No.2 item No.9(b). 3 leads = 3 X 1058.75 = 3176.25	%0 Cft	979,317	3,176.25	3,110,556
5	Extra for wet earth Provisional Quantity (page No.4, item No.15)	%0 Cft	195,863	1,058.75	207,370
6	Borrow pit excavation undressed lead upto 100ft (a) ordinary soil, (page No.1, item 3a)	%0 Cft	10,227,443	2,117.50	21,656,611
7	Carriage of 100 cft/5 tons of all materials like stone, aggregate. Spawl, coal, lime, surki etc B.G rail fastening points and crossing bridge girders. Pipes sheets rail, MS bars etc or 1000 Nos. bricks 10"x5"x3" or 1000 Nos. tiles 12"x6"x2" or 150 cft timber 100 moulds of fuel wood by truck or any other means owned by the contractor 1 miles. (Page No. 1/1-1 schedule of carriage)	% Cft	8181954.32	407	33,300,554
8	Extra for every 50ft additional lead or part thereof. (a) For earth work (soft, ordinary, hard and v.hard) item No.8(a) page No.2 (3 Leads 100.78*3=302.34)	%0 Cft	2,045,489	302.34	618,433
9	Earth work compaction soft ordinary hard soil (b) laying earth work in 6" layers leveling dressing & watering for compaction etc complete. (page No.4, item No.13(b))	%0 Cft	11,206,760	354.00	3,967,193
10	Earth work compaction by sheep feet roller and power roller with optimum moisture content (a) for 85 modified AASHO density (Page No. 2 item 7c highways schedule)	%0 Cft	11,206,760	1,445.58	16,200,268
				<b>TOTAL</b>	<b>81,768,313</b>

PACKAGE IV-B

Bill No.2 CROSS AND HEAD REGULATOR OF DHILYAR DISTRY AT RD 208+000 MFLC

S. No.	ITEM	UNIT	QUANTITY	RATE	AMOUNT
1	Borrow pit excavation undressed lead upto 100ft (a) ordinary soil, (page No.1, item 3a)	% Cft	199,680.00	2,117.50	422822
	Carriage of 100 cft/5 tons of all materials like stone, aggregate. Spawl, coal, lime, surki etc B.G rail fasteningpoints and crossing bridge girders.Pipes sheets rail, MS bars etc or 1000 Nos.bricks 10"x5"x3" or 1000 Nos. tiles 12"x6"x2" or 150 cft timber 100 moulds of fuel wood by truck or any other means owned by the contractor 1 miles. (Page No. 1/1-1 schedule of carriage)	% Cft	199,680.00	407.00	812698
2	Dressing and leveling of earth work to designed section etcx complete. (b) ordinary or hard soil. P-3 item/11b	% Cft	199,680.00	187.55	37450
3	Earth work excavation in irrigation channels drains etc. Dressed o design section grades and profiles excavated material disposed off & dressed within in 50ft lead (a) Ordinary soil (1/5 (a) P-1)	% Cft	120,000.00	2,420.00	290400
4	Excavation in foundation of buildings, bridges and other structures i/c dagbelling, dressing, refilling around the structure with excavated earth watering and ramming lead upto one chain and lift upto 5ft (In ordinary soil) (1/18 (b) P-4)	% Cft	145,742.38	3,176.25	462914
5	Extra for wet earth work (1/15 P-3)	% Cft	132,871.19	1,058.75	140677
6	Re-handling of earth work. (Extra two leads ) (1/9 (b) P-2).	% Cft	265,742.38	2,117.50	562709
7	Preparing watering and ramming surface for laying concrete (for head works only),(4/18 P-17)				
	(a) Horizontal Floor X-Regulator and Head Regulator	% Sft	9,577.00	228.09	21844
	(b) Glacis & crest X-Regulator and Head Regulator	% Sft	4,070.00	347.88	14159
	(c) Inverted filter X-Regulator and Head Regulator	% Sft	3,327.00	105.88	3523
8	C.C plain including placing, compacting, finishing and curing complete (including screening and washing of stone aggregate without shuttering). Ratio 1:4:8 (4/5 (i) P-15)	% Cft	5,081.79	11288.75	573670
9	Cement concrete plain including placing compacting finishing and curing complete (including screening and washing at stone agregate without ratio 1:2:4 (5(f), P-16)	% Cft	1,670.25	14429.25	241005
10	Erection and removal of centering for RCC or plain cement concrete works of Partal wood (2nd-class). (P-17/4-19 b ii).	% Sft	1,441.00	3127.41	45066
11	Precast cement concrete soild or face block (1:2:4) i/c cost of templates (4/9 P-16)	P.Cft	7440.00	146.06	1086686
12	Erecting and fixing in position precast cement concrete or stone slab in roof or lintels etc. lift: upto 20ft i/c all charge (4/6 (c) P-16)	P.Cft	7440.00	41.77	310769
13	Reinforced cement concrete work in all labour and material except the cost of steel reinforcement and its labour for bending and binding which will be paid seperately. This rate also i/c all kinds of forms, moulds, lifting, shuttering, curing, rendering and finishing the exposed surface. (i/c screening and washing of shingle).	P.Cft	102,151.24	349	35650783
	(a) RCC work in roof slabs, beams, columns, rafts, lintels and other structural members laid in situ or pre-cast laid in position complete in all respects.				
14	Fabrication of mild steel reinforcement for cement concrete ilc cutting, bending, laying in position, Making joints 2nd fastenings ilc cost of binding wire. (also includes removal of rust from bars) (b) using deformed bars Grade 60. (4/8 (b) P-16)	P.Cwt	6384.45	5001.7	31933116



**PACKAGE IV-B**

**Bill No.2 CROSS AND HEAD REGULATOR OF DHILYAR DISTRY AT RD 208+000 MFLC**

S. No.	ITEM	UNIT	QUANTITY	RATE	AMOUNT
16	Providing expansion joints in concrete work of 9" wide corugated PVC waterstop (with bulb) i.c soldering cost of material and labour etc complete. (R. Miscellaneous B.Expantion and Construction joints item no 1 P.No.56 PHE).	P.Rft	383.00	86	32938
17	Stone pitching including sub base with hammer dressed stone on surface laid in course i/c carriage of material within three chains lead. (6/23 P-30)	% Cft	20,500.00	5377.63	1102414
18	Stone filling dry hand packed as filling behind retaining walls or in pitching and aprons.(6/16, P-30)	% Cft	64,709.00	2684	1736790
19	Boring for tube well in all water bearing soils from ground level up to 100 ft. or 30.50 meter depth i/c sinking and with drawing of casing pipe (e) 200 mm (8" dia) i/c Head Regulator of Haji Jan Muhammad Hingorjo-II Distry. (S.I No.1 (e) P.No.41 PHE)	P/Rft	1750	535	936250
20	Supplying and Fixing M.S Bail plug i/c Head Regulator of Haji Jan Muhammad Hingorjo-II Distry.(S.I No.8b P.No.43 PHE)	No	25	2607	65175
21	Supplying & fixing local make coir strainers of approved quality complete (b) for 150mm (6" dia). i/c Head Regulator of Haji Jan Muhammad Hingorjo-II Distry. (S.I No.10 (b) P.No.44 PHE)	P.Rft	750	647	485250
22	Supplying and installing M.S blind pipe 3/16" (5mm) thick of best and approved quality and make i/c necessary socket etc complete. i/c Head Regulator of Haji Jan Muhammad Hingorjo-II Distry. (S.I No.11 (b) P.No.44 PHE)	P.Rft	1000	762.5	762500
23	Full hire charges of the pumping set per day inclusive of the wage of driver and asistant fuel or electric energy plate froms required for plcing pumps etc at lower depths with suction and delivery pipes for pumping out water found at various depth from trenches i/c the cost of erection and dismantling after completion of the job (iii) Hire charges of pumping set of upto10 HP pumping out water i/c Head Regulator of Haji Jan Muhammad Hingorjo-II Distry. (S.I No.23 (ii) P.No.77 PHE).	P.Days	2250	2500	5625000
24	Note:- For working the pump beyond 8 hours the following payment shall be made. The hire of the pumping set itselt being for 24 hours.(i) For Pumping set of upto P-Hour 10 H.Pi/c Head Regulator of Haji Jan Muhammad Hingorjo-II Distry.(S.I No.23 (i) P.No.77 PHE).	P.Hours	36000	250	9000000
25	Designing fabrication manufacturing and erection of radial gates of MS Sheet 8 min, girders, channel angles of required size with operational device viz trusses such beams winches steel wire rope platform etc paining oil 1g i/c cartage of fabricated manufactured component from to site of work etc., complete with one floor warranty period of operation.	P.Sft	900.00	16875	15187500
26	Designing fabrication /manufacturing & erection of double screw vertical gate of MS sheets 8mm, girders, channel angles of required size with operational device and platform etc painting only i/c cartage of fabricated / manufactured components from W/shop to site of work etc complete with one year period of operation (Market Rate).	P.Sft	16.00	21000	336000
				<b>TOTAL</b>	<b>107880109</b>



PACKAGE IV-B

Bill No.2 CROSS AND HEAD REGULATOR OF DHILYAR DISTRY AT RD 208+000 MFLC

S. No.	ITEM	UNIT	QUANTITY	RATE	AMOUNT
1	Borrow pit excavation undressed lead upto 100ft (a) ordinary soil, (page No.1, item 3a)	% Cft	199,680.00	2,117.50	422822
	Carriage of 100 cft/5 tons of all materials like stone, aggregate. Spawl, coal, lime, surki etc B.G rail fasteningpoints and crossing bridge girders.Pipes sheets rail, MS bars etc or 1000 Nos.bricks 10"x5"x3" or 1000 Nos. tiles 12"x6"x2" or 150 cft timber 100 moulds of fuel wood by truck or any other means owned by the contractor 1 milles. (Page No. 1/1-1 schedule of carriage)	% Cft	199,680.00	407.00	812698
2	Dressing and leveling of earth work to designed section etxc complete. (b) ordinary or hard soil. P-3 Item/11b	% Cft	199,680.00	187.55	37450
4	Earth work excavation in irrigation channels drains etc. Dressed o design section grades and profiles excavated material disposed off & dressed within in 50ft lead (a) Ordinary soil (1/5 (a) P-1)	% Cft	120,000.00	2,420.00	290400
5	Excavation in foundation of buildings, bridges and other structures i/c dagbelling, dressing, refilling around the structure with excavated earth watering and ramming lead upto one chain and lift upto 5ft (In ordinary soil) (1/18 (b) P-4)	% Cft	145,742.38	3,176.25	462914
6	Extra for wet earth work (1/15 P-3)	% Cft	132,871.19	1,058.75	140677
7	Re-handling of earth work. (Extra two leads ) (1/9 (b) P-2).	% Cft	265,742.38	2,117.50	562709
8	Preparing watering and ramming surface for laying concrete (for head works only),(4/18 P-17)				
	(a) Horizontal Floor X-Regulator and Head Regulator	% Sft	9,577.00	228.09	21844
	(b) Glacis & crest X-Regulator and Head Regulator	% Sft	4,070.00	347.88	14159
	(c) Inverted filter X-Regulator and Head Regulator	% Sft	3,327.00	105.88	3523
9	C.C plain including placing, compacting, finishing and curing complete (including screening and washing of stone aggregate without shuttering). Ratio 1:4:8 (4/5 (I) P-15)	% Cft	5,081.79	11288.75	573670
10	Cement concrete plain including placing compacting finishing and curing complete (including screening and washing at stone agregate without ratio 1:2:4 (5(f), P-16)	% Cft	1,670.25	14429.25	241005
11	Erection and removal of centering for RCC or plain cement concrete works of Partal wood (2nd-class). (P-17/4-19 b ii).	% Sft	1,441.00	3127.41	45066
12	Precast cement concrete soild or face block (1:2:4) i/c cost of templates (4/9 P-16)	P.Cft	7440.00	146.06	1086686
13	Erecting and fixing in position precast cement concrete or stone slab in roof or lintels etc. lift: upto 20ft i/c all charge (4/6 (c) P-16)	P.Cft	7440.00	41.77	310769
14	Reinforced cement concrete work in all labour and material except the cost of steel reinforcement and its labour for bending and binding which will be paid seperately. This rate also i/c all kinds of forms, moulds, lifting, shuttering, curing, rendering and finishing the exposed surface. (i/c screening and washing of shingle). (a) RCC work in roof slabs, beams, columns, rafts, lintels and other structural members laid in situ or pre-cast laid in position complete in all respects.	P.Cft	102,151.24	349	35650783
15	Fabrication of mild steel reinforcement for cement concrete ilc cutting, bending, laying in position, Making joints 2nd fastenings ilc cost of binding wire. (also includes removal of rust from bars) (b) using deformed bars Grade 60. (4/8 (b) P-16)	P.Cwt	6384.45	5001.7	31933116

**PACKAGE IV-B**

**Bill No.2 CROSS AND HEAD REGULATOR OF DHILYAR DISTRY AT RD 208+000 MFLC**

S. No.	ITEM	UNIT	QUANTITY	RATE	AMOUNT
16	Providing expansion joints in concrete work of 9" wide corugated PVC waterstop (with bulb) i.c soldering cost of material and labour etc complete. (R. Miscellaneous B.Expantion and Construction joints item no 1 P.No.56 PHE).	P.Rft	383.00	86	32938
17	Stone pitching including sub base with hammer dressed stone on surface laid in course i/c carriage of material within three chains lead. (6/23 P-30)	% Cft	20,500.00	5377.63	1102414
18	Stone filling dry hand packed as filling behind retaining walls or in pitching and aprons.(6/16, P-30)	% Cft	64,709.00	2684	1736790
19	Boring for tube well in all water bearing soils from ground level up to 100 ft. or 30.50 meter depth i/c sinking and with drawing of casing pipe (e) 200 mm (8" dia) i/c Head Regulator of Haji Jan Muhammad Hingorjo-II Distry. (S.I No.1 (e) P.No.41 PHF)	P/Rft	1750	535	936250
20	Supplying and Fixing M.S Ball plug i/c Head Regulator of Haji Jan Muhammad Hingorjo-II Distry.(S.I No.8b P.No.43 PHE)	No	25	2607	65175
21	Supplying & fixing local make coir strainers of approved quality complete (b) for 150mm (6" dia). i/c Head Regulator of Haji Jan Muhammad Hingorjo-II Distry. (S.I No.10 (b) P.No.44 PHE)	P.Rft	750	647	485250
22	Supplying and installing M.S blind pipe 3/16" (5mm) thick of best and approved quality and make i/c necessary socket etc complete. i/c Head Regulator of Haji Jan Muhammad Hingorjo-II Distry. (S.I No.11 (b) P.No.44 PHE)	P.Rft	1000	762.5	762500
23	Full hire charges of the pumping set per day inclusive of the wage of driver and asistant fuel or electric energy plate froms required for placing pumps etc at lower depths with suction and delivery pipes for pumping out water found at various depth from trenches i/c the cost of erection and dismantling after completion of the job (iii) Hire charges of pumping set of upto10 HP pumping out water i/c Head Regulator of Haji Jan Muhammad Hingorjo-II Distry. (S.I No.23 (ii) P.No.77 PHE).	P.Days	2250	2500	5625000
24	Note:- For working the pump beyond 8 hours the following payment shall be made. The hire of the pumping set itselt being for 24 hours.(i) For Pumping set of upto P-Hour 10 H.Pi/c Head Regulator of Haji Jan Muhammad Hingorjo-II Distry.(S.I No.23 (i) P.No.77 PHE).	P.Hours	36000	250	9000000
25	Designing fabrication manufacturing and erection of radial gates of MS Sheet 8 min, girders, channel angles of required size with operational device viz trusses such beams winches steel wire rope platform etc paining oil 1g i/c cartage of fabricated manufactured component from to site of work etc., complete with one floor warranty period of operation.	P.Sft	900.00	16875	15187500
26	Deslgnig fabrication /manufacturing & erection of double screw vertical gate of MS sheets 8mm, girders, channel angles of required size with operational device and platform etc painting only i/c cartage of fabricated / manufactured components from W/shop to site of work etc complete with one year period of operation (Market Rate).	P.Sft	16.00	21000	336000
<b>TOTAL</b>					<b>107880109</b>

Name of  
Scheme:-

**MAKHI FARASH LINK CANAL PROJECT (CHOTIARI PHASE-II )  
FOR WATER SUPPLY TO THAR COAL**

Name of  
Work:-

**PACKAGE IV-B: WORKS FROM RD 171+400 TO 208+000  
(MFLC, KAKAHU ESCAPE HEAD REGULATOR),  
IN CHOTIARI RESERVOIR (I), DIVISION, SANGHAR**

Bill No.	Description	Amount (Rs)
1	Earth work of MFLC from RD 190+000 to 208+000	81,768,313
2	CROSS AND HEAD REGULATOR OF DHILYAR DISTRY AT RD 208+000 MFLC	107,880,109
<b>Total</b>		<b>189,648,422</b>

(INTEGRITY PACT)  
DECLARATION OF FEES, COMMISSION AND BROKERAGE ETC  
PAYABLE BY CONTRACTORS  
(FOR CONTRACTS WORTH RS. 10.00 MILLION OR MORE)

Contract No. B/S/SH/CA/1144 Dated 8/12/2016

Contract Value: 233448330/

Contract Title: CONSTRUCTION OF CIVIL WORK OF MAKHI FARASH LINK CANAL PROJECT (CHOTIARI PHASE-II), FOR WATER SUPPLY TO THAR COAL FROM RD 171+400 TO 208+000, IN CHOTIARI RESERVOIR (I), DIVISION, SANGHAR

M/s: Agha Muhamad Khan hereby declares that it has not obtained or induced the procurement of any contract, right, interest, privilege or other obligation or benefit from Government of Sindh (GoS) or any administrative subdivision or agency thereof or any other entity owned or controlled by it (GoS) through any corrupt business practice.

Without limiting the generality of the foregoing, M/s: Agha Muhammed Khan represents and warrants that it has fully declared the brokerage, commission, fees etc. paid or payable to anyone and not given or agreed to give and shall not give or agree to give to anyone within or outside Pakistan either directly or indirectly through any natural or juridical person, including its affiliate, agent, associate, broker, consultant, director, promoter, shareholder, sponsor or subsidiary, any commission, gratification, bribe, finder's fee or kickback, whether described as consultation fee or otherwise, with the object of obtaining or inducing the procurement of a contract, right, interest, privilege or other obligation or benefit in whatsoever form from, from Procuring Agency (PA) except that which has been expressly declared pursuant hereto.

M/s: Agha Muhammad Khan accepts full responsibility and strict liability that it has made and will make full disclosure of all agreements and arrangements with all persons in respect of, or related to the transaction with PA and has not taken any action or will not take any action to circumvent the above declaration, representation or warranty.

M/s. Agha Muhammed Khan accepts full responsibility and strict liability for making any false declaration, not making full disclosure, misrepresenting facts or taking any action likely to

defeat the purpose of this declaration, representation and warranty. It agrees that any contract, right, interest, privilege or other obligation or benefit obtained or procured as aforesaid shall, without prejudice to any other rights and remedies available to PA under any law, contract or other instrument, be voidable at the option of PA.

Notwithstanding any rights and remedies exercised by PA in this regard,

M/s: Ashq Muhammad Khan..... agrees

to indemnify PA for any loss or damage incurred by it on account of its corrupt business practices and further pay compensation to PA in an amount equivalent to ten times the sum of any commission, gratification, bribe, finder's fee

or kickback given by M/s: Ashq Muhammad Khan.....

as aforesaid for the purpose of obtaining or inducing the procurement of any contract, right, interest, privilege or other obligation or benefit in whatsoever form from PA.

Executive Engineer,  
Chotiari Reservoir (I) Division,  
Sanghar

[Procuring Agency]

*india*  
[Contractor]  
**AGHA MOHAMMAD KHAN & CO**  
Govt. Contractor  
Military Road Sukkur

**SINDH PUBLIC PROCUREMENT REGULATORY AUTHORITY**

**CONTRACT EVALUATION FORM**

**TO BE FILLED IN BY ALL PROCURING AGENCIES FOR PUBLIC CONTRACTS OF WORKS, SERVICES & GOODS**

- 1) NAME OF THE ORGANIZATION / DEPTT. Irrigation Department
- 2) PROVINCIAL / LOCAL GOVT./ OTHER Government of Sindh
- 3) TITLE OF CONTRACT P-1 CIVIL WORKS OF MFLC FROM RD-104 TO 145+600
- 4) TENDER NUMBER Supdt./PD/CRCP/1144 dated 08.12.2016
- 5) BRIEF DESCRIPTION OF CONTRACT P-1 CIVIL WORKS OF MFLC FROM RD-104 TO 145+600
- 6) FORUM THAT APPROVED THE SCHEME \_\_\_\_\_
- 7) TENDER ESTIMATED VALUE 293,471,766/-
- 8) ENGINEER'S ESTIMATE 255,717,143/-  
(For civil works only)
- 9) ESTIMATED COMPLETION PERIOD (AS PER CONTRACT) 12 Months
- 10) TENDER OPENED ON (DATE & TIME) 26.12.2016 at 01:00 PM
- 11) NUMBER OF TENDER DOCUMENTS SOLD 03 Nos.  
(Attach list of buyers)
- 12) NUMBER OF BIDS RECEIVED 03 Nos.
- 13) NUMBER OF BIDDERS PRESENT AT THE TIME OF OPENING OF BIDS 03 Nos.
- 14) BID EVALUATION REPORT Enclosed  
(Enclose a copy)
- 15) NAME AND ADDRESS OF THE SUCCESSFUL BIDDER M/S Hafiz Rabnawaz A-1 Faraz Vilas Hyderabad.
- 16) CONTRACT AWARD PRICE 293,471,766/-
- 17) RANKING OF SUCCESSFUL BIDDER IN EVALUATION REPORT  
(i.e. 1<sup>st</sup>, 2<sup>nd</sup>, 3<sup>rd</sup> EVALUATION BID). 1st

18) METHOD OF PROCUREMENT USED :- (Tick one)

- a) SINGLE STAGE - ONE ENVELOPE PROCEDURE:   Domestic/ Local
- b) SINGLE STAGE - TWO ENVELOPE PROCEDURE:  -
- c) TWO STAGE BIDDING PROCEDURE  -
- d) TWO STAGE - TWO ENVELOPE BIDDING PROCEDURE  -

PLEASE SPECIFY IF ANY OTHER METHOD OF PROCUREMENT WAS ADOPTED i.e. EMERGENCY, DIRECT CONTRACTING ETC WITH BRIEF REASONS

NO: 353  
DATED 16-01-17

19) APPROVING AUTHORITY FOR AWARD OF CONTRACT \_\_\_\_\_

20) WHETHER THE PROCUREMENT WAS INCLUDED IN ANNUAL PROCUREMENT PLAN?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

21) ADVERTISEMENT :

i) SPPRA Website  
(If yes, give date and SPPRA Identification No.)

Yes	08-12-2016 SPPRA ID: 2147483647 at Sr No. 30775
No	

ii) News Papers  
(If yes, give names of newspapers and dates)

Yes	
No	<input checked="" type="checkbox"/>

22) NATURE OF CONTRACT

Domestic / Local	<input checked="" type="checkbox"/>	Int.	<input type="checkbox"/>
------------------	-------------------------------------	------	--------------------------

23) WHETHER QUALIFICATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?  
(If yes, enclose a copy)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

24) WHETHER BID EVALUATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?  
(If yes, enclose a copy)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

25) WHETHER APPROVAL OF COMPETENT AUTHORITY WAS OBTAINED FOR USING A METHOD OTHER THAN OPEN COMPETITIVE BIDDING?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

26) WAS BID SECURITY OBTAINED FROM ALL THE BIDDERS?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

27) WHETHER THE SUCCESSFUL BID WAS LOWEST EVALUATED BID / BEST EVALUATED BID (in case of Consultancies)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

28) WHETHER THE SUCCESSFUL BIDDER WAS TECHNICALLY COMPLIANT?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

29) WHETHER NAMES OF THE BIDDERS AND THEIR QUOTED PRICES WERE READ OUT AT THE TIME OF OPENING OF BIDS?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

30) WHETHER EVALUATION REPORT GIVEN TO BIDDERS BEFORE THE AWARD OF CONTRACT?  
(Attach copy of the bid evaluation report)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------



31) ANY COMPLAINTS RECEIVED  
(If yes, result thereof)

Yes	
No	✓

32) ANY DEVIATION FROM SPECIFICATIONS GIVEN IN THE TENDER NOTICE / DOCUMENTS  
(If yes, give details)

Yes	
No	✓

33) WAS THE EXTENSION MADE IN RESPONSE TIME?  
(If yes, give reasons)

Yes	N/A
No	✓

34) DEVIATION FROM QUALIFICATION CRITERIA  
(If yes, give detailed reasons.)

Yes	
No	✓

35) WAS IT ASSURED BY THE PROCURING AGENCY THAT THE SELECTED FIRM IS NOT  
BLACK LISTED?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

36) WAS A VISIT MADE BY ANY OFFICER/OFFICIAL OF THE PROCURING AGENCY TO THE  
SUPPLIER'S PREMISES IN CONNECTION WITH THE PROCUREMENT? IF SO, DETAILS TO  
BE ASCERTAINED REGARDING FINANCING OF VISIT, IF ABROAD:  
(If yes, enclose a copy)

Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------


37) WERE PROPER SAFEGUARDS PROVIDED ON MOBILIZATION ADVANCE PAYMENT IN  
THE CONTRACT (BANK GUARANTEE ETC.?)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

38) SPECIAL CONDITIONS, IF ANY  
(If yes, give Brief Description)

Yes	
No	-

Signature & Official Stamp of  
Authorized Officer

  
Executive Engineer CRD Sanghar  
Chouari Reservoir (I) Division  
Sanghar

FOR OFFICE USE ONLY

SPPRA, Block. No.8, Sindh Secretariat No.4-A, Court Road, Karachi

Tele: 021-9205356; 021-9205369 & Fax: 021-9206291

Print

Save

Reset

# OFFICE OF THE EXECUTIVE ENGINEER CHOTIARI RESERVOIR (I) DIVISION SANGHAR

No. SKP/G-66/CRDS/

70

Sanghar Dated:

13/01/2017

To,

M/s Hafiz Rabnawaz & Co,  
Government Contractor,

Subject:

WORK ORDER PACKAGE NO.1 FOR CONSTRUCTION OF CIVIL WORKS OF  
MAKHI FARASH LINK CANAL PROJECT (CHOTIARI PHASE-II) FOR WATER  
SUPPLY TO THAR COAL FROM RD-104+000 TO 145+600 IN CHOTIARI  
RESERVOIR (I) DIVISION SANGHAR.

Reference: Your Bid for the subjected work on dated: 26.12.2016.

The lowest rates quoted by you for the subjected work @ Rate 39.32% Above (Thirty Nine point Thirty Two percent above) for amounting to Rs: 293,471,766/- have been approved by the Chief Engineer Irrigation Development Region-II Hyderabad vide No. CEI/DEV-II/WB/06 dated 02/01/2017 as received through Project Director / SE Chotiari Reservoir Project Circle Sanghar vide letter No. Supdt/PD/CRPC/18 dated 05/01/2017.

You are therefore requested to start the work within seven days of the receipt of this work order and complete the same within (12 Month) under the Supervision of Assistant Executive Engineer (On Assignment) Chotiari Reservoir (I) Division Sanghar.

The following conditions should be followed strictly.

- 1/- The execution of work shall be in accordance with the schedule of progress as provided in contract documents.
- 2/- No Expenditure is to be incurred in beyond the original Administrative Approval and available funds.
- 3/- No premium shall be allowed on Non-schedule items, if any.
- 4/- No separate payment for carriage of material shall be made.
- 5/- All materials required for construction shall be procured and brought at site by you at your own cost from approved source / quarries.
- 6/- Income tax shall be deducted from the bills as per latest orders / instructions of competent authority.
- 7/- Work will be carried out strictly as per PWD specifications.

You should also nominate your authorized agent to whom the instructions at site of work are issued.

If you are a corporate body or firm, you should submit necessary partnership deed and power of attorney in favor of someone, who is to receive cheques / materials.


It is also believed that you have gone into the details of Contract Data before tendering for the work.

Copy of schedule 'B' is enclosed.

  
Executive Engineer  
Chotiari Reservoir (I) Division  
Sanghar

C.c.

- 1/- The Chief Engineer Irrigation Development Region-II Hyderabad for favor of his kind information.
- 2/- The Project Director / SE Chotiari Reservoir Project Circle Sanghar for favor of his kind information.
- ✓ 3/- The Director (A&F) Sindh Procurement Regulatory Authority (SPPRA) Barrack No. 8 Secretariat 4A Court Road Karachi
- 4/- The Assistant Executive Engineer (OA) Chotiari Reservoir (I) Division Sanghar, along with the copy of Schedule 'B' for information. He is directed to report actual date of start of the work and ensure the execution of work according to specification.

  
Executive Engineer  
Chotiari Reservoir (I) Division  
Sanghar


## FORM OF CONTRACT AGREEMENT

THIS CONTRACT AGREEMENT (hereinafter called the —Agreement) made on the 10/01/17 day of ~~2017~~ in between Executive Engineer, Chotiari Reservoir (I), Division, Sanghar of the one part and M/S Hajji Rob Nawaz Chadw (hereinafter called the "Contractor") of the other part. M/S Hajji Rob Nawaz.

WHEREAS the Procuring Agency is desirous that certain Works, viz "Makhi Farash Link Canal Project (Chotiari Phase-II), for Water Supply to Thar Coal" should be executed by the Contractor and has accepted a Bid by the Contractor for the execution and completion of such Works and the remedying of any defects therein.


NOW this Agreement witnesseth as follows:


1. In this Agreement words and expressions shall have the same meanings as are respectively assigned to them in the Conditions of Contract hereinafter referred to.
2. The following documents after incorporating addenda, if any except those parts relating to Instructions to Bidders, shall be deemed to form and be read and construed as part of this Agreement, viz:
  - (a) The Letter of Acceptance;
  - (b) The completed Form of Bid along with Schedules to Bid;
  - (c) Conditions of Contract & Contract Data;
  - (d) The priced Schedule of Prices/Bill of quantities (BoQ);
  - (e) The Specifications; and
  - (f) The Drawings
3. In consideration of the payments to be made by the Procuring Agency to the Contractor as hereinafter mentioned, the Contractor hereby covenants with the Procuring Agency to execute and complete the Works and remedy defects therein in conformity and in all respects within the provisions of the Contract.



4. The Procuring Agency hereby covenants to pay the Contractor, in consideration of the execution and completion of the Works as per provisions of the Contract, the Contract Price or such other sum as may become payable under the provisions of the Contract at the times and in the manner prescribed by the Contract.

IN WITNESS WHEREOF the parties hereto have caused this Contract Agreement to be executed on the day, month and year first before written in accordance with their respective laws.

  
 Signature of the Contactor  
 \_\_\_\_\_  
 (Seal)

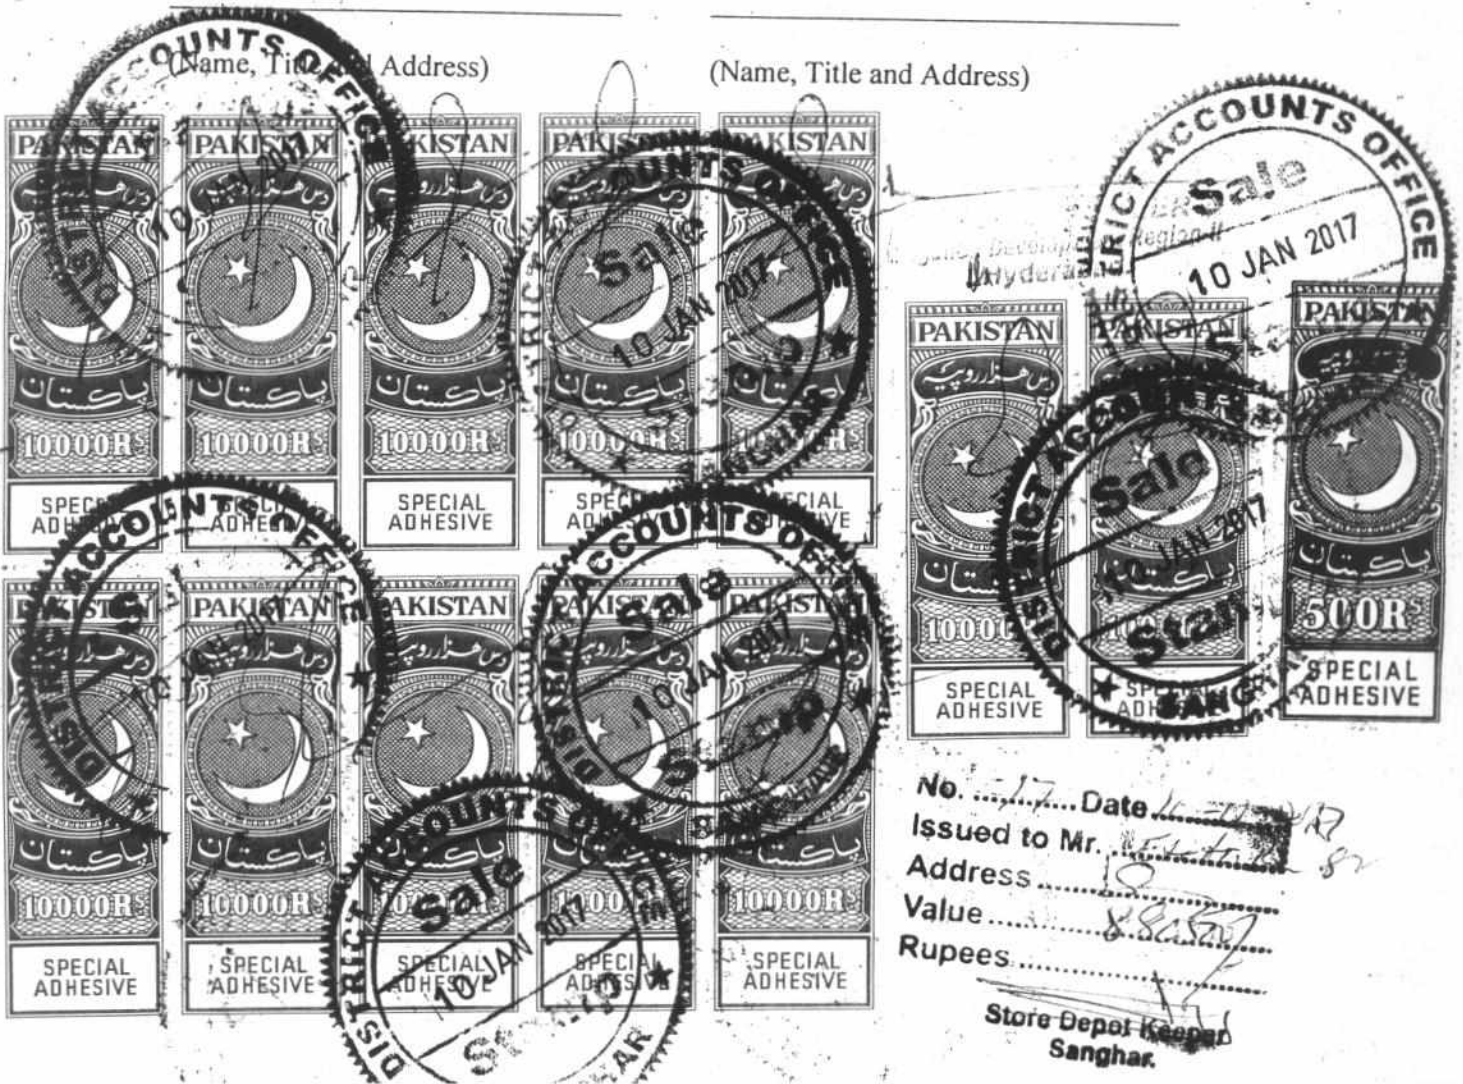
*Recommended Rs 283471766/2*  
  
 Signature of the Procuring Agency  
 \_\_\_\_\_  
 (Seal)

Signed, Sealed and Delivered in the presence of:

Witness:

Witness:

(Name, Title and Address) \_\_\_\_\_ (Name, Title and Address) \_\_\_\_\_



No. 17 Date 10 JAN 2017  
 Issued to Mr. \_\_\_\_\_  
 Address \_\_\_\_\_  
 Value 880000  
 Rupees \_\_\_\_\_  
 Store Dept. Keeper  
 Sanghar.

NAME OF SCHEME CONSTRUCTION OF CIVIL WORK OF MAKHI FARASH LINK CANAL PROJECT (CHOTIARI PHASE-II),  
FOR WATER SUPPLY TO THAR COAL FROM RD 104+000 TO 208+000, IN CHOTIARI RESERVOIR (I),  
DIVISION, SANGHAR

NAME OF WORK WORK FROM RD 104+000 TO RD 145+600

Package-01

Position of Estimate		Position of Tender	
Schedule-B		Schedule-B	
Schedule Items	Rs. 209747904	Schedule Items	Rs. 209747904
Non-Schedule Items	Rs. 1255794	39.32% Above	82472876 ✓
Old Cartage	Rs. 44713445	Total Rs.	292220780
Total	Rs. 255717143	Add Non Schedule Item	Rs. 1255794
		Amount of Tender Cost	Rs. <u>293471766</u>

$$\frac{\text{T.C - Estimate Cost} \times 100}{\text{Estimate Cost}} = 14.76\%$$

$$\frac{293471766 - 255717143 \times 100}{255717143} = 14.76\%$$

Assistant Accounts Officer  
Chotiari Reservoir (I) Division,  
Sanghar

ASSISTANT DIRECTOR  
Sindh Building Control Authority  
Hyderabad

EXECUTIVE ENGINEER  
Chotiari Reservoir (I) Division,  
Sanghar

PROJECT DIRECTOR/SE  
Chotiari Reservoir Project Circle  
Sanghar

*As recommended by procurement committee the lowest bid quoted by M/s Hatiz Rabnawaz and Co 14.76% above the estimated cost is hereby approved.*

CHIEF ENGINEER  
Irrigation Development Region-II  
Hyderabad.

**PACKAGE NO. I**

**Bill No.1 Remaining Earth Work Of MFLC**

Sr. No.	Description of Items	Unit	Quantity	Rate	Amount (Rs.)
1	Jungle clearance and removing within 100ft (light) Provisional Quantity (page NO.100 item No.4 (a) from SCR 2012	%0 Sft	1,400,000	75.63	105,882
2	Ploughing (3 Times) (P-109/i-41)	P Acre	39	1,769.63	68,250
3	Earth work excavation in irrigation channels drains etc. Dressed to design section grades and profiles excavated material disposed off and dressed within 50ft lead (page 1, item No.5)	%0 Cft	6,355,725	2,420.00	15,380,853
4	Rehandling of earth work (b) Upto 50' (page No.2 item No.9(b). 3 leads = 3 X 1058.75= 3176.25	%0 Cft	6,355,725	3,176.25	20,187,370
5	Extra for wet earth Provisional Quantity (page No.4, item No.15)	%0 Cft	1,271,145	1,058.75	1,345,825
6	Borrow pit excavation undressed lead upto 100ft (a) ordinary soil, (page No.1, item 3a)	%0 Cft	1,194,500	2,117.50	2,529,355
7	Extra for every 50ft additional lead or part thereof. (a) For earth work (soft, ordinary, hard and v.hard) item No.8(a) page No.2 (3 Leads 100.78*3=302.34)	%0 Cft	238,900	302.34	72,229
8	Carriage of 100 cft/5 tons of all materials like stone, aggregate. Spawl, coal, lime, surki etc B.G rail fastening points and crossing bridge girders. Pipes sheets rail, MS bars etc or 1000 Nos. bricks 10"x5"x3" or 1000 Nos. tiles 12"x6"x2" or 150 cft timber 100 moulds of fuel wood by truck or any other means owned by the contractor 1 miles. (Page No. 1/1-1 schedule of carriage)	% cft	955,600	407.00	3,889,293
9	Earth work compaction soft ordinary hard soil (b) laying earth work in 6" layers leveling dressing & watering for compaction etc complete. (page No.4, item No.13(b))	%0 Cft	3,420,908	354.00	1,211,001
10	Earth work compaction by sheep feet roller and power roller with optimum moisture content (a) for 85 modified AASHO density (Page No. 2 item 7c highways schedule)	%0 Cft	3,420,908	1,445.58	4,945,196
					<b>49,735,254</b>



**PACKAGE NO. I**

**Bill No.2: Remodeling & lining of Qazi Faiz Muhammad Rajar Distributary**

Sr. No.	Description of Items	Unit	Quantity	Rate	Amount (Rs.)
1	Jungle clearance and removing within 100ft (light) Provisional Quantity (page NO.100 item No.4 (a)) from SCR	%0 Sft	900,000	75.63	68,067
2	Earth work excavation in irrigation channels drains etc. Dressed to design section grades and profiles excavated material disposed off and dressed within 50ft lead (page 1, item No.5)	%0 Cft	1,460,644	2,420.00	3,534,760
3	Borrow pit excavation undressed lead upto 100ft (a) ordinary soil, (page No.1, item 3a)	%0 Cft	2,923,283	2,117.50	6,190,053
4	Carriage of 100 cft/5 tons of all materials like stone, aggregate. Spawl, coal, lime, surki etc B.G rail fastening points and crossing bridge girders. Pipes sheets rail, M5 bars etc or 1000 Nos. bricks 10"x5"x3" or 1000 Nos. tiles 12"x6"x2" or 150 cft timber 100 moulds of fuel wood by truck or any other means owned by the contractor 1 miles. (Page No. 1/1-1 schedule of carriage)	% cft	836,427	407.00	3,404,258
5	Earth work compaction soft ordinary hard soil (b) laying earth work in 6" layers leveling dressing & watering for compaction etc complete. (page No.4, item No.13(b))	%0 Cft	2,923,283	354.00	1,034,842
6	Earth work compaction by sheep feet roller and power roller with optimum moisture content (a) for 85 modified AASHO density (Page No. 2 item 7c highways schedule)	%0 Cft	2,923,283	1,445.58	4,225,040
7	Formation dressing and preparing sub-grade (ch:12 p-74 item no.1)				
	a) In Bed	% Sft	110,100	326.70	359,697
	b) On slope	% Sft	226,623	453.75	1,028,300
8	Cement Plaster 1.5" thick ratio (1:6)				
	(a) On slope	% Sft	227,105	1,800.12	4,088,168
	(b) On slope	% Sft	256,097	2,011.87	5,152,348
9	Cement concrete lining ratio 1:2:4 (ch: 12 p-75 item-11, 2012)				
	a) In Bed	% Cft	74,960	13,789.32	10,336,411
	b) On slope	% Cft	84,529	14,227.95	12,026,721
10	Erection and removal of centering for RCC or C.C plain work for Partal wood 2nd Class. (ch: 4 P-18 item-19 2012)				
	b (ii) Vertical	% Sft	55,050	3,127.41	1,721,639
11	Elastomeric sealant. PC-I Sanctioned of MFLC Project (Chotyari Phase II for water supply to thar coal september 2014)	Rft	45,508	9.83	447,344
					<b>53,618,446</b>



**PACKAGE NO. I**

**Bill No.3: Remodeling & lining of Mano Gaho Minor**

Sr. No.	Description of Items	Unit	Quantity	Rate	Amount (Rs.)
1	Jungle clearance and removing within 100ft (light) Provisional Quantity (page NO.100 item No.4 (a)) from SCR	% Sft	550,000	75.63	41,597
2	Earth work excavation in irrigation channels drains etc. Dressed to design section grades and profiles excavated material disposed off and dressed within 50ft lead (page 1, item No.5)	% Cft	190,133	2,420.00	460,122
3	Borrow pit excavation undressed lead upto 100ft (a) ordinary soil, (page No.1, item 3a)	% Cft	531,341	2,117.50	1,125,115
	Carriage of 100 cft/5 tons of all materials like stone, aggregate. Spawl, coal, lime, surki etc B.G rail fastenings points and crossing bridge girders. Pipes sheets rail, MS bars etc or 1000 Nos. bricks 10"x5"x3" or 1000 Nos. tiles 12"x6"x2" or 150 cft timber 100 moulds of fuel wood by truck or any other means owned by the contractor 1 miles. (Page No. 1/1-1 schedule of carriage)	% cft	218,739	407.00	890,268
4					
5	Earth work compaction soft ordinary hard soil (b) laying earth work in 6" layers leveling dressing & watering for compaction etc complete. (page No.4, item No.13(b))	% Cft	531,341	354.00	188,095
6	Earth work compaction by sheep feet roller and power roller with optimum moisture content (a) for 85 modified AASHO density (Page No. 2 item 7c highways schedule)	% Cft	531,341	1,445.58	768,096
7	Formation dressing and preparing sub-grade (ch; 12 p-74 item no.1)				
	a) In Bed	% Sft	40,150	326.70	131,170
	b) On slope	% Sft	83,160	453.75	377,339
8	Cement Plaster 1.5" thick ratio (1:6)				
	(a) On slope	% Sft	74,888	1,800.12	1,348,074
	(b) On slope	% Sft	61,272	2,011.87	1,232,713
9	Cement concrete lining ratio 1:2:4 (ch: 12 p-75 item-11, 2012)				
	a) In Bed	%Cft	24,457	13,789.32	3,372,509
	b) On slope	%Cft	20,011	14,227.95	2,847,098
10	Erection and removal of centering for RCC or C.C plain work for Partal wood 2nd Class. (ch: 4 P-18 item-19 2012)				
	b (ii) Vertical	% Sft	33,000	3,127.41	1,032,045
11	Elastomeric sealant. PC-I Sanctioned of MFLC Project (Chotyari Phase II for water supply to thar coal september 2014)	Rft	15,620	9.83	153,545
					<b>13,967,784</b>

**PACKAGE NO. I**

**Bill No.4: Remodeling & lining of Qazi Rasool Bux Rajar Minor**

Sr. No.	Description of Items	Unit	Quantity	Rate	Amount (Rs.)
1	Jungle clearance and removing within 100ft (light) Provisional Quantity (page NO.100 item No.4 (a)) from SCR	%0 Sft	1,100,000	75.63	83,193
2	Earth work excavation inirrigation channels drains etc.Dressed to design section grades and profiles excvated material disposed off and dreeeed within 50ft lead (page 1, item No.5)	%0 Cft	851,612	2,420.00	2,060,902
3	Borrow pit excavation undressed lead upto 100ft (a) ordinary soil, (page No.1, item 3a)	%0 Cft	2,768,427	2,117.50	5,862,144
4	Carriage of 100 cft/5 tons of all materials like stone, aggregate. Spawl, coal, lime, surki etc B.G rail fasteningpoints and crossing bridge girders.Pipes sheets rail,MS bars etc or 1000 Nos.bricks 10"x5"x3" or 1000 Nos. tiles 12"x6"x2" or 150 cft timber 100 moulds of fuel wood by truck or any other means owned by the contractor 1 miles. (Page No. 1/1-1 schedule of carriage)	% cft	1,664,070	407.00	6,772,765
5	Earth work compaction soft ordinary hard soil (b) laying earth work in 6" layers leveling dressing & watering for compaction etc complete. (page No.4, item No.13(b))	%0 Cft	2,768,427	354.00	980,023
6	Earth work compaction by sheep feet roller and power roller with optimum moisture content (a) for 85 modified AASHO density (Page No. 2 item 7c highways schedule)	%0 Cft	2,768,427	1,445.58	4,001,982
7	Formation dressing and preparing sub-grade (ch;12 p-74 item no.1)				
	a) In Bed	% Sft	67,500	326.70	220,523
	b) On slope	% Sft	220,000	453.75	998,250
8	Cement Plaster 1.5" thick ratio (1:6)				
	(a) On slope	% Sft	153,426	1,800.12	2,761,845
	(b) On slope	% Sft	230,138	2,011.87	4,630,085
9	Cement concrete lining ratio 1:2:4 (ch: 12 p-75 item-11, 2012)				
	a) In Bed	%Cft	50,472	13,789.32	6,959,718
	b) On slope	%Cft	75,708	14,227.95	10,771,654
10	Erection and removal of centering for RCC or C.C plain work for Partal wood 2nd Class. (ch: 4 P-18 item-19 2012)				
	b (ii)Vertical	% Sft	60,000	3,127.41	1,876,446
11	Elastomeric sealant. PC-I Sanctioned of MFLC Project (Chotyari Phase II for water supply to thar coal september 2014)	Rft	34,480	9.83	338,938
					<b>48,318,468</b>

**PACKAGE NO. I**

**Bill No.5: Remodeling & lining of Haji Jan Muhammad Hingorjo-1 Minor**

Sr. No.	Description of Items	Unit	Quantity	Rate	Amount (Rs.)
1	Jungle clearance and removing within 100ft (light) Provisional Quantity (page NO.100 item No.4 (a)) from SCR	% Sft	840,000	75.63	63,529
2	Earth work excavation in irrigation channels drains etc. Dressed to design section grades and profiles excavated material disposed off and dressed within 50ft lead (page 1, item No.5)	% Cft	762,294	2,420.00	1,844,750
3	Borrow pit excavation undressed lead upto 100ft (a) ordinary soil, (page No.1, item 3a)	% Cft	3,180,555	2,117.50	6,734,826
4	Carriage of 100 cft/5 tons of all materials like stone, aggregate. Spawl, coal, lime, surki etc B.G rail fastening points and crossing bridge girders. Pipes sheets rail, MS bars etc or 1000 Nos. bricks 10"x5"x3" or 1000 Nos. tiles 12"x6"x2" or 150 cft timber 100 mouds of fuel wood by truck or any other means owned by the contractor 1 miles. (Page No. 1/1-1 schedule of carriage)	% cft	738,991	407.00	3,007,693
5	Earth work compaction soft ordinary hard soil (b) laying earth work in 6" layers leveling dressing & watering for compaction etc complete. (page No.4, item No.13(b))	%Cft	3,180,555	354.00	1,125,917
6	Earth work compaction by sheep feet roller and power roller with optimum moisture content (a) for 85 modified AASHO density (Page No. 2 item 7c highways schedule)	% Cft	3,180,555	1,445.58	4,597,747
7	Formation dressing and preparing sub-grade (ch:12 p-74 item no.1)				
	a) In Bed	% Sft	58,800	326.70	192,100
	b) On slope	% Sft	193,200	453.75	876,645
8	Cement Plaster 1.5" thick ratio (1:6)				
	(a) On slope	% Sft	127,206	1,800.12	2,289,858
	(b) On slope	% Sft	203,199	2,011.87	4,088,099
9	Cement concrete lining ratio 1:2:4 (ch: 12 p-75 item-11, 2012)				
	a) In Bed	%Cft	41,870	13,789.32	5,773,612
	b) On slope	%Cft	66,884	14,227.95	9,516,155
10	Erection and removal of centering for RCC or C.C plain work for Partal wood 2nd Class. (ch: 4 P-18 item-19 2012)		50,400		
	b (ii) Vertical	% Sft	50,400	3,127.41	1,576,215
11	Elastomatic sealant. PC-I Sanctioned of MFLC Project (Chotyari Phase II for water supply to thar coal september 2014)	Rft	31,181	9.83	306,507
					<b>41,993,652</b>

**PACKAGE NO. I**

**Bill No.6: Double Cell Road Culvert**

Sr. No.	Description of Items	Unit	Quantity	Rate	Amount (Rs.)
1	Excavation in foundation of buildings, bridges and other structure lie dag belling, dressing, refilling around the structures with excavated earth watering and ramming lead upto one chain and lift upto 5ft (b) (in ordinary soil) (1/18 (b) P-4)	% Cft	5264.00	3176.25	16,720
2	Cement concrete plain i/c finishing and curing complete i/c screening and eashing of stone aggregate without shuttering. Ratio 1:3:6 (P-16 item no. 5 h)	% Cft	781.20	12595	98,392
3	R.C.C work in all labour and material except the cost of steel reinforcement and its labour for bending and binding which will be paid sperately. This rate also i/c all kind of forms, moulds, lifting, shuttering, curing, rendering and finishing the exposed surface.(i/c screening and washing of shingle)  (a) RCC work in roof slabs, beams, column, rafts, lintels and other structural members laid in situ or pre-cast laid in position complete in all respects. (i) Ratio 1:2:4, 90lbs cement, 2cft sand, 4cft shingle 1//4" to 1/2" gauge. (4/6 (a)(1) p-16)	P.Cft	2860.75	337	964,073
4	fabrication of mild steel r/ff for cement concrete ilc cutting,bending, laying in position,making joints 2nd fastening ilc cost of binding wire.(also include removal of rust from bars) (b) using deformed bars grade 60. (4/8 (b) p-16)	P.Cwt	204.34	5001.7	1,022,044
5	Providing " expention joint in concrete work of 9" wide corugated PVC waterstop (with bulb) i.c soldering cost of material and labour etc complete. (Page 56, PHE, Miscellaneous B 2)	P.Rft	60	86	5,160
6	Borrow pit excavation undressed lead upto 100ft (a) ordinary soil, (page No.1, item 3a)	%0Cft	3000	2117.5	6,353
7	Earth work compaction soft ordinary hard soil (b) laying earth work in 6" layers leveling dressing & watering for compaction etc complete. (page No.4, item No.13(b))	%0Cft	3000	354	1,062
					<b>2,113,803</b>

**PACKAGE NO. I**

**Bill No.7: Single Cell Road Culvert**

Sr. No.	Description of Items	Unit	Quantity	Rate	Amount (Rs.)
1	Excavation in foundation of buildings, bridges and other structure lie dag belling, dressing, refilling around the structures with excavated earth watering and ramming lead upto one chain and lift upto 5ft (b) (in ordinary soil) (1/18 (b) P-4)	% Cft	3,936	3,176.25	12,502
2	Cément concrete plain i/c finishing and curing complete i/c screening and eashing of stone aggregate without shuttering. Ratio 1:3:6 (P-16 item no. 5 h)	% Cft	483	12,595.00	60,872
3	R.C.C work in all labour and material except the cost of steel reinforcement and its labour for bending and binding which will be paid sperately. This rate also i/c all kind of forms, moulds, lifting, shuttering, curing, rendering and finishing the exposed surface.(i/c screening and washing of shingle)  (a) RCC work in roof slabs, beams, column, rafts, lintels and other structural members laid in situ or pre-cast laid in position complete in all respects. (i) Ratio 1:2:4, 90lbs cement, 2cft sand, 4cft shingle 1//4" to 1/2" gauge. (4/6 (a)(1) p-16)	P.Cft	1,689	337.00	569,109
4	fabrication of mild steel r/f for cement concrete ilc cutting,bending, laying in position,making joints 2nd fastening ilc cost of binding wire.(also include removal of rust from bars) (b) using deformed bars grade 60. (4/8 (b) p-16)	P.Cwt	121	5,001.70	603,330
5	Providing " expention joint in concrete work of 9" wide corugated PVC waterstop (with bulb) i.c soldering cost of material and labour etc complete. (Page 56, PHE, Miscellaneous B 2)	P.Rft	50	86.00	4,300
6	Borrow pit excavation undressed lead upto 100ft (a) ordinary soil, (page No.1, item 3a)	% Cft	2,500	2,117.50	5,294
7	Earth work compaction soft ordinary hard soil (b) laying earth work in 6" layers leveling dressing & watering for compaction etc complete. (page No.4, item No.13(b))	% Cft	2,500	354.00	885
					<b>1,256,291</b>

Name of  
Scheme:-

**MAKHI FARASH LINK CANAL PROJECT (CHOTIARI PHASE-II )  
FOR WATER SUPPLY TO THAR COAL**

Name of  
Work:-

**PACKAGE I: CONSTRUCTION OF CIVIL WORK OF MAKI LINK CANAL PROJECT  
(CHOTIARI PHASE-II), FOR WATER SUPPLY TO THAR COAL FROM RD 104+000 TO  
145+600, IN CHOTIARI RESERVOIR (I), DIVISION, SANGHAR**

Bill No.	Description / Name of Work	Amount (Rs)
1	Remaining Earth work of MFLC	49,735,254
2	Remodeling & lining of Qazi Faiz Muhammad Rajar Distry	53,618,446
3	Remodeling & lining of Mano Gaho Distry	13,967,784
4	Remodeling & lining Qazi Rasool Bux Rajar Minor of DISTRY	48,318,468
5	Remodeling & lining of Haji Jan Muhammad Hingorjo-1 Minor	41,993,652
6	Double Cell Road Culvert	2,113,803
7	Single Cell Road Culvert	1,256,291
Total Amount in Words:-		211,003,698

(INTEGRITY PACT)  
DECLARATION OF FEES, COMMISSION AND BROKERAGE ETC  
PAYABLE BY CONTRACTORS  
(FOR CONTRACTS WORTH RS. 10.00 MILLION OR MORE)

Contract No. P2/SMT/II C/ARCE/1144 Dated 8/17/16

Contract Value: 2934717661-

Contract Title: **CONSTRUCTION OF CIVIL WORK OF MAKHI FARASH LINK CANAL PROJECT (CHOTIARI PHASE-II), FOR WATER SUPPLY TO THAR COAL FROM RD 104+000 TO 145+600, IN CHOTIARI RESERVOIR (I), DIVISION, SANGHAR**

..... hereby declares that it has not obtained or induced the procurement of any contract, right, interest, privilege or other obligation or benefit from Government of Sindh (GoS) or any administrative subdivision or agency thereof or any other entity owned or controlled by it (GoS) through any corrupt business practice.

Without limiting the generality of the foregoing, M/s. Ras Nawaz Chaudhry represents

and warrants that it has fully declared the brokerage, commission, fees etc. paid or payable to anyone and not given or agreed to give and shall not give or agree to give to anyone within or outside Pakistan either directly or indirectly through any natural or juridical person, including its affiliate, agent, associate, broker, consultant, director, promoter, shareholder, sponsor or subsidiary, any commission, gratification, bribe, finder's fee or kickback, whether described as consultation fee or otherwise, with the object of obtaining or inducing the procurement of a contract, right, interest, privilege or other obligation or benefit in whatsoever form from, from Procuring Agency (PA) except that which has been expressly declared pursuant hereto.

M/s. Ras Nawaz Chaudhry accepts

full responsibility and strict liability that it has made and will make full disclosure of all agreements and arrangements with all persons in respect of or related to the transaction with PA and has not taken any action or will not take any action to circumvent the above declaration, representation or warranty.

M/s. Ras Nawaz Chaudhry accepts

full responsibility and strict liability for making any false declaration, not making full disclosure, misrepresenting facts or taking any action likely to



defeat the purpose of this declaration, representation and warranty. It agrees that any contract, right, interest, privilege or other obligation or benefit obtained or procured as aforesaid shall, without prejudice to any other rights and remedies available to PA under any law, contract or other instrument, be voidable at the option of PA.


Notwithstanding any rights and remedies exercised by PA in this regard,

Mr Hajir Ras Khan Chaudhary..... agrees


to indemnify PA for any loss or damage incurred by it on account of its corrupt business practices and further pay compensation to PA in an amount equivalent to ten times the sum of any commission, gratification, bribe, finder's fee

or kickback given by Mr Hajir Ras Khan Chaudhary.....

as aforesaid for the purpose of obtaining or inducing the procurement of any contract, right, interest, privilege or other obligation or benefit in whatsoever form from PA.

  
Executive Engineer,  
Chotiari Reservoir (I) Division,  
Sanghar

[Procuring Agency]



[Contractor]

# SINDH PUBLIC PROCUREMENT REGULATORY AUTHORITY

## CONTRACT EVALUATION FORM

### TO BE FILLED IN BY ALL PROCURING AGENCIES FOR PUBLIC CONTRACTS OF WORKS, SERVICES & GOODS

- 1) NAME OF THE ORGANIZATION / DEPTT. Irrigation Department
- 2) PROVINCIAL / LOCAL GOVT/ OTHER Government of Sindh
- 3) TITLE OF CONTRACT P-2 CIVIL WORKS OF MFLC FROM RD145+600 TO 171+400
- 4) TENDER NUMBER Supdt./PD/CRCP/1144 dated 08.12.2016
- 5) BRIEF DESCRIPTION OF CONTRACT P-2 CIVIL WORKS OF MFLC FROM RD145+600 TO 171+400
- 6) FORUM THAT APPROVED THE SCHEME
- 7) TENDER ESTIMATED VALUE 255,228,267/-
- 8) ENGINEER'S ESTIMATE 222,364,019/-  
(For civil works only)
- 9) ESTIMATED COMPLETION PERIOD (AS PER CONTRACT) 12 Months
- 10) TENDER OPENED ON (DATE & TIME) 26.12.2016 at 01:00 PM
- 11) NUMBER OF TENDER DOCUMENTS SOLD 03 Nos  
(Attach list of buyers)
- 12) NUMBER OF BIDS RECEIVED 03 Nos
- 13) NUMBER OF BIDDERS PRESENT AT THE TIME OF OPENING OF BIDS 03 Nos
- 14) BID EVALUATION REPORT Enclosed  
(Enclose a copy)
- 15) NAME AND ADDRESS OF THE SUCCESSFUL BIDDER M/S Abdul Hakeem A-53 Faraz Vilas Hyderabad
- 16) CONTRACT AWARD PRICE 255,228,267/-
- 17) RANKING OF SUCCESSFUL BIDDER IN EVALUATION REPORT  
(i.e. 1<sup>st</sup>, 2<sup>nd</sup>, 3<sup>rd</sup> EVALUATION BID). 1st
- 18) METHOD OF PROCUREMENT USED : - (Tick one)

- a) SINGLE STAGE - ONE ENVELOPE PROCEDURE  Domestic/ Local
- b) SINGLE STAGE - TWO ENVELOPE PROCEDURE
- c) TWO STAGE BIDDING PROCEDURE
- d) TWO STAGE - TWO ENVELOPE BIDDING PROCEDURE

PLEASE SPECIFY IF ANY OTHER METHOD OF PROCUREMENT WAS ADOPTED i.e. EMERGENCY, DIRECT CONTRACTING ETC WITH BRIEF REASONS

EXTRA INVITED DIARY  
NO: 352  
DATED: 16-01-17

19) APPROVING AUTHORITY FOR AWARD OF CONTRACT \_\_\_\_\_

20) WHETHER THE PROCUREMENT WAS INCLUDED IN ANNUAL PROCUREMENT PLAN?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

21) ADVERTISEMENT :

i) SPPRA Website  
(If yes, give date and SPPRA Identification No.)

Yes	08-12-2016 SPPRA ID: 2147483647 at Sr No. 30775
No	

ii) News Papers  
(If yes, give names of newspapers and dates)

Yes	
No	<input checked="" type="checkbox"/>

22) NATURE OF CONTRACT

Domestic Local	<input checked="" type="checkbox"/>	Int.	<input type="checkbox"/>
-------------------	-------------------------------------	------	--------------------------

23) WHETHER QUALIFICATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?  
(If yes, enclose a copy)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

24) WHETHER BID EVALUATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?  
(If yes, enclose a copy)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

25) WHETHER APPROVAL OF COMPETENT AUTHORITY WAS OBTAINED FOR USING A METHOD OTHER THAN OPEN COMPETITIVE BIDDING?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

26) WAS BID SECURITY OBTAINED FROM ALL THE BIDDERS?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

27) WHETHER THE SUCCESSFUL BID WAS LOWEST EVALUATED BID / BEST EVALUATED BID (in case of Consultancies)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

28) WHETHER THE SUCCESSFUL BIDDER WAS TECHNICALLY COMPLIANT?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

29) WHETHER NAMES OF THE BIDDERS AND THEIR QUOTED PRICES WERE READ OUT AT THE TIME OF OPENING OF BIDS?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

30) WHETHER EVALUATION REPORT GIVEN TO BIDDERS BEFORE THE AWARD OF CONTRACT?  
(Attach copy of the bid evaluation report)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

31) ANY COMPLAINTS RECEIVED  
(If yes, result thereof)

Yes	
No	✓

32) ANY DEVIATION FROM SPECIFICATIONS GIVEN IN THE TENDER NOTICE / DOCUMENTS  
(If yes, give details)

Yes	
No	✓

33) WAS THE EXTENSION MADE IN RESPONSE TIME?  
(If yes, give reasons)

Yes	N/A
No	✓

34) DEVIATION FROM QUALIFICATION CRITERIA  
(If yes, give detailed reasons.)

Yes	
No	✓

35) WAS IT ASSURED BY THE PROCURING AGENCY THAT THE SELECTED FIRM IS NOT  
BLACK LISTED?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

36) WAS A VISIT MADE BY ANY OFFICER/OFFICIAL OF THE PROCURING AGENCY TO THE  
SUPPLIER'S PREMISES IN CONNECTION WITH THE PROCUREMENT? IF SO, DETAILS TO  
BE ASCERTAINED REGARDING FINANCING OF VISIT, IF ABROAD:  
(If yes, enclose a copy)

Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

37) WERE PROPER SAFEGUARDS PROVIDED ON MOBILIZATION ADVANCE PAYMENT IN  
THE CONTRACT (BANK GUARANTEE ETC.)?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

38) SPECIAL CONDITIONS, IF ANY  
(If yes, give Brief Description)

Yes	
No	-

Signature & Official Stamp of  
Authorized Officer

  
Executive Engineer CRD, Banghar  
Special Reservoir (I) Division  
Banghar

FOR OFFICE USE ONLY

**SPPRA, Block. No.8, Sindh Secretariat No.4-A, Court Road, Karachi**

Tele: 021-9205356; 021-9205369 & Fax: 021-9206291

Print

Save

Reset

**OFFICE OF THE EXECUTIVE ENGINEER  
CHOTIARI RESERVOIR (I) DIVISION SANGHAR**

No. SKP/G-66/CRDS/ 71

Sanghar Dated: 13/01/2017

To,

**M/s Abdul Hakeem Chachar,  
Government Contractor,**

Subject: **WORK ORDER PACKAGE NO.2 FOR CONSTRUCTION OF CIVIL WORKS OF  
MAKHI FARASH LINK CANAL PROJECT (CHOTIARI PHASE-II) FOR WATER  
SUPPLY TO THAR COAL FROM RD-145+600 TO 171+400 IN CHOTIARI  
RESERVOIR (I) DIVISION SANGHAR.**

Reference: Your Bid for the subjected work on dated: 26.12.2016.

The lowest rates quoted by you for the subjected work @ Rate 34.61% Above (Thirty Four point Sixty One percent above) for amounting to Rs: 255,228,267/- have been approved by the Chief Engineer Irrigation Development Region-II Hyderabad vide No. CEI/DEV-II/WB/07 dated 02/01/2017 as received through Project Director / SE Chotiari Reservoir Project Circle Sanghar vide letter No. Supdt:/PD/CRPC/19 dated 05/01/2017.

You are therefore requested to start the work within seven days of the receipt of this work order and complete the same within (12 Month) under the Supervision of Assistant Executive Engineer Chotiari Reservoir Sub-Division No.II Sanghar.

The following conditions should be followed strictly.

- 1/- The execution of work shall be in accordance with the schedule of progress as provided in contract documents.
- 2/- No Expenditure is to be incurred in beyond the original Administrative Approval and available funds.
- 3/- No premium shall be allowed on Non-schedule items, if any.
- 4/- No separate payment for carriage of material shall be made.
- 5/- All materials required for construction shall be procured and brought at site by you at your own cost from approved source / quarries.
- 6/- Income tax shall be deducted from the bills as per latest orders / instructions of competent authority.
- 7/- Work will be carried out strictly as per PWD specifications.

You should also nominate your authorized agent to whom the instructions at site of work are issued.

If you are a corporate body or firm, you should submit necessary partnership deed and power of attorney in favor of someone, who is to receive cheques / materials.


It is also believed that you have gone into the details of Contract Data before tendering for the work.

Copy of schedule 'B' is enclosed.

Executive Engineer  
Chotiari Reservoir (I) Division  
Sanghar

C.c.

- 1/- The Chief Engineer Irrigation Development Region-II Hyderabad for favor of his kind information.
- 2/- The Project Director / SE Chotiari Reservoir Project Circle Sanghar for favor of his kind information.
- 3/- The Director (A&F) Sindh Procurement Regulatory Authority (SPPRA) Barrack No. 8 Secretariat 4A Court Road Karachi
- 4/- The Assistant Executive Engineer Makhi / Chotiari Sub-Division No. II Sanghar, along with the copy of Schedule 'B' for information. He is directed to report actual date of start of the work and ensure the execution of work according to specification.

  
Executive Engineer  
Chotiari Reservoir (I) Division  
Sanghar

## FORM OF CONTRACT AGREEMENT

THIS CONTRACT AGREEMENT (hereinafter called the —Agreement) made on the 10/01/17 day of ~~2017~~ in between Executive Engineer, Chotiari Reservoir (I), Division, Sanghar of the one part and M/S Abdul Hakeem Chachar (hereinafter called the "Contractor") of the other part.

WHEREAS the Procuring Agency is desirous that certain Works, viz "Makhi Farash Link Canal Project (Chotiari Phase-II), for Water Supply to Thar Coal" should be executed by the Contractor and has accepted a Bid by the Contractor for the execution and completion of such Works and the remedying of any defects therein.

NOW this Agreement witnesseth as follows:

1. In this Agreement words and expressions shall have the same meanings as are respectively assigned to them in the Conditions of Contract hereinafter referred to.
2. The following documents after incorporating addenda, if any except those parts relating to Instructions to Bidders, shall be deemed to form and be read and construed as part of this Agreement, viz:
  - (a) The Letter of Acceptance;
  - (b) The completed Form of Bid along with Schedules to Bid;
  - (c) Conditions of Contract & Contract Data;
  - (d) The priced Schedule of Prices/Bill of quantities (BoQ);
  - (e) The Specifications; and
  - (f) The Drawings
3. In consideration of the payments to be made by the Procuring Agency to the Contractor as hereinafter mentioned, the Contractor hereby covenants with the Procuring Agency to execute and complete the Works and remedy defects therein in conformity and in all respects within the provisions of the Contract.



4. The Procuring Agency hereby covenants to pay the Contractor, in consideration of the execution and completion of the Works as per provisions of the Contract, the Contract Price or such other sum as may become payable under the provisions of the Contract at the times and in the manner prescribed by the Contract.

IN WITNESS WHEREOF the parties hereto have caused this Contract Agreement to be executed on the day, month and year first before written in accordance with their respective laws.

Signature of the Contactor

(Seal)

Signature of the Procuring Agency

(Seal)

*Recommended*

Signed, Sealed and Delivered in the presence of:

Witness:

Witness:

(Name, Title and Address)

(Name, Title and Address)

*Chief Engineer*  
CHIEF ENGINEER  
Irrigation Development Region-II  
Hyderabad.



No. .... 14 ..... Date *Jan 17*  
Issued to Mr. *Eshik Chaudhary*  
Address .....  
Value ..... *76,700/-*  
Rupees .....

Store Depot Keeper  
*Sanghar 10/11/7*



NAME OF SCHEME CONSTRUCTION OF CIVIL WORK OF MAKHI FARASH LINK CANAL PROJECT (CHOTIARI PHASE-II),  
FOR WATER SUPPLY TO THAR COAL FROM RD 104+000 TO 208+000, IN CHOTIARI RESERVOIR (I),  
DIVISION, SANGHAR

NAME OF WORK WORK FROM RD 145+600 TO RD 171+400

Package-02

Position of Estimate		Position of Tender	
Schedule-B		Schedule-B	
Schedule Items	Rs. 188874989	Schedule Items	Rs. 188874989
Non-Schedule Items	Rs. 978996	34.61% Above	65369634
Cartage	Rs. 32510034	Total Rs.	254244623
Total	Rs. 222364019	Add Non Schedule Item	Rs. 978996
		Amount of Tender Cost	Rs. 255228267

$$\frac{\text{T.C - Estimate Cost} \times 100}{\text{Estimate Cost}}$$
$$\frac{255228267 - 222364019 \times 100}{222364019} = 14.77\%$$

Accounts Officer  
Reservoir (I) Division  
Sanghar

ASSISTANT DIRECTOR  
Sindh Building Control Authority  
Hyderabad

EXECUTIVE ENGINEER  
Chotiari Reservoir (I) Division  
Sanghar

PROJECT DIRECTOR/SE  
Chotiari Reservoir Project Circle  
Sanghar

*As recommended by procurement committee the lowest bid is  
"quoted by M/s Abdul Hakeem Chachar and sons 14.77% "  
"above the estimated cost is hereby approved."*

CHIEF ENGINEER  
Irrigation Development Region-II  
Hyderabad.

**PACKAGE-II**

**Bill No.1 Remaining Earth Work of MFLC**

Sr. No.	Description of Items	Unit	Quantity	Rate	Amount (Rs.)
1	Jungle clearance and removing within 100ft (light) Provisional Quantity (page NO.100 item No.4 (a)) from SCR	%0 Sft	1,675,000	75.63	126,680
2	Ploughing (3 Times) (P-109/i-41)	P Acre	55	1,769.63	97,500
3	Earth work excavation in irrigation channels drains etc. Dressed to design section grades and profiles excavated material disposed off and dressed within 50ft lead (page 1, item No.5)	%0 Cft	1,150,427	2,420.00	2,784,033
4	Rehandling of earth work (b) Upto 50' (page No.2 item No.9(b). 3 leads = 3 X 1058.75 = 3176.25	%0 Cft	1,150,427	3,176.25	3,654,044
5	Extra for wet earth Provisional Quantity (page No.4, item No.15)	%0 Cft	230,085	1,058.75	243,603
6	Borrow pit excavation undressed lead upto 100ft (a) ordinary soil, (page No.1, item 3a)	%0 Cft	6,331,290	2,117.50	13,406,506
7	Carriage of 100 cft/5 tons of all materials like stone, aggregate. Spawl, coal, lime, surki etc B.G rail fastening points and crossing bridge girders. Pipes sheets rail, MS bars etc or 1000 Nos. bricks 10"x5"x3" or 1000 Nos. tiles 12"x6"x2" or 150 cft timber 100 moulds of fuel wood by truck or any other means owned by the contractor 1 miles. (Page No. 1/1-1 schedule of carriage)	% cft	5,065,032	407.00	20,614,680
8	Extra for every 50ft additional lead or part thereof. (a) For earth work (soft, ordinary, hard and v.hard) item No.8(a) page No.2 (3 Leads 100.78*3=302.34)	%0 Cft	1,266,258	302.34	382,840
9	Earth work compaction soft ordinary hard soil (b) laying earth work in 6" layers leveling dressing & watering for compaction etc complete. (page No.4, item No.13(b))	%0 Cft	7,481,717	354.00	2,648,528
10	Earth work compaction by sheep feet roller and power roller with optimum moisture content (a) for 85 modified AASHO density (Page No. 2 item 7c highways schedule)	%0 Cft	7,481,717	1,445.58	10,815,420
				<b>TOTAL</b>	<b>54,773,834</b>

**PACKAGE-II**

**Bill No.2 Remodeling & lining of Haji Pir Bux Rajar Distry**

Sr. No.	Description of Items	Unit	Quantity	Rate	Amount (Rs.)
1	Jungle clearance and removing within 100ft (light) Provisional Quantity (page NO.100 item No.4 (a)) from SCR	%0 Sft	1,700,000.00	75.63	128,571.00
2	Earth work excavation in irrigation channels drains etc. Dressed to design section grades and profiles excavated material disposed off and dressed within 50ft lead (page 1, item No.5)	%0Cft	1,659,544.40	2,420.00	4,016,097.45
3	Borrow pit excavation undressed lead upto 100ft (a) ordinary soil, (page No.1, item 3a)	%0Cft	5,321,409.10	2,117.50	11,268,083.77
4	Carriage of 100 cft/5 tons of all materials like stone, aggregate. Spawl, coal, lime, surki etc B.G rail fastening points and crossing bridge girders. Pipes sheets rail, MS bars etc or 1000 Nos. bricks 10"x5"x3" or 1000 Nos. tiles 12"x6"x2" or 150 cft timber 100 mouds of fuel wood by truck or any other means owned by the contractor 1 miles. (Page No. 1/1-1 schedule of carriage)	% cft	1,297,283	407.00	5,279,941.81
5	Earth work compaction soft ordinary hard soil (b) laying earth work in 6" layers leveling dressing & watering for compaction etc complete. (page No.4, item No.13(b))	%0Cft	5,321,409.10	354.00	1883778.82
6	Earth work compaction by sheep feet roller and power roller with optimum moisture content (a) for 85 modified AASHO density (Page No. 2 item 7c highways schedule)	%0 Cft	5,321,409.10	1,445.58	7692522.57
7	Formation dressing and preparing sub-grade (ch;12 p-74 item no.1)				
	a) In Bed	% Sft	149,600.00	326.70	488743.20
	b) On slope	% Sft	395,760.00	453.75	1795761.00
8	Cement Plaster 1.5" thick ratio (1:6)				
	(a) On slope	% Sft	303,020.79	1,800.12	5454737.88
	(b) On slope	% Sft	377,924.81	2,011.87	7603355.83
9	Cement concrete lining ratio 1:2:4 (ch: 12 p-75 item-11, 2012)				
	a) In Bed	%Cft	99,743.59	13,789.32	13753962.87
	b) On slope	%Cft	124,399.31	14,227.95	17699471.56
10	Erection and removal of centering for RCC or C.C plain work for Partial wood 2nd Class. (ch: 4 P-18 item-19 2012)				
	b (ii) Vertical	% Sft	102,000.00	3,127.41	3189958.20
11	Elastomatic sealant. PC-I Sanctioned of MFLC Project (Chotyari Phase II for water supply to thar coal september 2014)	Rft	64,770.00	9.83	636689.10
	<b>TOTAL</b>				<b>80,891,675.06</b>

**PACKAGE-II**

**Bill No.3: Remodeling & Lining of Haji Jan Muhammad Hingorjo-2 Minor**

Sr. No.	Description of Items	Unit	Quantity	Rate	Amount (Rs.)
1	Jungle clearance and removing within 100ft (light) Provisional Quantity (page NO.100 item No.4 (a)) from SCR	%0 Sft	980,000.00	75.63	74,117
2	Earth work excavation in irrigation channels drains etc. Dressed to design section grades and profiles excavated material disposed off and dressed within 50ft lead (page 1, item No.5)	%0Cft	739,122.95	2,420.00	1,788,678
3	Borrow pit excavation undressed lead upto 100ft (a) ordinary soil, (page No.1, item 3a)	%0Cft	3,822,964.65	2,117.50	8,095,128
	Carriage of 100 cft/5 tons of all materials like stone, aggregate. Spawl, coal, lime, surki etc B.G rail fastening points and crossing bridge girders. Pipes sheets				9,979,156
4	rail, MS bars etc or 1000 Nos. bricks 10"x5"x3" or 1000 Nos. tiles 12"x6"x2" or 150 cft timber 100 mounds of fuel wood by truck or any other means owned by the contractor 1 miles. (Page No. 1/1-1 schedule of carriage)	% cft	2,451,881	407.00	
5	Earth work compaction soft ordinary hard soil (b) laying earth work in 6" layers leveling dressing & watering for compaction etc complete. (page No.4, item No.13(b))	%0Cft	3,822,964.65	354.00	1,353,329
6	Earth work compaction by sheep feet roller and power roller with optimum moisture content (a) for 85 modified AASHO density (Page No. 2 item 7c highways schedule)	%0 Cft	3,822,964.65	1,445.58	5,526,401
7	Formation dressing and preparing sub-grade (ch;12 p-74 item no.1)				
	a) In Bed	% Sft	53,900.00	326.70	176,091
	b) On slope	% Sft	233,240.00	453.75	1,058,327
8	Cement Plaster 1.5" thick ratio (1:6)				
	(a) On slope	% Sft	127,545.13	1,800.12	2,295,965
	(b) On slope	% Sft	229,224.47	2,011.87	4,611,698
9	Cement concrete lining ratio 1:2:4 (ch: 12 p-75 item-11, 2012)				
	a) In Bed	%Cft	41,936.68	13,789.32	5,782,783
	b) On slope	%Cft	75,368.72	14,227.95	10,723,424
10	Erection and removal of centering for RCC or C.C plain work for Deodar wood 2nd Class. (ch: 4 P-18 item-19 2012)				
	b) Vertical (slope)	% Sft	58,800.00	3,127.41	1,838,917
11	Elastomeric sealant. PC-I Sanctioned of MFLC Project (Chotyari Phase II for water supply to thar coal september 2014)	Rft	34,594.00	9.83	340,059
				<b>TOTAL</b>	<b>53,644,073</b>

**PACKAGE-II**

**Bill No.4: One Cell Road Culvert**

Sr. No.	Description of Items	Unit	Quantity	Rate	Amount (Rs.)
1	Excavation in foundation of buildings, bridges and other structure lie dag belling, dressing, refilling around the structures with excavated earth watering and ramming lead upto one chain and lift upto 5ft (b) (in ordinary soil) (1/18 (b) P-4)	%0Cft	2,000.00	3,176.25	6,353
2	Cement concrete plain i/c finishing and curing complete i/c screening and eashing of stone aggregate without shuttering. Ratio 1:3:6 (P-16 item no. 5 h)	%Cft	229.60	12,595.00	28,918
3	R.C.C work in all labour and material except the cost of steel reinforcement and its labour for bending and binding which will be paid sperately. This rate also i/c all kind of forms, moulds, lifting, shuttering, curing, rendering and finishing the exposed surface.(i/c screening and washing of shingle)  (a) RCC work in roof slabs, beams, column, rafts, lintels and other structural members laid in situ or pre-cast laid in position complete in all respects. (i) Ratio 1:2:4, 90lbs cement, 2cft sand, 4cft shingle 1//4" to 1/2" gauge. (4/6 (a)(1) p-16)	P.Cft	723.00	337.00	243,651
4	fabrication of mild steel r/f for cement concrete ilc cutting,bending, laying in position,making joints 2nd fastening ilc cost of binding wire.(also includde removal of rust from bars) (b) using deformed bars grade 60. (4/8 (b) p-16)	P.Cwt	51.64	5,001.70	258,302
5	Providing " expention joint in concrete work of 9" wide corugated PVC waterstop (with bulb) i.c soldering cost of material and labour etc complete. (Page 56, PHE, Miscellaneous B 2)	P.Rft	26.00	86.00	2,236
6	Borrow pit excavation undressed lead upto 100ft (a) ordinary soil, (page No.1, item 3a)	%0 Cft	2,000.00	2,117.50	4,235
7	Earth work compaction soft ordinary hard soil (b) laying earth work in 6" layers leveling dressing & watering for compaction etc complete. (page No.4, item No.13(b))	%0 Cft	2,000.00	354.00	708
				<b>TOTAL</b>	<b>544,403</b>

Name of  
Scheme:-

**MAKHI FARASH LINK CANAL PROJECT (CHOTIARI PHASE-II )  
FOR WATER SUPPLY TO THAR COAL**

Name of  
Work:-

**PACKAGE-II: CIVIL WORK OF MAKI LINK CANAL PROJECT (CHOTIARI PHASE-II), FOR  
WATER SUPPLY TO THAR COAL FROM RD 145+600 TO 171+400, IN CHOTIARI  
RESERVOIR (I), DIVISION, SANGHAR**

Bill No.	Description / Name of Work	Amount (Rs)
1	Remaining Earth work of MFLC	54,773,834
2	Remodeling & lining of Haji Pir Bux Rajar Distry	80,891,675
3	Remodeling & lining of Haji Jan Muhammad Hingorjo-2 Minor	53,644,073
4	One Cell Road Culvert	544,403
<b>Total</b>		<b>189,853,985</b>

**(INTEGRITY PACT)  
DECLARATION OF FEES, COMMISSION AND BROKERAGE ETC  
PAYABLE BY CONTRACTORS  
(FOR CONTRACTS WORTH RS. 10.00 MILLION OR MORE)**

Contract No. Sindh/KoC/ARZ /1144 Dated 8/12/2016

Contract Value: Rs. 255,228,267/-

Contract Title: **CONSTRUCTION OF CIVIL WORK OF MAKHI FARASH LINK CANAL PROJECT (CHOTIARI PHASE-II), FOR WATER SUPPLY TO THAR COAL FROM RD 145+600 TO 171+400, IN CHOTIARI RESERVOIR (I), DIVISION, SANGHAR**

M/s. Abdul Hakeem Chachar hereby declares that it has not obtained or induced the procurement of any contract, right, interest, privilege or other obligation or benefit from Government of Sindh (GoS) or any administrative subdivision or agency thereof or any other entity owned or controlled by it (GoS) through any corrupt business practice.

Without limiting the generality of the foregoing, M/s. Abdul Hakeem Chachar represents and warrants that it has fully declared the brokerage, commission, fees etc. paid or payable to anyone and not given or agreed to give and shall not give or agree to give to anyone within or outside Pakistan either directly or indirectly through any natural or juridical person, including its affiliate, agent, associate, broker, consultant, director, promoter, shareholder, sponsor or subsidiary, any commission, gratification, bribe, finder's fee or kickback, whether described as consultation fee or otherwise, with the object of obtaining or inducing the procurement of a contract, right, interest, privilege or other obligation or benefit in whatsoever form from, from Procuring Agency (PA) except that which has been expressly declared pursuant hereto.

M/s. Abdul Hakeem Chachar accepts full responsibility and strict liability that it has made and will make full disclosure of all agreements and arrangements with all persons in respect of or related to the transaction with PA and has not taken any action or will not take any action to circumvent the above declaration, representation or warranty.

M/s. Abdul Hakeem Chachar accepts

full responsibility and strict liability for making any false declaration, not making full disclosure, misrepresenting facts or taking any action likely to

*Handwritten signature*





defeat the purpose of this declaration, representation and warranty. It agrees that any contract, right, interest, privilege or other obligation or benefit obtained or procured as aforesaid shall, without prejudice to any other rights and remedies available to PA under any law, contract or other instrument, be voidable at the option of PA.

Notwithstanding any rights and remedies exercised by PA in this regard,

*Mrs Abdul Hameem Chachan* ..... agrees

to indemnify PA for any loss or damage incurred by it on account of its corrupt business practices and further pay compensation to PA in an amount equivalent to ten times the sum of any commission, gratification, bribe, finder's fee

or kickback given by *Mrs Abdul Hameem Chachan* .....

as aforesaid for the purpose of obtaining or inducing the procurement of any contract, right, interest, privilege or other obligation or benefit in whatsoever form from PA.

*Singh*  
Executive Engineer,  
Chotiari Reservoir (I) Division,  
Sanghar

[Procuring Agency]

*H. M. S.*

[Contractor]



**SINDH PUBLIC PROCUREMENT REGULATORY AUTHORITY**

**CONTRACT EVALUATION FORM**

**TO BE FILLED IN BY ALL PROCURING AGENCIES FOR PUBLIC CONTRACTS OF WORKS, SERVICES & GOODS**

- 1) NAME OF THE ORGANIZATION / DEPTT. Irrigation Department
- 2) PROVINCIAL / LOCAL GOVT./ OTHER Government of Sindh
- 3) TITLE OF CONTRACT P-4A CIVIL WORKS OF MFLC FROM RD-171+400TO 208
- 4) TENDER NUMBER Supdt./PD/CRCP/1144 dated 08.12.2016
- 5) BRIEF DESCRIPTION OF CONTRACT P-4A CIVIL WORKS OF MFLC FROM RD-171+400TO 208
- 6) FORUM THAT APPROVED THE SCHEME \_\_\_\_\_
- 7) TENDER ESTIMATED VALUE 278,603,868/-
- 8) ENGINEER'S ESTIMATE 242,535,242/-  
(For civil works only)
- 9) ESTIMATED COMPLETION PERIOD (AS PER CONTRACT) 12 Months
- 10) TENDER OPENED ON (DATE & TIME) 26.12.2016 at 01:00 PM
- 11) NUMBER OF TENDER DOCUMENTS SOLD 03 Nos.  
(Attach list of buyers)
- 12) NUMBER OF BIDS RECEIVED 03 Nos.
- 13) NUMBER OF BIDDERS PRESENT AT THE TIME OF OPENING OF BIDS 03 Nos.
- 14) BID EVALUATION REPORT Enclosed  
(Enclose a copy)
- 15) NAME AND ADDRESS OF THE SUCCESSFUL BIDDER M/S Haji Bashir Ahmed, Qasimabad Hyderabad.
- 16) CONTRACT AWARD PRICE 278,603,868/-
- 17) RANKING OF SUCCESSFUL BIDDER IN EVALUATION REPORT  
(i.e. 1<sup>st</sup>, 2<sup>nd</sup>, 3<sup>rd</sup> EVALUATION BID). 1st
- 18) METHOD OF PROCUREMENT USED :- (Tick one)

- a) SINGLE STAGE – ONE ENVELOPE PROCEDURE   Domestic/ Local
- b) SINGLE STAGE – TWO ENVELOPE PROCEDURE  -
- c) TWO STAGE BIDDING PROCEDURE  -
- d) TWO STAGE – TWO ENVELOPE BIDDING PROCEDURE  -

PLEASE SPECIFY IF ANY OTHER METHOD OF PROCUREMENT WAS ADOPTED i.e. EMERGENCY, DIRECT CONTRACTING ETC. WITH BRIEF REASONS:

SPRA INVT TO DIARY  
NO: 351  
DATED: 16-01-17

19) APPROVING AUTHORITY FOR AWARD OF CONTRACT \_\_\_\_\_

20) WHETHER THE PROCUREMENT WAS INCLUDED IN ANNUAL PROCUREMENT PLAN?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

21) ADVERTISEMENT :

i) SPPRA Website  
(If yes, give date and SPPRA Identification No.)

Yes	08-12-2016 SPPRA ID: 2147483647 at Sr No. 30775
No	

ii) News Papers  
(If yes, give names of newspapers and dates)

Yes	
No	<input checked="" type="checkbox"/>

22) NATURE OF CONTRACT

Domestic/Local	<input checked="" type="checkbox"/>	Int.	<input type="checkbox"/>
----------------	-------------------------------------	------	--------------------------

23) WHETHER QUALIFICATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?  
(If yes, enclose a copy)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

24) WHETHER BID EVALUATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?  
(If yes, enclose a copy)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

25) WHETHER APPROVAL OF COMPETENT AUTHORITY WAS OBTAINED FOR USING A METHOD OTHER THAN OPEN COMPETITIVE BIDDING?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

26) WAS BID SECURITY OBTAINED FROM ALL THE BIDDERS?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

27) WHETHER THE SUCCESSFUL BID WAS LOWEST EVALUATED BID / BEST EVALUATED BID (in case of Consultancies)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

28) WHETHER THE SUCCESSFUL BIDDER WAS TECHNICALLY COMPLIANT?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

29) WHETHER NAMES OF THE BIDDERS AND THEIR QUOTED PRICES WERE READ OUT AT THE TIME OF OPENING OF BIDS?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

30) WHETHER EVALUATION REPORT GIVEN TO BIDDERS BEFORE THE AWARD OF CONTRACT?  
(Attach copy of the bid evaluation report)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

31) ANY COMPLAINTS RECEIVED  
(If yes, result thereof)

Yes	
No	✓

32) ANY DEVIATION FROM SPECIFICATIONS GIVEN IN THE TENDER NOTICE / DOCUMENTS  
(If yes, give details)

Yes	
No	✓

33) WAS THE EXTENSION MADE IN RESPONSE TIME?  
(If yes, give reasons)

Yes	N/A
No	✓

34) DEVIATION FROM QUALIFICATION CRITERIA  
(If yes, give detailed reasons.)

Yes	
No	✓

35) WAS IT ASSURED BY THE PROCURING AGENCY THAT THE SELECTED FIRM IS NOT  
BLACK LISTED?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

36) WAS A VISIT MADE BY ANY OFFICER/OFFICIAL OF THE PROCURING AGENCY TO THE  
SUPPLIER'S PREMISES IN CONNECTION WITH THE PROCUREMENT? IF SO, DETAILS TO  
BE ASCERTAINED REGARDING FINANCING OF VISIT, IF ABROAD:  
(If yes, enclose a copy)

Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------


37) WERE PROPER SAFEGUARDS PROVIDED ON MOBILIZATION ADVANCE PAYMENT IN  
THE CONTRACT (BANK GUARANTEE ETC.)?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

38) SPECIAL CONDITIONS, IF ANY  
(If yes, give Brief Description)

Yes	
No	✓

Signature & Official Stamp of  
Authorized Officer

  
Executive Engineer CRD/Sanghar  
Chouari Reservoir (I) Division

FOR OFFICE USE ONLY

SPPRA, Block. No.8, Sindh Secretariat No.4-A, Court Road, Karachi

Tele: 021-9205356; 021-9205369 & Fax: 021-9206291

Print

Save

Reset

**OFFICE OF THE EXECUTIVE ENGINEER  
CHOTIARI RESERVOIR (I) DIVISION SANGHAR**

No. SKP/G-66/CRDS/

73

Sanghar Dated: 13/01/2017

To,

M/s Haji Bashir Ahmed Soomro,  
Government Contractor,

Subject:

**WORK ORDER PACKAGE NO.4A FOR CONSTRUCTION OF CIVIL WORKS OF MAKHI FARASH LINK CANAL PROJECT (CHOTIARI PHASE-II) FOR WATER SUPPLY TO THAR COAL FROM RD-171+400 TO 208+000 IN CHOTIARI RESERVOIR (I) DIVISION SANGHAR.**

Reference: Your Bid for the subjected work on dated: 26.12.2016.

The lowest rates quoted by you for the subjected work @ Rate 20.62 Above (Twenty point sixty two percent above) for amounting to Rs: 278,603,868/- have been approved by the Chief Engineer Irrigation Development Region-II Hyderabad vide No. CEI/DEV-II/WB/09 dated 02/01/2017 as received through Project Director / SE Chotiari Reservoir Project Circle Sanghar vide letter No. Supdt./PD/CRPC/21 dated 05/01/2017.

You are therefore requested to start the work within seven days of the receipt of this work order and complete the same within (12 Month) under the Supervision of Assistant Executive Engineer Chotiari Reservoir Sub-Division No.III Khipro.

The following conditions should be followed strictly.

- 1/- The execution of work shall be in accordance with the schedule of progress as provided in contract documents.
- 2/- No Expenditure is to be incurred in beyond the original Administrative Approval and available funds.
- 3/- No premium shall be allowed on Non-schedule items, if any.
- 4/- No separate payment for carriage of material shall be made.
- 5/- All materials required for construction shall be procured and brought at site by you at your own cost from approved source / quarries.
- 6/- Income tax shall be deducted from the bills as per latest orders / instructions of competent authority.
- 7/- Work will be carried out strictly as per PWD specifications.

You should also nominate your authorized agent to whom the instructions at site of work are issued.

If you are a corporate body or firm, you should submit necessary partnership deed and power of attorney in favor of someone, who is to receive cheques / materials.

It is also believed that you have gone into the details of Contract Data before tendering for the work.

Copy of schedule 'B' is enclosed.

Executive Engineer  
Chotiari Reservoir (I) Division  
Sanghar

C.c.

- 1/- The Chief Engineer Irrigation Development Region-II Hyderabad for favor of his kind information.
- 2/- The Project Director / SE Chotiari Reservoir Project Circle Sanghar for favor of his kind information.
- 3/- The Director (A&F) Sindh Procurement Regulatory Authority (SPPRA) Barrack No. 8 Secretariat 4A Court Road Karachi
- 4/- The Assistant Executive Engineer Makhi / Chotiari Sub-Division No. III Khipro, along with the copy of Schedule 'B' for information. He is directed to report actual date of start of the work and ensure the execution of work according to specification.

Executive Engineer  
Chotiari Reservoir (I) Division  
Sanghar

## FORM OF CONTRACT AGREEMENT

THIS CONTRACT AGREEMENT (hereinafter called the —Agreement) made on the 10/01/17 day of ~~2017~~ in between Executive Engineer, Chotiari Reservoir (I), Division, Sanghar of the one part and M/S Haji Bashir Soomro Contractor (hereinafter called the "Contractor") of the other part.

WHEREAS the Procuring Agency is desirous that certain Works, viz "Makhi Farash Link Canal Project (Chotiari Phase-II), for Water Supply to Thar Coal " should be executed by the Contractor and has accepted a Bid by the Contractor for the execution and completion of such Works and the remedying of any defects therein.

NOW this Agreement witnesseth as follows:

1. In this Agreement words and expressions shall have the same meanings as are respectively assigned to them in the Conditions of Contract hereinafter referred to.
2. The following documents after incorporating addenda, if any except those parts relating to Instructions to Bidders, shall be deemed to form and be read and construed as part of this Agreement, viz:
  - (a) The Letter of Acceptance;
  - (b) The completed Form of Bid along with Schedules to Bid;
  - (c) Conditions of Contract & Contract Data;
  - (d) The priced Schedule of Prices/Bill of quantities (BoQ);
  - (e) The Specifications; and
  - (f) The Drawings
3. In consideration of the payments to be made by the Procuring Agency to the Contractor as hereinafter mentioned, the Contractor hereby covenants with the Procuring Agency to execute and complete the Works and remedy defects therein in conformity and in all respects within the provisions of the Contract.





4. The Procuring Agency hereby covenants to pay the Contractor, in consideration of the execution and completion of the Works as per provisions of the Contract, the Contract Price or such other sum as may become payable under the provisions of the Contract at the times and in the manner prescribed by the Contract.

IN WITNESS WHEREOF the parties hereto have caused this Contract Agreement to be executed on the day, month and year first before written in accordance with their respective laws.

*Hand No. 278603,8687*

Signature of the Contractor

(Seal)



Signature of the Procuring Agency

(Seal)

Sanghar

*Recommended*

No. *117* Issued to Mr. *Edulis* in the presence of:

Address *Sanghar*

Value *8,36,000/-*

Rupees

Witness:

Store Depot *Sanghar*

(Name, Title and Address)

Name, Title and Address





NAME OF SCHEME CONSTRUCTION OF CIVIL WORK OF MAKHI FARASH LINK CANAL PROJECT (CHOTIARI PHASE-II),  
FOR WATER SUPPLY TO THAR COAL FROM RD 104+000 TO 208+000, IN CHOTIARI RESERVOIR  
(I), DIVISION, SANGHAR

NAME OF WORK WORK FROM RD 171+400 TO RD 208+000

Package-04-A

Position of Estimate		Position of Tender	
<b>Schedule-B</b>		<b>Schedule-B</b>	
Schedule Items	Rs. 222645837	Schedule Items	Rs. 222645837
Non-Schedule Items	Rs. 10052761		20.62% Above 45909572
Cartage	Rs. 9836644		<u>Total Rs. 268555409</u>
Total	Rs. 242535242	Add Non Schedule Item	Rs. 10052761
		<b>Amount of Tender Cost</b>	<b>Rs. 278603868</b>

T.C - Estimate Cost x 100	
Estimate Cost	
<u>278603868 - 242535242 x100</u>	14.87%
242535242	

*[Signature]*  
Accounts Officer  
Reservoir (I) Division  
Sanghar

*[Signature]*  
ASSISTANT DIRECTOR  
Road Building Control Authority  
Hyderabad

*[Signature]*  
EXECUTIVE ENGINEER  
Chotiari Reservoir (I) Division  
Sanghar

*[Signature]*  
PROJECT DIRECTOR/SE  
Chotiari Reservoir Project Circle  
Sanghar

*As recommended by procurement committee the lowest bid is quoted by M/s Haji Bashir Ahmed Sonuro 14.87%. Above the estimated cost is hereby approved.*

*[Signature]*  
CHIEF ENGINEER  
Irrigation Development Region-II  
Hyderabad.

**PACKAGE-IV-A**

Bill No.2 Khipro Escape/Outfall @ (RD 207+500)

S. No.	ITEM	UNIT	QUANTITY	RATE	AMOUNT
1	Borrow pit excavation undressed lead upto 100ft (a) ordinary soil, (page No.1, item 3a)	% Cft	160,000.00	2,117.50	338800
	Carriage of 100 cft/5 tons of all materials like stone, aggregate. Spawl, coal, lime, surki etc B.G rail fasteningpoints and crossing bridge girders.Pipes sheets rail, MS bars etc or	% Cft	160000	407	651200
2	1000 Nos.bricks 10"x5"x3" or 1000 Nos. tiles 12"x6"x2" or 150 cft timber 100 moulds of fuel wood by truck or any other means owned by the contractor 1 miles. (Page No. 1/1-1 schedule of carriage)				
3	Dressing and leveling of earth work to designed section etc complete. (b) ordinary or hard soil. P-3 item/11b	% Cft	160,000.00	187.55	30008
4	Earth work excavation in irrigation channels drains etc. dressed to designed section & profile excavated material disposed off. & dressed with in 50 ft lead (a) Ordinarysoil (1/5 (a) P-1)	% Cft	14,400.00	2,420.00	34848
5	Excavation in foundation of buildings, bridges and other structures i/c dagbelling, dressing, refilling around the structure with excavated earth watering and ramming lead upto one chain and lift upto 5ft (In ordinary soil) (1/18 (b) P-4)	% Cft	6,577.00	3,176.25	20890
	Preparing watering and ramming surface for laying concrete (for head works only),(4/18 P-17)				
6	(a) Horizontal Floor X-Regulator and Head Regulator	% Sft	820.00	228.09	1870
	(b) Glacis & crest X-Regulator and Head Regulator	% Sft	540.00	347.88	1879
	(c) Inverted filter X-Regulator and Head Regulator	% Sft	616.00	105.88	652
7	C.C plain including placing, compacting, finishing and curing complete (including screening and washing of stone aggregate without shuttering). Ratio 1:4:8 (4/5 (i) P-15)	% Cft	651.10	11288.75	73501
8	Cement concrete plain including placing compacting finishing and curing complete (including screening and washing at stone aggregate without ratio 1:2:4 (5(f), P-16)	% Cft	221.00	14429.25	31889
9	Erection and removal of centering for RCC or plain cement concrete works of Partal wood (2nd-class). (P-17/4-19 b ii).	% Sft	417.08	3127.41	13044
10	Precast cement concrete soild or face block (1:2:4) i/c cost of templates (4/9 P-16)	P.Cft	1920.00	146.06	280435
11	Erecting and fixing in position precast cement concrete or stone slab in roof or lintels etc. lift: upto 20ft i/c all charge (4/6 (c) P-16)	P.Cft	1920.00	41.77	80198
12	Reinforced cement concrete work in all labour and material except the cost of steel reinforcement and its labour for bending and binding which will be paid seperately. This rate also i/c all kinds of forms, moulds, lifting, shuttering, curing, rendering and finishing the exposed surface. (i/c screening and washing of shingle).	P.Cft	13,833.45	349	4827873
	(a) RCC work in roof slabs, beams, columns, rafts, lintels and other structural members laid in situ or pre-cast laid in position complete in all respects.				
	(b) Fabrication of mild steel reinforcement for cement concrete ilc cutting, bending, laying in position, Making joints 2nd fastenings ilc cost of binding wire. (also includes removal of rust from bars) (b) using deformed bars Grade 60. (4/8 (b) P-16)	P.Cwt	864.59	5001.7	4324422

## PACKAGE IV-A

Bill No.1 Earth work of MFLC from RD 174+000 to 197+000

Sr. No.	Description of Items	Unit	Quantity	Rate	Amount (Rs.)
1	Jungle clearance and removing within 100ft (light) Provisional Quantity (page NO.100 item No.4 (a) from SCR 2012	%0 Sft	5,750,000	75.63	434,873
2	Ploughing (3 Times) (P-109/i-41)	P Acre	158	1,769.63	280,313
3	Earth work excavation in irrigation channels drains etc. Dressed to design section grades and profiles excavated material disposed off and dressed within 50ft lead (page 1, item No.5)	%0 Cft	3,573,939	2,420.00	8,648,932
4	Rehandling of earth work (b) Upto 50' (page No.2 item No.9(b)). 3 leads = 3 X 1058.75 = 3176.25	%0 Cft	3,573,939	3,176.25	11,351,724
5	Extra for wet earth Provisional Quantity (page No.4, item No.15)	%0 Cft	714,788	1,058.75	756,782
6	Borrow pit excavation undressed lead upto 100ft (a) ordinary soil, (page No.1, item 3a)	%0 Cft	18,491,318	2,117.50	39,155,366
7	Carriage of 100 cft/5 tons of all materials like stone, aggregate. Spawl, coal, lime, surki etc B.G rail fastening points and crossing bridge girders. Pipes sheets rail, MS bars etc or 1000 Nos. bricks 10"x5"x3" or 1000 Nos. tiles 12"x6"x2" or 150 cft timber 100 moulds of fuel wood by truck or any other means owned by the contractor 1 miles. (Page No. 1/1-1 schedule of carriage)	% Cft	14793054.4	407	60,207,731
8	Extra for every 50ft additional lead or part thereof. (a) For earth work (soft, ordinary, hard and v.hard) item No.8(a) page No.2 (3 Leads 100.78*3=302.34)	%0 Cft	3,698,264	302.34	1,118,133
9	Earth work compaction soft ordinary hard soil (b) laying earth work in 6" layers leveling dressing & watering for compaction etc complete. (page No.4, item No.13(b))	%0 Cft	22,065,257	354.00	7,811,101
10	Earth work compaction by sheep feet roller and power roller with optimum moisture content (a) for 85 modified AASHO density (Page No. 2 item 7c highways schedule)	%0 Cft	22,065,257	1,445.58	31,897,094
<b>TOTAL</b>					<b>161,662,049</b>

**PACKAGE-IV-A**

Bill No.2 Khipro Escape/Outfall @ (RD 207+500)

S. No.	ITEM	UNIT	QUANTITY	RATE	AMOUNT
14	Providing expansion joints in concrete work of 9" wide corrugated PVC waterstop (with bulb) i.c soldering cost of material and labour etc complete. (R. Miscellaneous B.Expantion and Construction joints item no 1 P.No.56 PHE).	P.Rft	200.00	86	17200
15	Stone pitching including sub base with hammer dressed stone on surface laid in course i/c carriage of material within three chains lead. (6/23 P-30)	% Cft	10,000.00	5377.63	537763
16	Stone filling dry hand packed as filling behind retaining walls or in pitching and aprons.(6/16, P-30)	% Cft	12,690.00	2684	340600
17	Boring for tube well in all water bearing soils from ground level up to 100 ft.: or 30.50 meter depth i/c sinking and with drawing of casing pipe (e) 200 mm (8" dia) i/c Head Regulator of Haji Jan Muhammad Hingorjo-II Distry. (S.I No.1 (e) P.No.41 PHF)	P/Rft	560	535	299600
18	Supplying and Fixing M.S Bail plug i/c Head Regulator of Haji Jan Muhammad Hingorjo-II Distry.(S.I No.8b P.No.43 PHE)	No	8	2607	20856
19	Supplying & fixing local make coir strainers of approved quality complete (b) for 150mm (6" dia). i/c Head Regulator of Haji Jan Muhammad Hingorjo-II Distry. (S.I No.10 (b) P.No.44 PHE)	P.Rft	240	647	155280
20	Supplying and installing M.S blind pipe 3/16" (5mm) thick of best and approved quality and make i/c necessary socket etc complete. i/c Head Regulator of Haji Jan Muhammad Hingorjo-II Distry. (S.I No.11 (b) P.No.44 PHE)	PRft	320	762.5	244000
21	Full hire charges of the pumping set per day inclusive of the wage of driver and asistant fuel or electric energy plate froms required for placing pumps etc at lower depths with suction and delivery pipes for pumping out water found at various depth from trenches i/c the cost of erection and dismantling after completion of the job (iii) Hire charges of pumping set of upto10 HP pumping out water i/c Head Regulator of Haji Jan Muhammad Hingorjo-II Distry. (S.I No.23 (ii) P.No.77 PHE).	P.Days	480	2500	1200000
22	Note:- For working the pump beyond 8 hours the following payment shall be made. The hire of the pumping set itself being for 24 hours.(i) For Pumping set of upto P-Hour 10 H.Pi/c Head Regulator of Haji Jan Muhammad Hingorjo-II Distry.(S.I No.23 (i) P.No.77 PHE).	P.Hours	7680	250	1920000
23	Designing fabrication /manufacturing & erection of double screw vertical gate of MS sheets 8mm, girders, channel angles of required size with operational device and plateform etc painting only i/c cartage of fabricated / manufactured components from W/shop to site of work etc complete with one year period of operation (Market Rate).	PSft	138.47	21000	2907941
<b>TOTAL</b>					<b>18,354,748</b>

## ESTIMATE CONSTRUCTION HEAD REGULATOR OF KAKAHO ESCAPE

## Bill No.3 KakaHo Escape Head Regulator @ (RD 207+750)

S. No.	ITEM	UNIT	QUANTITY	RATE	AMOUNT
1	Borrow pit excavation undressed lead upto 100ft (a) ordinary soil, (page No.1, item 3a)	%0 Cft	160,000.00	2,117.50	338800.00
2	Carriage of 100 cft/5 tons of all materials like stone, aggregate. Spawl, coal, lime, surki etc B.G rail fasteningpoints and crossing bridge girders.Pipes sheets rail, MS bars etc or 1000 Nos.bricks 10"x5"x3" or 1000 Nos. tiles 12"x6"x2" or 150 cft timber 100 mouds of fuel wood by truck or any other means owned by the contractor 1 miles. (Page No. 1/1-1 schedule of carriage)	% Cft	160,000.00	407	651200.00
3	Dressing and leveling of earth work to designed section etxc complete. (b) ordinary or hard soil. P-3 item/11b	%0 Cft	160,000.00	187.55	30008.00
4	Earth work excavation in irrigation channels drains etc. dressed to designed section & profile excavated material disposed off. & dressed with in 50 ft lead (a) Ordinarysoil (1/5 (a) P-1)	%0 Cft	45,000.00	2,420.00	108900.00
5	Excavation in foundation of buildings, bridges and other structures i/c dagbelling, dressing, refilling around the structure with excavated earth watering and ramming lead upto one chain and lift upto 5ft (In ordinary soil) (1/18 (b) P-4)	%0 Cft	52,587.24	3,176.25	167030.22
6	Preparing watering and ramming surface for laying concrete (for head works only),(4/18 P-17)				
6	(a) Horizontal Floor X-Regulator and Head Regulator	% Sft	3,671.25	228.09	8373.75
	(b) Glacis & crest X-Regulator and Head Regulator	% Sft	948.75	347.88	3300.51
	(c) Inverted filter X-Regulator and Head Regulator	% Sft	1,100.00	105.88	1164.68
7	C.C plain including placing, compacting, finishing and curing complete (including screening and washing of stone aggregate without shuttering). Ratio 1:4:8 (4/5 (i) P-15)	% Cft	1,875.94	11288.75	211770.54
8	Cement concrete plain including placing compacting finishing and curing complete (including screening and washing at stone aggregate without ratio 1:2:4 (5(f), P-16)	% Cft	1,670.25	14429.25	241004.55
9	Erection and removal of centering for RCC or plain cement concrete works of Partal wood (2nd-class). (P-17/4-19 b ii).	% Sft	455.42	3127.41	14242.85
10	Precast cement concrete soild or face block (1:2:4) i/c cost of templates (4/9 P-16)	P.Cft	4464.00	146.06	652011.84
11	Erecting and fixing in position precast cement concrete or stone slab in roof or lintels etc. lift: upto 20ft i/c all charge (4/6 (c) P-16)	P.Cft	4464.00	41.77	186461.28
12	Reinforced cement concrete work in all labour and material except the cost of steel reinforcement and its labour for bending and binding which will be paid seperately. This rate also i/c all kinds of forms, moulds, lifting, shuttering, curing, rendering and finishing the exposed surface. (i/c screening and washing of shingle).	P.Cft	41,278.53	349	14406205.29
	(a) RCC work in roof slabs, beams, columns, rafts, lintels and other structural members laid in situ or pre-cast laid in position complete in all respects.				
13	Fabrication of mild steel reinforcement for cement concrete ilc cutting, bending, laying in position, Making joints 2nd fastenings ilc cost of binding wire. (also includes removal of rust from bars) (b) using deformed bars Grade 60. (4/8 (b) P-16)	P.Cwt	2579.91	5001.7	12903924.97

**ESTIMATE CONSTRUCTION HEAD REGULATOR OF KAKAHO ESCAPE**

Bill No.3 Kakaho Escape Head Regulator @ (RD 207+750)

S. No.	ITEM	UNIT	QUANTITY	RATE	AMOUNT
14	Providing expansion joints in concrete work of 9" wide corrugated PVC waterstop (with bulb) i.c soldering cost of material and labour etc complete. (R. Miscellaneous B.Expantion and Construction joints item no 1 P.No.56 PHE).	P.Rft	320.00	86	27520.00
15	Stone pitching including sub base with hammer dressed stone on surface laid in course i/c carriage of material within three chains lead. (6/23 P-30)	% Cft	15,000.00	5377.63	806644.50
16	Stone filling dry hand packed as filling behind retaining walls or in pitching and aprons.(6/16, P-30)	% Cft	45,600.32	2684	1223912.59
17	Boring for tube well in all water bearing soils from ground level up to 100 ft.. or 30.50 meter depth i/c sinking and with drawing of casing pipe (e) 200 mm (8" dia) i/c Head Regulator of Haji Jan Muhammad Hingorjo-II Distry. (S.I No.1 (e) P.No.41 PHF)	P/Rft	840	535	449400.00
18	Supplying and Fixing M.S Bail plug i/c Head Regulator of Haji Jan Muhammad Hingorjo-II Distry.(S.I No.8b P.No.43 PHE)	No	12	2607	31284.00
19	Supplying & fixing local make coir strainers of approved quality complete (b) for 150mm (6" dia). i/c Head Regulator of Haji Jan Muhammad Hingorjo-II Distry. (S.I No.10 (b) P.No.44 PHE)	P.Rft	360	647	232920.00
20	Supplying and installing M.S blind pipe 3/16" (5mm) thick of best and approved quality and make i/c necessary socket etc complete. i/c Head Regulator of Haji Jan Muhammad Hingorjo-II Distry. (S.I No.11 (b) P.No.44 PHE)	P.Rft	480	762.5	366000.00
21	Full hire charges of the pumping set per day inclusive of the wage of driver and asistant fuel or electric energy plate froms required for placing pumps etc at lower depths with suction and delivery pipes for pumping out water found at various depth from trenches i/c the cost of erection and dismantling after completion of the job (iii) Hire charges of pumping set of upto10 HP pumping out water i/c Head Regulator of Haji Jan Muhammad Hingorjo-II Distry. (S.I No.23 (ii) P.No.77 PHE).	P.Days	1080	2500	2700000.00
22	Note:- For working the pump beyond 8 hours the following payment shall be made. The hire of the pumping set itselt being for 24 hours.(i) For Pumping set of upto P-Hour 10 H.Pi/c Head Regulator of Haji Jan Muhammad Hingorjo-II Distry.(S.I No.23 (i) P.No.77 PHE).	P.Hours	17280	250	4320000.00
23	Designing fabrication /manufacturing & erection of double screw vertical gate of MS sheets 8mm, girders, channel angles of required size with operational device and plateform etc painting only i/c cartage of fabricated / manufactured components from W/shop to site of work etc complete with one year period of operation (Market Rate).	P.Sft	338.10	21000	7100100.00
<b>TOTAL</b>					<b>47,182,180</b>



**PACKAGE-IV-A**

**Bill No.4: Earth Work Kakahu Escape Channel (Earthwork only without lining 6 RDs)**

Sr. No.	Description of Items	Unit	Quantity	Rate	Amount (Rs.)
1	Jungle clearance and removing within 100ft (light) Provisional Quantity (page NO.100 item No.4 (a).	%0 Sft	480,000	75.63	36,302
2	Earth work excavation inirrigation channels drains etc.Dressed to design section grades and profiles excvated material disposed off and dreeesed within 50ft lead (page 1, item No.5)	%0 Cft	1,490,145	2,420.00	3,606,151
3	Rehandling of earth work (b) Upto 50' (page No.2 item No.9(b).	%0 Cft	1,490,145	1,058.75	1,577,691
4	Dressing and levelinf of earth work to designed section etc complete.(b) ordinary orhard soil.(P-3 Item 11b)	%0Cft	1,490,145	187.55	279,477
<b>TOTAL</b>					<b>5,499,621</b>



Name of  
Scheme:-

**MAKHI FARASH LINK CANAL PROJECT (CHOTIARI PHASE-II )  
FOR WATER SUPPLY TO THAR COAL**

Name of  
Work:-

**PACKAGE IV-A : WORKS FROM RD 171+400 TO 208+000  
(MFLC, DHILYAR REGULATOR),  
IN CHOTIARI RESERVOIR (I), DIVISION, SANGHAR**

Bill. No.	Description	Amount (Rs)
1	Earth work of MFLC from RD 171+400 to 190+000	161,662,049
2	Khipro Escape/Outfall @ (RD 207+500)	18,354,748
3	Kakaho Escape Head Regulator @ (RD 207+750)	47,182,180
4	Earth Work Kakahu Escape Channel (Earthwork only without lining 6 RDs)	5,499,621
<b>Total Amount in Words:-</b>		<b>232,698,598</b>

**(INTEGRITY PACT)  
DECLARATION OF FEES, COMMISSION AND BROKERAGE ETC  
PAYABLE BY CONTRACTORS  
(FOR CONTRACTS WORTH RS. 10.00 MILLION OR MORE)**

Contract No. S-01/No/CAP/1144 Dated 8/12/2016

Contract Value: Rs: 278603868=

Contract Title: **CONSTRUCTION OF CIVIL WORK OF MAKHI FARASH LINK CANAL PROJECT (CHOTIARI PHASE-II), FOR WATER SUPPLY TO THAR COAL FROM RD 171+400 TO 208+000, IN CHOTIARI RESERVOIR (I), DIVISION, SANGHAR**

M/s. Haji Bashir Ahmed hereby declares that it has not obtained or induced the procurement of any contract, right, interest, privilege or other obligation or benefit from Government of Sindh (GoS) or any administrative subdivision or agency thereof or any other entity owned or controlled by it (GoS) through any corrupt business practice.


Without limiting the generality of the foregoing, M/s. Haji Bashir Ahmed represents and warrants that it has fully declared the brokerage, commission, fees etc. paid or payable to anyone and not given or agreed to give and shall not give or agree to give to anyone within or outside Pakistan either directly or indirectly through any natural or juridical person, including its affiliate, agent, associate, broker, consultant, director, promoter, shareholder, sponsor or subsidiary, any commission, gratification, bribe, finder's fee or kickback, whether described as consultation fee or otherwise, with the object of obtaining or inducing the procurement of a contract, right, interest, privilege or other obligation or benefit in whatsoever form from, from Procuring Agency (PA) except that which has been expressly declared pursuant hereto.

M/s. Haji Bashir Ahmed accepts

full responsibility and strict liability that it has made and will make full disclosure of all agreements and arrangements with all persons in respect of or related to the transaction with PA and has not taken any action or will not take any action to circumvent the above declaration, representation or warranty.

M/s. Haji Bashir Ahmed accepts

full responsibility and strict liability for making any false declaration, not making full disclosure, misrepresenting facts or taking any action likely to



defeat the purpose of this declaration, representation and warranty. It agrees that any contract, right, interest, privilege or other obligation or benefit obtained or procured as aforesaid shall, without prejudice to any other rights and remedies available to PA under any law, contract or other instrument, be voidable at the option of PA.


Notwithstanding any rights and remedies exercised by PA in this regard,

M/s. Haji Bashir Ahmed ..... agrees


to indemnify PA for any loss or damage incurred by it on account of its corrupt business practices and further pay compensation to PA in an amount equivalent to ten times the sum of any commission, gratification, bribe, finder's fee

or kickback given by M/s. Haji Bashir Ahmed .....

as aforesaid for the purpose of obtaining or inducing the procurement of any contract, right, interest, privilege or other obligation or benefit in whatsoever form from PA.

  
Executive Engineer,  
Chotiari Reservoir (I) Division,  
Sanghar

[Procuring Agency]

  
[Contractor]



**SINDH PUBLIC PROCUREMENT REGULATORY AUTHORITY**

**CONTRACT EVALUATION FORM**

**TO BE FILLED IN BY ALL PROCURING AGENCIES FOR PUBLIC CONTRACTS OF WORKS, SERVICES & GOODS**

- 1) NAME OF THE ORGANIZATION / DEPT. Irrigation Department
- 2) PROVINCIAL / LOCAL GOVT./ OTHER Government of Sindh
- 3) TITLE OF CONTRACT P-3 CIVIL WORKS OF MFLC FROM RD171+400 TO 208+000
- 4) TENDER NUMBER Supdt./PD/CRCP/1144 dated 08.12.2016
- 5) BRIEF DESCRIPTION OF CONTRACT P-3 CIVIL WORKS OF MFLC FROM RD171+400 TO 208+000
- 6) FORUM THAT APPROVED THE SCHEME \_\_\_\_\_
- 7) TENDER ESTIMATED VALUE 238,466,448/-
- 8) ENGINEER'S ESTIMATE 207,652,047/-  
(For civil works only)
- 9) ESTIMATED COMPLETION PERIOD (AS PER CONTRACT) 12 Months
- 10) TENDER OPENED ON (DATE & TIME) 26.12.2016 at 01:00 PM
- 11) NUMBER OF TENDER DOCUMENTS SOLD 03 Nos.  
(Attach list of buyers)
- 12) NUMBER OF BIDS RECEIVED 03 Nos.
- 13) NUMBER OF BIDDERS PRESENT AT THE TIME OF OPENING OF BIDS 03 Nos.
- 14) BID EVALUATION REPORT Enclosed  
(Enclose a copy)
- 15) NAME AND ADDRESS OF THE SUCCESSFUL BIDDER M/S Goind Ram W#6 B#05 Sanghar.
- 16) CONTRACT AWARD PRICE 238,466,448/-
- 17) RANKING OF SUCCESSFUL BIDDER IN EVALUATION REPORT  
(i.e. 1<sup>st</sup>, 2<sup>nd</sup>, 3<sup>rd</sup> EVALUATION BID). 1st

18) METHOD OF PROCUREMENT USED :- (Tick one)

- a) SINGLE STAGE – ONE ENVELOPE PROCEDURE  Domestic/ Local
- b) SINGLE STAGE – TWO ENVELOPE PROCEDURE  -
- c) TWO STAGE BIDDING PROCEDURE  -
- d) TWO STAGE – TWO ENVELOPE BIDDING PROCEDURE  -

PLEASE SPECIFY IF ANY OTHER METHOD OF PROCUREMENT WAS ADOPTED i.e. EMERGENCY, DIRECT CONTRACTING ETC WITH BRIEF REASONS

OFFICE LIBRARY  
NO. 348  
DATED 16-01-17

19) APPROVING AUTHORITY FOR AWARD OF CONTRACT \_\_\_\_\_

20) WHETHER THE PROCUREMENT WAS INCLUDED IN ANNUAL PROCUREMENT PLAN?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

21) ADVERTISEMENT :

i) SPPRA Website  
(If yes, give date and SPPRA Identification No.)

Yes	08-12-2016 SPPRA ID: 2147483647 at Sr No. 30775
No	

ii) News Papers  
(If yes, give names of newspapers and dates)

Yes	
No	<input checked="" type="checkbox"/>

22) NATURE OF CONTRACT

Domestic/ Local	<input checked="" type="checkbox"/>	Int.	<input type="checkbox"/>
--------------------	-------------------------------------	------	--------------------------

23) WHETHER QUALIFICATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?  
(If yes, enclose a copy)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

24) WHETHER BID EVALUATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?  
(If yes, enclose a copy)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

25) WHETHER APPROVAL OF COMPETENT AUTHORITY WAS OBTAINED FOR USING A METHOD OTHER THAN OPEN COMPETITIVE BIDDING?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

26) WAS BID SECURITY OBTAINED FROM ALL THE BIDDERS?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

27) WHETHER THE SUCCESSFUL BID WAS LOWEST EVALUATED BID / BEST EVALUATED BID (in case of Consultancies)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

28) WHETHER THE SUCCESSFUL BIDDER WAS TECHNICALLY COMPLIANT?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

29) WHETHER NAMES OF THE BIDDERS AND THEIR QUOTED PRICES WERE READ OUT AT THE TIME OF OPENING OF BIDS?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

30) WHETHER EVALUATION REPORT GIVEN TO BIDDERS BEFORE THE AWARD OF CONTRACT?  
(Attach copy of the bid evaluation report)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

31) ANY COMPLAINTS RECEIVED  
(If yes, result thereof)

Yes	
No	✓

32) ANY DEVIATION FROM SPECIFICATIONS GIVEN IN THE TENDER NOTICE / DOCUMENTS  
(If yes, give details)

Yes	
No	✓

33) WAS THE EXTENSION MADE IN RESPONSE TIME?  
(If yes, give reasons)

Yes	N/A
No	✓

34) DEVIATION FROM QUALIFICATION CRITERIA  
(If yes, give detailed reasons.)

Yes	
No	✓

35) WAS IT ASSURED BY THE PROCURING AGENCY THAT THE SELECTED FIRM IS NOT  
BLACK LISTED?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

36) WAS A VISIT MADE BY ANY OFFICER/OFFICIAL OF THE PROCURING AGENCY TO THE  
SUPPLIER'S PREMISES IN CONNECTION WITH THE PROCUREMENT? IF SO, DETAILS TO  
BE ASCERTAINED REGARDING FINANCING OF VISIT, IF ABROAD:  
(If yes, enclose a copy)

Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

37) WERE PROPER SAFEGUARDS PROVIDED ON MOBILIZATION ADVANCE PAYMENT IN  
THE CONTRACT (BANK GUARANTEE ETC.)?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

38) SPECIAL CONDITIONS, IF ANY  
(If yes, give Brief Description)

Yes	
No	-

Signature & Official Stamp of  
Authorized Officer

  
Executive Engineer GRD Sindh  
Chotari Reservoir (I) Division  
Sanghar

FOR OFFICE USE ONLY

**SPPRA, Block. No.8, Sindh Secretariat No.4-A, Court Road, Karachi**

Tele: 021-9205356; 021-9205369 & Fax: 021-9206291

Print

Save

Reset

**OFFICE OF THE EXECUTIVE ENGINEER  
CHOTIARI RESERVOIR (I) DIVISION SANGHAR**

No. SKP/G-66/CRDS/ 72

Sanghar Dated: 13/01/2017

To,

**M/s Goind Ram,  
Government Contractor,**

Subject: **WORK ORDER PACKAGE NO.3 FOR CONSTRUCTION OF CIVIL WORKS OF  
MAKHI FARASH LINK CANAL PROJECT (CHOTIARI PHASE-II) FOR WATER  
SUPPLY TO THAR COAL FROM RD-171+400 TO 208+000 IN CHOTIARI  
RESERVOIR (I) DIVISION SANGHAR.**

Reference: Your Bid for the subjected work on dated: 26.12.2016.

The lowest rates quoted by you for the subjected work @ Rate 39.45% Above (Thirty Nine Point Forty Five percent above) for amounting to Rs: 238,466,448/- have been approved by the Chief Engineer Irrigation Development Region-II Hyderabad vide No. CEI/DEV-II/WB/08 dated 02/01/2017 as received through Project Director / SE Chotiari Reservoir Project Circle Sanghar vide letter No. Supdt/PD/CRPC/20 dated 05/01/2017.

You are therefore requested to start the work within seven days of the receipt of this work order and complete the same within (12 Month) under the Supervision of Assistant Executive Engineer Chotiari Reservoir Sub-Division No.I Sanghar.

The following conditions should be followed strictly.

- 1/- The execution of work shall be in accordance with the schedule of progress as provided in contract documents.
- 2/- No Expenditure is to be incurred in beyond the original Administrative Approval and available funds.
- 3/- No premium shall be allowed on Non-schedule items, if any.
- 4/- No separate payment for carriage of material shall be made.
- 5/- All materials required for construction shall be procured and brought at site by you at your own cost from approved source / quarries.
- 6/- Income tax shall be deducted from the bills as per latest orders / instructions of competent authority.
- 7/- Work will be carried out strictly as per PWD specifications.

You should also nominate your authorized agent to whom the instructions at site of work are issued.

If you are a corporate body or firm, you should submit necessary partnership deed and power of attorney in favor of someone, who is to receive cheques / materials.


It is also believed that you have gone into the details of Contract Data before tendering for the work.

Copy of schedule 'B' is enclosed.

Executive Engineer  
Chotiari Reservoir (I) Division  
Sanghar

C.c.

- 1/- The Chief Engineer Irrigation Development Region-II Hyderabad for favor of his kind information.
- 2/- The Project Director / SE Chotiari Reservoir Project Circle Sanghar for favor of his kind information.
- 3/- The Director (A&F) Sindh Procurement Regulatory Authority (SPPRA) Barrack No. 8 Secretariat 4A Court Road Karachi
- 4/- The Assistant Executive Engineer Makhi / Chotiari Sub-Division No. I Sanghar, along with the copy of Schedule 'B' for information. He is directed to report actual date of start of the work and ensure the execution of work according to specification.

  
Executive Engineer  
Chotiari Reservoir (I) Division  
Sanghar



## FORM OF CONTRACT AGREEMENT

THIS CONTRACT AGREEMENT (hereinafter called the —Agreement) made on the 10/01/17 day of 2017 in between Executive Engineer, Chotiari Reservoir (I), Division, Sanghar of the one part and M/S Gand Ram Contro (hereinafter called the "Contractor") of the other part.

WHEREAS the Procuring Agency is desirous that certain Works, viz "Makhi Farash Link Canal Project (Chotiari Phase-II), for Water Supply to Thar Coal" should be executed by the Contractor and has accepted a Bid by the Contractor for the execution and completion of such Works and the remedying of any defects therein.


NOW this Agreement witnesseth as follows:

1. In this Agreement words and expressions shall have the same meanings as are respectively assigned to them in the Conditions of Contract hereinafter referred to.
2. The following documents after incorporating addenda, if any except those parts relating to Instructions to Bidders, shall be deemed to form and be read and construed as part of this Agreement, viz:
  - (a) The Letter of Acceptance;
  - (b) The completed Form of Bid along with Schedules to Bid;
  - (c) Conditions of Contract & Contract Data;
  - (d) The priced Schedule of Prices/Bill of quantities (BoQ);
  - (e) The Specifications; and
  - (f) The Drawings
3. In consideration of the payments to be made by the Procuring Agency to the Contractor as hereinafter mentioned, the Contractor hereby covenants with the Procuring Agency to execute and complete the Works and remedy defects therein in conformity and in all respects within the provisions of the Contract.

4. The Procuring Agency hereby covenants to pay the Contractor, in consideration of the execution and completion of the Works as per provisions of the Contract, the Contract Price or such other sum as may become payable under the provisions of the Contract at the times and in the manner prescribed by the Contract.

IN WITNESS WHEREOF the parties hereto have caused this Contract Agreement to be executed on the day, month and year first before written in accordance with their respective laws.

Recd No. B-238966448

  
Signature of the Contactor


(Seal)

  
Signature of the Procuring Agency

(Seal)

Project Director  
Chotani Reservoir (I) Division  
Sanghar

Signed, Sealed and Delivered in the presence of:

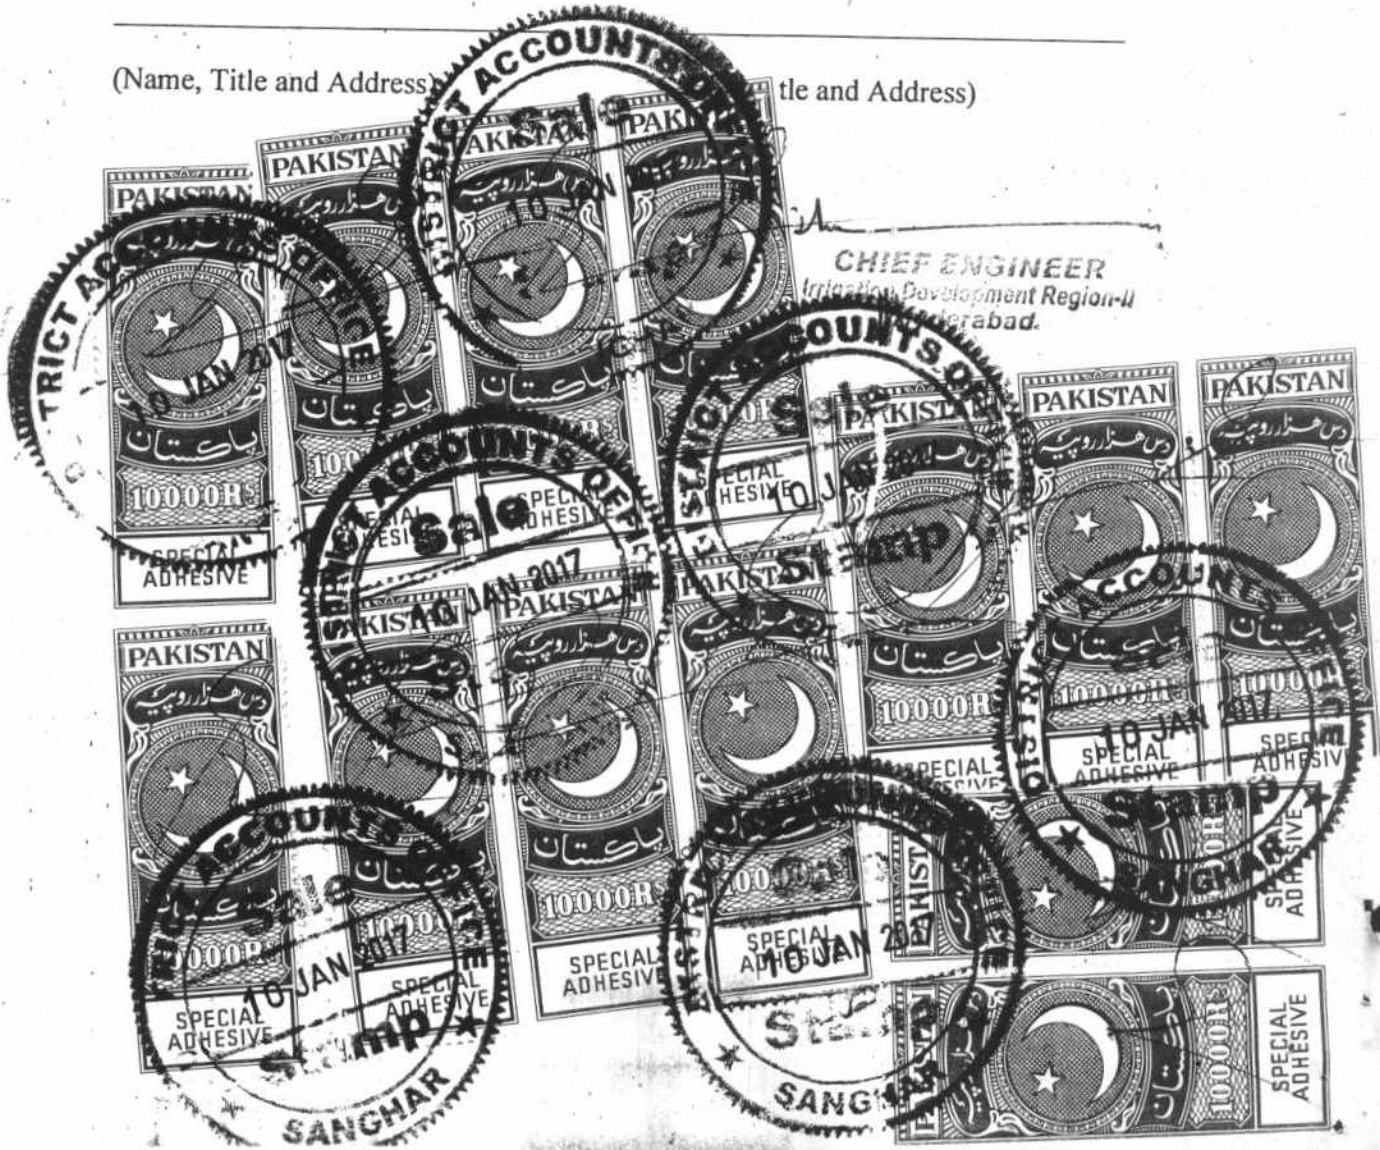
  
Project Director  
Chotani Reservoir Project Circle  
@ Sanghar

Witness:

Witness:

(Name, Title and Address)

(Name, Title and Address)



NAME OF SCHEME CONSTRUCTION OF CIVIL WORK OF MAKHI FARASH LINK CANAL PROJECT (CHOTIARI PHASE-II),  
FOR WATER SUPPLY TO THAR COAL FROM RD 104+000 TO 208+000, IN CHOTIARI RESERVOIR  
(I), DIVISION, SANGHAR

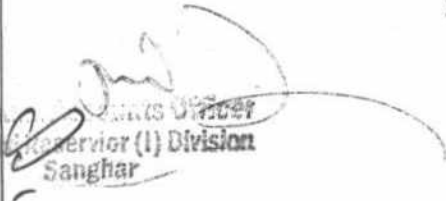
NAME OF WORK WORK FROM RD 171+400 TO RD 208+000


Package-03

Position of Estimate		Position of Tender	
<b>Schedule-B</b>		<b>Schedule-B</b>	
Schedule Items	Rs. 170245310	Schedule Items	Rs. 170245310
Non-Schedule Items	Rs. 1052662	39.45% Above	67161775
Add Cartage	Rs. 36354075	<u>Total Rs.</u>	<u>237407085</u>
Total	Rs. 207652047	Add Non Schedule Item	Rs. 1052662
		<b>Amount of Tender Cost</b>	<b>Rs. 238466448</b>

T.C - Estimate Cost x 100  
Estimate Cost

238466448 - 207652047 x100      14.83%  
207652047


  
Assistant Director  
Chotiari Reservoir (I) Division  
Sanghar

  
ASSISTANT DIRECTOR  
Sindh Building Control Authority  
Hyderabad

  
EXECUTIVE ENGINEER  
Chotiari Reservoir (I) Division  
Sanghar

  
PROJECT DIRECTOR/SE  
Chotiari Reservoir Project Circle  
Sanghar

*As recommended by procurement committee the lowest bid quoted by M/s Govind Ram 14.83% above the estimated cost is hereby approved.*

  
CHIEF ENGINEER  
Irrigation Development Region-II  
Hyderabad.

**PACKAGE-III**

**Bill No.1: Remodeling & Lining of Hashim Chaniho Distry (44+530 RDs)**

Sr. No.	Description of Items	Unit	Quantity	Rate	Amount (Rs.)
1	Jungle clearance and removing within 100ft (light) Provisional Quantity (page NO.100 Item No.4 (a)) from SCR	% Sft	2,227,500	75.63	168,466
2	Earth work excavation in irrigation channels drains etc. Dressed to design section grades and profiles excavated material disposed off and dressed within 50ft lead (page 1, item No.5)	% Cft	3,044,406	2,420.00	7,367,463
3	Borrow pit excavation undressed lead upto 100ft (a) ordinary soil, (page No.1, item 3a)	% Cft	8,400,374	2,117.50	17,787,793
	Carriage of 100 cft/5 tons of all materials like stone, aggregate. Spawl, coal, lime, surki etc B.G rail fastening points and crossing bridge girders. Pipes sheets rail, MS bars etc or 1000 Nos. bricks 10"x5"x3" or 1000 Nos. tiles 12"x6"x2" or 150 cft timber 100 moulds of fuel wood by truck or any other means owned by the contractor 1 miles. (Page No. 1/1-1 schedule of carriage)	% cft	4,768,758	407.00	19,408,845
4					
5	Earth work compaction soft ordinary hard soil (b) laying earth work in 6" layers leveling dressing & watering for compaction etc complete. (page No.4, item No.13(b))	% Cft	8,400,374	354.00	2,973,733
6	Earth work compaction by sheep feet roller and power roller with optimum moisture content (a) for 85 modified AASHO density (Page No. 2 item 7c highways schedule)	% Cft	8,400,374	1,445.58	12,143,413
7	Formation dressing and preparing sub-grade (ch;12 p-74 item no.1)				
	a) In Bed	% Sft	433,472	326.70	1,416,151
	b) On slope	% Sft	623,700	453.75	2,830,039
8	Cement Plaster 1.5" thick ratio (1:6)				
	(a) On bed	% Sft	433,491	1,800.12	7,803,350
	(b) On slope	% Sft	623,803	2,011.87	12,550,115
9	Cement concrete lining ratio 1:2:4 (ch: 12 p-75 item-11, 2012)				
	a) In Bed	% Cft	142,974	13,789.32	19,715,197
	b) On slope	% Cft	205,744	14,227.95	29,273,103
10	Erection and removal of centering for RCC or C.C plain work for Partal wood 2nd Class. (ch: 4 P-18 item-19 2012)				
	b (ii) Vertical	% Sft	133,650	3,127.41	4,179,783
11	Elastomeric sealant. PC-I Sanctioned of MFLC Project (Chotyari Phase II for water supply to thar coal september 2014)	Rft	105,494	9.83	1,037,010
				<b>TOTAL</b>	<b>138,654,460</b>

**ESTIMATE CONSTRUCTION OF HEAD REGULATOR OF MOHAMMAD HASHIM CHANIHO  
DISTRY AT RD 171+400**

Bill No.2 Head Regulator of Mohammad Hashim Chaniho Distry @RD 171+400 of MFLC

S. No.	ITEM	UNIT	QUANTITY	RATE	AMOUNT
1	Borrow pit excavation undressed lead upto 100 ft (a) ordinary soil (page No. 1, item No.3a)	%Cft	156,800.00	2,117.50	332,024.00
2	Carriage of 100 cft/5 tons of all materials like stone, aggregate. Spawl, coal, lime, surki etc B.G rail fasteningpoints and crossing bridge girders.Pipes sheets rail, MS bars etc or 1000 Nos.bricks 10"x5"x3" or 1000 Nos. tiles 12"x6"x2" or 150 cft timber 100 moulds of fuel wood by truck or any other means owned by the contractor 1 miles. (Page No. 1/1-1 schedule of carriage)	% Cft	156,800.00	407.00	638,176.00
3	Dressing and levelling of earth work to designed section extc complete. (b) ordinary or hard soil. P-3 item/11-b	%Cft	156,800.00	187.55	29,407.84
4	Earth work excavation irrigation channels drains etc. dressed to designed section & profile excavated material disposed off. & dressed with in 50 ft lead (a) Ordinarysoil (1/5 (a) P-1)	%0 Cft	10,800.00	2,420.00	26,136.00
5	Excavation in foundation of buildings, bridges and other structures i/c dagbelling, dressing, refilling around the structure with excavated earth watering and ramming lead upto one chain and lift upto 5ft (In ordinary soil) (1/18 (b) P-4)	%0 Cft	6,520.00	3,176.25	20,709.15
6	Preparing watering and ramming surface for laying concrete (for head works only),(4/18 P-17)				
	(a) Horizontal Floor X-Regulator and Head Regulator	% Sft	420.00	228.09	957.98
	(b) Glacis & crest X-Regulator and Head Regulator	% Sft	420.00	347.88	1,461.10
	(c) Inverted filter X-Regulator and Head Regulator	% Sft	720.00	105.88	762.34
7	C.C plain including placing, compacting, finishing and curing complete (including screening and washing of stone aggregate without shuttering). Ratio 1:4:8 (4/5 (i) P-15)	% Cft	919.70	11288.75	103,822.63
8	Erection and removal of centering for RCC or plain cement concrete works of Partial wood (2nd-class). (P-17/4-19 b ii).	% Sft	205.36	3127.41	6,422.45
9	Precast cement concrete soild or face block (1:2:4) i/c cost of templates (4/9 P-16)	Cft	2304.00	146.06	336,522.24
10	Erecting and fixing in position precast cement concrete or stone slab in roof or lintels etc. lift: upto 20ft i/c all charge (4/6 (c) P-16)	Cft	2304.00	41.77	96,238.08
11	Reinforced cement concrete work in all labour and material except the cost of steel reinforcement and its labour for bending and binding which will be paid seperately. This rate also i/c all kinds of forms, moulds, lifting, shuttering, curing, rendering and finishing the exposed surface. (i/c screening and washing of shingle). (a) RCC work in roof slabs, beams, columns, rafts, lintels and other structural members laid in situ or pre-cast laid in position complete in all respects. (ii) Ratio 1:1.5:3, (P-16 item 6a (ii))	Cft	8,913.24	349	3,110,719.89
12	Fabrication of mild steel reinforcement for cement concrete ilc cutting, bending, laying in position, Making joints 2nd fastenings ilc cost of binding wire. (also includes removal of rust from bars) (b) using deformed bars Grade 60. (4/8 (b) P-16)	Cwt	557.08	5001.7	2,786,333.75
13	Providing expansion joints in concrete work of 9" wide corugated PVC waterstop (with bulb) i.c soldering cost of material and labour etc complete. (R. Miscellaneous B.Expantion and Construction joints item no 1 P.No.56 PHE).	Rft	72.00	86	6,192.00



**ESTIMATE CONSTRUCTION OF HEAD REGULATOR OF MOHAMMAD HASHIM CHANIHO  
DISTRY AT RD 171+400**

Bill No.2 Head Regulator of Mohammad Hashim Chaniho Distry @RD 171+400 of MFLC

S. No.	ITEM	UNIT	QUANTITY	RATE	AMOUNT
14	Stone pitching including sub base with hammer dressed stone on surface laid in course i/c carriage of material within three chains lead. (6/23 P-30)	% Cft	14,095.00	5377.63	757,976.95
15	Stone filling dry hand packed as filling behind retaining walls or in pitching and aprons.(6/16, P-30)	% Cft	10,720.00	2684	287,724.80
16	Boring for tube well in all water bearing soils from ground level up to 100 ft.. or 30.50 meter depth i/c sinking and with drawing of casing pipe (e) 200 mm (8" dia) i/c Head Regulator of Haji Jan Muhammad Hingorjo-II Distry. (S.I No.1 (e) P.No.41 PHE)	P/Rft	700	535	374,500.00
17	Supplying and Fixing M.S Bail plug i/c Head Regulator of Haji Jan Muhammad Hingorjo-II Distry.(S.I No.8b P.No.43 PHE)	No	10	2607	26,070.00
18	Supplying & fixing local make coir strainers of approved quality complete (b) for 150mm (6" dia). i/c Head Regulator of Haji Jan Muhammad Hingorjo-II Distry. (S.I No.10 (b) P.No.44 PHE)	Rft	300	647	194,100.00
19	Supplying and installing M.S blind pipe 3/16" (5mm) thick of best and approved quality and make i/c necessary socket etc complete. i/c Head Regulator of Haji Jan Muhammad Hingorjo-II Distry. (S.I No.11 (b) P.No.44 PHE)	Rft	400	762.5	305,000.00
20	Full hire charges of the pumping set per day inclusive of the wage of driver and asistant fuel or electric energy plate froms required for placing pumps etc at lower depths with suction and delivery pipes for pumping out water found at various depth from trenches i/c the cost of erection and dismantling after completion of the job (iii) Hire charges of pumping set of upto10 HP pumping out water i/c Head Regulator of Haji Jan Muhammad Hingorjo-II Distry. (S.I No.23 (ii) P.No.77 PHE).	Days	600	2500	1,500,000.00
21	Note:- For working the pump beyond 8 hours the following payment shall be made. The hire of the pumping set itself being for 24 hours.(i) For Pumping set of upto P-Hour 10 H.Pi/c Head Regulator of Haji Jan Muhammad Hingorjo-II Distry.(S.I No.23 (i) P.No.77 PHE).	Hours	9600	250	2,400,000.00
22	Designing fabrication /manufacturing & erection of double screw vertical gate of MS sheets 8mm, girders, channel angles of required size with operational device and plateform etc painting only i/c cartage of fabricated / manufactured components from W/shop to site of work etc complete with one year period of operation (Market Rate).	Sft	66.00	21000	1,386,000.00
<b>TOTAL</b>					<b>14,727,257</b>

**PACKAGE-III**

Bill No.3: Double cell culvert @ (RD 16+195 of Hashim Chaniho Distry)

Sr. No.	Description of Items	Unit	Quantity	Rate	Amount (Rs.)
1	Excavation in foundation of buildings, bridges and other structure lie dag belling, dressing, refilling around the structures with excavated earth watering and ramming lead upto one chain and lift upto 5ft (b) (in ordinary soil) (1/18 (b) P-4)	% Cft	5264.00	3176.25	16,720
2	Cement concrete plain i/c finishing and curing complete i/c screening and eashing of stone aggregate without shuttering. Ratio 1:3:6 (P-16 item no. 5 h)	% Cft	781.20	12595	98,392
3	Reinforced cement concrete work in all labour and material except the cost of steel reinforcement and its labour for bending and binding which will be paid seperately. This rate also i/c all kinds of forms, moulds, lifting, shuttering, curing, rendering and finishing the exposed surface. (i/c screening and washing of shingle). (a) RCC work in roof slabs, beams, columns, rafts, lintels and other structural members laid in situ or pre-cast laid in position complete in all respects. (ii) Ratio 1:1.5:3, (P-16 item 6a (ii)	P.Cft	2860.75	349	998,402
4	fabrication of mild steel r/f for cement concrete ilc cutting, bending, laying in position, making joints 2nd fastening ilc cost of binding wire. (also include removal of rust from bars) (b) using deformed bars grade 60. (4/8 (b) p-16)	P.Cwt	178.80	5001.7	894,288
5	Providing " expention joint in concrete work of 9" wide corugated PVC waterstop (with bulb) i.c soldering cost of material and labour etc complete. (Page 56, PHE, Miscellaneous B 2)	P.Rft	60	86	5,160
6	Borrow pit excavation undressed lead upto 100ft (a) ordinary soil, (page No.1, item 3a)	%0 Cft	3000	2117.5	6,353
7	Carriage of 100 cft/5 tons of all materials like stone, aggregate. Spawl, coal, lime, surki etc B.G rail fasteningpoints and crossing bridge girders. Pipes. sheets rail, MS bars etc or 1000 Nos. bricks 10"x5"x3" or 1000 Nos. tiles 12"x6"x2" or 150 cft timber 100 moulds of fuel wood by truck or any other means owned by the contractor 1 miles. (Page No. 1/1-1 schedule of carriage)	% Cft	3000	407	12,210
8	Earth work compaction soft ordinary hard soil (b) laying earth work in 6" layers leveling dressing & watering for compaction etc complete. (page No.4, item No.13(b))	%0 Cft	3000	354	1,062
				<b>TOTAL</b>	<b>2,032,586</b>



**PACKAGE-III**

**Bill No.4: Single cell culvert @ (RD 38+580 of Hashim Chaniho Distry)**

Sr. No.	Description of Items	Unit	Quantity	Rate	Amount (Rs.)
1	Excavation in foundation of buildings, bridges and other structure lie dag belling, dressing, refilling around the structures with excavated earth watering and ramming lead upto one chain and lift upto 5ft (b) (in ordinary soil) (1/18 (b) P-4)	% Cft	3,936	3,176.25	12,502
2	Cement concrete plain i/c finishing and curing complete i/c screening and eashing of stone aggregate without shuttering. Ratio 1:3:6 (P-16 item no. 5 h)	% Cft	483	12,595.00	60,872
3	Reinforced cement concrete work in all labour and material except the cost of steel reinforcement and its labour for bending and binding which will be paid seperately. This rate also i/c all kinds of forms, moulds, lifting, shuttering, curing, rendering and finishing the exposed surface. (i/c screening and washing of shingle). (a) RCC work in roof slabs, beams, columns, rafts, lintels and other structural members laid in situ or pre-cast laid in position complete in all respects. (ii) Ratio 1:1.5:3, (P-16 item 6a (ii)	P.Cft	1,689	349.00	589,374
4	fabrication of mild steel r/f for cement concrete ilc cutting,bending, laying in position,making joints 2nd fastening ilc cost of binding wire.(also include removal of rust from bars) (b) using deformed bars grade 60. (4/8 (b) p-16)	P.Cwt	106	5,001.70	527,914
5	Providing " expention joint in concrete work of 9" wide corugated PVC waterstop (with bulb) i.c soldering cost of material and labour etc complete. (Page 56, PHE, Miscellaneous B 2)	P.Rft	50	86.00	4,300
6	Borrow pit excavation undressed lead upto 100ft (a) ordinary soil, (page No.1, item 3a)	% Cft	2,500	2,117.50	5,294
7	Carriage of 100 cft/5 tons of all materials like stone, aggregate. Spawl, coal, lime, surki etc B.G rail fasteningpoints and crossing bridge girders.Pipes sheets rail, MS bars etc or 1000 Nos.bricks 10"x5"x3" or 1000 Nos. tiles 12"x6"x2" or 150 cft timber 100 moulds of fuel wood by truck or any other means owned by the contractor 1 miles. (Page No. 1/1-1 schedule of carriage)	% Cft	2500	407	10,175
8	Earth work compaction soft ordinary hard soil (b) laying earth work in 6" layers leveling dressing & watering for compaction etc complete. (page No.4, item No.13(b))	% Cft	2,500	354.00	885
<b>TOTAL</b>					<b>1211315</b>

### PACKAGE III

Bill No.5 Earth work of MFLC from RD 171+400 to 174+000

Sr. No.	Description of Items	Unit	Quantity	Rate	Amount (Rs.)
1	Jungle clearance and removing within 100ft (light) Provisional Quantity (page NO.100 item No.4 (a) from SCR 2012	%0 Sft	650,000	75.63	49,160
2	Ploughing (3 Times) (P-109/I-41)	P Acre	18	1,769.63	31,688
3	Earth work excavation in irrigation channels drains etc. Dressed to design section grades and profiles excavated material disposed off and dressed within 50ft lead (page 1, item No.5)	%0 Cft	894,099	2,420.00	2,163,720
4	Rehandling of earth work (b) Upto 50' (page No.2 item No.9(b)). 3 leads = 3 X 1058.75 = 3176.25	%0 Cft	894,099	3,176.25	2,839,882
5	Extra for wet earth Provisional Quantity (page No.4, item No.15)	%0 Cft	178,820	1,058.75	189,326
6	Borrow pit excavation undressed lead upto 100ft (a) ordinary soil, (page No.1, item 3a)	%0 Cft	1,076,868	2,117.50	2,280,268
7	Carriage of 100 cft/5 tons of all materials like stone, aggregate. Spawl, coal, lime, surki etc B.G rail fastening points and crossing bridge girders. Pipes sheets rail, MS bars etc or 1000 Nos. bricks 10"x5"x3" or 1000 Nos. tiles 12"x6"x2" or 150 cft timber 100 moulds of fuel wood by truck or any other means owned by the contractor 1 miles. (Page No. 1/1-1 schedule of carriage)	% Cft	861494.64	407	3,506,283
8	Extra for every 50ft additional lead or part thereof. (a) For earth work (soft, ordinary, hard and v.hard) item No.8(a) page No.2 (3 Leads 100.78*3=302.34)	%0 Cft	215,374	302.34	65,116
9	Earth work compaction soft ordinary hard soil (b) laying earth work in 6" layers leveling dressing & watering for compaction etc complete. (page No.4, item No.13(b))	%0 Cft	1,970,967	354.00	697,722
10	Earth work compaction by sheep feet roller and power roller with optimum moisture content (a) for 85 modified AASHO density (Page No. 2 item 7c highways schedule)	%0 Cft	1,970,967	1,445.58	2,849,190
<b>TOTAL</b>					<b>14,672,355</b>

Name of  
Scheme:-

**MAKHI FARASH LINK CANAL PROJECT (CHOTIARI PH/SE-II )  
FOR WATER SUPPLY TO THAR COAL**

Name of  
Work:-

**PACKAGE-III: CIVIL WORK OF MAKI LINK CANAL PROJECT (CHOTIARI PHASE-II), FOR  
WATER SUPPLY TO THAR COAL FROM RD 171+400 TO 208+000, IN CHOTIARI  
RESERVOIR (I), DIVISION, SANGHAR**

<b>Sr. No.</b>	<b>Description</b>	<b>Amount (Rs)</b>
1	Remodeling & Lining of Hashim Chaniho Distry (44+550 RDs)	138,654,460
2	Khipro Escape/Outfall @ (RD 207+500)	14,727,257
3	Double cell culvert @ (RD 16+195 of Hashim Chaniho Distry)	2,032,586
4	Single cell culvert @ (RD 38+580 of Hashim Chaniho Distry)	1,211,315
5	Earth Work Kakahu Escape Channel (Earthwork only without lining 6 RDs)	14,672,355
<b>Total Amount in Words:-</b>		<b>171,297,973</b>

(INTEGRITY PACT)  
DECLARATION OF FEES, COMMISSION AND BROKERAGE ETC  
PAYABLE BY CONTRACTORS  
(FOR CONTRACTS WORTH RS. 10.00 MILLION OR MORE)

Contract No. Sindh/10/CRP/1144 Dated 8/1/16

Contract Value: Rs: 238466448/-

Contract Title: CONSTRUCTION OF CIVIL WORK OF MAKHI FARASH LINK CANAL PROJECT (CHOTIARI PHASE-II), FOR WATER SUPPLY TO THAR COAL FROM RD 171+400 TO 208+000, IN CHOTIARI RESERVOIR (I), DIVISION, SANGHAR

M/s. Goid Ram hereby declares that it has not obtained or induced the procurement of any contract, right, interest, privilege or other obligation or benefit from Government of Sindh (GoS) or any administrative subdivision or agency thereof or any other entity owned or controlled by it (GoS) through any corrupt business practice.

Without limiting the generality of the foregoing, M/s Goid Ram represents and warrants that it has fully declared the brokerage, commission, fees etc. paid or payable to anyone and not given or agreed to give and shall not give or agree to give to anyone within or outside Pakistan either directly or indirectly through any natural or juridical person, including its affiliate, agent, associate, broker, consultant, director, promoter, shareholder, sponsor or subsidiary, any commission, gratification, bribe, finder's fee or kickback, whether described as consultation fee or otherwise, with the object of obtaining or inducing the procurement of a contract, right, interest, privilege or other obligation or benefit in whatsoever form from, from Procuring Agency (PA) except that which has been expressly declared pursuant hereto.

M/s Goid Ram accepts full responsibility and strict liability that it has made and will make full disclosure of all agreements and arrangements with all persons in respect of or related to the transaction with PA and has not taken any action or will not take any action to circumvent the above declaration, representation or warranty.

M/s: Goid Ram accepts full responsibility and strict liability for making any false declaration, not making full disclosure, misrepresenting facts or taking any action likely to

Goid Ram

defeat the purpose of this declaration, representation and warranty. It agrees that any contract, right, interest, privilege or other obligation or benefit obtained or procured as aforesaid shall, without prejudice to any other rights and remedies available to PA under any law, contract or other instrument, be voidable at the option of PA.

Notwithstanding any rights and remedies exercised by PA in this regard,

*M/s. Goid R Au* ..... agrees

to indemnify PA for any loss or damage incurred by it on account of its corrupt business practices and further pay compensation to PA in an amount equivalent to ten times the sum of any commission, gratification, bribe, finder's fee

or kickback given by *M/s. Goid R Au* .....

as aforesaid for the purpose of obtaining or inducing the procurement of any contract, right, interest, privilege or other obligation or benefit in whatsoever form from PA.

*[Signature]*  
Executive Engineer,  
Chotiari Reservoir (I) Division,  
Sanghar

[Procuring Agency]

*[Signature]*  
[Contractor]