

KARACHI WATER & SEWERAGE BOARD

OFFICE OF THE DIRECTOR (DESIGN & ESTIMATE)

BID EVALUATION REPORT


1	Name of Procuring Agency:	KARACHI WATER & SEWERAGE BOARD
2	Tender Reference No:	KWSB/DPR/2017/187 published in daily "Nawa-e-Waqt", "IMN" & daily "The Nation" "New Sig" dt: 16-12-2017 SPPRA Serial No.35776 LD No.
3	Tender Description/Name of Work/Item:	PROVIDING AND LAYING 225 MM PE PIPE AND INTERCONNECTION FROM 10" DIA LINE TO IMPROVEMENT OF WATER SUPPLY SYSTEM IN SECTOR 32-B & S-AREA KORANGI DIVISION
4	Method of Procurement:	Single Stage (One Envelop)
5	Tender Published:	Through Press & SPPRA Web Site
6	Total Bid Documents Sold:	2 Nos
7	Total Bid Received:	2 Nos
8	Technical Bid Opening Date (if applicable):	N/A
9	No. of Bid Technically Qualified (if applicable)	N/A
10	Bid (s) Rejected:	01 No
11	Financial Bid Opening Date:	09-01-2018

BID EVALUATION REPORT


S#	Name of Firm / Bidder	COST OFFERED BY THE BIDDER	RANKING IN TERMS OF COST	COMPARISON WITH ESTIMATED COST	REASON FOR ACCEPTANCE / REJECTION	REMARKS
1	M/s. Malik & Co.	Rs. 24,30,817/-	1 st Lowest	@0.0003% Below	Pay Order and required documents are attached. P.O # 13448095 dt:09-01-2018 Rs.50,000/- from UBI Model Colony Branch Karachi	Substantially Responsive
2	M/s. Kashif Engineering Works	Rs. 24,97,792/-	2 nd Lowest	@2.755% Above	Bank Guarantee and required documents are attached. B.G.# 845/MC/06/2018 dt:09-01-2018 Rs.50,000/- from UBI Model Colony Br. Karachi	Substantially Responsive


The all concerned bidders are being informed accordingly.


The F.E. Concerned for compliance of Rule-45 of SPPRA 2010 M/s. Malik & Co. declared as the lowest responsive bidder by the Committee and recommended for sanction from Competent Authority.


(Nadeem Ahmed Khan)
D.A.O (Dist. Korangi)
Member / Secretary


(Saif-ur-Haque)
Additional Director Internal
Audit - KMC Member


(Maqsood Ahmed Shaikh)
Superintending Engineer (KMC)
Member


(Waqid Iqbal Siddiqui)
S.E (Dist. Korangi)
Member


(Saifuddin) 10.1.18
Director (Design & Estimate)
Convener

Method of Procurement: Single Stage Single Envelope.

Name of Work: PROVIDING AND LAYING 225 MM PE PIPE AND INTERCONNECTION FROM 10" DIA LINE TO IMPROVEMENT OF WATER SUPPLY SYSTEM IN SECTOR 32-B & S-AREA KORANGI DIVISION

MINUTES OF BID OPENING MEETING.


A meeting of the procurement committee of this department was held on 09-01-2018 for opening the bids received in respect of subject NIT till deadlines of submission. The meeting was attended by all / following members of the procurement committee and the representative of bidders. (Attendance sheet is enclosed).

2. Two bidders submitted their bids till the deadline of submission.
 - i. M/s. Malik & Co.
 - ii. M/s. Kashif Engineering Works
3. The bids were opened at 2:30 P.M in the presence of the above mentioned participants and the rates quoted by bidders were read aloud and encircled by Chairman of the Procurement Committee.


S. No	Name of Firm	Quoted Price	Amount of Bid Security	Pay Order No. / Date
01	M/s. Malik & Co.	Rs. 24,30,816/-	Rs. 50,000/-	P.O # 13448095 dt: 09-01-2018 from UBL Model Colony Branch Karachi
02	M/s. Kashif Engineering Works	Rs. 24,97,792/-	Rs. 50,000/-	Bank Guarantee and required documents are attached. B.G.# 845/MC/06/2018 dt: 09-01-2018 from UBL Model Colony Br. Karachi


4. The bids do not contain any cutting or over-writing.
5. The committee shall examine all the bids as per the qualification / eligibility criteria provided in the bidding document and verify the documents and bid security submitted by the bidders (if required).

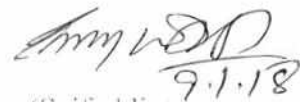
The meeting ended with the vote of thanks to and from the chair.


(Nadeem Ahmed Khan)
D.A.O (Dist. Korangi)
Member / Secretary


(Saif-ul-Haque)
Additional Director Internal
Audit – KMC Member


(Maqsood Ahmed Shaikh)
Superintending Engineer (KMC)
Member

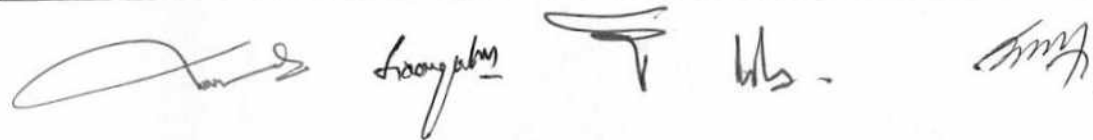

(Wajid Iqbal Siddiqui)
S.E. (Dist. Korangi)
Member


(Saifuddin)
Director (Design & Estimate)
Convener

COMPARATIVE STATEMENT


Name of Work: PROVIDING AND LAYING 225 MM PE PIPE AND INTERCONNECTION FROM 10" DIA LINE
TO IMPROVEMENT OF WATER SUPPLY SYSTEM IN SECTOR 32-B & S-AREA KORANGI DIVISION

Item No	Description of Work	Estimated Cost				M/s.Malik & Co.		M/s.Kashif Engg. Works		
		Quantity	Rate	Per	Amount	Rate	Amount	Rate	Amount	
1	Excavation for pipe line in trenches and pits in all kind of soil of murum i/c trimming and dressing sides to true alignment and shape leveling of beds of trenches to correct level and grade cutting joints holes and disposal of surplus earth within one chain as directed by Engineer Incharge providing fence guards, lights, flags sand temporary crossing for non-vehicular traffic wherever required lift upto 5 ft (1.52 m) and lead upto one chain (30.5m). 0'-5'ft	20000.00	Cft	4650.00	%0Cft	93,000.00	4650.00	93,000.00	4000.00	80,000.00
	5' - 8'ft	8000.00	Cft	5200.00	%0Cft	41,600.00	5200.00	41,600.00	5000.00	40,000.00
2	Providing Laying & Fixing in trenches i/c fitting jointing and testing etc. complete in all respect the high density Polyethylene P.E pipes (HDPE-100) for W/S conforming ISO 4427 DIN-8074 8075 B.S 3580 & PSI 3051 (PN-10) 225 mm	2000.00	Rft	1044.00	P/Rft	2,088,000	1044.00	2,088,000	1100.00	2,200,000
3	Providing & Fixing M.S split collar tee on PRCC pipe of different sizes having width as mentioned against each fabricated with 3/8" thick M.S plate excluding the cost of the neck. It includes the cost of 3/4" thick M.S Square Bars on both ends, 4 Nos 3/4" M.S i/c the cost of nuts, bolts, sealing material etc. with a total wedith as mentioned	2.00	Nos	2800.00	Each	5,600.00	2800.00	5,600.00	3000.00	6,000.00
4	Providing & Fixing 0-9" long 3/8" thick M.S "Neck" to existing M.S pipe or to a split collar tee. It included the cost of fabrication and welding to the split collar tee. Net Weight 15.75 Kgs 8" Dia	2.00	Nos	2804.00	Each	5,608.00	2800.00	5,600.00	3000.00	6,000.00
5	C.I Sluice Valve heavy pattern (Test Pressure 21.0 Kg/sq.com or 300 lb/sq.inch) (Imported). 8 Dia	2.00	Nos	17940.00	Each	35,880.00	17940.00	35,880.00	15000.00	30,000.00
6	Fixing of sluice valve with 2 cast iron tail pieces one end flanged & other with socket i/c the cost of nut, bolts & rubber packing, labour etc complete. 8 Dia	2.00	Nos	2790.00	Each	5,580.00	2790.00	5,580.00	2000.00	4,000.00





**Name of Work: PROVIDING AND LAYING 225 MM PE PIPE AND INTERCONNECTION FROM 10" DIA LINE
TO IMPROVEMENT OF WATER SUPPLY SYSTEM IN SECTOR 32-B & S-AREA KORANGI DIVISION**

Item No	Description of Work	Estimated Cost				M/s. Malik & Co.		M/s. Kashif Engg. Works		
		Quantity	Rate	Per	Amount	Rate	Amount	Rate	Amount	
7	Full hire charges of pumping set per day i/c of wages of driver and assistant fuel or electric energy platform for placing the pump etc at lower depth with suction and delivery pipes for pumping out water found at various depth from trenches including the cost of erection and dismantling after completion of the job. Hire charges of pumping set upto 10 HP pumping out water from 10 ft deep trench	16.00	Days	1500.00	P/Day	24,000.00	1500.00	24,000.00	1500.00	24,000.00
8	Construction of Block Masonry chamber with 24"x24" C.I Cover and frame weight 65 Kg fixed in RCC 1:2:4 slab 6" thick with steel 1/2" dia tor main bars @6" C/C bentup 1/4" dia 8" C.C distribution bars B/M wall set 1:6 cm 6" thick C.C 1:4:8 in foundation 2" thick CC 1:2:4 flooring 1/2" thick 1-0 to al in side wall surfaced top & bottom slab outer side wall surface 1-0 deep upto roof slab i/c M.S footrest 5/8" dia bars at every 2-0 deep i/c curing de-watering excavation refilling & disposal of surplus of earth etc complete. Chamber size 6'x6'x6'	2.00	Nos	28357.00	Each	56,714.00	28357.00	56,714.00	20000.00	40,000.00
9	Refilling the excavated stuff in trenches 6" thick layer i/c watering ramming to full compaction etc complete.	27116.88	Cft	2760.00	%0Cft	74,842.59	2760.00	74,842.59	2500.00	67,792.20
TOTAL QUOTED / CORRECTED COST						2,430,825		2,430,817		2,497,792


(Nadeem Ahmed Khan)
D.A.O (Dist. Korangi)
Member / Secretary


(Saif-ul-Haque)
Addl. Director Internal
Audit KMC - Member


(Maqsood Ahmed Shaikh)
Superintending Engineer (K.M.C)
Member


(Wajid Iqbal Siddiqui)
S.E (Dist. Korangi)
Member


(Saifuddin)
Director (Design & Estimate)
Convener

