

SINDH PUBLIC PROCUREMENT REGULATORY AUTHORITY

CONTRACT EVALUATION FORM

TO BE FILLED IN BY ALL PROCURING AGENCIES FOR PUBLIC CONTRACTS OF WORKS, SERVICES & GOODS

- 1) NAME OF THE ORGANIZATION / DEPTT. Karachi Water and Sewerage Board
- 2) PROVINCIAL / LOCAL GOVT / OTHER Local Government
- 3) TITLE OF CONTRACT Through Web Site
- 4) TENDER NUMBER S.No.17424
Repl. of 12"dia & 8"dia sunk down sewer at LAC-I, 42-A/2, 920 C.C. 685 C.C., Gali 14-D, Mehmoodabad, Jamshed Town (Sewerage).
- 5) BRIEF DESCRIPTION OF CONTRACT
- 6) FORUM THAT APPROVED THE SCHEME Managing Director, KW&SB
- 7) TENDER ESTIMATED VALUE Less than 1.00 Million
- 8) ENGINEER'S ESTIMATE Rs.8,93,334
(For civil works only)
- 9) ESTIMATED COMPLETION PERIOD (AS PER CONTRACT) 25 Days
- 10) TENDER OPENING (DATE & TIME) 11-10-2013 at 2.30 P.M.
- NUMBER OF TENDER DOCUMENTS SOLD 03 Nos.
(Attach list of buyers)
- 12) NUMBER OF BIDS RECEIVED 03 Nos.
- 13) NUMBER OF BIDDERS PRESENT AT THE TIME OF OPENING OF BIDS 03 Nos.
- 14) BID EVALUATION REPORT Attached
(Enclose a copy)
- M/s.Saim & Co.
Address : House No.A-412/208, Millat Town.
- 15) NAME AND ADDRESS OF THE SUCCESSFUL BIDDER Malir Halt, Karachi
- 16) CONTRACT AWARD PRICE Rs.8,92,546/=
- 17) RANKING OF SUCCESSFUL BIDDER IN EVALUATION REPORT
(i.e. 1st, 2nd, 3rd EVALUATION BID). 1st Lowest
- 18) METHOD OF PROCUREMENT USED :- (Tick one)
- | | | |
|---|-------------------------------------|-----------------|
| a) SINGLE STAGE - ONE ENVELOPE PROCEDURE | <input checked="" type="checkbox"/> | Domestic/ Local |
| b) SINGLE STAGE - TWO ENVELOPE PROCEDURE | <input type="checkbox"/> | NIL |
| c) TWO STAGE BIDDING PROCEDURE | <input type="checkbox"/> | NIL |
| d) TWO STAGE - TWO ENVELOPE BIDDING PROCEDURE | <input type="checkbox"/> | NIL |

PLEASE SPECIFY IF ANY OTHER METHOD OF PROCUREMENT WAS ADOPTED i.e. EMERGENCY, DIRECT CONTRACTING ETC. WITH BRIEF REASONS:

19) APPROVING AUTHORITY FOR AWARD OF CONTRACT Managing Director, KW&SB

20) WHETHER THE PROCUREMENT WAS INCLUDED IN ANNUAL PROCUREMENT PLAN?
Yes No

21) ADVERTISEMENT :

i) SPPRA Website
(If yes, give date and SPPRA Identification No.)

Yes	23-9-13 S.No. 17424
No	

ii) News Papers
(If yes, give names of newspapers and dates)

Yes	
No	

22) NATURE OF CONTRACT

Domestic/ Local	<input checked="" type="checkbox"/>	Int.	<input type="checkbox"/>
--------------------	-------------------------------------	------	--------------------------

23) WHETHER QUALIFICATION CRITERIA
WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?
(If yes, enclose a copy)

Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

24) WHETHER BID EVALUATION CRITERIA
WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?
(If yes, enclose a copy)

Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

25) WHETHER APPROVAL OF COMPETENT AUTHORITY WOULD
METHOD OTHER THAN OPEN COMPETITIVE BIDDING?

INED FOR USING A			
Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>

SPPRA
26) WAS BID SECURITY OBTAINED FROM ALL THE BIDDERS?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

27) WHETHER THE SUCCESSFUL BID WAS LOWEST EVALUATED
BID / BEST EVALUATED BID (in case of Consultancies)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

28) WHETHER THE SUCCESSFUL BIDDER WAS TECHNICALLY
COMPLIANT?

Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

29) WHETHER NAMES OF THE BIDDERS AND THEIR QUOTED PRICES WERE READ OUT AT
THE TIME OF OPENING OF BIDS?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

30) WHETHER EVALUATION REPORT GIVEN TO BIDDERS BEFORE THE AWARD OF
CONTRACT?
(Attach copy of the bid evaluation report)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

31) ANY COMPLAINTS RECEIVED
(If yes, result thereof)

Yes	
No	<input checked="" type="checkbox"/>

32) ANY DEVIATION FROM SPECIFICATIONS GIVEN IN THE TENDER NOTICE /
DOCUMENTS (If yes, give details)

Yes	
No	<input checked="" type="checkbox"/>

33) WAS THE EXTENSION MADE IN RESPONSE TIME?
(If yes, give reasons)

Yes	
No	<input checked="" type="checkbox"/>

34) DEVIATION FROM QUALIFICATION CRITERIA
(If yes, give detailed reasons)

Yes	
No	<input checked="" type="checkbox"/>

35) WAS IT ASSURED BY THE PROCURING AGENCY THAT THE SELECTED FIRM IS NOT
BLACK LISTED?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

36) WAS A VISIT MADE BY ANY OFFICER/OFFICIAL OF THE PROCURING AGENCY TO THE
SUPPLIER'S PREMISES IN CONNECTION WITH THE PROCUREMENT? IF SO, DETAILS TO
BE ASCERTAINED REGARDING FINANCING OF SUPPLIER IF ANY: (If yes, enclose a copy)

Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

37) WERE PROPER SAFEGUARDS PROVIDED ON MOBILIZATION ADVANCE PAYMENT IN
THE CONTRACT (BANK GUARANTEE ETC.)?

Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

SPPRA
38) SPECIAL CONDITIONS, IF ANY
(If yes, give Brief Description)

Yes	
No	<input checked="" type="checkbox"/>

Signature & Official Stamp of
Authorized Officer 
MUHAMMAD MANSOOR
Executive Engineer (SEW)-I
Jamshed Town, KW&SB

FOR OFFICE USE ONLY

SPPRA, Block. No.8, Sindh Secretariat No.4-A, Court Road, Karachi
Tele: 021-9205356; 021-9205369 & Fax: 021-9206291

Print

Save

Reset

KARACHI WATER AND SEWERAGE BOARD
OFFICE OF THE EXECUTIVE ENGINEER (SEW)-I (JAMSHED TOWN)
BLOCK-B, KMC MARKET, SINDHI MUSLIM SOCIETY

NO.EE/SEW-I/JT/KW&SB/2013/ 12

DATED :18-11-2013

M/s.Saim & Co.,
House No.A-412/208,
Millat Town, Malir Halt,
KARACHI.

WORK ORDER / L.O.C

SUBJECT :- REPLACEMENT OF 12"DIA & 8"DIA SUNK DOWN SEWER AT
L.A.C.-I, 42-A/2, 920 C.C. 685 C.C. GALI 14-D, MEHMOODABAD,
JAMSHED TOWN (SEWERAGE)-I.

Your Tenders dated 11-10-2013, has been approved by the competent authority, KW&SB, for amounting to Rs.8,92,546/= (Rupees Eight lacs ninety two thousand five hundred forty six only). You are therefore, requested to start the above mentioned works as per design and specification.

The each work is to be completed with 25 days, failing which penalty of Rs.1,500/= per day will be imposed / recovered as per terms and conditions of the contract.

You are further requested to contact the Sub-Engineer, Jamshed Town (Sew)-I, KW&SB, in connection with commencement of supervision for necessary instructions of the works.



EXECUTIVE ENGINEER (SEW)-I
JAMSHED TOWN, KW&SB

Copy to :-

1. The Chief Engineer (South), KW&SB.
2. The Superintending Engineer, Jamshed Town.
3. Budget Office, KW&SB.
4. Asstt. Director (LFA), KW&SB.
5. Office Copy.



S.M. NAJAM Stamp Vendor

License No. 145, Shop No. 1/A, Karim Plaza
Block-14 Civic Centre Gulshan-e-Iqbal, Karachi

S.No. 5168 Date.....

ISSUED TO WITH ADDRESS.....

THROUGH WITH.....

PURPOSE.....

VALUE AS.....


AND.....

CONTRACT AGREEMENT

This **CONTRACT AGREEMENT** made the 18th day of Nov. 2013, between the **Karachi Water & Sewerage Board (KW&SB)**, Government of Sindh, Represented by its Chief Engineer, District South, KW&SB, (hereinafter called the "Employer" which expression shall wherever the context so admits or required to deemed to include their successor) on the one part as first Party **M/S. SAIM & CO.** having their office at House No. A-412/208, Millat Town, Malir Halt, Karachi, Represented by the **MR. SIKANDER ALI BAJWA** hereinafter called the "Contractor" (which expression shall wherever the context so admit or required be deemed to include their Executors. Administrators. Successors and permitted Assignees) on other part as second party.

WHEREAS the Employer is desirous to execute the work By **"REPLACEMENT OF 12" DIA & 8" DIA SUNK DOWN SEWER AT L.A.C-1, 42-A/2, 920 C.C 685 C.C, GALI 14-D, MEHMOODABAD, JAMSHED TOWN (SEW-I)"** Under **KW&SB'S OWN FUNDED PROGRAMME** and has accepted the Tender of the CONTRACTOR for **Rs.8,92,546/= (RUPEES EIGHT LACS NINETY TWO THOUSAND FIVE HUNDRED FORTY SIX ONLY)** for the construction and completion of such WORKS and the remedying of an defects therein.

AND WHEREAS THE CONTRACTOR has already deposited 2% Pay Order for amounting to **Rs.20,200/=**, vide Pay Order No. **9194221**, dated: **25-09-2013**, issued from **Habib Bank Limited, Sindh Secretariat, Branch Karachi**, deposited by the contractor and remaining **8% for amounting to Rs.69,053/=** will be deducted from his bill, the same will be kept with the EMPLOYER till the maintenance period of the work for the due fulfillment of the CONTRACTOR. Further 1% Water Charges will also be deducted from his bill as per Standard Operating Procedure.

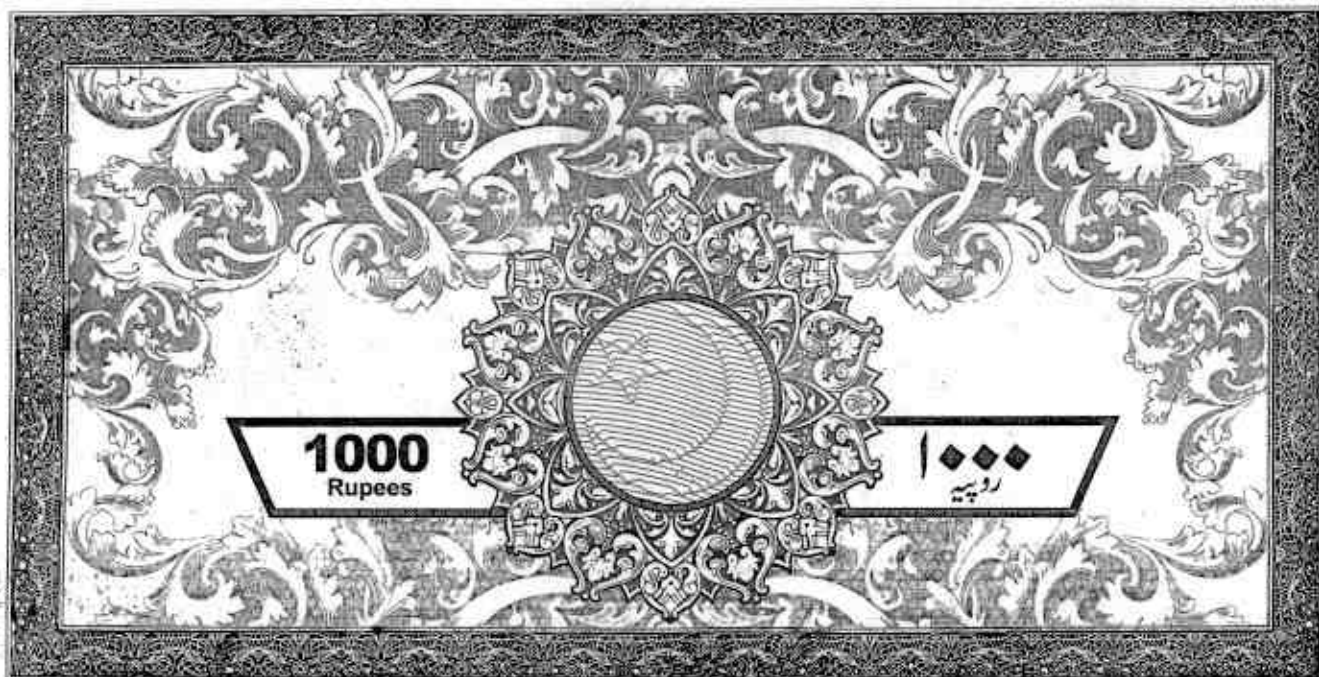

S.M. NAJAM Stamp Vendor

Licence No 146 Shop No 1/A, Karim Plaza
Block-14, Civic Centre Gulshan-e-Iqbal, Karachi

S.No. 51650 Date.....

ISSUED TO WITH ADDRESS ADAM AFZAL

ROUGH WITH ADDRESS No 1568

PRINTED BY.....



VALUE RS..... ATTACHED

ISSUE MEMORANDUM'S SIGNATURE.....

06 NOV 2013

THIS AGREEMENT WITNESSES AS FOLLOWS:-

1. In this Agreement words and expression shall have the same meanings as are respectively assigned to them in the conditions of Contract hereinafter referred to.
2. The following documents which for the purpose of identification have been signed by **MR. SIKANDER ALI BAJWA** on behalf of the contractor and by **MR. MUHAMMAD ARIF, DISTRICT SOUTH, KW&SB**, on behalf the EMPLOYER all of which shall be deemed to form and be read and construed as part of this Agreement.
 - a). This Form of Agreement.
 - b). Employer letter of Acceptance No.CE/DS/W&S/KW&SB/2013/ 04 dated: 18-11-2013.
 - c). The Tender.
 - e). The conditions of the Particular Application - Part-II-A & II-B.
 - e). The General Conditions - Part-I.
 - f). The Drawings.
 - g). The specifications and
 - h). The Priced Bill of Quantities.
3. In consideration of the payments to be made by the EMPLOYER to the CONTRACTOR has hereinafter mentioned, the CONTRACTOR hereby covenants with the EMPLOYER to execute and complete the WORK and to remedy any defects therein and maintaining the same in conformity in all respects with the provisions of the CONTRACT.
4. THE EMPLOYER hereby covenants to pay to the CONTRACT in the manner prescribed by the CONTRACT.

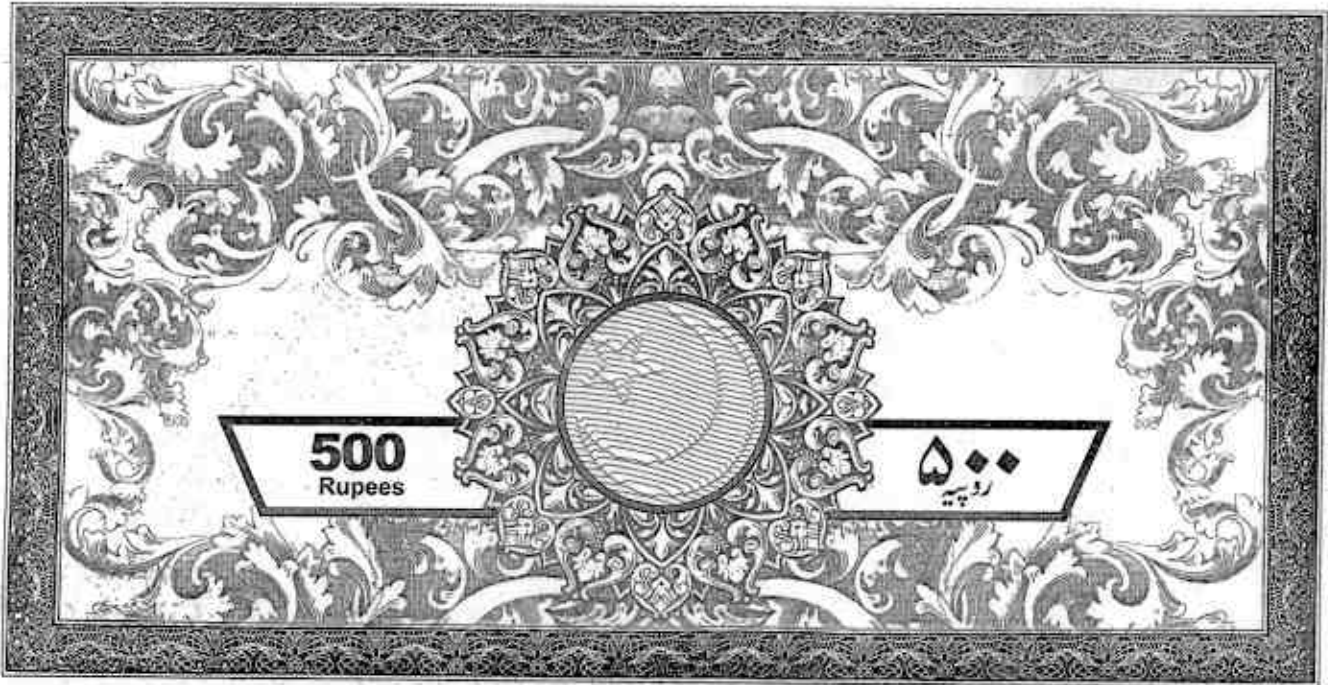

... NAJAM S... Vendor
IN WITNESS WHEREOF, the parties hereto have set their respective hands
and seats the day and year first above written.

4166P
Signed, Sealed and Delivered by the,
L. No. 8823 Advocate
For and on behalf of
EMPLOYER

For and on behalf of
CONTRACTOR

MUHAMMAD ARIF
CHIEF ENGINEER (SOUTH)
KW&SB.

SIKANDER ALI BAJWA
MANAGING PARTNER
M/S. SAIM & CO.

WITNESS OF EMPLOYER


WITNESS OF CONTRACTOR
M/S UNITY ASSOCIATES

AFTAB AHMED CHANDIO
SUPERINTENDING ENGINEER
JAMSHED TOWN DIST. SOUTH
K.W.&.S.B

PROJECT COORDINATOR

MANSOOR AHMED
EXECUTIVE ENGINEER (SEW-I)
JAMSHED TOWN DISTRICT SOUTH
K.W.&.S.B.

M/S. Tooba Enterprises

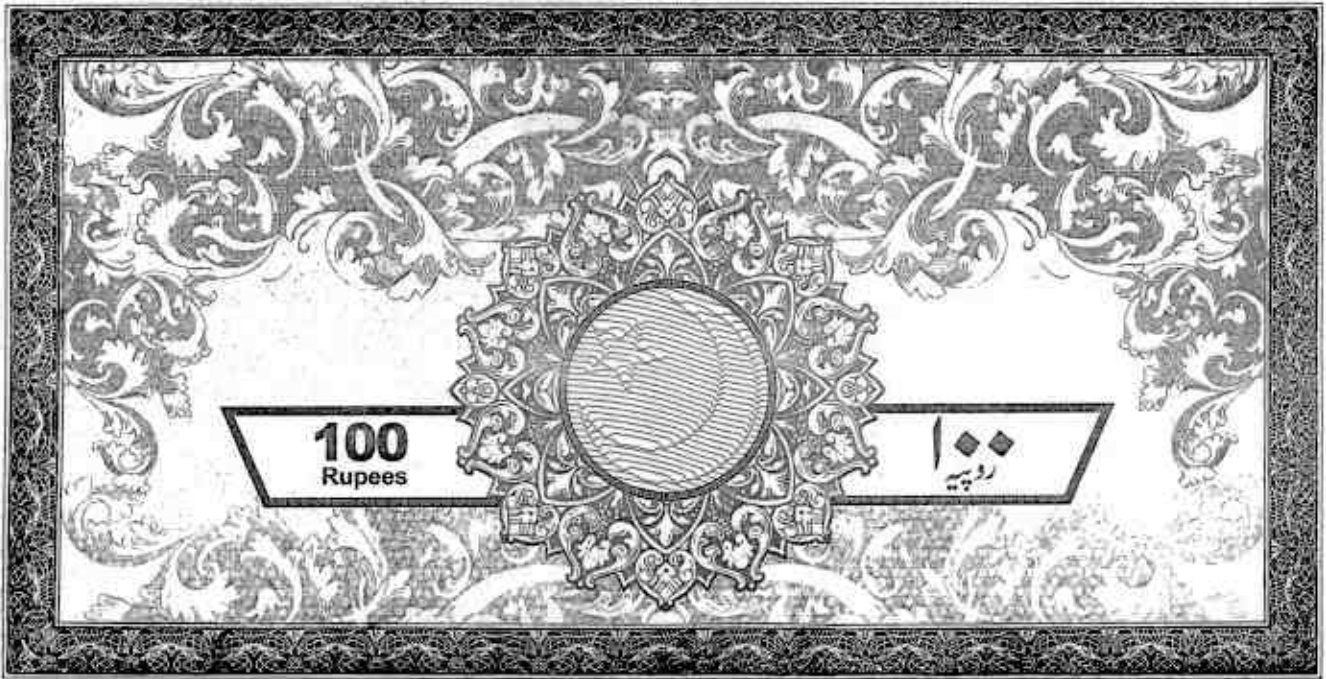

MOHAMMAD SALEEM Startup Center
 Licence No 05, Shop No. 1, Market-Pillar
 Raichan-e-Iqbal, Block-04, Phase-01
 06 NOV 2013
 to M/S. SAIM & CO. Dera
 sent to with Address
 Mohd. Adil, No. 5187, Adampur
 Mohd. Adil, No. 5187, Adampur
 Attached

TO BE UTILIZED ONLY FOR THE WORK OF
REPLACEMENT OF 12" DIA & 8" DIA SUNK
DOWN SEWER AT L.A.C-1, 42-A/2, 920 C.C 685
C.C, GALI 14-D, MEHMOODABAD, JAMSHED
TOWN (SEW-I).


FOR AMOUNTING TO Rs.8,92,546/=

(RUPEES EIGHT LACS NINETY TWO THOUSAND FIVE HUNDRED
FORTY SIX ONLY).

INFAVOUR OF M/S. SAIM & CO.

M/S. SAIM & CO.

EXECUTIVE ENGINEER (SEW-I)
 JAMSHED TOWN, DISTRICT SOUTH
 K.W.&S.B.

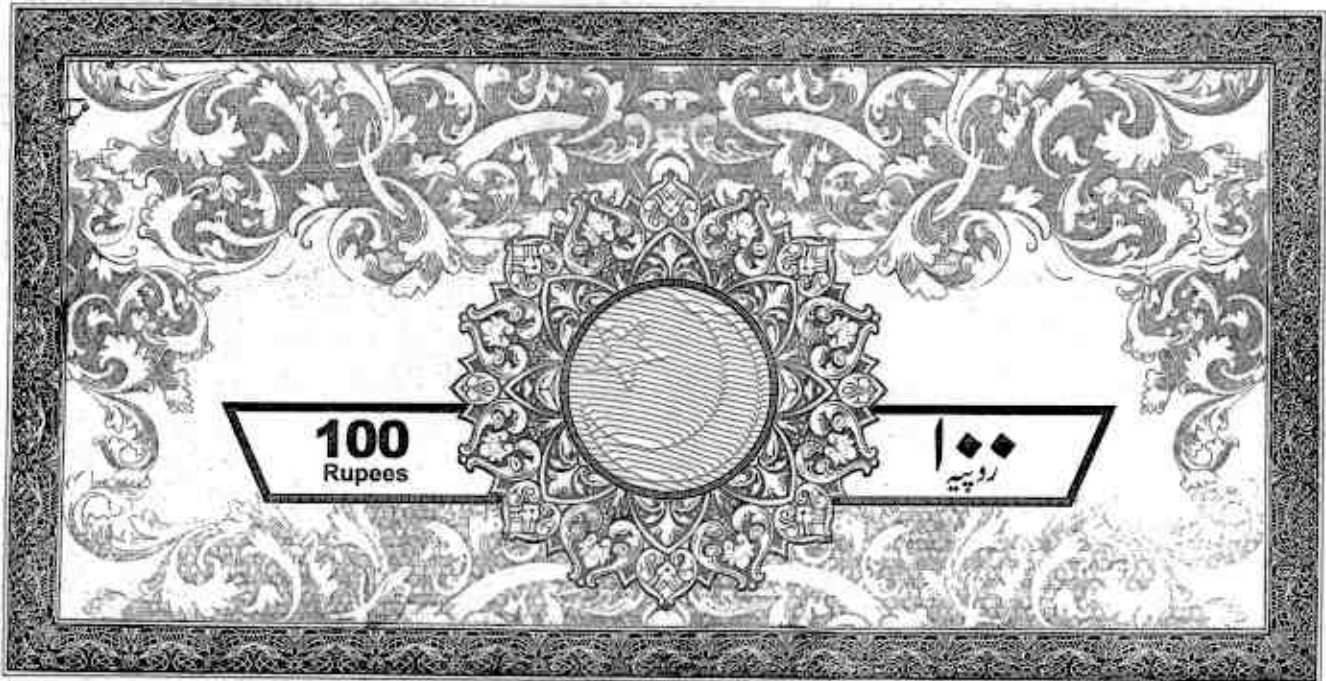

MOHAMMAD SALEEM Stamp Vendor
House No 85, Shop No 1, Khatu Plaza
Dulshan-e-Iqbal, Block-14, Karachi

06 NOV 2013

to
to be used with Address
to be used with Address
to be used with Address
to be used with Address

MOHAMMAD SALEEM
No 85/88 Advocate

TO BE UTILIZED ONLY FOR THE WORK OF


**REPLACEMENT OF 12" DIA & 8" DIA SUNK
DOWN SEWER AT L.A.C-1, 42-A/2, 920 C.C 685
C.C, GALI 14-D, MEHMOODABAD, JAMSHED
TOWN (SEW-I).**

FOR AMOUNTING TO Rs.8,92,546/=

**(RUPEES EIGHT LACS NINETY TWO THOUSAND FIVE HUNDRED
FORTY SIX ONLY).**

INFAVOUR OF M/S. SAIM & CO.


M/S. SAIM & CO.


EXECUTIVE ENGINEER (SEW-I)
JAMSHED TOWN, DISTRICT SOUTH
K.W.&S.B.

KARACHI WATER AND SEWERAGE BOARD
OFFICE OF THE EXECUTIVE ENGINEER (SEW)-I, JAMSHED TOWN
BLOCK-B, KMC MARKET, SINDHI MUSLIM SOCIETY.

No.EE/Sew-I/NIT/Acctt/2013/07

Dated :23-09-2013

XEN'S Cell # 0321-3863610

NOTICE FOR INVITING TENDER THROUGH SPPRA WEBSITE.

SEALED TENDERS ARE INVITED FROM INTERESTED CONTRACTORS FOR THE BELOW MENTIONED WORK.


1.	Name of Work	REPLACEMENT OF 12"DIA AND 8"DIA SUNKDOWN SEWER AT L.A.C.-I, 42-A/2, 920 C.C., 685 C.C., GALI 14-D, MEHMOODABAD, JAMSHED TOWN (SEWERAGE)-I.
2.	Eligibility of Contractor	Bidder / Contractor should be have NTN No.
3.	Tender can be purchased.	Tender can be purchased from the Office of the Accounts Officer (Revenue), KW&SB at KW&SB Head Office, at 1 st Floor Old KBCA Annexe Building, Gulshan-e-Iqbal, Karachi, between 9.00 A.M. to 1.00 P.M. during working day.
4.	Bid Security	2% of bid security of the quoted bid / cost in shape of pay order / Bank Draft, in favour of KW&SB.
5.	Note	No tender will be issued on the date of opening of tender.
6.	Tender Fee	Rs.1,500/= Non refundable in shape of pay order in favour of KW&SB.
7.	Last date of issuing	W.e.f 1 st hoisting upto, 10-10-2013, during working hours from from 9.00 a.m to 1.00 p.m.
8.	Date of receiving & Opening of Tenders	11-10-2013 at 2.00 P.M. and will be opened at 2.30 P.M.
9.	Place of Opening	Tender will be opened by the Procurement Committee-I, at the Office of THE Chief Engineer (IP&D), KW&SB at 9 th Mile Karsaz, Shahrah-e-Faisal, Karachi.
10.	Source of Funding	KW&SB OWN FUNDED
11.	Scope of work	Improvement of sewerage system.

Note :- The Procuring Agency may reject all or any bids subject to the relevant provision of SPPRA Rules-2010.

Tender can be seen on SPPRA's website.

In case of any unforeseen situation resulting in closure of office on the date of opening or if Government declares Holiday, the tender shall be submitted / opened on the next working day at the same time & venue.

KARACHI WATER & SEWERAGE BOARD


SYED MUQAHFAM ALI
Executive Engineer(SEW)-I
Jamshed Town, K.W.&S.B.

11

50

Business (Hill Sand)

10 x 100 x 3 x 1 = 2000 Pa

same modulus of the

KARACHI WATER & SEWERAGE BOARD

OFFICE OF THE CHIEF ENGINEER (IP&D)

BID EVALUATION REPORT

1	Name of Procuring Agency	KARACHI WATER & SEWERAGE BOARD
2	Tender Reference No	SPPRA Serial No.17424 I.D No. /2013
3	Tender Description/Name of Work/Item	REPLACEMENT OF 12"DIA AND 8"DIA SUNKDOWN SEWER AT L.A.C -1, 42-A/2, 920 C.C., 685 C.C., GALI 14-D, MEHMOODABAD, JAMSHED TOWN (SEWERAGE)-I
4	Method of Procurement	Single Stage (One Envelop)
5	Tender Published	Through Web Site
6	Total Bid Documents Sold	3 Nos
7	Total Bid Received	3 Nos
8	Technical Bid Opening Date (if applicable)	N/A
9	No. of Bid Technically Qualified (if applicable)	N/A
10	Bid (s) rejected	Nil
11	Financial Bid Opening Date	11/10/2013

12 Bid Evaluation Report

S #	NAME OF FIRM OR BIDDER	COST OFFERED BY THE BIDDERS	RANKING IN TERMS OF COST	COMPARISON WITH ESTIMATED COST	REASON FOR ACCEPTANCE/ REJECTION	REMARKS
1	M/s. Saim & Co.	Rs. 892,546/-	1st Lowest	@ 0.0881% Below	Substantially Responsive	P.O # 9194221 Dt: 25/09/2013 Rs. 20,000/- HBL Sindh Secret Br.
2	M/s. Honest Associates	Rs. 896,820/-	2nd Lowest	@ 0.3902% Above	Substantially Responsive	P.O # 55097 Dt: 09/10/2013 Rs. 20,000/- Sindh Bank University Road Br.
3	M/s. A.H Enterprises	Rs. 901,586/-	3rd Lowest	@ 0.9237% Above	Substantially Responsive	P.O # 5544092 Dt: 27/09/2013 Rs. 20,000/- Bank Al-Habib Main Hall Br.

The all concerned bidder are being informed accordingly.

The E.E Concerned for compliance of rule 45 of SPPRA 2010 M/s. Saim & Co. declared as the lowest responsive bidder by the Committee and recommended for Sanction from Competent Authority.

(Muhammad Nawaz Khan)
Accounts Officer (South)
Member/Secretary

(Saif-ul-Haque)
Additional Director Internal
Audit - KMC Member

(Maqsood Ahmed Shaikh)
Superintending Engineer (KMC)
Member

(Muhammad Arif)
Chief Engineer (South)
Member

(Abdul Rahim Khattai)
Chief Engineer (IPD),
(Convener)

KARACHI WATER AND SEWERAGE BOARD
OFFICE OF THE EXECUTIVE ENGINEER (SEWERAGE)-I, (JAMSHED TOWN),
BLOCK-B, KMC MARKET, SINDHI MUSLIM SOCIETY

SUBJECT :- REPLACEMENT OF 12" DIA AND 8" DIA SUNKDOWN SEWER AT L.A.C. 42-A/2, 920 C.C., 685 C.C., GALI 14-D, MEHMOODABAD, JAMSHED TOWN (SEWERAGE)-I.

Estimated Cost On Item Rate Basis
 Tender Cost Rs.1,500/=
 Time Limit. 25 Days.
 Penalty Rs.1,500/=

Issued to M/s. Saim & Co.
 Pay Order No. 80 Dt. 7-10-2017

[Signature]
TENDER CLERK
 Finance Department
 K. W. & S.B.

Issuing Authority

S.NO.	DESCRIPTION	QTY.	RATE		PER UNIT / ITEM	AMOUNT IN RUPEES
			Rupees in Figures.	Rupees in Words		
1.	Dismantling and removing road metalling.	3900 Cft	604/0	Six hundred four	%Cft	23556/0
2.	Excavation for pipe line in trenches, and pits in all kind of soils of murum i/c trimming and dressing sides to true alignment and shape leveling of beds of trenches to correct level and grade, cutting joint holes and disposal of surplus earth within a one chain as directed by Engineer Incharge. Providing fence guards, lights, flags and temporary crossings for non-vehicular traffic where ever required lift upto 5 ft. (1.52m) and lead upto one chain (30.5m). i. Lift 0'-5' ii. Lift 5'-8'	15600 Cft 600 Cft	4652/0 5200/0	Four thousand six hundred fifty two Five thousand two hundred	%0Cft %0Cft	72571/0 3120/0
3.	Providing M/H 4ft inside with CI frame (15 kg) and 5 feet clear depth 1:2:4 cast in situ in 9 inch thick wall 1:4:8 cement concrete in 6ft dia and 6" inch thick in foundation 1:2:4 c.c in benching, 1/2" thick cement plastering with 1:3 cement mortar on inside wall and surface of channel/benching i/c making required Nos of main and branch channels, 3/4" dia bar footrest at 12" C/C i/c cost of excavation of all kinds of soil, backfilling and disposal of excavated stuff etc complete, as per design and instruction of the Engineer Incharge.	10 Nos.	14530/0	Fourteen thousand five hundred thirty	Each	145300/0

(Continued on Next page)

SUBJECT :- REPLACEMENT OF 12"DIA AND 8"DIA SUNKDOWN SEWER AT L.A.C.-I, 42-A/2, 920 C.C., 685 C.C., GALI 14-D, MEHMOODABAD, JAMSHED TOWN (SEWERAGE)-I.

S.NO.	DESCRIPTION	QTY.	RATE		PER UNIT / ITEM	AMOUNT IN RUPEES
			Rupees in Figures.	Rupees in Words		
(3-i)	Add/deduct per ft depth.	(+) 5 Ft	2540/-	Two thousand five hundred forty	P.Ft.	12700/-
4.	Full hire charges of the pumping set per day i/c of wages of driver and Assistant fuel or electric energy plate forms required for placing pumps etc at lower depth with suction and delivery pipe for pumping out water found at various depth from trenches i/c the cost of erection and dismantling after completion of the job. Hire charges of pumping set upto 10 HP pumping out water from 10 ft deep trench.	32 Days.	1500/-	One thousand five hundred	P/Day	48000/-
5.	Providing, laying RCC pipes with (Rubber Ring Joint and fitting in trench i/c cutting, fitting and jointing with rubber ring i/c testing with water to specified pressure. i. 200 mm(8"dia) ii. 300 mm(12" dia)	1200 Rft 300 Rft	206/- 366/-	Two hundred six Three hundred six	P.Rft. P.Rft.	247200/- 109800/-
6.	Manufacturing and supplying of 21 inch diameter RCC Manhole Covers cast in 1:2:4 cement concrete ratio (50% graded bajri and 50% crush) 3"inch deep at centre reinforced with 1/2" dia M.S. tor bars with 4" c/c welded to a 3/16" thick 2" wide M.S.Flat and tow hook of 3/8" dia tor bars including compacting, curing and transportation within 10 miles etc. 21" dia.	40 Nos.	912/-	Nine hundred twelve	Each	36480/-

(Continued on Next page)

SUBJECT :- REPLACEMENT OF 12"DIA AND 8"DIA SUNKDOWN SEWER AT L.A.C 42-A/2, 920 C.C., 685 C.C., GALI 14-D, MEHMOODABAD, JAMSHED TOV (SEWERAGE)-I.

S.NO.	DESCRIPTION	QTY.	RATE		PER UNIT / ITEM	AMOUNT IN RUPEES
			Rupees in Figures.	Rupees in Words		
7.	Manufacturing & supplying of RCC ring slab 21"dia (inside) and 36"dia outside 7.5 width and 6"thick i/c 3/8"dia tor steel bars two concentric rings with 3/8" dia 8 Nos cross linked bars welded and two sunk type hooks, casted in 1:1 1/2:3 concrete with embedded 15 Kg C.I frame in perfect position i/c transportation charges for an average lead of 20KM per trip from casting yard to town offices (A minimum of 25 slabs per trip will be transported).	20 Nos.	1904 1/2	One thousand nine hundred four	Each	38080 1/2
8.	Making connection with the existing manhole i/c the cost of cutting hole in wall, making them good in C.C 1:2:4 and making required channel etc complete.	10 Nos.	180 1/2	one hundred eighty	Each	1800 1/2
9.	Cement concrete plain including placing compacting, fitting finishing and curing, complete (including screening and washing at stone aggregate without shuttering. Ratio 1:2:4	298.98 Cft	144.70 1/2	Fourteen hundred four and 70/100	%Cft	43143 1/2
10.	Refilling the excavated stuff in trenches 6" thick layer i/c watering ramming to full compaction etc. complete.	13382.65 Cft	2765 1/2	Two thousand seven hundred sixty five and 1/2	%Cft	37003 1/2
11.	Carriage of 100 Cft/ 5 Tons of all materials like stone aggregate, spawal, coal, lime, surkhi etc: B.G. Rail fastening points and crossing bridge, Girders, Pipes, Sheets Rail, M.S. Bars etc: or 1000 Nos: bricks, 10"x6"x2" or 150 Cft or timber or 100 Maunds of fuel wood by trucks or any other means owned by the contractos. Upto 5 th Mile.	2817.35 Cft	710 1/2	Seven hundred ten and 1/2	%Cft	20003 1/2
12.	Sand Haro or any other source Sand of the same modulus of the Fineness (Hill Sand).	1800 Cft	2420 1/2	Two thousand four hundred twenty and 1/2	%Cft	43560 1/2

(Continued on Next page)

SUBJECT :- REPLACEMENT OF 12"DIA AND 8"DIA SUNKDOWN SEWER AT L.A.C.-I, 42-A/2, 920 C.C., 685 C.C., GALI 14-D, MEHMOODABAD, JAMSHED TOWN (SEWERAGE)-I.

S.NO.	DESCRIPTION	QTY.	RATE		PER UNIT / ITEM	AMOUNT IN RUPEES
			Rupees in Figures.	Rupees in Words		
13	Providing and fixing C.I.Frame including cost of material etc.	100 Kg	681/-	681 rup	P.Kg.	6800/-
14	Hire charges of steel shuttering both side for the construction of main hole (circular) at side i/c its erection in proper position and removal after concrete etc complete.	35 Ft.	981/-	Ninty eight	P.Ft	3420/-
TOTAL RS: 892546/-						

EXECUTIVE ENGINEER (SEW)-I
JAMSHED TOWN, KW&SB.

I/We hereby quoted bid amount of Rs. 892546/- = (Rupees Eight Lakhs and Two Thousand Five Hundred Forty Six Only.)

Note :- All existing SPPRA Rule will be abide.

Signature of Contractor

Address. H/No A417 / 208 Millat Town Mallat Halt Karachi

- 1. Tender RECEIVED IN SEALED COVER/UNSEALED COVER
- 2. Rate Quoted @ Rs. 892546/-
- 3. Cutting or over Writing is not Found ~~Found~~
- 4. Pay Order Attached / Not Attached

P. O. No. 9154221

DT: 25/9/13

Rs. 20000/- = HBL Sindh Sect.

AD.D.I.A (KMC)

S.E.(KMC)

C.E.(S&D) C.E.(F&D)



KARACHI WATER & SEWERAGE BOARD

OFFICE OF THE CHIEF ENGINEER (IP&D)

BID EVALUATION REPORT


1	Name of Procuring Agency	KARACHI WATER & SEWERAGE BOARD
2	Tender Reference No	SPPRA Serial No.17424 I.D No /2013
3	Tender Description/Name of Work/Item	REPLACEMENT OF 12"DIA AND 8"DIA SUNKDOWN SEWER AT L A C -1, 42-A/2, 920 C.C., 685 C.C., GALI 14-D, MEHMOODABAD, JAMSHED TOWN (SEWERAGE)-I
4	Method of Procurement	Single Stage (One Envelop)
5	Tender Published	Through Web Site
6	Total Bid Documents Sold	3 Nos
7	Total Bid Received	3 Nos
8	Technical Bid Opening Date (if applicable)	N/A .
9	No. of Bid Technically Qualified (if applicable)	N/A .
10	Bid (s) rejected	Nil
11	Financial Bid Opening Date	11/10/2013

12 Bid Evaluation Report

S #	NAME OF FIRM OR BIDDER	COST OFFERED BY THE BIDDERS	RANKING IN TERMS OF COST	COMPARISON WITH ESTIMATED COST	REASON FOR ACCEPTANCE/ REJECTION	REMARKS
1	M/s. Saim & Co.	Rs. 892,546/-	1st Lowest	@ 0.0881% Below	Substantially Responsive	P.O # 9194221 Dt: 25/09/2013 Rs 20,200/- HBL Sindh Secret Br.
2	M/s. Honest Associates	Rs. 896,820/-	2nd Lowest	@ 0.3902% Above	Substantially Responsive	P.O # 58097 Dt: 09/10/2013 Rs 20,000/- Sindh Bank University Road Br.
3	M/s. A.H Enterprises	Rs. 901,586/-	3rd Lowest	@ 0.9237% Above	Substantially Responsive	P.O # 5844092 Dt: 27/09/2013 Rs.20,000/- Bank Al-Habib Malir Halt Br.

The all concerned bidder are being informed accordingly.

The E.E Concerned for compliance of rule 45 of SPPRA 2010 M/s. Saim & Co declared as the lowest responsive bidder by the Committee and recommended for Sanction from Competent Authority.


(Muhammad Nawaz Khan)
Accounts Officer (South)
Member/Secretary


(Saif-ul-Haque)
Additional Director Internal
Audit - KMC Member


(Maqsood Ahmed Shaikh)
Superintending Engineer (KMC)
Member


(Muhammad Arif)
Chief Engineer (South)
Member


(Abdul Rahim Khattai)
Chief Engineer (IPD),
(Convener)

COMPARATIVE STATEMENT
NAME OF WORK: REPLACEMENT OF 12"DIA AND 8"DIA SUNKDOWN SEWER AT L.A.C.-1, 42-A/2, 920 C.C., 685 C.C., GALI 14-D, MEHMOODABAD, JAMSHED TOWN (SEWERAGE)-I

S.No	Description of Work	Engineer's Estimate			M/s. Saim & Co.		M/s. Honest Associates		M/s. A.H Enterprises		
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount		
1	Disassembling and removing road mantling and pits in all kind of soils of murrum i/c trimming and dressing sides to true alignment and shape leveling of beds of trenches to correct level and grade, cutting joint holes and disposal of surplus earth within a one chain as directed by Engineer incharge. Providing fence guards, lights, flags and temporary crossings for non-vehicular traffic where ever required lift upto 5 ft. (1.52m) and lead upto one chain(30.5m).	3900.00	605.00	% Ch	23,595.00	604.00	23,556.00	608.00	23,712.00	610.00	23,790.00
2	Providing MH 4ft inside with CI frame (15 kg) and 5 feet clear depth 12.4 cast in situ in 9 inch thick wall 14.8 cement concrete in 6ft dia and 6" inch thick in foundation 1:2.4 c/c in ben chng. W' thick cement plastering with 1:3 cement mortar on inside wall and surface of channel/benching i/c making required Nos of main and branch channels. Y4" dia bar footrest at 12" C/C i/c cost of excavation of all kinds of soil, backfilling and disposal of excavated stuff etc complete as per design and instruction of the Engineer incharge.	15600.00	4,650.00	% 0 Ch	72,540.00	4,652.00	72,571.20	4,655.00	72,618.00	4,660.00	72,696.00
		500.00	5,200.00	% 0 Ch	3,120.00	5,200.00	3,120.00	5,300.00	3,180.00	5,400.00	3,240.00
3	Add/deduct per ft depth	10.00 Nos	14,529.29	Each	145,292.90	14,530.00	145,300.00	14,500.00	145,000.00	14,510.00	145,100.00
		5.00 ft	2,538.62	P/ft	12,693.10	2,540.00	12,700.00	2,545.00	12,725.00	2,550.00	12,750.00

11/11/2011
 11/11/2011

COMPARATIVE STATEMENT

NAME OF WORK: REPLACEMENT OF 12"DIA AND 8"DIA SUNKDOWN SEWER AT L.A.C.-1, 42-A/2, 920 C.C., 685 C.C., GALLI 14-D, MEHMOODABAD, JAMSHED TOWN (SEWERAGE)-I

S.No	Description of Work	Engineer's Estimate			M/s. Saim & Co.		M/s. Honest Associates		M/s. A.H Enterprises		
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount		
4	Full hire charges of the pumping set per day i/c of wages of driver and Assistant fuel or electric energy plate forms required for placing pumps etc at lower depth with suction and delivery pipe for pumping out water found at various depth from trenches i/c the cost of erection and dismantling after completion of the job. Hire charges of pumping set upto 10 HP pumping out water from 10 ft deep trench.	32.00 Day	1,500.00	P/Day	48,000.00	1,500.00	48,000.00	1,510.00	48,320.00	1,515.00	48,480.00
5	Providing, laying RCC pipes with (Rubber Ring Joint and fitting in trench i/c cutting, fitting and jointing with rubber ring i/c testing with water to specified pressure. 200 mm (8" dia) 300 mm (12" dia)	1200.00 Rft 300.00 Rft	206.00 367.00	P/Rft P/Rft	247,200.00 110,100.00	206.00 366.00	247,200.00 109,800.00	208.00 368.00	248,600.00 110,400.00	210.00 370.00	252,000.00 111,000.00
6	Manufacturing and supplying of 21 inch diameter RCC Manhole Covers cast in 1:2:4 cement concrete ratio (50% graded ball and 50% crush) 3"inch deep at centre ramp forced with 1/2" dia M.S. tor bars with 4" c/c welded to 23/16" thick 2" wide M.S. Flat and low hook of 3/8" dia tor bars including compacting, curing and transportation within 1.0 miles etc. 21 dia	40.00 Nos.	913.03	Each	36,545.20	912.00	36,480.00	916.00	36,600.00	916.00	36,540.00

21 dia

COMPARATIVE STATEMENT
NAME OF WORK: REPLACEMENT OF 12"DIA AND 8"DIA SUNKDOWN SEWER AT L.A.C.-1, 42-A/2, 920 C.C., 685 C.C., GALLI 14-D, MEHMOODABAD,
JAMSHED TOWN (SEWERAGE)-I

S.No	Description of Work	Engineer's Estimate			M/s. Salm & Co.		M/s. Honest Associates		M/s. A.H Enterprises		
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount		
7	Manufacturing & supplying of RCC ring slab 21" dia (inside) and 36" dia outside 7.5' width and 6" thick i/c 3/8" dia for steel bars two concentric rings with 3/8" dia 8 Nos cross linked bars welded and two sunk type hooks, casted 1:1 1/2:3 concrete with embedded 15 Kg C.I frame in perfect position i/c transportation charges for an average lead of 20KM per trip from casting yard to town offices (A minimum of 25 slabs per trip will be transported).	20.00 Nos	1,905.60	Each	38,132.00	1,904.00	38,080.00	1,905.00	38,100.00	1,915.00	38,300.00
8	Making connection with the existing manhole i/c the cost of cutting hole in wall, making them good in C.C 1:2:4 and making required channel etc Complete.	10.00 Nos	180.00	Each	1,800.00	180.00	1,800.00	182.00	1,820.00	185.00	1,850.00
9	Cement concrete plain including placing compacting, fitting, finishing and curing complete (including screening and washing at stone aggregate without shattering Ratio 1:2:4	298.98 CH	14,429.25	% CH	43,140.57	14,430.00	43,142.81	14,435.00	43,157.76	14,440.00	43,172.71
10	Refilling the excavated stuff in trench 6" thick layer i/c water ramming to full Compaction etc complete	13382.65 CH	2,760.00	% CH	36,936.11	2,765.00	37,003.03	2,765.00	37,003.03	2,775.00	37,136.85
11	Carriage of 1.00 CH/ 5 Tons of all materials like stone aggregate, spawal, coal, lime, sukhi etc B.G Rail fastening points and crossing bridge Girders, Pipes, Sheets Rail, IS Bars etc. or 1000 Nos ricks 10"x6"x2" or 150 CH of timber or 100 Maunds of fuel wood by trucks or any other means owned B264+by the contractor upto 5th Mile	2817.35 CH	714.26	% CH	20,124.05	710.00	20,003.19	715.00	20,144.05	725.00	20,425.79

m/in/b

COMPARATIVE STATEMENT
NAME OF WORK: REPLACEMENT OF 12" DIA AND 8" DIA SUNKDOWN SEWER AT L.A.C.-1, 42-A/2, 920 C.C., 685 C.C., GALLI 14-D, MEHMOODABAD, JAMSHED TOWN (SEWERAGE)-I

S.No	Description of Work	Engineer's Estimate			M/s. Saim & Co.		M/s. Honest Associates		M/s. A.H Enterprises		
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount		
12	Sand Haro or any other source and of the same modulus of the Fineness (Hill Sand).	1800.00	2,425.00	% CH	43,650.00	2,420.00	43,560.00	2,430.00	43,740.00	2,435.00	43,830.00
13	Providing and fixing C.I frame i/c cost of material etc	100.00	70.00	P/Kg	7,000.00	68.00	6,800.00	72.00	7,200.00	75.00	7,500.00
14	Hire charge of steel shuttering both side for the construction of main hole (circular) at side i/c its erection in proper position and removal after concrete etc complete	35.00	99.00	P/ft	3,465.00	98.00	3,430.00	100.00	3,500.00	105.00	3,675.00
Total Quoted / Corrected Cost					893,333.93		892,546.23		896,819.84		901,586.35
Say					893,334		892,546		896,820		901,586

Revised
 14/10/2011
 (Muhammad Nawaz Khan)
 Accounts Officer (South)
 Member/Secretary

(Saif-ul-Haque)
 Additional Director Internal
 Audit - KMC Member

(Muhammad Arif)
 Chief Engineer (South)
 Member

(Abdul Rahim Khatt)
 Chief Engineer (IPD),
 (Convener)

(Magsood Ahmed Shaikh)
 Superintending Engineer
 (KMC)