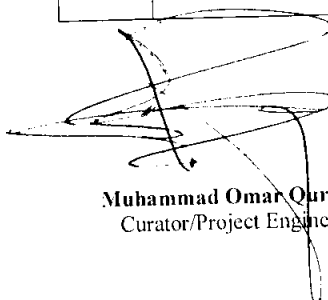



BID EVALUATION REPORT


1. Name of Procuring Agency: Directorate of Archaeology & Museums, Culture, Tourism and Antiquities Department, Government of Sindh.
2. Tender Reference No: I/1/ALL/SINDH/2014/
3. Tender Description / Name of work/Item: Protection, Preservation and Promotion of Protected Archaeological Sites and Monuments in Sindh (GSR No.140)
4. Method of Procurement: Single Stage Two Envelope
5. Tender Published: Daily The News (22-05-2014).
Print & Electronic Media (SPPRA ID No. & New papers names with dates)
6. Total Bid documents Sold: 03 Nos.
7. Total Bids Received: 03 Nos.
8. Technical Bid Opening date: 06-06-2014
(if applicable)
9. No. of Bid technically qualified (if applicable): 03 Nos.
10. Bid(s) Rejected: 0 No.
11. Financial Bid Opening date: 09-06-2014
12. Bid Evaluation Report:


(Comparative Statement Attached)


S.No.	Name of Firm or Bidder	Cost offered by the bidder In (Rs.)	Ranking in terms of cost	Comparison with Estimated cost	Reasons for acceptance / rejection	Remarks
	1	2	3	4	5	6
A-	M/s.Waliullah Bhutto	Schedule Items=537,988/- Non-schedule Item=83,963,044/-	1 st Lowest	Within PC-I Estimated Cost	--	--
B-	M/s.Hizbullah Bhutto	Schedule Items=717,318/- Non-schedule Item=84,490,574/-	2 nd Lowest	--	--	--
C-	M/s.Saif Enterprises	Schedule Items=784,566/- Non-schedule Item=84,685,915/-	3 rd Lowest	--	--	--


Muhammad Omar Qureshi
Curator/Project Engineer

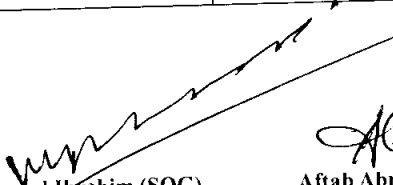
Muhammad Ibrahim (SOG)
Excise and Taxation


Aftab Abro (Dy.Dir)
Information & Arch. Deptt.


Muhammad Aslam
Deputy Director
(P)/Project Director

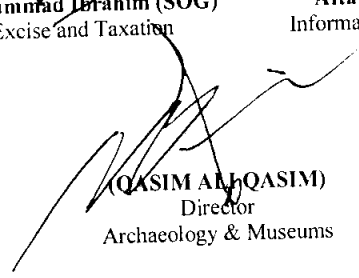
(QASIM ALI QASIM)
Director
Archaeology & Museums

PROTECTION, PRESERVATION AND PROMOTION OF PROTECTED ARCHAEOLOGICAL SITES AND MONUMENTS IN SINDH (GSR NO.140)


COMPARATIVE STATEMENT (Technical)


Tender Opened on 6TH JUNE, 2014


S.No.	Criteria	Points in Each Area	Name of Bidders with Points Obtained in Each Area		
			M/s.Saif Enterprises	M/s.Waliullah Bhutto	M/s.Hizbullah Bhutto
1	Documentary evidence of work executed/works in progress and certificate of satisfactory completion of work.	20	15	18	15
2	List of Machinery and equipment available with documentary evidence of its ownership	10	10	10	10
3	Premises / offices at Karachi and other places in Sindh/ Pakistan.	10	5	10	5
4	Registration with Income Tax Department (NTN Certificate)	10	10	10	10
5	Registration with Sales Tax Department (GST Certificate)	5	0	0	0
6	Registration with PEC in specialized category as required.	15	15	15	15
7	BIO-DATA of Professional (Civil Engineers & Architects) and key staff.	10	0	0	0
8	Undertaking an affidavit that firm is not involved in any litigation nor blacklisted in any Department /Authority/Body.	10	10	10	10
9	Average annual turnover for last 3 years.	10	10	10	10
	TOTAL:-	100	75	83	75


Minimum Qualifying Marks 70

Qualified Qualified Qualified


Muhammad Omer Qureshi
 Curator
 C.T & A. Department

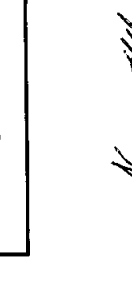
Aftab Abro
 Deputy Director
 Info. & Archives Deptt.


Muhammad Ibrahim
 Section Officer (G)
 Excise & Taxation Department

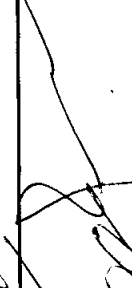

Qasim Ali Qasim
 Director, Arch. & Museums
 C.T & A. Department


PROTECTION, PRESERVATION AND PROMOTION OF PROTECTED ARCHAEOLOGICAL SITES AND MONUMENTS IN SINDH
(GSR.NO.140)


COMPARATIVE STATEMENT
Tender Opened on 9th June, 2014 (Financial Proposal)


Item	Description	Unit	Quantity	M/s.Saif Enterprises		M/s.Walullah Bhutto		M/s.Hizbullah Bhutto	
				Rate	Amount	Rate	Amount	Rate	Amount
1	Excavation in foundation of building bridges and other structures including gag-belling dressing refilling around structure with excavated earth watering and ramming lead up-to 5 ft.	Cft	6700	3,554.38	23,814	3,554.38	23,814	3,554.38	23,814
2	Cement Concrete brick or stone ballast 1 1/2" to 2" gauge 1:4:8	Cft	1666	9,416.28	156,875	9,416.28	156,875	9,416.28	156,875
3	Cement Concrete Plain including placing compacting finishing and curing, complete including screening and washing of stone aggregate without shuttering 1:3:3	Cft	6222	14,265.90	887,624	14,265.90	887,624	14,265.90	887,624
4	R.C.C Work in slab, beams, columns, rafts, lintels and other structural members in all respect ratio 1:2:4 90 lbs cement 2 Cft Sand 4 Cft Shingle 1/8" to 1/4"	Cft	1698	337.00	572,226	337.00	572,226	337.00	572,226
5	Fabrication of mild steel reinforcement for cement concrete including cutting bending lying in position, making joints and fastening including cost of binding wire also includes removal of rust from bars.	Cwt	102.68	5,001.70	513,575	5,001.70	513,575	5,001.70	513,575
6	Colour Wash	Sft	10176	859.90	87,503	859.90	87,503	859.90	87,503
			Add% Above/Below	2,241,618	2,241,618	2,241,618	32% Above	2,241,618

* We obtained 3 Tenders from different bidders. In this connection the rates quoted by M/s.Walullah Bhutto, Opposite, Public Library, Bahaz Chowk, Shikarpur are found lowest which

 **Aftab Abro (Dy.DIR)**
 Information & Arch. Deptt
 Govt. of Sindh

 **Muhammad Qasim**
 Director (Arch & Heritag)
 C.T & A. Department

 **Muhammad Aslam**
 Deputy Director (P)
 PDMI & E Cell

 **Muhammad Qasim**
 Director (Arch & Heritag)
 C.T & A. Department


Item	Description	Unit	Quantity	M/s. Saif Enterprises		M/s. Waliullah Bhurtto		M/s. Hizbullah Bhurtto	
				Rate	Amount	Rate	Amount	Rate	Amount
	NON SCHEDULE ITEMS								
1	FOR BARBED WIRE FENCING Providing & Fixing galvanized barbed wire fencing (with 4 points) to the post of any description complete with hooks and binding wire etc complete.	Rft	52928	1,380	73,040,640	1,369	72,458,432	1,378	72,934,784
2	Making & Fixing Steel Grated Doors with 1/16" thick sheeting including angle iron frame 2" x 2" x 3/8" and 3/4" square bars 4" centre to centre with locking arrangement including painting etc, complete with all accessories.	Sft	270	1,310	353,700	1,298	350,460	1,305	352,350
	INDICATION, DIRECTOR AND NOTICE BOARD								
1	Providing and Fixing Indication, Descriptive and Notice Boards at Sites.								
a	Indication and Description Board 2" dia G.I.Pipe size 4 1/2" x 4"	Nos.	20	46,500	930,000	44,000	880,000	45,500	910,000
b	Notice Board 1 1/2" dia G.I.Pipe Size 3" x 1 1/2"	Nos.	40	35,500	1,420,000	33,600	1,344,000	34,000	1,360,000
	CONSERVATION WORK								
1	Taking out with great care of bulged out and deteriorated burnt brick masonry laid in mud mortar in foundation, basement, plinth and ground floor. The useable material should be stacked at suitable place and un-service material should be removed from the site as per direction of the Engineer In-charge.	Cft	17890	4,490	803,261	4,472	800,041	4,480	801,472
2	Sundried Brick masonry with sun dried bricks tiles 10" x 7" x 1 1/2" thick laid in mud mortar in the core of fortification wall. The joints of old and new masonry work should be associated with proper care.	Cft	13537	15,923	2,155,497	15,896	2,151,842	15,904	2,152,924
3	Underpinning with mud mortar with burnt brick of special size tiles (11" x 9" x 2") with carefully according to the original. The joints of old and new masonry work should be associated with proper care.	Cft	6420	24,950	1,601,790	24,930	1,600,506	24,932	1,600,634
4	Underpinning exactly similar to the original the very decay and undermined burnt brick tile work with new burnt brick tiles laid in lime Chiroli mortar. The size of tile should be used as original at site. The joints of old and new masonry work should be associated with proper care.	Cft	3460	46,280	1,601,288	46,256	1,600,458	46,260	1,600,596






Item	Description	Unit	Quantity	M/s. Saif Enterprises		M/s. Waheedullah Bhutto		M/s. Hizbulillah Bhutto	
				Rate	Amount	Rate	Amount	Rate	Amount
5	Country brick masonry with 1st Class burnt brick tiles of special size 10" x 7" x 1 1/2" laid in lime mortar with special care to ensure the proper and mud core of the fortification wall by allowing the header courses of the inner face of the new country brick masonry to project into the core of the wall to a length of about 5" and (ii) the maintenance of original architectural features viz. machicolations etc. of the fortification wall. The bricks should be laid in the same bond and mortar joints should be same thickness and further recessed about 1/2" thick back from the face. The new work must in no way affect or alter the original look of the fortification wall that existed before its brick lining disintegrated and collapsed. This also included exposure of the buried original undisturbed outer edges of the brick lining of the fortification wall before the future country brick masonry is commenced.	Cft	3519	47,125	1,658,329	47,100	1,657,449	47,110	1,657,801
6	Water tightening of top of the fortification wall by laying two course of 1st class burnt brick tiles size 10" x 7" x 1 1/2" laid in lime mortar over a single layer of polythene sheet of 500 gauge (.005 inch or 0.13 mm thick). This also includes flush pointing with lime slurry etc. complete. Cleaning, removing loose and surplus material from the site as per direction of engineer in-charge.	Sft	3883	28,880	1,121,410	28,840	1,119,857	28,844	1,120,013
Total Rs.					84,685,915		83,963,044		84,490,574


* We obtained 3 Tenders from different bidders. In this connection the rates quoted by M/s. Waheedullah Bhutto, Opposite, Public Library, hahaz Chowk, Shikarpur are found lowest which may please be approved.




Aftab Abro (Dy. DIR)
 Information & Arch. Deptt
 Govt. of Sindh

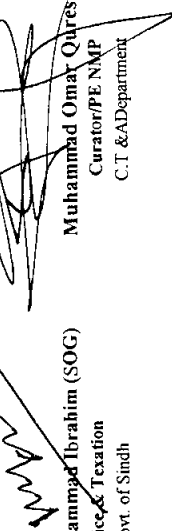


Muhammad Ibrahim (SOG)
 Excise & Taxation
 Govt. of Sindh

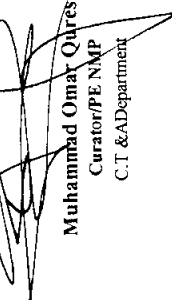

Muhammad Omar Qureshi
 Curator/PE NMP
 C.T & AD department



Muhammad Aslam
 Deputy Director (P)
 PDMI & E Cell

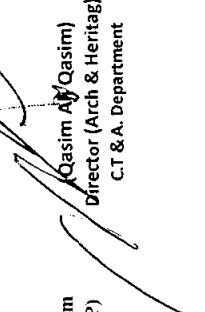

Qasim Ali Qasim
 Director (Arch & Heritage)
 C.T & A. Department