

KARACHI WATER & SEWERAGE BOARD

OFFICE OF THE CHIEF ENGINEER (IP&D)

BID OPENING REPORT

1	Name of Procuring Agency	KARACHI WATER & SEWERAGE BOARD
2	Tender Reference No	KWSB/DPR/2013/125 published in i) Jahan Pakistan in Pakistan Observer on dated. 15-11-2013 and iii) Nawai Waqat on dated. 17-11-2013 and SPPRA Serial No 18034 I.D No. /2013
3	Tender Description/Name of Work/Item	REPLACEMENT OF 16" DIA MS WATER LINE AT QASBA MOOR UC NO.8 AND 10" DIA, 6" DIA & 4" DIA UPVC WATER LINE AT DIFFERENT PLACES IN UC-NO.4 FOR IMPROVEMENT OF WATER SUPPLY IN SAID AREAS SITE TOWN.
4	Method of Procurement	Single Stage (One Envelope)
5	Tender Published	Through Web Site / press
6	Total Bid Documents Sold	02 Nos
7	Total Bid Received	02 Nos
8	Technical Bid Opening Date (if applicable)	N/A
9	No of Bid Technically Qualified (if applicable)	N/A
10	Financial Bid Opening Date	9/12/2013

S #	NAME OF FIRM OR BIDDER	COST OFFERED BY THE BIDDERS	RANKING IN TERMS OF COST	REMARKS
1	M/s S O H Construction Co.	Rs. 1,938,585/-	1st Lowest	P.O # 6577632 Dt: 05-12-2013 Rs. 39,000/- HBL Rizwa Society Nazimabad Ktr Br
2	M/s Riz & Co	Rs. 1,942,457/-	2nd Lowest	P.O # 57600091 Dt: 05-12-2013 Rs. 40,000/- Sunni Bank - Chashma & Jhal Br

M/s S O H Construction Co declared as the lowest responsive bidder

ARSHAD ALI
Accounts Officer (West)
Member/Secretary

SAIF-UL-HASSAN
Additional Director Internal
Audit - KMC Member

MARSOOD AHMED
Superintending Engineer (KMC)
Member

OWAIS MALIK
Chief Engineer (West)
Member

ABDUL RAHIM
Chief Engineer (IP&D)
(Convener)

IMDAD HUSSAIN
Executive Engineer
Division (Water)
KWSB

KARACHI WATER & SEWERAGE BOARD
OFFICE OF THE CHIEF ENGINEER (IP&D)

BID EVALUATION REPORT

1	Name of Procuring Agency	KARACHI WATER & SEWERAGE BOARD
2	Tender Reference No	KWSB/DPR/2013/125 published in i) Jahan Pakistan ii) Pakistan Observer on dated 15-11-2013 and iii) Nawai Waqat on dated 17-11-2013 and SPPRA Serial No 18034 I.D No /2013
3	Tender Description/Name of Work/Item	REPLACEMENT OF 16" DIA MS WATER LINE AT QASBA MOOR UC NO 8 AND 10" DIA 6" DIA & 4" DIA UPVC WATER LINE AT DIFFERENT PLACES IN UC-NO 4 FOR IMPROVEMENT OF WATER SUPPLY IN SAID AREAS SITE TOWN.
4	Method of Procurement	Single Stage (One envelope)
5	Tender Published	Through Web Site / press
6	Total Bid Documents Sold	02 Nos
7	Total Bid Received	02 Nos
8	Technical Bid Opening Date (if applicable)	N/A
9	No. of Bid Technically Qualified (if applicable)	N/A
10	Bid (s) rejected	Nil
11	Financial Bid Opening Date	9/12/2013

2 Bid Evaluation Report

S#	NAME OF FIRM OR BIDDER	COST OFFERED BY THE BIDDERS	RANKING IN TERMS OF COST	COMPARISON WITH ESTIMATED COST	REASON FOR ACCEPTANCE/ REJECTION	REMARKS
1	M/s S O H Construction Co.	Rs. 1 936 585/-	1st Lowest	@ 1 2673% Below	Substantially Responsive	P.O # 457892 Dt 05.12.2013 Rs 20,000/- Rizvi Society Nazimabad KHI BI
2	M/s Riaz & Co	Rs. 1 949 440/-	2nd Lowest	@ 0 2041% Below	Substantially Responsive	P.O # 4598421 Dt 05.12.2013 Rs 40,000/- Sumari Bank Gulshan-e-munim

The all concerned bidder are being informed accordingly.
 The E.E Concerned for compliance of rule 45 of SPPRA 2010 M/s S.O.H Construction Co. declared as the lowest responsive bidder by the Committee and recommended for Sanction from Competent Authority

ABSHAD ALI

SAIF-UL-HAQUE

MABSOOD AHMED

Accounts Officer (West)
Member/Secretary

Additional Director Internal
Audit - KMC Member

Superintending Engineer (KMC)
Member

OWAIS HANNA

ABDUL RAHIM

Chief Engineer (West)
Member

Chief Engineer (IPD),
id (Convener)

IMDAD HUSSAIN
Executive Engineer
SITE Division - Water
KWSB

COMPARATIVE STATEMENT

NAME OF WORK: REPLACEMENT OF 16" DIA MS WATER LINE AT GASBA MOOR UC NO.8 AND 10" DIA, 6" DIA & 4" DIA UPVC WATER LINE AT DIFFERENT PLACES IN UC-NO.4 FOR IMPROVEMENT OF WATER SUPPLY IN SAID AREAS SITE TOWN

S.No	Description of Work	Engineer's Estimate			M/s. S.O.H Construction Co.			M/s. Riaz & Co.		
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount	
1	Dismantling and removing road metelling Excavation for pipe lines of the trenches and pits in wet soil clay or mud w/c trimming and dressing side to true alignment and shape levelling of beds of trenches to correct level and grade, cutting joint holes and disposal of surplus earth with in a one chain as directed be engineer incharge providing fence guards lights flags and temporary crossings for non-vehicular traffic where ever required lift upto 5 ft (1.52m) and lead upto one chain (30.5m)	1505 Cft	605.00	% Cft	9,105.25	605.00	9,105.25	605.00	9,105.25	
2										
3	Excavation for pipe lines of storage tanks trenches and pits. 5' to 8' 8' to 11' 11' to 14'	9949.62 Cft	4,650.00	% Cft	46,265.73	4,650.00	46,265.73	4,650.00	46,265.73	
4	Excavation for pipe lines of the trenches and pits in hard rock by hammering and chiseling w/c trimming and dressing side to true alignment and shape levelling of beds of trenches to correct level and grade, cutting joint holes and disposal of surplus earth with in a one chain as directed be engineer incharge providing fence guards, lights, flags and temporary crossings for non-vehicular traffic where ever required lift upto 5 ft (1.52m) and lead upto one chain (30.5m)	2726.14 Cft	5,200.00	% Cft	14,175.93	5,200.00	14,175.93	5,200.00	14,175.93	
		3120 Cft	5,750.00	% Cft	17,940.00	5,750.00	17,940.00	5,750.00	17,940.00	
		3120 Cft	6,300.00	% Cft	19,656.00	6,300.00	19,656.00	6,300.00	19,656.00	
		2220 Cft	24,150.00	% Cft	56,028.00	24,150.00	56,028.00	24,150.00	56,028.00	

INDIAD HANSAIN
EXECUTIVE ENGINEER (MATCH)
SITE DIVISION B

ARSHAD ALI
Arshad Ali
 A.O. WEST ROAD
 BE TOWN H.
 ADDITIONAL
 ENGINEER
 PAFF-UL-HAQ
 ABDUL RAHMAN
 OUBAIS MALIK
 CE WEST ROAD

NAME OF WORK: REPLACEMENT OF 16" DIA MS WATER LINE AT QASBA MOOR UC-N0.8 AND 10" DIA, 6" DIA & 4" DIA UPVC WATER LINE AT DIFFERENT PLACES IN UC-N0.4 FOR IMPROVEMENT OF WATER SUPPLY IN SAID AREAS SITE TOWN

S.No	Description of Work	Engineer's Estimate			M/s. S.O.H Construction Co.			M/s. Riaz & Co.	
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount
5	Full hire charges of pumping set i/c wages of driver and Assistant fuel or electric energy plate form required for placing or at lower depths with suction and delivery pipes for pumping and water found at various depth form trenches i/c cost of erection and dismantling after completion of the job. (U) Hire charges of pumping set of upto 10 H P pumping out water for 10 feet deep trench	25 Day	1,500.00	P/Day	37,500.00	1400.00	35000	1450	36,250.00
6	Manufacturing supplying & fixing black steel M/S pipe made out of M/S sheet conforming to API 51 grade X-42 ERW & Eternally asphalt coated with fiber glass 5mm thick & internally C.C lining 8mm thick (AWWA Space) i/c laying jointing with welding in trench i/c cost of bends of any degree & testing with water specified pressure for different dia of pipe as below (straight) 16" Dia (6.4mm) thick	260 Rft	3,999.09	P/Rft	1,039,763.40	3,949.00	1,026,740.00	3970	1,032,200.00
7	Providing laying UPVC pipes of class C fixing in trench i/c cutting fitting and jointing with Solvent cement i/c testing with water to a head of 81.5 meter to 300 ft	75 Rft	1,034.00	P/Rft	77,550.00	1,010.00	75,750.00	1020	76,500.00
8	250mm (10" dia)	406 Rft	370.00	P/Rft	148,000.00	350.00	142,000.00	365	146,000.00
	150mm (6" dia)	140 Rft	174.00	P/Rft	24,360.00	150.00	21,000.00	160	22,400.00
	Supp ed for UPVC/AC pressure pipe 10" (equi. fee)	2 Nos	6,987.50	Each	13,975.00	6,987.50	13,975.00	6987.5	13,975.00
10" x 6" (equi. fee)	3 Nos	4,462.50	Each	4,462.50	4,462.50	4,462.50	4462.5	4,462.50	

STAMP: SITE ENGINEER (Water) M/S B. H. SAJJAD (Water)

APPROVED BY: M. MASOOD NEMIED. (Signature)
 APPROVED BY: SE KAME HUBAN. (Signature)
 APPROVED BY: SAIF-UL-HAQVE. (Signature)
 APPROVED BY: ABDUL RAHMAN. (Signature)
 APPROVED BY: DAWAL HAKIK. (Signature)
 APPROVED BY: CE I.P.D. KUNVS. (Signature)
 APPROVED BY: CR-1000. (Signature)

NAME OF WORK: REPLACEMENT OF 16" DIA MS WATER LINE AT QASBA MOOR UC NO.8 AND 10" DIA, 6" DIA & 4" DIA UPVC WATER LINE AT DIFFERENT PLACES IN UC-NO.4 FOR IMPROVEMENT OF WATER SUPPLY IN SAID AREAS SITE TOWN

S.No	Description of Work	Engineer's Estimate			M/s. S.O.H Construction Co.		M/s. Riaz & Co.		
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount
9	C I sluice valve heavy pattern (test pressure 21 Kg sq cm or 300 lbs/sq inch (unported) 10" dia 06" Dia	4 Nos	27 690.00	Each	110 760.00	27690.00	110760	27690	110 760.00
10	Fixing of sluice valve with two tail pieces one and flange and one and socket with nuts and bolts rubber packing etc. 10" dia 06" Dia	4 Nos	9 360.00	Each	37 440.00	9360.00	37440	9360	37 440.00
11	Construction of CC block Masonnary chamber of size 4x4x4 (inside dimension) with 24x24" Cover frame weight (65kg) fixed RCC 1.2' x 4' slabs 6" thick with steel 1/2" dia for main bar @ 6" CC 1/4" dia 8' C/C distribution bars 6" thick CC 1.3' 6" flooring 1/2" thick cement plaster 1.6" inside wall surface surface 1ft deep upto Roof slab i/c MS foot rest 5/8" dia bars every deep curring, dewatering excavation, refilling etc complete	4 Nos	3 319.00	Each	13 276.00	3319.00	13276	3319	13 276.00
12	Refilling the excavated stuff in trenches 6" thick layer i/c watering to full compaction etc complete	4 Nos	1 886.00	Each	7 544.00	1886.00	7544	1886	7 544.00
	Total Quoted / Corrected Cost	8 Nos	28 357.00	Each	226 856.00	28357.00	226856	28357	226 856.00
	Say	2123575 Cit	2 760.00	50.00 Cit	58 610.67	2760.00	58610.67	2760.00	58 610.67
					1 963 268.48		1 938 584.58		1 949 444.58
					1 963 268		1 938 585		1 949 445

[Handwritten Signature]
 S.O.H
 Engineer
 (Water)
 SITE OFFICE
 QASBA MOOR

[Handwritten Signature]
 Accounts Officer (West)
 Member/Secretary

[Handwritten Signature]
 Chief Engineer (West)
 Member

[Handwritten Signature]
 Additional Director Internal
 Audit - KMC Member

[Handwritten Signature]
 Superintending Engineer (KMC)
 Member
[Handwritten Signature]
 Chief Engineer (WB)
 (Convener)

[Handwritten Signature]
 M. MOHAMMAD AMIR



KARACHI WATER & SEWERAGE BOARD

OFFICE OF THE CHIEF ENGINEER (IP&D)


BID OPENING REPORT


1	Name of Procuring Agency	KARACHI WATER & SEWERAGE BOARD
2	Tender Reference No	KWSB/DPR/2013/125 published in i) Jahan Pakistan ii) Pakistan Observer on dated 15-11-2013 and iii) Nawal Waqat on dated 17-11-2013 and SPPRA Serial No 18034 I.D No /2013
3	Tender Description/Name of Work/Item	REPLACEMENT OF 16" DIA MS WATER LINE AT QASBA MOOR UC NO 8 AND 10" DIA, 6" DIA & 4" DIA UPVC WATER LINE AT DIFFERENT PLACES IN UC-NO 4 FOR IMPROVEMENT OF WATER SUPPLY IN SAID AREAS SITE TOWN.
4	Method of Procurement	Single Stage (One Envelop)
5	Tender Published	Through Web Site / press
6	Total Bid Documents Sold	02 Nos
7	Total Bid Received	02 Nos
8	Technical Bid Opening Date (if applicable)	N/A
9	No of Bid Technically Qualified (if applicable)	N/A
10	Financial Bid Opening Date	9/12/2013

11 Bid Opening Report

S #	NAME OF FIRM OR BIDDER	COST OFFERED BY THE BIDDERS	RANKING IN TERMS OF COST	REMARKS
1	M/s. S.O.H Construction Co.	Rs. 1,938,585/-	1st Lowest	P.O # 6577632 Dt 05-12-2013 Rs. 39,000/- HBL Rizvia Society Nazimabad Kh. Dr
2	M/s. Rizvi & Co	Rs. 1,942,457/-	2nd Lowest	P.O # 55608021 Dt 05-12-2013 Rs. 46,000/- Summit Bank (Construction Digital B)


M/s. S.O.H Construction Co. declared as the lowest responsive bidder


ARSHAD ALI

 Accounts Officer (West)
 Member/Secretary

SAIF-UL-HASSAN,

 Additional Director Internal
 Audit - KMC Member

MARSOOD AHMED,

 Superintending Engineer (KMC)
 Member

OWAIS MALIK

 Chief Engineer (West)
 Member

ABDUL RAHIM,

 Chief Engineer (IP&D)
 (Convener)

IMDAD HUSSAIN

 Executive Engineer
 Division (Water)
 KWSB

KARACHI WATER & SEWERAGE BOARD

OFFICE OF THE CHIEF ENGINEER (IP&D)

BID EVALUATION REPORT

1	Name of Procuring Agency	KARACHI WATER & SEWERAGE BOARD
2	Tender Reference No	KWSB/DPR/2013/125 published in i) Jahan Pakistan ii) Pakistan Observer on dated 15-11-2013 and iii) Nawal Waqat on dated 17-11-2013 and SPPRA Serial No 18034 I D No /2013
3	Tender Description/Name of Work/Item	REPLACEMENT OF 16" DIA MS WATER LINE AT QASBA MOOR UC NO 3 AND 10" DIA, 6" DIA & 4" DIA UPVC WATER LINE AT DIFFERENT PLACES IN UC-NO 4 FOR IMPROVEMENT OF WATER SUPPLY IN SAID AREAS SITE TOWN
4	Method of Procurement	Single Stage (One Envelope)
5	Tender Published	Through Web Site / press
6	Total Bid Documents Sold	02 Nos
7	Total Bid Received	02 Nos
8	Technical Bid Opening Date (if applicable)	N/A
9	No. of Bid Technically Qualified (if applicable)	N/A
10	Bid (s) rejected	Nil
11	Financial Bid Opening Date	9/12/2013

12 Bid Evaluation Report

S #	NAME OF FIRM OR BIDDER	COST OFFERED BY THE BIDDERS	RANKING IN TERMS OF COST	COMPARISON WITH ESTIMATED COST	REASON FOR ACCEPTANCE/ REJECTION	REMARKS
1	M/s S.O.H Construction Co	Rs. 1,936,585/-	1st Lowest	@ 1.2573% Below	Substantially Responsive	P.O # 0077692 D: 05/12/2013 Rs 20,000/- M/s. Riaz & Sonny Nazimabad Khair
2	M/s Riaz & Co	Rs. 1,949,445/-	2nd Lowest	@ 0.7041% Below	Substantially Responsive	P.O # 006371 D: 05/12/2013 Rs 40,000/- Summit Bank Gulshan-e-Iqbal

The all concerned bidder are being informed accordingly.

The E.E Concerned for compliance of rule 45 of SPPRA 2010M/s S O H Construction Co declared as the lowest responsive bidder by the Committee and recommended for Sanction from Competent Authority

ADSHAD ALI

SAIF-UL-HAQUE

MABSOOD AHMED

Accounts Officer (West)
Member/Secretary

Additional Director Internal
Audit - KMC Member

Superintending Engineer (KMC)
Member

OWAIS HANIF

ABDUL RAHIM

Chief Engineer (West)
Member

Chief Engineer (IPD),
(Convener)

IMDAD HUSSAIN
Executive Engineer
SITE Division (Water)
KWSB

COMPARATIVE STATEMENT

NAME OF WORK: REPLACEMENT OF 16" DIA MS WATER LINE AT QASBA MOOR UC NO.8 AND 10" DIA, 6" DIA & 4" DIA UPVC WATER LINE AT DIFFERENT PLACES IN UC-NO.4 FOR IMPROVEMENT OF WATER SUPPLY IN SAID AREAS SITE TOWN

S.No	Description of Work	Engineer's Estimate			M/s. S.O.H Construction Co.		M/s. Riaz & Co.		
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount
1	Dismantling and removing road metelling Excavation for pipe lines of the trenches and pits in wet soil clay or mud i/c trimming and dressing side to true alignment and shape levelling of beds of trenches to correct level and grade cutting joint holes and disposal of surplus earth with in a one chain as directed be engineer incharge providing fence guards lights flags and temporary crossings for non-vehicular traffic where ever required lift upto 5 ft (1.52m) and lead upto one chain (30.5m)	1505 Cft	605.00	% 0 Cft	9,105.25	605.00	9,105.25	605.00	9,105.25
2	Excavation for pipe lines of the trenches and pits in hard rock by hammering and chiseling i/c trimming and dressing side to true alignment and shape levelling of beds of trenches to correct level and grade cutting joint holes and disposal of surplus earth with in a one chain as directed be engineer incharge providing fence guards lights flags and temporary crossings for non-vehicular traffic where ever required lift upto 5 ft (1.52m) and lead upto one chain (30.5m)	9949.62 Cft	4,650.00	% 0 Cft	46,265.73	4,650.00	46,265.73	4,650.00	46,265.73
3	Add for additional lift of every three ft or part there of in item No.1 to 15 (A&B) for Excavation for pipe lines of storage tanks trenches and pits.	2726 14 Cft	5,200.00	% 0 Cft	14,175.93	5,200.00	14,175.93	5,200.00	14,175.93
		3120 Cft	5,750.00	% 0 Cft	17,940.00	5,750.00	17,940.00	5,750.00	17,940.00
		3120 Cft	6,300.00	% 0 Cft	19,656.00	6,300.00	19,656.00	6,300.00	19,656.00
4	Excavation for pipe lines of the trenches and pits in hard rock by hammering and chiseling i/c trimming and dressing side to true alignment and shape levelling of beds of trenches to correct level and grade cutting joint holes and disposal of surplus earth with in a one chain as directed be engineer incharge providing fence guards lights flags and temporary crossings for non-vehicular traffic where ever required lift upto 5 ft (1.52m) and lead upto one chain (30.5m)	2720 Cft	24,150.00	% 0 Cft	56,028.00	24,150.00	56,028.00	24,150.00	56,028.00

IMDAD HUSSAIN
Executive Engineer
SITE DIVISION B

ARSHAD ALI
ADD. WORK LEAD
SE TECH H.

ADD. EMC M.

A BOOL QURANNI

ORIGINS MALD

CE WEST WORKS

NAME OF WORK: REPLACEMENT OF 16" DIA MS WATER LINE AT QASBA MOOR UC N0.8 AND 10" DIA 6" DIA & 4" DIA UPVC WATER LINE AT DIFFERENT PLACES IN UC-N0.4 FOR IMPROVEMENT OF WATER SUPPLY IN SAID AREAS SITE TOWN

S.No	Description of Work	Engineer's Estimate			M/s. S.O.H Construction Co.			M/s. Riaz & Co.	
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount
5	Full hire charges of pumping set i/c wages of driver and Assistant fuel or electric energy plate form required for placing or at lower depths with suction and delivery pipes for pumping and water found at various depth from trenches i/c cost of erection and dismantling after completion of the job. (i) Hire charges of pumping set of upto 10 HP pumping out water for 10 feet deep trench	25 Day	1,500.00	P/Day	37,500.00	1400.00	35000	1450	36,250.00
6	Man. facturing supplying & fixing black steel M/S pipe made out of M/S sheet conforming to API 51 grade X-42 ERW & Eternally asphalt coated with fiber glass 5mm thick & internally C.C lining 8mm thick (AWWA Space) i/c laying jointing with welding in trench i/c cost of bends of any degree & testing with water specified pressure for different dia of pipe as below (straight) 16" Dia (6.4mm thick)	260 Rft	3,999.09	P/Rft	1,039,763.40	3,949.00	1,026,740.00	3970	1,032,200.00
7	Providing laying UPVC pipes of class C fixing in trench i/c cutting fitting and jointing with Solvent cement i/c testing with water to a head of 81.5 meter to 300 ft 250mm (10" dia) 150mm (6" dia) 100mm (4" dia)	75 Rft 400 Rft 140 Rft	1,034.00 375.00 174.00	P/Rft P/Rft P/Rft	77,550.00 149,000.00 24,360.00	1,010.00 360.00 150.00	75,750.00 144,000.00 21,000.00	1020 365 160	76,500.00 146,000.00 22,400.00
8	Subst. cost for UPVC/AC pressure pipe 10" (6000.00) 10" x 30' (un-quantity)	2 Nos 1 Nos	6,987.50 4,462.50	Each Each	13,975.00 4,462.50	6,987.50 4,462.50	13,975.00 4,462.50	6987.5 4462.5	13,975.00 4,462.50

U.S.S.A.I.N
S.A.I.F. U.S. PROJE
K.A.M.S.B. (Water)

ABSTRACT AT-1
MAJID AHMED
SE K.M.C Huber
10-9 West-10 US
ABDUL RAHMAN
AUDIT KHAN H.
DULAMS HAKIK,
CE 100 KWS
CE 1000

NAME OF WORK: REPLACEMENT OF 16" DIA MS WATER LINE AT QASBA MOOR UC NO.8 AND 10" DIA, 6" DIA & 4" DIA UPVC WATER LINE AT DIFFERENT PLACES IN UC-NO.4 FOR IMPROVEMENT OF WATER SUPPLY IN SAID AREAS SITE TOWN

S.No	Description of Work	Engineer's Estimate			M/s. S.O.H Construction Co.		M/s. Riaz & Co.		
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount
9	C I sluice valve heavy pattern (test pressure)	4 Nos	27,690.00	Each	110,760.00	27,690.00	110,760.00	27,690	110,760.00
		4 Nos	9,360.00	Each	37,440.00	9,360.00	37,440.00	9,360	37,440.00
10	Fixing of sluice valve with two tail pieces one and frange and one and socket with nuts and bolts rubber packing etc.	4 Nos	3,319.00	Each	13,276.00	3,319.00	13,276.00	3,319	13,276.00
		4 Nos	1,886.00	Each	7,544.00	1,886.00	7,544.00	1,886	7,544.00
11	Construction of CC block Masonary chamber of size 4x4x4(inside dimension) with 24x24" Cover frame weight (65kg) fixed RCC 1.2-4 slabs 6" thick with steel 1/2 dia for main bar @ 6" CC 1/4 dia 8" C/C distribution bars 6" thick CC 1.3-6 flooring 1/2" thick cement plaster 1.6 inside wall surface surface 1ft deep upto Roof slab i/c MS foot rest 5/8" dia bars every deep curring, dewatering excavation, refilling etc complete	8 Nos	28,357.00	Each	226,856.00	28,357.00	226,856.00	28,357	226,856.00
		21235.75 Ch	2,760.00	1.00 Ch	58,610.67	2,760.00	58,610.67	2,760.00	58,610.67
12	Refilling the excavated stuff in trenches 6" thick layer ic watering to full compaction etc complete	1,963,268.48			1,963,268.48		1,938,584.58		1,949,444.58
		1,963,268			1,938,585		1,938,585		1,949,445
Total Quoted / Corrected Cost									
Say									

(Signature)
S.O.H
SITE ENGINEER (Water)

(Signature)
ARSHAD ALI
Accounts Officer (West)
Member/Secretary

(Signature)
ABDUL RAHIM
Chief Engineer (West)
Member

(Signature)
Additional Director Internal
Audit - KMC Member

(Signature)
Superintending Engineer (KMC)
Member

(Signature)
ABDUL RAHIM
Chief Engineer (West)
(Convener)

(Signature)
MUSADDAD AHMED

SINDH PUBLIC PROCUREMENT REGULATORY AUTHORITY
CONTRACT EVALUATION FORM
TO BE FILLED BY ALL PROCURING AGENCIES FOR PUBLIC CONTRACTS OF
WORKS, SERVICES & GOODS

1 NAME OF THE ORGANIZATION/DEPTT.	<u>KARACHI WATER & SEWERAGE BOARD</u>
2 PROVINCIAL/LOCAL GOVT/OTHER	_____
3 TITLE OF CONTRACT	<u>Replacement of 16"Ø M.S. water line at Qasba More UC-8 and 10"Ø, 6"Ø & 4"Ø UPVC water line at different places in UC-4 for improvement of water supply in said area, Site Town.</u>
4 TENDER NUMBER	<u>SPPRA Sr.18034</u>
5 BRIEF DESCRIPTION OF CONTRACT	<u>Improvement of water supply system in UC-4 & 8, Site Town.</u>
6 FORUM THAT APPROVED THE SCHEME	<u>M. D. KW&SB.</u>
7 TENDER ESTIMATED VALUE	<u>Rs. 19,63,268/-</u>
8 ENGINEER'S ESTIMATE (Attach list of buyers)	<u>Rs. 19,38,585/-</u>
9 ESTIMATED COMPLETION PERIOD (AS PER CONTRACT)	<u>30 days.</u>
10 TENDER OPENED ON (DATE & TIME)	<u>09-12-2013 at 2.30p.m.</u>
11 NUMBER OF TENDER DOCUMENT SOLD (Attach list of buyers).	<u>02 Nos.</u>
12 NUMBER OF BIDS RECEIVED	<u>02 Nos.</u>
13 NUMBER OF BIDDERS PRESENT AT THE TIME OF OPENING OF BIDS.	<u>02 Nos.</u>
14 BID EVALUATION REPORT (enclose copy).	<u>Copy attached.</u>
15 NAME AND ADDRESS OF THE SUCCESSFUL BIDDER.	<u>M/s.S.O.H.Const.Co. L-631 Sector 5A/4 North Karachi.</u>

16 CONTRACT AWARD PRICE

Rs. 19,38,585/-

17 RANKING OF SUCCESSFUL BIDDER IN EVALUATION REPORT (i.e. 1st, 2nd, 3rd Evaluation Bid).

Ist. M/s.S.O.H.Const.Co.
~~IInd. M/s.Riaz & Co.~~

18 METHOD OF PROCUREMENT USED (Tick one)

- a) Single Stage One Envelope Procedure. Domestic / local
- b) Single Stage Two Envelope Procedure. NIL
- c) Two Stage Bidding Procedures. NIL
- d) Two Stage Two Envelope Bidding Procedure NIL

PLEASE SPECIFY IF ANY OTHER METHOD OF PROCUREMENT WAS ADOPTED i.e EMERGENCY, DIRECT CONTRACTING/NEGOTIATION ETC. WITH BRIEF REASONS:

19 APPROVING AUTHORITY FOR AWARD OF CONTRACT.

M. D. KW&SB.

20 WHETHER THE PROCUREMENT WAS INCLUDED IN ANNUAL PROCUREMENT PLAN?

Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

21 ADVERTISEMENT:

i) SPPRA Website
(If yes, give date and SPPRA's tender number)

Yes	Sr.No. 18034
No	

ii) News Papers
(If yes, give names of newspapers and dates)

Yes	Nawa-e-waqat, Jahan-e-Pakistan, Mehran, Pakistan Observer dt. 15-11-2013
No	

22 NATURE OF CONTRACT

Local	<input checked="" type="checkbox"/>	Int.	<input type="checkbox"/>
-------	-------------------------------------	------	--------------------------

23 WHETHER QUALIFICATION CRITERIA WAS INCLUDED IN BIDDING/TENDER DOCUMENT?
(If yes, enclose a copy)

Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

24 WHETHER EVALUATION CRITERIA BID WAS INCLUDED IN BIDDING/TENDER DOCUMENTS?
(If yes, enclose a copy).

Yes		No	✓
-----	--	----	---

25 WHETHER APPROVAL OF COMPETENT AUTHORITY WAS OBTAINED FOR USING A METHOD OTHER THAN OPEN COMPETITIVE BIDDING?

Yes		No	✓
-----	--	----	---

26 WAS BID SECURITY OBTAINED FROM ALL THE BIDDERS?

Yes	✓	No	
-----	---	----	--

27 WHETHER THE SUCCESSFUL BID WAS LOWEST EVALUATED BID/BEST EVALUATED BID (in case of Consultancies).

Yes	✓	No	
-----	---	----	--

28 WHETHER THE SUCCESSFUL BIDDER WAS TECHNICALLY COMPLIANT

Yes	✓	No	
-----	---	----	--

29 WHETHER NAMES OF THE BIDDERS AND THEIR QUOTED PRICE WERE READ OUT AT THE TIME OF OPENING OF BIDS?

Yes	✓	No	
-----	---	----	--

30 WHETHER COPY OF EVALUATION REPORT GIVEN TO ALL BIDDERS?
(Attach copy of the bid evaluation report).

Yes	✓	No	
-----	---	----	--

31 ANY COMPLAINTS RECEIVED
(If yes, result thereof)

Yes	
No	✓

32 ANY DEVIATION FROM SPECIFICATION GIVEN IN THE TENDER NOTICE / DOCUMENT.
(If yes, give details).

Yes	
No	✓

33 WAS THE EXTENSION MADE IN RESPONSE TIME?
(If yes, give detailed reasons).

Yes	
No	✓

34 DEVIATION FROM QUALIFICATION CRITERIA
(If yes, give detailed reasons).

Yes	
No	✓

35 WAS IT ASSURED BY THE PROCURING AGENCY THAT THE SELECTED FIRM IS NOT BLACK LISTED?

Yes	✓	No	
-----	---	----	--

36 WAS A VISIT MADE BY ANY OFFICER/OFFICIAL OF THE PROCURING AGENCY TO THE
(If yes, enclose a copy)

Yes		No	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

37 WERE PROPER SAFEGUARDS PROVIDED ON MOBILIZATION ADVANCE PAYMENT IN THE

Yes		No	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------


38 SPECIAL CONDITIONS, IF ANY.
(If yes, give Brief Description).

Yes	
No	<input checked="" type="checkbox"/>

Signature & Official Stamp of

Authorized Officer

FOR OFFICE USE ONLY


IMDAD HUSSAIN
Executive Engineer
SITE Division (Water)
KWSB

SPPRA, Block-No. 8, Sindh Secretariat No. 4-A, Court Road, Karachi.
Tele: 021-9205356, 021-9205369 & Fax 021-9206291.

OFFICE OF THE EXECUTIVE ENGINEER (headr), SITE TOWN, ZONE-III-B.
KARACHI WATER & SEWERAGE BOARD.

NO. EE (headr) /S.T./Z-III-E/ 16 114

Dated 03/02/2014.

WORK ORDER

SUBJECT: Replacement of 16" MS water line at Qasba More
UE 8 and 10" & 4" UPVC water line at different places
in UE-4 for improvement of water supply in said areas
Site Town.

This is to inform you that your Quotation/Tender for the above work has been approved on Item Rate Basis being the 1st lowest bidder amounting to Rs. 19,38,585/- (Rupees Nineteen Lacs Thirty Eight thousand five hundred Eighty five/-) has also been sanctioned vide No. KWSB/CE/next/2014/20. dated 28-01-2014. in B.G. Code No. B-013(17).

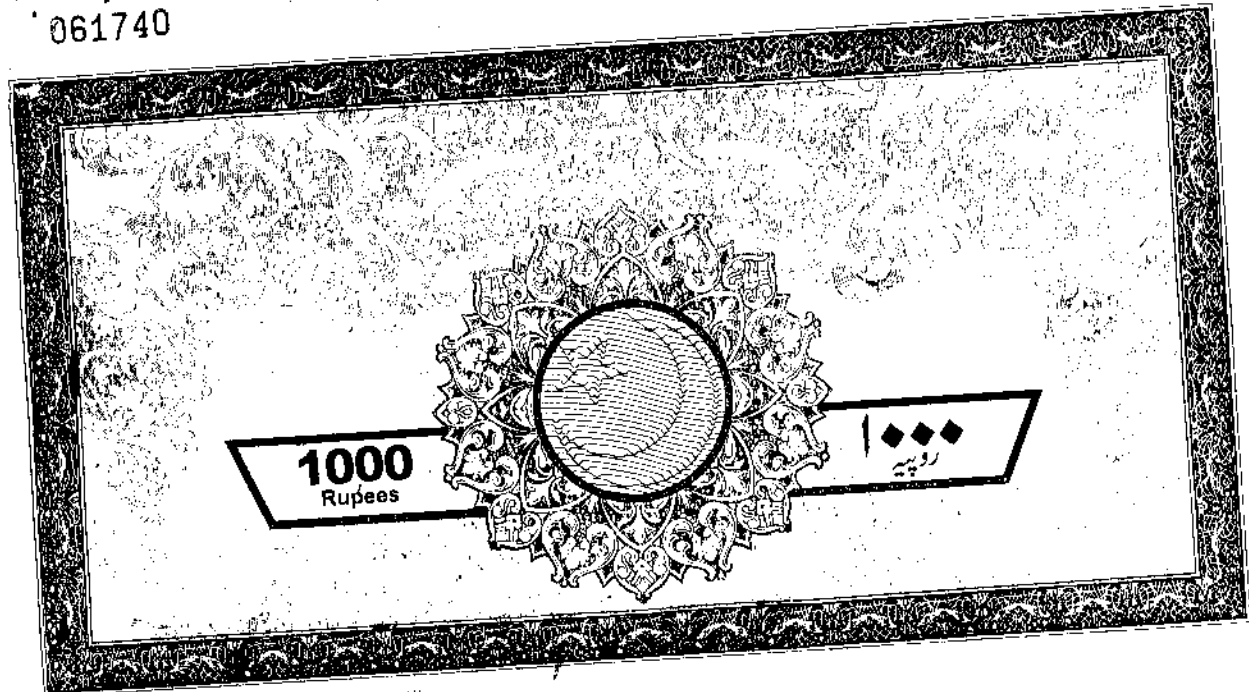
You are hereby directed to start the work immediately and complete the same within 30 days. commencing from the date of issuing this work order. In case the work is delayed or left unfinished beyond the stipulated time penalty Rs. 2000/- per day shall be imposed as per work rules.


Executive Engineer
(headr), Site Town, KW&SB

N/s. S.O.H. Cast. Co.

- Copy to:-
01. C.E. Zone-III-B, KW&SB.
 02. S.E. Site Town, KW&SB.
 03. Sub-Engineer (), Site Town.

061740



AGIS
Licence
Key
66190
S. NO
ISSUE
THE
BY
VAC

21 JAN 2014

CONTRACT AGREEMENT

Sanction Amount Rs. 19,38,585/-

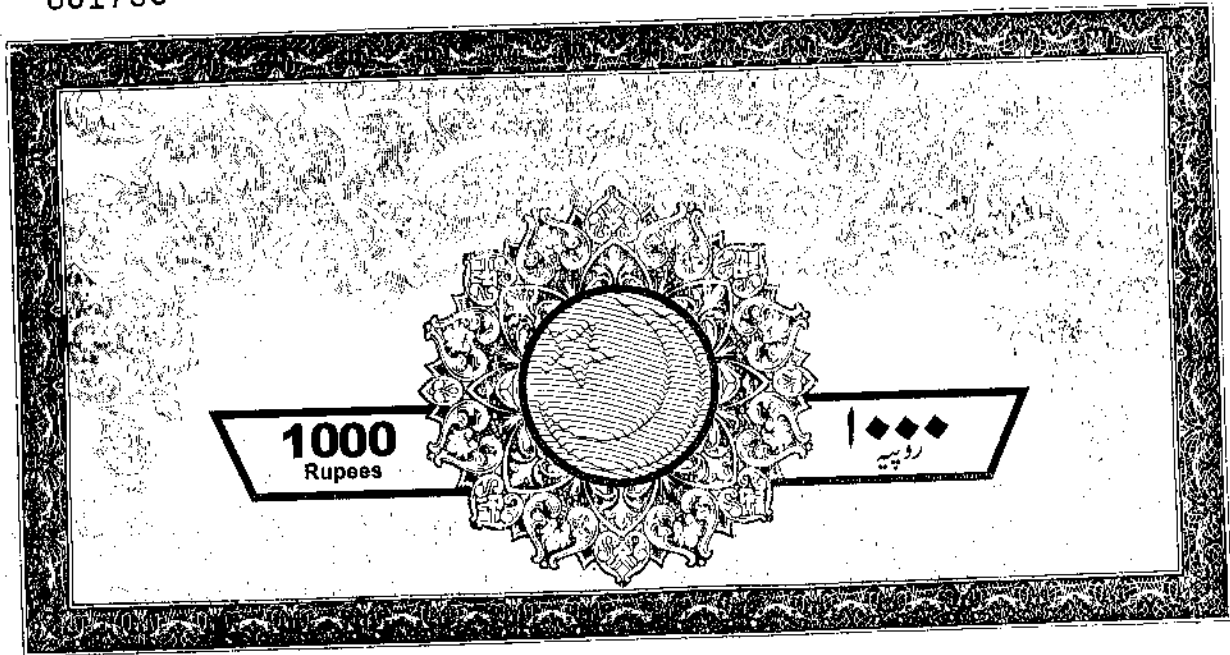
THIS CONTRACT AGREEMENT (hereinafter called the "Agreement") made on the 28th day of JAN- 2014 between The **Karachi Water & Sewerage Board** represented by it's The Chief Engineer (West), KW&SB (hereinafter called the "Employer") of the one part and M/s. **S.O.H Construction Co.** (hereinafter called the "Contractor") of the other part.

WHEREAS the Employer is desirous that certain Works, viz "REPLACEMENT OF 16" DIA MS WATER LINE AT QASBA MORE UC ND-08 AND 10" DIA 6" DIA & 4" DIA UPVC WATER LINE AT DIFFERENT PLACES IN UC-04 FOR IMPROVEMENT OF WATER SUPPLY IN SAID AREAS SITE TOWN." Should be executed by the Contractor and has accepted a Bid by the Contractor for the execution and completion of such Works and the remedying of any defects therein.

NOW This Agreement witnessed as follows:-

1. In this Agreement words and expressions shall have the same meanings as are respectively assigned to them in the Conditions of Contract hereinafter referred to.
2. The following documents after incorporating addenda, if any except those parts relating to Instructions to Bidders, shall be deemed to form and be read and construed as part of this Agreement, viz:
 - (a) The Letter of Sanction
 - (b) The completed Form of Bid along with Schedules to Bid:
 - (c) Conditions of Contract & Contract Data:
 - (d) The priced Schedule of Prices.
 - (e) The Specification: and
 - (f) The Drawings


IMDAD HUSSAIN
Executive Engineer
SITE Division (Water)
KWSB



ADIC
Lent
66/1736
3.


21 JAN 2014
SYED WAJAHAT ALI
ADVOCATE


Page-2


In consideration of the payments to be made by the Employer to the Contractor as hereinafter mentioned, the Contractor hereby covenants with the Employer to execute and complete the Works and remedy defects therein in conformity and in all respects within the provisions of the Contract.

- 4. The Employer hereby covenants to pay to the Contractor, in consideration of the execution and completion of the Works as per provision of the Contract, the Contract Price or such other sum as may become payable under provisions of the Contract at the times and in the manner prescribed by the Contract.



IN WITNESS WHEREOF, the parties hereto have caused this Contract Agreement to be executed on the day, month and year first before written in accordance with their respective laws.

Signature of the Contractor

 Proprietor
 M/S. S.O.H Construction Co.
 KARACHI

Signature of Employer

 CHIEF ENGINEER (WEST)
 KW&SB

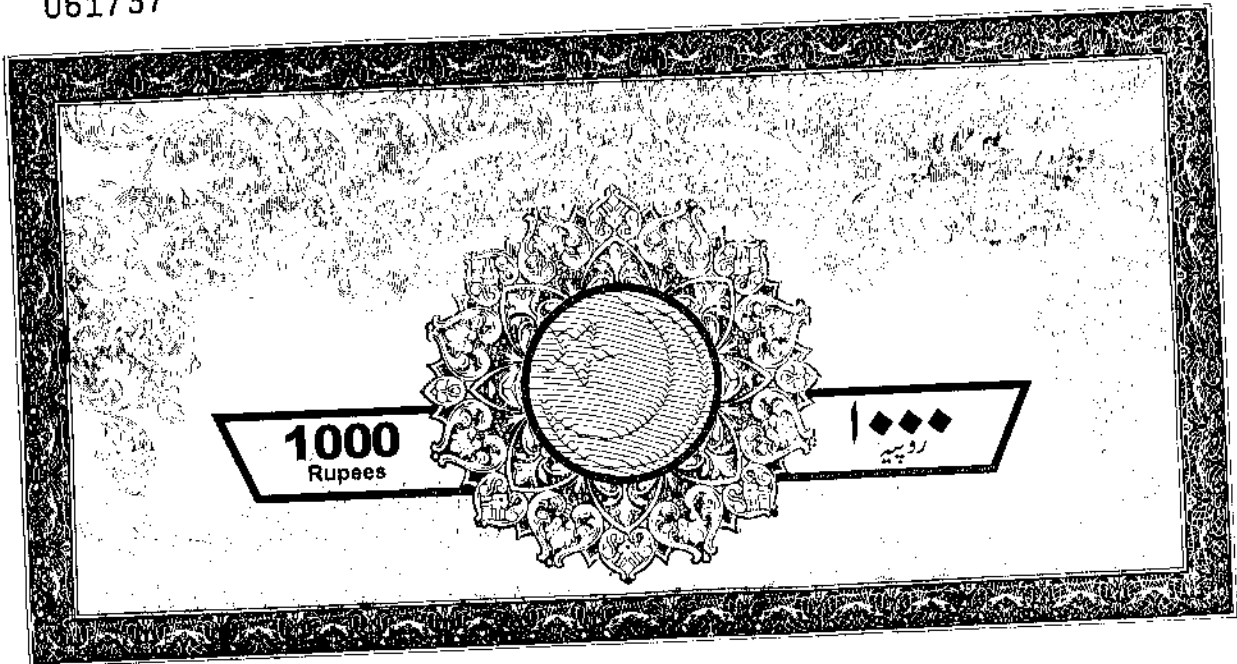
WITNESS:
 1. 
 W/S - Unity Asso

 2. _____

WITNESS:

 SUPERINTENDING ENGINEER
 SITE TOWN, KW&SB

 EXECUTIVE ENGINEER (WATER)
 SITE TOWN, KW&SB

INDIA
 Executive Engineer
 SITE Division (water)
 KW&SB

061737



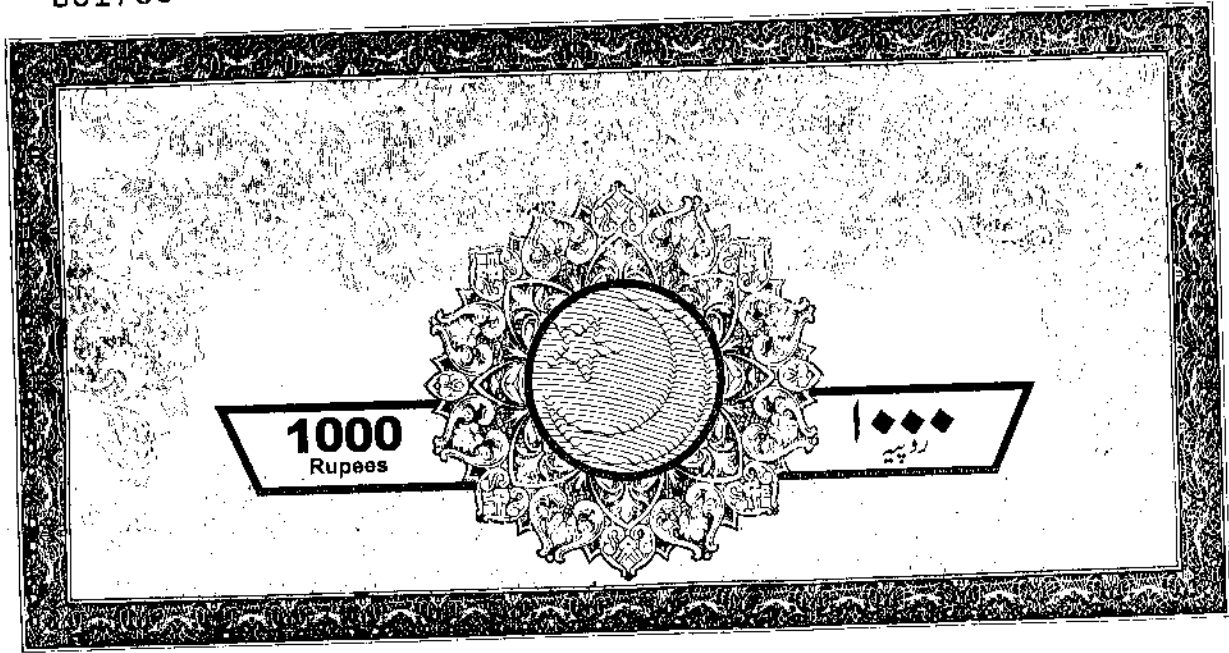
66187
Handwritten signature

21 JAN 2014
SYED M...
Handwritten text

M/S S.O.H. Co. Ltd


IMDAR HOSSAIN
Executive Engineer
SITE Division (Water)
KWSB

061738

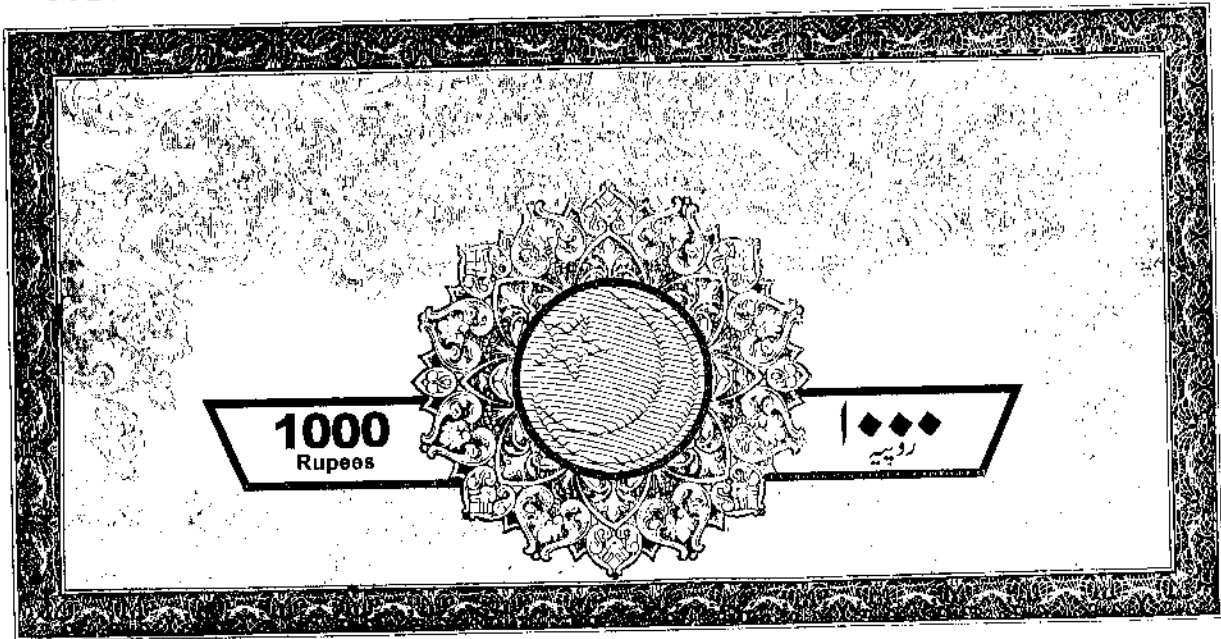


AQIS REGISTRATION NO. W-1000-01
 Licence No. W-1000-01
 Karim P. No. W-1000-01
 21 JAN 2014
 66188
 ISSUED TO
 THE
 JAL
 ATAM

M/s S.O.H. Co. Ltd.


 (Water)
 WSB

061739

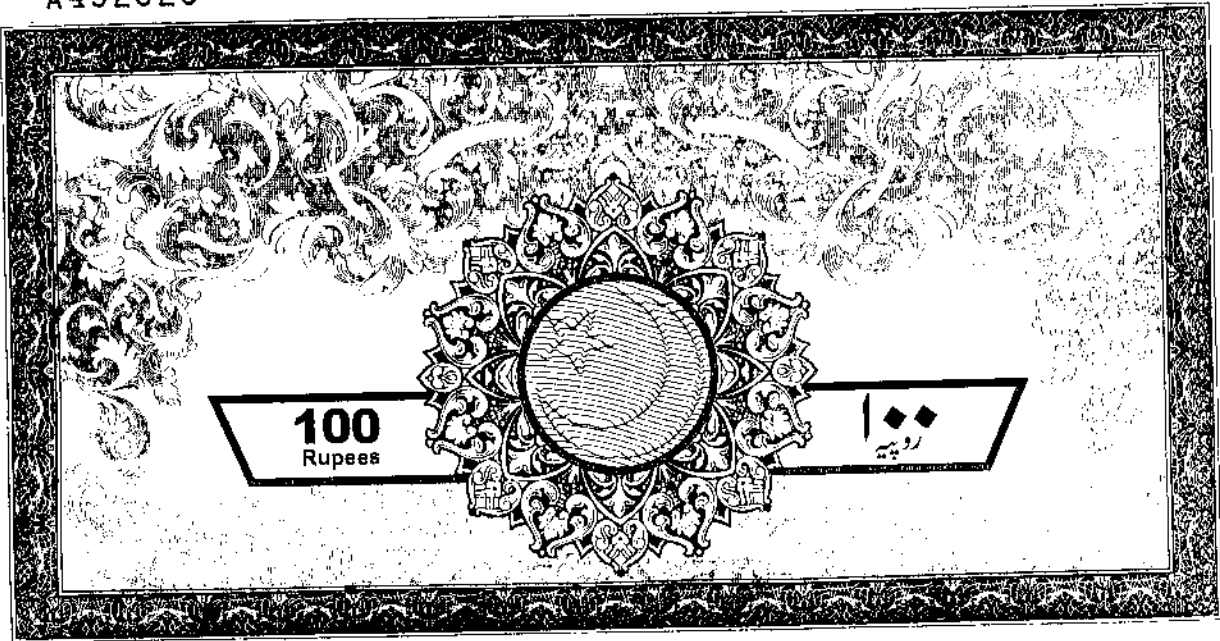


AQIB HUSSAIN
 License No. 66189
 Karachi
 S. NO. 66189
 ISSUED TO
 THROUGH
 VAL
 SYANG

21 JAN 2014
Wajid A. Hussain
 Adress:


IMDAD HUSSAIN
 Executive Engineer
 SITE Division (Water)
 KWSB

A492320



Serial No.
Date of Issue
Place of Issue

20 JAN 2014

S. No.
ISSUE
TITLE
PURPOSE
VALUE

065960

Tajuddin Qureshi
Advocate.

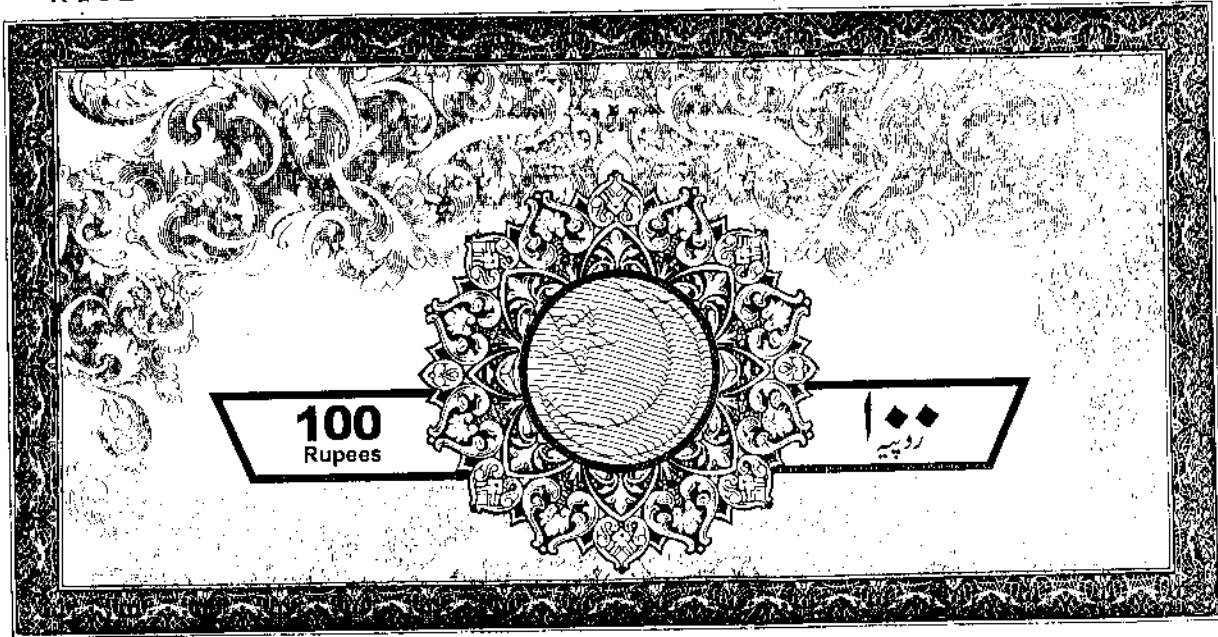
[Handwritten signature]

M/S S.O.H. Co.

[Handwritten signature]
IMDAD HOSSAIN
Executive Engineer
SITE Division (Water)
KWSB

A492321

111 000 0 110 000 11 000 000 000 000 000 000 000 000



RECEIVED
 LICENCE NO. 14
 KARFI

20 JAN 2014

S. NO. **065961**

20 JAN 2014

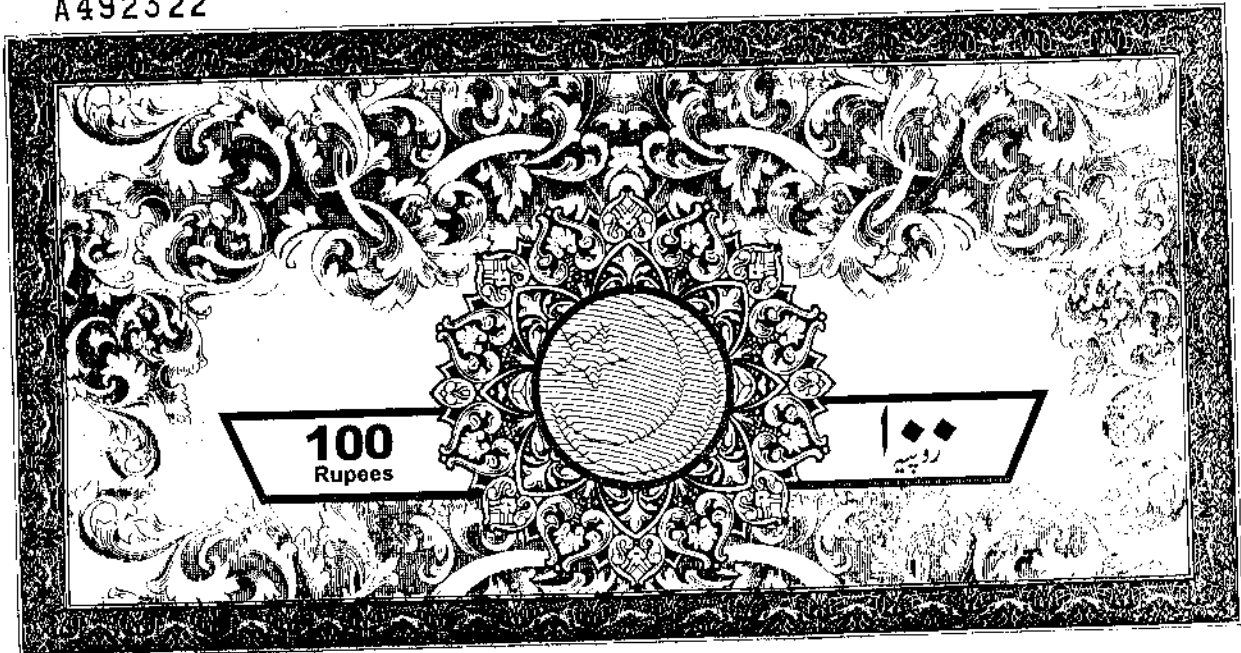
ISSUED TO
 THE
 PERMITTED
 VALUE
 STAMP VERIFIED

Tajuddin Gureshi
 Advocate.

[Signature]

[Signature]
IMDAD HUSSAIN
 Executive Engineer
 SITE Division (Water)
 KWSB

A492322



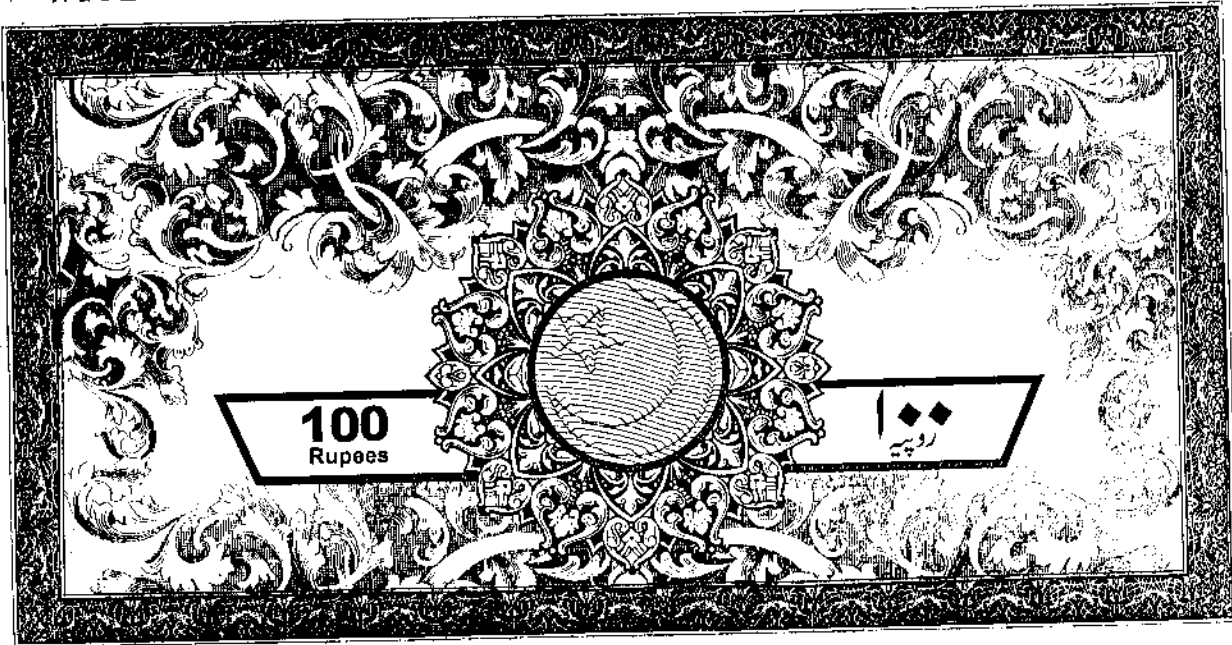
AGIS INKAM S...
Licence No. 24...
Karim...
Centre

S. NO. _____
ISSUED TO: **065962** *Tajuddin Qureshi*
PURPOSE: *Advocate.*
VALUE RS. _____
STAMP VENDOR'S SIGNATURE: _____

M/S S.O.I.T. - Cert A

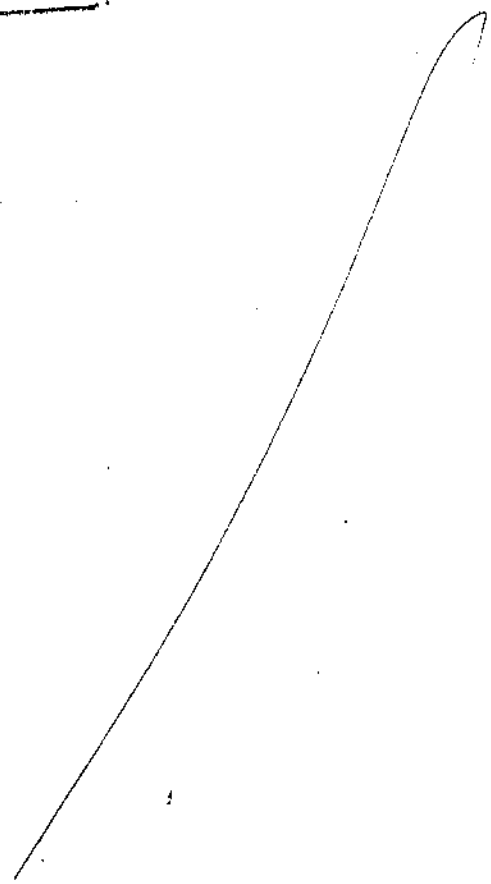
[Signature]
IMDAD HUSSAIN
Executive Engineer
S/E Division (Water)
KWSB

A492323



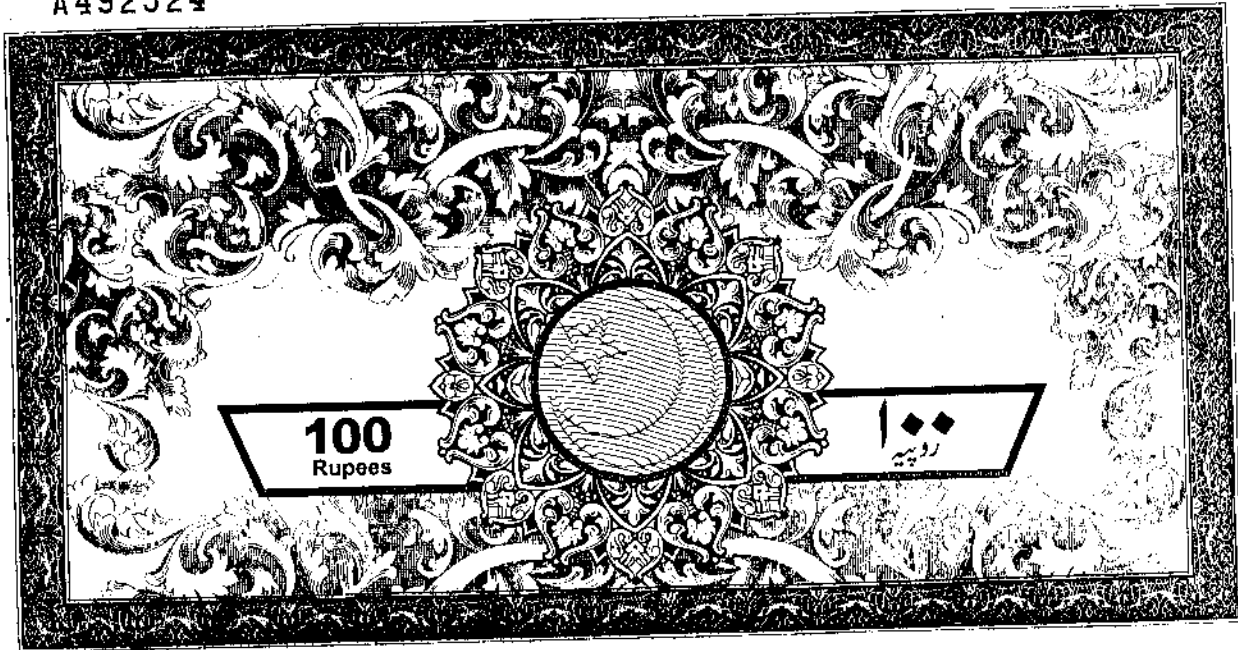
AGRA WATER SUPPLY BOARD
Licence No. 14/14/14
Karim Nagar, Agra, U.P. 202002
C65963 20 JAN 2014

S. NO. _____
ISSUED BY _____
THROUGH _____
PURPOSE _____
VALUATION _____
STAMP VENDORS SIGNATURE *A*



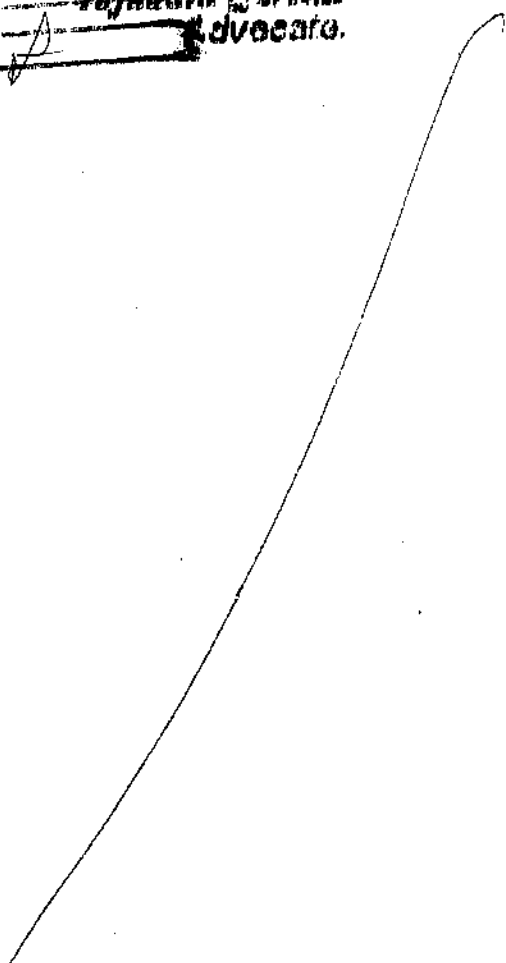
[Signature]
HEENA ALI SAIN
Executive Engineer
SITE Division (Water)
KWSB

A492324



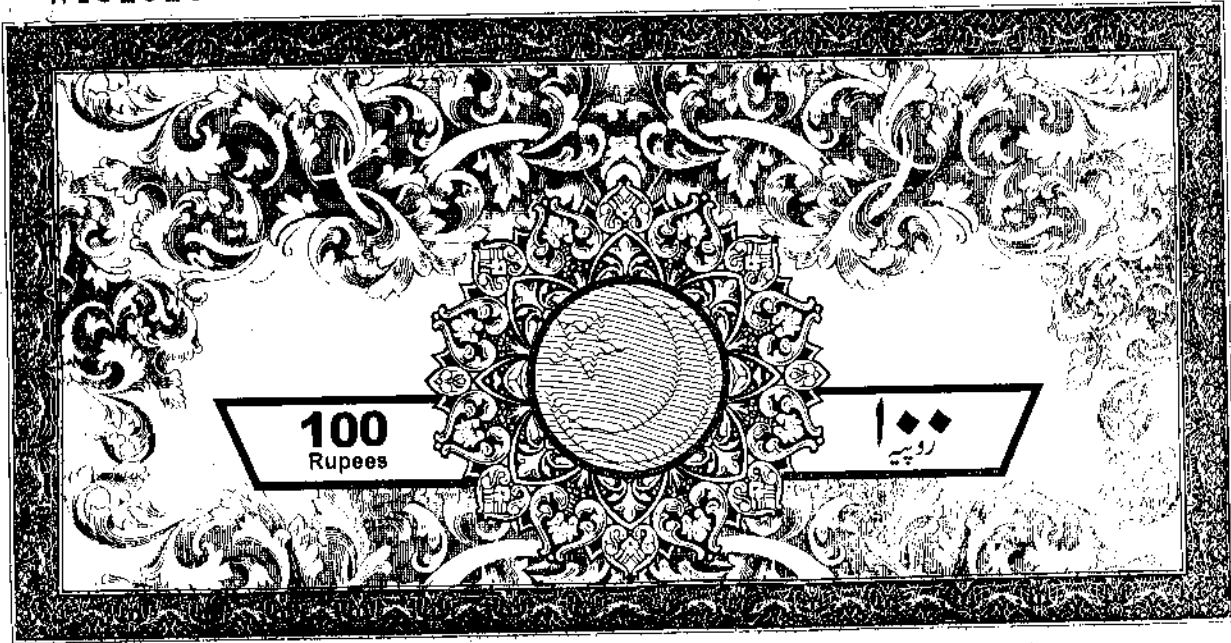
AGENTS THROUGH LICENSING AUTHORITY
Licence No. 14/2009 dated 14/11/09
Karimnagar, Andhra Pradesh

S. NO. _____
ISSUED TO **065964** DATE **28 JAN 2014**
THROUGH _____
PURPOSE **Taj Mahal Gurnahi**
VALUE RS. **Advocate.**
STAMP VENDOR'S SIGNATURE _____



[Signature]
W. SAIN
Executive Engineer
SITE Division (Water)
KWSB

A492325




100
Rupees

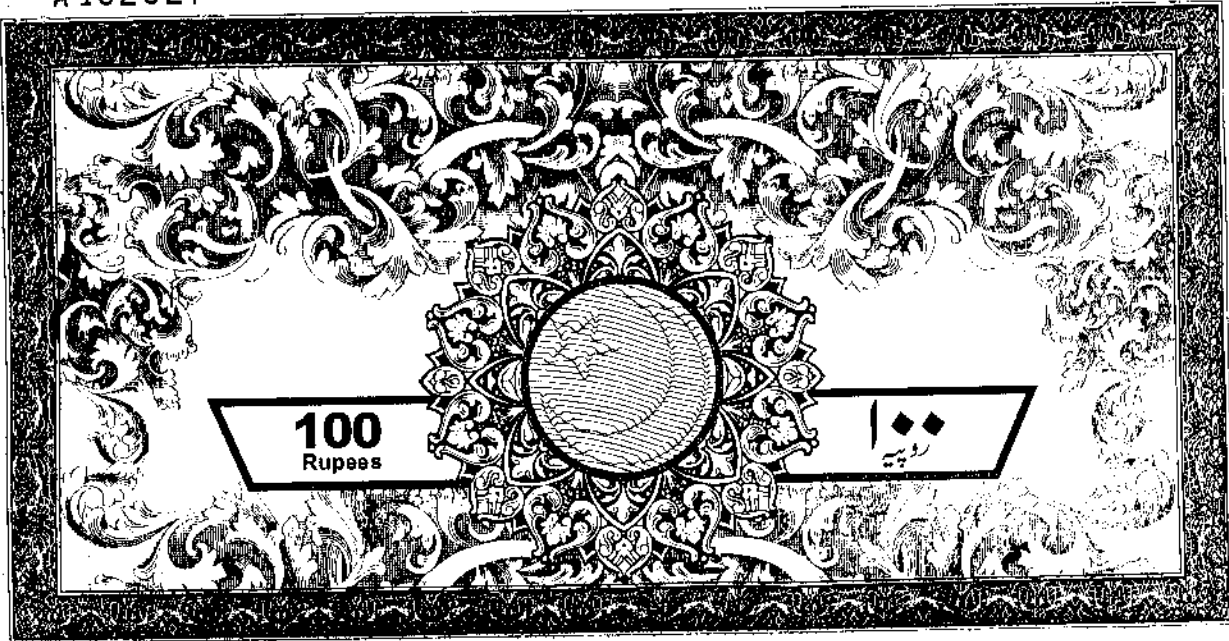


GOVERNMENT OF PUNJAB
Ludhiana
Karnal Road, Ludhiana, Punjab
DATE: 20 JAN 2014

S. NO. _____
ISSUED TO: 065965 Tajuddin Qureshi
THROUGH: _____ Advocate.
PURPOSE: _____
VALUE RS: _____
STAMP VENDOR'S SIGNATURE: _____


IRFAN HUSSAIN
Executive Engineer
SITE Division (Water)
KWSB

A492327

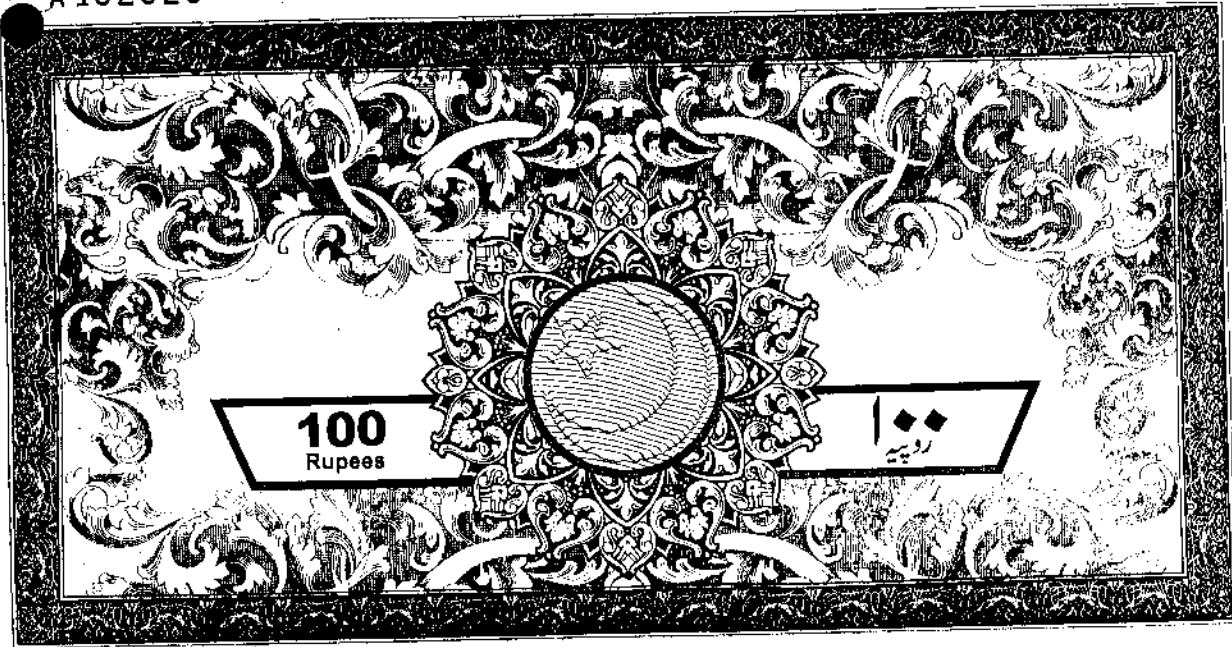


AGIB IQBAL STAMP VENDOR
/ Licence No. 100/2013/14,
Karim Plaza, Clifton, Karachi
Centre **20 JAN 2014**

S. NO. _____ DATE _____
ISSUED TO **065967** *Tajuddin Qureshi*
THROUGH *Advocate.*
PURPOSE _____
VALUE RS _____
STAMP VENDOR'S SIGNATURE _____

[Signature]
Executive Engineer
SITE Division (Water)
KWSB

A492328



LICENSING AUTHORITY
 License No. _____
 Carim Pasha Centre, Karachi
 DATE: 20 JAN 2014
 I. NO. 065969
 ISSUED TO: *Tajuddin Qureshi*
 THROUGH: _____
 PURPOSE: _____
 VALUE RS: _____
 STAMP VENDOR'S SIGNATURE: _____


 A. SAIN
 Executive Engineer
 SITE Division (Water)
 KWSB



**OFFICE OF THE CHIEF ENGINEER (DISTRICT WEST)
KARACHI WATER & SEWERAGE BOARD**

Room No269, 2nd Floor, Old KBCA Building Behind Civic Centre,
Gulshan-e-Iqbal, Karachi.

No. KW&SB/CE/West/2014/ 20

Dated: 28/01/2014

M/s. S.O.H Construction Co.,
Karachi.

LETTER OF ACCEPTANCE / SANCTION LETTER

SUBJECT:- **REPLACEMENT OF 16" DIA MS WATER LINE AT QASBA MORE UC NO-08
AND 10" DIA 6" DIA & 4" DIA UPVC WATER LINE AT DIFFERENT PLACES
IN UC-04 FOR IMPROVEMENT OF WATER SUPPLY IN SAID AREAS SITE
TOWN.**

REF:- Your Tender Opened on 09-12-2013.

The under signed is pleased to convey sanction for an amount to **Rs.19,38,585/-** (Rupees Nineteen Lac Thirty Eight Thousand Five Hundred Eighty Five Only) for the subjected work under Rule SPPRA-2010, on item rate basis duly assessed by the Procurement/ Evaluation Committee-I KW&SB vide **Para-38/N** and approved by MD, KW&SB vide **Para-54/N** the financially concurred-in by finance department, KW&SB vide **Para-41/N to 51/N**. The expenditure is chargeable to **BG No.B-013-17** for the financial year-2013-2014. You shall be bound to abide time to time instruction issued by KW&SB.

You are therefore directed to furnish the Earnest Money amounting to **Rs.39,000/-** being amount of 2% of sanction cost of the contract. You are further directed to contact concern Executive Engineer Office for execution of agreement, the value of stamp paper will be **Rs.5,815/- @ 0.30%** sanctioned cost which should be produced by you. In case of failure, the sanction shall be stand cancelled and action as per Contractual rules shall be taken against you.

All correspondence onward shall be carried out through Superintending Engineer, Site Town, District West, KW&SB.



CHIEF ENGINEER
(DISTRICT WEST)
KW&SB

Copy to:-

- 1-DIRECTOR ACCOUNTS), KW&SB.
- 2-ADLFA, KW&SB.
- 3-SE (SITE TOWN), KW&SB.
- 4-EE (WATER) (SITE TOWN, KW&SB.
- 5-OFFICE COPY.

C.C to:-

1. MD, KW&SB.


IMDAR HUSSAIN
Executive Engineer
SITE Division (Water)
KW&SB



KARACHI WATER & SEWERAGE BOARD

OFFICE OF THE CHIEF ENGINEER (IP&D)

BID EVALUATION REPORT

1	Name of Procuring Agency	KARACHI WATER & SEWERAGE BOARD
2	Tender Reference No	KWSB/DPR/2013/125 published in i) Jahan Pakistan ii) Pakistan Observer on dated: 15-11-2013 and iii) Nawaf Waqat on dated 17-11-2013 and SPPRA Serial No.18034 I D No. /2013
3	Tender Description/Name of Work/Item	REPLACEMENT OF 16" DIA MS WATER LINE AT QASBA MOOR UC NO.8 AND 10" DIA, 6" DIA & 4" DIA UPVC WATER LINE AT DIFFERENT PLACES IN UC-NO 4 FOR IMPROVEMENT OF WATER SUPPLY IN SAID AREAS SITE TOWN
4	Method of Procurement	Single Stage (One Envelop)
5	Tender Published	Through Web Site / press
6	Total Bid Documents Sold	02 Nos
7	Total Bid Received	02 Nos
8	Technical Bid Opening Date (if applicable)	N/A
9	No of Bid Technically Qualified (if applicable)	N/A
10	Bid (s) rejected	Nil
11	Financial Bid Opening Date	9/12/2013

12 Bid Evaluation Report

S #	NAME OF FIRM OR BIDDER	COST OFFERED BY THE BIDDERS	RANKING IN TERMS OF COST	COMPARISON WITH ESTIMATED COST	REASON FOR ACCEPTANCE/ REJECTION	REMARKS
1	M/s. S.O.H Construction Co.	Rs. 1,938,585/-	1st Lowest	@ 1.2573% Below	Substantially Responsive	P.O # 6577892 Dt 05-12-2013 Rs. 39,000/- HBL Rizvia Society Nazimabad Kt-15
2	M/s. Riaz & Co	Rs. 1,949,445/-	2nd Lowest	@ 0.7041% Below	Substantially Responsive	P.O # 50606021 Dt 05-12-2013 Rs. 40,000/- Sardar Bank Gusharee-3rd Flr


The all concerned bidder are being informed accordingly


The E.E Concerned for compliance of rule 45 of SPPRA 2010M/s. S.O.H Construction Co declared as the lowest responsive bidder by the Committee and recommended for Sanction from Competent Authority.


Accounts Officer (IP&D)
Member/Secretary


Additional Director Internal
Audit - KMC Member


Superintending Engineer (KMC)
Member


Chief Engineer (West)
Member


Chief Engineer (IPD),
Convener



Executive Engineer
SITE Division (Water)
KWSB


BIDDING DATA

- Name of Procuring Agency KW&SB
- Brief Description of Work Replacement of 16" M.S. water line at Qasba Mere UC-8 and 10" 6" & 4" UPVC water line at different places in UC-4 for improvement of water supply in said areas, Site Town.
- Procuring Agency Address
- Estimate Cost On item rate basis
- (j) Amount of Bid Security 2% of Bid amount
- (l) Period of Bid Validity 45 Days
- (g) Security Deposit (including Bid Security) 10%
- (h) Venue, Time and Date of Bid Opening The Tender in sealed cover super scribed with the name of the work should be dropped in the Tender Box kept in office of the Chief Engineer (IP&D) at Block-"B" 9th Mile Karsaz, Karachi on 09/12/13 at 2.00 PM by Procurement Committee
- (i) Deadline for submission of Bid along with time. 09-12-2013 at 1.00p.m.
- (j) Time for completion from written order commence 30 Days
- (k) Liquidity damage 0.5% of Bid Cost per day of delay
- (l) Bid issued to Firm M/s. S.O.H. Construction Co.
- (m) Deposit Receipt No. & Date R. No. 45, DTC 6-12-2013

Amount:

Rs. _____


Executive Engineer
Site Town (Water), KW&SB
Town, KW&SB


TENDER CLERK
Authority Issuing Bidding Document
K. W. & S.B.

**OFFICE OF THE EXECUTIVE ENGINEER SITE TOWN (WATER)
KARACHI WATER & SEWERAGE BOARD**

Estimate amount:- Item Rate basis
 Time limit : 30 ~~20~~ days
 Penalty for delay : 500/- P/day
 Tender Cost : 2000/-
 Date of Opening : 09-12-2013

Name of Work: **REPLACEMENT OF 16" DIA MS WATER LINE AT QASBA MOOR UC NO.8 AND 10" DIA, 8" DIA & 4" DIA UPVC WATER LINE AT DIFFERENT PLACES IN UC-NO.4 FOR IMPROVEMENT OF WATER SUPPLY IN SAID AREAS SITE TOWN.**


S. No	Description of Work	Qty	Rate	Per	Amount
1.	Dismantling end removing road metalling.	1505 Cft	605/-	% Cft.	9105-25
2.	Excavation for pipe line trenches & pits in all kinds of soils of murum i/c trimming and dressing sides to true alignment & shapes levelling of bed trenches to correct level end grade cutting joint holes & disposal of surplus earth within a one chain as directed by Enginaer incharge. Providing fence guards lights, flags, and temporary crossing for non-vehicular traffic where ever required lift upto 5ft (1.52m) end lead upto 1 chain(30.5m)	9949.62 Cft	4650/-	%0 Cft	46265-73
3.	Add for additional lift of every three ft or part there of in item No.1 to 15 (A&B) for Excavation for pipe lines of storage tanks trenches and pits.				
	5' to 8'	2726.14 Cft	5200/-	%0 Cft	14175-92
	8' to 11'	3120 Cft	5750/-	%0 Cft	17940-00
	11' to 14'	3120 Cft	6300/-	%0 Cft	19656-00
4.	Excavation for pipe line in trenches and pits in hard rock by hammering end chiselling i/c trimming and dressing sides to true alignment & shape leveling of beds of trenches to correct level end grade cutting joint holes & disposal of surplus earth with in e one chain as directed by Engineer incharge. Providing fence guards lights, flags, and temporary crossing for non-vehicular traffic where aver required lift upto 5ft (1.52m) and lead upto one chain(30.5m).	2320 Cft.	2450/-	%0 Cft.	56878-00
5.	Full hire charges of the pumping set i/c weges of driver and Assistant fuel electric energy plate from required for placing pump etc at lower depth with suction and delivery pipes for pumping out water et found et depth from trench including the cost of erection and dismantling after completion of the job (i) Hire charges of pumping set of upto 10-HP pumping out water from 10' deep trench.	25 Days	1400	P/Day	35000-00

[Handwritten Signature]
 Executive Engineer
 Site Town (Water)
 KWSB

	manufacturing supplying & fixing black steel MS Pipe made out of MS Sheat conforming to API 5L grade X-42 ERW & Externally asphalt coated with fiber glass 5mm thick & Internal C.C lining 8mm thick (AWWA Specification) l/c laying jointing with Helical welding in trenches l/c cost of bends of any degree & testing with water specified pressura for different dia of pipes as below (spirally welded) 16" dia (6.4mm thick).	260 Rft	3949	P/Rft	1026740-00
7.	Providing laying UPVC pipes of class C fixing in trench l/c cutting, fitting and jointing with solvent cement l/c testing with water to a head of 61.5 meter to 300 ft. 250mm (10" Dia) 150mm (6" Dia) 100mm (4" Dia)	75 Rft 400 Rft 140 Rft	1010 360 150	P/Rft P/Rft P/Rft	75750-00 144000-00 21000-00
8.	Supplied for UPVC/AC pressure pipe 10" (equal tee) 10" to 6" (un-aqual tee)	02 Nos.	6987-50	Each	13975-00
9.	C.I sluice heavy pattern imported (test-pressure 21.0Kg/Sq.Com or 300 lbs/Sq inch). 10" dia 6" dia	04 Nos. 04 Nos.	27670 9360	Each Each	110760-00 37440-00
10.	Fixing of Sluice vslve with two tail pieces one end flange and one end socket with nuts and bolts rubber packing tec. 10" dia 6" dia	04 Nos.	3379	Each	13276-00
11.	Construction of C/C Block Masonry Chamber of size 4"x 4x4" (inside dimenston) with 24"x24" CI cover frame weighting 65 Kg fixed RCC 1:2:4 slabs 8" thick steel 1/2" dia tor main bars @ 6" thick c/c 1:3:6 flooring 1/2" cement plaster 1:6 to all inside wall surface 1 feet deep upto roof slab including MS foot rest 5/8" dia bers every deep curing excavation dewatering and refilling etc complete	04 Nos.	1806	Each	7544-00
12.	Refilling the excavated stuff in trenches 6" thick layer l/c watering ramming to full compaction etc complete.	21235.75 CR	2760 CR	%0 CR	58610.67


 EXECUTIVE ENGINEER
 SITE DIVISION (Water)
 KWSB


Total Amount Rs. = 1938585/2/=


 Executive Engineer (Water)
 Site Town, KW&SB

NOTE:- Contractor will abide all existing rules / terms & condition of SPPRA-2010.

I/We hereby Quoted an Amount of Rs. 1938585/2 On item rete basis.

In words ninteen Lacs thirty eight thousand five hundred eighty five only

Signature of Contractor 

Address: M/S - P.O.H Const Co

Cell No. L-631 Sector SA/A North Karachi, S.O.H CONSTRUCTION CO

0300-2216163

Proprietor

COMPARATIVE STATEMENT

NAME OF WORK: REPLACEMENT OF 16" DIA MS WATER LINE AT QASBA MOOR UC NO.8 AND 10" DIA, 6" DIA & 4" DIA UPVC WATER LINE AT DIFFERENT PLACES IN UC-NO.4 FOR IMPROVEMENT OF WATER SUPPLY IN SAID AREAS SITE TOWN

S.No	Description of Work	Engineer's Estimate			M/s. S.O.H Construction Co.			M/s. Riaz & Co.		
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount	
1	Dismantling and removing road metelling Excavation for pipe lines of the trenches and pits in wet soil clay or mud i/c trimming and dressing side to true alignment and shape levelling of beds of trenches to correct level and grade, cutting joint holes and disposal of surplus earth with in a one chain as directed be engineer incharge providing fence guards, lights, flags and temporary crossings for non-vehicular traffic where ever required lift upto 5 ft (1.52m) and lead upto one chain (30.5m)	1505 Cft	605.00	% Cft	9,105.25	605.00	9,105.25	605.00	9,105.25	
2		9949.62 Cft	4,650.00	% 0 Cft	46,265.73	4650.00	46,265.73	4,650.00	46,265.73	
3	Add for additional lift of every three ft or part there of In Item No.1 to 15 (A&B) for Excavation for pipe lines of storage tanks trenches and pits 5' to 8' 8' to 11' 11' to 14'	2726.14 Cft 3120 Cft 3120 Cft	5,200.00 5,750.00 6,300.00	% 0 Cft % 0 Cft % 0 Cft	14,175.93 17,940.00 19,656.00	5200.00 5750.00 6300.00	14,175.93 17,940.00 19,656.00	5,200.00 5,750.00 6,300.00	14,175.93 17,940.00 19,656.00	
4	Excavation for pipe lines of the trenches and pits in hard rock by hammering and chiseling i/c trimming and dressing side to true alignment and shape levelling of beds of trenches to correct level and grade, cutting joint holes and disposal of surplus earth with in a one chain as directed be engineer incharge providing fence guards, lights, flags and temporary crossings for non-vehicular traffic where ever required lift upto 5 ft (1.52m) and lead upto one chain (30.5m)	2320 Cft	24,150.00	% 0 Cft	56,028.00	24,150.00	56,028.00	24,150.00	56,028.00	

IMDAR ALI KHAN
 Engineer
 Public Works Division
 KWP B

[Handwritten Signature]

[Handwritten Signature]

[Handwritten Signature]

[Handwritten Signature]

NAME OF WORK: REPLACEMENT OF 16" DIA MS WATER LINE AT QASBA MOOR UC NO.8 AND 10" DIA, 6" DIA & 4" DIA UPVC WATER LINE AT DIFFERENT PLACES IN UC-NO.4 FOR IMPROVEMENT OF WATER SUPPLY IN SAID AREAS SITE TOWN


S.No	Description of Work	Engineer's Estimate			M/s. S.O.H Construction Co.			M/s. Riaz & Co.		
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount	
5	Full hire charges of pumping set i/c wages of driver and Assistant fuel or electric energy plate form required for placing or at lower depths with suction end delivery pipes for pumping and water found at various depth form trenches i/c cost of erection and dismantling after completion of the job. (i) Hire charges of pumping set of upto 10 H.P. pumping out water for 10 feet deep trench.	25 Day	1,500.00	P/Day	37,500.00	1400.00	35000	1450	36,250.00	
6	Manufacturing supplying & fixing black steel M/S pipe made out of M/S sheet conforming to API 51 grade X-42 ERW & Eternally asphalt coated with fiber glass 5mm thick & internally C.C lining 8mm thick (AWWA Space) i/c laying jointing with welding in trench i/c cost of bends of any degree & testing with water specified pressure for different dia of pipe as below (straight) 16" Dia (5.4mm thick)	260 Rft	3,999.09	P/Rft	1,039,763.40	3,949.00	1,026,740.00	3970	1,032,200.00	
7	Providing laying UPVC pipes of class C fixing in trench i/c cutting, fitting and jointing with Solvent cement i/c testing with water to a head of 81.5 meter to 300 ft. 250mm (10" dia) 150mm (6" dia) 100mm (4" dia)	75 P/Rft 400 Rft 140 Rft	1,084.00 370.00 174.00	P/Rft P/Rft P/Rft	77,550.00 148,000.00 24,360.00	1,010.00 360.00 150.00	75,750.00 144,000.00 21,000.00	1020 365 160	76,500.00 146,000.00 22,400.00	
8	Supplied for UPVC/AC pressure pipe 10" (equal size) 10" to 6" (Ln-equal size)	2 Nos 1 Nos	6,987.50 4,462.50	Each Each	13,975.00 4,462.50	6,987.50 4,462.50	13,975.00 4,462.50	6987.5 4462.5	13,975.00 4,462.50	


INDIA
EXCLUSIVE
RIGHTS
RESERVED
 QASBA MOOR UC NO.8
 SITE TOWN


Handwritten signatures and initials:
 [Signature]
 [Signature]
 [Signature]


NAME OF WORK: REPLACEMENT OF 16" DIA MS WATER LINE AT QASBA MOOR UC NO.8 AND 10" DIA, 6" DIA & 4" DIA UPVC WATER LINE AT DIFFERENT PLACES IN UC-NO.4 FOR IMPROVEMENT OF WATER SUPPLY IN SAID AREAS SITE TOWN


S.No	Description of Work	Engineer's Estimate			M/s. S.O.H Construction Co.		M/s. Riaz & Co.		
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount
9	C.I sluice valve heavy pattern (test pressure 21. Kg sq cm or 300Lbs/sq. inch(imported) 10" dia	4 Nos	27 690.00	Each	110,760.00	27690.00	110760	27690	110,760.00
	06" Dia	4 Nos	9 360.00	Each	37,440.00	9360.00	37440	9360	37,440.00
10	Fixing of sluice valve with two tail pieces one and flange and one and socket with nuts and bolts rubber packing etc. 10" dia	4 Nos	3,319.00	Each	13,276.00	3319.00	13276	3319	13,276.00
	06" Dia	4 Nos	1,886.00	Each	7,544.00	1886.00	7544	1886	7,544.00
11	Construction of CC block Masonary chamber of size 4x4x4(inside dimension) with 24x24" Cover frame weight (65kg) fixed RCC 1:2:4 slabs 6" thick with steel 1/2 dia for main bar @ 6" CC 1/4 " dia 8" C/C distribution bars 6" thick CC 1:3:6 flooring 1/2" thick cement plaster 1:6 inside wall surface surface 1ft deep upto Roof slab i/c MS foot rest 5/8" dia bars every deep curring, dewatering, excavation, refilling etc complete.	8 Nos	28,357.00	Each	226,856.00	28357.00	226856	28357	226,856.00
12	Refilling the excavated stuff in trenches 6" thick layer i/c watering to full compaction etc complete.	21235.75 Cft	2,760.00	% 0 Cft	58,610.67	2760.00	58610.67	2760.00	58,610.67
	Total Quoted / Corrected Cost				1,963,268.48		1,938,584.58		1,949,444.58
	Say				1,963,268		1,938,585		1,949,445


 Accounts Officer (West)
 Member/Secretary


 Chief Engineer (West)
 Member


 Additional Director for Internal
 Audit - KMC Member


 Chief Engineer (Cement)


 Superintending Engineer (KMC)
 Member



KARACHI WATER & SEWERAGE BOARD

OFFICE OF THE CHIEF ENGINEER (IP&D)


BID OPENING REPORT

1	Name of Procuring Agency	KARACHI WATER & SEWERAGE BOARD
2	Tender Reference No	KWSB/DPR/2013/125 published in i) Jahan Pakistan ii) Pakistan Observer on dated: 15-11-2013 and iii) Nawai Waqat on dated: 17-11-2013 and SPPRA Serial No 18034 I.D No. /2013
3	Tender Description/Name of Work/Item	REPLACEMENT OF 16" DIA MS WATER LINE AT QASBA MOOR UC NO 8 AND 10" DIA, 6" DIA & 4" DIA UPVC WATER LINE AT DIFFERENT PLACES IN UC-NO.4 FOR IMPROVEMENT OF WATER SUPPLY IN SAID AREAS SITE TOWN
4	Method of Procurement	Single Stage (One Envelop)
5	Tender Published	Through Web Site / press
6	Total Bid Documents Sold	02 Nos
7	Total Bid Received	02 Nos
8	Technical Bid Opening Date (if applicable)	N/A
9	No. of Bid Technically Qualified (if applicable)	N/A
10	Financial Bid Opening Date	9/12/2013


11 Bid Opening Report


S #	NAME OF FIRM OR BIDDER	COST OFFERED BY THE BIDDERS	RANKING IN TERMS OF COST	REMARKS
1	M/s. S.O.H Construction Co	Rs. 1,938,585/-	1st Lowest	P.O # 6577892 Dt: 05-12-2013 Rs 39,000/- HBL Rizvia Society Nazmabad KHI Br
2	M/s. Riaz & Co	Rs. 1,942,457/-	2nd Lowest	P.O # 50606021 Dt: 05-12-2013 Rs 40,000/- Summit Bank Gulshan-e-Iqbal Br


M/s. S O H Construction Co. declared as the lowest responsive bidder


Accounts Officer (West)
Member/Secretary


Additional Director Internal
Audit - KMC Member


Superintending Engineer (KMC)
Member


Chief Engineer (West)
Member


Chief Engineer (IP&D)
Member (Convener)

KARACHI WATER & SEWERAGE BOARD

OFFICE OF THE CHIEF ENGINEER (IP&D)

BID EVALUATION REPORT

1	Name of Procuring Agency	KARACHI WATER & SEWERAGE BOARD
2	Tender Reference No	KWSB/DPR/2013/125 published in i) Jahan Pakistan, ii) Pakistan Observer on dated: 15-11-2013 and iii) Nawai Waqat on dated: 17-11-2013 and SPPRA Serial No. 18034 I.D No. /2013
3	Tender Description/Name of Work/Item	REPLACEMENT OF 16" DIA MS WATER LINE AT QASBA MOOR UC N0 8 AND 10" DIA 6" DIA & 4" DIA UPVC WATER LINE AT DIFFERENT PLACES IN UC-N0.4 FOR IMPROVEMENT OF WATER SUPPLY IN SAID AREAS SITE TOWN
4	Method of Procurement	Single Stage (One Envelop)
5	Tender Published	Through Web Site / press
6	Total Bid Documents Sold	02 Nos
7	Total Bid Received	02 Nos
8	Technical Bid Opening Date (if applicable)	N/A
9	No. of Bid Technically Qualified (if applicable)	N/A
10	Bid (s) rejected	Nil
11	Financial Bid Opening Date	9/12/2013

12 Bid Evaluation Report

S#	NAME OF FIRM OR BIDDER	COST OFFERED BY THE BIDDERS	RANKING IN TERMS OF COST	COMPARISON WITH ESTIMATED COST	REASON FOR ACCEPTANCE/ REJECTION	REMARKS
1	M/s. S.O.H Construction Co.	Rs. 1,938,585/-	1st Lowest	@ 1.2573% Below	Substantially Responsive	P.O # 8577892 Dt: 05-12-2013 Rs. 39,000/- HBL Rizvia Society Nazimabad KHI Br
2	M/s. Riaz & Co	Rs. 1,949,445/-	2nd Lowest	@ 0.7041% Below	Substantially Responsive	P.O # 50606021 Dt: 05-12-2013 Rs. 40,000/- Summit Bank Gulshan-e-Iqbal Br

The all concerned bidder are being informed accordingly.


The E.E Concerned for compliance of rule 45 of SPPRA 2010M/s. S.O.H Construction Co. declared as the lowest responsive bidder by the Committee and recommended for Sanction from Competent Authority


Accounts Officer (West)
Member/Secretary


Additional Director Internal
Audit - KMC Member


Superintending Engineer (KMC)
Member


Chief Engineer (West)
Member


Chief Engineer (IPD),
idr (Convener)

COMPARATIVE STATEMENT

NAME OF WORK: REPLACEMENT OF 16" DIA MS WATER LINE AT GASBA MOOR UC NO.8 AND 10" DIA, 6" DIA & 4" DIA UPVC WATER LINE AT DIFFERENT PLACES IN UC-N0.4 FOR IMPROVEMENT OF WATER SUPPLY IN SAID AREAS SITE TOWN

S.No	Description of Work	Engineer's Estimate			M/s. S.O.H Construction Co.		M/s. Riaz & Co.		
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount
1	Dismantling and removing road metling	1505 Cft	605.00	% Cft	9,105.25	605.00	9,105.25	605.00	9,105.25
2	Excavation for pipe lines of the trenches and pits in wet soil clay or mud i/c trimming and dressing side to true alignment and shape levelling of beds of trenches to correct level and grade, cutting joint holes and disposal of surplus earth with in a one chain as directed be engineer incharge providing fence guards, lights, flags and temporary crossings for non-vehicular traffic where ever required lift upto 5 ft (1.52m) and lead upto one chain (30.5m)	9949.62 Cft	4,650.00	% Cft	46,265.73	4650.00	46,265.73	4,650.00	46,265.73
3	Add for additional lift of every three ft or part there of in item No.1 to 15 (A&B) for Excavation for pipe lines of storage tanks trenches and pits 5' to 8' 8 to 11' 11' to 14'	2726.14 Cft 3120 Cft 3120 Cft	5,200.00 5,750.00 6,300.00	% Cft % Cft % Cft	14,175.93 17,940.00 19,656.00	5200.00 5750.00 6300.00	14,175.93 17,940.00 19,656.00	5,200.00 5,750.00 6,300.00	14,175.93 17,940.00 19,656.00
4	Excavation for pipe lines of the trenches and pits in hard rock by hammering and chiseling i/c trimming and dressing side to true alignment and shape levelling of beds of trenches to correct level and grade, cutting joint holes and disposal of surplus earth with in a one chain as directed be engineer incharge providing fence guards, lights, flags and temporary crossings for non-vehicular traffic where ever required lift upto 5 ft (1.52m) and lead upto one chain (30.5m)	2320 Cft	24,150.00	% Cft	56,028.00	24150.00	56,028.00	24,150.00	56,028.00

Committed by

SP

Amir

CP

NAME OF WORK: REPLACEMENT OF 16" DIA MS WATER LINE AT QASBA MOOR UC NO.8 AND 10" DIA, 6" DIA & 4" DIA UPVC WATER LINE AT DIFFERENT PLACES IN UC-N0.4 FOR IMPROVEMENT OF WATER SUPPLY IN SAID AREAS SITE TOWN

S.No	Description of Work	Engineer's Estimate			M/s. S.O.H Construction Co.			M/s. Riaz & Co.	
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount
5	Full hire charges of pumping set i/c wages of driver and Assistant fuel or electric energy plate form required for placing or at lower depths with suction and delivery pipes for pumping and water found at various depth form trenches i/c cost of erection and dismantling after completion of the job. (i) Hire charges of pumping set of upto 10 H.P pumping out water for 10 feet deep trench	25 Day	1,500.00	P/Day	37,500.00	1400.00	35000	1450	36,250.00
6	Manufacturing supplying & fixing black steel M/S pipe made out of M/S sheet confirming to API 51 grade X-42 ERW & Eternally asphalt coated with fiber glass 5mm thick & internally C.C lining 8mm thick (AWWA Space) i/c laying jointing with welding in trench i/c cost of bends of any degree & testing with water specified pressure for different dia of pipe as below (straight) 16" Dia (6.4mm thick)	260 Rft	3,999.09	P/Rft	1,039,763.40	3,949.00	1,026,740.00	3970	1,032,200.00
7	Providing laying UPVC pipes of class C fixing in trench i/c cutting fitting and jointing with Solvent cement i/c testing with water to a head of 81.5 meter to 300 ft	75 Rft	1,034.00	P/Rft	77,550.00	1,010.00	75,750.00	1020	76,500.00
	250mm (10" dia)	400 Rft	370.00	P/Rft	148,000.00	360.00	144,000.00	365	146,000.00
	150mm (6" dia)	140 Rft	174.00	P/Rft	24,360.00	150.00	21,000.00	160	22,400.00
	100mm (4" dia)								
8	Supplied for UPVC/AC pressure pipe 10" (equal tee) 10" to 6" (un-equal tee)	2 Nos 1 Nos	6,987.50 4,462.50	Each Each	13,975.00 4,462.50	6,987.50 4,462.50	13,975.00 4,462.50	6987.5 4462.5	13,975.00 4,462.50

Signature

h/s

Signature

Signature

Signature

NAME OF WORK: REPLACEMENT OF 16" DIA MS WATER LINE AT QASBA MOOR UC NO.8 AND 10" DIA, 6" DIA & 4" DIA UPVC WATER LINE AT DIFFERENT PLACES IN UC-NO.4 FOR IMPROVEMENT OF WATER SUPPLY IN SAID AREAS SITE TOWN

S.No	Description of Work	Engineer's Estimate			M/s. S.O.H Construction Co.		M/s. Riaz & Co.		
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount
9	C.I. sluice valve heavy pattern (test pressure 21 Kg sq.com or 300lbs/sq. inch(imported) 10" dia	4 Nos	27,690.00	Each	110,760.00	27690.00	110,760.00	27690	110,760.00
	06" Dia	4 Nos	9,360.00	Each	37,440.00	9360.00	37,440.00	9360	37,440.00
10	Fixing of sluice valve with two tail pieces one and flange and one and socket with nuts and bolts rubber packing etc.	4 Nos	3,319.00	Each	13,276.00	3319.00	13,276.00	3319	13,276.00
	10" dia	4 Nos	1,886.00	Each	7,544.00	1886.00	7,544.00	1886	7,544.00
	06" Dia								
11	Construction of CC block Masonary chamber of size 4x4x4(inside dimension) with 24x24" Cover frame weight (65kg) fixed RCC 1:2:4 slabs 6" thick with steel 1/2 dia tor main bar @ 6" CC 1/4" dia 8" C/C distribution bars 6" thick CC 1:3:6 flooring 1/2" thick cement plaster 1:5, inside wall surface surface 1ft deep upto Roof slab i/c MS foot rest 5/8" dia bars every deep curing, dewatering, excavation, refilling etc complete	8 Nos	28,357.00	Each	226,856.00	28357.00	226,856.00	28357	226,856.00
12	Refilling the excavated stuff in trenches 6" thick layer i/c watering to full compaction etc complete	21235.75 Cft	2,760.00	% 0 Cft	58,610.67	2760.00	58,610.67	2760.00	58,610.67
	Total Quoted / Corrected Cost				1,963,268.48		1,938,584.58		1,949,444.58
	Say				1,963,268		1,938,585		1,949,445

[Signature]
 Accounts Officer (West)
 Member/Secretary

[Signature]
 Chief Engineer (West)
 Member

[Signature]
 Additional Director Internal
 Audit - KMC Member

[Signature]
 Chief Engineer (UPDT)
 (Convener)

[Signature]
 Superintending Engineer (KMC)
 Member