



KARACHI WATER & SEWERAGE BOARD

OFFICE OF THE CHIEF ENGINEER (IP&D)

BID EVALUATION REPORT


1	Name of Procuring Agency	KARACHI WATER & SEWERAGE BOARD
2	Tender Reference No	INF/KRY No:2607/14 and published in Daily News Papers i) Nawa Sujh ii) Daily Quwwat iii) The National Dated: 16/08/2014 and as well as SPPRA website vide Serial No. 21224 I.D /2014
3	Tender Description/Name of Work/Item	CONSTRUCTION OF NEW PUMPING STATION AT MIANWALI COLONY UC#9 SITE TOWN
4	Method of Procurement	Single Stage (One Envelop)
5	Tender Published	Through Press / Website
6	Total Bid Documents Sold	04 Nos
7	Total Bid Received	04 Nos
8	Technical Bid Opening Date (if applicable)	N/A
9	No of Bid Technically Qualified (if applicable)	N/A
10	Bid (s) rejected	Three
11	Financial Bid Opening Date	2/9/2014

12 Bid Evaluation Report


S #	NAME OF FIRM OR BIDDER	COST OFFERED BY THE BIDDERS	RANKING IN TERMS OF COST	COMPARISON WITH ESTIMATED COST	REASON FOR ACCEPTANCE/ REJECTION	REMARKS
1	M/s. Haji Syed Ameer & Brothers	Rs. 107,997,510/-	1st Lowest	@ 19.6248% Above	Substantially Responsive	B.G # BOK/IBB-STE/109/09/03/2014 Rs. 2,250,000/- Dated:02-09-2014 The Bank of Khyber Islamic Banking Br B-78 Allied Plaza Estate Avenue SITE Karachi
2	M/s. Crystal Paramount Construction	Rs. 159,555,699/-	2nd Lowest	@ 76.7339% Above	Un Responsive bid due to 2% P.O are Short	P.O # 0239592 Dt:01-09-2014 Rs. 2,282,000/- The Bank of Khyber Site Br
3	M/s. Malik Zaheer Khan	Rs. 116,634,809/-			Un Responsive bid due to P.O are Not Attached	
4	M/s. Haji Gul Muhd Khan Sherani	Not Quoted				

The all concerned bidder are being informed accordingly.


The E.E Concerned for compliance of rule 45 of SPPRA 2010 M/s. Haji Syed Ameer & Brothers. declared as the lowest responsive bidder by the Committee and recommended for Sanction from Competent Authority.


(Muhammad Khalid Khan)
Accounts Officer (West)
Member/Secretary


(Saif-ul-Haque)
Additional Director Internal
Audit - KMC Member


(Maqsood Ahmed Shaikh)
Superintending Engineer (KMC)
Member


(Owais Malik)
Chief Engineer (West)
Member


(Abdul Rahim Khatti)
Chief Engineer (IPD),
(Convener)

Method of Procurement: Single Stage Single Envelope.

Name of Work: CONSTRUCTION OF NEW PUMPING STATION AT MIANWALI COLONY UC#9 SITE TOWN

MINUTES OF BID OPENING MEETING.

A meeting of the procurement committee of this department was held on 02-09-2014 for opening the bids received in respect of subject NIT till deadlines of submission. The meeting was attended by all / following members of the procurement committee and the representative of bidders. **(Attendance sheet is enclosed).**

2. Four bidders submitted their bids till the deadline of submission.

- i. M/s. Haji Syed Ameer & Brothers
- ii. M/s. Crystal Paramount Construction
- iii. M/s. Malik Zaheer Khan
- iv. M/s. Haji Gul Muhd Khan Sherani


3. The bids were opened at 2:00 P.M in the presence of the above mentioned participants and the rates quoted by bidders were read aloud and encircled by Chairman of the Procurement Committee.

S.No	Name of Firm	Quoted Price	Amount of Bid Security	Pay Order No. / Date
01	M/s. Haji Syed Ameer & Brothers	Rs. 107,997,510/-	Rs. 2,250,000/-	B.G # BOK/IBB-STE/109/09/03/2014 Dated:02-09-2014 The Bank of Khyber Islamic Banking Br B-78 Allied Plaza Estate Avenue SITE Karachi
02	M/s. Crystal Paramount Construction	Rs.114,134,659/-	Rs. 2,282,000/-	P.O # 0239592 Dt:01-09-2014 The Bank of Khyber Site Br
03	M/s. Malik Zaheer Khan	Rs.116,634,809/-	P.O Not Attached	
04	M/s. Haji Gul Muhd Khan Sherani	Not Quoted		


4. The bids do not contain any over-writing or cutting.


5. The committee shall examine all the bids as per the qualification / eligibility criteria provided in the bidding document and verify the documents and bid security submitted by the bidders (if required).


The meeting ended with the vote of thanks to and from the chair.


(Muhammad Khalid Khan)
Accounts Officer (West)
Member / Secretary


(Saif-ul-Haque)
Additional Director Internal
Audit – KMC Member


(Maqsood Ahmed Shaikh)
Superintending Engineer (KMC)
Member


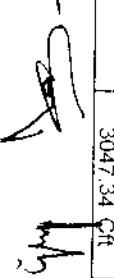
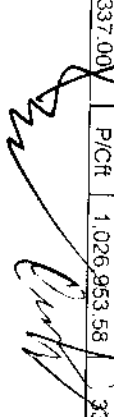

(Qvais Malik)
Chief Engineer (West)
Member


(Abdul Raheem Khattai)
Chief Engineer (IPD)
Convener

COMPARATIVE STATEMENT

NAME OF WORK: CONSTRUCTION OF NEW PUMPING STATION AT MIANWALI COLONY UC#9 SITE TOWN

S.No	Description of Work	As per Corrected Engineer's Estimate			As per Approved P.C-1			M/s. Haji Syod Ameer & Brothers		M/s. Crystal Paramount Construction	
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount	Rate	Amount
1	Excavation for foundation of Building, Bridges and other structure with excavated earth watering and ramming lead upto 5ft. in ordinary soil.	3445.00	3,176.25	% 0 Cft	10,942.18	3,176.25	10,942.18	32,000.00	110,240.00	8,000.00	27,560.00
2	Excavation for pipe line in trenches & pits in all kind of soil/ murrum i/c trimming and dressing sides to true alignment & shape leveling of beds of trenches to correct level and grade cutting joints holes & disposal of surplus earth within a one chain as directed by Engineer incharge. Providing fence guards, lights, flags and temporary crossing for non-vehicular traffic where ever required lift upto 5ft (1.52m) and lead upto on chain(30.5m), (0' to 5')	292250.00	4,650.00	% 0 Cft	1,358,962.50	4,650.00	1,358,962.50	4,700.00	1,373,575.00	8,000.00	2,338,000.00
2(a)	Add for additional depth (5' to 8')	76500.00	5,200.00	% 0 Cft	397,800.00	5,200.00	397,800.00	5,500.00	420,750.00	9,000.00	688,500.00
2(b)	Add for additional depth (8' to 11')	52700.00	5,750.00	% 0 Cft	303,025.00	5,750.00	303,025.00	6,000.00	316,200.00	10,000.00	527,000.00
3	Cement concrete brick of stone ballast 1 1/2" to 2" gauge ration 1:4:8.	1212.41	9,416.28	% Cft	114,163.92	9,416.28	114,163.92	9,500.00	115,178.95	15,000.00	181,861.50
4	Reinforced cement concrete work i/c all labour and material except the cost of steel reinforcement and its labour for bending and binding which will be paid separately. This rate also includes all kind of forms moulds, filling shuttering curing rendering and finishing the exposed surface (including screening and washing of shingle). a) R.C. work in roof slab, beams rafters, tiels and other structural members laid in situ or precast laid in position complete in all respects. Ratio (1:2:4) 90 lbs cement 2 Cft Stand Shingle 1/8" to 1/4 gauge	3047.34	337.00	P/Cft	1,026,953.58	337.00	10,269.53	400.00	1,218,936.00	15,000.00	45,710,100.00

NAME OF WORK: CONSTRUCTION OF NEW PUMPING STATION AT MIANWALI COLONY UC#9 SITE TOWN

S.No	Description of Work	As per Corrected Engineer's Estimate			As per Approved PC-I			M/s. Haji Syed Ameer & Brothers		M/s. Crystal Paramount Construction	
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount	Rate	Amount
5	p/l. 1:3:6 cement concrete solid block masonry wall 6" and below in thickness set in 1:6 cement mortar in ground floor super structure i/c raking out joints and curing etc	1803.50 CH	15,771.01	% CH	284,430.17	15,771.01	284,430.17	16,000.00	288,560.00	18,000.00	324,630.00
6	Fabrication of mild steel reinforcement for cement concrete including cutting bending, laying in position, making joints and fastening i/c cost of binding wire (also includes removal of rust from bars) (TOR BARS)	51.56 Cwt	5,001.70	P/Cwt	257,887.65	5,001.70	257,887.65	5,200.00	268,112.00	6,000.00	309,360.00
7	Making & fixing steel grated door with 1/16" thick sheeting i/c angle iron frame 2"x2" 3/8" and 1/2" square bars 4" center to centre with locking arrangement	391.00 Sft	726.72	% Sft	2,841.48	726.72	2,841.48	800.00	3,128.00	80,000.00	312,800.00
8	Cement plaster 1:6 upto 12' height (b) 1/2" thick	11934.00 Sft	2,206.60	% Sft	263,335.64	2,206.60	263,335.64	2,300.00	274,482.00	4,000.00	477,360.00
9	P/L 1" thick topping cement concrete (1:2:4) i/c surface finishing and dividing in to panels (c) 2" thick	2318.50 Sft	3,275.50	% Sft	75,942.47	3,275.50	75,942.47	3,300.00	76,510.50	5,000.00	115,925.00
10	Distemping (b) two coats.	11702.00 Sft	1,043.90	% Sft	122,157.18	1,043.90	122,157.18	1,100.00	128,722.00	1,500.00	175,530.00
11	Laying floors of approved coloured glazed tiles 1/2" thick laid in white cement and pigment on a bed of 3/4" thick cement mortar 1:2	124.00 Sft	27,747.06	% Sft	34,406.35	27,747.06	34,406.35	28,000.00	34,720.00	40,000.00	49,600.00
12	Glazed tile dadn 1/2" thick laid in pigment over 1:2 cement sand mortar 3/4" thick i/c finishing.	232.00 Sft	28,299.30	% Sft	65,654.38	28,299.30	65,654.38	29,000.00	67,280.00	30,000.00	69,600.00
13	Painting doors / windows any type. (Two Coats)	638.00 Sft	1,160.06	% Sft	7,401.18	1,160.06	7,401.18	1,200.00	7,656.00	1,500.00	9,570.00

NAME OF WORK: CONSTRUCTION OF NEW PUMPING STATION AT MIANWALL CDLONY UC#9 SITE TOWN

S.No	Description of Work	As per Corrected Engineer's Estimate			As per Approved PC-I			M/s. Haji Syed Ameer & Brothers		M/s. Crystal Paramount Construction	
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount	Rate	Amount
14	P/F Squaring type white glazed earthen W/C pan with i/c the cost of flushing cistern with internal fitting and flush pipe with bend and making requisite number of holes in walls, plinth & floor pipe connections and making good in cement concrete 1:2:4 W/C pan of not less than 23" clear opening between flushing rims and 3 gallons flushing tank with 4" dia CI tape.	2.00 Nos	5,044.60	Each	10,089.20	5,044.60	10,089.20	5,100.00	10,200.00	8,000.00	16,000.00
15	P/F 24x18" lavatory basin in white glazed earthen ware complete with i/c the cost of W.I. or C.I. cantilever brackets 6 inches built into wall, painted white in two coats after a primary coat of red lead paint, a pair of 1/2" dia rubber plug & chrome plate brass traps malleable iron or brass unions and making requisite number of holes in walls, plinth & floor for pipe connection and making good in cement concrete 1:2:4 (Standard pattern)	2.00 Nos	4,253.70	Each	8,507.40	4,253.70	8,507.40	4,300.00	8,600.00	8,000.00	16,000.00
16	Providing G.I. pipes and specials, and clamps etc. including fixing cutting & fitting complete with i/c the cost of breaking through walls and roof, making good etc. painting two coats after cleaning the pipe etc. with white zinc paint with pigment to match the colour of the building and testing with water to a pressure head of 200 feet and handling (1) 1/2" dia G.I. pipe. (2) 3/4" dia G.I. pipe	55.00 Rft 75.00 Rft	73.21 95.79	P/Rft P/Rft	4,026.55 7,184.25	73.21 95.79	4,026.55 7,184.25	80.00 100.00	4,400.00 7,500.00	120.00 200.00	6,600.00 15,000.00

NAME OF WORK: CONSTRUCTION OF NEW PUMPING STATION AT MIANWALI COLONY UC#9 SITE TOWN

S.No	Description of Work	As per Corrected Engineer's Estimate			As per Approved P.C.I			M/s. Haji Syed Ameer & Brothers		M/s. Crystal Paramount Construction	
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount	Rate	Amount
17	Supplying & fixing in position C.P. bib cock ½" dia C.P. bib cock, standard pattern.	4.00 Nos	150.92	Each	603.68	150.92	603.68	160.00	640.00	500.00	2,000.00
18	P/F Gate valve ½" dia	2.00 Nos	227.29	Each	454.58	350.00	700.00	230.00	460.00	600.00	1,200.00
19	Manufacturing supplying & fixing black steel MS Pipe made out of MS Sheet conforming to API 5L grade X-42 ERW & Externally asphalt coated with fiber glass 5mm thick & Internally C.C lining 8mm thick (AWWA Specification) the laying jointing with Helical welding in trenches i/c const of bends of any degree & testing with water specified pressure for different dia of pipe as below (straight) 18" dia (5.6mm).	5800.00 Rft	3,809.21	P/Rft	22,093,418.00	3,809.21	22,093,418.00	4,300.00	24,940,000.00	5,000.00	29,000,000.00
		600.00 Rft	3,395.74	P/Rft	2,037,444.00	3,395.74	2,037,444.00	4,100.00	2,460,000.00	4,000.00	2,400,000.00
		100.00 Rft	2,458.81	P/Rft	245,881.00	2,458.81	245,881.00	3,500.00	350,000.00	3,000.00	300,000.00
		4000.00 Rft	1,554.87	P/Rft	6,219,480.00	1,554.87	6,219,480.00	2,600.00	10,400,000.00	2,500.00	10,000,000.00
		4500.00 Rft	1,207.40	P/Rft	5,433,300.00	1,207.40	5,433,300.00	2,000.00	9,000,000.00	2,000.00	9,000,000.00
		4" dia (4.8mm)	6000.00 Rft	885.29	P/Rft	5,311,740.00	885.29	5,311,740.00	1,820.00	10,920,000.00	1,500.00
20	CI Sluice valve heavy pattern (test pressure 21.0 kg/sq cm or 300 Lbs/sq) 18" dia	4.00 Nos	110,700.00	Each	442,800.00	110,700.00	442,800.00	112,000.00	448,000.00	200,000.00	800,000.00
		1.00 Nos	107,250.00	Each	107,250.00	107,250.00	107,250.00	108,000.00	108,000.00	150,000.00	150,000.00
		1.00 Nos	78,000.00	Each	78,000.00	78,000.00	78,000.00	80,000.00	80,000.00	100,000.00	100,000.00
		6.00 Nos	17,940.00	Each	107,640.00	17,940.00	107,640.00	20,000.00	120,000.00	30,000.00	180,000.00
		12.00 Nos	9,360.00	Each	112,320.00	9,360.00	112,320.00	9,500.00	114,000.00	10,000.00	120,000.00
		4" dia	10.00 Nos	5,460.00	Each	54,600.00	5,460.00	54,600.00	5,500.00	55,000.00	8,000.00
21	Fixing of Sluice Valve with twin tail pieces one end flange and one end socket with nuts & bolts rubber packing etc. 18" dia	4.00 Nos	6,951.00	Each	27,804.00	6,951.00	27,804.00	7,000.00	28,000.00	20,000.00	80,000.00
		1.00 Nos	5,101.00	Each	5,101.00	5,101.00	5,101.00	5,200.00	5,200.00	15,000.00	15,000.00

[Handwritten signature]

[Handwritten signature]

[Handwritten signature]

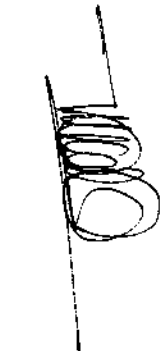
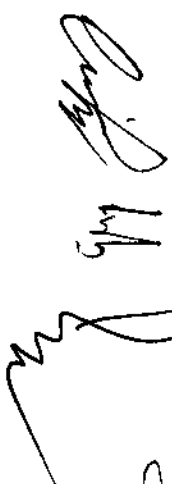

NAME OF WORK: CONSTRUCTION OF NEW PUMPING STATION AT MIANWALL COLONY UC#9 SITE TOWN

S.No	Description of Work	As per Corrected Engineer's Estimate			As per Approved P.C.I			M/s. Haji Syed Ameer & Brothers		M/s. Crystal Paramount Construction	
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount	Rate	Amount
	12" dia	1.00 Nos	3,821.00	Each	3,821.00	3,821.00	3,900.00	3,900.00	15,000.00	15,000.00	
	8" dia	6.00 Nos	2,790.00	Each	16,740.00	16,758.00	2,850.00	17,100.00	10,000.00	60,000.00	
	6" dia	12.00 Nos	1,886.00	Each	22,632.00	22,632.00	2,000.00	24,000.00	8,000.00	96,000.00	
	4" dia	10.00 Nos	1,532.00	Each	15,320.00	15,320.00	1,600.00	16,000.00	6,000.00	60,000.00	
22	Construction of C.C. block masonry chamber of size 6'x6'x6' (inside dimension) with 24"x24" C.I. cover & frame weight (50 Kg) fixed RCC 1:2:4 slab 6" thick with steel 1/2" dia for bar @6" C/C with bent up both way 12" thick C/C 1:3:6 Block masonry walls set 1:6 CM 6" thick CC 1:3:8 in foundation 2. thick 1:2:4 Flooring 1/2" thick cement plaster 1:3 to all inside wall surface, top & bottom slab, outer side wall surface 1-0 deep upto roof slab I/C MS Foot rest 5/8" dia bars at every 2.0" deep LC curing dewatering, excavation, refilling and disposal of surplus of earth etc, complete.	6.00 Nos	55,923.00	Each	335,538.00	55,923.00	335,538.00	57,000.00	342,000.00	55,923.00	335,538.00
23	Construction of C.C. block masonry chamber of size 4'x4'x4' (inside dimension) with 24"x24" C.I. cover and frame weight (50 Kg) fixed RCC 1:2:4 slab 6" thick with steel 1/2" dia for bar @6" C/C with bent up both way 12" thick C/C 1:3:6 Block masonry walls set 1:6 CM 6" thick CC 1:3:8 in foundation 2. thick 1:2:4 Flooring 1/2" thick cement plaster 1:3 to all inside wall surface, top and bottom slab, outer side wall surface 1-0 deep upto roof slab I/C MS Foot rest 5/8" dia bars at every 2.0" deep LC curing dewatering, excavation, refilling and disposal of surplus of earth etc, complete	28.00 Nos	28,357.00	Each	793,996.00	28,357.00	793,996.00	29,000.00	812,000.00	28,357.00	793,996.00

(Handwritten signatures and initials)

NAME OF WORK: CONSTRUCTION OF NEW PUMPING STATION AT MIANWALI COLONY UC#9 SITE TOWN

S.No	Description of Work	As per Corrected Engineer's Estimate			As per Approved PC-I			Mrs. Haji Syed Amrur & Brothers		Mrs. Crystal Paramount Construction	
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount	Rate	Amount
24	Full hire charges for pumping set per day inclusive of the wages of driver and for Assistant fuel of electric energy plate form required for placing pumps etc. at lower depths with suction and delivery pipes for pumping out water found at various depth from trench i/c the cost of erection and dismantling after completion of the job above 10-HP from 10ft (3.4m)	90.00 Day	1,500.00	P/Day	135,000.00	1,500.00	135,000.00	1,600.00	144,000.00	1,800.00	162,000.00
25	Refilling the excavated stuff in trenches 6" thick layer i/c watering, ramming to full compaction etc complete	421450.00 Cft	2,760.00	% 0 Cft	1,163,202.00	2,760.00	1,163,202.00	2,800.00	1,180,060.00	3,500.00	1,475,075.00
	Total Part-A				49,218,275.97		48,384,631.71		66,303,110.45		115,844,845.50

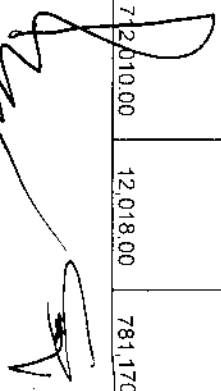
NAME OF WORK: CONSTRUCTION OF NEW PUMPING STATION AT MIANWALL COLONY UC#9 SITE TOWN

S.No	Description of Work	As per Corrected Engineers Estimate			As per Approved P.C.I			M/s. Hajji Syed Ameer & Brothers		M/s. Crystal Paramount Construction	
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount	Rate	Amount
1	Supply and commissioning, installation KSB (DWT) pump coupled with 100 HP Siemens Motor type B-12-B-6 having discharge piece, Column shaft, with capacity of 1000 GPM 250 Ft. Head with suction discharge pieces, with 100 HP, 4 pole Motor, vertical hollow shaft, 1480 RPM with complete set.	6.00 Nos	3,950,000.00	Each	23,700,000.00	3,950,000.00	23,700,000.00	4,000,000.00	24,000,000.00	4,250,000.00	25,500,000.00
2	Erection and Commissioning of DWT pump i/c all relevant works for Fixing and Cutting as per Site requirement and instruction of E/I in all respect.	6.00 Nos	48,190.00	Each	289,140.00	75,000.00	450,000.00	50,000.00	300,000.00	75,000.00	450,000.00
3	P/F alicee valve 8" dia imported China test pressure 1000 lbs. flanged type with gun metal spindle and wearing parts double and square threaded complete.	10.00 Nos	20,733.00	Each	207,330.00	20,733.00	207,330.00	21,000.00	210,000.00	20,733.00	207,330.00
4	P/F 8" dia Heavy Duty impurted Non-Return valve to set pressure 100 lbs/sq flanged type i/c nut bol, washer and rubber sheet of required size and as per site requirement and direction of the E/I.	8.00 Nos	7,312.50	Each	58,500.00	23,000.00	184,000.00	7,400.00	59,200.00	23,000.00	184,000.00
5	P/F manifold 24" dia 12 ft long with both end flanged with reducer 24" & 18" dia i/c welding fabricating complete in all respect as per site requirement and instruction of E/I.	1.00 Job	122,289.00	P/Job	122,289.00	300,000.00	300,000.00	125,000.00	125,000.00	300,000.00	300,000.00
6	Making connection delivring pipe line to manifold and existing rising main including welding fabrication as per site requirement and instruction of E/I.	6.00 Nos	20,621.00	Each	123,726.00	10,500.00	63,000.00	22,000.00	132,000.00	10,500.00	63,000.00

NAME OF WORK: CONSTRUCTION OF NEW PUMPING STATION AT MIANWALI COLONY UC#9 SITE TOWN

S.No	Description of Work	As per Corrected Engineer's Estimate			As per Approved P.C-1			M/s. Haji Syed Ameer & Brothers		M/s. Crystal Paramount Construction	
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount	Rate	Amount
7	P/F Steel Girder and plate i/c welding, fabrication, pump foundation for over head gentry as per site requirement and instruction of E/I Girder Size 8"x4" Weight I.R.Fl = 18 lbs. 40"x3 Nos. = 120 R.Fl 18"x6 Nos = 25' Miscel = 30' Total 283 R.Fl. 290' 18x0.4536=2367.79 Kgs. Ms Plate 2"x2' 4 Nos: x40.80x0.4536=296.11 Kgs. A+B = 2367.79 +296.11 Kgs = 2663.90 Say 2665 Kgs. @ 100/= Per Kg. Rs. 2,66,500/= i/c Labour Charges & Tool Plant, Welding Plants etc. Rs. 83,275 = Rs. 3,59,775/=	1.00 Job	275,874.00	P/Job	275,874.00	359,775.00	359,775.00	280,000.00	280,000.00	359,775.00	359,775.00
8	P/F Chain Pulley block of 02 Tons capacity with Chain of 05 Meter Length as per site requirement & instruction of E/I.	1.00 Nos	15,000.00	Each	15,000.00	7,500.00	7,500.00	17,000.00	17,000.00	7,500.00	7,500.00
9	P/F over head gentry travelling with 6 meter chain as per site requirement & instruction of E/I.	1.00 Nos	22,000.00	Each	22,000.00	42,000.00	42,000.00	23,000.00	23,000.00	42,000.00	42,000.00
10	Wiring between panel/MCB to motor with 120 mm 3 core PVC Cable.	150.00 Mtr	6,252.00	P/Mtr	937,800.00	6,252.00	937,800.00	6,350.00	952,500.00	6,252.00	937,800.00
11	Wiring between main to Change over switch to switch KESFC Main & with 240 mm Square 3.5 Core PVC Cable as per site requirement & instruction of E/I.	146.00 Mtr	14,895.00	P/Mtr	2,174,670.00	14,895.00	2,174,670.00	16,000.00	2,336,000.00	14,895.00	2,174,670.00
12	P/F change over switch 600 Amp Klyber or i/c equivalent as per site requirement & instruction of E/I.	3.00 Nos	69,014.00	Each	207,042.00	69,014.00	207,042.00	70,000.00	210,000.00	69,014.00	207,042.00
13	Wiring between change over switch to MCB Panel with 185 mm 3.5 Core PVC cable i/c lugs and its purching laying etc.	65.00 Mtr	10,954.00	P/Mtr	712,010.00	12,018.00	781,170.00	11,000.00	715,000.00	12,018.00	781,170.00







NAME OF WORK: CONSTRUCTION OF NEW PUMPING STATION AT MIANWALI COLONY UC#9 SITE TOWN


S.No	Description of Work	As per Corrected Engineer's Estimate			As per Approved P.C.I			M/s. Haji Syed Ameer & Brothers		M/s. Crystal Paramount Construction	
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount	Rate	Amount
14	P/E earthing set 600x600x6mm copper plate in ground at depth of 12 or less depth if water comes out with soil and cool i/c making pits 12" depth by excavation in all kind of solid i/c hard /snft rock refilling the excavation with 8 base copper wire in GI pipe straight from earth plate with metallic accessories complete in all respect as per instruction n/E/L	8.00 Job	20,025.00	P/Job	160,200.00	23,850.00	190,800.00	20,500.00	164,000.00	23,850.00	190,800.00
15	P/F street light complete in all respect as per site requirement & instruction of E/L. 250 W	8.00 Nos	6,365.00	Each	50,920.00	2,025.00	16,200.00	6,500.00	52,000.00	2,025.00	16,200.00
15	P/F Tube Light 40 W Philips or i/c equivalent as per site requirement & instruction of E/L.	8.00 Nos	450.00	Each	3,600.00	450.00	3,600.00	500.00	4,000.00	450.00	3,600.00
17	P/F Ceiling Fan 56" Miltal Fan as per site requirement n/E/L	4.00 Nos	3,185.00	Each	12,740.00	2,000.00	8,000.00	3,300.00	13,200.00	2,000.00	8,000.00
18	Wiring Light point fan point with 7.0 029 PVC wire as per light requirement & instruction of E/L.	20.00 Point	797.00	P/Point	15,940.00	500.00	10,000.00	850.00	17,000.00	500.00	10,000.00
19	P/F Nut Bolts off size	120.00 Kg	150.00	P/Kg	18,000.00	150.00	18,000.00	160.00	19,200.00	150.00	18,000.00
20	P/F Rubber Insertion Sheet	80.00 Kg	100.00	P/Kg	8,000.00	100.00	8,000.00	120.00	9,600.00	100.00	8,000.00
21	P/F Water pressure gauge of 15 kg Per Sq. alongwith pressure pipe cock and other material etc.	4.00 Nos	2,744.00	Each	10,976.00	1,455.00	5,820.00	2,800.00	11,200.00	1,455.00	5,820.00
22	P/F M/s Reducer 18"x24" of MS pipe as per site requirement.	1.00 Nos	12,969.00	Each	12,969.00	12,969.00	12,969.00	13,500.00	13,500.00	12,969.00	12,969.00
23	P/F Stance valve 24" dia imported China for manifold.	2.00 Nos	205,413.00	Each	410,826.00	205,413.00	410,826.00	208,000.00	416,000.00	205,413.00	410,826.00


NAME OF WORK: CONSTRUCTION OF NEW PUMPING STATION AT MIANWALI COLONY UC#9 SITE TOWN


S.No	Description of Work	As per Corrected Engineers Estimate			As per Approved PC-1			M/s. Haffi Syed Ameer & Brothers		M/s. Crystal Paramount Construction	
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount	Rate	Amount
24	Supply/Installation, Commissioning KSB FTA NCR pump with 100 HP Motor Horizontal type having discharge capacity 1000 GPM, 50 FT Head, with M/CU for boosting including 12'x15' room and chamber etc complete. (100 HP Rs. 1,500,000/- +Room Rs. 4,50,000 = Rs. 19,50,000/=	2.00 Job	1,950,000.00	P/Job	3,900,000.00	1,950,000.00	3,980,000.00	2,000,000.00	4,000,000.00	1,950,000.00	3,900,000.00
25	P/F sluice valve 16" dia imported China for Boosting.	1.00 Nos	112,351.00	Each	112,351.00	112,351.00	112,351.00	115,000.00	115,000.00	112,351.00	112,351.00
26	KESC charges of 500 kw load New Connection Linn sum.	1.00 Job	7,500,000.00	P/Job	7,500,000.00	7,500,000.00	7,500,000.00	7,500,000.00	7,500,000.00	7,800,000.00	7,800,000.00
	Total Cost Part- B				41,061,903.00		41,690,853.00		41,694,400.00		43,710,853.00
	Total Cost Part- A				49,218,275.97		48,384,681.71		66,303,110.45		115,844,945.50
	Total Cost Part- B				41,061,903.00		41,690,853.00		41,694,400.00		43,710,853.00
	Total Cost Part- A+B				90,280,178.97		90,075,534.71		107,997,510.45		159,555,698.50
	Say				90,280,179		90,075,535		107,997,510		159,555,699


 (Muhammad Khalid Khan)
 Accounts Officer (West)
 Member/Secretary


 (Saif-ul-Haque)
 Additional Director Internal
 Audit - KMC Member


 (Magsood Ahmed Shaikh)
 Superintending Engineer (KMC)
 Member


 (Ovais Malik)
 Chief Engineer (West)
 Member


 (M. A. Rahim)
 Chief Engineer (D), (Convener)

BIDDERS QUALIFICATION REPORT
Rule-46(i) (a) Single Stage One Envelope Procedure

Opening Date: 02-09-2014

Name of Work: **CONSTRUCTION OF NEW PUMPING STATION AT MIANWALI COLONY UC#9 SITE TOWN**

Name of Bidder **M/s. Haji Syed Ameer & Brothers.**

S.No	Eligibility	Yes	No
1	Relevant experience	✓	
2	3 Years Turnover Statement	✓	
3	Registration with Income Tax	✓	
4	Registration with PEC.	N/A	

Name of Bidder **M/s. Crystal Paramount Construction**


S.No	Eligibility	Yes	No
1	Relevant experience	✓	
2	3 Years Turnover Statement	✓	
3	Registration with Income Tax	✓	
4	Registration with PEC.	N/A	

Name of Bidder **M/s. Malik Zaheer Khan**


S.No	Eligibility	Yes	No
1	Relevant experience		✓
2	3 Years Turnover Statement		✓
3	Registration with Income Tax		✓
4	Registration with PEC.		N/A


Name of Bidder **M/s. Haji Gul Muhd Khan Sherani**


S.No	Eligibility	Yes	No
1	Relevant experience		✓
2	3 Years Turnover Statement		✓
3	Registration with Income Tax		✓
4	Registration with PEC.		N/A


 (Muhammad Khalid Khan)
 Accounts Officer (West)
 Member / Secretary


 (Saif-ul-Haque)
 Additional Director Internal
 Audit – KMC Member


 (Maqsood Ahmed Shaikh)
 Superintending Engineer (KMC)
 Member


 (Ovais Malik)
 Chief Engineer (West)
 Member


 (Abdur Raheem Khatt)
 Chief Engineer (IPD)
 Convener




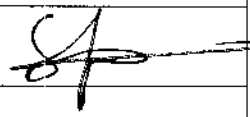
ATTENDANCE OF PARTICIPATE CONTRACTOR

Name of Work : CONSTRUCTION OF NEW PUMPING STATION AT MIANWALI COLONY UC-09 SITE TOWN.

Date of Opening & Time : 02-09-2014 2:30 PM

Estimated Cost : 91.877 Million

SPPRA Serial No.: 21224.

S.NO	NAME OF FIRM	NAME OF PERSON & DESIGNATION	SIGNATURE
1	M/s. Hoj Syed Amal Brothers		
2	M/s. Gynat Permanent.		
3	M/s. Tabir Zahid K. Khan		
4	M/s. Hoj Gul M. Khan		
5			
6			
7			
8			
9			
10			