



KARACHI WATER & SEWERAGE BOARD

OFFICE OF THE CHIEF ENGINEER (IP&D)

BID EVALUATION REPORT

1	Name of Procuring Agency	KARACHI WATER & SEWERAGE BOARD
2	Tender Reference No	SPPRA Serial No.24089 I.D No. /2015
3	Tender Description/Name of Work/Item	PROVIDING INTERCONNECTION FROM 18" DIA TO 12" DIA FOR IMPROVEMENT OF WATER SUPPLY IN BLOCK-02, NEAR MASJID-E-SUFA GULBERG TOWN.
4	Method of Procurement	Single Stage (One Envelop)
5	Tender Published	Through Web Site
6	Total Bid Documents Sold	02 Nos
7	Total Bid Received	02 Nos
8	Technical Bid Opening Date (if applicable)	N/A .
9	No. of Bid Technically Qualified (if applicable)	N/A .
10	Bid (s) rejected	One
11	Financial Bid Opening Date	27/05/2015

12 Bid Evaluation Report

S #	NAME OF FIRM OR BIDDER	COST OFFERED BY THE BIDDERS	RANKING IN TERMS OF COST	COMPARISON WITH ESTIMATED COST	REASON FOR ACCEPTANCE/ REJECTION	REMARKS
1	M/s. R.S Enterprises	Rs. 993,528/-	1st Lowest	@ 0.0046% Below	Substantially Responsive	P.O # 288542 Dt: 25-05-2015 Rs.20,000/- Summit Bank Karimabad Br Karachi
2	M/s. Hashir Enterprises	Rs. 994,783/-	-----	-----	Un Responsive Bid	P.O Not Attached

The all concerned bidder are being informed accordingly.

The E.E Concerned for compliance of rule 45 of SPPRA 2010 M/s. R.S Enterprises. declared as the lowest responsive bidder by the Committee and recommended for Sanction from Competent Authority.

(Abdul Jabbar Shaikh)
Accounts Officer (Central)
Member/Secretary

(Saif-ul-Haque)
Additional Director Internal
Audit - KMC Member

(Maqsood Ahmed Shaikh)
Superintending Engineer (KMC)
Member

(S.M Jameel Akhtar)
Chief Engineer (Central)
Member

(Abdul Wahid Khattai)
Chief Engineer (IPD),
(Convener)

Method of Procurement: Single Stage Single Envelope.Name of Work: PROVIDING INTERCONNECTION FROM 18" DIA TO 12" DIA FOR IMPROVEMENT OF WATER SUPPLY IN BLOCK-02, NEAR MASJID-E-SUFA GULBERG TOWN.MINUTES OF BID OPENING MEETING.

A meeting of the procurement committee of this department was held on 27-05-2015 for opening the bids received in respect of subject NIT till deadlines of submission. The meeting was attended by all / following members of the procurement committee and the representative of bidders. **(Attendance sheet is enclosed).**

2. Two bidders submitted their bids till the deadline of submission.

- i. M/s. R.S Enterprises.
- ii. M/s. Hashir Enterprises.


3. The bids were opened at 02:30 P.M in the presence of the above mentioned participants and the rates quoted by bidders were read aloud and encircled by Chairman of the Procurement Committee.

S. No	Name of Firm	Quoted Price	Amount of Bid Security	Pay Order No. / Date
01	M/s. <u>R.S Enterprises</u>	Rs. <u>993,528/-</u>	Rs.20,000/-	P.O # 288542 Dt: 25-05-2015 Summit Bank Karimabad Br Karachi
02	M/s. Hashir Enterprises	Rs. 994,783/-	Not Attached	P.O Not Attached


4. The bids do not contain any over-writing or cutting.


5. The committee shall examine all the bids as per the qualification / eligibility criteria provided in the bidding document and verify the documents and bid security submitted by the bidders (if required).

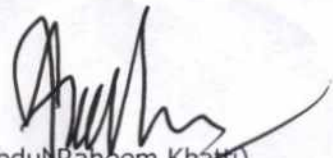
The meeting ended with the vote of thanks to and from the chair.


(Abdul Jabbar Shaikh)
Accounts Officer (Central)
Member / Secretary


(Saif-ul-Haque)
Additional Director Internal
Audit – KMC Member


(Maqsood Ahmed Shaikh)
Superintending Engineer (KMC)
Member


(S.M Jameel Akhtar)
Chief Engineer (Central)
Member


(Abdul Raheem Khattai)
Chief Engineer (IPD)
Convener

Method and procedure of procurement: Open Competitive Bidding(National/ International Competitive Bidding) (Single Stage – One Envelope)


Description of work: PROVIDING INTERCONNECTION FROM 18" DIA TO 12" DIA FOR IMPROVEMENT OF WATER SUPPLY IN BLOCK-02, NEAR MASJID-E-SUFA GULBERG TOWN.

BIDDERS' ELIGIBILITY/ QUALIFICATION REPORT

Eligibility/ Qualification Criteria:

S. No.	Eligibility / Qualification Criteria	Bidders' name M/s. R.S Enterprises.	Bidders' name M/s. Hashir Enterprises.
1.	Registration with PEC (if applicable)	N/A	N/A
2.	NTN	Yes	N/A
3.	Sales Tax Registration	N/A	N/A
4.	Registration with Sindh Revenue Board (SRB)	Yes	N/A
	Qualification Criteria:		
5.	Minimum three years' experience of relevant field.	Yes	N/A
6.	Turnover of at least last three years	Yes	N/A
7.	Required Bid Security is attached.	Yes	N/A
8.	Bid is signed, named and stamped by the authorized person of the firm along with Authorization letter.	Yes	N/A
9.	Any other factor deemed to be relevant by the procuring agency subject to provision of Rule-44	N/A	N/A
10.	Qualified/ disqualified	<u>Qualified</u>	Disqualified


Note: The procuring agency may modify the criteria as per their requirements.



(Abdul Jabbar Shaikh)
Accounts Officer (Central)
Member / Secretary



(Saif-ul-Haque)
Additional Director Internal
Audit – KMC Member



(Maqsood Ahmed Shaikh)
Superintending Engineer (KMC)
Member



(S.M Jameel Akhtar)
Chief Engineer (Central)
Member



(Abdul Rehman Khattar)
Chief Engineer (IPD)
Convener

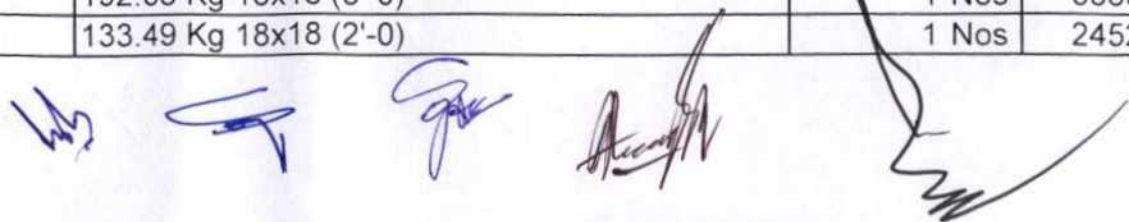
COMPARATIVE STATEMENT

NAME OF WORK: PROVIDING INTERCONNECTION FROM 18" DIA TO 12" DIA FOR IMPROVEMENT OF WATER SUPPLY IN BLOCK-02, NEAR MASJID-E-SUFA GULBERG TOWN.

S.No	Description of Work	Engineer's Estimate				M/s. R.S Enterprises	
		Quantity	Rate	Unit	Amount	Rate	Amount
1	Dismantling and removing road metalling	311.00 Cft	605	% Cft	1,881.55	605	1,881.55
2	Dismantling Cement Concrete plain 1:4:8	1920.00 Cft	1663.75	% Cft	31,944.00	1663.75	31,944.00
3	Excavation for pipe lines in trenches and pits in hard rock by hammering and cheisling i/c trimming and dressing side to true alignment and shape levelling of beds of trenches to correct level and grade, cutting joint holes and disposal of surplus earth with in a one chain as directed by the engineer incharge providing fence guards, lights, flags and temporary crossings for non-vehicular traffic where ever required lift upto 5 ft (1.52m) and lead upto one chain (30.5m).	311.00 Cft	24150	%0 Cft	7,510.65	24150	7,510.65
4	Excavation for pipe lines in trenches and pits in all kind of soil of murum i/c trimming and dressing side to true alignment and shape levelling of beds of trenches to correct level and grade, cutting joint holes and disposal of surplus earth with in a one chain as directed by the engineer incharge providing fence guards, lights, flags and temporary crossings for non-vehicular traffic where ever required lift upto 5 ft (1.52m) and lead upto one chain (30.5m).	9484.00 Cft	4650	%0 Cft	44,100.60	4650	44,100.60

NAME OF WORK: PROVIDING INTERCONNECTION FROM 18" DIA TO 12" DIA FOR IMPROVEMENT OF WATER SUPPLY IN BLOCK-02, NEAR MASJID-E-SUFA GULBERG TOWN.

S.No	Description of Work	Engineer's Estimate				M/s. R.S Enterprises	
		Quantity	Rate	Unit	Amount	Rate	Amount
5	Full hire charges of pumping set per day inclusive of the wages of driver and assistant, fuel and electric energy plate form required for placing the pump etc, at lower depth with suction and delivery pipe for pumping out water pound at various depth from trenches including the cost of erection and dismantling after completion of job of 10 HP pumping out water from 10 ft deep trenches.	15.00 Day	1500	P/Day	22,500.00	1500	22,500.00
6	Providing Laying UPVC Pipes of Class "C" fixing in trenches i/c cutting fitting and jointing with solvent cement i/c testing with water to a head 91.50 meter or 300 ft						
	8" Dia	100 Rft	569	P/Rft	56,900.00	569	56,900.00
	3" Dia	960 Rft	107	P/Rft	102,720.00	107	102,720.00
7	P/F M.S Split Collar tee on on PRCC pipe Fabrication with 3/8" thick MS plate excluding the cost of the Nek. It e/c he cost of 3/4" thick MS sq bars on both ends 4 Nos 3/4" thick MS flange with a total weight as maintain each items it i/c the cost of nuts, bolts, rubber packing, Labour and sealing material etc.						
	128.17 Kg 12x12 (2'-6)	1 Nos	22622	Each	22,622.00	22600	22,600.00
	192.83 Kg 18x18 (3'-0)	1 Nos	33636	Each	33,636.00	33650	33,650.00
	133.49 Kg 18x18 (2'-0)	1 Nos	24521	Each	24,521.00	24530	24,530.00




NAME OF WORK: PROVIDING INTERCONNECTION FROM 18" DIA TO 12" DIA FOR IMPROVEMENT OF WATER SUPPLY IN BLOCK-02, NEAR MASJID-E-SUFA GULBERG TOWN.


S.No	Description of Work	Engineer's Estimate				M/s. R.S Enterprises	
		Quantity	Rate	Unit	Amount	Rate	Amount
8	P/F M.S Neck to Existing M.S Pipe to a split collar tee it is the cost of fabrication and welding to the split collar tee Net weight 15.75 Kgs.	2 Nos	2804	Each	5,608.00	2800	5,600.00
9	P/L MS tail piece (DHOLKI) on A/C pipe fabricated with ¼" thick MS plate, having dimensions and weight as mentioned against each item. It including the cost of labor and sealing material etc, complete. Net Weight 17.8 Kg	2 Nos	2997	Each	5,994.00	2997	5,994.00
10	C.I sluice valve heavy pattern test pressure 21.0Kg/sq or 300 lb/sq inch (imported) 8" Dia	1 No	17940	Each	17,940.00	17900	17,900.00
	12" Dia	1 No	78000	Each	78,000.00	78000	78,000.00
	18" Dia	1 No	110700	Each	110,700.00	110700	110,700.00
11	Construction of C.C block masonry chamber of 4x4x4 (inside dimantion) with 24"x24" C.i cover & frame (weight-65 Kg) fixed on RCC 1:2:4 slab 6" thick with steel 1/2" Dia main bars 06" C/C & 1/4" dia @ 8" C.C distribution bars 6" thick C.C 1:3:6 block masonry wall set in 1:6 C.M 6" thick 1:4:8 in foundation 2" thick C.C 1:2:4 flooring ½" thick C.Plaster 1:6 to all in side wall surface top & bottom slab outer side wall sueface 1'-0" deep up to roof slab MS foot rest 5/8" dia bars every 2'0" deep etc.	3 Nos	28357	Each	85,071.00	28357	85,071.00


(Handwritten signatures and marks)

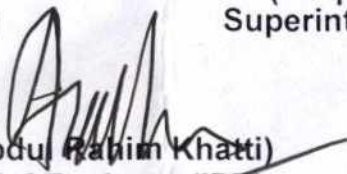
NAME OF WORK: PROVIDING INTERCONNECTION FROM 18" DIA TO 12" DIA FOR IMPROVEMENT OF WATER SUPPLY IN BLOCK-02, NEAR MASJID-E-SUFA GULBERG TOWN.


S.No	Description of Work	Engineer's Estimate				M/s. R.S Enterprises	
		Quantity	Rate	Unit	Amount	Rate	Amount
12	Repair of leaking joints (external watta) on PRCC pipe of various diameter i/c the cost of execution de-watering, back filling sealing metrial, geny bags sand spain yain, labours, etc complete.						
	18" Dia	24 Nos	13841	Each	332,184.00	13841	332,184.00
13	Fixing of slice valve with 2 cost iron picese one flanged and other with socket including the cost of nuts bolts and rubber packing, labour etc.Complete.						
	18" Dia	1 No	6951	Each	6,951.00	6951	6,951.00
	08" Dia	1 No	2790	Each	2,790.00	2790	2,790.00
	Total Quoted / Corrected Cost				993,573.80		993,527.80
	Say				993,574		993,528


(Abdul Jabbar Shaikh)
Accounts Officer Central
Member/Secretary


(S.M Jameel Akhtar)
Chief Engineer (Central)
Member


(Saif-ul-Haque)
Additional Director Internal
Audit - KMC Member


(Abdul Rahim Khatti)
Chief Engineer (IPD),
(Convener)


(Maqsood Ahmed Shaikh)
Superintending Engineer (KMC)
Member

