




OFFICE OF THE DISTRICT ENGINEER DISTRICT COUNCIL KARACHI


ATTENDANCE SHEET

Subject:- N.I.T. Ref No.DCK/Administrator/61/2015 Dated 13/07/2015  
Date Of Opening: - 31-07-2015

Sr. No.	Name of Firm	Signature
1.	M/S K.B Enterprises	
2.	M/S Samma Construction Company	
3.	M/S H.S Construction Company	
4	M/S Irfan Enterprises	

  
Khan Mohammad Malik  
(Member)  
Accounts Officer,  
District Council Karachi.

  
Liaquat Ali Mughal (Member)  
Assistant Executive Engineer,  
DMC Malir Karachi.

  
Shakeel Ahmed Memon (Chairman)  
District Engineer,  
District Council Karachi.

# DISTRICT COUNCIL KARACHI

## Bid Evaluation Report

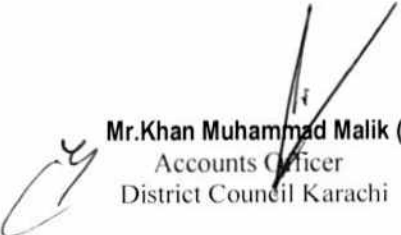
(Work No. 01)  
Tender Notice No. 61


1	Name of Procuring Agency:	District Council Karachi
2	Tender Reference No	Tender Notice No. D.C.K / Administrator / 61 / 2015, Dated 13-07-2015
3	Tender Description/name of Work / item	Construction of Underground Water Tank at different places of Bachal Bagh near Memon Goth UC Murad Memon
4	Method of Procurement	Single Stage (one envelop)
5	Tender Published:	Through SPPRA website
6	Total Bid documents Sold:	03 Nos
7	Total Bids Received	03 Nos
8	Technical Bid Opening date (if applicable):	N/A
9	No. of Bid technically qualified (if applicable)	N/A
10	Bid(s) Rejected	(Nil)
11	Financial Bid Opening date	31-07-2015


### 1. Bid Evaluation Report:

S.No	Name of Firm or Bidder	Cost offered by the Bidder	Ranking in terms of cost	Comparison with Estimated cost	Reasons for acceptance/rejection	Remarks
1	2	3	4	5	6	7
1	M/S K.B Enterprises	9,93,248/=	1 <sup>st</sup> lowest	Part-A 9% Above Part-B 19.25% Above	Substantially Responsive	Pay order No. 00130567 Amount Rs. 20,000/= Bank Al Habib Memon Goth
2	M/S Samma Construction Company	9,95,962/=	2 <sup>nd</sup> Lowest	Part-A 9.30% Above Part-B 19.55% Above	Substantially Responsive	Pay order No.8716804 Amount Rs. 20,000/= Habib Metropolitan Bank Landhi Industrial Branch
3	M/S H.S Construction Company	9,98,588/=	3 <sup>rd</sup> Lowest	Part-A 9.55% Above Part-B 20% Above	Substantially Responsive	Pay order No.8716803 Amount Rs. 20,000/= Habib Metropolitan Bank Landhi Industrial Branch

- The all concerned bidder are being informed accordingly.
- The E.E concerned for compliance of rule 45 of SPPRA-2010 **M/S K.B Enterprises** declared has the lowest responsive bidder by the committee and recommended for sanctioned form Competent Authority.

  
Mr. Khan Muhammad Malik (Member)  
Accounts Officer  
District Council Karachi

  
Mr. Liaquat Ali Mughal (Member)  
Assistant Executive Engineer  
D.M.C Malir

  
Mr. Shakeel Ahmed Memon (Chairman)  
District Engineer  
District Council Karachi

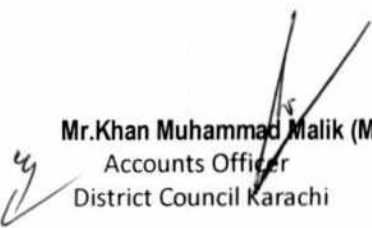
# DISTRICT COUNCIL KARACHI


## EVALUATION CRITERIA

Eligibility / Qualification Criteria:

Name of Work **Construction of Underground Water Tank at different places of Bachal Bagh near Memon Goth UC Murad Memon**

S. No.	Eligibility Criteria	M/S K.B Enterprises	M/S Samma Construction Company	M/S H.S Construction Company
1.	NTN	Available	Available	Available
2.	Sales Tax Registration	N.A	N.A	N.A
3.	Professional Tax	N.A	N.A	N.a
4.	Registration certificate with Sindh Revenue Board	Available	Available	Available
	<b><u>QUALIFICATION CRITERIA:</u></b>			
5.	Minimum Two year's experience of relevant field.	Yes	Yes	Yes
6.	Turnover of at least last three years	Available	Available	Available
7.	Required Bid Security is attached.	Attached	Attached	Attached
8.	Bid is signed, named and stamped by the authorized person of the firm along with authorization letter.	Yes	Yes	Yes
9.	Qualified / Disqualified	Qualified	Qualified	Qualified

  
Mr. Khan Muhammad Malik (Member)  
Accounts Officer  
District Council Karachi

  
Mr. Liaquat Ali Mughal (Member)  
Assistant Executive Engineer  
D.M.C Malir

  
Mr. Shakeel Ahmed Memon (Chairman)  
District Engineer  
District Council Karachi

# DISTRICT COUNCIL KARACHI

## COMPARATIVE STATEMENT

**Work No. 01**

N.I.T - 02 Works Tender Notice 61

**SUBJECT: - Construction of Underground Water Tank at different places of Bachal Bagh near Memon Goth UC Murad Memon**

**(Part-A)**

Sr No	Description of Work	Engineer's Estimate			M/S K.B Enterprises		M/S Samma Construction Company		M/S H.S Construction Company		
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount	Rate	Amount
1	Schedule Items. Excavation for tanks & reservoirs in all kind soils murrum hard average or soft i/c trimming & dressing sides to true alignment / design section s / profiles & shape leveling of beds of tanks to correct level & grade i/c laying of earths in 6" layer for construction of banks & dressing & disposals of surplus excavated earth within one chain as directed by Engineer incharge i/c providing fance guards lights flags where ever required lift upto 5' & lead upto one chain (Sch PHD P-69/05)	1805.0Cft 783.0 Cft	4050/= 4600/=	% 0Cft % 0Cft	7310/= 3602/=	4050/= 4600/=	7310/= 3602/=	4050/= 4600/=	7310/= 3602/=	4050/= 4600/=	7310/= 3602/=
2	Providing / Laying cement concrete brick or stone ballast 1-1/2" to 2" gauge etc complete ( in ratio 1 : 4 : 8 )(Sch Building Page 14 (4-b)	271.0 Cft	9416/28	% Cft	25,518/=	9416/28	25,518/=	9416/28	25,518/=	9416/28	25,518/=
3	Fabrication of mild steel reinforcement using tore bars for cement concrete i/c cutting laying bending in position making joints & fastening i/c cost of binding wire (also i/c removal of rust from bars) etc complete (Gen Sch P-16 (8-b)	49.24Cwt	5001/70	P.Cwt	2,46,284/=	5001/70	2,46,284/=	5001/70	2,46,284/=	5001/70	2,46,284/=
4	Reinforced cement concrete work i/c all labour ^ material except the cost of steel reinforcement & its labour for binding & binding which will be paid separately. This rate also i/c all kinds of forms moulds lifting shuttering curing, rendering & finishing the exposed surface ( i/c screening & washing of single ) a) RCC work in roof slab beams columns rafts lintels & other structural members laid in situ precast laid in position complete in all respect ( 90) lbs cement 2 cft sand 4 cft single 8 to ¼ gauge ) etc complete ( Gen Sch P-16 (6-ll) ( Ratio 1 : 2 : 4 )	1103.0Cft	337/=	P-Cft	3,71,711/=	337/=	3,71,711/=	337/=	3,71,711/=	337/=	3,71,711/=
5	Providing / Laying Cement Plaster ¾" thick in 1.4 ration upto 20 ft height etc complete(Gen Sch P-57 / 11 (b-c)	919.0Sft	3015/76	% Sft	27,715/=	3015/76	27,715/=	3015/76	27,715/=	3015/76	27,715/=
6	Providing & laying 1 ½" thick topping cement concrete (1:2:4) i/c Surface Finishing and dividing into panels etc complete (Gen Sch p-46/16(b)	262.0Sft	1915.16	%Sft	5,018/=	1915.16	5,018/=	1915.16	5,018/=	1915.16	5,018/=
7	P / Fixing C.I Manhole cover with frame i/c cost material etc (PHED Sch p-35-1(1)	1.20 Cwt	6985/=	P.Cwt	8,382/=	6985/=	8,382/=	6985/=	8,382/=	6985/=	8,382/=
	<b>Total Amount of Schedule Rate</b>				<b>6,95,640/=</b>		<b>6,95,640/=</b>		<b>6,95,640/=</b>		<b>6,95,640/=</b>
	Add 20% Above on item # 01,07				3,859/=						
	Add 10% Above on item # 03				24,628/=						
	Add cartage				38,413/=						
	<b>Total Amount:-</b>				<b>7,62,540/=</b>		<b>7,58,248/=</b>		<b>7,60,334/=</b>		<b>7,62,073/=</b>

**(Part-B)**

Sr No	Description of Work	Engineer's Estimate				M/S K.B Enterprises		M/S Samma Construction Company		M/S H.S Construction Company	
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount	Rate	Amount
8	<b>Schedule Items.</b> Excavation of pipe line in trenches and pits in all kind of soils i/c trimming and dressing sides to true alignment and shape leveling of beds of trenches to correct level and grade, cutting joints holes and disposal of surplus earth within a one chain as directed by Engineer incharge providing fence guards lights flags and temporary crossings for non-vehicular traffic where ever required lift upto 5 ft & lead upto one chain (PHED Sch P/L/F in trench i/c fitting jointing & testing etc complete in all respect the high density polythene PE pipes(HDPE-100) PN-10 for W/S Confirming ISO 4427/DIN8074/8075 B.S.3580 & PSI 3051(PHED SCH W.S PAGE 25/1) A-63 mm	8750.0	4650.00	%Cft	40,688/=	4650.00	40,688/=	4650.00	40,688/=	4650.00	40,688/=
9	Supplying and fixing PVC fittings for Z joint pipes etc. Complete	1000.0	97/=	P.Rft	97,000/=	97/=	97,000/=	97/=	97,000/=	97/=	97,000/=
10	A. (i) Tee 2" Dia B. (i) Bend 2" Dia C. (i) Socket 2" Dia (ii) Socket 3" Dia D. (i) Elbow 2" Dia	03.0 Nos 03.0 Nos 03.0 Nos 01.0 Nos 06.0 Nos	159.00 160.00 98.00 350.00 225.00	Each Each Each Each Each	477/ 480/= 294/= 350/= 1350/=	159.00 160.00 98.00 350.00 225.00	477/ 480/= 294/= 350/= 1350/=	159.00 160.00 98.00 350.00 225.00	477/ 480/= 294/= 350/= 1350/=	159.00 160.00 98.00 350.00 225.00	477/ 480/= 294/= 350/= 1350/=
11	Providing / Fixing Full way gun metal valves with wheel threaded or flanged ends with rubber washer standard pattern etc complete (PHED W.S Sch 17 / 4-A) 2" Dia	04.0	1025/42	Nos	4102/=	1025/42	4102/=	1025/42	4102/=	1025/42	4102/=
12	Supplying / Fixing 3" dia Air valve with flange ends rubber washer nut bolts heavy pattern etc complete (R.A)	02	5900/=	Nos	11800/=	5900/=	11800/=	5900/=	11800/=	5900/=	11800/=
13	Providing Chamber size 3' x 2' x 4.5' deep as per approved design for sluice valve 3" to 12" dia with 18" dia CI cover with frame fixed in RCC slab 9" thick block masonry wall set in 1:6 cement mortar 6" thick 1/2" thick cement plaster 1.4 cm including curing excavation backfilling and disposal of surplus earth etc, complete. (PHED Sch. Pg.49/q-	1.0	18820.00	Nos	18820/=	18820.00	18820/=	18820.00	18820/=	18820.00	18820/=
14	Refilling the excavated stuff in trenches 6" thick layer i/c watering ramming to full compaction etc complete (PHED Sch P-No. 77/24)	7875.0	2760.00	Cft	21,735/=	2760.00	21,735/=	2760.00	21,735/=	2760.00	21,735/=
	<b>Total Amount of Schedule Rate</b>				<b>1,97,096/=</b>		<b>1,97,096/=</b>		<b>1,97,096/=</b>		<b>1,97,096/=</b>
	Add 20% Above on item				39,419/=	19.25% Above	37,940/=	19.55% Above	38,532/=	20% Above	39,419/=
	<b>Part-B Total Amount:-</b>				<b>2,36,515/=</b>		<b>2,35,036/=</b>		<b>2,35,628/=</b>		<b>2,36,515/=</b>
	<b>Part-A Total Amount:-</b>				<b>7,62,540/=</b>		<b>7,58,248/=</b>		<b>7,60,334/=</b>		<b>7,62,073/=</b>
	<b>Total Amount of Part-A + Part-B</b>				<b>9,99,055/=</b>		<b>9,93,248/=</b>		<b>9,95,962/=</b>		<b>9,98,588/=</b>

**Mr. Khan Muhammad Malik (Member)**  
Account Officer  
District Council Karachi

**Mr. Liaquat Ali Mughal (Member)**  
Assistant Executive Engineer  
D.M.C Malir

**Mr. Shakeel Ahmed Memon (Chairman)**  
District Engineer  
District Council Karachi

# DISTRICT COUNCIL KARACHI

## Bid Evaluation Report

(Work No. 02)  
Tender Notice No. 61

1	Name of Procuring Agency:	District Council Karachi
2	Tender Reference No	Tender Notice No. D.C.K / Administrator / 61 / 2015, Dated 13-07-2015
3	Tender Description/name of Work / item	<b>Cleaning &amp; Desalting of well at Water Supply Scheme main road Darsano Channo Memon Goth UC Murad Memon</b>
4	Method of Procurement	Single Stage (one envelop)
5	Tender Published:	Through SPPRA website
6	Total Bid documents Sold:	03 Nos
7	Total Bids Received	03 Nos
8	Technical Bid Opening date (if applicable):	N/A
9	No. of Bid technically qualified (if applicable)	N/A
10	Bid(s) Rejected	(Nil)
11	Financial Bid Opening date	31-07-2015

### 1. Bid Evaluation Report:

S.No	Name of Firm or Bidder	Cost offered by the Bidder	Ranking in terms of cost	Comparison with Estimated cost	Reasons for acceptance/rejection	Remarks
1	2	3	4	5	6	7
1	M/S K.B Enterprises	9,91,797/=	1 <sup>st</sup> lowest	20.50% Below	Substantially Responsive	Pay order No.001330566 Amount Rs. 20,000/= Bank Al. Habib Memon Goth
2	M/S Samma Construction Company	9,94,916/=	2 <sup>nd</sup> Lowest	20.25% Below	Substantially Responsive	Pay order No.0829401 Amount Rs. 20,000/= Bank Islami Gulstan-e-Johar
3	M/S Irfan Enterprises	9,96,787/=	3 <sup>rd</sup> Lowest	20.10% Below	Substantially Responsive	Pay order No.0829400 Amount Rs. 20,000/= Bank Islami Gulstan-e-Johar

- The all concerned bidder are being informed accordingly.
- The E.E concerned for compliance of rule 45 of SPPRA-2010 **M/S K.B Enterprises** declared has the lowest responsive bidder by the committee and recommended for sanctioned form Competent Authority.

  
Mr. Khan Muhammad Malik (Member)  
Accounts Officer  
District Council Karachi

  
Mr. Liaquat Ali Mughal (Member)  
Assistant Executive Engineer  
D.M.C Malir

  
Mr. Shakeel Ahmed Memon (Chairman)  
District Engineer  
District Council Karachi


# DISTRICT COUNCIL KARACHI

## EVALUATION CRITERIA


Eligibility / Qualification Criteria:

Name of Work: Cleaning & Desalting of well at Water Supply Scheme main road Darsano Channo Memon Goth UC Murad Memon

S. No.	Eligibility Criteria	M/S K.B Enterprises	M/S Samma Construction Company	M/S Irfan Enterprises
1.	NTN	Available	Available	Available
2.	Sales Tax Registration	N.A	N.A	N.A
3.	Professional Tax	N.A	N.A	N.a
4.	Registration certificate with Sindh Revenue Board	Available	Available	Available
	<b><u>QUALIFICATION CRITERIA:</u></b>			
5	Minimum Two year's experience of relevant field.	Yes	Yes	Yes
6	Turnover of at least last three years	Available	Available	Available
7	Required Bid Security is attached.	Attached	Attached	Attached
8	Bid is signed, named and stamped by the authorized person of the firm along with authorization letter.	Yes	Yes	Yes
9	Qualified / Disqualified	Qualified	Qualified	Qualified

  
Mr. Khan Muhammad Malik (Member)  
Accounts Officer  
District Council Karachi

  
Mr. Liaquat Ali Mughal (Member)  
Assistant Executive Engineer  
D.M.C Malir

  
Mr. Shakeel Ahmed Memon (Chairman)  
District Engineer  
District Council Karachi



# DISTRICT COUNCIL KARACHI


## COMPARATIVE STATEMENT

Work No. 02 N.I.T - 02 Works (Tender Notice 61)

SUBJECT: - Cleaning & Desalting of Well at Water Supply Scheme Main Road Darsano Channo Memon Goth Uc Murad Memon

Sr No	Description of Work Schedule Items.	Engineer's Estimate			M/S K. B Enterprises		M/S Samma Construction Company		M/S Irfran Enterprises	
		Quantity	Rate	Unit	Rate	Amount	Rate	Amount	Rate	Amount
1	Wet Sinking of well for depth below spring level by means of divers I/C all charges for shoring loading and removing excavated material within (x 45' to any depth (Gen Sch Page 86/87) 140.0 to 150.0 depth	5516.0 Cft	226168/22	%0Cft	226168/22	12,47,544/=	226168/22	12,47,544/=	226168/22	12,47,544/=
	<b>Total Amount of Schedule Rate</b>					<b>12,47,544/=</b>		<b>12,47,544/=</b>		<b>12,47,544/=</b>
	Ded 20% Below					2,49,509/=		20.25% Below		20.10 % Below
						2,55,746/=		2,52,628/=		2,50,756/=
						<b>9,91,797/=</b>		<b>9,94,916/=</b>		<b>9,96,787/=</b>
						<b>Total Amount Rs.</b>				

  
**Mr. Khan Muhammad Malik (Member)**  
 Accounts Officer  
 District Council Karachi

  
**Mr. Liaquat Ali Mughal (Member)**  
 Assistant Executive Engineer  
 D.M.C Malir

  
**Mr. Shakeel Ahmed Memon (Chairman)**  
 District Engineer  
 District Council Karachi