

# SINDH PUBLIC PROCUREMENT REGULATORY AUTHORITY

## CONTRACT EVALUATION FORM

### TO BE FILLED IN BY ALL PROCURING AGENCIES FOR PUBLIC CONTRACTS OF WORKS, SERVICES & GOODS

- SINDH BANK LIMITED/ADMINISTRATION
- 1) NAME OF THE ORGANIZATION / DEPTT. \_\_\_\_\_
- 2) PROVINCIAL / LOCAL GOVT./ OTHER SCHEDULED BANK \_\_\_\_\_
- 3) TITLE OF CONTRACT Renovation of Chakwal Branch \_\_\_\_\_
- 4) TENDER NUMBER SNDB/COK/ADMIN/TD/617/2015 \_\_\_\_\_
- 5) BRIEF DESCRIPTION OF CONTRACT Same as Above \_\_\_\_\_
- 6) FORUM THAT APPROVED THE SCHEME Competent Authority \_\_\_\_\_
- 7) TENDER ESTIMATED VALUE - \_\_\_\_\_
- 8) ENGINEER'S ESTIMATE (For civil works only) Rs. 1,824/- Per Sq.Ft \_\_\_\_\_
- 9) ESTIMATED COMPLETION PERIOD (AS PER CONTRACT) 45 Days \_\_\_\_\_
- 10) TENDER OPENED ON (DATE & TIME) 06/10/2015 At 1630 Hours \_\_\_\_\_
- 11) NUMBER OF TENDER DOCUMENTS SOLD 02 (Attach list of buyers) \_\_\_\_\_
- 12) NUMBER OF BIDS RECEIVED \_\_\_\_\_
- 13) NUMBER OF BIDDERS PRESENT AT THE TIME OF OPENING OF BIDS 02 \_\_\_\_\_
- 14) BID EVALUATION REPORT (Enclose a copy) 06/10/2015 (Attached) \_\_\_\_\_
- 15) NAME AND ADDRESS OF THE SUCCESSFUL BIDDER M/s. Z-Construction, House No. (4-V), Farid Town Sahawal. \_\_\_\_\_
- 16) CONTRACT AWARD PRICE Rs. 3,780,000/- (1,800/- Per Sq.Ft) \_\_\_\_\_
- 17) RANKING OF SUCCESSFUL BIDDER IN EVALUATION REPORT (i.e. 1<sup>st</sup>, 2<sup>nd</sup>, 3<sup>rd</sup> EVALUATION BID). \_\_\_\_\_
- M/s. Z. Hasan Enterprises \_\_\_\_\_
- M/s. Engineering Expert \_\_\_\_\_
- 18) METHOD OF PROCUREMENT USED : - (Tick one)
- a) SINGLE STAGE – ONE ENVELOPE PROCEDURE  Domestic/ Local
- b) SINGLE STAGE – TWO ENVELOPE PROCEDURE
- c) TWO STAGE BIDDING PROCEDURE
- d) TWO STAGE – TWO ENVELOPE BIDDING PROCEDURE

PLEASE SPECIFY IF ANY OTHER METHOD OF PROCUREMENT WAS ADOPTED i.e. EMERGENCY, DIRECT CONTRACTING ETC. WITH BRIEF REASONS:

19) APPROVING AUTHORITY FOR AWARD OF CONTRACT \_\_\_\_\_ COMPETENT AUTHORITY

20) WHETHER THE PROCUREMENT WAS INCLUDED IN ANNUAL PROCUREMENT PLAN?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

21) ADVERTISEMENT :

i) SPPRA Website  
(If yes, give date and SPPRA Identification No.)

Yes	SPPRA S. No:22847/2015 PQ SPPRA S. No:25307/2015 (17/09/2015)
No	

ii) News Papers  
(If yes, give names of newspapers and dates)

Yes	Express Tribune, Daily Express & Ibrat 18th February/2015
No	

22) NATURE OF CONTRACT

Domestic/ Local	<input checked="" type="checkbox"/>	Int.	<input type="checkbox"/>
--------------------	-------------------------------------	------	--------------------------

23) WHETHER QUALIFICATION CRITERIA  
WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?  
(If yes, enclose a copy)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

24) WHETHER BID EVALUATION CRITERIA  
WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?  
(If yes, enclose a copy)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

25) WHETHER APPROVAL OF COMPETENT AUTHORITY WAS OBTAINED FOR USING A  
METHOD OTHER THAN OPEN COMPETITIVE BIDDING?

Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

26) WAS BID SECURITY OBTAINED FROM ALL THE BIDDERS?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

27) WHETHER THE SUCCESSFUL BID WAS LOWEST EVALUATED  
BID / BEST EVALUATED BID (in case of Consultancies)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

28) WHETHER THE SUCCESSFUL BIDDER WAS TECHNICALLY  
COMPLIANT?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

29) WHETHER NAMES OF THE BIDDERS AND THEIR QUOTED PRICES WERE READ OUT AT  
THE TIME OF OPENING OF BIDS?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

30) WHETHER EVALUATION REPORT GIVEN TO BIDDERS BEFORE THE AWARD OF  
CONTRACT?  
(Attach copy of the bid evaluation report)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

31) ANY COMPLAINTS RECEIVED  
(If yes, result thereof)

Yes	
No	

32) ANY DEVIATION FROM SPECIFICATIONS GIVEN IN THE TENDER NOTICE / DOCUMENTS  
(If yes, give details)

Yes	
No	

33) WAS THE EXTENSION MADE IN RESPONSE TIME?  
(If yes, give reasons)

Yes	
No	

34) DEVIATION FROM QUALIFICATION CRITERIA  
(If yes, give detailed reasons.)

Yes	
No	

35) WAS IT ASSURED BY THE PROCURING AGENCY THAT THE SELECTED FIRM IS NOT  
BLACK LISTED?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

36) WAS A VISIT MADE BY ANY OFFICER/OFFICIAL OF THE PROCURING AGENCY TO THE  
SUPPLIER'S PREMISES IN CONNECTION WITH THE PROCUREMENT? IF SO, DETAILS TO  
BE ASCERTAINED REGARDING FINANCING OF VISIT, IF ABROAD:  
(If yes, enclose a copy)

Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

37) WERE PROPER SAFEGUARDS PROVIDED ON MOBILIZATION ADVANCE PAYMENT IN  
THE CONTRACT (BANK GUARANTEE ETC.)?

Yes	<input checked="" type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	-------------------------------------	----	-------------------------------------

38) SPECIAL CONDITIONS, IF ANY  
(If yes, give Brief Description)

Yes	
No	

39) Date of Award of Contract: ~~10/08/2015~~ 9/11/15

Signature & Official Stamp of  
Authorized Officer

Lt Col (R) Shahzad Begg  
EVP/Head of Administration  
SINDH BANK LIMITED

**FOR OFFICE USE ONLY**

***SPPRA, Block. No.8, Sindh Secretariat No.4-A, Court Road, Karachi***

***Tele: 021-9205356; 021-9205369 & Fax: 021-9206291***

Print

Save

Reset

12/10/2015

<b>Bid Evaluation Report</b>		
<b>Evaluation Report- Renovation etc. Chakwal Branch</b>		
1	Name of Procuring Agency	Sindh Bank Ltd.
2	Tender Reference No.	SNDB/COK/ADMIN/TD/617/2015
3	Tender Description	Renovation etc.of Chakwal Branch
4	Method of Procurement	Single Stage One Envelop Bidding Procedure
5	Tender Published / SPPRA S.No	SPPRA S.No: 22847/2015 (Prequalification Notice) Express Tribune, Daily Express & Daily Ibrat (18 <sup>th</sup> February 2015) SPPRA S.No: 25307/2015 (17 <sup>th</sup> September 2015)
6	Total Bid Documents Sold	02
7	Total Bids Received	02
8	Technical/Financial Bid Opening Date & Time	06/10/2015 at 1630 Hrs
9	No. Of Bid qualified	02
10	Bid(s) Rejected	-


Detail on the above is as follows:-

S No	Name of Firm or Bidder	Cost offered by the Bidder (Area=2,100 sq.ft.)	Ranking in terms of cost	Comparison with Engineering Estimated cost (Rs.1,824 per sq.ft.)	Reasons for acceptance/rejection	Remarks
0	1	2	3	4	5	6
1.	M/s. Z.A Construction	Rs. 1,800 per sq.ft. Rs.3,780,000/-	1 <sup>st</sup> Lowest	Rs. 24/- below the estimated cost	Accepted -1 <sup>st</sup> Lowest Qualified Bidder	-
2.	M/s. Memar Associates	Rs. 2,000 per sq.ft. Rs.4,200,000/-	2 <sup>nd</sup> Lowest	Rs.176/- above the estimated cost	2 <sup>nd</sup> Lowest Qualified Bidder	-


Accordingly going by the eligibility criteria offered in the tender document, Serial No.1 stands as only 1<sup>st</sup> Lowest Qualified Bidder.

**Members Signature- Procurement Committee**

Lt. Col. (R) Shahzad Begg  
Head of Administration



Mr. Saeed Jamal  
Chief Financial Officer



Mr. Syed Muhammad Aqeel  
Chief Manager, IDBL Karachi



4 FINANCIAL PROPOSAL

SIGNATURE MEMBERS/PC-ADMIN

Head - Fin Div. \_\_\_\_\_

Head - Admin Div. \_\_\_\_\_

Member-IDBL \_\_\_\_\_

Date: \_\_\_\_\_

**PRICE SCHEDULE**  
(Applicable for the year 2015-20)

Name of Bidder \_\_\_\_\_

Description	Unit	Rate per sq.ft	*Total Amount
Renovation, Interior, Works & Construction of CHAKWALBRANCH,	2100 sq.ft(Approx.) (As per specification mentioned in scope of work)	200/-	4,200,000/-

This \*total amount will be taken as the financial bid offered by the contractor.

**Note**

- The branch has to be handed over within 45 days of issue date of award letter. In case of delay, a penalty @ 0.15% of total contract amount, for each day of delay will be imposed.
- The cost must include all applicable taxes, stamp duty (as applicable under Stamp Act 1989) duly stamped on the contract agreement, installation, labor and any other charges.
- No advance payment will be made, bills will only be processed for necessary payment on receipt of certificate of satisfaction from the Branch Manager/Project Manager.
- Calculation of bid security**, 2% of the \*Total Amount will be submitted with the tender document as bid security.
- In case it is reviled at any stage after the completion of work that the asked specification of the tender have not been met, the amount of that specific item will be fined to the contractor with appropriate action as deemed necessary by the procurement committee.
- In case of any observation arising in respect of quality of the item, the company will be liable to address it at his own cost, non-compliance of the same will result into initiation of a case against the company for non-commitment or cancellation of tender as will be decided by the Procurement Committee.
- The per square ft. rate given above by the contractor will be for inside area of the premises. However for any outside premises work, its changes will be covered in premises per square ft. area. No charges for any necessary outside work will be entertained separately.
- All terms and condition of Agreement (Annexure "H") are part of Tender Document.

Signature & Stamp of Bidder \_\_\_\_\_

**Memar Associates**  
48-A, Durrani Road,  
Fahad Street, Faisalabad,  
No.2, Canal Road, Faisalabad

SIGNATURE MEMBERS PC-ADMIN  
 Head - Fin Div. \_\_\_\_\_  
 Head - Admin Div. \_\_\_\_\_  
 Member-IDBL \_\_\_\_\_  
 Date: \_\_\_\_\_

4 FINANCIAL PROPOSAL

**PRICE SCHEDULE**

(Applicable for the year 2015-2016)

Name of Bidder Z.A. Construction

Description	Unit	Rate per sq.ft	*Total Amount
Renovation, Interior, Works & Construction of CHAKWALBRANCH,	2100 sq.ft(Approx.) (As per specification mentioned in scope of work)	1800/sq.ft	3780000

This \*total amount will be taken as the financial bid offered by the contractor.

**Note**

1. The branch has to be handed over within 45 days of issue date of award letter. In case of delay, a penalty @ 0.15% of total contract amount, for each day of delay will be imposed.
2. The cost must include all applicable taxes, stamp duty (as applicable under Stamp Act 1989) duly stamped on the contract agreement, installation, labor and any other charges.
3. No advance payment will be made, bills will only be processed for necessary payment on receipt of certificate of satisfaction from the Branch Manager/Project Manager.
4. **Calculation of bid security.** 2% of the \*Total Amount will be submitted with the tender document as bid security.
5. In case it is reviled at any stage after the completion of work that the asked specification of the tender have not been met, the amount of that specific item will be fined to the contractor with appropriate action as deemed necessary by the procurement committee.
6. In case of any observation arising in respect of quality of the item, the company will be liable to address it at his own cost, non-compliance of the same will result into initiation of a case against the company for non-commitment or cancellation of tender as will be decided by the Procurement Committee.
7. The per square ft. rate given above by the contractor will be for inside area of the premises. However for any outside premises work, its changes will be covered in premises per square ft. area. No charges for any necessary outside work will be entertained separately.
8. All terms and condition of Agreement (Annexure "H") are part of Tender Document.

Signature & Stamp of Bidder \_\_\_\_\_

  
Construction

**MINUTES OF THE OPENING OF THE TENDER (TECHNICAL /FINANCIAL PHASE)**

TYPE OF PROCUREMENT  ADMIN / IT / CONSULTANT / MEDIA  
TENDER NAME RABWATI ET C. CHAKUAL BR  
TYPE OF TENDER  SINGLE STAGE-ONE ENVELOPE / SINGLE STAGE-TWO ENVELOPE / TWO STAGE / TWO STAGE-TWO ENVELOPE  
OPENING DATE 6/10/15  
OPENING TIME 1630hrs

ATTENDANCE (MEMBER PC) Hofa  
CFO  
CHIEF MANAGER, IDBL

ATTENDANCE (REPS. OF BIDDERS)	NAME	FIRM
	<u>Bygones</u>	<u>M/S. Z.A CONSTRUCTION</u>
		<u>M/S. MAMAR ASSOCIATES</u>

TOTAL BIDS ACCEPTED FOR EVALUATION 02  
TOTAL BIDS REJECTED \_\_\_\_\_

REMARKS \_\_\_\_\_

SECRETARY PROCUREMENT COMMITTEE  
SIGNATURE [Signature]  
DATE 06/10/15

### 3 SCOPE OF WORK

Sindh Bank Limited (SNDB) requires proposal from the Prequalified Contractors(SPPRA S.No. 22847) for Renovation etc. at Chakwal

For establishment of its new Branches, throughout the country and for renovation of Branches / offices, Sindh bank advised to pre-qualified contractors to submit their offer / bid, against tender, with following terms and conditions.

After thorough visit of desired premises, the contractor will submit per square feet rate of said work, complete in all respect, as per given tender, lay out plan, specification and brand / make.

However as per actual site condition and market availability, equivalent item can be provided with prior written approval from Bank, failing which the payment of such items will be deducted accordingly from the final bill.

**The salient works which are the part of requirement will be as under:**

1. Your given per sq. feet rates will be based only for area, inside the developed branch. However provision for entire works, given follows and mentioned in specification will be included in internal area's PSFT charges and no additional payment for any work, executed outside will be given. We will multiply your given PSFT rates with internal developed area and will get entire internal and outer works with in that cost.
2. The given PSFT rates will also include charges for approval of proposed lay out / construction, from respective town / Municipal Corporation, if any.
3. Comprehensive visit of site and submission of proposed lay out plan. The number of required counters , staff strength and requirement of lockers will be given by the bank.
4. Complete demolition of existing structure, necessary for establishment of new branch, including brick walls, RCC, slab, beam, floor, etc. and removal of debris.
5. New Block masonry / Brick masonry walls/ RCC slab / lintel for bath, stores, guard post, ATM room, and other works as per plan.
6. Floor tiling, approved design tiles, matching skirting, false ceiling complete in all respect.
7. Wash rooms and kitchen tiles, approved fixtures, approved pipes, fittings, ventilators, exhaust fans, complete in all respect.
8. All internal and external plaster works
9. All RCC works for Strong Room and lockers, and other, as per lay out and specifications
10. All internal and external paint and polishing works with approved quality paint.
11. Approved false ceiling with approved hanging system/ lights/ down lighters
12. Solid and skin pasted flush doors for baths, kitchen, store, and other place with best quality locks, handle, hinges, tower bolt, stoppers, complete in all respect, including beach wood solid frames, beadings, approved polishing as per lay out..



13. Two full height 3X7 feet wooden Almirah in store, kitchen cabinets, column cladding, complete in all respect.
14. Complete Electrical wiring for light points, power points, Air Conditioning units, ATM, sign Board, with PCL / Fast / AGE / Pioneer copper wires or equivalent of approved size, in approved PVC pipes, Boxes, switches, main lines, three DBs, one for UPS, other for AC and 3<sup>rd</sup> for lighting & power as per plan, with Change over switch. Two standard earth pits, as per approved specifications and lay out plans, along with all approved light fixture and fittings.
15. Technology box for each users with two Flat pins, one round pins, one RJ-45 for Data, one RJ-12 , I/O sockets for telephones, cat 6 cables from I/o to patch panel, telephone cat-6 cables from I/O to tag block, supply of 24 ports approved 3M or equivalent patch panel, one 15 u Cabinet, termination, necessary line cords and patch cords, with certification, 4additional data points for fax machine& time attendance machine, and also for manager & ops Manager, tagging / numbering at both ends, complete Electrical wiring, data and telephone works, in all respect.
16. Approved glass partitions for Manager room, ATM room, Entrance, fixed glazing, with approved glass, aluminium section, gasket, locks, D locks, handles, necessary frosting, Ajrak tiles film, Korean or equivalent door closer machines, necessary windows, doors, as per lay out plan.
17. Approved design grills for Entrance, all front and sides external windows , ATM internal door, Exit door, and Rolling shutters at all external glass doors, fixed glazing, ATM Entrance, MS approved Exit door, approved vertical blinds on all external glasses, windows ,fixing of vault and lockers doors.
18. All elevation works, elevation tiles, full granite steps for Entrance and ATM entrance, 35 degree Ramps, ATM , front landscaping, all front tough pavers, complete in all respect, as per lay out drawing & Design Book.
19. Approved copper piping for inverter AC, wiring, breakers, drain lines, fixing of outer units, complete in all respect

<b>CIVIL &amp; INTERIOR WORKS</b>
-----------------------------------

S No	DESCRIPTION
1	<b><u>DISMANTLING</u></b> <b><u>The demolition work will executed only after approval from HO.</u></b> Dismantling / removing of existing constructed structures, RCC, walls, slab, floor fixtures, tiles, ceiling, windows, doors, grills, shutters, wiring piping, , partition, with proper tools & equipment's with all necessary precautionary measures, to make surface ready to receive finishes, stacking useable dismantled materials at designated place, as per new plan , as directed by bank., and disposal of surplus stuff / debris etc. away from site.
2	<b><u>REINFORCED CEMENT CONCRETE</u></b> Providing and laying, compacting finishing & curing etc. straight or curved cast- in place designed mix 1:2:4 Reinforced Cement Concrete using 1 Part of Ordinary Portland Cementor equivalent, 2 Parts of silt free local sand and 4 Parts of 3/4" thick downgraded crushed stone; mixed in a manner to achieve a cube strength of 3000 psi in 28 days, using 3/4" down crush stone & fine sand (free from silt & dust), including mechanical mixing, transporting, hoisting, lifting & placing at any height / depth, vibrating and curing etc. Complete in all respect including cost of Steel Reinforcement (3/8" dia deformed steel bars G-60 @ 6" C/C both ways, staggered double jaal in a manner that the alternate spacing b/w bars should not increase 3" C/C) & form work for Cement Concrete including cutting, bending, laying in position, making joint and fastening, removal of rust from bars, cost of binding wire and labor charges for binding of steel reinforcement: also includes cost of water tight form work and its removal. Complete in all respects, as per direction of Engineer.
a)	R.C.C. Walls (6" thick)
b)	R.C.C. Slab (6" thick) on grade
c)	R.C.C. Column
d)	Precast Lintels.
3	<b><u>C.C RAISED FLOORING (WITH CLAY POTS)</u></b> Provide and lay 1:3:6 concrete in sunken/ raised slabs to required levels washroom, kitchen or elsewhere specified. Mechanically vibrate, consolidate and cure etc. Complete in all respects and conforming to the requirements of drawings, specifications and to the entire satisfaction of the Architect./consultant.
4	<b><u>MASONRY WORK</u></b>
a)	<b><u>Brick Masonry</u></b> Providing and laying Brick masonry with first class solid burnt brick set in (1:4) cement sand mortar in super structure including scaffolding, curing, drilling for wall ties where brick work joins R.C.C columns, walls etc. Complete in all respects as per drawings and specifications to complete satisfaction of the consultant.

i	Internal walls 4.5" thick
ii	Internal walls 9" thick
iii	External walls 9" thick
	-
b)	<b>Block Masonry</b>
	Providing and Laying Solid Block Masonry set in Cement Sand Mortar 1:4 at any height including scaffolding curing and finishing etc. with appropriate 4', 6", 9", thickness.
5	<b>PLASTER WORK</b>
	Providing and laying plaster (thickness and Cement ratio as indicate in sub items below) with cement sand (CS) mortar on masonry and concrete surfaces, with G.I. expanded metal mesh at the interfaces / joints of structures of different materials, staging and curing, plaster stopper, corner beads, channels for making grooves and drip course etc., where required and/or as directed by the Architect / Engineer complete in all respect.
i)	1/2" thick plaster with 1:4 CS mortar on internal walls/ceiling
ii)	3/4" thick plaster with 1:3 CS mortar on external walls
	-
6	<b>PORCELAIN TILES ON FLOOR &amp; SKIRTING</b>
	Providing and laying glazed full body Porcelain of approved design, colour and pattern Tiles LV 04, Ivory , china or equivalent , setting in Stile dry bond (with cement), with matching color imported Grout. Complete in all respect, including curing, cleaning, finishing & hacking/chipping of existing surface for bonding where necessary, etc. as per specifications and/or as directed by the Architect / Engineer (at any elevation)
i)	On Floor : 24" x 24"
ii)	In Skirting : 4" x 24"
7	<b>P.C.C FLOORING</b>
	Providing and laying Plain Cement Concrete under floors in required panels (thickness and ratio as indicate in sub items below) including leveling, compacting, curing etc. including from work if required and its removal, using 1-1/2" downgraded crushed stone as coarse aggregate, approved local sand. Complete in all respects as per specifications and / or as directed by the Architect / Engineer
i)	P.C.C (1:4:8)100mm thick.
ii)	P.C.C (1:2:4) 50mm thick, top made rough to receive floor finishes.
8	<b>CERAMIC TILES (TOILETS &amp; KITCHEN)</b>

	Provide and lay Ceramic Tiles (Matt or Glazed) of approved quality, beige / ivory colour Master tile, 9117 base color white with grey pigmentation Salt and pepper style for bathroom flooring and walls (Master Tile 12" x 12" LPF 28-108 for bath walls in light Beige color and Flooring Dark Beige LPF 14-106) for flooring / walls and in slope, if required, with 1:4 cement sand mortar of required thickness to achieve a minimum overall finished floor thickness of 2", setting the tiles with neat cement mortar, grouting the joints 1/4" with matching grout of approved supplier, curing, cleaning, finishing & hacking/chipping of existing surface for bonding where necessary, etc. complete in all respect.
i)	Ceramic Matt Tiles 12" x 12" (For Floors).
ii)	Ceramic Glazed Tiles 12" x 12" (On Walls).
9	<b><u>FALSE CELING</u></b>
a)	<b><u>Gypsum Board (24"X24")</u></b>
	Providing & laying 10 mm thick gypsum board False Ceiling, 24" x 24" Elephant Brand or approved equivalent (with aluminum foil at back) in straight, curved, tiles or multiple profiles, as shown on drawing section, fixed with imported powder coated aluminum, " T" & "L" section with GIG or CKM ceiling suspension system (grooved design, make DFB or equivalent UT/FUT series), having provisions for light and AC grill. Complete in all respect as per drawing and instruction of Bank's Engineer.
10	<b><u>SQUARE/RECTANGULAR COLUMNS CLADDING</u></b>
	Provide, make Cladding with 1/2" MDF board over treated partal wood framing horizontal and vertically over column from +2'-6" elevation up to false ceiling level as per drawing. Including all fittings polishing etc., complete in all respects. From 0' - 0" to 2'-6" Porcelain tile Spanish cladding or equivalent.
11	<b><u>WOODEN CABINETS</u></b>
a)	<b><u>Kitchen Cabinets</u></b>
	Provide and install in position wooden pantry cabinets, consisting of PARTAL wood battens / framing, 3/4" thick chipboard 600 density shelf, partition and shutter, with beach wood lipping, MDF drawers with imported roller runners, hinges imported Japanese type or equivalent to show 1/4" groove in between, approved Fomite Formica finish on both sides of shutter, including all kind of best quality hardware's, spring hinges, SS handles, locks etc. Complete in all respects.
i)	Wall hanging cabinet 18" deep.
ii)	Wooden base cabinet 24" deep.
b)	<b><u>Full Height Cabinets (for Record Room) . / Store</u></b>

	<p>Providing and fabrication in position two full height cabinets in record room (3' wide &amp; 18" deep), consisting of 3/4" thick BEACH laminated board boxing with 3/4" thick beech wood Formica finished leaves. 1/4"x 3/4" solid Beech wood lipping with 1/2"x1" thick beech wood frame would be provided in front of boxes with clear lacquer polish. All fittings i.e. screws, bolts imported Italian hinges or equivalent, catchers, locks, handles and all other accessories are part of the job including anti-termite treatment etc. Complete in all respects. .</p>
12	<p><b><u>INTERNAL PAINT</u></b></p> <p>Provide and apply with Roller, Matt finish water based paint (ICI/Berger or equivalent) minimum three coats of approved shade over a coat of primer to internal plastered surfaces, base preparation consisting of rubbing with sand stone, filling the uneven surface with putty, rubbing with sand paper and preparation of smooth surface perfect in all respects. Complete in all respect as per specifications and/or as directed by the Architect/ Engineer.</p>
13	<p><b><u>WOODEN DOOR / FRAME / CHOWKAT / Beading</u></b></p> <p><b>DOOR FRAME:</b> Provide and fixing of termite treated solid beach wood door frames of required thickness including Lintels, hold fasts, where ever required, complete in all respect including polish with proper beach wood beading.</p> <p><b>SKIN DOORS D1-2'-6"x7'-0":</b> (for Toilet/Kitchen) Provide and install doors consisting of best quality Malaysian skin, pressed over best quality treated partial framing, with approved quality of door locks, handle, tower bolt, hold fast, stopper, hardware and paint /polish, complete in all respect.</p> <p><b>PLY DOORS D2-3'-0"x7'-0":</b> Providing and fixing 1 ½" solid flush doors with polished of approved ply on both sides, viewing panel, Imported Yale lock, 4" hinges, hold fast, tower bolt, latches, stopper, &amp; all other necessary hardware, complete in all respect.</p>
14	<p><b><u>ALUMINUM WINDOWS / VENTILATOR</u></b></p> <p>Providing, fabricating and fixing in position heavy duty deluxe section approved color anodized aluminum local extruded Pak cable or equivalent (thickness of section 2mm minimum) or size using 4" wide section, 6 mm distortion free approved glass with gasket neoprene channels. Aluminum surfaces shall be anodized in approved color finish and shop protected including all accessories, fittings, rubber, seals, neoprene weather strips between frame and wall and frame edge trimming, gasket, screws, fly screen etc. and approval of the Consultants, complete in all respect, as per drawing / required size.</p>

15	<b><u>GLASS DOOR</u></b>
	Providing, fabrication & fixing 12 mm thick glass door with top & bottom locking system, 4" Aluminum D-48 by Lucky or equivalent Pak Cable section, with 12mm thick Middle East / Saudi Arabia or equivalent clear glass with frost film and Bank's monogram, Approved Ajrak film, with gasket size and shape as shown on drawing, including bolts, D lock, nuts, screws aluminum channel, handle, floor machine (New Star Japan or Korean or equivalent), locks etc. Complete in all respects as directed by Engineer.
16	<b><u>INSTALLATION OF VAULT / LOCKER ROOM DOOR</u></b>
	Lifting & Fixing charges of Bank's supplied Vault / Locker Doors , welding of door frame with RCC MS bars, and to facilitate the Vendors. Complete in all respects.
17	<b><u>ALUMINUM SECTION &amp; FRONT GLAZING</u></b>
	Provide and install 4" Deluxe section D 48 of LUCKY or equivalent fixed aluminum glazing for elevation with hinged panels including latches, rollers, rubber gaskets all necessary hard ware and fittings, application of silicone for joints including approved 8 mm thick imported clear glass(KSA OR GHANI or equivalent) glass with complete as per drawing and as directed by the Architect.(Recommended Manufacturer: Pakistan cables OR Lucky)
	Complete in all respects ( <u>at front</u> )
18	<b><u>ALUMINUM COMPOSITE PANEL</u></b>
	Fabricating, providing and installation of 4 mm Aluminum Composite Panels for Cladding (at any level), make DADEX, ECL, Alpolc or approved equivalent, consisting of heavy duty deluxe anodized frame with 2mm base thickness, including designing, cutting, panel making, scaffolding etc. Complete with substructure, as per drawings provided or as directed by the Architect (B.P 350/- SQ.FT)
19	<b><u>GLASS PARTITION</u></b>
	Providing and installation 12mm thick glass KSA/UAE or equivalent polished glass with 100mm top & bottom rails, brush finish SS-304, lucky or equivalent Pak Cable section with frosted film surface as per approved design. Contractor is required to provide joints between the panels with minimum 5mm thick clear silicon from Dow corning or other approved by the Engineer. Complete in all respects. ( <u>in Manager and IT Rooms</u> ).
20	<b><u>WINDOW BLINDS</u></b>

	Provide and install imported VERTICAL Blinds, in imported synthetic fabric (5" wide) with suspension mechanism, approved shade & colour ( Light grey ). Complete in all respect at all outside glasses.
21	<b><u>SECURITY GRILLS</u></b>
	<b>Wrought Iron Grills for windows, Generator, AC outers,</b>
	This security grills will be provided at all external windows, ventilators., inside the fixed entrance glazing, geill door inside the entrance door, Providing and Fixing M.S Security Grills to windows, comprising of 1/2" square bars @ 6" c/c 1"x1-1/2" MS pipe 16 gauge, welding, grinding, finishing, rubbing 3 coat of enamel paint (ICI,NIPPON,BERGER or equivalent) red oxide before paint. Complete in all respects, as per standardized design and /or as shown in drawing, as per approved design, attached herewith. Further proper lockable grills with abiove specification will also be provided for Generator and all AC out door units.
22	<b><u>SECURITY ROLLING SHUTTER</u></b>
	Providing and fixing Mild Steel Rolling Security Shutter at front main entrance door , before glass doors, ATM Room's door, outside windows, made of 20 s.w.guage GI sheet, guide channels 10 gauge MS sheet and Roll-up durable mechanism (Spring & MS Bar etc.) with 2.5" Dia box, consisting of steel frame of M.S. channel 2"x1.25"x1" (50x30x3 mm) angle iron 1.5"x1.5"x1" (40x30x3mm)M.S plate 1"x1"xa" (300x300x3 mm) G.I. pipe 1.5" (37mm) Ø, springs 2'(600mm) c/c. Rollers 24 S.W.G G.I. Covering 1'x1' (300x300 mm) with S. Steel sheet 18 S.W.G, handles, holdfast, etc. center of the roller sheet to be in chicken foldable type window / mesh ( 6" X 12" can be covered with sliding panel, from inside ) for looking outside, vertical removable channel. Complete with sliding bolts handles including 3 coats of enamel paint (ICI or equivalent) including base coat of anti-rust primer, Complete in all respects, including all types of hardware etc. as per satisfaction of the consultant and engineer incharge. as per attached layout .
23	<b><u>SECURITY DOORS</u></b>
	i) <b><u>Security Grill Door</u></b>
	Providing and fixing the MS enamel painted security grill door panel of 3/4" MS square solid bars @ 4" c/c both ways welded with 1-1/2"x3/16" MS flat Frame and covered with MS Sheet 14 gauge, with all locks, including all necessary fittings. Complete in all respectat main entrance . Thus at entrance, inside will be security grill, the glass will be in centre and rolling shutter will be outside.
24	<b><u>EMERGENCY EXIT M.S DOOR</u></b>

	Fabricating, providing and fixing fire exit door with 16 S.W.G M.S 3/4" square pipe, 18 SWG MS sheet pressed over this frame, at both sides, sheet frame painted with approved deco colour including 16 S.W.G M.S sheet shutter framed in 4" x 3" M.S box section, including best quality hinges, locks, handles, hold fasts and other necessary hardware etc. size as per site. Complete in all respects as per drawing attached herewith, , specifications and as directed by the Bank.
25	<b><u>GRANITE (BLACK GRANITE)</u></b>
	Provide and laying 3/4" thick factory polished granite door/window Sills, Thresholds and Borders, Steps for internal stair case, main entrance steps, ATM entrance, plinth protection, thresholds, straight and curve as per site requirement, single piece, as directed by client, fixed 1:2 cement and mortar, color chemical grout including final rubbing finishing and polishing bull nosing carborandom grove where required etc. complete with all respect.
26	<b>ROOF TREATMENT:</b> Provision of Roof Screaming, minimum width of 2", for maintaining slope using 6mm crush chips of ratio 1:2:4 at roof including curing and fixing of Drain Pipe wherever required, complete in all respect., only where necessary .
27	<b>WATER PROOFING:</b> Provision of Roof treatment to be provided as per specifications and site condition in order to stop seepage of water wherever required, ONLY WHERE NECESSARY.
29	<b><u>INTERLOCK PAVERS</u></b>
	Providing & laying 60mm thick interlock pavers of approved design and shape natural colours, having strength b/w 7000 psi to 8500 psi i/c filling the joints with sand, for parking area laid over 3" thick layer (compacted) of approved course sand with leveling & dressing. Complete in all respects or as directed by the Engineer.(make Tuff/Envicrete/HUBCERETE or equivalent) . This pavers will be installed up to 12 feet width, from the edge of Branch .
31	<b><u>EXTERNAL PAINT</u></b>
	Provide and apply with Roller Matt Enamel paint WEATHER SHEILD (ICI/Berger or equivalent) minimum three coats of approved shade over a coat of primer to internal plastered surfaces, base preparation, primer, smooth filling etc. complete in all respect as shown on the drawings specifications and/or as directed by the Architect/ Engineer.



<b>32</b>	<b>ATM ROOM</b>
	<p>Establishment of ATM room, having an average size of 5X7, suitable for free standing, front loaded ATM machine , The all walls of ATM room will be till the height of ceiling, with proper high strength machine made Block masonry, and or proper security grill. One telephone point and one Data point and one 15Amps power point for ATM machine, power point for one ton AC, with gas copper pipes and drain will also provided .will be provided in ATM room . Tiles and ceiling as per branch specification will be provided. The ATM power socket, data outlet face plate, telephone out let, will be other side of ATM room's wall and one 2 inches dia pipe will be provided in wall for wiring / leads. . The data point will be terminated in Patch panel and power point and light of ATM room will be connected to UPS. power . The earth point of ATM socket will be solidly connected with earth pit.</p>
<b>33</b>	<b>ATM MAIN and INTERNAL DOORS</b>
	<p>The main entrance door of ATM will be standard above specified glass door, 2- 1/2 feet wide, with proper lock, inside best quality D lock, handle and new star machine, with 1/2 inches above specified glass with frost and Ajrak film, and monogram. Further Security rolling shutter, specified above, will also be provided before entrance of ATM, This also include internal door . its installation, with MS, 16 SWG, 3/4"x3/4" square pipe grill,, 8" center to center distance, both ways, inside ATM room, 16 SWG GI sheet fitted over grill from atm room side and 3mm ply fixed from branch side. with lock, handles, polishing &amp; finishing and making peep window 8" x 2" at a height of 5'-0 from floor level., this also include 16 SWG sheet made door frame, suitable to cater the weight of door, with hinges, holdfast, Complete in all respects or as directed by the Architect</p>
<b>33-</b>	<b>MORCHA</b>
<b>a</b>	<p>Providing of block Masonary 3 X 4, feet minimum inside, morcha in proper shape, totally covered from all four sides with 2 feet door 9 Exit door Specification ), inside lock, 3X6 inches inspection opening at proper height, 12 inches raised floor, stole, fan, paint, complete in all respect.</p>
<b>34</b>	<b>ATM ACCESS RAMP FOR DISABLE PERSON</b>
	<p>A three feet wide CC ramp, at 30 degree, will be provided for disable person. Wherever possible.</p>
<b>35</b>	<b>Front Elevation</b>

The front elevation of the Branch will consist of proper CC steps, fixed on it approved granite . The portion other than window and door will consist of Bank's approved AJRAK tiles, aluminum composite panel, approved elevation ceramic tiles, as directed by the Bank's Engineer, plan. and other approved face tiles, with approved pattern .

**PLUMBING WORKS**

S. No	DESCRIPTION
1(a)	Providing and fixing / making of complete kitchen fittings, bath rooms fittings with all necessary best quality and proper sized upvc water pipes, best quality fitting, 3 inches and or 4 inches best quality Dadexor equivalent UPVC pipes, gasket type fittings, trap, joints, waist best pipes with best SS trap covers, European type ceramics ware coupled water closet, (PORTA) or equivalent, white / Ivory /light colour, model HD-180 , including 3 gallons cistern, P/S trap, C.P tee stop cock with wall cups, connection pipes, “ hinged double bacolite seat and cover , muslim shower, all joints to services and drains, plugging and screwing as necessary to the structure and make good the same, complete in all respect as per specifications and drawings.. All pipes and pvc fittings will be dadex or equivalent, all other / fittings/ fixtures will be master / Sonex/ Grohe China or equivalent, <u>plastic coated</u> , and In case where there are two bath room, in other bath room, Indian type or equivalent, Porta WC, model HDD-9, ivory colour with all porta/ Master fittings will be fixed.
2	Providing and fixing Wash hand Basin with pedastle, PORTA or equivalent model HD-19, Ivory colour /white colour “SONEX” waste coupling, plug with C.P brass chain, 1.5” dia. P.V.C ( D type) waste pipe connections to water lines, tee stop cock for cold and hot water inlet connector with nuts and fitting, waste pipe waste coupling , plugs with chain other ancillary material C.P grating including C.P bottle trap, testing etc. complete in all respect and as directed by the Engineer.
3	Provide & fix best quality Stainless Steel imported Kitchen Sink, Balraco or equivalent make (40" x 20") 1000mm x 500mm sink with CI or WI brackets 150mm (6") built in wall, 40mm(1 1/2") rubber plug & chrome plated brass chain, 40mm (1 1/2") C.P brass waste, pillar tap 2 way deluxe, 40 mm (1 1/2") dial malleable iron or C.P. brass trap, Bottle trap and unions. Make requisite holes in walls & floor for pipe connections & make good with approved material. (with SONEX or equivalent fittings).

4	Provide & fix PVC floor drains of 4" dia of make Nikkassi, Pak Arab or approved equivalent, having minimum guaranteed 2" water seal with screw down C.P cover, peripheral drains with or without a vent arm. Make requisite holes in walls, floor for pipe connections & make good with approved material, including SS drain / grating with side perforation.
5	Provide & fix approved quality chromium plated towel rails 750mm x 20mm (30"x3/4") with brackets and C.P screws. (Taiwan make or equivalent)
6	Provide and fix approved quality C.P toilet paper holders and coat hook. (Taiwan make or equivalent)
7	Provide & fix chromium plated soap dish of approved quality with C.P screws. (Master /Sonex or equivalent)
8	Provide and fix Muslim Showers manufactured by Master/Sonex or equivalent, plastic coated, complete with stop cock and controlled spray head.
(a)	
(b)	Providing and fixing 15 mm dia C.P. mixer with C.P pipe 15 mm dia, of Master, Sonix or approved equal complete including pipe connections, all fittings, testing etc.
i)	For Wash basin
ii)	Kitchen Sink Mixer, Master/Sonex or equivalent Grohe China, Plastic coated, Kitchen Sink Mixer (Plastic Coated) or chromed make. Master, Sonex or equivalent
9	Providing, fixing, jointing and testing Polypropylene Random (PPR) pipes make Dadex / AGM or approved equivalent pressure pipe for cold/hot water as per DIN 8077-8078, PN-20 for pipes and DIN 16962, PN-25 for fittings (polyfusion welded joints) inside building including fittings and specials (sockets, tees, elbows, bends, crosses, reducers, adaptor, plugs and union etc.) supported on walls or suspended from roof slab or run in chases including pipe hangers, supports, cutting and making good the chases and holes, its painting and insulation against sun light complete in all respects. conforming to BSS. Cut and make good with Test and Commission for cold and hot water system. with appropriate dia and sizes.
10	Provide and fix of Gate valve, Threaded ends, bronze body with union bonnet, non-rising stem and wedge disc. suitable for 8.5 bars SWP and 250 deg. F., manufactured by KITZ (Japan) or approved equivalent.
i	Dia 1 1/2"
ii	Dia 1 1/4"
iii	Dia 1"
iv	Dia 3/4"
v	Dia 1/2"

11	Provide approved / appropriate dia , size, and fix cast UPVC pipes( AGM/dadex /vebro turkey Brand or equivalent) including fittings such as tees, elbows, sockets, wyc, hangers/supports etc. conforming to BSS for soil waste and vent pipes as embedded in floor and walls or suspended from slab or clamped to wall including plaugsms hangars, beds, Tees, Yees. Include for making requisite number of holes in walls and floors where required and making good the same as necessary to the structure labeling, testing to 6.5 feet water height complete.
12	Provide and construct gully trap with 12"x12" cast iron frame and cover, including excavation, backfilling, masonry, plaster internally and externally vitreous China trap etc. complete and approved by the Engineer.
13	Provide and construct man holes for sewer with 24"x24" C.I frame and cover (40kg) including 8" Masonry, puddlo plaster internally and externally up to depths; shown on drawings and approved by the Engineer. PCC 1:2:4 base slab, benching with 1:3 cement sand mortar including 24" dia manhole cover, frame and rungs, complete in all respect.
14	Construction of Septic Tank one no size 6'x4'x5' avg depth at per site conditions in all respects as per drawings. If required
15	Make Sewer Connection to existing Sewerage disposal system. Complete in all respect.
16	Make Water Connection to existing Water supply system using pprc pipe fitting of Dadex or equivalent
17	Providing, installing & testing of Over Head Fiber Glass Water Tank make Dura or approved equivalent, with 500 Gallons storage capacity, including all necessary fittings etc. Complete in all respects as per instruction of Architect.
<b>ELECTRICAL WORKS:</b>	
<b>S. No</b>	<b>DESCRIPTION</b>
<b>A. INTERNAL WIRING</b>	

1	Supply, installation and commissioning of <b>Light Circuit</b> wiring, from MCB in DB to Switch Board to be wired with 3x2.5mm sq. (P+N+PE) PVC insulated 300/500 V grade wire, manufactured by M/s. Pakistan Cables Ltd., AGE, Pioneer or equivalent or FAST or equivalent, pioneer or as specified in Annexure A, in and including cost of 1" dia. heavy duty PVC conduit make Popular, Beta, installed on roof slab, above false ceiling, or concealed in walls, or as required as per site conditions, all PVC conduit accessories, pull boxes, steel pull wires, Complete in all respects. Each circuit shall have independent CPC. Maximum wiring of 2 light circuits can be pulled through 1" dia. PVC conduit. <b>Note:-Supply Certificate issued by Company will be attached with bills</b>
2	Providing, Installation, testing and commissioning of wiring of <b>One light point</b> controlled by one switch and wired with 3x1.5 mm sq. PVC insulated wires 300/500 V grade, in and including cost of 3/4" dia. heavy duty PVC conduit recessed in wall, columns slabs or above light carrier all PVC conduit accessories, 3" high PVC junction boxes, pull boxes, steel pull wires, PVC flexible conduit from ceiling junction box to light fixture with brass chuck nut including cost of 3x1.5mm sq from Ceiling Junction Box to Light Fixture, M.S. sheet steel switch box 16 SWG with earth terminal and 2 coats of enameled paint, M.S. box shall be of the same size as that of 1, 2 or 3 gang flush type plate switches, including cost of gang type light switches 10 amps.
3	Providing, Installation, testing and commissioning of wiring of <b>Two or three or four light points</b> controlled by one switch and wired with 3x1.5 mm sq. PVC insulated wires 300/500 V grade, in and including cost of 3/4" dia. heavy duty PVC conduit recessed in wall, columns slabs or above light carrier all PVC conduit accessories, 3" high PVC junction boxes, pull boxes, steel pull wires, PVC flexible conduit from ceiling junction box to light fixture with brass chuck nut including cost of 3x1.5mm sq from Ceiling Junction Box to Light Fixture, M.S. sheet steel switch box 16 SWG with earth terminal and 2 coats of enameled paint, M.S. box shall be of the same size as that of 1, 2 or 3 gang flush type plate switches, including cost of gang type light switches 10 amps.
4	Providing & wiring of <b>1-3 pin 15 Amps</b> power socket outlets (for General Use) wired with 2x4mm <sup>2</sup> +1x2.5mm <sup>2</sup> CU/PVC insulated cable 300/500 Volt grade, make Pakistan cables, Fast, Pioneer, AGE, in 25mm dia PVC conduit make Beta, Popular, recessed in wall/floor, above false ceiling or as required as per site conditions, all PVC conduit make Beta accessories, pull boxes, steel pull wires. Complete with all conduit & wiring accessories including 15 Amps, 3 pin combined switch socket make Clipsal (Austria), Panduit, MK(UK), Legrand (France) or approved equivalent. Wiring shall be done directly from the MCB installed in the respective DB without any claim of circuit. complete with suitable size 1.5mm thick sheet steel back box recessed in wall.

5	Providing & wiring of <b>1-3 pin 10 Amps</b> power switch socket outlets (for RAW supply / WAPDA) wired with 3x2.5mm <sup>2</sup> 1 core CU/PVC insulated cable in 25mm dia PVC conduit make Beta, Popular, recessed in wall/floor, above false ceiling or as required as per site conditions, all PVC conduit make Beta accessories, pull boxes, steel pull wires etc. Complete with all conduit & wiring accessories including 10 Amps, 3 pin combined switch socket make Clipsal (Austria), MK(UK), Legrand (France) or approved equivalent. Wiring shall be done directly from the MCB installed in the respective DB without any claim of circuit. complete with suitable size 1.5mm thick sheet steel back box recessed in wall.
6	Confirming to same specification as mentioned above in item A-08, but outlet to outlet wiring. Complete in all respect.
7	Providing & wiring of <b>2-3 pin 13 Amps</b> power switch socket outlets (for UPS) wired with 3x2.5mm <sup>2</sup> 1 core CU/PVC insulated cable in 25mm dia PVC conduit make Beta , Popular, recessed in wall/floor, above false ceiling or as required as per site conditions, all PVC conduit make Beta accessories, pull boxes, steel pull wires. Complete with all conduit & wiring accessories including 13 Amps, 2/3 pins combined switch socket (duplex) make Clipsal (Austria), MK(UK), Legrand (France) or approved equivalent. Wiring shall be done directly from the MCB installed in the respective DB without any claim of circuit. complete with suitable size 1.5mm thick sheet steel back box recessed in wall.
7	Providing installing & wiring for <b>Split A/C's</b> unit from distribution board to respective 1-3 pin 16 Amps switch socket, for outer unit or indoor unit, as the case may be, wired with approved brand 2x6mm <sup>2</sup> + 1x4mm <sup>2</sup> 1 core CU/PVC cable in 25mm dia PVC conduit make Beta, Popular, recessed in wall/floor, above false ceiling or as required as per site conditions, all PVC conduit make Beta accessories, pull boxes, steel pull wires etc. Complete with all conduit & wiring accessories including 16 Amps, 3 pin combined switch socket make Clipsal (Austria), MK(UK), Legrand (France) or approved equivalent. Wiring shall be done directly from the MCB installed in the respective DB without any claim of circuit. complete with suitable size 1.5mm thick sheet steel back box recessed in wall. Complete with all accessories including termination.
<b>TECHNOLOGY BOXES</b>	

8	Providing, Installation, wiring from respective breaker in respective DB, of CLIPSAL make <b>Floor / wall Technology Box</b> with cover, 1.5mm thick sheet, steel fabricated floor mounted water tight weather proof, fitted with two 13 Amps , UPS power flat pins and one 13Amps raw power round pin sockets, one dual face plate with RJ-45 out let for Data point and one RJ-12 I/o sock . for telephone , with power socket wired with approved 2.5 mm wires with earth wire of same size, from respective UPS and or normal DBs, data point and telephone points with cat-6e Clipsal /3M wire and Outlets. Complete in all respects including floor / wall cutting, include termination of electrical wires at sockets, and DB, Data wires at I/O of face plate and at patch panel on other end, with telephone points at RJ-12 I/O at Box and 50 pairs Tag Block with MS box, at other end with complete termination, testing and submission of test report and 20 years termination warranty.. This work also include all respective cabling, proper tagging / numbering at both ends of all Data and telephone cables.
<b>TOTAL</b>	
<b>B. FITTING &amp; FIXTURES</b>	
9	Providing, Installation, testing & commissioning of <b>light fixtures</b> & other accessories, complete with all accessories such as, Chain, Rod, Screw, foundation for garden light etc. Complete in all respect with chokes (ballast) , lamp holders, starters, power factor correction capacitor, tube rods internal wiring, earthing terminal .
i)	Philips Down light FBH with 2X 18 W, Philips PLC Lamp energy savers or equivalent
ii)	Mirror Light Fixture Philips GMP-118-84 or Equivalent
iii)	Recessed Ceiling Down light fixture (6" dia) circular shape equivalent to Philips Model Lunar with Optogan Emotion Series PLC lamp installed vertically and aluminum reflector as approved by architect./Engineer.
10	Supply, installation and commissioning of <b>Exhaust / Bracket Fans</b> of following sizes, plastic body, louvers, all necessary fixing accessories, make Asia, Climax, National or as manufactured by any one of the manufacturers as mentioned in Annexure-"A". Complete in all respects.
i)	Exhaust Fan 12" dia
ii)	Wall Bracket Fan 24" dia
#	<b>MAIN SWITCHES AND DBs</b>
	All conchild with 16 SWG MS powdered coated box for DBs and 18 SWG MS sheet box for out side 100 Amps, TP breaker, with door, hinges, lock, Amps meter, Volt meters, selector switches, LED indicating lamps, earth strips with 10 holes, neutral strips with 12 holes, backed powdered coating, water proof gasket, The work include all internal wiring with / 99.995 copper busbars, proper sized above mentioned approved PVC wires, at all DBs from TP breakers / Switches with standard copper termination of each breakers at all phases., wiring for volts /Amps meters, selectors, indicators etc, thus complete DB in all respect with DB body earthing with earth wire.. All breakers in all BBs will be Japanese Brand, Terasaki, Clipsal; MG, Schneider, Legrand. or equivalent

#	<b>Out Side Breaker / Switch</b>
	One 100 Amps TP , approved Brand main breaker will be installed outside for KESC / WAPDA, incoming power supply, including connection to breaker, outgoing three phase four wires approved brand 25mm <sup>2</sup> PVC cable from breaker to inside main DB breaker, with earthing of its above referred MS box.
<b>MAIN DB, Raw power, AC and power sockets</b>	
<u>11</u>	Main DB will be above referred specification but will have one 100 Amps Main Braker, one 60 Amps TP breaker for generator DB, through ATS / Change over, with 16 mm <sup>2</sup> TP wires. One SP 30Amps breakers will be for UPS and UPS DB. Beside above six 30 Amps and 6, 20 Amps breakers will be provided for ACs, and other power sockets This also include power to Emergency DB with 25mm <sup>2</sup> wires.
-	
12	<b>Emergency Power DB</b>
	This DB will also have all above referred specifications but with one 60 Amps TP incoming breaker and three 30 Amps, three 20 Amps and 9 , 15 Amps SP breakers for Acs, light and one two pole 30 Amps breaker for . UPS. Also 16 Amps SP line with earth from ups breaker to UPS through 30 Apm Clipsalor equivalent industrial sockets set, and from UPS to main incoming breaker of UPS DB . Further incoming supply to this Emergency DB will come from main DB and to change over switch and after it to from changeover to Emergency DB, with 16mm <sup>2</sup> TP approved wires.
11	<b>UPS DB</b>
	This DB will also be same specification but consist of one SP , two pole incoming breaker and 6, 10 Amps and 3, 15 Amps breakers and one two pole 15 Amps breaker for ATM. With 3x4mm wires till ATM power socket.
<b>13 Telephone system</b>	
1	Providing & wiring of each <b>Telephone</b> socket outlet in preinstalled outlet technology boxes, wired with 4 Pair Cat-6 (UTP)Cable, make 3M / PANDUIT USA / Clipsalor equivalent in 25mm dia PVC conduit recessed in slabs, floors, walls, columns or on slab above false ceiling or as required as per site conditions,, complete with all conduit & wiring accessories including RJ-12 IOs & Face Plates. Complete in all respect with suitable size 1.5mm thick sheet steel back box recessed in wall for other than technology box.
2	Providing & fixing 30 Pairs Telephone Tag Block (MDF) enclosed in 1.5mm thick sheet steel box with all fixing accessories.
<b>14 Networking / Computer data cabling</b>	



1	Providing, laying & testing of <b>Data Cable 4 Pair Cat -6 e</b> , , make 3M / PANDUIT USA/ clipsalor equivalent in 25 mm dia PVC conduit including Data Outlet (3M make) Face plate (2port) w/o shutter RJ-45 (Panduit USA)K6 Jack fixed, on 1.5 mm thick steel back box complete in all respect and as per darwing. and providing of Fluke Test Report & 3M's 20 Years Certificate (Complete as per Client's requirement )
2	Supply of machine made 3M Cat-6 Patch Cable (1m) with both end connectors
3	Supply of machine made 3M Cat-6 Drop Cable (3m) with both end connectors
4	<b>Providing of 9U, standard Data Cabinet. With 24 ports 3M patch panel,</b>
<b>15 Earthing</b>	
1	Providing, installation, commissioning and testing of two earthing pits (40 to 50 ft deep or upto water level ), back filling, ramming etc. complete with earth electrode 25mm dia and 1.5 meter long, as indicated in specification and drawings. Complete with cable clamps 38mm dia G.I. pipe and all accessories as per drawings. Each earth pit is to be provided with a concrete manhole 300 x 300 x 450(mm) deep with 225mm thick wall including cement mortar, internal plaster 1:4, with heavy duty C.I. cover including test clamp. Complete in all respect. Earthing bores shall be made at 6 to 8 feet away from foundation and distance between earth pits shall not be less than 10 feet.. Further connection of earth pit to Generator neutral point and all DBs with proper earth wire. In case where earth bore is not possible, due to hilly area, copper plate earth , having size 2'X2'X1/4", with two 10 SWG 25mm copper wires, tight on plates with brass nut / bolt, plate buried in 6 to 8 feet deep in earth. will be provided.
<b>AIRCONDITIONING / HVAC WORKS :</b>	
<b>S. No</b>	<b>DESCRIPTION</b>
17	Installation of Bank's supplied Split Air Conditioners (SAC) including USA or equivalent copper piping with installation & testing complete in all respects; including control wiring from outdoor unit to indoor with 2 x 1.5 mm.sq. + 1 x 1.5 mm.sq wire drawn in PVC 'D' class conduit clipped to wall or ceiling (wiring make Pakistan Cable, AGE or Pioneer or equivalent). The return and supply copper tubing to be sized as per manufacturer's recommendation and to be drawn in separate Aeroflex insulators or equivalent.
	Provide & fix UPVC pipe, Beta or popular , for AC drain system, (medium) conforming to BSS 1307 of 1957, along with GI fittings such as tees, elbows, unions, reducers, sockets, teflon tape for jointing, hangers, supports, sleeves, including testing and commissioning and insulation with Aeroflex insulation.
	i. 1-1/4" dia
	ii. 3/4" dia

18

**CERTIFICATION / DRAWINGS**

Following certification will be provided by the contractor, after completion of work/

1, Earth Pits Test Report ( Pit will be prepared in front of bank's representative)

2, Photos of steel of strong room, before casting required.

3, Electrical, networking as built drawing

4, Networking points test report

**Renovation of Chakwal Brach**

S.NO	COMPANY NAME	AMOUNT	PO NO	BANK NAME
1	Z.A Construction	300	00000559	Soneri Bank
<b>Total</b>			<b>300/-</b>	

**SINDH PUBLIC PROCUREMENT REGULATORY AUTHORITY**

**CONTRACT EVALUATION FORM**

**TO BE FILLED IN BY ALL PROCURING AGENCIES FOR PUBLIC CONTRACTS OF WORKS, SERVICES & GOODS**

- 1) NAME OF THE ORGANIZATION / DEPTT. SINDH BANK LIMITED/ADMINISTRATION
- 2) PROVINCIAL / LOCAL GOVT./ OTHER SCHEDULED BANK
- 3) TITLE OF CONTRACT Renovation of Chakwal Branch
- 4) TENDER NUMBER SNDB/COK/ADMIN/TD/617/2015
- 5) BRIEF DESCRIPTION OF CONTRACT Same as Above
- 6) FORUM THAT APPROVED THE SCHEME Competent Authority
- 7) TENDER ESTIMATED VALUE -
- 8) ENGINEER'S ESTIMATE (For civil works only) Rs. 1,824/- Per Sq.Ft
- 9) ESTIMATED COMPLETION PERIOD (AS PER CONTRACT) 45 Days
- 10) TENDER OPENED ON (DATE & TIME) 06/10/2015 At 1630 Hours
- 11) NUMBER OF TENDER DOCUMENTS SOLD 02  
(Attach list of buyers)
- 12) NUMBER OF BIDS RECEIVED \_\_\_\_\_
- 13) NUMBER OF BIDDERS PRESENT AT THE TIME OF OPENING OF BIDS 02
- 14) BID EVALUATION REPORT (Enclose a copy) 06/10/2015 (Attached)
- 15) NAME AND ADDRESS OF THE SUCCESSFUL BIDDER M/K... Construction, House No. 14-V, Faisal Town Sahawal.
- 16) CONTRACT AWARD PRICE Rs. 3,780,000/- (1,800/- Per Sq.Ft)
- 17) RANKING OF SUCCESSFUL BIDDER IN EVALUATION REPORT (i.e. 1<sup>st</sup>, 2<sup>nd</sup>, 3<sup>rd</sup> EVALUATION BID).  
M/s. Z. Hasan Enterprises  
M/s. Engineering Expert

18) METHOD OF PROCUREMENT USED : - (Tick one)

- a) SINGLE STAGE – ONE ENVELOPE PROCEDURE   Domestic/ Local
- b) SINGLE STAGE – TWO ENVELOPE PROCEDURE
- c) TWO STAGE BIDDING PROCEDURE
- d) TWO STAGE – TWO ENVELOPE BIDDING PROCEDURE

PLEASE SPECIFY IF ANY OTHER METHOD OF PROCUREMENT WAS ADOPTED i.e. EMERGENCY, DIRECT CONTRACTING ETC. WITH BRIEF REASONS:



31) ANY COMPLAINTS RECEIVED  
(If yes, result thereof)

Yes	
No	

32) ANY DEVIATION FROM SPECIFICATIONS GIVEN IN THE TENDER NOTICE / DOCUMENTS  
(If yes, give details)

Yes	
No	

33) WAS THE EXTENSION MADE IN RESPONSE TIME?  
(If yes, give reasons)

Yes	
No	

34) DEVIATION FROM QUALIFICATION CRITERIA  
(If yes, give details and reasons.)

Yes	
No	

35) WAS IT ASSURED BY THE PROCURING AGENCY THAT THE SELECTED FIRM IS NOT  
BLACK LISTED?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

36) WAS A VISIT MADE BY ANY OFFICER/OFFICIAL OF THE PROCURING AGENCY TO THE  
SUPPLIER'S PREMISES IN CONNECTION WITH THE PROCUREMENT? IF SO, DETAILS TO  
BE ASCERTAINED REGARDING FINANCING COMMITMENT, IF A ROAD:  
(If yes, enclose a copy)

Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

37) WERE PROPER SAFEGUARDS PROVIDED ON MOBILIZATION ADVANCE PAYMENT IN  
THE CONTRACT (BANK GUARANTEE ETC.)?

Yes	<input checked="" type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	-------------------------------------	----	-------------------------------------

38) SPECIAL CONDITIONS, IF ANY  
(If yes, give Brief Description)

Yes	
No	

39) Date of Award of Contract: ~~10/09/15~~ 9/11/15

Signature & Official Stamp of  
Authorized Officer

*Lt Col (R) Shahzad Begg*  
EYP/Head of Administration  
SINDH BANK LIMITED

**FOR OFFICE USE ONLY**

***SPPRA, Block. No.8, Sindh Secretariat No.4-A, Court Road, Karachi***  
Tele: 021-9205356; 021-9205369 & Fax: 021-9206291

Print

Save

Reset

<b>Bid Evaluation Report</b>		
<b>Evaluation Report- Renovation etc. Chakwal Branch</b>		
1	Name of Procuring Agency	Sindh Bank Ltd.
2	Tender Reference No.	SNDB/COK/ADMIN/TD/617/2015
3	Tender Description	Renovation etc.of Chakwal Branch
4	Method of Procurement	Single Stage One Envelop Bidding Procedure
5	Tender Published / SPPRA S.No	SPPRA S.No: 22847/2015 (Prequalification Notice) Express Tribune, Daily Express & Daily Ibrat (18 <sup>th</sup> February 2015) SPPRA S.No: 25307/2015 (17 <sup>th</sup> September 2015)
6	Total Bid Documents Sold	02
7	Total Bids Received	02
8	Technical/Financial Bid Opening Date & Time	06/10/2015 at 1630 Hrs
9	No. Of Bid qualified	02
10	Bid(s) Rejected	-


Detail on the above is as follows:-

S No	Name of Firm or Bidder	Cost offered by the Bidder (Area=2,100 sq.ft.)	Ranking in terms of cost	Comparison with Engineering Estimated cost (Rs.1,824 per sq.ft.)	Reasons for acceptance/rejection	Remarks
0	1	2	3	4	5	6
1.	M/s. Z.A Construction	Rs. 1,800 per sq.ft. Rs.3,780,000/-	1 <sup>st</sup> Lowest	Rs. 24/- below the estimated cost	Accepted -1 <sup>st</sup> Lowest Qualified Bidder	-
2.	M/s. Memar Associates	Rs. 2,000 per sq.ft. Rs.4,200,000/-	2 <sup>nd</sup> Lowest	Rs.176/- above the estimated cost	2 <sup>nd</sup> Lowest Qualified Bidder	-


Accordingly going by the eligibility criteria offered in the tender document, Serial No. 1 stands as only 1<sup>st</sup> Lowest Qualified Bidder.

**Members Signature- Procurement Committee**


Lt. Col. (R) Shahzad Begg  
Head of Administration



Mr. Saeed Jamal  
Chief Financial Officer



Mr. Syed Muhammad Aqeel  
Chief Manager, IDBL Karachi



**4 FINANCIAL PROPOSAL**

SIGNATURE MEMBERS/PC-ADMIN

Head - Fin Div. \_\_\_\_\_

Head - Admin Div. \_\_\_\_\_

Member-IDBL. \_\_\_\_\_

Date: \_\_\_\_\_

**PRICE SCHEDULE**

(Applicable for the year 2015-20)

Name of Bidder \_\_\_\_\_

Description	Unit	Rate per sq.ft	*Total Amount
Renovation, Interior, Works & Construction of CHAKWALBRANCH,	2100 sq.ft(Approx.) (As per specification mentioned in scope of work)	200/-	4,20,000/-

This \*total amount will be taken as the financial bid offered by the contractor.

**Note**

1. The branch has to be handed over within 45 days of issue date of award letter. In case of delay, a penalty @ 0.15% of total contract amount, for each day of delay will be imposed.
2. The cost must include all applicable taxes, stamp duty (as applicable under Stamp Act 1989) duly stamped on the contract agreement, installation, labor and any other charges.
3. No advance payment will be made, bills will only be processed for necessary payment on receipt of certificate of satisfaction from the Branch Manager/Project Manager.
4. **Calculation of bid security.** 2% of the \*Total Amount will be submitted with the tender document as bid security.
5. In case it is reviled at any stage after the completion of work that the asked specification of the tender have not been met, the amount of that specific item will be fined to the contractor with appropriate action as deemed necessary by the procurement committee.
6. In case of any observation arising in respect of quality of the item, the company will be liable to address it at his own cost, non-compliance of the same will result into initiation of a case against the company for non-commitment or cancellation of tender as will be decided by the Procurement Committee.
7. The per square ft. rate given above by the contractor will be for inside area of the premises. However for any outside premises work, its changes will be covered in premises per square ft. area. No charges for any necessary outside work will be entertained separately.
8. All terms and condition of Agreement (Annexure "H") are part of Tender Document.

Signature & Stamp of Bidder \_\_\_\_\_

**Memar Associates**  
48-A, Main Road, Block,  
Fahad Street, New Colony,  
No.2, Canal Road, Faisalabad



SIGNATURE MEMBERS PC-ADMIN

Head - Fin Div. \_\_\_\_\_

Head - Admin Div. \_\_\_\_\_

Member-IDBL \_\_\_\_\_

Date: \_\_\_\_\_

4 FINANCIAL PROPOSAL

**PRICE SCHEDULE**

(Applicable for the year 2015-2016)

Name of Bidder

Z.A. Construction


Description	Unit	Rate per sq.ft	*Total Amount
Renovation, Interior, Works & Construction of CHAKWALBRANCH,	2100 sq.ft(Aprox.) (As per specification mentioned in scope of work)	1800 P/sq.ft	3780000

This \*total amount will be taken as the financial bid offered by the contractor.

**Note**

- The branch has to be handed over within 45 days of issue date of award letter. In case of delay, a penalty @ 0.15% of total contract amount, for each day of delay will be imposed.
- The cost must include all applicable taxes, stamp duty (as applicable under Stamp Act 1989) duly stamped on the contract agreement, installation, labor and any other charges.
- No advance payment will be made, bills will only be processed for necessary payment on receipt of certificate of satisfaction from the Branch Manager/Project Manager.
- Calculation of bid security.** 2% of the \*Total Amount will be submitted with the tender document as bid security.
- In case it is revealed at any stage after the completion of work that the asked specification of the tender have not been met, the amount of that specific item will be fined to the contractor with appropriate action as deemed necessary by the procurement committee.
- In case of any observation arising in respect of quality of the item, the company will be liable to address it at his own cost, non-compliance of the same will result into initiation of a case against the company for non-commitment or cancellation of tender as will be decided by the Procurement Committee.
- The per square ft. rate given above by the contractor will be for inside area of the premises. However for any outside premises work, its changes will be covered in premises per square ft. area. No charges for any necessary outside work will be entertained separately.
- All terms and condition of Agreement (Annexure "H") are part of Tender Document.

Signature & Stamp of Bidder

  
Construction

**MINUTES OF THE OPENING OF THE TENDER (TECHNICAL /FINANCIAL PHASE)**

TYPE OF PROCUREMENT  ADMIN / IT / CONSULTANT / MEDIA  
TENDER NAME RAVATION ETC. CHAKUAL BR  
TYPE OF TENDER  SINGLE STAGE-ONE ENVELOPE / SINGLE STAGE-TWO ENVELOPE / TWO STAGE/TWO STAGE-TWO ENVELOPE  
OPENING DATE 6/10/15  
OPENING TIME 1630HRS

ATTENDANCE (MEMBER PC) Hofa  
CFO  
CHIEF MANAGER, IDBL

ATTENDANCE (REPS. OF BIDDERS)	NAME	FIRM
	<u>By...</u>	<u>M/S. Z.A CONSTRUCTION</u>
		<u>M/S. MANAAR ASSOCIATES</u>

TOT BIDS ACCEPTED FOR EVALUATION 02  
TOTAL BIDS REJECTED \_\_\_\_\_

REMARKS \_\_\_\_\_

SECRETARY PROCUREMENT COMMITTEE  
SIGNATURE [Signature]  
DATE 06/10/15

### **3 SCOPE OF WORK**

Sindh Bank Limited (SNDB) requires proposal from the Prequalified Contractors(SPPRA S.No. 22847) for Renovation etc. at Chakwal

For establishment of its new Branches, throughout the country and for renovation of Branches / offices, Sindh bank advised to pre-qualified contractors to submit their offer / bid, against tender, with following terms and conditions.

After thorough visit of desired premises, the contractor will submit per square feet rate of said work, complete in all respect, as per given tender, lay out plan, specification and brand / make.

However as per actual site condition and market availability, equivalent item can be provided with prior written approval from Bank, failing which the payment of such items will be deducted accordingly from the final bill.

**The salient works which are the part of requirement will be as under:**

1. Your given per sq. feet rates will be based only for area, inside the developed branch. However provision for entire works, given follows and mentioned in specification will be included in internal area's PSFT charges and no additional payment for any work, executed outside will be given. We will multiply your given PSFT rates with internal developed area and will get entire internal and outer works with in that cost.
2. The given PSFT rates will also include charges for approval of proposed lay out / construction, from respective town / Municipal Corporation, if any.
3. Comprehensive visit of site and submission of proposed lay out plan. The number of required counters , staff strength and requirement of lockers will be given by the bank.
4. Complete demolition of existing structure, necessary for establishment of new branch, including brick walls, RCC, slab, beam, floor, etc. and removal of debris.
5. New Block masonry / Brick masonry walls/ RCC slab / lintel for bath, stores, guard post, ATM room, and other works as per plan.
6. Floor tiling, approved design tiles, matching skirting, false ceiling complete in all respect.
7. Wash rooms and kitchen tiles, approved fixtures, approved pipes, fittings, ventilators, exhaust fans, complete in all respect.
8. All internal and external plaster works
9. All RCC works for Strong Room and lockers, and other, as per lay out and specifications
10. All internal and external paint and polishing works with approved quality paint.
11. Approved false ceiling with approved hanging system/ lights/ down lighters
12. Solid and skin pasted flush doors for baths, kitchen, store, and other place with best quality locks, handle, hinges, tower bolt, stoppers, complete in all respect, including beach wood solid frames, beadings, approved polishing as per lay out..

13. Two full height 3X7 feet wooden Almirah in store, kitchen cabinets, column cladding, complete in all respect.
14. Complete Electrical wiring for light points, power points, Air Conditioning units, ATM, sign Board, with PCL / Fast / AGE / Pioneer copper wires or equivalent of approved size, in approved PVC pipes, Boxes, switches, main lines, three DBs, one for UPS, other for AC and 3<sup>rd</sup> for lighting & power as per plan, with Change over switch. Two standard earth pits, as per approved specifications and lay out plans, along with all approved light fixture and fittings.
15. Technology box for each users with two Flat pins, one round pins, one RJ-45 for Data, one RJ-12 , I/O sockets for telephones, cat 6 cables from I/o to patch panel, telephone cat-6 cables from I/O to tag block, supply of 24 ports approved 3M or equivalent patch panel, one 15 u Cabinet, termination, necessary line cords and patch cords, with certification, 4additional data points for fax machine& time attendance machine, and also for manager & ops Manager, tagging / numbering at both ends, complete Electrical wiring, data and telephone works, in all respect.
16. Approved glass partitions for Manager room, ATM room, Entrance, fixed glazing, with approved glass, aluminium section, gasket, locks, D locks, handles, necessary frosting, Ajrak tiles film, Korean or equivalent door closer machines, necessary windows, doors, as per lay out plan.
17. Approved design grills for Entrance, all front and sides external windows , ATM internal door, Exit door, and Rolling shutters at all external glass doors, fixed glazing, ATM Entrance, MS approved Exit door, approved vertical blinds on all external glasses, windows ,fixing of vault and lockers doors.
18. All elevation works, elevation tiles, full granite steps for Entrance and ATM entrance, 35 degree Ramps, ATM , front landscaping, all front tough pavers, complete in all respect, as per lay out drawing & Design Book.
19. Approved copper piping for inverter AC, wiring, breakers, drain lines, fixing of outer units, complete in all respect

<b>CIVIL &amp; INTERIOR WORKS</b>
-----------------------------------

S No	DESCRIPTION
1	<b><u>DISMANTLING</u></b>
	<b>The demolition work will executed only after approval from HO.</b> Dismantling / removing of existing constructed structures, RCC, walls, slab, floor fixtures, tiles, ceiling, windows, doors, grills, shutters, wiring, piping, , partition, with proper tools & equipment's with all necessary precautionary measures, to make surface ready to receive finishes, stacking useable dismantled materials at designated place, as per new plan , as directed by bank., and disposal of surplus stuff / debris etc. away from site.
2	<b><u>REINFORCED CEMENT CONCRETE</u></b>
	Providing and laying, compacting finishing & curing etc. straight or curved cast- in place designed mix 1:2:4 Reinforced Cement Concrete using 1 Part of Ordinary Portland Cement or equivalent, 2 Parts of silt free local sand and 4 Parts of 3/4" thick downgraded crushed stone; mixed in a manner to achieve a cube strength of 3000 psi in 28 days, using 3/4" down crush stone & fine sand (free from silt & dust), including mechanical mixing, transporting, hoisting, lifting & placing at any height / depth, vibrating and curing etc. Complete in all respect including cost of Steel Reinforcement (3/8" dia deformed steel bars G-60 @ 6" C/C both ways, staggered double jaal in a manner that the alternate spacing b/w bars should not increase 3" C/C) & form work for Cement Concrete including cutting, bending, laying in position, making joint and fastening, removal of rust from bars, cost of binding wire and labor charges for binding of steel reinforcement: also includes cost of water tight form work and its removal. Complete in all respects, as per direction of Engineer.
a)	R.C.C. Walls (6" thick)
b)	R.C.C. Slab (6" thick) on grade
c)	R.C.C. Column
d)	Precast Lintels.
3	<b><u>C.C RAISED FLOORING (WITH CLAY POTS)</u></b>
	Provide and lay 1:3:6 concrete in sunken/ raised slabs to required levels washroom, kitchen or elsewhere specified. Mechanically vibrate, consolidate and cure etc. Complete in all respects and conforming to the requirements of drawings, specifications and to the entire satisfaction of the Architect./consultant.
4	<b><u>MASONRY WORK</u></b>
a)	<b><u>Brick Masonry</u></b>
	Providing and laying Brick masonry with first class solid burnt brick set in (1:4) cement sand mortar in super structure including scaffolding, curing, drilling for wall ties where brick work joins R.C.C columns, walls etc. Complete in all respects as per drawings and specifications to complete satisfaction of the consultant.

i	Internal walls 4.5" thick
ii	Internal walls 9" thick
iii	External walls 9" thick
	-
b)	<b><u>Block Masonry</u></b>
	Providing and Laying Solid Block Masonry set in Cement Sand Mortar 1:4 at any height including scaffolding curing and finishing etc. with appropriate 4', 6", 9", thickness.
5	<b><u>PLASTER WORK</u></b>
	Providing and laying plaster (thickness and Cement ratio as indicate in sub items below) with cement sand (CS) mortar on masonry and concrete surfaces, with G.I. expanded metal mesh at the interfaces / joints of structures of different materials, staging and curing, plaster stopper, corner beads, channels for making grooves and drip course etc., where required and/or as directed by the Architect / Engineer complete in all respect.
i)	1/2" thick plaster with 1:4 CS mortar on internal walls/ceiling
ii)	3/4" thick plaster with 1:3 CS mortar on external walls
	-
6	<b><u>PORCELAIN TILES ON FLOOR &amp; SKIRTING</u></b>
	Providing and laying glazed full body Porcelain of approved design, colour and pattern Tiles LV 04, Ivory , china or equivalent , setting in Stile dry bond (with cement), with matching color imported Grout. Complete in all respect, including curing, cleaning, finishing & hacking/chipping of existing surface for bonding where necessary, etc. as per specifications and/or as directed by the Architect / Engineer (at any elevation)
i)	On Floor : 24" x 24"
ii)	In Skirting : 4" x 24"
7	<b><u>P.C.C FLOORING</u></b>
	Providing and laying Plain Cement Concrete under floors in required panels (thickness and ratio as indicate in sub items below) including leveling, compacting, curing etc. including from work if required and its removal, using 1-1/2" downgraded crushed stone as coarse aggregate, approved local sand. Complete in all respects as per specifications and / or as directed by the Architect / Engineer
i)	P.C.C (1:4:8) 100mm thick.
ii)	P.C.C (1:2:4) 50mm thick, top made rough to receive floor finishes.
8	<b><u>CERAMIC TILES (TOILETS &amp; KITCHEN)</u></b>

	Provide and lay Ceramic Tiles (Matt or Glazed) of approved quality, beige / ivory colour Master tile, 9117 base color white with grey pigmentation Salt and pepper style for bathroom flooring and walls (Master Tile 12" x 12" LPF 28-108 for bath walls in light Beige color and Flooring Dark Beige LPF 14-106) for flooring / walls and in slope, if required, with 1:4 cement sand mortar of required thickness to achieve a minimum overall finished floor thickness of 2", setting the tiles with neat cement mortar, grouting the joints 1/4" with matching grout of approved supplier, curing, cleaning, finishing & hacking/chipping of existing surface for bonding where necessary, etc. complete in all respect.
i)	Ceramic Matt Tiles 12" x 12" (For Floors).
ii)	Ceramic Glazed Tiles 12" x 12" (On Walls).
9	<b><u>FALSE CELING</u></b>
a)	<b><u>Gypsum Board (24"X24")</u></b>
	Providing & laying 10 mm thick gypsum board False Ceiling, 24" x 24" Elephant Brand or approved equivalent (with aluminum foil at back) in straight, curved, tiles or multiple profiles, as shown on drawing section, fixed with imported powder coated aluminum, " T" & "L" section with GIG or CKM ceiling suspension system (grooved design, make DFB or equivalent UT/FUT series), having provisions for light and AC grill. Complete in all respect as per drawing and instruction of Bank's Engineer.
10	<b><u>SQUARE/RECTANGULAR COLUMNS CLADDING</u></b>
	Provide, make Cladding with 1/2" MDF board over treated partial wood framing horizontal and vertically over column from +2'-6" elevation up to false ceiling level as per drawing. Including all fittings polishing etc., complete in all respects. From 0' - 0" to 2'-6" Porcelain tile Spanish cladding or equivalent.
11	<b><u>WOODEN CABINETS</u></b>
a)	<b><u>Kitchen Cabinets</u></b>
	Provide and install in position wooden pantry cabinets, consisting of PARTIAL wood battens / framing, 3/4" thick chipboard 600 density shelf, partition and shutter, with beach wood lipping, MDF drawers with imported roller runners, hinges imported Japanese type or equivalent to show 1/4" groove in between, approved Fomite Formica finish on both sides of shutter, including all kind of best quality hardware's, spring hinges, SS handles, locks etc. Complete in all respects.
i)	Wall hanging cabinet 18" deep.
ii)	Wooden base cabinet 24" deep.
b)	<b><u>Full Height Cabinets (for Record Room) . / Store</u></b>

	<p>Providing and fabrication in position two full height cabinets in record room (3' wide &amp; 18" deep), consisting of 3/4" thick BEACH laminated board boxing with 3/4" thick beech wood Formica finished leaves. 1/4"x 3/4" solid Beech wood lipping with 1/2"x1" thick beech wood frame would be provided in front of boxes with clear lacquer polish. All fittings i.e. screws, bolts imported Italian hinges or equivalent, catchers, locks, handles and all other accessories are part of the job including anti-termite treatment etc. Complete in all respects. .</p>
12	<p><b><u>INTERNAL PAINT</u></b></p> <p>Provide and apply with Roller, Matt finish water based paint (ICI/Berger or equivalent) minimum three coats of approved shade over a coat of primer to internal plastered surfaces, base preparation consisting of rubbing with sand stone, filling the uneven surface with putty, rubbing with sand paper and preparation of smooth surface perfect in all respects. Complete in all respect as per specifications and/or as directed by the Architect/ Engineer.</p>
13	<p><b><u>WOODEN DOOR / FRAME / CHOWKAT / Beading</u></b></p> <p><b>DOOR FRAME:</b> Provide and fixing of termite treated solid beach wood door frames of required thickness including Lintels, hold fasts, where ever required, complete in all respect including polish with proper beach wood beading.</p> <p><b>SKIN DOORS D1-2'-6"x7'-0"</b>: (for Toilet/Kitchen) Provide and install doors consisting of best quality Malaysian skin, pressed over best quality treated partal framing, with approved quality of door locks, handle, tower bolt, hold fast, stopper, hardware and paint /polish, complete in all respect.</p> <p><b>PLY DOORS D2-3'-0"x7'-0"</b>: Providing and fixing 1 1/2" solid flush doors with polished of approved ply on both sides, viewing panel, Imported Yale lock, 4" hinges, hold fast, tower bolt, latches, stopper, &amp; all other necessary hardware, complete in all respect.</p>
14	<p><b><u>ALUMINUM WINDOWS / VENTILATOR</u></b></p> <p>Providing, fabricating and fixing in position heavy duty deluxe section approved color anodized aluminum local extruded Pak cable or equivalent (thickness of section 2mm minimum) or size using 4" wide section, 6 mm distortion free approved glass with gasket neoprene channels. Aluminum surfaces shall be anodized in approved color finish and shop protected including all accessories, fittings, rubber, seals, neoprene weather strips between frame and wall and frame edge trimming, gasket, screws, fly screen etc. and approval of the Consultants, complete in all respect, as per drawing / required size.</p>



15	<b><u>GLASS DOOR</u></b>
	Providing, fabrication & fixing 12 mm thick glass door with top & bottom locking system, 4" Aluminum D-48 by Lucky or equivalent Pak Cable section, with 12mm thick Middle East / Saudi Arabia or equivalent clear glass with frost film and Bank's monogram, Approved Ajrak film, with gasket size and shape as shown on drawing, including bolts, D lock, nuts, screws aluminum channel, handle, floor machine (New Star Japan or Koreanor equivalent), locks etc. Complete in all respects as directed by Engineer.
16	<b><u>INSTALLATION OF VAULT / LOCKER ROOM DOOR</u></b>
	Lifting & Fixing charges of Bank's supplied Vault / Locker Doors , welding of door frame with RCC MS bars, and to facilitate the Vendors. Complete in all respects.
17	<b><u>ALUMINUM SECTION &amp; FRONT GLAZING</u></b>
	Provide and install 4" Deluxe section D 48 of LUCKY or equivalent fixed aluminum glazing for elevation with hinged panels including latches, rollers, rubber gaskets all necessary hard ware and fittings, application of silicone for joints including approved 8 mm thick imported clear glass(KSA OR GHANI or equivalent) glass with complete as per drawing and as directed by the Architect.(Recommended Manufacturer: Pakistan cables OR Lucky)
	Complete in all respects ( <u>at front</u> )
18	<b><u>ALUMINUM COMPOSITE PANEL</u></b>
	Fabricating, providing and installation of 4 mm Aluminum Composite Panels for Cladding (at any level), make DADEX, ECL, Alpolic or approved equivalent, consisting of heavy duty deluxe anodized frame with 2mm base thickness, including designing, cutting, panel making, scaffolding etc. Complete with substructure, as per drawings provided or as directed by the Architect (B.P 350/- SQ.FT)
19	<b><u>GLASS PARTITION</u></b>
	Providing and installation 12mm thick glass KSA/UAEor equivalent polished glass with 100mm top & bottom rails, brush finish SS-304, lucky or equivalent Pak Cable section with frosted film surface as per approved design. Contractor is required to provide joints between the panels with minimum 5mm thick clear silicon from Dow corning or other approved by the Engineer. Complete in all respects. ( <u>in Manager and IT Rooms</u> ).
20	<b><u>WINDOW BLINDS</u></b>

	Provide and install imported VERTICAL Blinds, in imported synthetic fabric (5" wide) with suspension mechanism, approved shade & colour ( Light grey ). Complete in all respect at all outside glasses.
<b>21</b>	<b><u>SECURITY GRILLS</u></b>
	<b>Wrought Iron Grills for windows, Generator, AC outers,</b>
	This security grills will be provided at all external windows, ventilators., inside the fixed entrance glazing, geill door inside the entrance door, Providing and Fixing M.S Security Grills to windows, comprising of 1/2" square bars @ 6" c/c 1"x1-1/2" MS pipe 16 gauge, welding, grinding, finishing, rubbing 3 coat of enamel paint (ICI,NIPPON,BERGER or equivalent) red oxide before paint. Complete in all respects, as per standardized design and /or as shown in drawing., as per approved design, attached herewith. Further proper lockable grills with abiove specification will also be provided for Generator and all AC out door units.
<b>22</b>	<b><u>SECURITY ROLLING SHUTTER</u></b>
	Providing and fixing Mild Steel Rolling Security Shutter at front main entrance door , before glass doors, ATM Room's door, outside windows, made of 20 s.w.guage GI sheet, guide channels 10 gauge MS sheet and Roll-up durable mechanism (Spring & MS Bar etc.). with 2.5" Dia box, consisting of steel frame of M.S. channel 2"x1.25"x1" (50x30x3 mm) angle iron 1.5"x1.5"x1" (40x30x3mm)M.S plate 1"x1"xa" (300x300x3 mm) G.I. pipe 1.5" (37mm) Ø, springs 2'(600mm) c/c. Rollers 24 S.W.G G.I. Covering 1'x1' (300x300 mm) with S. Steel sheet 18 S.W.G, handles, holdfast, etc. center of the roller sheet to be in chicken foldable type window / mesh ( 6" X 12" can be covered with sliding panel, from inside ) for looking outside, vertical removable channel. Complete with sliding bolts handles including 3 coats of enamel paint (ICI or equivalent) including base coat of anti-rust primer, Complete in all respects, including all types of hardware etc. as per satisfaction of the consultant and engineer incharge. as per attached layout .
<b>23</b>	<b><u>SECURITY DOORS</u></b>
i)	<b><u>Security Grill Door</u></b>
	Providing and fixing the MS enamel painted security grill door panel of 3/4" MS square solid bars @ 4" c/c both ways welded with 1-1/2"x3/16" MS flat Frame and covered with MS Sheet 14 gauge, with all locks, including all necessary fittings. Complete in all respectat main entrance . Thus at entrance, inside will be security grill, the glass will be in centre and rolling shutter will be outside.
<b>24</b>	<b><u>EMERGENCY EXIT M.S DOOR</u></b>

	Fabricating, providing and fixing fire exit door with 16 S.W.G M.S 3/4" square pipe, 18 SWG MS sheet pressed over this frame, at both sides, sheet frame painted with approved deco colour including 16 S.W.G M.S sheet shutter framed in 4" x 3" M.S box section, including best quality hinges, locks, handles, hold fasts and other necessary hardware etc. size as per site. Complete in all respects as per drawing attached herewith, , specifications and as directed by the Bank.
25	<b><u>GRANITE (BLACK GRANITE)</u></b>
	Provide and laying 3/4" thick factory polished granite door/window Sills, Thresholds and Borders, Steps for internal stair case, main entrance steps, ATM entrance, plinth protection, thresholds, straight and curve as per site requirement, single piece, as directed by client, fixed 1:2 cement and mortar, color chemical grout including final rubbing finishing and polishing bull nosing carborandom grove where required etc. complete with all respect.
26	<b>ROOF TREATMENT:</b> Provision of Roof Screaming, minimum width of 2", for maintaining slope using 6mm crush chips of ratio 1:2:4 at roof including curing and fixing of Drain Pipe wherever required, complete in all respect., only where necessary .
27	<b>WATER PROOFING:</b> Provision of Roof treatment to be provided as per specifications and site condition in order to stop seepage of water wherever required, ONLY WHERE NECESSARY.
29	<b><u>INTERLOCK PAVERS</u></b>
	Providing & laying 60mm thick interlock pavers of approved design and shape natural colours, having strength b/w 7000 psi to 8500 psi i/c filling the joints with sand, for parking area laid over 3" thick layer (compacted) of approved course sand with leveling & dressing. Complete in all respects or as directed by the Engineer.(make Tuff/Envicrete/HUBCERETE or equivalent) . This pavers will be installed up to 12 feet width, from the edge of Branch .
31	<b><u>EXTERNAL PAINT</u></b>
	Provide and apply with Roller Matt Enamel paint WEATHER SHEILD (ICI/Berger or equivalent) minimum three coats of approved shade over a coat of primer to internal plastered surfaces, base preparation, primer, smooth filling etc. complete in all respect as shown on the drawings specifications and/or as directed by the Architect/ Engineer.

<b>32</b>	<b>ATM ROOM</b>
	Establishment of ATM room, having an average size of 5X7, suitable for free standing, front loaded ATM machine , The all walls of ATM room will be till the height of ceiling, with proper high strength machine made Block masonry, and or proper security grill. One telephone point and one Data point and one 15Amps power point for ATM machine, power point for one ton AC, with gas copper pipes and drain will also provided .will be provided in ATM room . Tiles and ceiling as per branch specification will be provided. The ATM power socket, data outlet face plate, telephone out let, will be other side of ATM room's wall and one 2 inches dia pipe will be provided in wall for wiring / leads. . The data point will be terminated in Patch panel and power point and light of ATM room will be connected to UPS. power . The earth point of ATM socket will be solidly connected with earth pit.
<b>33</b>	<b>ATM MAIN and INTERNAL DOORS</b>
	The main entrance door of ATM will be standard above specified glass door, 2- 1/2 feet wide, with proper lock, inside best quality D lock, handle and new star machine, with 1/2 inches above specified glass with frost and Ajrak film, and monogram. Further Security rolling shutter, specified above, will also be provided before entrance of ATM, This also include internal door . its installation, with MS, 16 SWG, 3/4"x3/4" square pipe grill,, 8" center to center distance, both ways, inside ATM room, 16 SWG GI sheet fitted over grill from atm room side and 3mm ply fixed from branch side. with lock, handles, polishing & finishing and making peep window 8" x 2" at a height of 5'-0 from floor level., this also include 16 SWG sheet made door frame, suitable to cater the weight of door, with hinges, holdfast, Complete in all respects or as directed by the Architect
<b>33-</b>	<b>MORCHA</b>
<b>a</b>	Providing of block Masonary 3 X 4, feet minimum inside, morcha in proper shape, totally covered from all four sides with 2 feet door 9 Exit door Specification ), inside lock, 3X6 inches inspection opening at proper height, 12 inches raised floor, stole, fan, paint, complete in all respect.
<b>34</b>	<b>ATM ACCESS RAMP FOR DISABLE PERSON</b>
	A three feet wide CC ramp, at 30 degree, will be provided for disable person. Wherever possible.
<b>35</b>	<b>Front Elevation</b>

The front elevation of the Branch will consist of proper CC steps, fixed on it approved granite . The portion other than window and door will consist of Bank's approved AJRAK tiles, aluminum composite panel, approved elevation ceramic tiles, as directed by the Bank's Engineer, plan. and other approved face tiles, with approved pattern .

**PLUMBING WORKS**

S. No	DESCRIPTION
1(a)	Providing and fixing / making of complete kitchen fittings, bath rooms fittings with all necessary best quality and proper sized upvc water pipes, best quality fitting, 3 inches and or 4 inches best quality Dadexor equivalent UPVC pipes, gasket type fittings, trap, joints, waist best pipes with best SS trap covers, European type ceramics ware coupled water closet, (PORTA) or equivalent, white / Ivory /light colour, model HD-180 , including 3 gallons cistern, P/S trap, C.P tee stop cock with wall cups, connection pipes, “ hinged double bacolite seat and cover , muslim shower, all joints to services and drains, plugging and screwing as necessary to the structure and make good the same, complete in all respect as per specifications and drawings.. All pipes and pvc fittings will be dadex or equivalent, all other / fittings/ fixtures will be master / Sonex/ Grohe China or equivalent, <u>plastic coated</u> , and In case where there are two bath room, in other bath room, Indian type or equivalent, Porta WC, model HDD-9, ivory colour with all porta/ Master fittings will be fixed.
2	Providing and fixing Wash hand Basin with pedastle, PORTA or equivalent model HD-19, Ivory colour /white colour “SONEX” waste coupling, plug with C.P brass chain, 1.5” dia. P.V.C ( D type) waste pipe connections to water lines, tee stop cock for cold and hot water inlet connector with nuts and fitting, waste pipe waste coupling , plugs with chain other ancillary material C.P grating including C.P bottle trap, testing etc. complete in all respect and as directed by the Engineer.
3	Provide & fix best quality Stainless Steel imported Kitchen Sink, Balraco or equivalent make (40" x 20") 1000mm x 500mm sink with C1 or WI brackets 150mm (6") built in wall, 40mm(1 1/2") rubber plug & chrome plated brass chain, 40mm (1 1/2") C.P brass waste, pillar tap 2 way deluxe, 40 mm (1 1/2") dial malleable iron or C.P. brass trap, Bottle trap and unions. Make requisite holes in walls & floor for pipe connections & make good with approved material. (with SONEX or equivalent fittings).

31) ANY COMPLAINTS RECEIVED  
(If yes, result thereof)

Yes	
No	

32) ANY DEVIATION FROM SPECIFICATIONS GIVEN IN THE TENDER NOTICE / DOCUMENTS  
(If yes, give details)

Yes	
No	

33) WAS THE EXTENSION MADE IN RESPONSE TIME?  
(If yes, give reasons)

Yes	
No	

34) DEVIATION FROM QUALIFICATION CRITERIA  
(If yes, give details and reasons.)

Yes	
No	

35) WAS IT ASSURED BY THE PROCURING AGENCY THAT THE SELECTED FIRM IS NOT BLACK LISTED?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

36) WAS A VISIT MADE BY ANY OFFICER/OFFICIAL OF THE PROCURING AGENCY TO THE SUPPLIER'S PREMISES IN CONNECTION WITH THE PROCUREMENT? IF SO, DETAILS TO BE ASCERTAINED REGARDING FINANCING ARRANGEMENT, IF A ROAD:  
(If yes, enclose a copy)

Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

37) WERE PROPER SAFEGUARDS PROVIDED ON MOBILIZATION ADVANCE PAYMENT IN THE CONTRACT (BANK GUARANTEE ETC.)?

Yes	<input checked="" type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	-------------------------------------	----	-------------------------------------

38) SPECIAL CONDITIONS, IF ANY  
(If yes, give Brief Description)

Yes	
No	

39) Date of Award of Contract: ~~10/09/15~~ 9/11/15

Signature & Official Stamp of  
Authorized Officer

*Lt Col (R) Shahzad Begg*  
EYP/Head of Administration  
SINDH BANK LIMITED

**FOR OFFICE USE ONLY**

**SPPRA, Block. No.8, Sindh Secretariat No.4-A, Court Road, Karachi**  
Tele: 021-9205356; 021-9205369 & Fax: 021-9206291

Print

Save

Reset

<b>Bid Evaluation Report</b>		
<b>Evaluation Report- Renovation etc. Chakwal Branch</b>		
1	Name of Procuring Agency	Sindh Bank Ltd.
2	Tender Reference No.	SNDB/COK/ADMIN/TD/617/2015
3	Tender Description	Renovation etc. of Chakwal Branch
4	Method of Procurement	Single Stage One Envelop Bidding Procedure
5	Tender Published / SPPRA S.No	SPPRA S.No: 22847/2015 (Prequalification Notice) Express Tribune, Daily Express & Daily Ibrat (18 <sup>th</sup> February 2015) SPPRA S.No: 25307/2015 (17 <sup>th</sup> September 2015)
6	Total Bid Documents Sold	02
7	Total Bids Received	02
8	Technical/Financial Bid Opening Date & Time	06/10/2015 at 1630 Hrs
9	No. Of Bid qualified	02
10	Bid(s) Rejected	-


Detail on the above is as follows:-

S No	Name of Firm or Bidder	Cost offered by the Bidder (Area=2,100 sq.ft.)	Ranking in terms of cost	Comparison with Engineering Estimated cost (Rs. 1,824 per sq.ft.)	Reasons for acceptance/ rejection	Remarks
0	1	2	3	4	5	6
1.	M/s. Z.A Construction	Rs. 1,800 per sq.ft. Rs.3,780,000/-	1 <sup>st</sup> Lowest	Rs. 24/- below the estimated cost	Accepted -1 <sup>st</sup> Lowest Qualified Bidder	-
2.	M/s. Memar Associates	Rs. 2,000 per sq.ft. Rs.4,200,000/-	2 <sup>nd</sup> Lowest	Rs. 176/- above the estimated cost	2 <sup>nd</sup> Lowest Qualified Bidder	-


Accordingly going by the eligibility criteria offered in the tender document, Serial No.1 stands as only 1<sup>st</sup> Lowest Qualified Bidder.

**Members Signature- Procurement Committee**

Lt. Col. (R) Shahzad Begg  
Head of Administration



Mr. Saeed Jamal  
Chief Financial Officer



Mr. Syed Muhammad Aqeel  
Chief Manager, IDBL Karachi



4 FINANCIAL PROPOSAL

SIGNATURE MEMBERS PC-ADMIN

Head - Fin Div. \_\_\_\_\_

Head - Admin Div. \_\_\_\_\_

Member-IDBL. \_\_\_\_\_

Date: \_\_\_\_\_

**PRICE SCHEDULE**

(Applicable for the year 2015-2016)

Name of Bidder \_\_\_\_\_

Description	Unit	Rate per sq.ft	*Total Amount
Renovation, Interior, Works & Construction of CHAKWALBRANCH,	2100 sq.ft.(Approx.) (As per specification mentioned in scope of work)	2000/-	4,200,000/-

This \*total amount will be taken as the financial bid offered by the contractor.

**Note**

1. The branch has to be handed over within 45 days of issue date of award letter. In case of delay, a penalty @ 0.15% of total contract amount, for each day of delay will be imposed.
2. The cost must include all applicable taxes, stamp duty (as applicable under Stamp Act 1989) duly stamped on the contract agreement, installation, labor and any other charges.
3. No advance payment will be made, bills will only be processed for necessary payment on receipt of certificate of satisfaction from the Branch Manager/Project Manager.
4. **Calculation of bid security.** 2% of the \*Total Amount will be submitted with the tender document as bid security.
5. In case it is reviled at any stage after the completion of work that the asked specification of the tender have not been met, the amount of that specific item will be fined to the contractor with appropriate action as deemed necessary by the procurement committee.
6. In case of any observation arising in respect of quality of the item, the company will be liable to address it at his own cost, non-compliance of the same will result into initiation of a case against the company for non-commitment or cancellation of tender as will be decided by the Procurement Committee.
7. The per square ft. rate given above by the contractor will be for inside area of the premises. However for any outside premises work, its changes will be covered in premises per square ft. area. No charges for any necessary outside work will be entertained separately.
8. All terms and condition of Agreement (Annexure "H") are part of Tender Document.

Signature & Stamp of Bidder \_\_\_\_\_

**Memar Associates**  
48-A, 1st Floor, Block,  
Fahad Street, Faisal Colony,  
No.2, Canal Road, Faisalabad



SIGNATURE MEMBERS PC-ADMIN

Head - Fin Div. 205/109

Head - Admin Div. \_\_\_\_\_

Member-IDBL. \_\_\_\_\_

Date: \_\_\_\_\_

4 FINANCIAL PROPOSAL

**PRICE SCHEDULE**

(Applicable for the year 2015-2016)

Name of Bidder Z.A. Construction


Description	Unit	Rate per sq.ft	*Total Amount
Renovation, Interior, Works & Construction of CHAKWALBRANCH,	2100 sq.ft(Approx.) (As per specification mentioned in scope of work)	1800/ft	3780000

This \*total amount will be taken as the financial bid offered by the contractor.

**Note**

- The branch has to be handed over within 45 days of issue date of award letter. In case of delay, a penalty @ 0.15% of total contract amount, for each day of delay will be imposed.
- The cost must include all applicable taxes, stamp duty (as applicable under Stamp Act 1989) duly stamped on the contract agreement, installation, labor and any other charges.
- No advance payment will be made, bills will only be processed for necessary payment on receipt of certificate of satisfaction from the Branch Manager/Project Manager.
- Calculation of bid security.** 2% of the \*Total Amount will be submitted with the tender document as bid security.
- In case it is revealed at any stage after the completion of work that the asked specification of the tender have not been met, the amount of that specific item will be fined to the contractor with appropriate action as deemed necessary by the procurement committee.
- In case of any observation arising in respect of quality of the item, the company will be liable to address it at his own cost, non-compliance of the same will result into initiation of a case against the company for non-commitment or cancellation of tender as will be decided by the Procurement Committee.
- The per square ft. rate given above by the contractor will be for inside area of the premises. However for any outside premises work, its changes will be covered in premises per square ft. area. No charges for any necessary outside work will be entertained separately.
- All terms and condition of Agreement (Annexure "H") are part of Tender Document.

Signature & Stamp of Bidder

  
Construction

**MINUTES OF THE OPENING OF THE TENDER (TECHNICAL /FINANCIAL PHASE)**

TYPE OF PROCUREMENT  ADMIN / IT / CONSULTANT / MEDIA  
TENDER NAME RAVATION ETC. CHAKUAL BR  
TYPE OF TENDER  SINGLE STAGE-ONE ENVELOPE / SINGLE STAGE-TWO ENVELOPE / TWO STAGE / TWO STAGE-TWO ENVELOPE  
OPENING DATE 6/10/15  
OPENING TIME 1630HRS

ATTENDANCE (MEMBER PC) HQA  
CFO  
CHIEF MANAGER, IDBL

ATTENDANCE (REPS. OF BIDDERS)	NAME	FIRM
	<u>Byd...</u>	<u>M/S. Z.A. CONSTRUCTION</u>
		<u>M/S. MANGAR S ASSOCIATES</u>

TOTAL BIDS ACCEPTED FOR EVALUATION 02  
TOTAL BIDS REJECTED \_\_\_\_\_

REMARKS \_\_\_\_\_

SECRETARY PROCUREMENT COMMITTEE  
SIGNATURE [Signature]  
DATE 06/10/15

### 3 SCOPE OF WORK

Sindh Bank Limited (SNDB) requires proposal from the Prequalified Contractors(SPPRA S.No. 22847) for Renovation etc. at Chakwal

For establishment of its new Branches, throughout the country and for renovation of Branches / offices, Sindh bank advised to pre-qualified contractors to submit their offer / bid, against tender, with following terms and conditions.

After thorough visit of desired premises, the contractor will submit per square feet rate of said work, complete in all respect, as per given tender, lay out plan, specification and brand / make.

However as per actual site condition and market availability, equivalent item can be provided with prior written approval from Bank, failing which the payment of such items will be deducted accordingly from the final bill.

**The salient works which are the part of requirement will be as under:**

1. Your given per sq. feet rates will be based only for area, inside the developed branch. However provision for entire works, given follows and mentioned in specification will be included in internal area's PSFT charges and no additional payment for any work, executed outside will be given. We will multiply your given PSFT rates with internal developed area and will get entire internal and outer works with in that cost.
2. The given PSFT rates will also include charges for approval of proposed lay out / construction, from respective town / Municipal Corporation, if any.
3. Comprehensive visit of site and submission of proposed lay out plan. The number of required counters , staff strength and requirement of lockers will be given by the bank.
4. Complete demolition of existing structure, necessary for establishment of new branch, including brick walls, RCC, slab, beam, floor, etc. and removal of debris.
5. New Block masonry / Brick masonry walls/ RCC slab / lintel for bath, stores, guard post, ATM room, and other works as per plan.
6. Floor tiling, approved design tiles, matching skirting, false ceiling complete in all respect.
7. Wash rooms and kitchen tiles, approved fixtures, approved pipes, fittings, ventilators, exhaust fans, complete in all respect.
8. All internal and external plaster works
9. All RCC works for Strong Room and lockers, and other, as per lay out and specifications
10. All internal and external paint and polishing works with approved quality paint.
11. Approved false ceiling with approved hanging system/ lights/ down lighters
12. Solid and skin pasted flush doors for baths, kitchen, store, and other place with best quality locks, handle, hinges, tower bolt, stoppers, complete in all respect, including beach wood solid frames, beadings, approved polishing as per lay out.

13. Two full height 3X7 feet wooden Almirah in store, kitchen cabinets, column cladding, complete in all respect.
14. Complete Electrical wiring for light points, power points, Air Conditioning units, ATM, sign Board, with PCL / Fast / AGE / Pioneer copper wires or equivalent of approved size, in approved PVC pipes, Boxes, switches, main lines, three DBs, one for UPS, other for AC and 3<sup>rd</sup> for lighting & power as per plan, with Change over switch. Two standard earth pits, as per approved specifications and lay out plans, along with all approved light fixture and fittings.
15. Technology box for each users with two Flat pins, one round pins, one RJ-45 for Data, one RJ-12 , I/O sockets for telephones, cat 6 cables from I/o to patch panel, telephone cat-6 cables from I/O to tag block, supply of 24 ports approved 3M or equivalent patch panel, one 15 u Cabinet, termination, necessary line cords and patch cords, with certification, 4additional data points for fax machine& time attendance machine, and also for manager & ops Manager, tagging / numbering at both ends, complete Electrical wiring, data and telephone works, in all respect.
16. Approved glass partitions for Manager room, ATM room, Entrance, fixed glazing, with approved glass, aluminium section, gasket, locks, D locks, handles, necessary frosting, Ajrak tiles film, Korean or equivalent door closer machines, necessary windows, doors, as per lay out plan.
17. Approved design grills for Entrance, all front and sides external windows , ATM internal door, Exit door, and Rolling shutters at all external glass doors, fixed glazing, ATM Entrance, MS approved Exit door, approved vertical blinds on all external glasses, windows ,fixing of vault and lockers doors.
18. All elevation works, elevation tiles, full granite steps for Entrance and ATM entrance, 35 degree Ramps, ATM , front landscaping, all front tough pavers, complete in all respect, as per lay out drawing & Design Book.
19. Approved copper piping for inverter AC, wiring, breakers, drain lines, fixing of outer units, complete in all respect

<b>CIVIL &amp; INTERIOR WORKS</b>
-----------------------------------

S No	DESCRIPTION
1	<b><u>DISMANTLING</u></b>
	<u>The demolition work will executed only after approval from HO.</u> Dismantling / removing of existing constructed structures, RCC, walls, slab, floor fixtures, tiles, ceiling, windows, doors, grills, shutters, wiring, piping, , partition, with proper tools & equipment's with all necessary precautionary measures, to make surface ready to receive finishes, stacking useable dismantled materials at designated place, as per new plan , as directed by bank., and disposal of surplus stuff / debris etc. away from site.
2	<b><u>REINFORCED CEMENT CONCRETE</u></b>
	Providing and laying, compacting finishing & curing etc. straight or curved cast- in place designed mix 1:2:4 Reinforced Cement Concrete using 1 Part of Ordinary Portland Cementor equivalent, 2 Parts of silt free local sand and 4 Parts of 3/4" thick downgraded crushed stone; mixed in a manner to achieve a cube strength of 3000 psi in 28 days, using 3/4" down crush stone & fine sand (free from silt & dust), including mechanical mixing, transporting, hoisting, lifting & placing at any height / depth, vibrating and curing etc. Complete in all respect including cost of Steel Reinforcement (3/8" dia deformed steel bars G-60 @ 6" C/C both ways, staggered double jaal in a manner that the alternate spacing b/w bars should not increase 3" C/C) & form work for Cement Concrete including cutting, bending, laying in position, making joint and fastening, removal of rust from bars, cost of binding wire and labor charges for binding of steel reinforcement: also includes cost of water tight form work and its removal. Complete in all respects, as per direction of Engineer.
	a) R.C.C. Walls (6" thick)
	b) R.C.C. Slab (6" thick) on grade
	c) R.C.C. Column
	d) Precast Lintels.
3	<b><u>C.C RAISED FLOORING (WITH CLAY POTS)</u></b>
	Provide and lay 1:3:6 concrete in sunken/ raised slabs to required levels washroom, kitchen or elsewhere specified. Mechanically vibrate, consolidate and cure etc. Complete in all respects and conforming to the requirements of drawings, specifications and to the entire satisfaction of the Architect./consultant.
4	<b><u>MASONRY WORK</u></b>
	a) <b><u>Brick Masonry</u></b>
	Providing and laying Brick masonry with first class solid burnt brick set in (1:4) cement sand mortar in super structure including scaffolding, curing, drilling for wall ties where brick work joins R.C.C columns, walls etc. Complete in all respects as per drawings and specifications to complete satisfaction of the consultant.

i	Internal walls 4.5" thick
ii	Internal walls 9" thick
iii	External walls 9" thick
	-
b)	<b>Block Masonry</b>
	Providing and Laying Solid Block Masonry set in Cement Sand Mortar 1:4 at any height including scaffolding curing and finishing etc. with appropriate 4', 6", 9", thickness.
5	<b>PLASTER WORK</b>
	Providing and laying plaster (thickness and Cement ratio as indicate in sub items below) with cement sand (CS) mortar on masonry and concrete surfaces, with G.I. expanded metal mesh at the interfaces / joints of structures of different materials, staging and curing, plaster stopper, corner beads, channels for making grooves and drip course etc., where required and/or as directed by the Architect / Engineer complete in all respect.
i)	1/2" thick plaster with 1:4 CS mortar on internal walls/ceiling
ii)	3/4" thick plaster with 1:3 CS mortar on external walls
	-
6	<b>PORCELAIN TILES ON FLOOR &amp; SKIRTING</b>
	Providing and laying glazed full body Porcelain of approved design, colour and pattern Tiles LV 04, Ivory , china or equivalent , setting in Stile dry bond (with cement), with matching color imported Grout. Complete in all respect, including curing, cleaning, finishing & hacking/chipping of existing surface for bonding where necessary, etc. as per specifications and/or as directed by the Architect / Engineer (at any elevation)
i)	On Floor : 24" x 24"
ii)	In Skirting : 4" x 24"
7	<b>P.C.C FLOORING</b>
	Providing and laying Plain Cement Concrete under floors in required panels (thickness and ratio as indicate in sub items below) including leveling, compacting, curing etc. including from work if required and its removal, using 1-1/2" downgraded crushed stone as coarse aggregate, approved local sand. Complete in all respects as per specifications and / or as directed by the Architect / Engineer
i)	P.C.C (1:4:8)100mm thick.
ii)	P.C.C (1:2:4) 50mm thick, top made rough to receive floor finishes.
8	<b>CERAMIC TILES (TOILETS &amp; KITCHEN)</b>

	Provide and lay Ceramic Tiles (Matt or Glazed) of approved quality, beige / ivory colour Master tile, 9117 base color white with grey pigmentation Salt and pepper style for bathroom flooring and walls (Master Tile 12" x 12" LPF 28-108 for bath walls in light Beige color and Flooring Dark Beige LPF 14-106) for flooring / walls and in slope, if required, with 1:4 cement sand mortar of required thickness to achieve a minimum overall finished floor thickness of 2", setting the tiles with neat cement mortar, grouting the joints 1/4" with matching grout of approved supplier, curing, cleaning, finishing & hacking/chipping of existing surface for bonding where necessary, etc. complete in all respect.
i)	Ceramic Matt Tiles 12" x 12" (For Floors).
ii)	Ceramic Glazed Tiles 12" x 12" (On Walls).
9	<b><u>FALSE CELING</u></b>
a)	<b><u>Gypsum Board (24"X24")</u></b>
	Providing & laying 10 mm thick gypsum board False Ceiling, 24" x 24" Elephant Brand or approved equivalent (with aluminum foil at back) in straight, curved, tiles or multiple profiles, as shown on drawing section, fixed with imported powder coated aluminum, " T" & "L" section with GIG or CKM ceiling suspension system (grooved design, make DFB or equivalent UT/FUT series), having provisions for light and AC grill. Complete in all respect as per drawing and instruction of Bank's Engineer.
10	<b><u>SQUARE/RECTANGULAR COLUMNS CLADDING</u></b>
	Provide, make Cladding with 1/2" MDF board over treated partial wood framing horizontal and vertically over column from +2'-6" elevation up to false ceiling level as per drawing. Including all fittings polishing etc., complete in all respects. From 0' - 0" to 2'-6" Porcelain tile Spanish cladding or equivalent.
11	<b><u>WOODEN CABINETS</u></b>
a)	<b><u>Kitchen Cabinets</u></b>
	Provide and install in position wooden pantry cabinets, consisting of PARTIAL wood battens / framing, 3/4" thick chipboard 600 density shelf, partition and shutter, with beach wood lipping, MDF drawers with imported roller runners, hinges imported Japanese type or equivalent to show 1/4" groove in between, approved Fomite Formica finish on both sides of shutter, including all kind of best quality hardware's, spring hinges, SS handles, locks etc. Complete in all respects.
i)	Wall hanging cabinet 18" deep.
ii)	Wooden base cabinet 24" deep.
b)	<b><u>Full Height Cabinets (for Record Room) . / Store</u></b>

	<p>Providing and fabrication in position two full height cabinets in record room (3' wide &amp; 18" deep), consisting of 3/4" thick BEACH laminated board boxing with 3/4" thick beech wood Formica finished leaves. 1/4"x 3/4" solid Beech wood lipping with 1/2"x1" thick beech wood frame would be provided in front of boxes with clear lacquer polish. All fittings i.e. screws, bolts imported Italian hinges or equivalent, catchers, locks, handles and all other accessories are part of the job including anti-termite treatment etc. Complete in all respects. .</p>
12	<p><b><u>INTERNAL PAINT</u></b></p> <p>Provide and apply with Roller, Matt finish water based paint (ICI/Berger or equivalent) minimum three coats of approved shade over a coat of primer to internal plastered surfaces, base preparation consisting of rubbing with sand stone, filling the uneven surface with putty, rubbing with sand paper and preparation of smooth surface perfect in all respects. Complete in all respect as per specifications and/or as directed by the Architect/ Engineer.</p>
13	<p><b><u>WOODEN DOOR / FRAME / CHOWKAT / Beading</u></b></p> <p><b>DOOR FRAME:</b> Provide and fixing of termite treated solid beach wood door frames of required thickness including Lintels, hold fasts, where ever required, complete in all respect including polish with proper beach wood beading.</p> <p><b>SKIN DOORS D1-2'-6"x7'-0":</b> (for Toilet/Kitchen) Provide and install doors consisting of best quality Malaysian skin, pressed over best quality treated partial framing, with approved quality of door locks, handle, tower bolt, hold fast, stopper, hardware and paint /polish, complete in all respect.</p> <p><b>PLY DOORS D2-3'-0"x7'-0":</b> Providing and fixing 1 1/2" solid flush doors with polished of approved ply on both sides, viewing panel, Imported Yale lock, 4" hinges, hold fast, tower bolt, latches, stopper, &amp; all other necessary hardware, complete in all respect.</p>
14	<p><b><u>ALUMINUM WINDOWS / VENTILATOR</u></b></p> <p>Providing, fabricating and fixing in position heavy duty deluxe section approved color anodized aluminum local extruded Pak cable or equivalent (thickness of section 2mm minimum) or size using 4" wide section, 6 mm distortion free approved glass with gasket neoprene channels. Aluminum surfaces shall be anodized in approved color finish and shop protected including all accessories, fittings, rubber, seals, neoprene weather strips between frame and wall and frame edge trimming, gasket, screws, fly screen etc. and approval of the Consultants, complete in all respect, as per drawing / required size.</p>



15	<b><u>GLASS DOOR</u></b>
	Providing, fabrication & fixing 12 mm thick glass door with top & bottom locking system, 4" Aluminum D-48 by Lucky or equivalent Pak Cable section, with 12mm thick Middle East / Saudi Arabia or equivalent clear glass with frost film and Bank's monogram, Approved Ajrak film, with gasket size and shape as shown on drawing, including bolts, D lock, nuts, screws aluminum channel, handle, floor machine (New Star Japan or Korean or equivalent), locks etc. Complete in all respects as directed by Engineer.
16	<b><u>INSTALLATION OF VAULT / LOCKER ROOM DOOR</u></b>
	Lifting & Fixing charges of Bank's supplied Vault / Locker Doors , welding of door frame with RCC MS bars, and to facilitate the Vendors. Complete in all respects.
17	<b><u>ALUMINUM SECTION &amp; FRONT GLAZING</u></b>
	Provide and install 4" Deluxe section D 48 of LUCKY or equivalent fixed aluminum glazing for elevation with hinged panels including latches, rollers, rubber gaskets all necessary hardware and fittings, application of silicone for joints including approved 8 mm thick imported clear glass(KSA OR GHANI or equivalent) glass with complete as per drawing and as directed by the Architect.(Recommended Manufacturer: Pakistan cables OR Lucky)
	Complete in all respects ( <u>at front</u> )
18	<b><u>ALUMINUM COMPOSITE PANEL</u></b>
	Fabricating, providing and installation of 4 mm Aluminum Composite Panels for Cladding (at any level), make DADEX, ECL, Alpolic or approved equivalent, consisting of heavy duty deluxe anodized frame with 2mm base thickness, including designing, cutting, panel making, scaffolding etc. Complete with substructure, as per drawings provided or as directed by the Architect (B.P 350/- SQ.FT)
19	<b><u>GLASS PARTITION</u></b>
	Providing and installation 12mm thick glass KSA/UAE or equivalent polished glass with 100mm top & bottom rails, brush finish SS-304, lucky or equivalent Pak Cable section with frosted film surface as per approved design. Contractor is required to provide joints between the panels with minimum 5mm thick clear silicon from Dow corning or other approved by the Engineer. Complete in all respects. ( <u>in Manager and IT Rooms</u> ).
20	<b><u>WINDOW BLINDS</u></b>

	Provide and install imported VERTICAL Blinds, in imported synthetic fabric (5" wide) with suspension mechanism, approved shade & colour ( Light grey ). Complete in all respect at all outside glasses.
21	<b><u>SECURITY GRILLS</u></b>
	<b>Wrought Iron Grills for windows, Generator, AC outers,</b>
	This security grills will be provided at all external windows, ventilators., inside the fixed entrance glazing, geill door inside the entrance door, Providing and Fixing M.S Security Grills to windows, comprising of 1/2" square bars @ 6" c/c 1"x1-1/2" MS pipe 16 gauge, welding, grinding, finishing, rubbing 3 coat of enamel paint (ICI,NIPPON,BERGER or equivalent) red oxide before paint. Complete in all respects, as per standardized design and /or as shown in drawing., as per approved design, attached herewith. Further proper lockable grills with abiove specification will also be provided for Generator and all AC out door units.
22	<b><u>SECURITY ROLLING SHUTTER</u></b>
	Providing and fixing Mild Steel Rolling Security Shutter at front main entrance door , before glass doors, ATM Room's door, outside windows, made of 20 s.w.guage GI sheet, guide channels 10 gauge MS sheet and Roll-up durable mechanism (Spring & MS Bar etc.) with 2.5" Dia box, consisting of steel frame of M.S. channel 2"x1.25"x1" (50x30x3 mm) angle iron 1.5"x1.5"x1" (40x30x3mm)M.S plate 1"x1"xa" (300x300x3 mm) G.I. pipe 1.5" (37mm) Ø, springs 2'(600mm) c/c. Rollers 24 S.W.G G.I. Covering 1'x1' (300x300 mm) with S. Steel sheet 18 S.W.G, handles, holdfast, etc. center of the roller sheet to be in chicken foldable type window / mesh ( 6" X 12" can be covered with sliding panel, from inside ) for looking outside, vertical removable channel. Complete with sliding bolts handles including 3 coats of enamel paint (ICI or equivalent) including base coat of anti-rust primer, Complete in all respects, including all types of hardware etc. as per satisfaction of the consultant and engineer incharge. as per attached layout .
23	<b><u>SECURITY DOORS</u></b>
	i) <b>Security Grill Door</b>
	Providing and fixing the MS enamel painted security grill door panel of 3/4" MS square solid bars @ 4" c/c both ways welded with 1-1/2"x3/16" MS flat Frame and covered with MS Sheet 14 gauge, with all locks, including all necessary fittings. Complete in all respectat main entrance . Thus at entrance, inside will be security grill, the glass will be in centre and rolling shutter will be outside.
24	<b><u>EMERGENCY EXIT M.S DOOR</u></b>

	Fabricating, providing and fixing fire exit door with 16 S.W.G M.S 3/4" square pipe, 18 SWG MS sheet pressed over this frame, at both sides, sheet frame painted with approved deco colour including 16 S.W.G M.S sheet shutter framed in 4" x 3" M.S box section, including best quality hinges, locks, handles, hold fasts and other necessary hardware etc. size as per site. Complete in all respects as per drawing attached herewith, , specifications and as directed by the Bank.
25	<b><u>GRANITE (BLACK GRANITE)</u></b> Provide and laying 3/4" thick factory polished granite door/window Sills, Thresholds and Borders, Steps for internal stair case, main entrance steps, ATM entrance, plinth protection, thresholds, straight and curve as per site requirement, single piece, as directed by client, fixed 1:2 cement and mortar, color chemical grout including final rubbing finishing and polishing bull nosing carborandom grove where required etc. complete with all respect.
26	<b>ROOF TREATMENT:</b> Provision of Roof Screaming, minimum width of 2", for maintaining slope using 6mm crush chips of ratio 1:2:4 at roof including curing and fixing of Drain Pipe wherever required, complete in all respect., only where necessary .
27	<b>WATER PROOFING:</b> Provision of Roof treatment to be provided as per specifications and site condition in order to stop seepage of water wherever required, ONLY WHERE NECESSARY.
29	<b><u>INTERLOCK PAVERS</u></b> Providing & laying 60mm thick interlock pavers of approved design and shape natural colours, having strength b/w 7000 psi to 8500 psi i/c filling the joints with sand, for parking area laid over 3" thick layer (compacted) of approved course sand with leveling & dressing. Complete in all respects or as directed by the Engineer.(make Tuff/Envicrete/HUBCERETE or equivalent) . This pavers will be installed up to 12 feet width, from the edge of Branch .
31	<b><u>EXTERNAL PAINT</u></b> Provide and apply with Roller Matt Enamel paint WEATHER SHEILD (ICI/Berger or equivalent) minimum three coats of approved shade over a coat of primer to internal plastered surfaces, base preparation, primer, smooth filling etc. complete in all respect as shown on the drawings specifications and/or as directed by the Architect/ Engineer.

<b>32</b>	<b>ATM ROOM</b>
	Establishment of ATM room, having an average size of 5X7, suitable for free standing, front loaded ATM machine , The all walls of ATM room will be till the height of ceiling, with proper high strength machine made Block masonry, and or proper security grill. One telephone point and one Data point and one 15Amps power point for ATM machine, power point for one ton AC, with gas copper pipes and drain will also provided .will be provided in ATM room . Tiles and ceiling as per branch specification will be provided. The ATM power socket, data outlet face plate, telephone out let, will be other side of ATM room's wall and one 2 inches dia pipe will be provided in wall for wiring / leads. . The data point will be terminated in Patch panel and power point and light of ATM room will be connected to UPS. power . The earth point of ATM socket will be solidly connected with earth pit.
<b>33</b>	<b>ATM MAIN and INTERNAL DOORS</b>
	The main entrance door of ATM will be standard above specified glass door, 2- 1/2 feet wide, with proper lock, inside best quality D lock, handle and new star machine, with 1/2 inches above specified glass with frost and Ajrak film, and monogram. Further Security rolling shutter, specified above, will also be provided before entrance of ATM, This also include internal door . its installation, with MS, 16 SWG, 3/4"x3/4" square pipe grill,, 8" center to center distance, both ways, inside ATM room, 16 SWG GI sheet fitted over grill from atm room side and 3mm ply fixed from branch side. with lock, handles, polishing & finishing and making peep window 8" x 2" at a height of 5'-0 from floor level., this also include 16 SWG sheet made door frame, suitable to cater the weight of door, with hinges, holdfast, Complete in all respects or as directed by the Architect
<b>33-</b>	<b>MORCHA</b>
<b>a</b>	Providing of block Masonary 3 X 4, feet minimum inside, morcha in proper shape, totally covered from all four sides with 2 feet door 9 Exit door Specification ), inside lock, 3X6 inches inspection opening at proper height, 12 inches raised floor, stole, fan, paint, complete in all respect.
<b>34</b>	<b>ATM ACCESS RAMP FOR DISABLE PERSON</b>
	A three feet wide CC ramp, at 30 degree, will be provided for disable person. Wherever possible.
<b>35</b>	<b>Front Elevation</b>

The front elevation of the Branch will consist of proper CC steps, fixed on it approved granite . The portion other than window and door will consist of Bank's approved AJRAK tiles, aluminum composite panel, approved elevation ceramic tiles, as directed by the Bank's Engineer, plan. and other approved face tiles, with approved pattern .

#### PLUMBING WORKS

S. No	DESCRIPTION
1(a)	<p>Providing and fixing / making of complete kitchen fittings, bath rooms fittings with all necessary best quality and proper sized upvc water pipes, best quality fitting, 3 inches and or 4 inches best quality Dadexor equivalent UPVC pipes, gasket type fittings, trap, joints, waist best pipes with best SS trap covers, European type ceramics ware coupled water closet, (PORTA) or equivalent, white / Ivory /light colour, model HD-180 , including 3 gallons cistern, P/S trap, C.P tee stop cock with wall cups, connection pipes, " hinged double bacolite seat and cover , muslim shower, all joints to services and drains, plugging and screwing as necessary to the structure and make good the same, complete in all respect as per specifications and drawings.. All pipes and pvc fittings will be dadex or equivalent, all other / fittings/ fixtures will be master / Sonex/ Grohe China or equivalent, <u>plastic coated</u>, and In case where there are two bath room, in other bath room, Indian type or equivalent, Porta WC, model HDD-9, ivory colour with all porta/ Master fittings will be fixed.</p>
2	<p>Providing and fixing Wash hand Basin with pedastle, PORTA or equivalent model HD-19, Ivory colour /white colour "SONEX" waste coupling, plug with C.P brass chain, 1.5" dia. P.V.C ( D type) waste pipe connections to water lines, tee stop cock for cold and hot water inlet connector with nuts and fitting, waste pipe waste coupling , plugs with chain other ancillary material C.P grating including C.P bottle trap, testing etc. complete in all respect and as directed by the Engineer.</p>
3	<p>Provide &amp; fix best quality Stainless Steel imported Kitchen Sink, Balraco or equivalent make (40" x 20") 1000mm x 500mm sink with CI or WI brackets 150mm (6") built in wall, 40mm(1 1/2") rubber plug &amp; chrome plated brass chain, 40mm (1 1/2") C.P brass waste, pillar tap 2 way deluxe, 40 mm (1 1/2") dial malleable iron or C.P. brass trap, Bottle trap and unions. Make requisite holes in walls &amp; floor for pipe connections &amp; make good with approved material. (with SONEX or equivalent fittings).</p>



4	Provide & fix PVC floor drains of 4" dia of make Nikkassi, Pak Arab or approved equivalent, having minimum guaranteed 2" water seal with screw down C.P cover, peripheral drains with or without a vent arm. Make requisite holes in walls, floor for pipe connections & make good with approved material, including SS drain / grating with side perforation.
5	Provide & fix approved quality chromium plated towel rails 750mm x 20mm (30"x3/4") with brackets and C.P screws. (Taiwan make or equivalent)
6	Provide and fix approved quality C.P toilet paper holders and coat hook. (Taiwan make or equivalent)
7	Provide & fix chromium plated soap dish of approved quality with C.P screws. (Master /Sonex or equivalent)
8	Provide and fix Muslim Showers manufactured by Master/Sonex or equivalent, plastic coated, complete with stop cock and controlled spray head.
(a)	
(b)	Providing and fixing 15 mm dia C.P. mixer with C.P pipe 15 mm dia, of Master, Sonix or approved equal complete including pipe connections, all fittings, testing etc.
i)	For Wash basin
ii)	Kitchen Sink Mixer, Master/Sonex or equivalent Grohe China, Plastic coated, Kitchen Sink Mixer (Plastic Coated) or chromed make. Master, Sonex or equivalent
9	Providing, fixing, jointing and testing Polypropylene Random (PPR) pipes make Dadex / AGM or approved equivalent pressure pipe for cold/hot water as per DIN 8077-8078, PN-20 for pipes and DIN 16962, PN-25 for fittings (polyfusion welded joints) inside building including fittings and specials (sockets, tees, elbows, bends, crosses, reducers, adaptor, plugs and union etc.) supported on walls or suspended from roof slab or run in chases including pipe hangers, supports, cutting and making good the chases and holes, its painting and insulation against sun light complete in all respects. conforming to BSS. Cut and make good with Test and Commission for cold and hot water system. with appropriate dia and sizes.
10	Provide and fix of Gate valve, Threaded ends, bronze body with union bonnet, non-rising stem and wedge disc. suitable for 8.5 bars SWP and 250 deg. F., manufactured by KITZ (Japan) or approved equivalent.
i	Dia 1 1/2"
ii	Dia 1 1/4"
iii	Dia 1"
iv	Dia 3/4"
v	Dia 1/2"

11	Provide approved / appropriate dia , size, and fix cast UPVC pipes( AGM/dadex /vebro turkey Brand or equivalent) including fittings such as tees, elbows, sockets, wyc, hangers/supports etc. conforming to BSS for soil waste and vent pipes as embedded in floor and walls or suspended from slab or clamped to wall including plaugsm hangars, beds, Tees, Yees. Include for making requisite number of holes in walls and floors where required and making good the same as necessary to the structure labeling, testing to 6.5 feet water height complete.
12	Provide and construct gully trap with 12"x12" cast iron frame and cover, including excavation, backfilling, masonry, plaster internally and externally vitreous China trap etc. complete and approved by the Engineer.
13	Provide and construct man holes for sewer with 24"x24" C.I frame and cover (40kg) including 8" Masonry, puddlo plaster internally and externally up to depths; shown on drawings and approved by the Engineer. PCC 1:2:4 base slab, benching with 1:3 cement sand mortar including 24" dia manhole cover, frame and rungs, complete in all respect.
14	Construction of Septic Tank one no size 6'x4'x5' avg depth at per site conditions in all respects as per drawings. If required
15	Make Sewer Connection to existing Sewerage disposal system. Complete in all respect.
16	Make Water Connection to existing Water supply system using pprc pipe fitting of Dadex or equivalent
17	Providing, installing & testing of Over Head Fiber Glass Water Tank make Dura or approved equivalent, with 500 Gallons storage capacity, including all necessary fittings etc. Complete in all respects as per instruction of Architect.
<b>ELECTRICAL WORKS:</b>	
S. No .	<b>DESCRIPTION</b>
<b>A. INTERNAL WIRING</b>	



1	Supply, installation and commissioning of <b>Light Circuit</b> wiring, from MCB in DB to Switch Board to be wired with 3x2.5mm sq. (P+N+PE) PVC insulated 300/500 V grade wire, manufactured by M/s. Pakistan Cables Ltd., AGE, Pioneer or equivalent or FAST or equivalent, pioneer or as specified in Annexure A, in and including cost of 1" dia. heavy duty PVC conduit make Popular, Beta, installed on roof slab, above false ceiling, or concealed in walls, or as required as per site conditions, all PVC conduit accessories, pull boxes, steel pull wires, Complete in all respects. Each circuit shall have independent CPC. Maximum wiring of 2 light circuits can be pulled through 1" dia. PVC conduit. <u>Note:-Supply Certificate issued by Company will be attached with bills</u>
2	Providing, Installation, testing and commissioning of wiring of <b>One light point</b> controlled by one switch and wired with 3x1.5 mm sq. PVC insulated wires 300/500 V grade, in and including cost of 3/4" dia. heavy duty PVC conduit recessed in wall, columns slabs or above light carrier all PVC conduit accessories, 3" high PVC junction boxes, pull boxes, steel pull wires, PVC flexible conduit from ceiling junction box to light fixture with brass chuck nut including cost of 3x1.5mm sq from Ceiling Junction Box to Light Fixture, M.S. sheet steel switch box 16 SWG with earth terminal and 2 coats of enameled paint, M.S. box shall be of the same size as that of 1, 2 or 3 gang flush type plate switches, including cost of gang type light switches 10 amps.
3	Providing, Installation, testing and commissioning of wiring of <b>Two or three or four light points</b> controlled by one switch and wired with 3x1.5 mm sq. PVC insulated wires 300/500 V grade, in and including cost of 3/4" dia. heavy duty PVC conduit recessed in wall, columns slabs or above light carrier all PVC conduit accessories, 3" high PVC junction boxes, pull boxes, steel pull wires, PVC flexible conduit from ceiling junction box to light fixture with brass chuck nut including cost of 3x1.5mm sq from Ceiling Junction Box to Light Fixture, M.S. sheet steel switch box 16 SWG with earth terminal and 2 coats of enameled paint, M.S. box shall be of the same size as that of 1, 2 or 3 gang flush type plate switches, including cost of gang type light switches 10 amps.
4	Providing & wiring of <b>1-3 pin 15 Amps</b> power socket outlets (for General Use) wired with 2x4mm <sup>2</sup> +1x2.5mm <sup>2</sup> CU/PVC insulated cable 300/500 Volt grade, make Pakistan cables, Fast, Pioneer, AGE, in 25mm dia PVC conduit make Beta, Popular, recessed in wall/floor, above false ceiling or as required as per site conditions, all PVC conduit make Beta accessories, pull boxes, steel pull wires. Complete with all conduit & wiring accessories including 15 Amps, 3 pin combined switch socket make Clipsal (Austria), Panduit, MK(UK), Legrand (France) or approved equivalent. Wiring shall be done directly from the MCB installed in the respective DB without any claim of circuit. complete with suitable size 1.5mm thick sheet steel back box recessed in wall.



**SINDH PUBLIC PROCUREMENT REGULATORY AUTHORITY**

**CONTRACT EVALUATION FORM**

**TO BE FILLED IN BY ALL PROCURING AGENCIES FOR PUBLIC CONTRACTS OF WORKS, SERVICES & GOODS**

- 1) NAME OF THE ORGANIZATION / DEPTT. SINDH BANK LIMITED/ADMINISTRATION
- 2) PROVINCIAL / LOCAL GOVT./ OTHER SCHEDULED BANK
- 3) TITLE OF CONTRACT Renovation of Chakwal Branch
- 4) TENDER NUMBER SNDB/COK/ADMIN/TD/617/2015
- 5) BRIEF DESCRIPTION OF CONTRACT Same as Above
- 6) FORUM THAT APPROVED THE SCHEME Competent Authority
- 7) TENDER ESTIMATED VALUE -
- 8) ENGINEER'S ESTIMATE Rs. 1,824/- Per Sq.Ft  
(For civil works only)
- 9) ESTIMATED COMPLETION PERIOD (AS PER CONTRACT) 45 Days
- 10) TENDER OPENED ON (DATE & TIME) 06/10/2015 At 1630 Hours
- 11) NUMBER OF TENDER DOCUMENTS SOLD 02  
(Attach list of buyers)
- 12) NUMBER OF BIDS RECEIVED \_\_\_\_\_
- 13) NUMBER OF BIDDERS PRESENT AT THE TIME OF OPENING OF BIDS 02
- 14) BID EVALUATION REPORT 06/10/2015 (Attached)  
(Enclose a copy) M/s. Z. Hasan Enterprises, House No. (4-4) 7
- 15) NAME AND ADDRESS OF THE SUCCESSFUL BIDDER Faisal Town Sahawal.
- 16) CONTRACT AWARD PRICE Rs. 3,780,000/- (1,800/- Per Sq. Ft)
- 17) RANKING OF SUCCESSFUL BIDDER IN EVALUATION REPORT  
(i.e. 1<sup>st</sup>, 2<sup>nd</sup>, 3<sup>rd</sup> EVALUATION BID).  
M/s. Z. Hasan Enterprises  
M/s. Engineering Expert

- 18) METHOD OF PROCUREMENT USED : - (Tick one)
- a) SINGLE STAGE – ONE ENVELOPE PROCEDURE  Domestic/ Local
  - b) SINGLE STAGE – TWO ENVELOPE PROCEDURE
  - c) TWO STAGE BIDDING PROCEDURE
  - d) TWO STAGE – TWO ENVELOPE BIDDING PROCEDURE

PLEASE SPECIFY IF ANY OTHER METHOD OF PROCUREMENT WAS ADOPTED i.e. EMERGENCY, DIRECT CONTRACTING ETC. WITH BRIEF REASONS:



12/10/2015

<b>Bid Evaluation Report</b>		
<b>Evaluation Report- Renovation etc. Chakwal Branch</b>		
1	Name of Procuring Agency	Sindh Bank Ltd.
2	Tender Reference No.	SNDB/COK/ADMIN/TD/617/2015
3	Tender Description	Renovation etc.of Chakwal Branch
4	Method of Procurement	Single Stage One Envelop Bidding Procedure
5	Tender Published / SPPRA S.No	SPPRA S.No: 22847/2015 (Prequalification Notice) Express Tribune, Daily Express & Daily Ibrat (18 <sup>th</sup> February 2015) SPPRA S.No: 25307/2015 (17 <sup>th</sup> September 2015)
6	Total Bid Documents Sold	02
7	Total Bids Received	02
8	Technical/Financial Bid Opening Date & Time	06/10/2015 at 1630 Hrs
9	No. Of Bid qualified	02
10	Bid(s) Rejected	-


Detail on the above is as follows:-

S No	Name of Firm or Bidder	Cost offered by the Bidder (Area=2,100 sq.ft.)	Ranking in terms of cost	Comparison with Engineering Estimated cost (Rs.1,824 per sq.ft)	Reasons for acceptance/rejection	Remarks
0	1	2	3	4	5	6
1.	M/s. Z.A Construction	Rs. 1,800 per sq.ft. Rs.3,780,000/-	1 <sup>st</sup> Lowest	Rs. 24/- below the estimated cost	Accepted -1 <sup>st</sup> Lowest Qualified Bidder	-
2.	M/s. Memar Associates	Rs. 2,000 per sq.ft. Rs.4,200,000/-	2 <sup>nd</sup> Lowest	Rs.176/- above the estimated cost	2 <sup>nd</sup> Lowest Qualified Bidder	-


Accordingly going by the eligibility criteria offered in the tender document, Serial No.1 stands as only 1<sup>st</sup> Lowest Qualified Bidder.

**Members Signature- Procurement Committee**

Lt. Col. (R) Shahzad Begg  
 Head of Administration

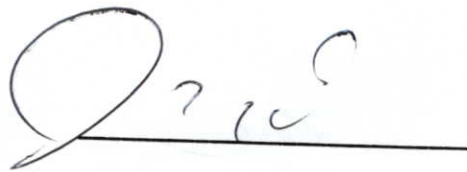

Mr. Saeed Jamal  
 Chief Financial Officer



Mr. Syed Muhammad Aqeel  
 Chief Manager, IDBL Karachi



4 FINANCIAL PROPOSAL

**PRICE SCHEDULE**  
(Applicable for the year 2015-2016)

SIGNATURE MEMBERS PC-ADMIN  
Head - Fin Div. \_\_\_\_\_  
Head - Admin Div. \_\_\_\_\_  
Member-IDBL. \_\_\_\_\_  
Date: \_\_\_\_\_

Name of Bidder \_\_\_\_\_

Description	Unit	Rate per sq.ft	*Total Amount
Renovation, Interior, Works & Construction of CHAKWALBRANCH,	2100 sq.ft(Approx.) (As per specification mentioned in scope of work)	2000/-	4,200,000/-

This \*total amount will be taken as the financial bid offered by the contractor.

**Note**

- The branch has to be handed over within 45 days of issue date of award letter. In case of delay, a penalty @ 0.15% of total contract amount, for each day of delay will be imposed.
- The cost must include all applicable taxes, stamp duty (as applicable under Stamp Act 1989) duly stamped on the contract agreement, installation, labor and any other charges.
- No advance payment will be made, bills will only be processed for necessary payment on receipt of certificate of satisfaction from the Branch Manager/Project Manager.
- Calculation of bid security.** 2% of the \*Total Amount will be submitted with the tender document as bid security.
- In case it is reviled at any stage after the completion of work that the asked specification of the tender have not been met, the amount of that specific item will be fined to the contractor with appropriate action as deemed necessary by the procurement committee.
- In case of any observation arising in respect of quality of the item, the company will be liable to address it at his own cost, non-compliance of the same will result into initiation of a case against the company for non-commitment or cancellation of tender as will be decided by the Procurement Committee.
- The per square ft. rate given above by the contractor will be for inside area of the premises. However for any outside premises work, its changes will be covered in premises per square ft. area. No charges for any necessary outside work will be entertained separately.
- All terms and condition of Agreement (Annexure "H") are part of Tender Document.

Signature & Stamp of Bidder \_\_\_\_\_

**Nemar Associates**  
48-A, New Garden Block,  
Fahad Street, Green Colony,  
No.2, Canal Road, Faisalabad



SIGNATURE MEMBERS PC-ADMIN

Head - Fin Div. \_\_\_\_\_

Head - Admin Div. \_\_\_\_\_

Member-IDBL. \_\_\_\_\_

Date: \_\_\_\_\_

#### 4 FINANCIAL PROPOSAL

##### PRICE SCHEDULE

(Applicable for the year 2015-2016)

Name of Bidder Z.A. Construction

Description	Unit	Rate per sq.ft	*Total Amount
Renovation, Interior, Works & Construction of CHAKWALBRANCH,	2100 sq.ft(Approx.) (As per specification mentioned in scope of work)	1800/sq.ft	3780000

This \*total amount will be taken as the financial bid offered by the contractor.

##### Note

1. The branch has to be handed over within 45 days of issue date of award letter. In case of delay, a penalty @ 0.15% of total contract amount, for each day of delay will be imposed.
2. The cost must include all applicable taxes, stamp duty (as applicable under Stamp Act 1989) duly stamped on the contract agreement, installation, labor and any other charges.
3. No advance payment will be made, bills will only be processed for necessary payment on receipt of certificate of satisfaction from the Branch Manager/Project Manager.
4. **Calculation of bid security.** 2% of the \*Total Amount will be submitted with the tender document as bid security.
5. In case it is reviled at any stage after the completion of work that the asked specification of the tender have not been met, the amount of that specific item will be fined to the contractor with appropriate action as deemed necessary by the procurement committee.
6. In case of any observation arising in respect of quality of the item, the company will be liable to address it at his own cost, non-compliance of the same will result into initiation of a case against the company for non-commitment or cancellation of tender as will be decided by the Procurement Committee.
7. The per square ft. rate given above by the contractor will be for inside area of the premises. However for any outside premises work, its changes will be covered in premises per square ft. area. No charges for any necessary outside work will be entertained separately.
8. All terms and condition of Agreement (Annexure "H") are part of Tender Document.

Signature & Stamp of Bidder \_\_\_\_\_

  
Construction

**MINUTES OF THE OPENING OF THE TENDER (TECHNICAL /FINANCIAL PHASE)**

TYPE OF PROCUREMENT  ADMIN / IT / CONSULTANT / MEDIA  
TENDER NAME RENOVATION ETC. CHAKUAL BR  
TYPE OF TENDER  SINGLE STAGE-ONE ENVELOPE / SINGLE STAGE-TWO ENVELOPE / TWO STAGE / TWO STAGE-TWO ENVELOPE  
OPENING DATE 6/10/15  
OPENING TIME 1630hrs

ATTENDANCE (MEMBER PC)  
HOA  
CFO  
CHIEF MANAGER, IDBL

ATTENDANCE (REPS. OF BIDDERS)	NAME	FIRM
	<u>Byzara S</u>	<u>M/S. Z.A CONSTRUCTION</u>
		<u>M/S. MEMAR ASSOCIATES</u>

TOTAL BIDS ACCEPTED FOR EVALUATION 02

TOTAL BIDS REJECTED \_\_\_\_\_

REMARKS \_\_\_\_\_

SECRETARY PROCUREMENT COMMITTEE  
SIGNATURE [Signature]  
DATE 06/10/15