

BID EVALUATION REPORT

1	Name of Procuring agency	Rice Canal Division Mehar (@ KN Shah.
2	Tender reference No.	N.I.T No. TC/G-55/968 dated 23.11.2015
3	Tender Description /Name of Work/Item	i) Constructing Sump and pump house of Pumping Station (@ Mehar Main Drain to supplement Irrigation Channel. ii) Supply and Fixing 2 Nos. Pumps along with Motor all accessories (P-01)
4	Method Procurement	Single stage-single Envelope Procurement
5	Tender Published	SPPRA Website 2015 No. 26090 dated 30.12.2015 i) Daily Jang dated 27.11.2015, ii) Daily Sindh Express dated 26.11.2015, iii) Express Tribune dated 27.11.2015, iv) Daily Umat dated 27.11.2015, v) Daily Awami Awaz dated 27.11.2015.
6	Total Bid Document	03 Nos.
7	Total Bid received	03 Nos.
8	Technical Bid Opening date (If applicable)	Not Applicable
9	No. of Bid Technically qualified (If applicable)	Not Applicable
10	Bid(s) rejected (If applicable)	-Nil-
11	Financial Bid Opening date	18.01.2016

S. No.	Name of Firm of Bidder	Cost offered by the Bidder	Ranking in terms of cost	Comparison with Estimated Cost	Reasons for acceptance /rejection	Remarks
1	Ghulam Hyder Khushk	26514305	Lowest	Rate quoted 34% above	Qualified as per evaluation criteria	Found responsive Bid recommended for awarded of work
2	Madni Engineering Constt:	26841768	Highest	Rate quoted 38% above	Qualified as per evaluation criteria	Responsive
3	Jagirani Constt: Co.	27172915	Highest	Rate quoted 41% above	Qualified as per evaluation criteria	Responsive

Signature of the Chairman/members of the Committee

(FAYAZ AHMED QURESHI)
Divisional Accounts Officer
Rice Canal Division Mehar
@ KN Shah

(TAJQUE AHMED KHAN)
Executive Engineer
Rice Canal Division Mehar
@ KN Shah

(AMJAD PARVEZ DETHACI)
Superintending Engineer
Western Sindh Circle
Larkana

BID EVALUATION REPORT

- 1 **Name of Procuring agency** Rice Canal Division Mehar @ KN Shah.
- 2 **Tender reference No.** N.I.T No. TC/G-55/968 dated 23.11.2015
- 3 **Tender Description /Name of Work/Item** i) Constructing of Delivery Bay of Pumping Station @ Mehar Main Drain to Supplement Irrigation Channel.
ii) Constructing (2 Nos.) Road Bridge @ Pumping Station to supplement Irrigation Channels
iii) Constructing Aqueduct Over Mado Distry (P-02).
- 4 **Method Procurement** Single stage-single Envelope Procurement
- 5 **Tender Published** SPPRA Website 2015 No. 26090 dated 30.12.2015
i) Daily Jang dated 27.11.2015, ii) Daily Sindh Express dated 26 11.2015, iii) Express Tribune dated 27.11.2015, iv) Daily Umat dated 27.11.2015, v) Daily Awami Awaz dated 27.11.2015.
- 6 **Total Bid Document** 03 Nos.
- 7 **Total Bid received** 03 Nos.
- 8 **Technical Bid Opening date** Not Applicable
(If applicable)
- 9 **No. of Bid Technically qualified** Not Applicable
(If applicable)
- 10 **Bid(s) rejected** -Nil-
(If applicable)
- 11 **Financial Bid Opening date** 18.01.2016

S. No.	Name of Firm of Bidder	Cost offered by the Bidder	Ranking in terms of cost	Comparison with Estimated Cost	Reasons for acceptance /rejection	Remarks
1	Bakhat Hussain Construction	5630612	Lowest	Rate quoted 42.50% above	Qualified as per evaluation criteria	Found responsive Bid recommended for warded of work
2	Ghulam Hyder Khushk	5768908	Highest	Rate quoted 46% above	Qualified as per evaluation criteria	Responsive
3	Rab Nawaz Shahani	5847934	Highest	Rate quoted 48% above	Qualified as per evaluation criteria	Responsive

Signature of the Chairman/members of the Committee

(FAYAZ AHMED QURESHI)
Divisional Accounts Officer
Rice Canal Division Mehar
@ KN Shah

(TARIQUE AHMED KEHAR)
Executive Engineer
Rice Canal Division Mehar
@ KN Shah

(AMJAD PARVEZ DAWACH)
Superintending Engineer
Western Sindh Circle
Larkana

BID EVALUATION REPORT

- 1 **Name of Procuring agency** Rice Canal Division Mehar @ KN Shah.
- 2 **Tender reference No.** N.I.T No. TC/G-55/968 dated 23.11.2015
- 3 **Tender Description /Name of Work/Item** i) Construction of Leading Channel from Mehar Main Drain Pumping Station to FP Bund RD 292.
ii) Construction of Retaining wall along Pumping Station @ Mehar Main Drain for supplement Irrigation Channels (75 ft. B/S) (P-03).
- 4 **Method Procurement** Single stage-single Envelope Procurement
- 5 **Tender Published** SPPRA Website 2015 No. 26090 dated 30.12.2015
i) Daily Jang dated 27.11.2015, ii) Daily Sindh Express dated 26.11.2015, iii) Express Tribune dated 27.11.2015, iv) Daily Umat dated 27.11.2015, v) Daily Awami Awaz dated 27.11.2015.
- 6 **Total Bid Document** 03 Nos.
- 7 **Total Bid received** 03 Nos.
- 8 **Technical Bid Opening date** Not Applicable
(If applicable)
- 9 **No. of Bid Technically qualified** Not Applicable
(If applicable)
- 10 **Bid(s) rejected** -Nil-
(If applicable)
- 11 **Financial Bid Opening date** 18.01.2016

S. No.	Name of Firm of Bidder	Cost offered by the Bidder	Ranking in terms of cost	Comparison with Estimated Cost	Reasons for acceptance /rejection	Remarks
1	Bakhat Hussain Constt:	10276085	Lowest	Rate quoted 15% & 46% above	Qualified as per evaluation criteria	Found responsible Bid recommended for awarded of work
2	Madni Engineering Constt:	10510929	Highest	Rate quoted 18% & 48% above	Qualified as per evaluation criteria	Responsive
3	Pak Constt: Co.	10613706	Highest	Rate quoted 19% & 50% above	Qualified as per evaluation criteria	Responsive

Signature of the Chairman/members of the Committee

(FAYAZ AHMED QURESHI)
Divisional Accounts Officer
Rice Canal Division Mehar
@ KN Shah

(TARIQ AHMED KEHAR)
Executive Engineer
Rice Canal Division Mehar
@ KN Shah

(AMJAB PARVEZ DAWACHI)
Superintending Engineer
Western Sindh Circle
Larkana

BID EVALUATION REPORT

- 1 **Name of Procuring agency** Rice Canal Division Mehar @ KN Shah.
- 2 **Tender reference No.** N.I.T No. TC/G-55/968 dated 23.11.2015
- 3 **Tender Description /Name of Work/Item** i) Construction of Leading Channel from Mehar Main Drain Pumping Station to FP Bund RD 292.
ii) Construction of Retaining wall along Pumping Station @ Mehar Main Drain for supplement Irrigation Channels (75 ft. B/S) (P-04).
- 4 **Method Procurement** Single stage-single Envelope Procurement
- 5 **Tender Published** SPPRA Website 2015 No. 26090 dated 30.12.2015
i) Daily Jang dated 27.11.2015, ii) Daily Sind. Express dated 26.11.2015, iii) Express Tribune dated 27.11.2015, iv) Daily Umat dated 27.11.2015, v) Daily Awami Awaz dated 27.11.2015.
- 6 **Total Bid Document** 03 Nos.
- 7 **Total Bid received** 03 Nos.
- 8 **Technical Bid Opening date** Not Applicable
(If applicable)
- 9 **No. of Bid Technically qualified** Not Applicable
(If applicable)
- 10 **Bid(s) rejected** -Nil-
(If applicable)
- 11 **Financial Bid Opening date** 18.01.2016

S. No.	Name of Firm of Bidder	Cost offered by the Bidder	Ranking in terms of cost	Comparison with Estimated Cost	Reasons for acceptance /rejection	Remarks
1	Bakhat Hussain Constt:	9092876	Lowest	Rate quoted 14.50% & 49% above	Qualified as per evaluation criteria	Found responsive Bid recommen for awarded of work
2	Madni Engineering Constt:	9268243	Highest	Rate quoted 17% & 50% above	Qualified as per evaluation criteria	Responsive
3	A I S International	9354840	Highest	Rate quoted 18.0% & 52% above	Qualified as per evaluation criteria	Responsive

Signature of the Chairman/members of the Committee

(FAYAZ AHMED QURESHI)
Divisional Accounts Officer
Rice Canal Division Mehar
@ KN Shah

(TARIQUE AHMED KEHAR)
Executive Engineer
Rice Canal Division Mehar
@ KN Shah

(AMJAD PARVEZ DAWACHTI)
Superintending Engineer
Western Sindh Circle
Larkana

BID EVALUATION REPORT

- 1 **Name of Procuring agency** Rice Canal Division Mehar @ KN Shah.
- 2 **Tender reference No.** N.I.T No. TC/G-55/968 dated 23.11.2015
- 3 **Tender Description /Name of Work/Item** Construction of Bund Sluice at RD 248 FP Bund and Construction of Retaining wall along FP Bund Sluice (P-05).
- 4 **Method Procurement** Single stage-single Envelope Procurement
- 5 **Tender Published** SPPRA Website 2015 No. 26090 dated 30.12.2015
i) Daily Jang dated 27.11.2015, ii) Daily Sindh Express dated 26 11.2015, iii) Express Tribune dated 27.11.2015, iv) Daily Umat dated 27.11.2015, v) Daily Awami Awaz dated 27.11.2015.
- 6 **Total Bid Document** 03 Nos.
- 7 **Total Bid received** 03 Nos.
- 8 **Technical Bid Opening date** Not Applicable
(If applicable)
- 9 **No. of Bid Technically qualified** Not Applicable
(If applicable)
- 10 **Bid(s) rejected** -Nil-
(If applicable)
- 11 **Financial Bid Opening date** 18.01.2016

S. No.	Name of Firm of Bidder	Cost offered by the Bidder	Ranking in terms of cost	Comparison with Estimated Cost	Reasons for acceptance /rejection	Remarks
1	Barkat Ali Awan	20019744	Lowest	Rate quoted 44% above	Qualified as per evaluation criteria	Found responsive Bid recommended for warded of work
2	Mohammad Nawaz Tunio	20562098	Highest	Rate quoted 48% above	Qualified as per evaluation criteria	Responsive
3	A I S International	20968863	Highest	Rate quoted 51% above	Qualified as per evaluation criteria	Responsive

Signature of the Chairman/members of the Committee

(FAYAZ AHMED QURESHI)
Divisional Accounts Officer
Rice Canal Division Mehar
@ KN Shah

(TAKUZE AHMED KEHAR)
Executive Engineer
Rice Canal Division Mehar
@ KN Shah

(AMJAD PARVEZ DAWACH)
Superintending Engineer
Western Sindh Circle
Larkana

BID EVALUATION REPORT

- 1 **Name of Procuring agency** Rice Canal Division Mehar @ KN Shah.
- 2 **Tender reference No.** N.I.T No. TC/G-55/968 dated 23.11.2015
- 3 **Tender Description /Name of Work/Item** Construction of Bund Sluice at RD 275 FP Bund and Construction of Retaining wall along FP Bund Sluice (P-06).
- 4 **Method Procurement** Single stage-single Envelope Procurement
- 5 **Tender Published** SPPRA Website 2015 No. 26090 dated 30.12.2015, i) Daily Jang dated 27.11.2015, ii) Daily Sindh Express dated 26 11.2015, iii) Express Tribune dated 27.11.2015, iv) Daily Umat dated 27.11.2015, v) Daily Awami Awaz dated 27.11.2015.
- 6 **Total Bid Document** 03 Nos.
- 7 **Total Bid received** 03 Nos.
- 8 **Technical Bid Opening date (If applicable)** Not Applicable
- 9 **No. of Bid Technically qualified (If applicable)** Not Applicable
- 10 **Bid(s) rejected (If applicable)** -Nil-
- 11 **Financial Bid Opening date** 18.01.2016

S. No.	Name of Firm of Bidder	Cost offered by the Bidder	Ranking in terms of cost	Comparison with Estimated Cost	Reasons for acceptance /rejection	Remarks
1	Salwa Constt: & Engineering Service	20012965	Lowest	Rate quoted 43.95% above	Qualified as per evaluation criteria	Found responsive Bid recommended for awarded of work
2	Mohammad Nawaz Tunio	20290921	Highest	Rate quoted 46% above	Qualified as per evaluation criteria	Responsive
3	A I S International	20697686	Highest	Rate quoted 49% above	Qualified as per evaluation criteria	Responsive

Signature of the Chairman/members of the Committee

(FAYAZ AHMED QURESHI)
Divisional Accounts Officer
Rice Canal Division Mehar
@ KN Shah

(TAJ QURESHI)
Executive Engineer
Rice Canal Division Mehar
@ KN Shah

(AMJAD PARVEZ DAWACHI)
Superintending Engineer
Western Sindh Circle
Larkana

BID EVALUATION REPORT

- 1 **Name of Procuring agency** Rice Canal Division Mehar (@ KN Shah.
- 2 **Tender reference No.** N.I.T No. TC/G-55/968 dated 23.11.2015
- 3 **Tender Description /Name of Work/Item** Construction of Bund Sluice at RD 295 FP Bund and Construction of Retaining wall along FP Bund Sluice (P-07).
- 4 **Method Procurement** Single stage-single Envelope Procurement
- 5 **Tender Published** SPPRA Website 2015 No. 26090 dated 30.12.2015
i) Daily Jang dated 27.11.2015, ii) Daily Sindh Express dated 26.11.2015, iii) Express Tribune dated 27.11.2015, iv) Daily Umat dated 27.11.2015, v) Daily Awami Awaz dated 27.11.2015.
- 6 **Total Bid Document** 03 Nos.
- 7 **Total Bid received** 03 Nos.
- 8 **Technical Bid Opening date (If applicable)** Not Applicable
- 9 **No. of Bid Technically qualified (If applicable)** Not Applicable
- 10 **Bid(s) rejected (If applicable)** -Nil-
- 11 **Financial Bid Opening date** 18.01.2016

S. No.	Name of Firm of Bidder	Cost offered by the Bidder	Ranking in terms of cost	Comparison with Estimated Cost	Reasons for acceptance /rejection	Remarks
1	M/s Mohammad Nawaz Tunio	20141774	Lowest	Rate quoted 44.90% above	Qualified as per evaluation criteria	Found responsive Bid recommended for awarded on two
2	Pak Constt. Co.	20562098	Highest	Rate quoted 48% above	Qualified as per evaluation criteria	Responsive
3	A I S International	20968863	Highest	Rate quoted 51% above	Qualified as per evaluation criteria	Responsive

Signature of the Chairman/members of the Committee

(FAYAZ AHMED QURESHI)
Divisional Accounts Officer
Rice Canal Division Mehar
(@ KN Shah)

(TARIQ AHMED KEHAR)
Executive Engineer
Rice Canal Division Mehar
(@ KN Shah)

(AMJAD PARVEZ DAWACHO)
Superintending Engineer
Western Sindh Circle
Larkana

BID EVALUATION REPORT

1. Name of Procuring agency	Rice Canal Division Mehar @ KN Shah.
2. Tender reference No.	N.I.T No. TC/G-55/968 dated 23.11.2015
3. Tender Description /Name of Work/Item	Construction of Manjan X-Regulator along Rajahmundry Branch RD 49+00 (P-08).
4. Method Procurement	Single stage-single Envelope Procurement
5. Tender Published	SPPRA Website 2015 No. 26090 dated 30.12.2014 i) Daily Jang dated 27.11.2015, ii) Daily Sakshin Express dated 26.11.2015, iii) Express Tribune dated 27.11.2015, iv) Daily Umat dated 27.11.2015, v) Daily Awami Awaz dated 27.11.2015.
6. Total Bid Document	03 Nos.
7. Total Bid received	03 Nos.
8. Technical Bid Opening date (If applicable)	Not Applicable
9. No. of Bid Technically qualified (If applicable)	Not Applicable
10. Bid(s) rejected (If applicable)	-Nil-
11. Financial Bid Opening date	18.01.2016

Name of Firm of Bidder	Cost offered by the Bidder	Ranking in terms of cost	Comparison with Estimated Cost	Reasons for acceptance /rejection	Remarks
Pak Const. Co.	6719620	Lowest	Rate quoted 62% above	Qualified as per evaluation criteria	Not recommended
Bakhat Hussain Constt:	6784870	Highest	Rate quoted 66% above	Qualified as per evaluation criteria	Not recommended
Abdul Razaque Bhutto	6833807	Highest	Rate quoted 69% above	Qualified as per evaluation criteria	Not recommended

Signature of the Chairman/members of the Committee

(TAJAZ AHMED QURESHI)
Divisional Accounts Officer
Rice Canal Division Mehar
@ KN Shah

(TAKI AHMED KHAN)
Executive Engineer
Rice Canal Division Mehar
@ KN Shah

(AMJAD PARVEZ DARRA)
Superintendent
Western Sindh Circle
Larkana

BID EVALUATION REPORT

- 1 **Name of Procuring agency** Rice Canal Division Mehar (@ KN Shah)
- 2 **Tender reference No.** N.I.T No. TC/G-55/968 dated 23.11.2015
- 3 **Tender Description /Name of Work/Item** i) De-silting along Kakol Branch RD 0+00 to 49+00.
ii) Construction of Retaining wall along Radhan Branch RD 0+0 to 0+250 B/S (P-09).
- 4 **Method Procurement** Single stage-single Envelope Procurement
- 5 **Tender Published** SPPRA Website 2015 No. 26090 dated 30.12.2014.
i) Daily Jang dated 27.11.2015, ii) Daily Sindh Express dated 26.11.2015, iii) Express Tribune dated 27.11.2015, iv) Daily Umat dated 27.11.2015 v) Daily Awami Awaz dated 27.11.2015.
- 6 **Total Bid Document** 03 Nos.
- 7 **Total Bid received** 03 Nos.
- 8 **Technical Bid Opening date (If applicable)** Not Applicable
- 9 **No. of Bid Technically qualified (If applicable)** Not Applicable
- 10 **Bid(s) rejected (If applicable)** -Nil-
- 11 **Financial Bid Opening date** 18.01.2016

S. No.	Name of Firm of Bidder	Cost offered by the Bidder	Ranking in terms of cost	Comparison with Estimated Cost	Reasons for acceptance /rejection	Remarks
1	AIS International	16321434	Lowest	Rate quoted 15% & 48% above	Qualified as per evaluation criteria	Responsive
2	Mazhar Ali	16577546	Highest	Rate quoted 18% & 52% above	Qualified as per evaluation criteria	Responsive
3	Gul Mohammad Channa	16856938	Highest	Rate quoted 19% & 58% above	Qualified as per evaluation criteria	Responsive

Signature of the Chairman/members of the Committee

(**FAYAZ AHMED QURESHI**)
Divisional Accounts Officer
Rice Canal Division Mehar
@ KN Shah

(**TARIQUE AHMED KEHAR**)
Executive Engineer
Rice Canal Division Mehar
@ KN Shah

(**AYYAD PARVEZ DAWACI**)
Superintending Engineer
Western Sindh Circle

BID EVALUATION REPORT

1	Name of Procuring agency	Rice Canal Division Mehar (@ KN Shah.
2	Tender reference No.	N.I.T No. TC/G-55/968 dated 23.11.2015
3	Tender Description /Name of Work/Item	i) Earth work along Kakol Branch RD 0+00 to 25+00 NIP Side. ii) Construction of Retaining wall along Mehar (1+38 Kakol Branch) RD 38 NIP Side = 750ft. (P-10).
4	Method Procurement	Single stage-single Envelope Procurement
5	Tender Published	SPPRA Website 2015 No. 26090 dated 30.12.2014 i) Daily Jang dated 27.11.2015, ii) Daily Sindh Express dated 26.11.2015, iii) Express Tribune dated 27.11.2015, iv) Daily Umat dated 27.11.2015, v) Daily Awami Awaz dated 27.11.2015.
6	Total Bid Document	03 Nos.
7	Total Bid received	03 Nos.
8	Technical Bid Opening date (If applicable)	Not Applicable
9	No. of Bid Technically qualified (If applicable)	Not Applicable
10	Bid(s) rejected (If applicable)	-Nil-
11	Financial Bid Opening date	18.01.2016

S. No.	Name of Firm of Bidder	Cost offered by the Bidder	Ranking in terms of cost	Comparison with Estimated Cost	Reasons for acceptance /rejection	Remarks
1	Mazhar Ali	11920118	Lowest	Rate quoted 17% & 92% above	Qualified as per evaluation criteria	Found responsive Bid recommendation for awarded
2	Pak Constt. Co.	12068476	Highest	Rate quoted 18% & 95% above	Qualified as per evaluation criteria	Responsive
3	Noor Mohammad & Brothers	12216834	Highest	Rate quoted 19% & 98% above	Qualified as per evaluation criteria	Responsive

Signature of the Chairman/members of the Committee

(FAYAZ AHMED QURESHI)
Divisional Accounts Officer
Rice Canal Division Mehar
@ KN Shah

(TAHQE AHMED KEHAR)
Executive Engineer
Rice Canal Division Mehar
@ KN Shah

(AMJAD PARVEZ DAWACHI)
Superintending Engineer
Western Sindh Circle
Larkana

BID EVALUATION REPORT

- 1 **Name of Procuring agency** Rice Canal Division Mehar @ KN Shah.
- 2 **Tender reference No.** N.I.T No. TC/G-55/968 dated 23.11.2015
- 3 **Tender Description /Name of Work/Item** Repair Direct Outlets along Kakol Branch (Ex- Mehar Branch) from RD 0+00 to RD 40+00 IP Side (P-11 Both Sides).
- 4 **Method Procurement** Single stage-single Envelope Procurement
- 5 **Tender Published** SPPRA Website 2015 No. 26090 dated 30.12.2015
i) Daily Jang dated 27.11.2015, ii) Daily Sindh Express dated 26 11.2015, iii) Express Tribune dated 27.11.2015, iv) Daily Umat dated 27.11.2015, v) Daily Awami Awaz dated 27.11.2015.
- 6 **Total Bid Document** 03 Nos.
- 7 **Total Bid received** 03 Nos.
- 8 **Technical Bid Opening date** Not Applicable
(If applicable)
- 9 **No. of Bid Technically qualified** Not Applicable
(If applicable)
- 10 **Bid(s) rejected** -Nil-
(If applicable)
- 11 **Financial Bid Opening date** 18.01.2016

S. No.	Name of Firm of Bidder	Cost offered by the Bidder	Ranking in terms of cost	Comparison with Estimated Cost	Reasons for acceptance /rejection	Remarks
1	Ali Sher Chandio	10439436	Lowest	Rate quoted 43% above	Qualified as per evaluation criteria	Found responsive Bid recommended for awarded of work
2	Pak Constt: Co.	10658445	Highest	Rate quoted 46% above	Qualified as per evaluation criteria	Responsive
3	Noor Mohammad & Brothers	11023461	Highest	Rate quoted 51% above	Qualified as per evaluation criteria	Responsive

Signature of the Chairman/members of the Committee

(FAYAZ AHMED QURESHI)
Divisional Accounts Officer
Rice Canal Division Mehar
@ KN Shah

(TARIQUE AHMED KEHAR)
Executive Engineer
Rice Canal Division Mehar
@ KN Shah

(AMJAD PARVEZ DAWACH)
Superintending Engineer
Western Sindh Circle
Larkana

BID EVALUATION REPORT

- 1 **Name of Procuring agency** Rice Canal Division Mehar (a) KN Shah.
- 2 **Tender reference No.** N.I.T No. TC/G-55/968 dated 23.11.2015
- 3 **Tender Description /Name of Work/Item** Constructing Retaining wall along Mehar Branch Kudan Head / Stone Pitching (P-12).
- 4 **Method Procurement** Single stage-single Envelope Procurement
- 5 **Tender Published** SPPRA Website 2015 No. 26090 dated 30.12.2014
i) Daily Jang dated 27.11.2015, ii) Daily Sun Express dated 26.11.2015, iii) Express Tribune dated 27.11.2015, iv) Daily Umat dated 27.11.2015, v) Daily Awami Awaz dated 27.11.2015.
- 6 **Total Bid Document** 03 Nos.
- 7 **Total Bid received** 03 Nos.
- 8 **Technical Bid Opening date (If applicable)** Not Applicable
- 9 **No. of Bid Technically qualified (If applicable)** Not Applicable
- 10 **Bid(s) rejected (If applicable)** -Nil-
- 11 **Financial Bid Opening date** 18.01.2016

S. No.	Name of Firm of Bidder	Cost offered by the Bidder	Ranking in terms of cost	Comparison with Estimated Cost	Reasons for acceptance /rejection	Remarks
1	Mohammad Aadil	4516992	Lowest	Rate quoted 98% above	Qualified as per evaluation criteria	Found responsive Bid recommended accepted
2	Noor Mohammad & Brothers	4608244	Highest	Rate quoted 102% above	Qualified as per evaluation criteria	Responsive
3	Sarwar & Sun Co.	4653870	Highest	Rate quoted 104% above	Qualified as per evaluation criteria	Responsive

Signature of the Chairman/members of the Committee

(FAYAZ AHMED QURESHI)
Divisional Accounts Officer
Rice Canal Division Mehar
(a) KN Shah

(TARIQUE AHMED KEHAR)
Executive Engineer
Rice Canal Division Mehar
(a) KN Shah

(AMJAD PARVEZ DABACHI)
Superintendent Engineer
Western Sindh Circle
Larkana

BID EVALUATION REPORT

- 1 **Name of Procuring agency** Rice Canal Division Mehar @ KN Shah.
- 2 **Tender reference No.** N.I.T No. TC/G-55/968 dated 23.11.2015
- 3 **Tender Description /Name of Work/Item** i) Construction (2 Nos. Road Bridges along Mado Distry.
ii) Constructing Road Bridges along Kalro Minor (Total 2 Bridges).
iii) Constructing Road Bridges along Nara Distry (Total 2 Bridges).
iv) Constructing Road Bridges along Kudan Branch (Total 1 Bridge).
v) Constructing Foot bridge along Kudan Branch, @ RD 16 Village Wali Mohammad Chandio (1 Bridge) (P-14).
- 4 **Method Procurement** Single stage-single Envelope Procurement
- 5 **Tender Published** SPPRA Website 2015 No. 26090 dated 30.12.2015 i) Daily Jang dated 27.11.2015. ii) Daily Sindh Express dated 26 11.2015. iii) Express Tribune dated 27.11.2015. iv) Daily Umat dated 27.11.2015. v) Daily Awami Awaz dated 27.11.2015.
- 6 **Total Bid Document** 03 Nos.
- 7 **Total Bid received** 03 Nos.
- 8 **Technical Bid Opening date (If applicable)** Not Applicable
- 9 **No. of Bid Technically qualified (If applicable)** Not Applicable
- 10 **Bid(s) rejected (If applicable)** -Nil-
- 11 **Financial Bid Opening date** 18.01.2016

S. No.	Name of Firm of Bidder	Cost offered by the Bidder	Ranking in terms of cost	Comparison with Estimated Cost	Reasons for acceptance /rejection	Remarks
1	Barkat Ali Awan	10747096	Lowest	Rate quoted 40% above	Qualified as per evaluation criteria	Found responsive Bid recommended for awarded of work
2	Jagirani Constt: Company	11054156	Highest	Rate quoted 44% above	Qualified as per evaluation criteria	Responsive
3	Rab Nawaz Shahani	11284451	Highest	Rate quoted 47% above	Qualified as per evaluation criteria	Responsive

Signature of the Chairman/members of the Committee

(FAYAZ AHMED QURESHI)
Divisional Accounts Officer
Rice Canal Division Mehar
@ KN Shah

(TARIQUE AHMED KEHAR)
Executive Engineer
Rice Canal Division Mehar
@ KN Shah

(AMJAD PARVEZ DAWACH)
Superintending Engineer
Western Sindh Circle
Larkana

BID EVALUATION REPORT

- 1 **Name of Procuring agency** Rice Canal Division Mehar @ KN Shah.
- 2 **Tender reference No.** N.I.T No. TC/G-55/968 dated 23.11.2015
- 3 **Tender Description /Name of Work/Item** C.C Lining along Kudan Branch RD 0+00 to 5+00 (P-15).
- 4 **Method Procurement** Single stage-single Envelope Procurement
- 5 **Tender Published** SPPRA Website 2015 No. 26090 dated 30.12.2015
i) Daily Jang dated 27.11.2015, ii) Daily Sindh Express dated 26 11.2015, iii) Express Tribune dated 27.11.2015, iv) Daily Umat dated 27.11.2015, v) Daily Awami Awaz dated 27.11.2015.
- 6 **Total Bid Document** 03 Nos.
- 7 **Total Bid received** 03 Nos.
- 8 **Technical Bid Opening date (If applicable)** Not Applicable
- 9 **No. of Bid Technically qualified (If applicable)** Not Applicable
- 10 **Bid(s) rejected (If applicable)** -Nil-
- 11 **Financial Bid Opening date** 18.01.2016

S. No.	Name of Firm of Bidder	Cost offered by the Bidder	Ranking in terms of cost	Comparison with Estimated Cost	Reasons for acceptance /rejection	Remarks
1	Three Star & Company	29238998	Lowest	Rate quoted 48% above	Qualified as per evaluation criteria	Found responsive Bid recommended for awarded work
2	Shahbaz Constt: Co.	30029241	Highest	Rate quoted 52% above	Qualified as per evaluation criteria	Responsive
3	Rab Nawaz Shahani	30621924	Highest	Rate quoted 55% above	Qualified as per evaluation criteria	Responsive

Signature of the Chairman/members of the Committee

(FAYAZ AHMED QURESHI)
Divisional Accounts Officer
Rice Canal Division Mehar
@ KN Shah

(TARIQUE AHMED KEHAR)
Executive Engineer
Rice Canal Division Mehar
@ KN Shah

(AMJAD PARVEZ DAWACH)
Superintending Engineer
Western Sindh Circle
Larkana

BID EVALUATION REPORT

- 1 **Name of Procuring agency** Rice Canal Division Mehar @ KN Shah.
- 2 **Tender reference No.** N.I.T No. TC/G-55/968 dated 23.11.2015
- 3 **Tender Description /Name of Work/Item** C.C Lining along Kudan branch RD 5+00 to 10+00 (P-16).
- 4 **Method Procurement** Single stage-single Envelope Procurement
- 5 **Tender Published** SPPRA Website 2015 No. 26090 dated 30.12.2015
i) Daily Jang dated 27.11.2015, ii) Daily Sindh Express dated 26 11.2015, iii) Express Tribune dated 27.11.2015, iv) Daily Umat dated 27.11.2015, v) Daily Awami Awaz dated 27.11.2015.
- 6 **Total Bid Document** 03 Nos.
- 7 **Total Bid received** 03 Nos.
- 8 **Technical Bid Opening date (If applicable)** Not Applicable
- 9 **No. of Bid Technically qualified (If applicable)** Not Applicable
- 10 **Bid(s) rejected (If applicable)** -Nil-
- 11 **Financial Bid Opening date** 18.01.2016

S. No.	Name of Firm of Bidder	Cost offered by the Bidder	Ranking in terms of cost	Comparison with Estimated Cost	Reasons for acceptance /rejection	Remarks
1	Ali Enterprises	29337778	Lowest	Rate quoted 48.50% above	Qualified as per evaluation criteria	Found responsive Bid recommended for awarded of work
2	Shahbaz Constt: Co.	30226802	Highest	Rate quoted 53% above	Qualified as per evaluation criteria	Responsive
3	A I S International	31017046	Highest	Rate quoted 57% above	Qualified as per evaluation criteria	Responsive

Signature of the Chairman/members of the Committee

(FAYAZ AHMED QURESHI)
Divisional Accounts Officer
Rice Canal Division Mehar
@ KN Shah

(TARIQ AHMED KEHAR)
Executive Engineer
Rice Canal Division Mehar
@ KN Shah

(AMJAD PARVEZ DAWACH)
Superintending Engineer
Western Sindh Circle
Larkana

BID EVALUATION REPORT

- 1 **Name of Procuring agency** Rice Canal Division Mehar @ KN Shah.
- 2 **Tender reference No.** N.I.T No. TC/G-55/968 dated 23.11.2015
- 3 **Tender Description /Name of Work/Item** C.C Lining along Kudan Branch RD 10+00 to 15+00 (P-17).
- 4 **Method Procurement** Single stage-single Envelope Procurement
- 5 **Tender Published** SPPRA Website 2015 No. 26090 dated 30.12.2015
i) Daily Jang dated 27.11.2015, ii) Daily Sindh Express dated 26 11.2015, iii) Express Tribune dated 27.11.2015, iv) Daily Umat dated 27.11.2015, v) Daily Awami Awaz dated 27.11.2015.
- 6 **Total Bid Document** 03 Nos.
- 7 **Total Bid received** 03 Nos.
- 8 **Technical Bid Opening date (If applicable)** Not Applicable
- 9 **No. of Bid Technically qualified (If applicable)** Not Applicable
- 10 **Bid(s) rejected (If applicable)** -Nil-
- 11 **Financial Bid Opening date** 18.01.2016

S. No.	Name of Firm of Bidder	Cost offered by the Bidder	Ranking in terms of cost	Comparison with Estimated Cost	Reasons for acceptance /rejection	Remarks
1	Zaryab Construction Company	29416803	Lowest	Rate quoted 48.90% above	Qualified as per evaluation criteria	Found responsive Bid recommended for awarded of work
2	Barkat Ali Awan	29831681	Highest	Rate quoted 51% above	Qualified as per evaluation criteria	Responsive
3	Mohammad Aadil	30424363	Highest	Rate quoted 54% above	Qualified as per evaluation criteria	Responsive

Signature of the Chairman/members of the Committee

(FAYAZ AHMED QURESHI)
Divisional Accounts Officer
Rice Canal Division Mehar
@ KN Shah

(TARIQ AHMED KEHAR)
Executive Engineer
Rice Canal Division Mehar
@ KN Shah

(AMJAD PARVEZ DAWACHI)
Superintending Engineer
Western Sindh Circle
Larkana

BID EVALUATION REPORT

1	Name of Procuring Agency	Rice Canal Division Mehar @ KN Shah.
2	Tender reference No.	N.I.T No. TC/G-55/968 dated 23.11.2015
3	Tender Description /Name of Work/Item	C.C Lining along Kudan branch RD 15+00 to 20+00 (P-18).
4	Method Procurement	Single stage-single Envelope Procurement
5	Tender Published	SPPRA Website 2015 No. 26090 dated 30.12.2015 i) Daily Jang dated 27.11.2015, ii) Daily Sindh Express dated 26 11.2015, iii) Express Tribune dated 27.11.2015, iv) Daily Umat dated 27.11.2015, v) Daily Awami Awaz dated 27.11.2015.
6	Total Bid Documents	03 Nos.
7	Total Bid received	03 Nos.
8	Technical Bid Opening date (If applicable)	Not Applicable
9	No. of Bid Technically qualified (If applicable)	Not Applicable
10	Bid(s) rejected (If applicable)	-Nil-
11	Financial Bid Opening date	18.01.2016


S. No.	Name of Firm of Bidder	Cost offered by the Bidder	Ranking in terms of cost	Comparison with Estimated Cost	Reasons for acceptance /rejection	Remarks
1	Zaryab Construction Company	29460971	Lowest	Rate quoted 48.30% above	Qualified as per evaluation criteria	Found responsive Bid recommended for awarded of work
2	Rab Nawaz Shahani	29997347	Highest	Rate quoted 51% above	Qualified as per evaluation criteria	Responsive
3	Noor Mohammad & Brothers	30791979	Highest	Rate quoted 55% above	Qualified as per evaluation criteria	Responsive

Signature of the Chairman/members of the Committee

(FAYAZ AHMED QURESHI)
Divisional Accounts Officer
Rice Canal Division Mehar
@ KN Shah

(TARIQUE AHMED KEHAR)
Executive Engineer
Rice Canal Division Mehar
@ KN Shah

(AMJAD PARVEZ DAWACHI)
Superintending Engineer
Western Sindh Circle
Larkana



OFFICE OF THE CHIEF ENGINEER SUKKUR BARRAGE
RIGHT BANK REGION LARKANA.

MIRO KILAN RAOD WAPDA COLONY LARKANA

Email: cerbrlarkana@hotmai.com

Fax No. 074-4753062

Ph: 074-4753063

No: WB-II-RBR/Procurement Committee/WSC/2015-16/4-W/ Larkana dated 21/11/15

NOTIFICATION

With the approval of competent authority i.e Secretary to Government of Sindh Irrigation Department Karachi, vide letter No. 1119-SO (P) 2013-11 dated 08.10.2013 procurement committee comprising of following officer is hereby constituted in terms of rules 7 of SPP Rules 2010 (Amended-2013) for procurement of ADP/Non-ADP approved scheme for the year 2015-16.

- | | |
|--|--------------------|
| 1. Superintending Engineer
Western Sindh Circle,
Larkana | Chairman ✓ |
| 2. Executive Engineer
Rice Canal Division Mehar,
a/ KN Shah | Member ✓ |
| 3. Divisional Account Officer
Rice Canal Division Mehar,
a/ KN Shah | Member Secretary ✓ |

(NAZIR AHMED MAHAR)
CHIEF ENGINEER

Sukkur Barrage Right Bank Region
Larkana

C.C

1. The Secretary, to Government of Sindh, Irrigation Department, Karachi.
2. The Managing Director SPPRA Barrack-8/4-A Secretariat Court Road Karachi for information and declaration on website.
3. The Chairman - Superintending Engineer Western Sindh Circle Larkana.
4. The Member - Executive Engineer, Rice Canal Division, Mehar a/ KN Shah
5. The Member - Secretary, Divisional Accounts Officer, Rice Canal Division, Mehar a/ KN Shah for information.

(NAZIR AHMED MAHAR)
CHIEF ENGINEER

Sukkur Barrage Right Bank Region
Larkana

COMPARATIVE STATEMENT

NAME OF WORK: (I) CONSTRUCTING SUMP AND PUMP HOUSE OF PUMPING STATION @ MELIAR MAIN DRAIN TO SUPPLEMENT IRRIGATING CHANNEL

(II) SUPPLY AND FIXING 2 NOS. PUMPS ALONG WITH MOTOR AND ACCESSORIES (P-01)

ESTIMATE SANCTIONED BY THE CHIEF ENGINEER SUKKUR BARRAGE RIGHT BANK REGION LARKANA

S. NO.	ITEM OF WORK	ESTIMATE		RATES QUOTED BY THE CONTRACTOR		
		AMOUNT	ACTUAL PREMIUM AS PER TECH. SANCTION	GHULAM HYDER KHUSHK	MADNI ENGINEER RING CONSTT:	JAGIRANI CONSTT: COMPANY
01.	Schedule "B" attached amount of Schedule "B".	P-I : 5671571/-		Sch: "B" Amount Rs. 5671571/-		
	Non-Schedule Item for S&F 2 Nos. pumps etc. complete.	P-II : 18412960/-		Rate quoted by the Contractor Rs. 34% above		
02.	Cartage of Material	815865/-	14.38	Rs. 1928334/-	38% Above	41% Above
				SUB-TOTAL RS: 7599905/-		
				Rs: 18914400/-		
				Non-Schedule Item S&F 2 Nos. Pumps etc. Complete		
		TOTAL		Rs. 26514305/-	26841768/-	27172915/-

Estimate cost 24900396/-

(-) Cost of Agreement = 1613909/- Financial Review Difference 34% Estimate above

$$\frac{1613909 \times 100}{24900396} = 6.48\% \text{ above the estimate}$$

Note: The lowest rate quoted at Rs. 34% by GHULAM HYDER KHUSHK Government contractor above the Schedule "B" is reasonable hence recommended.

AMJAD PURVEZ DAWACHHI
Superintending Engineer
Larkana Region

FAYAZ AHMED QURESHI
Divisional Engineer
Larkana Region

(TARIQ AHMED KEHAR)
Senior Engineer
Larkana Region

COMPARATIVE STATEMENT

- NAME OF WORK:**
- (I) CONSTRUCTING DELIVERY BAY OF PUMPING STATION @ MEHAR MAIN DRAIN TO SUPPLEMENT IRRIGATION CHANNEL.
- (II) CONSTRUCTING (2 NOS.) ROAD BRIDGE @ PUMPING STATION TO SUPPLEMENT IRRIGATION CHANNELS.
- (III) CONSTRUCTING AQUEDUCT OVER MADO DISTRY


ESTIMATE NO. 223 OF 1988 UNDER CANAL AND IRRIGATION WORKS DEPARTMENT, RICE CANAL DIVISION, WESTERN SINDH REGION LARKANA

S. NO.	ITEM OF WORK	ESTIMATE		RATES QUOTED BY THE CONTRACTOR		
		AMOUNT	ACTUAL PREMIUM AS PER TECH. SANCTION	BAKHAT HUSSAIN CONSTRUCTION	GHULAM HYDER KHUSHK	RAB NAWAZ SHAHANI
01.	Schedule "B" attached amount of Schedule "B".	P-1, II, III 3951307/-	24.43%	Sch: "B" Amount Rs. 3951307/- Rate quoted by the Contractor Rs. 42.50% above	46% Above	48% Above
02.	Cartage of Material	965539/-		Rs. 1679305/-		
	TOTAL	4916846/-		Cost of work Rs. 5630612/-	5768908/-	5847934/-


Estimate cost 4916846/- (-) Cost of Agreement = 713766/- Financial Review Difference 42.50% Estimate above

$713766 \times 100 = 14.50\%$ above the estimate
4916846/-

Note: The lowest rate quoted at Rs. 42.50% by BAKHAT HUSSAIN CONSTRUCTION Government contractor above the Schedule "B" is reasonable hence recommended.


(AMJAD PARVEZ DAWACH)
Superintending Engineer
Western Sindh Circle Larkana

(FAYAZ AHMED QURESHI)
Divisional Accounts Officer
Rice Canal Division Mehar
(@) KN Shah


(TARIQ AHMED KEHAR)
Executive Engineer
Rice Canal Division Mehar
(@) KN Shah

COMPARATIVE STATEMENT

- NAME OF WORK:** (I) CONSTRUCTION OF LEADING CHANNEL FROM MEHAR MAIN DRAIN PUMPING STATION TO FPRD 292
 (II) CONSTRUCTION OF RETAINING WALL ALONG PUMPING STATION @ MEHAR MAIN DRAIN FOR SUPPLEMENT IRRIGATION CHANNELS (75 FT B/S) (P-03).

ESTIMATE SANCTIONED BY THE CHIEF ENGINEER SUKKUR BARRAGE RIGHT BANK REGION LARKANA


S. NO.	ITEM OF WORK	ESTIMATE		RATES QUOTED BY THE CONTRACTOR		
		AMOUNT	ACTUAL PREMIUM AS PER TECH: SANCTION	BAKILAT HUSSAIN CONSTT:	MADNI ENGINEERING CONSTT:	PAK CONSTT: CO.
01.	Schedule "B" attached amount of Schedule "B".	P-I 6603441/- P-II 1837074/-	-	Sch: "B" I Amount Rs. 6603441/- Rate quoted by the Contractor Rs. 15% above	18% Above	19% Above
02.	Cartage of Material	513223/-	27.93%	Sch: "B" II Amount Rs. 1837074/- Rate quoted by the Contractor Rs. 46% above	& 48% Above	& 50% Above
TOTAL		8953738/-		Cost of work Rs. 10276085/-	10510929/-	10613706/-

Estimate cost 8953738/-


(-) Cost of Agreement = 1322347/- Financial Review Difference 15% & 46 Estimate above = 1322347 x 100 = 14.70% above the estimate

8953738/-

Note: The lowest rate quoted at Rs. 15% & 46% by Bakhat Hussain Constt: Government contractor above the Schedule "B" is reasonable hence recommended.


FAYAZ AHMED QURESHI
 Superintending Engineer
 West Sindh Division Larkana

(FAYAZ AHMED QURESHI)
 Divisional Accounts Officer
 Rice Canal Division Mehar
 Larkana


(FAYAZ AHMED KEHAR)
 Executive Engineer
 Rice Canal Division Mehar
 Larkana

COMPARATIVE STATEMENT

- NAME OF WORK:** (I) CONSTRUCTION OF LEADING CHANNEL FROM MEHAR MAIN DRAIN PUMPING STATION TO FPRD 292
 (II) CONSTRUCTION OF RETAINING WALL ALONG PUMPING STATION @ MEHAR MAIN DRAIN FOR SUPPLEMENT IRRIGATION CHANNELS (75 FT B/S) (P-04).

ESTIMATE SANCTIONED BY THE CHIEF ENGINEER SUKKUR BARRAGE RIGHT BANK REGION LARKANA

S. NO.	ITEM OF WORK	ESTIMATE		RATES QUOTED BY THE CONTRACTOR		
		AMOUNT	ACTUAL PREMIUM AS PER TECH: SANCTION	BAKHAT HUSSAIN CONSTT:	MADNI ENGINEERING CONSTT:	AVIS INTERNATIONAL
01.	Schedule "B" attached amount of Schedule "B".	P-I 6603441/- P-II 1028145/-	-	Sch: "B" I Amount Rs. 6603441/- Rate quoted by the Contractor Rs. 14.50% above Rs. 957499/-	17% Above & 50% Above	18.0% Above & 52% Above
02.	Cartage of Material	322858/-	31.40%	Sch: "B" II Amount Rs. 1028145/- Rate quoted by the Contractor Rs. 49% above Rs. 503791/-		
TOTAL		7954444/-		Rs. 9092876/-	9268243/-	9354840/-

Estimate cost 7954444/-

(-) Cost of Agreement = 1138432/-
9092876/-


Financial Review


Difference 14.50% & 49%


Estimate above

$1138432 \times 100 = 14.31\%$ above the estimate
7954444/-

Note: The lowest rate quoted at Rs. 14.50% & 49% by Bakhat Hussain
Constt: Government contractor above the Schedule "B" is reasonable hence recommended.


(AMIR PARVEZ DAWACHI)
 Superintending Engineer
 Rice Canal Division, Mehar
 Larkana


(FAYAZ AHMED QURESHI)
 Divisional Accounts Officer
 Rice Canal Division, Mehar
 Larkana


(TAHIR AHMED KEHAR)
 Executive Engineer
 Rice Canal Division, Mehar
 Larkana

COMPARATIVE STATEMENT

NAME OF WORK: CONSTRUCTION OF BUND SLUICE AT RD 248 FP BUND AND CONSTRUCTION OF RETAINING WALL ALONG FP BUND SLUICE (P-05).

ESTIMATE SANCTIONED BY THE CHIEF ENGINEER SUKKUR BARRAGE RIGHT BANK REGION LARKANA

S. NO.	ITEM OF WORK	ESTIMATE		RATES QUOTED BY THE CONTRACTOR		
		AMOUNT	ACTUAL PREMIUM AS PER TECH: SANCTION	BARKAT ALI AWAN	MOHAMMAD NAWAZ TUNIO	AIS INTERNATI ONAL
01.	Schedule "B" attached amount of Schedule "B".	13558850/-	26.21	Sch: "B" Amount Rs. 13558850/- Rate quoted by the Contractor Rs. 44% above	48% Above	51% Above
02.	Cartage of Material	3554027/-		Rs. 5965894/-		
03.	Non-Schedule Item	495000/-		Non -Schedule Item Rs: 495000/-	Non-Schedule Rs: 495000/-	Non-Schedule Rs: 495000/-
	TOTAL	17607877/-		Rs. 20019744/-	20562098/-	20968863/-

Estimate cost (-) Cost of Agreement = 2411867/-
20019744/-


Financial Review

Difference 44%


Estimate above

$$\frac{2411867 \times 100}{17607877} = 13.69\% \text{ above the estimate}$$

Note: The lowest rate quoted at Rs. 44% by **BARKAT ALI AWAN** Government contractor above the Schedule "B" is reasonable hence recommended.


(AMJAD PARVEZ DAWACH)
 Superintendent Engineer
 Western Sindh Circle Larkana

(FAYAZ AHMED QURESHI)
 Divisional Accounts Officer
 Rice Canal Division Mehar
 (a) KN Shah


(TARIQ AHMED KEHAR)
 Executive Engineer
 Rice Canal Division Mehar
 (a) KN Shah

COMPARATIVE STATEMENT

NAME OF WORK: CONSTRUCTION OF BUND SLUICE AT RD 275 FP BUND AND CONSTRUCTION OF RETAINING WALL ALONG FP BUND SLUICE (P-06).

ESTIMATE SANCTIONED BY THE CHIEF ENGINEER SUKKUR BARRAGE RIGHT BANK REGION LARKANA

S. NO.	ITEM OF WORK	ESTIMATE		RATES QUOTED BY THE CONTRACTOR		
		AMOUNT	ACTUAL PREMIUM AS PER TECH: SANCTION	SALWA CONSTT: & ENGINEERING SERVICE	MOHAMMAD NAWAZ TUNIO	AIS INTERNATIONAL
01.	Schedule "B" attached amount of Schedule "B".	13558850/-	26.21	Sch: "B" Amount Rs. 13558850/- Rate quoted by the Contractor Rs. 43.95% above	46% Above	49% Above
02.	Cartage of Material	3554027/-		Rs. 5959115/-	Non-Schedule Rs: 495000/-	Non-Schedule Rs: 495000/-
03.	Non-Schedule Item	495000/-		Non -Schedule Item Rs: 495000/-	Non-Schedule Rs: 495000/-	Non-Schedule Rs: 495000/-
	TOTAL	17607877/-		Rs. 20012965/-	20290921/-	20697686/-

Estimate cost 17607877/-


(-) Cost of Agreement = 2405087/- Financial Review
Difference 43.95%
Estimate above

$\frac{2405087 \times 100}{17607877} = 13.65\%$ above the estimate

Note: The lowest rate quoted at Rs. 43.95% by SALWA CONSTT: & ENGINEERING SERVICE Government contractor above the Schedule "B" is reasonable hence recommended.

(AMJAD PARVEZ DAWACH)
Superintending Engineer
Western Sindh Circle Larkana

(FAYAZ AHMED QURESHI)
Divisional Accounts Officer
Rice Canal Division Mehr


Executive Engineer
Rice Canal Division Mehr
at K.V. Shadi

COMPARATIVE STATEMENT

NAME OF WORK: CONSTRUCTION OF BUND SLUCE AT RD 295 FP BUND AND CONSTRUCTION OF REMAINING WALL ALONG FP BUND SLUCE (P-07).

ESTIMATE SANCTIONED BY THE CHIEF ENGINEER SUKKUR BARRAGE RIGHT BANK REGION LARKANA


S. NO.	ITEM OF WORK	ESTIMATE		RATES QUOTED BY THE CONTRACTOR		
		AMOUNT	ACTUAL PREMIUM AS PER TECH: SANCTION	M/S MOHAMMAD NAWAZ TUNIO	PAK CONSTT: CO.	AI'S INTERNATI ONAL
01.	Schedule "B" attached amount of Schedule "B".	13558850/-	26.21	Sch: "B" Amount Rs. 13558850/- Rate quoted by the Contractor Rs. 44.90% above Rs. 6087924/-	48% Above	51% Above
02.	Cartage of Material	3554027/-			Non-Schedule Rs: 495000/-	Non-Schedule Rs: 495000/-
03.	Non-Schedule Item	4950000/-		Non -Schedule Item Rs: 4950000/-	Non-Schedule Rs: 495000/-	Non-Schedule Rs: 495000/-
TOTAL		17607877/-		Rs. 20141774/-	20562098/-	20968863/-

Estimate cost (-) Cost of Agreement = 2533897/- Financial Review
17607877/- 20141774/- Difference 44.90%
 Estimate above
 2533897 x 100 = 14.39% above the estimate
 17607877/-

Note: The lowest rate quoted at Rs. 44.90% by Mohammad Nawaz Tunio Government contractor above the Schedule "B" is reasonable hence recommended.

SAJJAD PARVEZ BUREACH
Superintending Engineer
Cantt. & Station Eng. Division

MOHAMMAD AHMED QURESHI
Divisional Accounts Officer
Cantt. & Station Eng. Division


MOHTASHIM AHMED KEHAR
Executive Engineer
Cantt. & Station Eng. Division

COMPARATIVE STATEMENT

NAME OF WORK: CONSTRUCTION OF MANJAN X-REGULATOR ALONG RAJWAHI BRANCH RD 49-00 (P-08)

ESTIMATE SANCTIONED BY THE CHIEF ENGINEER SUKKUR BARRAGE RIGHT BANK REGION LARKANA


S. NO.	ITEM OF WORK	ESTIMATE			RATES QUOTED BY THE CONTRACTOR		
		AMOUNT	ACTUAL PREMIUM AS PER TECH. SANCTION		PAK CONSTT: CO.	BAKHAT HUSSAIN COSTT:	ABDUL RAZAQUE
01.	Schedule "B" attached amount of Schedule "B".	1631247/-	+4.21		Sch: "B" Amount Rs. 1631247/- Rate quoted by the Contractor Rs. 62% above	66% Above	69% Above
02.	Cartage of Material	721182/-				Non-Schedule Rs: 4077000/-	Non-Schedule Rs: 4077000/-
03.	Non-Schedule Item	4077000/-			Non --Schedule Item Rs: 4077000/-		
TOTAL		6429429/-			Rs. 6719620/-	6784870/-	6833807/-

Estimate cost (-) Cost of Agreement = 290191/-
6429429/- 6719620/-


Financial Review
Difference 62%
Estimate above

$290191 \times 100 = 4.51\%$ above the estimate
6429429/-

Note: The lowest rate quoted at Rs. 62% by PAK CONSTT: CO, Government contractor above the Schedule "B" is reasonable hence recommended.


SUPERINTENDING ENGINEER

P. M. JAMALI
Divisional Accounts Officer


DIVISIONAL ACCOUNTS OFFICER

COMPARATIVE STATEMENT


- NAME OF WORK:** (i) DE-SILTING ALONG KAKOL BRANCH RD 0+00 TO 49+00.
 (ii) CONSTRUCTION OF RETAINING WALL ALONG RADHAN BRANCH RD 0+0 TO 0+250 B/S (P-09).


ESTIMATE SANCTIONED BY THE CHIEF ENGINEER SUKKUR BARRAGE RIGHT BANK REGION LARKANA

S. NO.	ITEM OF WORK	ESTIMATE		RATES QUOTED BY THE CONTRACTOR		
		AMOUNT	ACTUAL PREMIUM AS PER TECH: SANCTION	AI S INTERNATIONAL	MAZHAR ALI	GUL MOHAMMA D CHANNA
01.	Schedule "B" attached amount of Schedule "B".	P-I 2993588/- P-II 4157611/-	-	Sch: "B" I Amount Rs. 2993588/- Rate quoted by the Contractor Rs. 15% above Rs. 449038/-	18% Above	19% Above
02.	Cartage of Material	1241513/-		Sch: "B" II Amount Rs. 4157611/- Rate quoted by the Contractor Rs. 48% above Rs. 1995653/-	&	&
03.	Non-Schedule Item	6725544/-	29.86%	Non-schedule Item Rs: 6725544/-	52% Above	58% Above
	TOTAL	15118256/-		Cost of work Rs. 16321434/-	16577546/-	16856938/-

Estimate cost (-) Cost of Agreement = 1203178/- Financial Review Difference 15% & 48% Estimate above = $\frac{1203178 \times 100}{15118256} = 7.95\%$ above the estimate

Note: The lowest rate quoted at Rs. 15% & 48% by AI S International Government contractor above the Schedule "B" is reasonable hence


FAYZ AHMED QURESHI
 Sub-divisional Accounts Officer
 Sukkur Barrage Right Bank Region Larkana


MAZHAR ALI
 Sub-divisional Accounts Officer
 Sukkur Barrage Right Bank Region Larkana

COMPARATIVE STATEMENT


NAME OF WORK: (I) EARTH WORK ALONG KAKOL BRANCH RD 0-00 TO 25+00 NIP SIDE.
 (II) CONSTRUCTION OF RETAINING WALL ALONG MEHAR (U/S KAKOL BRANCH) RD 38 NIP SIDE = 750 FT. (P-10).


ESTIMATE SANCTIONED BY THE CHIEF ENGINEER SUKKUR BARRAGE RIGHT BANK REGION LARKANA

S. NO.	ITEM OF WORK	ESTIMATE		RATES QUOTED BY THE CONTRACTOR		
		AMOUNT	ACTUAL PREMIUM AS PER TECH. SANCTION	MAZHAR ALI	PAK CONST: CO.	NOOR MOHAMMAD & BROTHERS
01.	Schedule "B" attached amount of Schedule "B".	P-I 4575903/- P-II 3419954/-	-	Sch: "B" I Amount Rs. 4575903/- Rate quoted by the Contractor Rs. 17% above Rs. 777904/-	18% Above	19% Above
02.	Cartage of Material	2542309/-	74.33%	Sch: "B" II Amount Rs. 3419954/- Rate quoted by the Contractor Rs. 92% above Rs. 3146357/-	& 95% Above	& 98% Above
TOTAL		10538166/-		Cost of work Rs. 11920118/-	12068476/-	12216834/-

Estimate cost 10538166/- (-) Cost of Agreement 11920118/- = 1381952/- Financial Review Difference 17% & 92% Estimate above 1381952 x 100 = 13.11% above the estimate 10538166/-

Note: The lowest rate quoted at Rs. 17% & 92% by MAZHAR ALI Government contractor above the Schedule "B" is reasonable hence recommended.


FAYAZ AHMED QURESHI
 Divisional Accounts Officer
 P.W. Section, District Office, Sukkur


MAZHAR ALI
 Chief Engineer
 Right Bank Division, Mehar

COMPARATIVE STATEMENT

NAME OF WORK: REPAIR DIRECT OUTLETS ALONG KAKOL BRANCH (EX-MEJIAR BRANCH) FROM RD. 0-00 TO RD. 40-00 IP SIDE (P-II BOTH SIDES).

ESTIMATE SANCTIONED BY THE CHIEF ENGINEER SUKKUR BARRAGE RIGHT BANK REGION LARKANA

S. NO.	ITEM OF WORK	ESTIMATE		RATES QUOTED BY THE CONTRACTOR		
		AMOUNT	ACTUAL PREMIUM AS PER TECH. SANCTION	ALISHER CHANDIO	PAK CONSTRT. CO.	NOOR MOHAMMIAD & BROTHERS
01.	Schedule "B" attached amount of Schedule "B".	7300305/-		Sch: "B" Amount Rs. 7300305/- Rate quoted by the Contractor Rs. 43% above	46% Above	51% Above
02.	Cartage of Material	1815300/-		Rs. 3139131/-		
	TOTAL	9115605/-		Rs. 10439436/-	10658445/-	11023461/-

Estimate cost 9115605/-

(-) Cost of Agreement = 1323831/- Financial Review Difference 43% Estimate above

$$\frac{1323831 \times 100}{9115605} = 14.52\% \text{ above the estimate}$$

Note: The lowest rate quoted at Rs. 43% by ALJ SHER CHANDIO Government contractor above the Schedule "B" is reasonable hence recommended.

(AMJAD PARVEZ DAWACH)
 Superintendent Engineer
 Government Sindh

(FAYAZ AHMED QURESHI)
 Divisional Accounts Officer
 Road Division Muzhar

(TARACE AHMED KEIAR)
 Executive Engineer
 Road Canal Division
 Muzhar

COMPARATIVE STATEMENT

NAME OF WORK: CONSTRUCTING RETAINING WALL ALONG MEHAR BRANCH KUDAN HEAD / STONE PITCHING (P-12).

ESTIMATE SANCTIONED BY THE CHIEF ENGINEER SUKKUR BARRAGE RIGHT BANK REGION LARKANA

S. NO.	ITEM OF WORK	ESTIMATE		RATES QUOTED BY THE CONTRACTOR		
		AMOUNT	ACTUAL PREMIUM AS PER TECH. SANCTION	MOHAMMAD AADIL	NOOR MOHAMMAD & BROTHERS	SARWAR & SUN COMPANY
01.	Schedule "B" attached amount of Schedule "B".	2281309/-	79.05	Sch: "B" Amount Rs. 2281309/- Rate quoted by the Contractor Rs. 98% above		
02.	Cartage of Material	1803545/-		Rs. 2235683/-		
	TOTAL	4084854/-		Rs. 4516992/-	4608244/-	4653870/-

Estimate cost **4084854/-**

(-) Cost of Agreement = **432137/-**

Financial Review Difference **98%** Estimate above

$\frac{432137 \times 100}{4084854} = 10.57\%$ above the estimate

Note: The lowest rate quoted at Rs. 98% by MOHAMMAD AADIL Government contractor above the Schedule "B" is reasonable hence recommended.

MOHAMMAD FAHIM EZ DADACHNI
Superintending Engineer
Divisional Engineer, Mehar

MOHAMMED GURESHH
Divisional Accounts Officer
Divisional Engineer, Mehar


Moazzam Khalid, Engineer
Principal Engineer, Divisional Mehar

COMPARATIVE STATEMENT

- NAME OF WORK:**
- (I) CONSTRUCTION (2 NOS.) ROAD BRIDGES ALONG MADDO DISTRY.
 - (II) CONSTRUCTION ROAD BRIDGES ALONG KALRO MINOR (TOTAL 2 BRIDGES).
 - (III) CONSTRUCTION ROAD BRIDGES ALONG NARA DSITRY (TOTAL 2 BRIDGES).
 - (IV) CONSTRUCTION ROAD BRIDGES ALONG KUDAN BRANCH (TOTAL 1 BRIDGE).
 - (V) CONSTRUCTING FOOT BRIGE ALONG KUDAN BRANCH. @ RD I6 VILLAGE WALI MOHAMMAD CHANDIO (1BRIDG) (P-14)

ESTIMATE SANCTIONED BY THE CHIEF ENGINEER SUKKUR BARRAGE RIGHT BANK REGION LARKANA


S. NO.	ITEM OF WORK	ESTIMATE		RATES QUOTED BY THE CONTRACTOR		
		AMOUNT	ACTUAL PREMIUM AS PER TECH: SANCTION	BARKAT ALI AWAN	JAGIRANI CONSTT: COMPANY	RAB NAWAZ SHAHANI
01.	Schedule "B" attached amount of Schedule "B".	P- I, II, III, IV, V	7676497/-	Sch: "B" Amount Rs. 7676497/- Rate quoted by the Contractor Rs. 40% above	44% Above	47% Above
02.	Cartage of Material	I, II, III, IV, V	1707680/-	Rs. 3070599/-		
	TOTAL		9384177/-	Cost of work Rs. 10747096/-	11054156/-	11284451/-

Estimate cost 9384177/-


(-) Cost of Agreement = 1362919/- Financial Review
Difference 40%
Estimate above

$\frac{1362919 \times 100}{9384177} = 14.52\%$ above the estimate

Note: The lowest rate quoted at Rs. 40% by BARKAT ALI AWAN contractor above the Schedule "B" is reasonable hence recommended.


(AMJAD PARVEZ DAWACH)
Superintending Engineer
Western Sindh Circle Larkana

(FAYAZ AHMED QURESHI)
Divisional Accounts Officer
Rice Canal Division Mehar
@ KN Shah


(TARIQUE AHMED KEHAR)
Executive Engineer
Rice Canal Division Mehar
@ KN Shah

COMPARATIVE STATEMENT

NAME OF WORK: C.C LINING ALONG KUDAN BRANCH RD 0+00 TO 5+00 (P-15)

ESTIMATE SANCTIONED BY THE CHIEF ENGINEER SUKKUR BARRAGE RIGHT BANK REGION LARKANA

S. NO.	ITEM OF WORK	ESTIMATE		RATES QUOTED BY THE CONTRACTOR		
		AMOUNT	ACTUAL PREMIUM AS PER TECH: SANCTION	THREE STAR & COMPANY	SHAHBAZ CONSTT: CO.	RAB NAWAZ SHAHANI
01.	Schedule "B" attached amount of Schedule "B".	19756080/-	30.42	Sch: "B" Amount Rs. 19756080/- Rate quoted by the Contractor Rs. 48% above	52% Above	55% Above
02.	Cartage of Material	5958933/-		Rs. 9482918/-		
	TOTAL	25715013/-		Rs. 29238998/-	30029241/-	30621924/-

Estimate cost 25715013/-

(-) Cost of Agreement = 3523985/-

29238998/-

Financial Review

Difference 48%

Estimate above

$\frac{3523985 \times 100}{29238998} = 13.70\%$ above the estimate
25715013/-

Note: The lowest rate quoted at Rs. 48% by Three Star & Company Government contractor above the Schedule "B" is reasonable hence recommended.

(AMJAD PARVEZ DAWACH)
Superintending Engineer
Western Sindh Circle Larkana

(FAYAZ AHMED QURESHI)
Divisional Accounts Officer
Rice Canal Division Mehar
(@ KN Shah

(TARBEER AHMED KEHAR)
Executive Engineer
Rice Canal Division Mehar
(@ KN Shah

COMPARATIVE STATEMENT

NAME OF WORK: CUTTING ALONG KUDAN BRANCH RD 5+00 TO 10+00 (P-16)

ESTIMATE SANCTIONED BY THE CHIEF ENGINEER SUKKUR BARRAGE RIGHT BANK REGION LARKANA

S.	ITEM / QUANTITY	ACTUAL QUANTITY	SANCTION	CONTRACTOR	AIS INTERNATIONAL
01.	Schedule "B" attached amount of Schedule "B".	19756080/-	30.42	Sch: "B" Amount Rs. 19756080/- Rate quoted by the Contractor Rs. 48.50% above	53% Above
02.	Cartage of Material	5958933/-		Rs. 9581698/-	
	TOTAL	25715013/-		Cost of work Rs. 29337778/-	30226802/-

Estimate cost 25715013/-

(-) Cost of Agreement = 3622765/- Financial Review Difference 48.50% Estimate above

$\frac{3622765 \times 100}{25715013} = 14\%$ above the estimate

Note: The lowest rate quoted at Rs. 48.50% by ALI ENTERPRISES Government contractor above the Schedule "B" is reasonable hence recommended.

(AMJAD PARVEZ DAWACH)
Superintending Engineer
Western Sindh Circle Larkana

(FAYAZ AHMED QURESHI)
Divisional Accounts Officer
Rice Canal Division Mehar
@ KN Shah

(TARIQUE AHMED KEHAR)
Executive Engineer
Rice Canal Division Mehar
@ KN Shah

COMPARATIVE STATEMENT

NAME OF WORK: C.C LINING ALONG KUDAN BRANCH RD 10+00 TO 15+00 (P-17)

ESTIMATE SANCTIONED BY THE CHIEF ENGINEER SUKKUR BARRAGE RIGHT BANK REGION LARKANA


S. NO.	ITEM OF WORK	ESTIMATE		RATES QUOTED BY THE CONTRACTOR		
		AMOUNT	ACTUAL PREMIUM AS PER TECH: SANCTION	ZARYAB CONSTRUCTION COMPANY	BARKAT ALI AWAN	MOHAMMAD AADIL
01.	Schedule "B" attached amount of Schedule "B".	19756080/-	30.42	Sch: "B" Amount Rs. 19756080/- Rate quoted by the Contractor Rs. 48.90% above	51% Above	54% Above
02.	Cartage of Material	5958933/-		Rs. 9660723/-		
	TOTAL	25715013/-		Cost of work Rs. 29416803/-	29831681/-	30424363/-


Estimate cost 25715013/-


(-) Cost of Agreement = 3701790/- Financial Review Difference 48.90% Estimate above

$\frac{3701790 \times 100}{25715013} = 14.39\%$ above the estimate

Note: The lowest rate quoted at Rs. 48.90% by Zaryab Construction Company Government contractor above the Schedule "B" is reasonable hence recommended.


(AMJAD PARVEZ DAWACH)
Superintending Engineer
Western Sindh Circle Larkana


(FAYAZ AHMED QURESHI)
Divisional Accounts Officer
Rice Canal Division Mehar
a/ KN Shah


(TARIQ AHMED KEHAR)
Executive Engineer
Rice Canal Division Mehar
a/ KN Shah

COMPARATIVE STATEMENT

NAME OF WORK: C.C LINING ALONG KUDAN BRANCH RD 15+00 TO 20+00 (P-18)

ESTIMATE SANCTIONED BY THE CHIEF ENGINEER SUKKUR BARRAGE RIGHT BANK REGION LARKANA


S. NO.	ITEM OF WORK	AMOUNT	ACTUAL PREMIUM AS PER TECH. SANCTION	ZARYAB CONSTRUCTION COMPANY	RAB NAWAZ SHAHANI	NOOR MOHAMMAD & BROTHERS
01.	Schedule "B" attached amount of Schedule "B".	19865793/-	29.47	Sch: "B" Amount Rs. 19865793/- Rate quoted by the Contractor Rs. 48.30% above	51% Above	55% Above
02.	Cartage of Material	5846684/-				
	TOTAL	25712477/-		Cost of work Rs. 29460971/-	29997347/-	30791979/-

Estimate cost
25712477/-


(-) Cost of Agreement = 3748494/- Financial Review
Difference 48.30%
Estimate above

$3748494 \times 100 = 14.57\%$ above the estimate
25712477/-

Note: The lowest rate quoted at Rs. 48.30% by Zaryab Construction Company Government contractor above the Schedule "B" is reasonable hence recommended.


(AMJAD PARVEZ DAWACH)
Superintending Engineer
Western Sindh Circle Larkana

(FAYAZ AHMED QURESHI)
Divisional Accounts Officer
Rice Canal Division Mehar
ia: K.N. Shih


(TARIQ AHMED KEHAR)
Executive Engineer
Rice Canal Division Mehar
ia: K.N. Shah

OFFICE OF THE SUPERINTENDING ENGINEER
WESTERN SINDH CIRCLE LARKANA.

No: Asstt:G-148/WSC/ **73** of 2016. Larkana dated **18/1/2016**.

MINUTES OF PROCUREMENT COMMITTEE

A meeting of the procurement committee was held on 18.01.2016 at 3.00 PM for Seventeen Packages vide NIT No. IC/G-55/968 dated 23.7.2015 issued by the Executive Engineer Rice Canal Division Mehar *at* KN Shah.

The meeting was chaired by the Superintending Engineer Western Sindh Circle Larkana being Chairman of Procurement Committee and held in his office while attended by the following Committee Members: -

- | | | |
|-----|--|-------------------------|
| 1/- | Amjad Parvez Dawach
Superintending Engineer
Western Sindh Circle Larkana | Chairman |
| 2/- | Tarique Ahmed Kehar
Executive Engineer
Rice Canal Division Mehar
<i>at</i> KN Shah | Member |
| 3/- | Fayyaz Ahmed Qureshi
Divisional Accounts Officer
Rice Canal Division Mehar
<i>at</i> KN Shah | Member/Secretary |

There were Fifty One (51) Nos. of Tenders issued and response from all tenders were received, the sealed Bids were opened before all the participants /Contractors. The rates quoted by them were announced formally in presence of the participants/their representative and accordingly recorded in the comparative statement/Bid Evaluation report. There was no over writing or cutting found in the furnished bids/tenders.

-sd-
CHAIRMAN

Superintending Engineer
Western Sindh Circle Larkana

Copy forwarded with compliments to:-

1. The Chief Engineer Sukkur Barrage Right Bank Region Larkana for favour of kind information.
2. The Executive Engineer Rice Canal Division Mehar *at* KN Shah for information.

CHAIRMAN

Superintending Engineer
Western Sindh Circle Larkana


**BIDDER'S QUALIFICATION / TECHNICAL EVALUATION REPORT /
PREQUALIFICATION REPORT.**

Name of Division: - Executive Engineer Rice Canal Division Mehar @ KN Shah

Name of Work: - 1) Constructing Sump and Pump House of Pumping Station @ Mehar Main Drain to supplement Irrigation Channel.
2) Supply and Fixing 2 Nos. Pumps along with Motor all accessories (P-01).

Notice Inviting Tender: - No. TC/G-55 / 968 dated 23.11.2015.

Sr. No.	Description	NAME OF BIDDERS		
		Ghulam Hyder Khushk	Madni Engineering Constt:	Jagirani Constt: Company
1	Is envelope sealed	Yes	Yes	Yes
2	Required Amount of Bid Security	Yes	Yes	Yes
3	Alternated Bid	No	No	No
4	Withdrawal	No	No	No
5	Price Read Out	Yes	Yes	Yes
6	Form of tender signed or not	Yes	Yes	Yes
7	Required PEC Registration	Yes	Yes	Yes
8	Registration in SBR	Yes	Yes	Yes
9	Registration in I. Tax	Yes	Yes	Yes
10	More than 3 years Experience in similar work	Yes	Yes	Yes
11	Any litigation or black listing	No	No	No
12	List of Machinery & Equipment provided?	Yes	Yes	Yes
13	Personnel Information Provided?	Yes	Yes	Yes
14	Financial Statement viz Bank statement / Income Tax Return attached?	Yes	Yes	Yes
15	Any overwriting tender dropped?	No	No	No
16	Any conditional / telegraphic bid received?	No	No	No
17	Tender fee received?	Yes	Yes	Yes


(TARIQ AHMED KEHAR)

-Executive Engineer

Rice Canal Division Mehar

@ KN Shah

**BIDDER'S QUALIFICATION / TECHNICAL EVALUATION REPORT /
PREQUALIFICATION REPORT.**

Name of Division: - Executive Engineer Rice Canal Division Mehar @ KN Shah

Name of Work: - 1) Constructing Delivery Bay of Pumping Station @ Mehar Main Drain to supplement Irrigation Channel.
2) Construction (2 Nos.) Road Bridge @ Pumping to supplement Irrigation Channels.
3) Constructing Aqueduct over Mado Distry (P-02).

Notice Inviting Tender: - No. TC/G-55 / 968 dated 23.11.2015.

Sr. No.	Description	NAME OF BIDDERS		
		Bakhat Hussain Construction	Ghulam Hyder Khushk	Rab Nawaz Shahani
1	Is envelope sealed	Yes	Yes	Yes
2	Required Amount of Bid Security	Yes	Yes	Yes
3	Alternated Bid	No	No	No
4	Withdrawal	No	No	No
5	Price Read Out	Yes	Yes	Yes
6	Form of tender signed or not	Yes	Yes	Yes
7	Required PEC Registration	Yes	Yes	Yes
8	Registration in SBR	Yes	Yes	Yes
9	Registration in I. Tax	Yes	Yes	Yes
10	More than 3 years Experience in similar work	Yes	Yes	Yes
11	Any litigation or black listing	No	No	No
12	List of Machinery & Equipment provided?	Yes	Yes	Yes
13	Personnel Information Provided?	Yes	Yes	Yes
14	Financial Statement viz Bank statement / Income Tax Return attached?	Yes	Yes	Yes
15	Any overwriting tender dropped?	No	No	No
16	Any conditional / telegraphic bid received?	No	No	No
17	Tender fee received?	Yes	Yes	Yes

(TARIQUE AHMED KEHAR)

Executive Engineer

Rice Canal Division Mehar

@ KN Shah

**BIDDER'S QUALIFICATION / TECHNICAL EVALUATION REPORT /
PREQUALIFICATION REPORT.**

Name of Division: - Executive Engineer Rice Canal Division Mehar @ KN Shah

Name of Work: - 1) Construction of Leading Channel from Mehar Main Drain Pumping Station to FP RD 292.
2) Construction of Retaining wall along Pumping Station @ Mehar Main Drain for supplement Irrigation Channels (75 ft. B/S) (P-03).

Notice Inviting Tender: - No. TC/G-55 / 968 dated 23.11.2015.

Sr. No.	Description	NAME OF BIDDERS		
		Bakhat Hussain Constt:	Madni Engineering Constt:	Pak Constt: Co.
1	Is envelope sealed	Yes	Yes	Yes
2	Required Amount of Bid Security	Yes	Yes	Yes
3	Alternated Bid	No	No	No
4	Withdrawal	No	No	No
5	Price Read Out	Yes	Yes	Yes
6	Form of tender signed or not	Yes	Yes	Yes
7	Required PEC Registration	Yes	Yes	Yes
8	Registration in SBR	Yes	Yes	Yes
9	Registration in I. Tax	Yes	Yes	Yes
10	More than 3 years Experience in similar work	Yes	Yes	Yes
11	Any litigation or black listing	No	No	No
12	List of Machinery & Equipment provided?	Yes	Yes	Yes
13	Personnel Information Provided?	Yes	Yes	Yes
14	Financial Statement viz Bank statement / Income Tax Return attached?	Yes	Yes	Yes
15	Any overwriting tender dropped?	No	No	No
16	Any conditional / telegraphic bid received?	No	No	No
17	Tender fee received?	Yes	Yes	Yes

(TARIQ AHMED KEHAR)

Executive Engineer

Rice Canal Division Mehar

@ KN Shah


**BIDDER'S QUALIFICATION / TECHNICAL EVALUATION REPORT /
PREQUALIFICATION REPORT.**

Name of Division: - Executive Engineer Rice Canal Division Mehar @ KN Shah

Name of Work: - 1) Construction of Leading Channel from Mehar Main Drain Pumping Station to FP RD 292.
2) Construction of Retaining wall along Pumping Station @ Mehar Main Drain for supplement Irrigation Channels (75 ft. B/S) (P-04).

Notice Inviting Tender: - No. TC/G-55 / 968 dated 23.11.2015.

Sr. No.	Description	NAME OF BIDDERS		
		Bakhat Hussain Constt:	Madni Engineering Constt:	AIS International
1	Is envelope sealed	Yes	Yes	Yes
2	Required Amount of Bid Security	Yes	Yes	Yes
3	Alternated Bid	No	No	No
4	Withdrawal	No	No	No
5	Price Read Out	Yes	Yes	Yes
6	Form of tender signed or not	Yes	Yes	Yes
7	Required PEC Registration	Yes	Yes	Yes
8	Registration in SBR	Yes	Yes	Yes
9	Registration in I. Tax	Yes	Yes	Yes
10	More than 3 years Experience in similar work	Yes	Yes	Yes
11	Any litigation or black listing	No	No	No
12	List of Machinery & Equipment provided?	Yes	Yes	Yes
13	Personnel Information Provided?	Yes	Yes	Yes
14	Financial Statement viz Bank statement / Income Tax Return attached?	Yes	Yes	Yes
15	Any overwriting tender dropped?	No	No	No
16	Any conditional / telegraphic bid received?	No	No	No
17	Tender fee received?	Yes	Yes	Yes


(TARIQ AHMED KEHAR)
 Executive Engineer
 Rice Canal Division Mehar
 @ KN Shah


**BIDDER'S QUALIFICATION / TECHNICAL EVALUATION REPORT /
PREQUALIFICATION REPORT.**

Name of Division: - Executive Engineer Rice Canal Division Mehar @ KN Shah

Name of Work: - Construction of Bund Sluice at RD 248 FP Bund and Construction of Retaining wall along FP Bund Sluice (P-05).

Notice Inviting Tender: - No. TC/G-55 / 968 dated 23.11.2015.

Sr. No.	Description	NAME OF BIDDERS		
		Barkat Ali Awan	Mohammad Nawaz Tunio	AIS International
1	Is envelope sealed	Yes	Yes	Yes
2	Required Amount of Bid Security	Yes	Yes	Yes
3	Alternated Bid	No	No	No
4	Withdrawal	No	No	No
5	Price Read Out	Yes	Yes	Yes
6	Form of tender signed or not	Yes	Yes	Yes
7	Required PEC Registration	Yes	Yes	Yes
8	Registration in SBR	Yes	Yes	Yes
9	Registration in I. Tax	Yes	Yes	Yes
10	More than 3 years Experience in similar work	Yes	Yes	Yes
11	Any litigation or black listing	No	No	No
12	List of Machinery & Equipment provided?	Yes	Yes	Yes
13	Personnel Information Provided?	Yes	Yes	Yes
14	Financial Statement viz Bank statement / Income Tax Return attached?	Yes	Yes	Yes
15	Any overwriting tender dropped?	No	No	No
16	Any conditional / telegraphic bid received?	No	No	No
17	Tender fee received?	Yes	Yes	Yes


(TARIQ AHMED KEHAR)
Executive Engineer
Rice Canal Division Mehar
@ KN Shah

**BIDDER'S QUALIFICATION / TECHNICAL EVALUATION REPORT /
PREQUALIFICATION REPORT.**

Name of Division: - Executive Engineer Rice Canal Division Mehar @ KN Shah

Name of Work: - Construction of Bund Sluice at RD 275 FP Bund and Construction of Retaining wall along FP Bund Sluice (P-06).

Notice Inviting Tender: - No. TC/G-55 / 968 dated 23.11.2015.

Sr. No.	Description	NAME OF BIDDERS		
		Salwa Constt: & Engineering Service	Mohammad Nawaz Tunio	AIS International
1	Is envelope sealed	Yes	Yes	Yes
2	Required Amount of Bid Security	Yes	Yes	Yes
3	Alternated Bid	No	No	No
4	Withdrawal	No	No	No
5	Price Read Out	Yes	Yes	Yes
6	Form of tender signed or not	Yes	Yes	Yes
7	Required PEC Registration	Yes	Yes	Yes
8	Registration in SBR	Yes	Yes	Yes
9	Registration in I. Tax	Yes	Yes	Yes
10	More than 3 years Experience in similar work	Yes	Yes	Yes
11	Any litigation or black listing	No	No	No
12	List of Machinery & Equipment provided?	Yes	Yes	Yes
13	Personnel Information Provided?	Yes	Yes	Yes
14	Financial Statement viz Bank statement / Income Tax Return attached?	Yes	Yes	Yes
15	Any overwriting tender dropped?	No	No	No
16	Any conditional / telegraphic bid received?	No	No	No
17	Tender fee received?	Yes	Yes	Yes

(TARIQUE AHMED KEHAR)

Executive Engineer

Rice Canal Division Mehar

@ KN Shah


**BIDDER'S QUALIFICATION / TECHNICAL EVALUATION REPORT /
PREQUALIFICATION REPORT.**

Name of Division: - Executive Engineer Rice Canal Division Mehar @ KN Shah

Name of Work: - Construction of Bund Sluice at RD 295 FP Bund and Construction of Retaining wall along FP Bund Sluice (P-07).

Notice Inviting Tender: - No. TC/G-55 / 968 dated 23.11.2015.

Sr. No.	Description	NAME OF BIDDERS		
		Mohammad Nawaz Tunio	Pak Constt: Co.	AIS International
1	Is envelope sealed	Yes	Yes	Yes
2	Required Amount of Bid Security	Yes	Yes	Yes
3	Alternated Bid	No	No	No
4	Withdrawal	No	No	No
5	Price Read Out	Yes	Yes	Yes
6	Form of tender signed or not	Yes	Yes	Yes
7	Required PEC Registration	Yes	Yes	Yes
8	Registration in SBR	Yes	Yes	Yes
9	Registration in I. Tax	Yes	Yes	Yes
10	More than 3 years Experience in similar work	Yes	Yes	Yes
11	Any litigation or black listing	No	No	No
12	List of Machinery & Equipment provided?	Yes	Yes	Yes
13	Personnel Information Provided?	Yes	Yes	Yes
14	Financial Statement viz Bank statement / Income Tax Return attached?	Yes	Yes	Yes
15	Any overwriting tender dropped?	No	No	No
16	Any conditional / telegraphic bid received?	No	No	No
17	Tender fee received?	Yes	Yes	Yes


(TARIQ AHMED KEHAR)
Executive Engineer
Rice Canal Division Mehar
@ KN Shah


**BIDDER'S QUALIFICATION / TECHNICAL EVALUATION REPORT /
PREQUALIFICATION REPORT.**

Name of Division: - Executive Engineer Rice Canal Division Mehar @ KN Shah

Name of Work: - Construction of Manjan X-Regulator along Rajwah Branch
RD 49+00 (P-08)

Notice Inviting Tender: - No. TC/G-55 / 968 dated 23.11.2015.

Sr. No.	Description	NAME OF BIDDERS		
		Pak Constt: Co.	Bakhat Hussain Constt:	Abdul Razaque
1	Is envelope sealed	Yes	Yes	Yes
2	Required Amount of Bid Security	Yes	Yes	Yes
3	Alternated Bid	No	No	No
4	Withdrawal	No	No	No
5	Price Read Out	Yes	Yes	Yes
6	Form of tender signed or not	Yes	Yes	Yes
7	Required PEC Registration	Yes	Yes	Yes
8	Registration in SBR	Yes	Yes	Yes
9	Registration in I. Tax	Yes	Yes	Yes
10	More than 3 years Experience in similar work	Yes	Yes	Yes
11	Any litigation or black listing	No	No	No
12	List of Machinery & Equipment provided?	Yes	Yes	Yes
13	Personnel Information Provided?	Yes	Yes	Yes
14	Financial Statement viz Bank statement / Income Tax Return attached?	Yes	Yes	Yes
15	Any overwriting tender dropped?	No	No	No
16	Any conditional / telegraphic bid received?	No	No	No
17	Tender fee received?	Yes	Yes	Yes


(TARIQ AHMED KEHAR)
Executive Engineer
Rice Canal Division Mehar
@ KN Shah


**BIDDER'S QUALIFICATION / TECHNICAL EVALUATION REPORT /
PREQUALIFICATION REPORT.**

Name of Division: - Executive Engineer Rice Canal Division Mehar @ KN Shah

Name of Work: - 1) De-silting along kakol Branch RD 0+00 to 49+00.
2) Construction of retaining wall along Radhan Branch RD 0+0 to 0+250 B/S (P-09).

Notice Inviting Tender: - No. TC/G-55 / 968 dated 23.11.2015.

Sr. No.	Description	NAME OF BIDDERS		
		AIS International	Mazhar Ali	Gul Mohammad Channa
1	Is envelope sealed	Yes	Yes	Yes
2	Required Amount of Bid Security	Yes	Yes	Yes
3	Alternated Bid	No	No	No
4	Withdrawal	No	No	No
5	Price Read Out	Yes	Yes	Yes
6	Form of tender signed or not	Yes	Yes	Yes
7	Required PEC Registration	Yes	Yes	Yes
8	Registration in SBR	Yes	Yes	Yes
9	Registration in I. Tax	Yes	Yes	Yes
10	More than 3 years Experience in similar work	Yes	Yes	Yes
11	Any litigation or black listing	No	No	No
12	List of Machinery & Equipment provided?	Yes	Yes	Yes
13	Personnel Information Provided?	Yes	Yes	Yes
14	Financial Statement viz Bank statement / Income Tax Return attached?	Yes	Yes	Yes
15	Any overwriting tender dropped?	No	No	No
16	Any conditional / telegraphic bid received?	No	No	No
17	Tender fee received?	Yes	Yes	Yes


(TARIQ AHMED KEHAR)
Executive Engineer
Rice Canal Division Mehar
@ KN Shah


**BIDDER'S QUALIFICATION / TECHNICAL EVALUATION REPORT /
PREQUALIFICATION REPORT.**

Name of Division: - Executive Engineer Rice Canal Division Mehar @ KN Shah

Name of Work: - 1) Earth work along Kakol Branch RD 0+00 to 25+00 NIP Side;
2) Construction of Retaining wall along Mehar (U/S Kakol Branch)
RD 38 NIP Side = 750 ft. (P-10).

Notice Inviting Tender: - No. TC/G-55 / 968 dated 23.11.2015.

Sr. No.	Description	NAME OF BIDDERS		
		Mazhar Ali	Pak Constdt: Co.	Noor Mohammad & Brothers
1	Is envelope sealed	Yes	Yes	Yes
2	Required Amount of Bid Security	Yes	Yes	Yes
3	Alternated Bid	No	No	No
4	Withdrawal	No	No	No
5	Price Read Out	Yes	Yes	Yes
6	Form of tender signed or not	Yes	Yes	Yes
7	Required PEC Registration	Yes	Yes	Yes
8	Registration in SBR	Yes	Yes	Yes
9	Registration in I. Tax	Yes	Yes	Yes
10	More than 3 years Experience in similar work	Yes	Yes	Yes
11	Any litigation or black listing	No	No	No
12	List of Machinery & Equipment provided?	Yes	Yes	Yes
13	Personnel Information Provided?	Yes	Yes	Yes
14	Financial Statement viz Bank statement / Income Tax Return attached?	Yes	Yes	Yes
15	Any overwriting tender dropped?	No	No	No
16	Any conditional / telegraphic bid received?	No	No	No
17	Tender fee received?	Yes	Yes	Yes


(TARIQ AHMED KEHAR)
 Executive Engineer
 Rice Canal Division Mehar
 @ KN Shah

BIDDER'S QUALIFICATION / TECHNICAL EVALUATION REPORT /
PREQUALIFICATION REPORT.

Name of Division: - Executive Engineer Rice Canal Division Mehar @ KN Shah

Name of Work: - Repair Direct Outlets along Kakol Branch (Ex-Mehar Branch) from RD 0+00 to RD 40+00 IP Side (P-11 Both Sides).

Notice Inviting Tender: - No. TC/G-55 / 968 dated 23.11.2015.

Sr. No.	Description	NAME OF BIDDERS		
		Ali Sher Chandio	Pak Constt: Co.	Noor Mohammad & Brothers
1	Is envelope sealed	Yes	Yes	Yes
2	Required Amount of Bid Security	Yes	Yes	Yes
3	Alternated Bid	No	No	No
4	Withdrawal	No	No	No
5	Price Read Out	Yes	Yes	Yes
6	Form of tender signed or not	Yes	Yes	Yes
7	Required PEC Registration	Yes	Yes	Yes
8	Registration in SBR	Yes	Yes	Yes
9	Registration in I. Tax	Yes	Yes	Yes
10	More than 3 years Experience in similar work	Yes	Yes	Yes
11	Any litigation or black listing	No	No	No
12	List of Machinery & Equipment provided?	Yes	Yes	Yes
13	Personnel Information Provided?	Yes	Yes	Yes
14	Financial Statement viz Bank statement / Income Tax Return attached?	Yes	Yes	Yes
15	Any overwriting tender dropped?	No	No	No
16	Any conditional / telegraphic bid received?	No	No	No
17	Tender fee received?	Yes	Yes	Yes


(TARIQ AHMED KEHAR)
Executive Engineer
Rice Canal Division Mehar
@ KN Shah


**BIDDER'S QUALIFICATION / TECHNICAL EVALUATION REPORT /
PREQUALIFICATION REPORT.**

Name of Division: - Executive Engineer Rice Canal Division Mehar @ KN Shah

Name of Work: - Constructing Retaining wall along Mehar Branch Kudan Head /
Stone Pitching (P-12)

Notice Inviting Tender: - No. TC/G-55 / 968 dated 23.11.2015.

Sr. No.	Description	NAME OF BIDDERS		
		Mohammad Aadil	Noor Mohammad & Brothers	Sarwar & Sun Company
1	Is envelope sealed	Yes	Yes	Yes
2	Required Amount of Bid Security	Yes	Yes	Yes
3	Alternated Bid	No	No	No
4	Withdrawal	No	No	No
5	Price Read Out	Yes	Yes	Yes
6	Form of tender signed or not	Yes	Yes	Yes
7	Required PEC Registration	Yes	Yes	Yes
8	Registration in SBR	Yes	Yes	Yes
9	Registration in I. Tax	Yes	Yes	Yes
10	More than 3 years Experience in similar work	Yes	Yes	Yes
11	Any litigation or black listing	No	No	No
12	List of Machinery & Equipment provided?	Yes	Yes	Yes
13	Personnel Information Provided?	Yes	Yes	Yes
14	Financial Statement viz Bank statement / Income Tax Return attached?	Yes	Yes	Yes
15	Any overwriting tender dropped?	No	No	No
16	Any conditional / telegraphic bid received?	No	No	No
17	Tender fee received?	Yes	Yes	Yes


(TARIQ AHMED KEHAR)
Executive Engineer
Rice Canal Division Mehar
@ KN Shah

**BIDDER'S QUALIFICATION / TECHNICAL EVALUATION REPORT /
PREQUALIFICATION REPORT.**

Name of Division: - Executive Engineer Rice Canal Division Mehar @ KN Shah

Name of Work: -

- 1) Constructing (2 Nos.) Road Bridges along Mado Distry.
- 2) Constructing Road Bridges along Kalro Minor (Total 2 Bridges).
- 3) Constructing Road Bridges along Nara Distry (Total 2 Bridges).
- 4) Constructing Road Bridges along Kudan Branch (Total 1 Bridge).
- 5) Constructing Foot bridge along Kudan Branch @ RD 16 Village Wali Mohammad Chandio (1 Bridge) (P-14).

Notice Inviting Tender: - No. TC/G-55 / 968 dated 23.11.2015.

Sr. No.	Description	NAME OF BIDDERS		
		Barkat Ali Awan	Jagirani Constt: Company	Rab Nawaz Shahani
1	Is envelope sealed	Yes	Yes	Yes
2	Required Amount of Bid Security	Yes	Yes	Yes
3	Alternated Bid	No	No	No
4	Withdrawal	No	No	No
5	Price Read Out	Yes	Yes	Yes
6	Form of tender signed or not	Yes	Yes	Yes
7	Required PEC Registration	Yes	Yes	Yes
8	Registration in SBR	Yes	Yes	Yes
9	Registration in I. Tax	Yes	Yes	Yes
10	More than 3 years Experience in similar work	Yes	Yes	Yes
11	Any litigation or black listing	No	No	No
12	List of Machinery & Equipment provided?	Yes	Yes	Yes
13	Personnel Information Provided?	Yes	Yes	Yes
14	Financial Statement viz Bank statement / Income Tax Return attached?	Yes	Yes	Yes
15	Any overwriting tender dropped?	No	No	No
16	Any conditional / telegraphic bid received?	No	No	No
17	Tender fee received?	Yes	Yes	Yes

(TARIQUE AHMED KEHAR)

Executive Engineer
Rice Canal Division Mehar
@ KN Shah


**BIDDER'S QUALIFICATION / TECHNICAL EVALUATION REPORT /
PREQUALIFICATION REPORT.**

Name of Division: - Executive Engineer Rice Canal Division Mehar @ KN Shah

Name of Work: - C.C Lining along Kudan Branch RD 0+00 to 5+00 (P-15)

Notice Inviting Tender: - No. TC/G-55 / 968 dated 23.11.2015.

Sr. No.	Description	NAME OF BIDDERS		
		Three Star & Company	Shahbaz Constt: Co.	Rab Nawaz Shahani
1	Is envelope sealed	Yes	Yes	Yes
2	Required Amount of Bid Security	Yes	Yes	Yes
3	Alternated Bid	No	No	No
4	Withdrawal	No	No	No
5	Price Read Out	Yes	Yes	Yes
6	Form of tender signed or not	Yes	Yes	Yes
7	Required PEC Registration	Yes	Yes	Yes
8	Registration in SBR	Yes	Yes	Yes
9	Registration in I. Tax	Yes	Yes	Yes
10	More than 3 years Experience in similar work	Yes	Yes	Yes
11	Any litigation or black listing	No	No	No
12	List of Machinery & Equipment provided?	Yes	Yes	Yes
13	Personnel Information Provided?	Yes	Yes	Yes
14	Financial Statement viz Bank statement / Income Tax Return attached?	Yes	Yes	Yes
15	Any overwriting tender dropped?	No	No	No
16	Any conditional / telegraphic bid received?	No	No	No
17	Tender fee received?	Yes	Yes	Yes


(TARIQ AHMED KEHAR)
 - Executive Engineer
 Rice Canal Division Mehar
 @ KN Shah


**BIDDER'S QUALIFICATION / TECHNICAL EVALUATION REPORT /
PREQUALIFICATION REPORT.**

Name of Division: - Executive Engineer Rice Canal Division Mehar @ KN Shah

Name of Work: - C.C Lining along Kudan Branch RD 5+00 to 10+00 (P-16)

Notice Inviting Tender: - No. TC/G-55 / 968 dated 23.11.2015.

Sr. No.	Description	NAME OF BIDDERS		
		Ali Enterprises	Shahbaz Constt: Co.	AIS International
1	Is envelope sealed	Yes	Yes	Yes
2	Required Amount of Bid Security	Yes	Yes	Yes
3	Alternated Bid	No	No	No
4	Withdrawal	No	No	No
5	Price Read Out	Yes	Yes	Yes
6	Form of tender signed or not	Yes	Yes	Yes
7	Required PEC Registration	Yes	Yes	Yes
8	Registration in SBR	Yes	Yes	Yes
9	Registration in I. Tax	Yes	Yes	Yes
10	More than 3 years Experience in similar work	Yes	Yes	Yes
11	Any litigation or black listing	No	No	No
12	List of Machinery & Equipment provided?	Yes	Yes	Yes
13	Personnel Information Provided?	Yes	Yes	Yes
14	Financial Statement viz Bank statement / Income Tax Return attached?	Yes	Yes	Yes
15	Any overwriting tender dropped?	No	No	No
16	Any conditional / telegraphic bid received?	No	No	No
17	Tender fee received?	Yes	Yes	Yes


(TARIQUL AHMED KEHAR)
 Executive Engineer
 Rice Canal Division Mehar
 @ KN Shah


**BIDDER'S QUALIFICATION / TECHNICAL EVALUATION REPORT /
PREQUALIFICATION REPORT.**

Name of Division: - Executive Engineer Rice Canal Division Mehar @ KN Shah

Name of Work: - C.C Lining along Kudan Branch RD 10+00 to 15+00 (P-17)

Notice Inviting Tender: - No. TC/G-55 / 968 dated 23.11.2015.

Sr. No.	Description	NAME OF BIDDERS		
		Zaryab Construction Company	Barkat Ali Awan	Mohammad Aadil
1	Is envelope sealed	Yes	Yes	Yes
2	Required Amount of Bid Security	Yes	Yes	Yes
3	Alternated Bid	No	No	No
4	Withdrawal	No	No	No
5	Price Read Out	Yes	Yes	Yes
6	Form of tender signed or not	Yes	Yes	Yes
7	Required PEC Registration	Yes	Yes	Yes
8	Registration in SBR	Yes	Yes	Yes
9	Registration in I. Tax	Yes	Yes	Yes
10	More than 3 years Experience in similar work	Yes	Yes	Yes
11	Any litigation or black listing	No	No	No
12	List of Machinery & Equipment provided?	Yes	Yes	Yes
13	Personnel Information Provided?	Yes	Yes	Yes
14	Financial Statement viz Bank statement / Income Tax Return attached?	Yes	Yes	Yes
15	Any overwriting tender dropped?	No	No	No
16	Any conditional / telegraphic bid received?	No	No	No
17	Tender fee received?	Yes	Yes	Yes


(TARIQUE AHMED KEHAR)
Executive Engineer
Rice Canal Division Mehar
@ KN Shah


**BIDDER'S QUALIFICATION / TECHNICAL EVALUATION REPORT /
PREQUALIFICATION REPORT.**

Name of Division: - Executive Engineer Rice Canal Division Mehar @ KN Shah

Name of Work: - C.C Lining along Kudan Branch RD 15+00 to 20+00 (P-18)

Notice Inviting Tender: - No. TC/G-55 / 968 dated 23.11.2015.

Sr. No.	Description	NAME OF BIDDERS		
		Zaryab Construction Company	Rab Nawaz Shahani	Noor Mohammad & Brothers
1	Is envelope sealed	Yes	Yes	Yes
2	Required Amount of Bid Security	Yes	Yes	Yes
3	Alternated Bid	No	No	No
4	Withdrawal	No	No	No
5	Price Read Out	Yes	Yes	Yes
6	Form of tender signed or not	Yes	Yes	Yes
7	Required PEC Registration	Yes	Yes	Yes
8	Registration in SBR	Yes	Yes	Yes
9	Registration in I. Tax	Yes	Yes	Yes
10	More than 3 years Experience in similar work	Yes	Yes	Yes
11	Any litigation or black listing	No	No	No
12	List of Machinery & Equipment provided?	Yes	Yes	Yes
13	Personnel Information Provided?	Yes	Yes	Yes
14	Financial Statement viz Bank statement / Income Tax Return attached?	Yes	Yes	Yes
15	Any overwriting tender dropped?	No	No	No
16	Any conditional / telegraphic bid received?	No	No	No
17	Tender fee received?	Yes	Yes	Yes










(TARIQ AHMED KEHAR)
Executive Engineer
Rice Canal Division Mehar
@ KN Shah










ATTENDANCE SHEET

The Procurement Committee Comprising on the following officers for opening of Bids on 18.01.2016 in the office of Superintending Engineer Western Sindh Circle Larkana

1. **Mr. Anjad Parvez Dawach** (Chairman)
Superintending Engineer
Western Sindh Circle Larkana
2. **Tarique Ahmed Kehar** (Member)
Executive Engineer
Rice Canal Division Mehar
@ KN Shah
3. **Mr. Fayyaz Ahmed Qureshi** -(Member/ Secretary)
Divisional Accounts Officer
Rice Canal Division Mehar
@ KN Shah

The following Contractors participated/attended in Bidding Process at the Time of opening of Tenders Bids on 18.01.2016.

S. #	NAME OF CONTRACTOR	SIGNATURE
1	M/s Mohammad Nawaz Tunio & Sons	
2	Madni Engineering Construction Co:	
3	Ghulam Hyder Khushk	
4	M/s ALI Sher chandio	
5	Mazhar Ali	
6	AIS International	
7	Noor Muhammad & Brothers	
8	PAK Construction Co:	

S. #	NAME OF CONTRACTOR	SIGNATURE
9	Jagirami Construction Co.	
10	Sakaa Const. & Engineering Services.	
11	Bakhat Hussain Const. Co.	
12	Saxwar Son	
13	Mohammad AAdil	
14	Zaxyab Construction Co.	
15	M/S Three Star & Co.	
16	M/S Ali Enterprises	
17	Baykat Ali Ameer.	
18		
19		
20		

SCHEDULE - B -

**CONSTRUCTING SUMP AND PUMP HOUSE OF PUMPING STATION @ MEHAR MAIN DRAIN TO
SUPPLEMENT IRRIGATION CHANNELS IN TALKA MEHAR (P-1 Part-01)**

S#	QTY	ITEM	RATE	UNIT	AMOUNT
1	53470.00 cft	Excavation in foundation of building bridges and other structures i/c degbelling, dressing refilling around structure with excavated earth, watering and remaining lead upto 5 ft. P# 4 Item # 18	3176.25	% cft	169834
2	53470.00 cft	Rehandling of earth work (b) upto lead of 50ft P#2 IT#1	1058.75	% cft	56611
3	26735.00 cft	Extra for wet earth work upto lead of 50 ft P#3 Item # 15	1058.75	% cft	28306
4	1260.00 cft	Supplying & Filling Sand under flood & plugging in walls.	1141.25	% cft	14380
5	106.00 sft	Errection & removal of centering for RCC or plain cement concrete works of deodar wood 2nd class. P# 18 Item # 19-a-ii	7000.00	% sft	7420
6	535.00 cft	Cement Concrete Plain i/c placing compacting, finishing and curing complete (i/c screening and washing of stone aggregate) Ratio 1:3:6. Pg#15 It#5 (h)	12595	% cft	67383
7	6521.00 cft	Reinforcement cement concrete work i/c all labour and material except the cost of steel reinforcement and its labour for bending and binding which will be paid seperately. This rate also icludes all kind of form moulds, lifting, shuttering, curing rendering and finishing the exposed surface (ic screening and washing of shingle) (a) RC work in roof, slab, beams, columns, rafts lintels and other Structure Members laid in Qty or pre-cost laid in position complete in all respects. B) Ratio 1:2:4 90 Lbs Cement 2 cft Sand 4 cft Shingle 1/8" to 1/4" Gauge. Pg# 16 item # 6-i	337.00	P.cft	219757
8	349.339 cwt	Fabrication of steel reinforcement for cement concrete i/c cutting, bending, laying in position, making joints and fastening i/c cost of binding wire, (Having fy=60.000 psi) P#16 it#8 (b)	5001.70	P.cwt	174729
9	5165.00 cft	Pacca Brick work in ground floor in Cement Sand Mortor Ratio 1:5 Pg# 21 Item# 5 (I) (d)	129.0218	% cft	66630

S#	QTY	ITEM	RATE	UNIT	AMOUNT
10	115.00 sft	First Class deodar wood wrought joinery in doors and windows etc fixed in position including cheeks, cleats, handles & cards with hooks etc deodar paneled and glazed or fully glazed 1 3/4" thick. Pg# 58 Item # 7(b)	1273.75	P.sft	146482
11	999.00 cft	Cement Plaster 1:3 upto 12' height 3/4" thick Pg# 52 Item # 10 (c.)	2795.30	%sft	27925
12	1083.00 cft	Cement pointing struck joints on walls Ratio 1:2 Pg# 53 Item # 19(a)	1287.44	%sft	13943
13	400.00 sft	Making & fixing Grating in opening including fixing at site with plot iron 2" 3/8" and 1 1/4" Sq Bars 4" center to center. Pg# 92 Item # 25	293.15	1.sft	117260
14	1024.00 sft	White washing coats. Three coats Pg# 54 Item # 26 (c.)	829.95	%sft	8499
15	230.00 sft	Painting new surface, preparing surface and painting of doors and windows any type i/c edges two coats Pg# 69 Item# 5(c.)	2116.41	%sft	4868
16	1.00 No	Supplying & Fixing chain pulley of 7 tons i/c 7 meter chain & roller (Market Rate)	80000	Each	80000
17	29.00 Rft	Supplying & Fixing Steel graders 4" x 8" imported / quality / special (Market Rate)	600	P.Rft	17400
18	80.00 Dys	Full hire charges of the pumping set per day, inclusive of wage of driver and assistant fuel or electric energy plate forms required for placing pumps etc, at lower depth with suction and delivery pipes for pumping out water found at various depths from trenches i/c the cost of erection and dismantling after completion of the job (1) Hire charges of pumping set of upto 10 HP pumping out water from 10 ft deep trench. (P.H Schedule P- 48 / 23 - 1)	1500	P.Days	120000
19	720.00 Hrs	For working pumps beyond 8 hours, (1) for a pumping set of upto 10 H.P	250	P.Hrs	180000
TOTAL RS.					5671571

Add 34.0% Above / Below () 1928334/-

Total Rs: 7599905/-

M. P. K.
Contractor

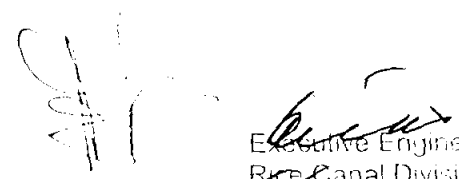
K. N. Shah
EXECUTIVE ENGINEER
RICE CANAL DIVISION
Mahar @ K N Shah

SCHEDULE "B"

SUPPLYING & FIXING 02 NO PUMPS (KSB OR EQUEVELENT) OF 25 CUSECS CAPACITY WITH 80 HP MOTOR (SEMENS) I/C MOTOR CONTROL UNIT FOR PUMPING STATION @ MEHAR MAIN DRAIN TO SUPPLEMENT IRRIGATION CHANNELS INTALKA MEHAR (P-1 Part-II)

QUANTITY	ITEM	RATE	UNIT	AMOUNT
2.0 Nos:	1 Supplying and fixing of 02 Nos:KSB Pumps or equevelent pumps water lubricated of 25 ft suction & delivery required as per site of (470 mm dia 6.47 mm thick) with 80 HP Electric motar 907 RPM & MCU of (Siemens) Copper cable 37/083 (4 course) 120 mm cable of 440 volt and bus bar required at site in respect with all accessories.	7450,000/=	Each	1,89,00,000/=
2.0 Mtr	2 Providing of 4 core cable Copper of IT 440 volts to energize.	7200/=	P.Mtr	14400/=
Total				Rs: 189,14,400/=


Contractor

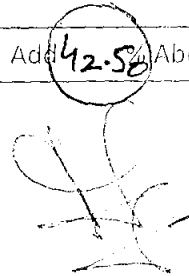

Executive Engineer
Rice Canal Division
Mehar @ K N Shah

SCHEDULE "B"

ESTIMATE FOR CONSTRUCTING DELIVERY BAY OF PUMPING STATION @ MEHAR MAIN DRAIN TO SUPPLEMENT IRRIGATION CHANNELS IN TALKA MEHAR (P-2 Part-I).

QUANTITY	ITEM	RATE	UNIT	AMOUNT
9456.00 cft	1 Excavation in foundation of building bridges and other structures i/c dagbelling dressing, refilling around the structure with excavated earth watering ramming lead up to 5 ft. in ordinary soil.	3176.25	% cft	30034.62
996.00 cft	2 Supplying and filling sand under floor and plugging in walls.	1141.25	%cft.	11366.85
84.00 sft	3 Erection & removal of centering for R.C.C or plain cement concrete works of Deodar wood (2nd-class).	7000.00	%sft.	5880.00
440.00 cft	4 Cement concrete plain including placing compacting finishing and curing complete including screening and washing of stone aggregate without shuttering Ratio 1:3:5.	12595.00	%cft.	55418.00
2146.00 cft	5 R.C.C Work in roof slab, beam column, rafts, lintels and other structural members laid in situ as precast laid in position complete in all respects. (i) Ratio (1:2:4) 90 lbs cement 2 Cft: sand 4 Cft: shingle 1/8" to 1/4" gauge.	337.00	P cft	723202.00
114.964 cwt	6 Fabrication of mild steel reinforcement for cement concrete including cutting bending laying in position making joints and fastening including cost of binding wire (also includes removal of rust from bars) using Tor bars.	5001.70	P.CWT	575015.44
Total				1406916.91
Add <u>42.58</u> Above / Below ()				595390- 1996307-


Contractor



Executive Engineer
Rice Canal Division
Meher @ K.N. Saha

SCHEDULE "B"

CONSTRUCTING VILLAGE BRIDGE @ PUMPING STATION TO SUPPLEMENT IRRIGATION CHANNELS IN TALKA MEHAR (P-2 Part-II).

QUANTITY	SNO	ITEM	RATE	UNIT	AMOUNT
5000.0 Cft	1	Excavation in foundation of building bridges and other structure i/c dagbelling dressing, refilling around structure with excavated earth watering ramming lead up to 5 ft in ordinary soil. (P-4/18-b)	3176.25	%cft	15881.25
2016.0 Cft	2	Cement concrete plain including placing compacting, finishing and curing, complete including screening and washing of stone aggregate without shuttering Ratio 1:3:6. (P-16/5-h)	12595.00	%cft	253915.20
666.0 Cft	3	Pacca brick work in foundation and plinth in cement sand mortar ratio 1:4 (P-20/4-c)	12501.41	%cft	83259.39
2860.0 Cft	4	Pacca brick work in other than building i/c striking joints up to 20 ft ratio 1:5. (P-22/7-i-d)	12574.38	%cft	359627.27
698.75 Nos	5	Dressing and chamfering of bricks	1736.35	%Nos	12132.75
1230.00 Sft	6	Cement pointing struck joint on walls ratio 1:2 (P-53/19-a)	1287.44	%sft	15835.51
565.5 Cft	7	R.C.C work in roof slab, beams columns rafts lintels and other structural members laid in situ or precast laid in position complete in all respect ratio 1:2:4. (P-16/6-a)	337.00	P.cft	190573.50
28.275 Cwt	8	Fabrication of mild steel reinforcement for cement concrete i/c cutting, bending laying in position making joints and fastening i/c cost of binding wire (also includes removal of rust from bars). (P-16/8-b)	5001.7	P.Cwt	141423.07
364.0 Sft	9	Erection & removal of centering for RCC or plain cement concrete works of deodar wood 2nd class. (P-18/19-a-ii)	7000.00	Sft	254800.00

QUANTITY	SNO	ITEM	RATE	UNIT	AMOUNT
996.0 Cft	10	Cement concrete plain including placing compacting finishing and curing complete including screening and washing of stone aggregate without shuttering Ratio 1:2:4. (P-16/5-f)	14429.25	%Cft	143715.33
391.0 Sft	11	Cement plaster (1:2) up to 12 ft height 1/2" thick. (P-52/9-b)	2496.72	%Sft	9762.18
4410.00 Cft	12	Barrow pit excavation undressed lead up to 100 ft in ordinary soil. (P-1/3-a)	2117.50	%0cft	9338
4410 Cft	13	Carriage of 100 Cft /5 tons of all materials like stone, aggregate, spawl, coal, lime surkhi etc B.G. Rail fastening points and crossing bridges, girders, pipes sheets, rails, M.S. bars etc or 1000 Nos. Bricks 10" x 5" x 3" or 150 cft of timber or 100 Mounds of fuel wood by trucks or any other means owned by the contractors. (2 miles)	502.52	%cft	22161
6831.00 Cft	14	Re handling of earth work upto lead 50' ft	1058.75	%0cft	7232
18 Days	15	Full hire charges of the pumping set per day, inclusive of wage of driver and assistant fuel or electric energy plate forms required for placing pumps etc, at lower depth with suction and delivery pipes for pumping out water found at various depths from trenches i/c the cost of erection and dismantling after completion of the job (i) Hire charges of pumping set of upto 10 HP pumping out water from 10 ft deep trench (P-H Schedule P-48/23-1)	1500.00	P.Day	27000
162 Hrs	16	For working pumps beyond 8 hours, (1) for a pumping set of upto 10 H.P	250.00	P.Hrs	40500
		Total			1357837.07
			42.50	% Above / Below ()	577081 - 1934918 -

CONTRACTOR

Executive Engineer
Rice Canal Division Mehar
@ KN Saha

Schedule " B"

ESTIMATE FOR CONSTRUCTION OF ACQUADUCT OVER MADO DISTRY (P-2 Part-III).

QUANTITY	SNO	ITEM	RATE	UNIT	AMOUNT
3500.0 Cft	1	Excavation in foundation of building bridges and other structure i/c dagbelling dressing, refilling around structure with excavated earth watering ramming lead up to 5 ft in ordinary soil. (P-4/18-b)	3176.25	%0cft	11116.88
1124.0 Cft	2	Cement concrete plain including placing compacting, finishing and curing, complete including screening and washing of stone aggregate without shuttering Ratio 1:3:6. (P-16/5-h)	12595.00	%cft	141567.80
1184.0 Cft	3	Pacca brick work in foundation and plinth in cement sand mortar ratio 1:4 (P-20/4-c)	12501.41	%cft	148016.69
807.0 Cft	4	Pacca brick work in other than building i/c striking joints up to 20 ft ratio 1:5. (P-22/7-i-d)	12574.38	%cft	101475.25
685.00 Nos	5	Dressing and chamfering of bricks	1736.35	% Nos	11894.00
410.00 Sft	6	Cement pointing struck joint on walls ratio 1:2 (P-53/19-a)	1287.44	%sft	5278.50
750.0 Cft	7	R.C.C work in roof slab, beams columns rafts lintels and other structural members laid in situ or precast laid in position complete in all respect ratio 1:2:4. (P-16/6-a)	337.00	P.cft	252750.00
60.000 Cwt	8	Fabrication of mild steel reinforcement for cement concrete i/c cutting, bending laying in position making joints and fastening i/c cost of binding wire (also includes removal of rust from bars). (P-16/8-b)	5001.7	P.Cwt	300102.00
256.0 Sft	9	Errection & removal of centering for RCC or plain cement concrete works of deodar wood 2nd class.	7000.00	Sft%	17920.00

QUANTITY	SNO	ITEM	RATE	UNIT	AMOUNT
		(P-18/19-a-ii)			
611.0 Cft	10	Cement concrete plain including placing compacting finishing and curing complete including screening and washing of stone aggregate without shuttering Ratio 1:2:4. (P-16/5-f)	14429.25	%Cft	88162.72
618.0 Sft	11	Cement plaster (1:2) up to 12 ft height 1/2" thick. (P-52/9-b)	2496.72	%Sft	15429.73
3375.00 Cft	12	Barrow pit excavation undressed lead up to 100 ft in ordinary soil. (P-1/3-a)	2117.50	%Cft	7147
3375 Cft	13	Carriage of 100 Cft /5 tons of all materials like stone, aggregate, spawl, coal, lime surkhi etc B.G. Rail fastening points and crossing bridges, girders, pipes sheets, rails, M.S. bars etc or 1000 Nos. Bricks 10" x 5" x 3" or 150 cft of timber or 100 Mounds of fuel wood by trucks or any other means owned by the contractors. (2 miles)	502.52	%cft	16960
6831.00 Cft	14	Re handling of earth work upto lead 50' ft	1058.75	%Cft	7232
18 Days	15	Full hire charges of the pumping set per day, inclusive of wage of driver and assistant fuel or electric energy plate forms required for placing pumps etc, at lower depth with suction and delivery pipes for pumping out water found at various depths from trenches i/c the cost of erection and dismantling after completion of the job (i) Hire charges of pumping set of upto 10 HP pumping out water from 10 ft deep trench (P-H Schedule P-48/23-1)	1500.00	P.Day	27000
162 Hrs	16	For working pumps beyond 8 hours, (1) for a pumping set of upto 10 H.P	250.00	P.Hrs	40500
		Total			1192552.50
			Add 42.50%	Above / Below-	506835+
					1699387.

CONTRACTOR


Executive Engineer
Rico Canal Division Mehar
@ KN Sirah

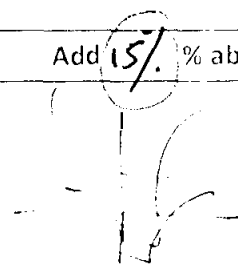
Schedule B

**Construction of Leading Channel from Mehar Main Drain Pumping Station to F.P Bund
RD 292 (P-3 Part-I).**

S.NO	ITEM	QUANTITY		RATE	UNIT	AMOUNT
1	Jungle clearance and removing with in 100'(a) light P-89/ 4a	600000	sft	75.63	%0 sft	45378
2	Ploughing 3 times P- 99/ 65	8.26	Acre	1769.63	Acre	14625
3	Barrow pit excavation undressed lead up to 100 ft in ordinary soil. P-1/ 3a	1452000.0	cft	2117.50	%0 cft	3074610
4	Earth Work compaction (soft ordinary or hard soil) laying earth in 6-inch layers leveling, dressing and watering for compaction etc complete P-3/ 13 b	1452000.0	cft	354.00	%0 cft	514008
5	Carriage of 100 cft / ton of all material like stone, aggregate, spawal, coal, lime surkhi etc B.B. rail fastening points and crossing bridges, girders, pipes sheet, rails, M.S bars etc of 1000 Nos tiles 12 x 6 x 2 or 150 cft of timber or 100 Mds of fuel wood by trucks or other means by the contractors (1 mile).	726000.0	cft	407.00	% cft	2954820
					Total	Rs: 6603441
					Add 15% % above / below ()	990516

7593957


CONTRACTOR


EXECUTIVE ENGINEER
RICE CANAL DIVISION
MEHAR @ I. N. SHAH

SCHEDULE 'B'

ESTIMATE FOR CONSTRUCTION OF RETAINING WALL ALONG PUMPING STATION @ MEHAR MAIN DRAIN FOR SUPPLEMENT IRRIGATION CHANNELS IN TALKA MEHAR (75 FT BOTH SIDES).

ESTIMATE FOR REPAIR DIRECT OUTLETS ALONG MEHAR BRANCH FROM RD 55+00 TO RD 100+00 IP SIDE (P-3 Part-II).

QUANTITY	ITEM		RATE	UNIT	AMOUNT
20800 Cft	1	Excavation in foundation of building bridges and other structure i/c dagbelling dressing refilling around the structure with excavated earth watering ramming lead up to 5 ft in ordinary soil. (P-4/18-b)	3176.25	%cft	66066
750 Sft	2	Errction & removal of centering for RCC or plain cement concrete works of deodar wood 2nd class. (P-18/19-a-ii)	7000.00	%sft	52500
3156.41 Cft	3	Cement concrete plain including placing compacting finishing and curing complete including screening and washing of stone aggregate without shuttering Ratio 1:3:6 (P-16/5-h)	12595.00	%cft	397550
1650 Cft	4	Pacca brick work in foundation and plinth in cement sand mortor rartio 1:4 (P-2\0/4-c)	12501.41	%cft	206273
5455 Cft	5	Pacca brick work other than building i/c striking of joints up to 20 ft height in cement sand mortar ratio 1:5 (P-22/7-1-d)	12574.38	%cft	685932
112.5 Cft	6	Cement concrete plain including placing compacting, finishing and curing complete i/c screening & washing of stone aggregate w/o shuttering ratio 1:2:4 (P-16/5-f)	14429.25	%cft	16233
975 Sft	7	Cement plaster 1:2 up to 12 ft height ¾" thick (P-52/9-c)	3056.62	%sft	29802
4176.96 Sft	8	Cement plaster 1:2 up to 12 ft height ½" thick (P-52/9-b)	2496.72	%sft	104287
14160 Cft	9	Barrow pit excavation undressed lead up to 100 ft in ordinary soil. (P-1/3-a)	2117.50	%0cft	29984

QUANTITY	ITEM		RA	UNIT	AMOUNT
10200 Cft	10	Carriage of 100 Cft /5 tons of all materials like stone, aggregate, spawl, coal, lime surkhi etc B.G. Rail fastening points and crossing bridges, girders, pipes sheets, rails, M.S. bars etc or 1000 Nos. Bricks 10" x 5" x 3" or 150 cft of timber or 100 Mounds of fuel wood by trucks or any other means owned by the contractors. (2 miles)	51.25	%cft	512500
4 Days	11	Full hire charges of the pumping set per day, inclusive of wage of driver and assistant fuel or electric energy plate forms required for placing pumps etc, at lower depth with suction and delivery pipes for pumping out water found at various depths from trenches i/c the cost of erection and dismantling after completion of the job (i) Hire charges of pumping set of upto 10 HP pumping out water from 10 ft deep trench (P-H Schedule P-48/23-1)	1500.00	P.Day	6000
32 Hrs	12	For working pumps beyond 8 hours, (1) for a pumping set of upto 10 H.P	250.00	P.Hrs	8000
90.00 cft	13	Dismantling cement concrete Reinforced separating Reinforcement from concrete and cleaning and strengthening same. (P-10/20)	5445.00	%cft	1900.50
279.84 cft	14	R.C.C Work in roof slab, beam column, rafts, lintels and other structural members laid in situ as pre-cast laid in position complete in all respects. (i) Ratio (1:2:4) 90 lbs. cement 2 CH sand 4 CH Shingle 1/8" to 1/4" gauge.	337.0	%cft	94106.08
16.791 cft	15	Fabrication of mild steel reinforcement for cement concrete including cutting bending laying in position making joints and fastening including cost of binding wire (also includes removal of rust from bars) using Tor bars.	5001.70	Pcwt	83983.54
Total Rs:					1837074
Add (46) % Above / Below ()					845054

2682128

~~Asst. Exec. Engineer
Dharmapuri Sub-Division~~


Executive Engineer
Rice Canal Division Mehar
@ K N Shah

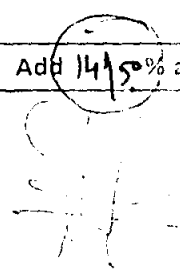
Schedule B

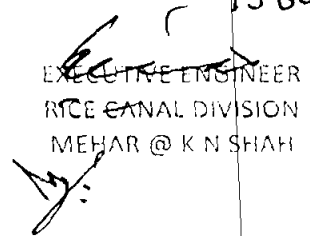
Construction of Leading Channel from Mehar Main Drain Pumping Station to F.P Bund RD 292 (P-4 Part-I).

S.NO	ITEM	QUANTITY		RATE	UNIT	AMOUNT
1	Jungle clearance and removing with in 100'(a) light P-89/ 4a	600000	cft	75.63	%0 cft	45378
2	Ploughing 3 times P- 99/ 65	8.26	Acre	1769.63	Acre	14625
3	Barrow pit excavation undressed lead up to 100 ft in ordinary soil. P-1/ 3a	1452000.0	cft	2117.50	%0 cft	3074610
4	Earth Work compaction (soft ordinary or hard soil) laying earth in 6-inch layers leveling, dressing and watering for compaction etc complete P-3/ 13 b	1452000.0	cft	354.00	%0 cft	514008
5	Carriage of 100 cft / ton of all material like stone, aggregate, spawal, coal, lime surkhi etc B.B. rail fastening points and crossing bridges, girders, pipes sheet, rails, M.S bars etc of 1000 Nos tiles 12 x 6 x 2 or 150 cft of timber or 100 Mds of fuel wood by trucks or other means by the contractors (1 mile).	726000.0	cft	407.00	% cft	2954820
					Total	Rs: 6603441
					Add 14.5% above / below ()	957499

7560940


CONTRACTOR




EXECUTIVE ENGINEER
RICE CANAL DIVISION
MEHAR @ K N SHAH

Schedule E

CONSTRUCTION OF RETAINING WALL ALONG PUMPING STATION @ MEHAR MAIN DRAIN FOR SUPPLEMENT IRRIGATION CHANNELS IN TALKA MEHAR (75 FT BOTH SIDES) (P-4 Part-II).

QUANTITY		ITEM	RATE	UNIT	AMOUNT	
10725	ft	1	Excavation in foundation of building bridges and other structure i/c daggelling dressing refilling around the structure with excavated earth watering ramming lead up to 5 ft in ordinary soil. (P-4/18-b)	3176.25	%0cft	34005
750	sft	2	Errection & removal of centering for RCC or plain cement concrete works of deodar wood 2nd class. (P-18/19-a-ii)	7000.00	%sft	52500
2100	Cft	3	Cement concrete plain including placing compacting finishing and curing complete including screening and washing of stone aggregate without shuttering Ratio 1:3:6 (P-16/5-h)	12595.00	%cft	264495
1650	Cft	4	Pacca brick work in foundation and plinth in cement sand mortor rartio 1:4 (P-2\0/4-c)	12501.41	%cft	206273
2475	Cft	5	Pacca brick work other than building i/c striking of joints up to 20 ft height in cement sand mortar ratio 1:5 (P-22/7-1-d)	12574.38	%cft	311216
112.5	Cft	6	Cement concrete plain including placing compacting, finishing and curing complete i/c screening & washing of stone aggregate w/o shuttering ratio 1:2:4 (P-16/5-f)	14429.25	%cft	16233
975	sft	7	Cement plaster 1:2 up to 12 ft height ¾" thick (P-52/9-c)	3056.62	%sft	29802
1350	Sft	8	Cement plaster 1:2 up to 12 ft height ½" thick (P-52/9-b)	2496.72	%sft	33706
10200	Cft	9	Barrow pit excavation undressed lead up to 100 ft in ordinary soil. (P-1/3-a)	2117.50	%0cft	21599

QUANTITY	ITEM		RATE	UNIT	AMOUNT
10200 Cft	10	Carriage of 100 Cft /5 tons of all materials like stone, aggregate, spawl, coal, lime surkhi etc B.G. Rail fastening points and crossing bridges, girders, pipes sheets, rails, M.S. bars etc or 1000 Nos. Bricks 10" x 5" x 3" or 150 cft of timber or 100 Mounds of fuel wood by trucks or any other means owned by the contractors. (2 miles)	502.52	%cft	51257
2 Days	11	Full hire charges of the pumping set per day, inclusive of wage of driver and assistant fuel or electric energy plate forms required for placing pumps etc, at lower depth with suction and delivery pipes for pumping out water found at various depths from trenches i/c the cost of erection and dismantling after completion of the job (i) Hire charges of pumping set of upto 10 HP pumping out water from 10 ft deep trench (P-H Schedule P-48/23-1)	1500.00	P.Day	3000
16 Hrs	12	For working pumps beyond 8 hours, (1) for a pumping set of upto 10 H.P	250.00	P.Hrs	4000
Total Rs:					1028145
Add: 49% Above / Below ()					503791
					1531936

Assistant Executive Engineer
Jamrao Sub Division

Executive Engineer
Rice Canal Division Mehar
@ K N Shah

SCHEDULE "B"

ESTIMATE FOR CONSTRUCTION OF BUND SLUICE AT RD 248 F P BUND (P-5 Part-I).

QUANTITY	SNO	ITEM	RATE	UNIT	AMOUNT
225000.0 Cft	1	Barrow pit excavation undressed lead up to 100 ft in ordinary soil. (P-1/3-a)	2117.50	%0cft	476437.50
225000.0 Cft	2	Carriage of 100 Cft /5 tons of all materials like stone, aggregate, spawl, coal, lime surkhi etc B.G. Rail fastening points and crossing bridges, girders, pipes sheets, rails, M.S. bars etc or 1000 Nos. Bricks 10" x 5" x 3" or 150 cft of timber or 100 Mounds of fuel wood by trucks or any other means owned by the contractors (1 miles). (P-16/5-h)	407.00	%cft	915750.00
150180.4 Cft	3	Excavation in foundation of building bridges and other structures i/c dagbelling dressing, refilling around the structure with excavated earth watering ramming lead up to 5 ft in ordinary soil. (P-4/18-b)	3176.25	%0cft	477010.43
1719.5 Sft	4	Errection & removal of centering for RCC or plain cement concrete works of deodar wood 2nd class. (P-4/19-a-ii)	7000.00	%cft	120365.00
7988.5 Cft	5	Cement concrete plain including placing compacting finishing and curing complete including screening and washing of stone aggregate without shuttering Ratio 1:3:6. (P-15/5-h)	12595.00	%cft	1006151.58
5162.0 Cft	6	Pacca brick work in foundation and plinth in cement sand mortor rartio 1:4 (P-20/4-c)	12501.41	%cft	645322.78
24086.33 Cft	7	Pacca brick work in other than building i/c stricking joints up to 20 ft ratio 1:5 (P-22/7-1-d)	12574.38	%cft	3028706.03
1950.5 Cft	8	Cement concrete plain including placing compacting finishing and curing complete including screening and washing of stone aggregate without shuttering Ratio 1:2:4. (P-16/5-f)	14429.25	%Cft	281442.52
182.0 Cft	9	R.C.C work in roof slab, beams columns rafts lintels and other structural members laid in situ or precast laid in position complete in all respect ratio 1:2:4. (P-17/6-a)	337.00	Pcft	61334.00

QUANTITY		ITEM	RATE	UNIT	AMOUNT
44800	Cft	10 Carriage of 100 Cft /5 tons of all materials like stone, aggregate, spawl, coal, lime surkhi etc B.G. Rail fastening points and crossing bridges, girders, pipes sheets, rails, M.S. bars etc or 1000 Nos. Bricks 10" x 5" x 3" or 150 cft of timber or 100 Mounds of fuel wood by trucks or any other means owned by the contractors. (2 miles)	502.52	%cft	225129
48	Da ys	11 Full hire charges of the pumping set per day, inclusive of wage of driver and assistant fuel or electric energy plate forms required for placing pumps etc, at lower depth with suction and delivery pipes for pumping out water found at various depths from trenches i/c the cost of erection and dismantling after completion of the job (i) Hire charges of pumping set of upto 10 HP pumping out water from 10 ft	1500.00	P.day	72000
432	Hrs	12 For working pumps beyond 8 hours, (1) for a pumping set of upto 10 H.P	250.00	P.Hrs	108000
Total Rs:					4828728
Add <u>44.0%</u> Above / Below (21246419

[Signature]
CONTRACTOR

[Signature]
Executive Engineer
Rice Canal Division Mehar
@ KN Shah

72000
6953368

SCHEDULE "B"

**ESTIMATE FOR CONSTRUCTION OF RETAINING WALL ALONG F P BUND
SLUICE @ RD 248 (P-5 Part-II).**

QUANTITY		ITEM	RATE	UNIT	AMOUNT	
17500	Cft	1	Excavation in foundation of building bridges and other structure i/c dagbelling dressing refilling around the structure with excavated earth watering ramming lead up to 5 ft in ordinary soil. (P-4/18-b)	3176.25	%Cft	55584
2050	Sft	2	Errection & removal of centering for RCC or plain cement concrete works of deodar wood 2nd class. (P-18/19-a-ii)	7000.00	%sft	144200
12000	Cft	3	Cement concrete plain including placing compacting, finishing and curing complete including screening and washing of stone aggregate without shuttering Ratio 1:3:6. (P-16/5-h)	12595.00	%cft	1511400
15400	Cft	4	Pacca brick work in foundation and plinth in cement sand mortor rartio 1:4. (P-20/4-c)	12501.41	%cft	1925217
2300	Cft	6	Cement concrete plain including placing compacting, finishing and curing complete i/c screening & washing of stone aggregate w/o shuttering ratio 1:2:4 (P-16/5-f)	14429.25	%cft	331873
2800	Sft	7	Cement plaster 1:2 up to 12 ft height ¾" thick (P-52/9-c)	3056.62	%sft	85585
3800	Sft	8	Cement plaster 1:2 up to 12 ft height ½" thick (P-52/9-b)	2496.72	%sft	94875
44800	Cft	9	Barrow pit excavation undressed lead up to 100 ft in ordinary soil. (P-1/3-a)	2117.50	%0cft	94864

QUANTITY	SNO	ITEM	RATE	UNIT	AMOUNT
1750 Cwt	10	Fabrication of mild steel reinforcement for cement concrete i/c cutting, bending laying in position making joints and fastening i/c cost of binding wire (also includes removal of rust from bars). Using tor bars. (P-17/8-b)	5001.7	P.cwt	48766.58
765.0 Cft	11	Cement plaster (1:2) up to 12 ft height 1/2" thick. (P-52/9-b)	2496.7	% sft	19599.25
3562.8 Sft	12	Cement pointing struck joint on walls ratio 1:2 (P-52/19 a)	1287.44	% sft	51018.03
55.0 Sft	13	Supply and fixing vertical single screw iron steel gate etc complete.	9000.00	P.sft	495000.00
225000.0 Cft	14	Rehandling of earth work (b) upto lead 50' ft. (P-2/9-b)	1058.75	%Cft	238218.75
340.00 Days	15	Full hire charges of the pumping set per day, inclusive of wage of driver and assistant fuel or electric energy platforms required for placing pumps etc, at lower depth with section and delivery pipes for pumping out water found at various depths from trenches i/c the cost of erection and dismantling after completion of the job (i) Hire charges of pumping set of upto 10 HP pumping out water from 10 ft deep trench. (P-H Schedule P-76/23-1)	1500	P.Day	510000
3400 Hrs	16	For working pumps beyond 8 hours, (1) for a pumping set of upto 10 H.P (P-H Schedule P-77/23-vi-1)	250.00	P.Hrs	850000
		Total			9225122.45
		Add 4.7% Above / Below ()			3841254/
					13066376/-

CONTRACTOR

Executive Engineer
Rice Canal Division Mehar
@ KN Shah

SCHEDULE "B"

CONSTRUCTION OF BUND SLUICE AT RD 275 F P BUND (P-6 Part-I).


QUANTITY	SNO	ITEM	RATE	UNIT	AMOUNT
225000.0 Cft	1	Barrow pit excavation undressed lead up to 100 ft in ordinary soil. (P-1/3-a)	2117.50	%0cft	476437.50
225000.0 Cft	2	Carriage of 100 Cft /5 tons of all materials like stone, aggregate, spawl, coal, lime surkhi etc B.G. Rail fastening points and crossing bridges, girders, pipes sheets, rails, M.S. bars etc or 1000 Nos. Bricks 10" x 5" x 3" or 150 cft of timber or 100 Mounds of fuel wood by trucks or any other means owned by the contractors (1 miles). (P-16/5-h)	407.00	%cft	915750.00
150180.4 Cft	3	Excavation in foundation of building bridges and other structures i/c dagbelling dressing, refilling around the structure with excavated earth watering ramming lead up to 5 ft in ordinary soil. (P-4/18-b)	3176.25	%0cft	477010.43
1719.5 Sft	4	Erection & removal of centering for RCC or plain cement concrete works of deodar wood 2nd class. (P-4/19-a-ii)	7000.00	%cft	120365.00
7988.5 Cft	5	Cement concrete plain including placing compacting finishing and curing complete including screening and washing of stone aggregate without shuttering Ratio 1:3:6. (P-15/5-h)	12595.00	%cft	1006151.53
5162.0 Cft	6	Pacca brick work in foundation and plinth in cement sand mortar ratio 1:4 (P-20/4-c)	12501.41	%cft	645322.78
24086.33 Cft	7	Pacca brick work in other than building i/c striking joints up to 20 ft ratio 1:5 (P-22/7-1-d)	12574.38	%cft	3028706.03
1950.5 Cft	8	Cement concrete plain including placing compacting finishing and curing complete including screening and washing of stone aggregate without shuttering Ratio 1:2:4. (P-16/5-f)	14429.25	%Cft	281442.52
182.0 Cft	9	R.C.C work in roof slab, beams columns rafts lintels and other structural members laid in situ or precast laid in position complete in all respect ratio 1:2:4. (P-1/6-a)	337.00	Pcft	61334.00


QUANTITY	SNO	ITEM	RATE	UNIT	AMOUNT
9.750 Cwt	10	Fabrication of mild steel reinforcement for cement concrete i/c cutting, bending laying in position making joints and fastening i/c cost of binding wire (also includes removal of rust from bars). Using tor bars. (P 17/8-b)	5001.7	P.cwt	48766.58
785.0 Cft	11	Cement plaster (1:2) up to 12 ft height 1/2" thick. (P-52/9-b)	2496.7	% sft	19599.25
3962.8 Sft	12	Cement pointing struck joint on walls ratio 1:2 (P-52/19 a)	1287.44	% sft	51018.03
55.0 Sft	13	Supply and fixing vertical single screw iron steel gate etc complete.	9000.00	P.sft	495000.00
225000 0 Cft	14	Rehandling of earth work (b) upto lead 50' ft. (P-2/9-b)	1058.75	%0Cft	238218.75
340.00 Days	15	Full hire charges of the pumping set per day, inclusive of wage of driver and assistant fuel or electric energy platforms required for placing pumps etc, at lower depth with suction and delivery pipes for pumping out water found at various depths from trenches i/c the cost of erection and dismantling after completion of the job (i) Hire charges of pumping set of upto 10 HP pumping out water from 10 ft deep trench. (P-H Schedule P-76/23-1)	1500	P.Day	510000
3400 Hrs	16	For working pumps beyond 8 hours, (1) for a pumping set of upto 10 H.P (P-H Schedule P-77/23-vi-1)	250.00	P.Hrs	850000
		Total			9225122.45

Add 43.95 % Above / Below (+)

3836888/-
13062010


CONTRACTOR




Executive Engineer
Rice Canal Division Mehar
@ KN Shah

SCHEDULE "B"



CONSTRUCTION OF RETAINING WALL ALONG F P BUND SLUICE @ RD 275 (P-6 Part-II).

QUANTITY	ITEM		RATE	UNIT	AMOUNT
17500 Cft	1	Excavation in foundation of building bridges and other structure i/c dagbelling dressing refilling around the structure with excavated earth watering ramming lead up to 5 ft in ordinary soil. (P-4/18-b)	3176.25	%cft	55584
2060 Sft	2	Errection & removal of centering for RCC or plain cement concrete works of deodar wood 2nd class. (P-18/19-a-ii)	7000.00	%sft	144200
12000 Cft	3	Cement concrete plain including placing compacting, finishing and curing complete including screening and washing of stone aggregate without shuttering Ratio 1:3:6. (P-16/5-h)	12595.00	%cft	1511400
15400 Cft	4	Pacca brick work in foundation and plinth in cement sand mortar rartio 1:4. (P-20/4-c)	12501.41	%cft	1925217
2300 Cft	6	Cement concrete plain including placing compacting, finishing and curing complete i/c screening & washing of stone aggregate w/o shuttering ratio 1:2:4 (P-16/5-f)	14429.25	%cft	331873
2800 Sft	7	Cement plaster 1:2 up to 12 ft height ¼" thick (P-52/9-c)	3056.62	%sft	85585
3800 Sft	8	Cement plaster 1:2 up to 12 ft height ½" thick (P-52/9-b)	2496.72	%sft	94875
44800 Cft	9	Barrow pit excavation undressed lead up to 100 ft in ordinary soil. (P-1/3-a)	2117.50	%cft	948600

QUANTITY		ITEM	RATE	UNIT	AMOUNT
44800	Cft	10 Carriage of 100 Cft /5 tons of all materials like stone, aggregate, spawl, coal, lime surkhi etc B.G. Rail fastening points and crossing bridges, girders, pipes sheets, rails, M.S. bars etc or 1000 Nos. Bricks 10" x 5" x 3" or 150 cft of timber or 100 Mounds of fuel wood by trucks or any other means owned by the contractors. (2 miles)	502.52	%cft	225129
48	Days	11 Full hire charges of the pumping set per day, inclusive of wage of driver and assistant fuel or electric energy plate forms required for placing pumps etc. at lower depth with suction and delivery pipes for pumping out water found at various depths from trenches i/c the cost of erection and dismantling after completion of the job (i) Hire charges of pumping set of upto 10 HP pumping out water from 10 ft	1500.00	P/day	72000
432	Hrs	12 For working pumps beyond 8 hours, (1) for a pumping set of upto 10 H.P	250.00	P.Hrs	108000
Total Rs:					4828728
Add 43.95% Above / below- (+)					2122227 1/2

6950958


CONTRACTOR


Executive Engineer
Rice Canal Division
Mehar KIN Shah


SCHEDULE "B"


CONSTRUCTION OF BUND SLUICE AT RD 295 F P BUND (P-7 Part-I).


QUANTITY	SNO	ITEM	RATE	UNIT	AMOUNT
225000.0 Cft	1	Barrow pit excavation undressed lead up to 100 ft in ordinary soil. (P-1/3-a)	2117.50	%0cft	476437.50
225000.0 Cft	2	Carriage of 100 Cft /5 tons of all materials like stone, aggregate, spawl, coal, lime surkhi etc B.G. Rail fastening points and crossing bridges, girders, pipes sheets, rails, M.S. bars etc or 1000 Nos. Bricks 10" x 5" x 3" or 150 cft of timber or 100 Mounds of fuel wood by trucks or any other means owned by the contractors (1 miles). (P-16/5-h)	407.00	%cft	915750.00
150180.4 Cft	3	Excavation in foundation of building bridges and other structures i/c dagbelling dressing, refilling around the structure with excavated earth watering ramming lead up to 5 ft in ordinary soil. (P-4/18-b)	3176.25	%0cft	477010.43
1719.5 Sft	4	Errection & removal of centering for RCC or plain cement concrete works of deodar wood 2nd class. (P-4/19-a-ii)	7000.00	%cft	120365.00
7988.5 Cft	5	Cement concrete plain including placing compacting finishing and curing complete including screening and washing of stone aggregate without shuttering Ratio 1:3:6. (P-15/5-h)	12595.00	%cft	1006151.58
5162.0 Cft	6	Pacca brick work in foundation and plinth in cement sand mortor rartio 1:4 (P-20/4-c)	12501.41	%cft	645322.78
24086.33 Cft	7	Pacca brick work in other than building i/c stricking joints up to 20 ft ratio 1:5 (P-22/7-1-d)	12574.38	%cft	3028706.03
1950.5 Cft	8	Cement concrete plain including placing compacting finishing and curing complete including screening and washing of stone aggregate without shuttering Ratio 1:2:4. (P-16/5-f)	14429.25	%Cft	281442.52
182.0 Cft	9	R.C.C work in roof slab, beams columns rafts lintels and other structural members laid in situ or precast laid in position complete in all respect ratio 1:2:4. (P-17/6-a)	337.00	Pcft	61334.00

QUANTITY	SNO	ITEM	RATE	UNIT	AMOUNT
9.750 Cwt	10	Fabrication of mild steel reinforcement for cement concrete i/c cutting, bending laying in position making joints and fastening i/c cost of binding wire (also includes removal of rust from bars). Using tor bars. (P-17/8-b)	5001.7	P.cwt	48766.58
785.0 Cf	11	Cement plaster (1:2) up to 12 ft height 1/2" thick. (P-52/9-b)	2496.7	% sft	19599.25
3962.8 Sf	12	Cement pointing struck joint on walls ratio 1:2 (P-52/19 a)	1287.44	% sft	51018.03
55.0 Sf	13	Supply and fixing vertical single screw iron steel gate etc complete.	9000.00	P.sft	495000.00
225000.0 Cf	14	Rehandling of earth work (b) upto lead 50' ft. (P-2/9-b)	1058.75	%Cft	238218.75
340.00	15	Full hire charges of the pumping set per day, inclusive of wage of driver and assistant fuel or electric energy platforms required for placing pumps etc, at lower depth with suction and delivery pipes for pumping out water found at various depths from trenches i/c the cost of erection and dismantling after completion of the job (i) Hire charges of pumping set of upto 10 HP pumping out water from 10 ft deep trench. (P-H Schedule P-76/23-1)	1500	P.Day	510000
3400 Hrs	16	For working pumps beyond 8 hours, (1) for a pumping set of upto 10 H.P (P-H Schedule P-77/23-vi-1)	250.00	P.Hrs	850000
		Total			9225122.45
Add 44.9% Above / Below ()					3919825

Total 13144947/=


CONTRACTOR




Executive Engineer
Rice Canal Division Mehar
@ KN Shah

SCHEDULE "B"

CONSTRUCTION OF RETAINING WALL ALONG F P BUND SLUICE @ RD 295 (P-7 Part-II).

QUANTITY	ITEM	RATE	UNIT	AMOUNT
17500 Cft	Excavation in foundation of building bridges and other structure i/c dagbelling dressing refilling around the structure with excavated earth watering ramming lead up to 5 ft in ordinary soil. (P-4/18-b)	3176.25	%0cft	55584
2060 Sft	Errection & removal of centering for RCC or plain cement concrete works of deodar wood 2nd class. (P-18/19-a-ii)	7000.00	%sft	144200
12000 Cft	Cement concrete plain including placing compacting, finishing and curing complete including screening and washing of stone aggregate without shuttering Ratio 1:3:6. (P-16/5-h)	12595.00	%cft	1511400
15400 Cft	Pacca brick work in foundation and plinth in cement sand mortor rartio 1:4. (P-20/4-c)	12501.11	%cft	1925217
2300 Cft	Cement concrete plain including placing compacting, finishing and curing complete i/c screening & washing of stone aggregate w/o shuttering ratio 1:2:4 (P-16/5-f)	14429.25	%cft	331873
2800 Sft	Cement plaster 1:2 up to 12 ft height ¼" thick (P-52/9-c)	3056.62	%sft	85585
3800 Sft	Cement plaster 1:2 up to 12 ft height ½" thick (P-52/9-b)	2496.72	%sft	94875
44800 Cft	Barrow pit excavation undressed lead up to 100 ft in ordinary soil. (P-1/3-a)	2117.50	%0cft	94864

QUANTITY		ITEM	RATE	UNIT	AMOUNT
500	Cft	10 Carriage of 100 Cft /5 tons of all materials like stone, aggregate, spawl, coal, lime surkhi etc B.G. Rail fastening points and crossing bridges, girders, pipes sheets, rails, M.S. bars etc or 1000 Nos. Bricks 10" x 5" x 3" or 150 cft of timber or 100 Mounds of fuel wood by trucks or any other means owned by the contractors. (2 miles)	502 52	%cft	225129
48	Days	11 Full hire charges of the pumping set per day, inclusive of wage of driver and assistant fuel or electric energy plate forms required for placing pumps etc, at lower depth with suction and delivery pipes for pumping out water found at various depths from trenches i/c the cost of erection and dismantling after completion of the job (i) Hire charges of pumping set of upto 10 HP pumping out water from 10 ft	1500.00	P.Day	72000
432	Hrs	12 For working pumps beyond 8 hours, (1) for a pumping set of upto 10 H.P	250.00	P.Hrs	108000
Total Rs:					4828728
Add 44.90% Above / Below ()					2168099/=

LD
asw
CONTRACTOR

[Handwritten Signature]

Talwar
Executive Engineer
Rice Canal Division
Mehar K NSM

6996827/=

SCHEDULE B

CONSTRUCTION OF MANJAN X-REGULATOR ALONG RAJWAH BRANCH RD 49+00 (P-8).

QUANTITY	SNO	ITEM	RATE	UNIT	AMOUNT
5000.0 Cft	1	Excavation in foundation of building bridges and other structure i/c dagbelling dressing, refilling around structure with excavated earth watering ramming lead up to 5 ft in ordinary soil. (P-4/18-b)	3176.25	%Cft	15881.25
2016.0 Cft	2	Cement concrete plain including placing compacting, finishing and curing, complete including screening and washing of stone aggregate without shuttering Ratio 1:3:6. (P-16/5-h)	12595.00	%cft	253915.20
666.0 Cft	3	Pacca brick work in foundation and plinth in cement sand mortar ratio 1:4 (P-20/4-c)	12501.41	%cft	83259.39
2860.0 Cft	4	Pacca brick work in other than building i/c striking joints up to 20 ft ratio 1:5. (P-22/7-i-d)	12574.38	%cft	359627.27
698.8 Nos.	5	Dressing and chamfering of bricks. (P-23/14)	1736.35	%Nos.	12132.75
1230.00 Sft	6	Cement pointing struck joint on walls ratio 1:2 (P-53/19-a)	1287.44	%sft	15835.51
585.0 Cft	7	R.C.C work in roof slab, beams columns rafts lintels and other structural members laid in situ or precast laid in position complete in all respect ratio 1:2:4. (P-16/6-a)	337.00	P.cft	197145.00
40.95 Cwt	8	Fabrication of mild steel reinforcement for cement concrete i/c cutting, bending laying in position making joints and fastening i/c cost of binding wire (also includes removal of rust from bars). (P-16/8-b)	4820.2	P.Cwt	197387.19
364.0 Sft	9	Errection & removal of centering for RCC or plain cement concrete works of deodar wood 2nd class. (P-18/19-a-ii)	7000.00	Sft%	25480.00
996.0 Cft	10	Cement concrete plain including placing compacting, finishing and curing complete including screening and washing of stone aggregate without shuttering Ratio 1:2:4. (P-16/5-f)	14429.25	%Cft	143715.33
391.0 Sft	11	Cement plaster (1:2) up to 12 ft height 1/2" thick. (P-52/9-b)	2496.72	%Sft	9762.18

QUANTITY	SNO	ITEM	RATE	UNIT	AMOUNT
453.0 Sft	12	Supplying & Fixing double Screw vertical Gates complete in all respects.	9000.00	P.sft	4077000.00
6050.0 cft	13	Barrow pit excavation undressed lead up to 100 ft in ordinary soil. (P-1/3-a)	2117.5	%0 cft	12810.88
6200.0 Cft	14	Dumping stone by boat including loading into boat lead within 3 chains. (P-81/19)	1210.0	% cft	75020.00
6200.0 Cft	15	Supplying within 5 chains boulder 9 inch and above. (P-81/ 10-a)	1095.0	% cft	67890.00
6200.0 Cft	16	Extra for anchoring boat. (P-81/20)	60.5	% cft	3751.00
6050.0 Cft	17	Carriage of 100 Cft /5 tons of all materials like stone, aggregate, spawl, coal, lime surkhi etc B.G. Rail fastening points and crossing bridges, girders, pipes sheets, rails, M.S. bars etc or 1000 Nos. Bricks 10" x 5" x 3" or 150 cft of timber or 100 Mounds of fuel wood by trucks or any other means owned by the contractors. (2 miles). (Schedule of carriage P-1/1)	502.52	%Cft	30402.46
6831.0 Cft	18	Rehandling of earth work upto lead 50' ft. (P-2/9-b)	1058.75	%0Cft	7232.32
30 Days	19	Full hire charges of the pumping set per day, inclusive of wage of driver and assistant fuel or electric energy platforms required for placing pumps etc, at lower depth with suction and delivery pipes for pumping out water found at various depths from trenches i/c the cost of erection and dismantling after completion of the job (i) Hire charges of pumping set of upto 10 HP pumping out water from 10 ft deep trench. (P-H Schedule P-76/23-1)	1500	P.Day	45000
300 Hrs	20	For working pumps beyond 8 hours, (1) for a pumping set of upto 10 H.P (P-H Schedule P-77/23-vi-1)	250.00	P.Hrs	75000
		Total			5708247.72
		Add 62% % Above / Below ()			1011373/=
					6719680/=

Sankar
CONTRACTOR



Shah
Executive Engineer
Rice Canal Division Mehar
@ KN Shah

SCHEDULE "B"

DE-SILTING ALONG KAKOLE BRANCH RD 0+00 TO RD 49+00 (P-9 Part-I).

S#	ITEM	QTY	RATE	UNIT	AMOUNT
1	Engaging excavator machine for desilting of channel (Rate approved by Chief Engineer Sukkur Barrage Right Bank Region Larkana vide letter No WB-II/RBR/WSC/Cpmt:Stt:/2013-1/4-W/1958 dated 24.07.2013)	1372.56	1900	Hr s P- Hour	6725544
2	Rehandling of earth work (b) upto lead of 50ft. PG# 02 Item # 09/b GSS 2012.	2401980	1058.75	CR	%0CR 2543096
3	Dressing & levelling of earth work to designed section etc complete ordinary soil.	2401980.00	187.55	cft	%0Cft 450491
<i>No Perm: item No: 1</i>				Total:	Rs: 9719132
					Add 15.5% Above / Below () 449038/-
					10168170/-

Acms
Contractor

[Signature]
Resident Engineer
Rice Canal Division
Mehar @ K N Shah

Schedule B

**CONSTRUCTION OF RETAINING WALL ALONG RADHAN BRANCH RD 0+0 to RD 0+250
BOTH SIDES (P-9 Part-II).**

QUANTITY		ITEM	RATE	UNIT	AMOUNT
35750	Cft	1 Excavation in foundation of building bridges and other structure i/c dagbelling dressing refilling around the structure with excavated earth watering ramming lead up to 5 ft in ordinary soil. (P-4/18-b)	3176.25	%cft	113551
2500	Sft	2 Erection & removal of centering for RCC or plain cement concrete works of deodar wood 2nd class. (P-18/19-a-ii)	7000.00	%sft	175000
7500	Cft	3 Cement concrete plain including placing compacting finishing and curing complete including screening and washing of stone aggregate without shuttering Ratio 1:3:6 (P-16/5-h)	12595.00	%cft	944625
6000	Cft	4 Pacca brick work in foundation and plinth in cement sand mortar rartio 1:4 (P-2\0/4-c)	12501.41	%cft	750085
12000	Cft	5 Pacca brick work other than building i/c striking of joints up to 20 ft height in cement sand mortar ratio 1:5 (P-22/7-1-d)	12574.38	%cft	1508920
375	Cft	6 Cement concrete plain including placing compacting, finishing and curing complete i/c screening & washing of stone aggregate w/o shuttering ratio 1:2:4 (P-16/5-f)	14429.25	%cft	54110
4000	Sft	7 Cement plaster 1:2 up to 12 ft height 3/8" thick (P-52/9-c)	3056.62	%sft	122265
5375	Sft	8 Cement plaster 1:2 up to 12 ft height 1/2" thick (P-52/9-b)	2496.72	%sft	134199
34000	Cft	9 Barrow pit excavation undressed lead up to 100 ft in ordinary soil. (P-1/3-a)	2117.50	%cft	71995


QUANTITY	ITEM		RATE	UNIT	AMOUNT
34000 Cft	10	Carriage of 100 Cft /5 tons of all materials like stone, aggregate, spawl, coal, lime surkhi etc B.G. Rail fastening points and crossing bridges, girders, pipes sheets, rails, M.S. bars etc or 1000 Nos. Bricks 10" x 5" x 3" or 150 cft of timber or 100 Mounds of fuel wood by trucks or any other means owned by the contractors. (2 miles)	502.52	%cft	170857
32 Days	11	Full hire charges of the pumping set per day, inclusive of wage of driver and assistant fuel or electric energy plate forms required for placing pumps etc, at lower depth with suction and delivery pipes for pumping out water found at various depths from trenches i/c the cost of erection and dismantling after completion of the job (i) Hire charges of pumping set of upto 10 HP pumping out water from 10 ft deep trench (P-H Schedule P-48/23-1)	1500.00	P.Day	48000
256 Hrs	12	For working pumps beyond 8 hours, (1) for a pumping set of upto 10 H.P	250.00	P.Hrs	64000
				Total Rs:	4157611
Add 48.0% Above / Below ()					1995653/-
					6153264/-

Aqar
CONTRACTOR

Mehar KN Shah
Executive Engineer
Rice Canal Division
Mehar KN Shah

SCHEDULE "B"					
EARTH WORK ALONG KAKOL BRANCH RD 0+00 TO 25+00 NIP SIDE (P-10 Part-I).					
S#	ITEM	QTY	RATE	UNIT	AMOUNT
1	Jungle clearance and removing with in 100'(a) light. P-89/4a	625000 Sft	75.63	%9sft	47269
2	Ploughing 3 times. P-99/65	11.48 Acre	3465.00	Acre	39773
3	Barrow pit excavation undressed lead up to 100 ft in ordinary soil P 1/3a	612375 cft	2117.50	%0 cft	1296704
4	Dressing & levelling of earth work to designed section etc complete ordinary soil.	612375 cft	187.55	%0 cft	114851
5	Carriage of 100 cft / ton of all material like stone, aggregate, spawal, cool, lime surkhi etc B.B. rail fastening points and crossing bridges, girders, pipes sheet, rails, M.S bars etc of 1000 Nos tiles 12 x 6 x 2 or 150 cft of timber or 100 Mds of fuel wood by trucks or other means by the contractors. (2 miles).	612375 cft	502.52	% cft	3077307
Total				Rs.	4575903
Add 17.0 % Above / Below ()					777904/-
Total Rs:					5353807/-


CONTRACTOR


Executive Engineer
Rice Canal Division
Mehar @ K N Shah

SCHEDULE "B"

CONSTRUCTION OF RETAINING WALL ALONG MEHAR BRANCH (U/S KAKOL BRANCH) RD 38 NIP SIDE =750FT. / STONE PITCING (P-10 Part-II).


S. NO	ITEM	QUANTITY		RATE	UNIT	AMOUNT
1	Earth work excavation in irrigation Channels drains etc dressed to designed section grades and profiles excavated materials disposed off and dressed with in 50ft: lead (a) ordinary soil. P-1 Item 5. (a).	16800	cu	2420.00	%0 cu	40656
2	Barrow pit excavation undressed lead up to 100 ft in ordinary soil. P-1/ 3a	146531	cu	2117.50	%0 cu	310280
3	Carriage of 100 cft / ton of all material like stone, aggregate, spowal, coal, lime surkhi etc B.B. rail fastening points and crossing bridges, girders, pipes sheet, rails, M.S bars etc of 1000 Nos tiles 12 x 6 x 2 or 150 cft of timber or 100 Mds of fuel wood by trucks or other means by the contractors (1 miles).	146531	cft	407.00	% cft	596382
4	Earth work compaction (Soft ordinary land soil). (a) laying earth in 6" layers levelling and dressing complete. (P-3/13-a)	146531	cft	263.00	%0 cft	38538
5	Stone filling dry hand packed as filling behind the retaining walls or in pitching and apron. (P-31/16).	16800	cft	2684.00	% cft	450912
6	Formation, dressing and preparing sub grade. (b) on slope. (P-74 /1 (b).)	27637	stt	453.75	% stt	125404
7	Stone pitching i/c sub base with hammer dressed stone on surface laid in courses i/c carriage of material with in 3 chains. P-32 Item 23.	34546.50	cft	5377.63	% cft	1857782.95

Total Rs: 3419954

Add 92.0 % Above / Below () : 3146357/

Total Rs. 6566311/


CONTRACTOR


Engineer
Price Control Division
Mehar (U/S) K. N. Shah


Schedule B

REPAIR DIRECT OUTLETS ALONG KAKOLE BRANCH (EX MEHAR BRANCH) FROM RD 0+00 TO RD 40+00 IP SIDE (P-11 Both Sides).

QUANTITY	ITEM	RATE	UNIT	AMOUNT	
42.00 cft	1	Dismantling cement concrete Reinforced separating Reinforcement from concrete and cleaning and strengthening same. (P-10/20)	5445.00	%cft	2286.90
6864.00 cft	2	Excavation in foundation of building bridges and other structure i/c dagbelling dressing refilling around the structure with excavated earth watering ramping lead up to one chain & lift up to 50 in ordinary soil. (P-4/18--B)	3176.25	%0 cft	21801.78
743.52 cft	3	Cement concrete plain i/c placing compacting finishing and curing complete including screening ratio 1:3:6	12595.00	% cft	93646.34
1657.64 cft	4	Paeca brick work other than building i/c striking of joints up to 20 ft height in cement sand mortar ratio 1:5 (P-21/7-1-d)	12574.38	% cft	208437.95
1791.68 sft	5	Cement plaster 1:2 up to 12 ft height ½" thick (P-51/9-b)	2496.72	% sft	44733.23
173.91 cft	6	R.C.C Work in roof slab, beam column, rafts, lintels and other structural members laid in situ as pre-cast laid in position complete in all respects. (i) Ratio (1:2:4) 90 lbs cement 2 Cft: sand 4 Cft: shingle 1/8" to 1/4" gauge.	337.0	P.cft.	58607.67
10.435 cft	7	Fabrication of mild steel reinforcement for cement concret including cutting bending laying in position making joints and fastening including cost of binding wire (also includes removal of rust from bars) using Tor bars.	5001.70	Pcwt	52192.74
2352.0 cft	8	Barrow pit excavation undressed lead up to 100' in ordinary soil.	2117.50	%0 cft	4980.36
Total Amount (2 Nos.) IP & NIP Sides					486687
Amount of 15 Nos. modules IP & NIP sides					7300305
Add <u>43.0</u> % Above / Below ()					3139131/3

Total 10439436/-



CONTRACTOR


Executive Engineer
Rice Canal Division
Mehar @ K N Shah

SCHEDULE "B"

Construction Retaining wall along Mehar Branch Kudan Head / Stone Pitching along Mehar Branch (Kudan Branch Head) RD 54+500 TO 55+500 NIP SIDE (P-12).						
S. NO	ITEM	QUANTITY		RATE	UNIT	AMOUNT
1	Earth work excavation in irrigation Channels drains etc dressed to designed section grades and profiles excavated materials disposed off and dressed with in 50ft lead (a) ordinary soil. P-1 Item 5. (a).	14000	cft	2120.00	%	33880
2	Barrow pit excavation undressed lead up to 100 ft in ordinary soil. P-1/3a	88607	cft	2117.50	%	187625
3	Carriage of 100 cft / ton of all material like stone, aggregate, spoval, coal, lime surkhi etc B.B. rail fastening points and crossing bridges, girders, pipes sheet, rails, M.S bars etc of 1000 Nos tiles 12 x 6 x 2 or 150 cft of timber or 100 Mds of fuel wood by trucks or other means by the contractors (1 miles).	88607	cft	407.00	%	360631
4	Earth work compaction (Soft ordinary land soil). (a) Laying earth in 6" layers levelling, and dressing complete. (P-3/13-a)	88607	cft	263.00	%	23304
5	Stone filling dry hand packed as filling behind the retaining walls or in pitching and apron. (P-31/16).	14000	cft	2684.00	%	375760
6	Formation, dressing and preparing sub grade. (b) on slope. (P-74 /1 (b).)	18118	sft	453.75	%	82210
7	Stone pitching i/c sub base with hammer dressed stone on surface laid in courses i/c carriage of material with in 3 chains. P-32 Item 2.3	22647.50	cft	5377.63	%	1217898.75
Total					Rs:	2281309
Add 98.0 % Above / Below ()						2235683 1/2
						770701 4516992 1/2


 CONTRACTOR


 Executive Engineer
 Rice Canal Division
 Mehar @ K N Shah.


SCHEDULE "B"

CONSTRUCTING BRIDGES ALONG MADO DISTRY RD 45 & RD 65 (TOTAL 2 BRIDGES) (P-14 Part-I).

QUANTITY	SNO	ITEM	RATE	UNIT	AMOUNT
5712.0 Cft	1	Excavation in foundation of building bridges and other structure i/c dagbelling dressing refilling around structure with excavated earth watering ramming lead up to 5 ft in ordinary soil. (P-4/18-B)	3176.25	%Cft	18142.74
2856.0 Cft	2	Extra for Wet Earth work	1058.75	%Cft	3023.79
5712.0 Cft	3	Extra for every 50' additional lead or part there of extra lead 10/85 per lead 6 extra lead. (P-2/8-a)	604.68	%Cft	3453.93
792.0 Cft	4	Cement concrete plain including placing compacting finishing and curing complete including screening and washing of stone aggregate without shuttering Ratio (1:3:6) (P-16/5-h)	14429.25	%cft	114279.66
370.0 Cft	5	Pacca brick work in foundation and plinth in cement sand mortor rartio 1:4 (P-20/4-c)	12501.41	%cft	46255.22
899.3 Cft	6	Pacca brick work in other than building i/c stricking joints up to 20 ft ratio 1:5 (P-22/7-i-d)	12574.38	%cft	113075.11
387.00 Sft	7	Cement pointing struck joint on walls ratio 1:2 (P-53/19-a)	645.37	%sft	2497.58
259.0 Cft	8	R.C.C work in roof slab, beams columns rafts lintels and other structural members laid in situ or precast laid in position complete in all respect Ratio 1:2:4 (P-16/6-a)	337.00	P.cft	87283.00
18.13 Cwt	9	Fabrication of mild steel reinforcement for cement concrete i/c cutting, bending laying in position making joints and fastening i/c cost of binding wire (also includes removal of rust from bars). (P-16/8-a)	4820.2	P.Cwt	87390.23
314.0 Sft	10	Errrection & removal of centering for RCC or plain cement concrete works of deodar wood 2nd class. (P-18/19-a-ii)	7000.00	Sft%	21980.00
588.0 Cft	11	Cement concrete plain including placing compacting finishing and curing complete including screening and washing of stone aggregate without shuttering Ratio (1:2:4). (P-16/5-f)	14429.25	%Cft	84843.99

QUANTITY	SNO	ITEM	RATE	UNIT	AMOUNT
1468.0 Sft	12	Cement plaster (1:2) up to 12 ft height 3/4" thick. (P-52/9-c)	3056.62	%Sft	44871.18
1468.0 Sft	13	Cement plaster (1:2) up to 12 ft height 1/2" thick. (P-52/9-b)	2496.72	%Sft	36651.85
11824.0 Cft	14	Barrow pit excavation undressed lead up to 100 ft in ordinary soil. (P-1/3-a)	2117.50	%Cft	25037.32
11824.0 Cft	15	Carriage of 100 Cft /5 tons of all materials like stone, aggregate, spawl, coal, lime surkhi etc B.G. Rail fastening points and crossing bridges, girders, pipes sheets, rails, M.S. bars etc or 1000 Nos. Bricks 10" x 5" x 3" or 150 cft of timber or 100 Mounds of fuel wood by trucks or any other means owned by the contractors (2 miles)	502.52	%Cft	59417.96
11824.0 Cft	16	Dressing & leveling of earth work to designed section etc complete. (P-3/11-b)	187.55	%Cft	2217.59
9315.0 Cft	17	Re handling of earth work upto lead 50' ft (P-2/8-a)	1058.75	%Cft	9862.26
18 Days	18	Full hire charges of the pumping set per day, inclusive of wage of driver and assistant fuel or electric energy platforms required for placing pumps etc, at lower depth with suction and delivery pipes for pumping out water found at various depths from trenches i/c the cost of erection and dismantling after completion of the job (i) Hire charges of pumping set of upto 10 HP pumping out water from 10 ft deep trench. (P-H Schedule P-76/23-1)	1500	P/Day	27000
180 Hrs	19	For working pumps beyond 8 hours, (1) for a pumping set of upto 10 H.P (P-H Schedule P-77/23-vi-1)	250.00	P/Hrs	45000
		Total			832283.41
AMOUNT OF TWO BRIDGES					1664567
Add (40) % Above / Below (+)					66585
					23303


CONTRACTOR


Executive Engineer
Rice Canal Division
Mehar @ K N Shah

SCHEDULE "B"


CONSTRUCTING BRIDGES ALONG KALRO MINOR (TOTAL 2 BRIDGES) (P-14 Part-II).

QUANTITY	SNO	ITEM	RATE	UNIT	AMOUNT
5208.0 Cft	1	Excavation in foundation of building bridges and other structure i/c dagbelling dressing refilling around structure with excavated earth watering ramming lead up to 5 ft in ordinary soil. (P-4/18-B)	3176.25	%Cft	16541.91
720.0 Cft	2	Cement concrete plain including placing compacting finishing and curing complete including screening and washing of stone aggregate without shutering Ratio (1:3:6) (P-16/5-h)	14429.25	%Cft	103890.00
370.0 Cft	3	Pacca brick work in foundation and plinth in cement sand mortor rartio 1:4 (P-20/4-c)	12501.41	%Cft	46255.22
589.5 Cft	4	Pacca brick work in other than building i/c striking joints up to 20 ft ratio 1:5 (P-22/7-i-d)	12574.38	%Cft	74125.97
323.00 Sft	5	Cement pointing struck joint on walls ratio 1:2 (P-53/19-a)	645.37	%Sft	2084.55
231.0 Cft	6	R.C.C work in roof slab, beams columns rafts lintels and other structural members laid in situ or precast laid in position complete in all respect Ratio 1:2:4 (P-16/6-a)	337.00	%Cft	77847.00
16.17 Cwt	7	Fabrication of mild steel reinforcement for cement concrete i/c cutting, bending laying in position making joints and fastening i/c cost of binding wire (also includes removal of rust from bars. (P-16/8-a)	4820.2	%Cwt	77942.63
314.0 Sft	8	Errrection & removal of centering for RCC or plain cement concrete works of deodar wood 2nd class. (P-18/19-a-ii)	7000.00	%Sft	21980.00
216.0 Cft	9	Cement concrete plain including placing compacting finishing and curing complete including screening and washing of stone aggregate without shuttering Ratio (1:2:4). (P-16/5-f)	14429.25	%Cft	31167.18
776.0 Sft	10	Cement plaster (1:2) up to 12 ft height 3/4" thick. (P-52/9-c)	3056.62	%Sft	23719.37
776.0 Sft	11	Cement plaster (1:2) up to 12 ft height 1/2" thick. (P-52/9-b)	2496.72	%Sft	19374.50
11824.0 Cft	12	Barrow pit excavation undressed lead up to 100 ft in ordinary soil.	2117.50	%Cft	25037.37

QUANTITY	SNO	ITEM	RATE	UNIT	AMOUNT
		(P-1/3-a)			
11824.0 Cft	13	Carriage of 100 Cft /5 tons of all materials like stone, aggregate, spawl, coal, lime surkhi etc B.G. Rail fastening points and crossing bridges, girders, pipes sheets, rails, M.S. bars etc or 1000 Nos. Bricks 10" x 5" x 3" or 150 cft of timber or 100 Mounds of fuel wood by trucks or any other means owned by the contractors. (2 miles)	502.52	%Cft	59417.96
11824.0 Cft	14	Dressing & leveling of earth work to designed section etc complete. (P-3/11-b)	187.55	%Cft	2217.59
3 Days	15	Full hire charges of the pumping set per day, inclusive of wage of driver and assistant fuel or electric energy platforms required for placing pumps etc, at lower depth with suction and delivery pipes for pumping out water found at various depths from trenches i/c the cost of erection and dismantling after completion of the job (i) Hire charges of pumping set of upto 10 H.P pumping out water from 10 ft deep trench. (P-H Schedule P-76/23-1)	1500	P. Day	4500
30 Hrs	16	For working pumps beyond 8 hours, (1) for a pumping set of upto 10 H.P (P-H Schedule P-77/23-vi-1)	250.00	P. Hrs	7500
		Total			593601.85
AMOUNT OF TWO BRIDGES					1187204
Add (40% Above / Below ())					47488
					Rs 16620


CONTRACTOR




Executive Engineer Rice
Canal Division Mehar @
K N Shah

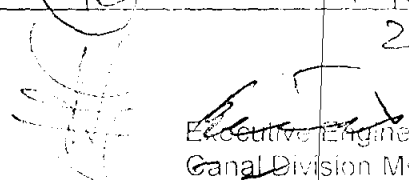
SCHEDULE "B"

CONSTRUCTING BRIDGES ALONG NARA DISTRY RD 26 & RD 38 (TOTAL 2 BRIDGES) (P-14 Part-III).

QUANTITY	SNO	ITEM	RATE	UNIT	AMOUNT
5712.0 Cft	1	Excavation in foundation of building bridges and other structure i/c dagbelling dressing refilling around structure with excavated earth watering ramming lead up to 5 ft in ordinary soil. (P-4/18-B)	3176.25	%cft	18142.74
2856.0 Cft	2	Extra for Wet Earth work	1058.75	%cft	3023.79
5712.0 Cft	3	Extra for every 50' additional lead or part there of extra lead 10/85 per lead 6 extra lead. (P-2/8-a)	604.68	%cft	3453.93
792.0 Cft	4	Cement concrete plain including placing compacting finishing and curing complete including screening and washing of stone aggregate without shuttering Ratio (1:3:6). (P-16/5-h)	14429.25	%cft	114279.66
370.0 Cft	5	Pacca brick work in foundation and plinth in cement sand mortor rartio 1:4 (P-20/4-c)	12501.41	%cft	46255.22
899.3 Cft	6	Pacca brick work in other than building i/c striking joints up to 20 ft ratio 1:5 (P-22/7-i-d)	12574.38	%cft	113075.11
387.00 Sft	7	Cement pointing struck joint on walls ratio 1:2 (P-53/19-a)	645.37	%sft	2497.58
287.0 Cft	8	R.C.C work in roof slab, beams columns rafts lintels and other structural members laid in situ or precast laid in position complete in all respect Ratio 1:2:4 (P-16/6-a)	337.00	%cft	96719.00
20.09 Cwt	9	Fabrication of mild steel reinforcement for cement concrete i/c cutting, bending laying in position making joints and fastening i/c cost of binding wire (also includes removal of rust from bars). (P-16/8-a)	4820.2	%cwt	96837.82
314.0 5ft	10	Errection & removal of centering for RCC or plain cement concrete works of deodar wood 2nd class. (P-18/19-a-ii)	7000.00	5f%	21980.00
588.0 Cft	11	Cement concrete plain including placing compacting finishing and curing complete including screening and washing of stone aggregate without shuttering Ratio (1:2:4). (P-16/5-f)	14429.25	%cft	84843.99

QUANTITY	SNO	ITEM	RATE	UNIT	AMOUNT
1468.0 Sft	12	Cement plaster (1:2) up to 12 ft height 3/4" thick. (P-52/9-c)	3056.62	%Sft	44871.18
1468.0 Sft	13	Cement plaster (1:2) up to 12 ft height 1/2" thick. (P-52/9-b)	2496.72	%Sft	36651.85
11824.0 Cft	14	Barrow pit excavation undressed lead up to 100 ft in ordinary soil. (P-1/3-a)	2117.50	%Cft	25037.32
11824.0 Cft	15	Carriage of 100 Cft /5 tons of all materials like stone, aggregate, spawl, coal, lime surkhi etc B.G. Rail fastening points and crossing bridges, girders, pipes sheets, rails, M.S. bars etc or 1000 Nos. Bricks 10" x 5" x 3" or 150 cft of timber or 100 Mounds of fuel wood by trucks or any other means owned by the contractors (2 miles)	502.52	%Cft	59417.96
11824.0 Cft	16	Dressing & leveling of earth work to designed section etc complete. (P-3/11-b)	187.55	%Cft	2217.59
9315.0 Cft	17	Re handling of earth work upto lead 50' ft (P-2/8-a)	1058.75	%Cft	9862.26
18 Days	18	Full hire charges of the pumping set per day, inclusive of wage of driver and assistant fuel or electric energy platforms required for placing pumps etc, at lower depth with suction and delivery pipes for pumping out water found at various depths from trenches i/c the cost of erection and dismantling after completion of the job (i) Hire charges of pumping set of upto 10 HP pumping out water from 10 ft deep trench. (P-H Schedule P-76/23-1)	1500	P Day	27000
180 Hrs	19	For working pumps beyond 8 hours, (1) for a pumping set of upto 10 H.P (P-H Schedule P-77/23-vi-1)	250.00	P.Hrs	45000
		Total			851167.00
AMOUNT OF TWO BRIDGES IN MILLION					1702334
Add (40) % Above / Below (+)					68093
					23832


CONTRACTOR


Executive Engineer Rice
Canal Division Mehar @
K N Shah


SCHEDULE "B"

CONSTRUCTING BRIDGE ALONG KUDAN BRANCH RD 03 (TOTAL 1 BRIDGE) (P-14 Part-IV).

QUANTITY	SNO	ITEM	RATE	Unit	AMOUNT
4200.0 Cft	1	Barrow pit excavation undressed lead up to 100 ft in ordinary soil. (P-1/3-a)	2117.50	%0cft	8893.50
4200.0 Cft	2	Dressing & leveling of earth work to designed section etc complete. (P-23/14)	187.55	%0cft	787.71
4200.0 Cft	3	Carriage of 100 Cft /5 tons of all materials like stone, aggregate, spawl, coal, lime surkhi etc B.G. Rail fastening points and crossing bridges, girders, pipes sheets, rails, M.S. bars etc or 1000 Nos. Bricks 10" x 5" x 3" or 150 cft of timber or 100 Mounds of fuel wood by trucks or any other means owned by the contractors (2 miles)	502.52	%cft	21105.84
13074.0 Cft	4	Excavation in foundation of building bridges and other structure i/c dagbelling dressing refilling around structure with excavated earth watering, ramming lead up to 5 ft in ordinary soil. (P-4/18-B)	3175.25	%0cft	415262.93
808.0 Cft	5	Errection & removal of centering for RCC or plain cement concrete works of deodar wood 2nd class. (P-17/19-a-ii)	7000.00	%cft	56560.00
1526.0 Cft	6	Cement concrete plain including placing compacting finishing and curing complete including screening and washing of stone aggregate without shuttering. Ratio (1:3:6) (P-16/5-h)	12595.00	%cft	192199.70
1139.0 Nos.	7	Pacca brick work in foundation and plinth in cement sand mortar rartio 1:4 (P-20/4-c)	12501.41	%cft	142391.00
2482.50 Sft	8	Pacca brick work in other than building i/c sticking joints up to 20 ft ratio 1:5 (P-22/4-c)	12574.38	%cft	312158.96
1796.0 Cft	9	Cement concrete plain including placing compacting finishing and curing complete including screening and washing of stone aggregate without shuttering. Ratio (1:2:4) (P-16/5-f)	14429.26	%cft	259149.33
1000.00 Cft	10	R.C.C work in roof slab beams columns raft lintels and other structural members laid in situ or precast laid in position complete in all respect ratio 1:2:4 (P-16/6-a)	337.00	P.Cft	337000.00

QUANTITY	SNO	ITEM	RATE	Unit	AMOUNT
70.000 cwt	11	Fabrication of mild steel reinforcement for cement concrete i/c cutting bending laying in position making joints and fastening i/c cost of binding wires also includes removal of rust from bars. (P-16/8-a)	5001.70	P.Cwt	350119.00
156.0 Cft	12	Cement plaster (1:2) up to 12 ft height 1/2" thick. (P-52/9-b)	2496.72	%Cft	3894.88
1256.0 Sft	13	Cement pointing struck joint on walls ratio 1:2 (P-52/9-c)	1287.44	%Sft	16170.25
4200.0 Sft	14	Re handling of earth work upto lead 50' ft	1058.75	%00Cft	44467.50
32 Days	15	Full hire charges of the pumping set per day, inclusive of wage of driver and assistant fuel or electric energy platforms required for placing pumps etc, at lower depth with suction and delivery pipes for pumping out water found at various depths from trenches i/c the cost of erection and dismantling after completion of the job (i) Hire charges of pumping set of upto 10 HP pumping out water from 10 ft deep trench. (P-H Schedule P-76/23-1)	1500	P.Day	48000
320 Hrs	16	For working pumps beyond 8 hours, (1) for a pumping set of upto 10 H.P (P-H Schedule P-77/23-vi-1)	250.00	P.Hrs	80000
		Total			2288160.68
		Add	(40)	Above / Below	191526
					320342


CONTRACTOR


Executive Engineer
Rice Canal Division
Mehar @ K N Shah

SCHEDULE "B"

**CONSTRUCTING FOOT BRIDGE ALONG KUDAN BRANCH, @ RD 16 VILLAGE WALI MOHAMMAD
CHANDIO (1 BRIDGE) (TOTAL 1 BRIDGE) (P-14 Part-V).**


QUANTITY	SNO	ITEM	RATE	UNIT	AMOUNT
5712.0 Cft	1	Excavation in foundation of building bridges and other structure i/c dagbelling dressing refilling around structure with excavated earth watering ramming lead up to 5 ft in ordinary soil. (P-4/18-B)	3176.25	%Cft	18142.74
2856.0 Cft	2	Extra for Wet Earth work	1058.75	%Cft	3023.79
5712.0 Cft	3	Extra for every 50' additional lead or part there of extra lead 10/85 per lead 6 extra lead. (P-2/8-a)	604.68	%Cft	3453.93
792.0 Cft	4	Cement concrete plain including placing compacting finishing and curing complete including screening and washing of stone aggregate without shuttering Ratio (1:3:6) (P-16/5-h)	14429.25	%Cft	114279.66
462.5 Cft	5	Pacca brick work in foundation and plinth in cement sand mortar ratio 1:4 (P-20/4-c)	12501.41	%Cft	57819.02
965.9 Cft	6	Pacca brick work in other than building i/c striking joints up to 20 ft ratio 1:5 (P-22/7-i-d)	12574.38	%Cft	121452.79
1434.4 Nos.	7	Dressing and chamfering of bricks. (P-23/14)	1733.35	%Nos.	24905.77
408.00 Sft	8	Cement pointing struck joint on walls ratio 1:2 (P-53/19-a)	645.37	%Sft	2633.11
278.3 Cft	9	R.C.C work in roof slab, beams columns rafts lintels and other structural members laid in situ or precast laid in position complete in all respect Ratio 1:2:4 (P-16/6-a)	337.00	%Cft	93770.25
19.48 Cwt	10	Fabrication of mild steel reinforcement for cement concrete i/c cutting, bending laying in position making joints and fastening i/c cost of binding wire (also includes removal of rust from bars. (P-16/8-a)	4820.2	%Cwt	93885.45
385.0 Sft	11	Errection & removal of centering for RCC or plain cement concrete works of deodar wood 2nd class. (P-18/19-a-ii)	7000.00	\$/Sft	26950.00
255.8 Cft	12	Cement concrete plain including placing compacting finishing and curing complete including screening and washing of stone aggregate without shuttering Ratio (1:2:4).	14429.25	%Cft	36907.81

QUANTITY	SNO	ITEM	RATE	UNIT	AMOUNT
		(P-16/5-f)			
1156.0 Sft	13	Cement plaster (1:2) up to 12 ft height 3/4" thick.	3056.62	%Sft	35334.53
		(P-52/9-c)			
1156.0 Sft	14	Cement plaster (1:2) up to 12 ft height 1/2" thick.	2496.72	%Sft	28862.08
		(P-52/9-b)			
21139.0 Cft	15	Barrow pit excavation undressed lead up to 100 ft in ordinary soil.	2117.50	%Cft	44761.83
		(P-1/3-a)			
21139.0 Cft	16	Carriage of 100 Cft /5 tons of all materials like stone, aggregate, spawl, coal, lime surkhi etc B.G. Rail fastening points and crossing bridges, girders, pipes sheets, rails, M.S. bars etc or 1000 Nos. Bricks 10" x 5" x 3" or 150 cft of timber or 100 Mounds of fuel wood by trucks or any other means owned by the contractors (2 miles)	502.52	%Cft	106227.70
21139.0 Cft	17	Dressing & leveling of earth work to designed section etc complete.	187.55	%Cft	3964.62
		(P-3/11-b)			
9315.0 Cft	18	Re handling of earth work upto lead 50' ft	1058.75	%Cft	9862.26
		(P-2/8-a)			
2 Days	19	Full hire charges of the pumping set per day, inclusive of wages of driver and assistant fuel or electric energy platforms required for placing pumps etc, at lower depth with suction and delivery pipes for pumping out water found at various depths from trenches i/c the cost of erection and dismantling after completion of the job (i) Hire charges of pumping set of upto 10 HP pumping out water from 10 ft deep trench.	1500	P.Day	3000
		(P-H Schedule P-76/23-1)			
20 Hrs	20	For working pumps beyond 8 hours, (1) for a pumping set of upto 10 H.P	250.00	P.Hrs	5000
		(P-H Schedule P-77/23-vi-1)			
		Total			834232.34

Add (40) % Above / Below 33369

116792


CONTRACTOR


Executive Engineer Rice
Canal Division Mehar @
K N Shah

SCHEDULE "B"

C.C LINING ALONG KUDAN BRANCH RD 0+00 TO 5+00 (P-15).

QUANTITY	S.#	ITEM	RATE	UNIT	AMOUNT
175000 cft	1	Barrow pit excavation undressed lead up to 100 ft in ordinary soil. P-1/3a	2117.50	%cft	370563
175000 cft	2	Carriage of 100 cft / ton of all material like stone, aggregate, spawal, coal, lime surkhi etc B.B. rail fastening points and crossing bridges, girders, pipes sheet, rails, M.S bars etc of 1000 Nos tiles 12 x 6 x 2 or 150 cft of timber or 100 Mds of fuel wood by trucks or other means by the contractors (2 miles).	502.52	% cft	879410
175000 cft	3	Earth Work compaction (soft ordinary or hard soil) laying earth in 6-inch layers leveling, dressing and watering for compaction etc complete P-3/13-b	354.00	%cft	61950
159375 Cft	4	Excavation in foundation of building bridges and other structures i/c dagbelling dressing, refilling around the structure with excavated earth watering (P-4/18-b)	3176.25	%cft	506214.84
164880 Cft	5	Formation, dressing and preparing sub grade. (a) in bed (b) on slope. (P-74 /1 (b))	453.75	% sit	748143
166880 Sft	6	Cement plaster 1:2 up to 12 ft height ¾" thick (P-52/9-c)	3056.62	%sft	5100887
166880 Sft	7	Cement plaster 1:2 up to 12 ft height ½" thick (P-52/9-b)	2496.72	%sft	4166526
54905 Cft	8	Cement concrete plain including placing compacting, finishing and curing complete i/c screening & washing of stone aggregate w/o shuttering ratio 1:2:4 (P-16/5-h)	14429.25	%cft	7922385

Total Rs: 19756080

Add 48.0 % Above / Below () 9482918/-
29238998/-

(Signature)
CONTRACTOR

(Signature)
Executive Engineer
Rice Canal Division Mehar
@ K N Shah

SCHEDULE "B"

C.C LINING ALONG KUDAN BRANCH RD 5+00 TO 10+00 (P-16).


QUANTITY	S.#	ITEM	RATE	UNIT	AMOUNT
175000 cft	1	Barrow pit excavation undressed lead up to 100 ft in ordinary soil. P-1/3a	2117.50	%cft	370563
175000 cft	2	Carriage of 100 cft / ton of all material like stone, aggregate, spowal, coal, lime surkhi etc B.B. rail fastening points and crossing bridges, girders, pipes sheet, rails, M.S bars etc of 1000 Nos tiles 12 x 6 x 2 or 150 cft of timber or 100 Mds of fuel wood by trucks or other means by the contractors (2 miles).	502.52	% cft	879110
175000 cft	3	Earth Work compaction (soft ordinary or hard soil) laying earth in 6-inch layers leveling, dressing and watering for compaction etc complete P-3/13-b	354.00	%cft	61950
159375 Cft	4	Excavation in foundation of building bridges and other structures i/c dagbelling dressing, refilling around the structure with excavated earth watering (P-4/18-b)	3176.25	%cft	506214.84
164880 Cft	5	Formation, dressing and preparing sub grade. (a) in bed (b) on slope. (P-74 /1 (b))	453.75	% sit	748143
166880 Sft	6	Cement plaster 1:2 up to 12 ft height ¾" thick (P-52/9-c)	3056.62	%sft	5100887
166880 Sft	7	Cement plaster 1:2 up to 12 ft height ½" thick (P-52/9-b)	2496.72	%sft	4166526
54905 Cft	8	Cement concrete plain including placing compacting, finishing and curing complete i/c screening & washing of stone aggregate w/o shuttering ratio 1:2:4 (P-16/5-h)	14429.25	%cft	7922325

Total Rs: 19756080

Add 48.50% Above / Below () 9581698

Total 29337778

Nadar Ali
CONTRACTOR



[Signature]
Executive Engineer
Rice Canal Division Mehar
@ K N Shah

SCHEDULE "B"

C.C LINING ALONG KUDAN BRANCH RD 10+00 TO 15+00 (P-17).

QUANTITY	S.#	ITEM	RATE	UNIT	AMOUNT
175000 cft	1	Barrow pit excavation undressed lead up to 100 ft in ordinary soil. (P-1/3a)	2117.50	%cft	370563
175000 cft	2	Carriage of 100 cft / ton of all material like stone, aggregate, gravel, coal, lime surkhi etc B.B. rail fastening points and crossing bridges, girders, pipes sheet, rails, M.S bars etc of 1000 Nos tiles 12 x 6 x 2 or 150 cft of timber or 100 Mds of fuel wood by trucks or other means by the contractors (2 miles).	502.52	% cft	879410
175000 cft	3	Earth Work compaction (soft ordinary or hard soil) laying earth in 6-inch layers leveling, dressing and watering for compaction etc complete (P-3/13-b)	354.00	%cft	61950
159375 Cft	4	Excavation in foundation of building bridges and other structures i/c dagbelling dressing, refilling around the structure with excavated earth watering (P-4/18-b)	3176.25	%cft	506214.84
164880 Cft	5	Formation, dressing and preparing sub grade. (a) in bed (b) on slope. (P-74 /1 (b))	453.75	% sit	748143
166880 Sft	6	Cement plaster 1:2 up to 12 ft height ¾" thick (P-52/9-c)	3056.62	%sft	5100887
166880 Sft	7	Cement plaster 1:2 up to 12 ft height ½" thick (P-52/9-b)	2496.72	%sft	4166526
54905 Cft	8	Cement concrete plain including placing compacting, finishing and curing complete i/c screening & washing of stone aggregate w/o shuttering ratio 1:2:4 (P-16/5-h)	14429.25	%cft	7922385
Total Rs:					19756080
Add <u>48.90</u> % Above / Below ()					<u>9660723</u> /

3
CONTRACTOR



Total = 29416863 /

Executive Engineer
Rice Canal Division Mehar
@ K N Shah

SCHEDULE "B"

C.C LINING ALONG KUDAN BRANCH RD 12+00 TO 16+00 (P-18).

QUANTITY	S.#	ITEM	RATE	UNIT	AMOUNT
215273 cft	1	Barrow pit excavation undressed lead up to 100 ft in ordinary soil. (P-1/2a)	2117.50	%cft	455840
215273 cft	2	Carriage of 100 cft / ton of all material like stone, aggregate, spawal, coal, lime surkhi etc B.B. rail fastening points and crossing bridges, girders, pipes sheet, rails, M.S bars etc of 1000 Nos tiles 12 x 6 x 2 or 150 cft of timber or 100 Mds of fuel wood by trucks or other means by the contractors (2 miles).	502.52	% cft	1081787
215273 cft	3	Earth Work compaction (soft ordinary or hard soil) laying earth in 6-inch layers leveling, dressing and watering for compaction etc complete (P-3/13-b)	354.00	%cft	76206
159375 Cft	4	Excavation in foundation of building bridges and other structures i/c dagbelling dressing, refilling around the structure with excavated earth watering (P-4/18-b)	3176.25	%cft	506214.84
164880 Cft	5	Formation, dressing and preparing sub grade. (a) in bed (b) on slope. (P-74 /1 (b))	453.75	% sft	748143
166880 Sft	6	Cement plaster 1:2 up to 12 ft height ¾" thick (P-52/9-c)	3056.62	%sft	5100887
166880 Sft	7	Cement plaster 1:2 up to 12 ft height ½" thick (P-52/9-b)	2496.72	%sft	4166526
53573 Cft	8	Cement concrete plain including placing compacting, finishing and curing complete i/c screening & washing of stone aggregate w/o shuttering ratio 1:2:4 (P-16/5-h)	14429.25	%cft	7730182

Total Rs: 19865793

Add 4.83% Above / Below () 9595178/-

CONTRACTOR


 Executive Engineer
 Rice Canal Division Mehar
 @ K N Shah