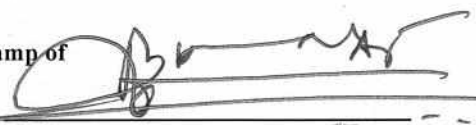


**SINDH PUBLIC PROCUREMENT REGULATORY AUTHORITY**  
**CONTRACT EVALUATION FORM**

- 1) NAME OF THE ORGANIZATION / DEPTT. **Public Health Engineering Department**
- 2) PROVINCIAL / LOCAL GOVT./ OTHER **Provincial**
- 3) TITLE OF CONTRACT: **CONSTRUCTION OF DISPOSAL WORK, PLJ & TESTING PE PIPE RISING MAIN 10" DIA FOR BENAZIR COLONY & ALAM MIRBAHAR MOHALLA & PROVIDING, INSTALLING PUMPING MACHINERY & PLJ & TESTING PE PIPE RISING MAIN 12" DIA FOR WARI / JOGI / MEHDI SHAH MOHALLA I/C: PLJ & TESTING BLACK STEEL PIPE 18" DIA BY JACKING METHOD FOR WARI / JOGI / MEHDI SHAH / BENAZIR DISPOSAL WORK UNDER IMP: & EXT: OF URBAN DRG: SCHEME NAUDERO.**
- 4) TENDER NUMBER: **(01) No**
- 5) BRIEF DESCRIPTION OF CONTRACT: **Improvement & Extension of urban Drainage Scheme Naudero**
- 6) FORUM THAT APPROVED THE SCHEME: **P&D Department Govt: of Sindh**
- 7) TENDER ESTIMATED VALUE: **14.272 Millions**
- 8) ENGINEER'S ESTIMATE: **12.250 Millions**  
(For civil works only)
- 9) ESTIMATED COMPLETION PERIOD (AS PER CONTRACT) **06 Months**
- 10) TENDER OPENED ON (DATE & TIME) **15/09/2017 at 1.00 PM**
- 11) NUMBER OF TENDER DOCUMENTS SOLD: **10 Nos**  
(Attach list of buyers)
- 12) NUMBER OF BIDS RECEIVED **10 Nos**
- 13) NUMBER OF BIDDERS PRESENT AT THE TIME OF OPENING OF BIDS: **10 Nos**
- 14) BID EVALUATION REPORT: **Hoisted on SPPRA website at EV ID # 2746/2017 dated 14/11/2017**
- 15) NAME AND ADDRESS OF THE SUCCESSFUL BIDDER **Mr. Yaar Muhammad Mahar**
- 16) CONTRACT AWARD PRICE **14.272 Millions**
- 17) RANKING OF SUCCESSFUL BIDDER IN EVALUATION REPORT  
(i.e. 1<sup>st</sup>, 2<sup>nd</sup>, 3<sup>rd</sup> EVALUATION BID). **1<sup>st</sup> Lowest**
- 18) METHOD OF PROCUREMENT USED : - (Tick one)
- a) SINGLE STAGE – ONE ENVELOPE PROCEDURE: **Yes**
- b) SINGLE STAGE – TWO ENVELOPE PROCEDURE:
- c) TWO STAGE BIDDING PROCEDURE
- d) TWO STAGE – TWO ENVELOPE BIDDING PROCEDURE
- PLEASE SPECIFY IF ANY OTHER METHOD OF PROCUREMENT WAS ADOPTED i.e. EMERGENCY, DIRECT CONTRACTING / NEGOTIATION ETC. WITH BRIEF REASONS:
- 19) APPROVING AUTHORITY FOR AWARD OF CONTRACT: **Chief Engineer PHED Govt: of Sindh Sukkur**
- 20) WHETHER THE PROCUREMENT WAS INCLUDED IN ANNUAL PROCUREMENT PLAN? **Yes**
- 21) ADVERTISEMENT :
- i) SPPRA Website **Yes**  
No. 34269 dated: 25/08/2017  
( If yes, give date and SPPRA Identification No.)
- ii) News Papers **Yes**  
( If yes, give names of newspapers and dates) **Daily Imroz, dated: 26/08/2017**  
**Daily Awami Soch, dated: 30/08/2017**

22) NATURE OF CONTRACT	Local
23) WHETHER QUALIFICATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS? (If yes, enclose a copy)	Yes ( Copy Enclosed)
24) WHETHER BID EVALUATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS? ( If yes, enclose a copy)	Yes N/A
25) WHETHER APPROVAL OF COMPETENT AUTHORITY WAS OBTAINED FOR USING A METHOD OTHER THAN OPEN COMPETITIVE BIDDING?	Yes
26) WAS BID SECURITY OBTAINED FROM ALL THE BIDDERS?	Yes
27) WHETHER THE SUCCESSFUL BID WAS LOWEST EVALUATED BID / BEST EVALUATED BID (in case of Consultancies)	Lowest Evaluated Bid
28) WHETHER THE SUCCESSFUL BIDDER WAS TECHNICALLY COMPLIANT ?	Yes
29) WHETHER NAMES OF THE BIDDERS AND THEIR QUOTED PRICES WERE READ OUT AT THE TIME OF OPENING OF BIDS?	Yes
30) WHETHER EVALUATION REPORT GIVEN TO BIDDERS BEFORE THE AWARD OF CONTRACT? ( Attach copy of the bid evaluation report)	Yes
31) ANY COMPLAINTS RECEIVED	No
32) ANY DEVIATION FROM SPECIFICATIONS GIVEN IN THE TENDER NOTICE / DOCUMENTS ( If yes, give details)	No
33) WAS THE EXTENSION MADE IN RESPONSE TIME? ( If yes, give reasons)	No
34) DEVIATION FROM QUALIFICATION CRITERIA ( If yes, give detailed reasons.)	No
35) WAS IT ASSURED BY THE PROCURING AGENCY THAT THE SELECTED FIRM IS NOT BLACK LISTED	Yes
36) WAS A VISIT MADE BY ANY OFFICER/OFFICIAL OF THE PROCURING AGENCY TO THE SUPPLIER'S PREMISES IN CONNECTION WITH THE PROCUREMENT? IF SO, DETAILS TO BE ASCERTAINED REGARDING FINANCING OF VISIT, IF ABROAD: ( If yes, enclose a copy)	No
37) WERE PROPER SAFEGUARDS PROVIDED ON MOBILIZATION ADVANCE PAYMENT IN THE CONTRACT (BANK GUARANTEE ETC.)?	N/A
38) SPECIAL CONDITIONS, IF ANY ( If yes, give Brief Description)	N/A

Signature & Official Stamp of  
Authorized Officer

  
Executive Engineer  
Public Health Engg: Division  
Larkana



EXECUTIVE ENGINEER  
PUBLIC HEALTH ENGG: DIVISION I  
LARKANO

# 074-9410326  
# 074-9410326  
phedxen@gmail.com

No. AB/TC/  
Larkano dated:

2406 /of/2017  
20. /Nov/2017

**LETTER OF ACCEPTANCE**

To,

*Mr. Yaar Muhammad Mahar,  
Government Contractor,  
Larkano.*

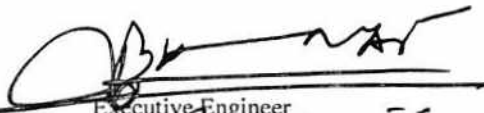
Subject:

**CONSTRUCTION OF DISPOSAL WORK, PLJ & TESTING PE PIPE RISING MAIN 10" DIA FOR BENAZIR COLONY & ALAM MIRBAHAR MOHALLA & PROVIDING, INSTALLING PUMPING MACHINERY & PLJ & TESTING PE PIPE RISING MAIN 12" DIA FOR WARI / JOGI / MEHDI SHAH MOHALLA I/C: PLJ & TESTING BLACK STEEL PIPE 18" DIA BY JACKING METHOD FOR WARI / JOGI / MEHDI SHAH / BENAZIR DISPOSAL WORK UNDER IMP: & EXT: OF URBAN DRG: SCHEME NAUDERO.**

This is to notify that your Bid dated: 15/09/2017 for execution of the subject work @ 26% above on the schedule rates has been accepted by the Executive Engineer Public Health Engineering Division I Larkano Amounting to Rs: 1,42,72,189/- (One Hundred Forty Two Lac Seventy Two Thousand One Hundred & Eighty Nine Only).

The 5% Earnest Money of the subject work has already been received in the shape of Call Deposit / Pay Order amounting to Rs: 6,12,500/- Hence you are requested to furnish the cost of Stamps amounting Rs: 50,000/- to be fixed on the agreement to be executed / will have to be borne by you within 03 days of the receipt of this acceptance letter in accordance to the conditions of contract and sign the agreement attached herewith within stipulated time mentioned above, failing which the acceptance will be treated as cancelled and the amount of bid security will be forfeited without any further notice.

Copy forwarded with compliments to:

  
Executive Engineer  
Public Health Engg: Division I  
Larkano

- The Chief Engineer, Public Health Engineering Department Government of Sindh Sukkur for kind information and necessary action.
- The Superintending Engineer, Public Health Engg: Circle Larkano for information.

Const: of Disposed Waste P&T & Testing PE Pipe Rising ~~1000/-~~ 10000/- DIA  
 100 (K.R.) Benazir Colony F. of M. D. Drain Schem. Naudo. P.W.D. 287

G.R. P.W.D. Nos. 7938 of 6-4-35  
 56-1 of 8-6-36, 1950-W of 27-9-37, G.C.M.P.  
 and M. Dept. No. 383-P/37 of 5-11-37  
 (P.W.D.) No. S-173, 2-W of 22-2-30.  
 G. Rs. (P.W.D.) No. 1038-1 of 22-2-37  
 12-10-44 and 2-5-44 64-W of 22-2-39  
 12-10-41, and 2-5-44, 05-W 1038/11-1 of  
 28-3-49, 4-47-W 2 of 12-12-50.

FORM B-1

PUBLIC WORKS DEPARTMENT

PHE CIRCLE Larkana  
 PHE DIVISION Larkana

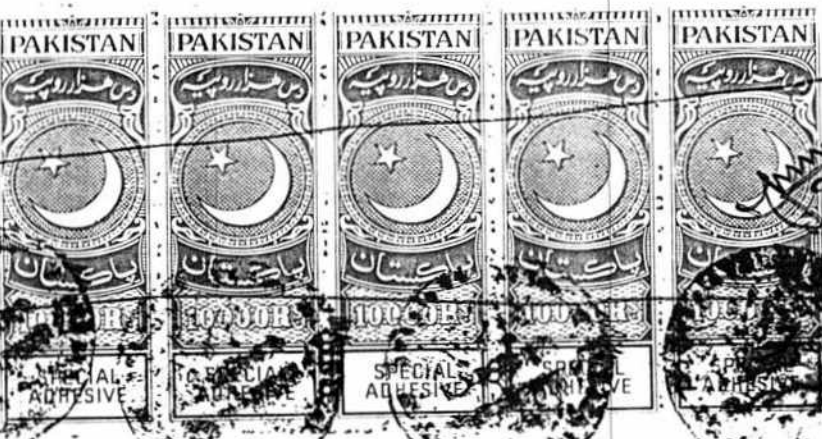
50000/-

Mr: Yar Mohammad Murr

Percentage Rate Tender and Contract  
 for works

1. Form of it Executive

This submitting work; also the amount and the per cent a refund granted. rates schedule work shall call on the Executive



Handwritten signature and stamp: S.D.O. LARKANA

2. In the event of the tender being submitted by a firm, it must be signed separately by each partner thereof, or in the event of the absence of any partner, it shall be signed on his behalf by a person holding a power-of-attorney authorizing him to do so.

3. Receipts for payments made on account of any work, when executed by a firm, shall also be signed by all the partners, except where the contractors are described in their tender as a firm, in which case the receipt shall be signed in the name of the firm by one of the partners, or by some other persons having authority to give effectual receipts for the firm.

4. Any person who submits a tender shall fill up the usual printed form stating at what percentage above or below the rates specified in Schedule 'B' memorandum showing items of work to be carried out; he is willing to undertake the work. Only one rate of such percentage, on all the <sup>Estimated rates</sup> ~~Scheduled rates~~ shall be framed. Tenders, which propose any alteration in the works specified in the said form of invitation to tender or in the time allowed for carrying out the work, or which contain any other conditions, will be liable to rejection. No printed form of tender shall include a tender for more than one work, but if contractors wish to tender for two or more works they shall submit a separate tender for each. Tenders shall have the name and number of the work to which they refer written outside the envelope.

5. The Executive Engineer or his duly authorised Assistant shall open tenders in the presence of contractors who have submitted tenders or their representatives who may be present at the time, and he will enter the amounts of the several tenders in a comparative statement in a suitable form. In the identification, sign copies of the specifications and other documents mentioned in Rule 1. In the event of a tender being rejected the Divisional Officer shall authorize the Treasury Officer concerned to refund the amount of the earnest money for deposited to the contractor making the tender, on his giving a receipt for the return of the money.

6. The Officer competent to dispose of the tenders shall have right of rejecting all or any of the tenders.

Handwritten signature at the bottom left.

Executive Engineer  
 Public Health Engg. Division  
 Larkana



EXECUTIVE ENGINEER  
PUBLIC HEALTH ENGG: DIVISION I  
LARKANO

# 074-9410326

# 074-9410326

phedxen@gmail.com

No. AB/TC/  
Larkano dated:

2411 /of/2017  
22. /Nov/ 2017

### "WORK ORDER"

*Mr. Yaar Muhammad Mahar*  
Government Contractor,  
Larkano.

**Subject:** CONSTRUCTION OF DISPOSAL WORK, PLJ & TESTING PE PIPE RISING MAIN 10" DIA FOR BENAZIR COLONY & ALAM MIRBAHAR MOHALLA & PROVIDING, INSTALLING PUMPING MACHINERY & PLJ & TESTING PE PIPE RISING MAIN 12" DIA FOR WARI / JOGI / MEHDI SHAH MOHALLA I/C: PLJ & TESTING BLACK STEEL PIPE 18" DIA BY JACKING METHOD FOR WARI / JOGI / MEHDI SHAH / BENAZIR DISPOSAL WORK UNDER IMP: & EXT: OF URBAN DRG: SCHEME NAUDERO.

Reference: - Your B-I Tender opened on dated: 15/09/2017

Your percentage rate Tender for **Rs.92,51,896/=** (Rupees Ninety Two Lacs, Fifty One Thousand, Eight Hundred & Ninety Nine) only @ **26% above** the schedule items viz: **Rs.1,42,72,189/=** (Rupees One Crore, Forty Two Lacs, Seventy Two Thousand, One Hundred & Eighty Nine) only being the lowest rates is hereby approved/ accepted by the Chief Engineer, PHED Sukkur vide No. GM/PHED/3913 dated 31/10/2017 and endorsed by the Superintending Engineer, PHE Circle Larkana vide Letter No. GC-II/PHED/2514 dated: 01/11/2017

You are, therefore, directed to please start the work within seven (07) days after issue of the 'Work order' according to drawing design & PWD specifications under the supervision of Assistant Engineer, Public Health Engg: S/Division Ratodero & instructions from the undersigned.


No premium will be allowed on non-schedule items.

No Extra charges such as Taxes, Octroi packing or transportation of material etc will be paid separately.

The work shall have to be completed by you within the period six (06) months as provided in the tender.

The Sindh Sales Tax Special Producer (withholding) Rules, 2011 shall apply to taxable service as or supplied, provided or rendered to persons, specified as withholding agents, in the withholding procedure, for the purpose of deduction and deposit of sales tax.

The undersigned reserves the right to reject any or all parts of it or order for replacement if it is not done as per drawing, design and P.H.E specifications.

  
Executive Engineer  
Public Health Engg: Division I  
Larkano

*C.F.W.Cs for favour of information to:*

1. The Superintending Engineer, Public Health Engg: Circle Larkana
2. The Assistant Engineer, Public Health Engg: S/Division Larkana

## BILL OF QUANTITIES

Construction of Disposal Work, PLJ & testing PE Pipe Rising main 10" dia for Benazir colony & Alam Mirbahar mohalla & providing, installing pumping machinery & PLJ & testing PE pipe rising main 12" dia for Wari / Jogi / Mehdi Shah mohalla i/c: PLJ & testing Black Steel Pipe 18" dia by jacking method for Wari / Jogi / Mehdi Shah / Benazir Disposal work (under Imp: & Ext: of Urban drg: scheme Naudero.

(B) under Provincial ADP 2008-09

Item #	Quantities	Description and rate of Item to be executed at site	Rate	Unit	Amount in Rupees
1	2	3	4	5	6

**For Benazir & Aalam Mirbahar mohalla**

**(1) RCC COLLECTING TANK 15' DIA**

1	Excavation of well in dry upto 20' ft height around level and disposal of soil within one chain. (in ordinary soil) (GSI No: 1, P-85)				
	1570.00 cft		@Rs 2247.58	P.%0 cft	Rs. 3529
2	R.C.C work i/c all labour and material except the cost of steel reinforcement and its labour for bending and binding which will be paid separately. This rate also includes all kinds of forms moulds lifting shuttering curing rendering and finishing the exposed surface i/c screening and washing of shingle (a) R.C work in roof slab members laid in situ or precast laid in position complete in a respect. (i) Ratio 1;2;4 90 lbs cement 2 cft sand 4 cft shingle 1/8" to 1/4" gauge. (G.S.I-6 P/16)				
	993.93 cft		@Rs 337.00	P. cft	Rs. 334954
3	Fabrication of mild steel reinforcement for cement concrete i/c cutting bending laying in position making joints and fastening i/c cost of binding wire also includes removal of rust from bars. (G.S.I- 8 P/17)				
	41.97 cwt		@Rs 5001.70	P. cwt	Rs. 209921
4	Wet Sinking of walls for depth below spring level by means of driver i/c all charges for shoring leading & removing excavated material within one chain. (GSI No: 3, P-85)				
	1202.03 cft	5' to 10 depth	@Rs 11763.80	P.%0 cft	Rs. 14140
	1202.03 cft	10' to 15 depth	@Rs 24200.00	P.%0 cft	Rs. 29089
	480.81 cft	15' to 20 depth	@Rs 37230.77	P.%0 cft	Rs. 17901
5	Bailing or pumping out sub-soil water during excavation, concreting, cost in Situ concrete or masonry work in foundation etc. (PHSI No.18, P.No.75)				
	3355.87 cft		@Rs 543.00	P.% cft	Rs. 18222
6	Providing expansion Joints in concrete work of 9" (225mm) wide corrugated P.V.C water stop (with bulb) i/c holding cost of material and labour. (PHSI No.2, P-37)				
	100.48 Rft		@Rs 86.00	P. Rft	Rs. 8641
7	C.C Brick or stone ballast 1: 1/2" to 2" guage Ratio 1:4:8 (CSI No.5, P-18)				
	366.07 cft		@Rs 9416.28	P.% cft	Rs. 34470

- 8 Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without shuttering. (G.S.I - 5, P/15)

176.62 / cft	<u>Ratio 1:4:8</u> /	@Rs 11288.75 / P.% cft /	Rs. 19939 /
176.62 / cft	<u>Ratio 1:3:6</u> /	@Rs 12595.00 / P.% cft /	Rs. 22245 /
176.62 / cft	<u>Ratio 1:2:4</u> /	@Rs 14429.25 / P.% cft /	Rs. 25485 /

- 9 Excavation for pipe lines in trench and pits in soft soil i/c trimming and dressing sides to true alignment shape leveling of beds of trenches to correct level and grade cutting joints holes and disposal of surplus earth within one chain as directed by engineer incharge providing fence guards lights whenever and temporary crossing for non-vehicular traffic whenever required lift upto 5 ft and lead upto one chain. (PHSI No: 1, P-46)

90.00 / cft		@Rs 3600.00 / P.%0 cft	Rs. 324 /
-------------	--	------------------------	-----------

- 10 Providing R.C.C Pipes of ASTM C-76-62 C-76-70 class - II wall bend fixing in trenches i/c cutting fitting and jointing with rubber ring i/c testing with water to specified pressure. (PHSI No: 1, P-17)

8.00 / Rft		@Rs 412.00 / P. Rft	Rs. 3296 /
------------	--	---------------------	------------

- 11 Refilling the excavated stuff in trenches 6" thick layers i/c watering ramming to full compaction etc complete.

81.00 / cft		@Rs 2760.00 / P%0 Cft /	Rs. 224 /
-------------	--	-------------------------	-----------

Total

Rs. 742380 /

Benazir mohalla & Aalam Mirbahar

(2) SCREENING CHAMBER (size 5, x 8')

- 1 Excavation in foundation of building bridges and other structures i/c dig billing dressing refilling around the structures with excavated Earth watering ramming up to 5ft (b) in ordinary soil (C.S.I-18/ P/4)

570.93 / cft		@Rs 3176.25 / P%0 Cft /	Rs 1813 /
--------------	--	-------------------------	-----------

- 2 Extra for wet erath work (GSI #.15, P-3)

177.18 / cft		@Rs 1058.75 / P%0 Cft /	Rs 188 /
--------------	--	-------------------------	----------

- 3 Cement Concrete Brick or stone ballast 1: 1/2" to 2" guage Ratio 1:4:8 (CSI

59.06 / cft	<u>Ratio 1:4:8</u>	@Rs 9416.28 / P% Cft /	Rs 5561 /
-------------	--------------------	------------------------	-----------

- 4 R.C.C work i/c all labour and material except the cost of steel reinforcement and its labour for bending and binding which will be paid separately. This rate also includes all kinds of forms moulds lifting shuttering curing rendering and finishing the exposed surface i/c screening and washing of shingle (a) R.C work in roof slab members laid in situ or precast laid in position complete in a respect. (i) Ratio 1:2;4 90 lbs cement 2 cft sand 4 cft shingle 1/8" to 1/4" gauge. (G.S.I-6 P/16)

219.25 / cft		@Rs 337.00 / P-Cft /	Rs 73887 /
--------------	--	----------------------	------------

- 5 Fabrication of mild steel reinforcement for cement concrete i/c cutting bending laying in position making joints and fastening i/c cost of binding wire also includes removal of rust from bars. (G.S.I- 8 P/17)

8.80 / Cwt		@Rs 5001.70 / P-Cwt /	Rs 44015 /
------------	--	-----------------------	------------

6	Providing construction of joints in concrete work of 9" (225 mm) made corrugated PVC water stop (with bulb) i/c solderiong, cost of material and labour. (PHSI #.1, P-56)	29.00 / Cwt	@Rs 86.00	P-Cwt	Rs 2494
7	Providing & fixing C.I main hole cover & frame i/c cost of material . (PHSI #.1, P-23)	1.00 / Cwt	@Rs 6985.70	P-Cwt	Rs 6986
8	Fabrication of heavy steel work with angles tees, flat iron round iron and sheet iron for making tresses, girders, tanks etc i/c cutting tanks etc i/c cutting, drilling, riveting, handling, assembling and fixing but excluding, erection in position. (CSI #.2, P-91)	2.06 / Cwt	@Rs 4928.49	P-Cwt	Rs 10153
9	Erection and fitting in position of iron trusses staging of water tanks etc. (CSI #.3, P-91)	2.06 / Cwt	@Rs 271.04	P-Cwt	Rs 558
10	Pacca brick work in foundation and plinth in cement sand mortar(1:6) (C.S.I No. 4 P/ 19)	13.23 / cft	@Rs 11948.36	P% Cft	Rs 1581
11	Cement Plaster 1:4 1/2" thick upto 12' height. (CSI No: 11/b, P-52)	49.15 / cft	@Rs 2283.93	P% Sft	Rs 1123
<b>Total</b>					<b>Rs. 148359</b>

**(3) PUMP HOUSE (16' x 12')**  
**(Benazir mohalla & Aalam Mirbahar)**

1	Excavation in foundation of building bridges and other structures i/c dig billing dressing refilling around the structures with excavated Earth watering ramming up to 5ft (b) in ordinary soil (CSI #.18, P-4)	198.50 / cft	@Rs 3176.25	P%0 Cft	Rs 630
2	C.C Brick or stone ballast 1: 1/2" to 2" guage Ratio 1:4:8 (CSI No.5, P-18)	108.58 / cft	<u>Ratio 1:4:8</u> @Rs 9416.28	P% Cft	Rs 10225
3	Pacca brick work in foundation and plinth in cement sand mortar(1:6) (C.S.I No. 4 P/ 19)	355.08 / cft	@Rs 11948.83	P% Cft	Rs 42427
4	Damp proof course with cement and shingle concrete 1:2:4 i/c two coats of asphaltic 3" thick. (CSI No: 28, P-18).	66.64 / sft	@Rs 4982.18	P.% sft	Rs 3320
5	Pacca brick work in ground floor in cement sand mortar (1:6) (CSI No.5,	407.63 / cft	@Rs 12674.36	P%Cft	Rs 51665



6	Supplying & fixing in position iron / settl grill of 3/4"x1/4" size flat iron of approved design i/c painting of 3 coats etc (weight not to be less than 3.7 lbs/sq feet on finished grill) (CSI #.26, P-92)	24.00 cft	@Rs 180.50	P. sft	Rs 4332
7	Fabrication of heavy steel work with angles tees flate iron round iron sheet iron for making girder tanks etc i/c cutting drilling revilling holding assembling and fixing but excluding erection in position (CSINO.2, P.91)	4.40 cft	@Rs 4928.49	P. cwt	Rs 21709
8	R.C.C work i/c all labour and material except the cost of steel reinforcement and its labour for bending and binding which will be paid separately. This rate also includes all kinds of forms moulds lifting shuttering curing rendering and finishing the exposed surface i/c screening and washing of shingle (a) R.C work in roof slab members laid in situ or precast laid in position complete in a respect. (i) Ratio 1;2;4 90 lbs cement 2 cft sand 4 cft shingle 1/8" to 1/4" gauge. (G.S.I-6 P/16)	146.93 cft	@Rs 337.00	P-Cft	Rs 49515
9	Fabrication of mild steel reinforcement for cement concrete i/c cutting bending laying in position making joints and fastening i/c cost of binding wire also includes removal of rust from bars. (G.S.I- 8 P/17)	5.90 Cwt	@Rs 5001.70	P-Cwt	Rs 29510
10	Cement Plaster 1:6 1/2" thick upto 12' height. (CSI No: 11/b, P-52)	761.92 cft	@Rs 2206.60	P% Sft	Rs 16813
11	Cement Plaster 1:4 3/8" thick upto 12' height. (CSI No: 11/b, P-52)	761.92 cft	@Rs 2197.52	P% Sft	Rs 16743
12	Cement pointing struck joints on walls 1:3. (CSI No: 19, P-28)	568.00 cft	@Rs 1213.58	P% Sft	Rs 6893
13	Filling Watering and Ramming earth in floors with surplus earth from foundation lead upto one chain and lift upto 5ft.(CSI No. 21, P-5)	636.21 cft	@Rs 1512.50	P%0 Cft	Rs 962
14	Providing Laying 3" thick topping cement concrete Ratio 1:2:4 i/c surface finishing dividing into panel (CSI No.16, P.41)	192.00 sft	<u>3" thick</u> @Rs 4411.82	P% Sft	Rs 8471
15	Painting new surfaces, preparing of surfaces and painting of doors and windows of any type i/c edges. (GSI No: 5, P-68)	104.00 sft	<u>2 coats</u> @Rs 1489.68	P% Sft	Rs 1549
16	Primary Coat of Chalk distumbering. (CSI #.23(b), P-53)	761.92 sft	@Rs 442.75	P% Sft	Rs 3373
17	White washing of two coats. (CSI #.26, P-53)	294.00 Sft	@Rs 425.84	P% Sft	Rs 1252

18	Distembering two coats. (CSI #.24, P-60)	761.92 Sft	@Rs 1043.90	P% Sft	Rs 7954
				<b>Total</b>	<b>Rs: 277343</b>
(4)	<b>COMPOUND WALL (size 60 x 40)</b> <b>( Benazir mohalla / Aalam mirbahar )</b>				
1	Excavation in foundation of building bridges and other structures. i/c dag belling dressing refilling around the structures with excavated Earth watering ramming lead up to one chain and lift up to 5' (CSI #.18, P-4)	588.00 Rft	@Rs: 3176.25	P%0 Cft	Rs: 1868
2	Cement concrete brick or stone ballast 1 1/2" to 2" gauge. (Ratio 1:4:8) (CSI #.5, P-18)	147.00 cft	@Rs: 9416.28	P% Cft	Rs: 13842
3	Pacca brick work in foundation & plinth in cement sand mortor (1:6) (CSI #.4, P-20)	831.68 Cft	@Rs: 11948.36	P% Cft	Rs: 99372
4	Damp proof course with (cement & shingle) concrete 1:2:4 i/c: two coats of asphalt mixture. (CSI #.27, P-19) <b>3" thick</b>	207.92 sft	@Rs: 4982.18	P% sft	Rs: 10359
5	RCC work i/c all labour and material except the cost of steel reinforcement and its labour for b/b which will be paid separately. This rate also i/c all kinds of forms moulds lifting, shutting, curing, rendering and finishing the exposed surface (i/c s/w of shingle) (a) R.C work in roof slab beams columns rafts lintels and other structural members laid in situ or precast laid in position complete in all respect. (I) Ratio 2:2:4 Lbs cement:2 Cft, sand 4 cft shingle 1/8" to 1/4" gauge. (GSI #.6, P-16)	51.50 Cft	@Rs: 337	P. cft	Rs: 17356
6	Fabrication of mild steel reinforcement for C.C i/c cutting, bending, laying in position making joints and fastening i/c cost of binding wire (also i/c removal of rust from bars). (CSI #.2, P-91)	2.06 Cwt	@Rs: 5001.70	P. Cwt	Rs: 10304
7	Pacca brick work in other then building i/c stricking of joints upto 20' ft height in cement, sand, mortar (1:6) (CSI #.7, P-21)	561.00 Cft	@Rs: 12346.65	P% Cft	Rs: 69265
8	Cement, Plaster (1:6) up to 12' height 1/2" thick (CSI #.13, P-52)	1808.25 sft	@Rs: 2206.60	P% Sft	Rs: 39901
9	Cement, Plaster (1:4) upto 12' ft. height 3/8" thick (CSI #.11, P-52)	1808.25 sft	@Rs: 2197.52	P% Sft	Rs: 39737
10	Cement, Pointing struck joint on walls Ratio (1:3) (GSI #.11, P-57)	748.00 sft	@Rs: 1213.58	P% Sft	Rs: 9078

11 Fabrication of heavy steel work with angles tees, flat iron round iron and sheet iron for making tresses, girders, tanks etc i/c cutting tanks etc i/c cutting, drilling, riveting, handling, assembling and fixing but excluding, erection in position. (CSI #.2, P-91)

6.42 Cwt @Rs 4928.49 P-Cwt Rs 31641

12 Painting surface & painting of doors and windows of any type i/c: edges 3 coats. (GSI #.5, P-6)  
120.0 sft 3 coats @Rs: 2116.41 P% Sft Rs: 2540

13 Preparing the surface & painting with weather coat i/c: rubbing the surface with rubbing brackage / sand paper filling the viods with chalk plaster of the paint with weather coat of approved make. (CSI #.33, P-56)  
1808.25 sft @Rs: 1948.10 P% sft Rs: 35227

Total Rs: 380490

(5) P.E PIPE RISING MAIN  
( Benazir mohalla / Aalam mirbahar )

1 Dismantling & road metalling. (GSI #.51, P-13)  
500 cft @Rs 605.00 P% cft Rs. 3025

2 Dismantling of brick work in lime or cement mortar. (GSI #.13, P-10)  
75 cft @Rs 1285.63 P% cft Rs. 964

3 Dismantling of CC Plain 1:2:4 (GSI #.19, P-10)  
75.00 cft @Rs 3327.50 P% cft Rs. 2496

4 Dismantling of CC reinforced separating reinforcement from concrete, cleaning and straghting the same. (GSI #.20, P-11)  
45.00 cft @Rs 5445.00 P% cft Rs. 2450

5 Add every 50' ft additional lead or part thereof . (CSI #.8, P-2)  
695.00 cft @Rs 2015.60 P.%0 cft Rs. 1401

6 Excavation for pipe lines in trench and pits in soft soil i/c trimming and dressing sides to true alignment shape leveling of beds of trenches to correct level and grade cutting joints holes and disposal of surplus earth within one chain as directed by engineer incharge providing fence guards lights whenever and temporary crossing for non-vehicular traffic whenever required lift upto 5 ft and lead upto one chain. (PHSI No: 1, P-46)  
42000.00 cft @Rs 3600.00 P.%0 cft Rs. 151200

7 Providing, laying & fixing in trenhes i/c fitting, jointing & testing etc complete in all respects the high density polythlene PE pipes (HDPE-100) for W/S confirming ISO 4427/DIN8074/8075 B.S 3580 & PSI 3051. (PHSI #.25, P-8). (PHSI No: 1, P-60)  
10" dia (280 mm)  
1000.00 Rft @Rs 1313.00 P. Rft Rs. 1313000

12" dia (315 mm)  
2500.00 Rft @Rs 1635.00 P. Rft Rs. 4087500

8 HDPE (PE 100) fittings (PHSI No.1, P-18)  
2.00 No. 12" dia (315 mm) @Rs 10753.00 P. each Rs. 21506  
3.00 No. 10" dia (280 mm) @Rs 6775.00 P. each Rs. 20325

9	Elbow / Bend 90 degree.					
3.00	No.	<u>10" dia (280 mm)</u>	@Rs 8469.00	P. each	Rs. 25407	
3.00	No.	<u>12" dia (315 mm)</u>	@Rs 13441.00	P. each	Rs. 40323	
10	But fusion joint. (PHSMI #.1, P-20)					
6.00	No.	<u>10" dia (280 mm)</u>	@Rs 1800.00	P. each	Rs. 10800	
5.00	No.	<u>12" dia (315 mm)</u>	@Rs 2200.00	P. each	Rs. 11000	
11	Refilling the excavated stuff in trenches 6" thick layers i/c watering ramming to full compaction etc complete. (PHSI #.24, P-77)					
37800.00	cft		@Rs 2760.00	P%0 Cft	Rs. 104328	
				<b>Total</b>	<b>Rs: 5795725</b>	

**(6) PUMPING MACHINERY I/C: INTER CONNECTION**

1 Supplying & installing in position i/c transportation at site of work Electric Pumping set 40 BHP (Siemens made) frame size 200-L-4 Pole 1500 RPM totally enclosed squirrel cage induction motor 3 phase 400 VAC 5% HZ 2% suitable for VFD operation Ambient Tempereature 40 C attribute 1000 m above sea level construction 1M B3 (foot mounted) degee of protection IP 65 insulation class F service factor 1.1 coupled with KSB KWPZ non clogging sullage pump type 150-315 size 6"x6" mounted of KSB steel frame / coupling with sleeve capable of giving discharge 1000 GPM against against the required head 5 ft i/c installed on cement concrete foundation Ratio 1:2:4 and MS nuts & bolts of 5/8" dia to be embedded in cement concrete foundation i/c: supplying & fixing motor control unit (MCU) consists of circuit breaker, magnetic contractor, over load protection, under / over voltage protection, ampere meter with current transformer, volt meter with potential transformer, automatic star delta change over switch controlled power cables, indicating lights and all these components are fixed in a metallic dust and smoke proof box etc complete (Siemens made) i/c: providing & laying (main or sub main) PVC insulated with size 4-7/0.52 (10 mm) copper conductor in 1-1/2" dia PVC conduct on surface & testing the 72 hours etc complete. (N.S.I)

2.00 set @Rs 1186000 P.Set Rs 2372000

**DIESEL ENGINE**

2 Providing & installing in position i/c transportation to site of work Diesel Engine Pumping Set 48 BHP with 2200 RPM coupled with non-clogging pump type GSWG-103 size 2"x2 1/2" mounted on common steel frame or base plate capable of discharge 80 galons per minute against a head of 49 ft i/c making cement concrete foundation ratio (1:2:4) and C.C (1:4:8) with ballast with MS nuts bolts of 1/2" dia to be embedded in cement concrete foundation i/c testing of pumping set against the required head of 72 hours etc complete. (N.S.I)

1.00 Set @Rs 923000.00 P.each Rs. 923000

**SUCTION & DELIVERY**

3 Providing, laying & fixing in trenches i/c fitting, jointing & testing etc complete in all respects the high density polythlene PE Pipe (HDPE-100) for W/S confirming ISO 4427/DIN 8074/8075 B S 3580 & PSI 3051. (PHSI #.1, P-26)

**PN-10**

48.00 Rft suction 6" dia (180 m) @Rs 685.00 P. Rft Rs 32880

20.00 Rft delivery 10" dia (280 m) @Rs 1590.00 P. Rft Rs 31800

4	Supplying C I bend with flanged ends with holes i/c turning and facing of flanges for all size (SMI #.8, P-12)	1.33 / cwt	<u>Bend 90</u>	@Rs 6096.00 /	P. cwt /	Rs 8108 /
5	Providing Earthing Set. (N.S.I)	2.00 / Job		@Rs 25000.0 /	P. Job /	Rs 50000 /
6	C.I tee with flanged ends with holes i/c turning and facing of flanged all size. (PHS(M)I #.8, P.12)	0.71 / cwt		@Rs 6096.00 /	P. cwt /	Rs 4328 /
7	Supplying & installing with M.S pipe made out of M.S sheet 3/16" thick i/c: folding to correct shape i/c: welding etc complete. (PHSI #. , P- )	24.00 / Rft		@Rs 749.34 /	P. Rft /	Rs 17984 /
8	Supplying & fixing MS flanged made of MS Plate having a thickness and total weight as mentioned against each item it includes the cost of making hole facing welding nuts bolts rubber packing white lead filter cartridge etc complete. 1/2" thick M.S Plae. (PHSI #.8, P-88 )	12.00 / No.	<u>suction 6" dia</u>	@Rs 1520.00 /	P. each /	Rs 18240 /
		12.00 / No.	<u>delivery 10" dia</u>	@Rs 2475.00 /	P. each /	Rs 29700 /
9	Supplying C.I flat bottomed of central tapered flanged end with holes i/c turning facing flanged for all sizes. (PHS(M)I #.7, P-11).	0.66 / cwt		@Rs 6096.00 /	P. each /	Rs 4023 /
10	C.I sluice valve heavy pattern test pressure 21 kg /sq cm or 300 lbs / sq inch. (PHS(i,i)I #.16 P-11)	3 / No.		@Rs 9360.00 /	P-Rft /	Rs 28080 /
11	Reflex valve heavy pattern test pressure 21 kg / sq. cm or 300 lbs / sq inch. (PHS(M)I #.C, P-11)	6.0 / No.		@Rs 4062.50 /	Each /	Rs 24375 /
12	But fusion joint. (PHSMI #.H, P-20)	12.00 / joints	<u>6" dia</u>	@Rs 1000.00 /	P. Joint /	Rs. 12000 /
		12.00 / joints	<u>10" dia</u>	@Rs 1800.00 /	P. Joint /	Rs. 21600 /
13	Flange adaptor. (N.S.I)	12.00 / joints	<u>6" dia</u>	@Rs 2025.00 /	P. Joint /	Rs. 24300 /
		12.00 / joints	<u>10" dia</u>	@Rs 7425.00 /	P. Joint /	Rs. 89100 /
14	Jointing C.I / M.S flanged and specials pipes and inside a trenches i/c supplying the rubber packing of the required thickness nuts, bolts & washers etc and other tools required for jointing and testing the joints in the specific pressure etc complete (CSI No.1, P-35).	12.00 / joints	<u>6" dia</u>	@Rs 938.00 /	P. Joint /	Rs. 11256 /
		12.00 / joints	<u>10" dia</u>	@Rs 1576.00 /	P. Joint /	Rs. 18912 /
				<b>Total</b>		<b>Rs: 3721686 /</b>

Total

Rs: 3721686 /

(7) M.S BLACK STEEL PIPE 18" (RAILWAY CROSSING)

1	Excavation for pipe line entrenches and pits in soft soil i/c clay or mud trimming and dressing sides to true alignment and shape leveling of beds of trenches to correct level and grade cutting joint holes and disposal of surplus earth within a one chain as directed by Engineer incharge providing fence guards lights flags and temporary crossing for non vehicular traffic where were required lift upto 5ft and lead upto one chain. (PHSI #.1, P-	1200.00 / cft	@Rs 3600.00	P.%0 cft	Rs 4320
2	Manufacturing, installing M.S Black Steel pipe 1/4" thick 18" dia i/c cutting, folding to correct curvature and shape i/c welding etc complete. (PHSI #. , P- )	100.00 / cft	@Rs 2947.00	P. Rft	Rs 294700
3	Crossing of Railway Track by Jacing method 18" dia M.S Pipe i/c welding etc complete. (R.A attached) (N.S.I)	100.00 / cft	@Rs 3424.00	P. Rft	Rs 342400 N.S
4	C.I sluice valve heavy pattern test pressure 21 kg /sq cm or 300 lbs / sq inch. (PHS(M)I #.16 P-11)	2 / No. 10" dia	@Rs 27690.00	P. each	Rs 55380
5	Jointing C.I / M.S flanged and specials pipes and inside a trenches i/c supplying the rubber packing of the required thickness nuts, bolts & washers etc and other tools required for jointing and testing the joints in the specific pressure etc complete (PHSI #.1, P-40).	4.00 / joints 10" dia	@Rs 1576.00	P. Joint	Rs. 6304
6	Supplying & fixing MS flanged made of MS Plate having a thickness and total weight as mentioned against each item it includes the cost of making hole facing welding nuts bolts rubber packing white lead filter cartridge etc complete. 1/2" thick M.S Plae. (PHSI #.8, P-40 )	4.00 / No. / 10" dia	@Rs 2475.00	P. each	Rs 9900
7	Refilling the excavated stuff in trenches 6" thick layers i/c watering ramming to full compaction etc complete. (PHSI #.24, P-53)	1080.00 / cft	@Rs 2760.00	P%0 Cft	Rs. 2981
				Total	715985
					715985
<u>CHAMBER</u>					
1	Excavation in foundation of building bridges and other structures i/c dig billing dressing refilling around the structures with excavated Earth watering ramming up to 5ft (b) in ordinary soil (C.S.I-18/ P/4)	324.00 / cft	@Rs 3176.25	P%0 Cft	Rs 1029
2	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without shuttering. (G.S.I - 5, P/15)	40.50 / cft	@Rs 11288.75	P.% cft	Rs. 4572
		6.25 / cft	@Rs 14429.25	P.% cft	Rs. 902

- 3 Reinforced cement concrete work i/c all labour and material except the cost of steel reinforcement and its labour for bending and binding which will be paid separately. This rate also includes all kinds of forms moulds lifting shuttering curing rendering and finishing the exposed surface i/c screening and washing of shingle (a) R.C work in roof slab members laid in situ or precast laid in position complete in a respect. (i) Ratio 1:2:4 90 lbs cement 2 cft sand 4 cft shingle 1/8" to 1/4" gauge. (GSI #.6(a), P-15)

22.08 / cft @Rs 337.00 P. cft Rs. 7441

- 4 Fabrication of mild steel reinforcement for cement concrete i/c cutting bending laying in position making joints and fastening i/c cost of binding wire also includes removal of rust from bars. (GSI #.8, P-17)

0.89 / cwt @Rs 5001.70 P. cwt Rs. 4452

- 5 Pacca brick work in foundation and plinth in cement sand mortar(1:6) (C.S.I No. 4 P/ 19)

178.50 / cft @Rs 11948.36 P% Cft Rs 21328

- 6 Cement Plaster 1:4 1/2" thick upto 12' height. (CSI No: 11/b, P-52)

171.18 / cft @Rs 2283.93 P% Sft Rs 3910

Total Rs: 43634

Total 43634.00

2 NO. Chamber 2 x 43634 = 87268.00 + 715985 = 803253

### GENERAL ABSTRACT

S.#	Sub- Works	Schedule Amount	N/S Amount	G.Total:
1	RCC Collecting Tank 15' dia (1 No.)	742380	0	742380
2	Screening Chamber (size 8' x 5') 1 No.	148359	0	148359
3	Pump House (size 16' x 12')	277343	0	277343
4	Compound Wall (size 60' x 40')	380490	0	380490
5	PE Pipe Rising main for Wari, Jogi, Mehdi Shah & Benazir muhalla (10" dia & 6" dia)	5795725	0	5795725
6	Pumping Machinery i/c: Inter Connection for Wari / Jogi muhalla.	1449286	2272400	3721686
7	Black Steel Pipe 18" dia (Railway crossing)	460853	342400	803253
G.Total :-		9254435	2614800	11825602

Amount Total (a)

26% above/below on the rates CSR

Total (A) = a+b in words & figure:

CONTRACTOR

Amount to be added /deducted on the basis of premium quoted. TOTAL(b)

Executive Engineer  
Public Health Engg: Division-1  
Larkano

**(INTEGRITY PACT )****DECLARATION OF FEES, COMMISSION AND BROKERAGE ETC****PAYABLE BY CONTRACTORS**

(FOR CONTRACTS WORTH RS. 10.00 MILLION OR MORE)

Contract Number: No.AB/TC/ **2406** Dated: **22/11-2017**  
 Contract Value **Rs.14,361,682/-**

Contract Title: Construction of Disposal Work, PLJ & testing PE Pipe Rising main 10" dia for Benazir colony & Alam Mirbahar mohalla & providing, installing pumping machinery & PLJ & testing PE pipe rising main 12" dia for Wari / Jogi / Mehdi Shah mohalla i/c: PLJ & testing Black Steel Pipe 18" dia by jacking method for Wari / Jogi / Mehdi Shah / Benazir Disposal work under Imp: & Ext: of Urban drg: scheme Naudero.

**Mr. Yaar Muhammad Mahar** hereby declares that it has not obtained or induced the procurement of any contract, right, interest, privilege or other obligation or benefit from Government of Sindh (GoS) or any administrative sub division or agency thereof or any other entity owned or controlled by it (GoS) through any corrupt business practice.

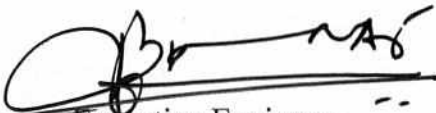
Without limiting the generality of the foregoing, **Mr. Yaar Muhammad Mahar** represents and warrants that it has fully declared the brokerage, commission, fees etc. paid or payable to anyone and not given or agreed to give and shall not give or agree to give to anyone within or outside Pakistan either directly or indirectly through any natural or juridical person, including its affiliate, agent, associate, broker, consultant, director, promoter, shareholder, sponsor or subsidiary, any commission, gratification, bribe, finder's fee or kickback, whether described as consultation fee or otherwise, with the object of obtaining or inducing the procurement of a contract, right, interest, privilege or other obligation or benefit, in whatsoever form, from Procuring Agency (PA), except that which has been expressly declared pursuant hereto.

**Mr. Yaar Muhammad Mahar** accepts full responsibility and strict liability that it has made and will make full disclosure of all agreements and arrangements with all persons in respect of or related to the transaction with PA and has not taken any action or will not take any action to circumvent the above declaration, representation or warranty.



**Mr. Yaar Muhammad Mahar** accepts full responsibility and strict liability for making any false declaration, not making full disclosure, misrepresenting facts or taking any action likely to defeat the purpose of this declaration, representation and warranty. It agrees that any contract, right, interest, privilege or other obligation or benefit obtained or procured as aforesaid shall, without prejudice to any other right and remedies available to PA under any law, contract or other instrument, be voidable at the option of PA.

Notwithstanding any rights and remedies exercised by PA in this regard, **Mr. Yaar Muhammad Mahar** agrees to indemnify PA for any loss or damage incurred by it on account of its corrupt business practices and further pay compensation to PA in an amount equivalent to ten times the sum of any commission, gratification, bribe, finder's fee or kickback given by [Name of Supplier/Contractor/Consultant] as aforesaid for the purpose of obtaining or inducing the procurement of any contract, right, interest, privilege or other obligation or benefit, in whatsoever form, from PA.

  
Executive Engineer  
Public Health Engg: Division-I  
Larkano  
(Procuring Agency)


  
**Mr. Yaar Muhammad Mahar**  
(Contractor)

**SINDH PUBLIC PROCUREMENT REGULATORY AUTHORITY**  
**CONTRACT EVALUATION FORM**

- 1) NAME OF THE ORGANIZATION / DEPTT. **Public Health Engineering Department**
- 2) PROVINCIAL / LOCAL GOVT./ OTHER **Provincial**
- 3) TITLE OF CONTRACT: **CONSTRUCTION OF RCC COVERED NALA FROM JUG CHOWK TO EXISTING TYPE-II DRAINS (NBP BANK STREET) FOR IMPROVEMENT & EXTENSION OF URBAN DRAINAGE SCHEME NAUDERO.**
- 4) TENDER NUMBER: **(02) No**
- 5) BRIEF DESCRIPTION OF CONTRACT: **Improvement & Extension of urban Drainage Scheme Naudero**
- 6) FORUM THAT APPROVED THE SCHEME: **P&D Department Govt: of Sindh**
- 7) TENDER ESTIMATED VALUE: **16.673 Millions**
- 8) ENGINEER'S ESTIMATE: **16.800 Millions**  
 (For civil works only)
- 9) ESTIMATED COMPLETION PERIOD (AS PER CONTRACT) **06 Months**
- 10) TENDER OPENED ON (DATE & TIME) **15/09/2017 at 1.00 PM**
- 11) NUMBER OF TENDER DOCUMENTS SOLD: **10 Nos**  
 (Attach list of buyers)
- 12) NUMBER OF BIDS RECEIVED **10 Nos**
- 13) NUMBER OF BIDDERS PRESENT AT THE TIME OF OPENING OF BIDS: **10 Nos**
- 14) BID EVALUATION REPORT **Hoisted on SPPRA website at EV ID # 2746/2017 dated 14/11/2017**
- 15) NAME AND ADDRESS OF THE SUCCESSFUL BIDDER **M/s. Bakhat Hussain Construction Company**
- 16) CONTRACT AWARD PRICE **16.673 Millions**
- 17) RANKING OF SUCCESSFUL BIDDER IN EVALUATION REPORT  
 (i.e. 1<sup>st</sup>, 2<sup>nd</sup>, 3<sup>rd</sup> EVALUATION BID). **1<sup>st</sup> Lowest**
- 18) METHOD OF PROCUREMENT USED : - (Tick one)
- a) SINGLE STAGE – ONE ENVELOPE PROCEDURE: **Yes**
- b) SINGLE STAGE – TWO ENVELOPE PROCEDURE:
- c) TWO STAGE BIDDING PROCEDURE
- d) TWO STAGE – TWO ENVELOPE BIDDING PROCEDURE
- PLEASE SPECIFY IF ANY OTHER METHOD OF PROCUREMENT WAS ADOPTED i.e. EMERGENCY, DIRECT CONTRACTING / NEGOTIATION ETC. WITH BRIEF REASONS:
- 19) APPROVING AUTHORITY FOR AWARD OF CONTRACT: **Chief Engineer PHED Govt: of Sindh Sukkur**
- 20) WHETHER THE PROCUREMENT WAS INCLUDED IN ANNUAL PROCUREMENT PLAN? **Yes**
- 21) ADVERTISEMENT :
- i) SPPRA Website **No. 34269 dated: 25/08/2017**  
 ( If yes, give date and SPPRA Identification No.)
- ii) News Papers **Yes**  
 ( If yes, give names of newspapers and dates) **Daily Imroz, dated: 26/08/2017  
 Daily Awami Soch, dated: 30/08/2017  
 Daily The Mail, dated: 26/08/2017**
- 22) NATURE OF CONTRACT **Local**

- |  |                      |
|--|----------------------|
| 23) WHETHER QUALIFICATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?<br>(If yes, enclose a copy)   | Yes ( Copy Enclosed) |
| 24) WHETHER BID EVALUATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?<br>( If yes, enclose a copy)   | Yes<br>N/A           |
| 25) WHETHER APPROVAL OF COMPETENT AUTHORITY WAS OBTAINED FOR USING A METHOD OTHER THAN OPEN COMPETITIVE BIDDING?   | Yes                  |
| 26) WAS BID SECURITY OBTAINED FROM ALL THE BIDDERS?  | Yes                  |
| 27) WHETHER THE SUCCESSFUL BID WAS LOWEST EVALUATED BID / BEST EVALUATED BID (in case of Consultancies)  | Lowest Evaluated Bid |
| 28) WHETHER THE SUCCESSFUL BIDDER WAS TECHNICALLY COMPLIANT ?  | Yes                  |
| 29) WHETHER NAMES OF THE BIDDERS AND THEIR QUOTED PRICES WERE READ OUT AT THE TIME OF OPENING OF BIDS?   | Yes                  |
| 30) WHETHER EVALUATION REPORT GIVEN TO BIDDERS BEFORE THE AWARD OF CONTRACT?<br>( Attach copy of the bid evaluation report)  | Yes                  |
| 31) ANY COMPLAINTS RECEIVED  | No                   |
| 32) ANY DEVIATION FROM SPECIFICATIONS GIVEN IN THE TENDER NOTICE / DOCUMENTS<br>( If yes, give details)  | No                   |
| 33) WAS THE EXTENSION MADE IN RESPONSE TIME?<br>( If yes, give reasons)  | No                   |
| 34) DEVIATION FROM QUALIFICATION CRITERIA<br>( If yes, give detailed reasons.)   | No                   |
| 35) WAS IT ASSURED BY THE PROCURING AGENCY THAT THE SELECTED FIRM IS NOT BLACK LISTED  | Yes                  |
| 36) WAS A VISIT MADE BY ANY OFFICER/OFFICIAL OF THE PROCURING AGENCY TO THE SUPPLIER'S PREMISES IN CONNECTION WITH THE PROCUREMENT? IF SO, DETAILS TO BE ASCERTAINED REGARDING FINANCING OF VISIT, IF ABROAD:<br>( If yes, enclose a copy) | No                   |
| 37) WERE PROPER SAFEGUARDS PROVIDED ON MOBILIZATION ADVANCE PAYMENT IN THE CONTRACT (BANK GUARANTEE ETC.)?   | N/A                  |
| 38) SPECIAL CONDITIONS, IF ANY<br>( If yes, give Brief Description)  | N/A                  |

Signature & Official Stamp of  
Authorized Officer

  
Executive Engineer  
Public Health Engg: Division  
Larkana



EXECUTIVE ENGINEER  
PUBLIC HEALTH ENGG: DIVISION I  
LARKANO

# 074-9410326  
# 074-9410326  
phedxen@gmail.com

No. AB/TC/  
Larkano dated:

2396 /of/2017  
20. /Nov/2017

**LETTER OF ACCEPTANCE**

To,

*M/s. Bakhat Hussain Construction Company,  
Government Contractor,  
Larkano.*

Subject: **CONSTRUCTION OF RCC COVERED NALA FROM JUG CHOWK TO  
EXISTING TYPE-II DRAINS (NBP BANK STREET) FOR IMPROVEMENT  
& EXTENSION OF URBAN DRAINAGE SCHEME NAUDERO.**

This is to notify that your Bid dated: 15/09/2017 for execution of the subject work @ 26% above on the schedule rates has been accepted by the Executive Engineer Public Health Engineering Division I Larkano Amounting to Rs: 16,672,709/- (One Hundred Sixty Six Lacs Seventy Two Thousand Seven Hundred & Nine Only).

The 5% Earnest Money of the subject work has already been received in the shape of Call Deposit / Pay Order amounting to Rs: 8,40000/- Hence you are requested to furnish the cost of Stamps amounting Rs: 58,400/- to be fixed on the agreement to be executed / will have to be borne by you within 03 days of the receipt of this acceptance letter in accordance to the conditions of contract and sign the agreement attached herewith within stipulated time mentioned above, failing which the acceptance will be treated as cancelled and the amount of bid security will be forfeited without any further notice.

Copy forwarded with compliments to:

  
Executive Engineer  
Public Health Engg: Division I  
Larkano

- The Chief Engineer, Public Health Engineering Department Government of Sindh Sukkur for kind information and necessary action.
- The Superintending Engineer, Public Health Engg: Circle Larkano for information.

Const: of Rec Covered Nala from Jugh Chowk to Existing Type-II Drain (NBP Bank Street) For Improvement & Extension of Urban Drainage Scheme 58400/-

G.R. P.W.D. Nos. 7934 of 6-4-35  
 56-1 of 8-6-36, 1951-W of 27-9-37, G.C.M.P.  
 and A. Deptt. No. 383-1/37 of 7-11-37  
 (P.W.D.) No. 5-173, 2-W of 22-2-38  
 (J. R. (P.W.D.) No. 1038-1 of 22-2-37  
 12-10-44 and 2-5-44 644-W of 22-2-39  
 12-10-44, and 2-5-44, 45-W 1038/11-1 of  
 28-3-49, 1-47-W 2 of 12-12-50.

Naudeo FORM B-1  
 PUBLIC WORKS DEPARTMENT

PHE CIRCLE Larkana  
 PHE DIVISION Larkana

M/s Bakhat Hussain Const,  
 Co.

Percentage Rate Tender and Contract  
 for works

General Rules and Directions for the Guidance of Contractors



tors are described in their  
 be signed in the name of the firm by one of the partners, or by some other  
 persons having authority to give official receipts for the firm.

1139

21-11-17

4. Any person who submits a tender shall fill up the usual printed form  
 memorandum showing the nature of work to be carried out; he is willing to un-

LRK

21/11/17

Total 838200/-

der take the work at the rate of such percentage, on all the estimated rates  
 be framed. Tenders which propose any alteration in the works specified in  
 the said form of invitation to tender or in the time allowed for carrying out  
 the work, or which contain any other conditions, shall be liable to rejection.  
 No printed form of tender shall include a tender for more than one work,  
 but if contractors wish to tender for two or more works, they shall submit a  
 separate tender for each. Tenders shall have the name and number of the  
 work to which they refer written outside the envelope.

U.A.O. LARKANA

5. The Executive Engineer or his duly authorised Assistant shall open  
 tenders in the presence of contractors who have submitted tenders or their  
 representatives who may be present at the time, and he will enter the amounts  
 of the several tenders in a comparative statement in a suitable form. In the  
 identification, sign copies of the specifications and other documents mention-  
 ed in Rule 1. In the event of a tender being rejected the Divisional Officer  
 shall authorize the Treasury Officer concerned to refund the amount of the  
 earnest money for deposited to the contractor making the tender, on his giving  
 a receipt for the return of the money.

6. The Officer competent to dispose of the tenders shall have power of  
 rejecting all or any of the tenders.

Contracts

Executive Engineer  
 Public Health Engg. Division  
 Larkana



EXECUTIVE ENGINEER  
PUBLIC HEALTH ENGG: DIVISION I  
LARKANO

# 074-9410326

# 074-9410326

phedxen@gmail.com

No. AB/TC/:  
Larkano dated:

2412 /of/2017  
22 /Nov/ 2017

## "WORK ORDER"

*M/s. Bakhat Hussain Construction Company*  
*Government Contractor,*  
*Larkano.*

**Subject: CONSTRUCTION OF RCC COVERED NALA FROM JUG CHOWK TO EXISTING TYPE-II DRAINS (NBP BANK STREET) FOR IMPROVEMENT & EXTENSION OF URBAN DRAINAGE SCHEME NAUDERO.**

Reference: - Your B-I Tender opened on dated: 15/09/2017

Your percentage rate Tender for **Rs.1,32,21,354/=** (Rupees One Crore, Thirty Two Lacs, Twenty One Thousand, Three Hundred & Fifty Four) only @ **26% above** the schedule items viz: **Rs.1,66,72,709/=** (Rupees One Crore, Sixty Six Lacs, Seventy Two Thousand, Seven Hundred & Nine) only being the lowest rates is hereby approved/ accepted by the Chief Engineer, PHED Sukkur vide No. GM/PHED/3877 dated 27/10/2017 and endorsed by the Superintending Engineer, PHE Circle Larkana vide Letter No. GC-II/PHED/2510 dated: 31/10/2017

You are, therefore, directed to please start the work within seven (07) days after issue of the 'Work order' according to drawing design & PWD specifications under the supervision of Assistant Engineer, Public Health Engg: S/Division Ratodero & instructions from the undersigned.

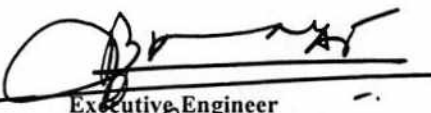
No premium will be allowed on non-schedule items.

No Extra charges such as Taxes, Octroi packing or transportation of material etc will be paid separately.

The work shall have to be completed by you within the period six (06) months as provided in the tender.

The Sindh Sales Tax Special Producer (withholding) Rules, 2011 shall apply to taxable service as or supplied, provided or rendered to persons, specified as withholding agents, in the withholding procedure, for the purpose of deduction and deposit of sales tax.

The undersigned reserves the right to reject any or all parts of it or order for replacement if it is not done as per drawing, design and P.H.E specifications.

  
Executive Engineer  
Public Health Engg: Division I  
Larkano

**C.F.W.Cs for favour of information to:**

1. The Superintending Engineer, Public Health Engg: Circle Larkana
2. The Assistant Engineer, Public Health Engg: S/Division Larkana

## BILL OF QUANTITIES

(A)

Construction of RCC Covered Nala from Jug Chowk to existing type-II Drains (NBP Bank street) for Improvement & Extension of Urban Drainage scheme Naudero.

(B)

(under Provincial ADP 2008-09)

S.#	Qty	Item	Rate	Unit	Amount
<u>PART-I RCC COVERED NALA</u>					
1		Dismantling and Removing road metalling (CSI No.51 P-13)			
	2375.00	cft	@Rs 605.00	P% Cft	Rs. 14369
2		Dismantling of Brick or Lime cement mortor. (CSI No. 13 P-10)			
	75.00	Rft	@Rs 1285.63	P% Cft	Rs. 964
3		Dismantelling of C.C Plain 1:2:4 (CSI #. 19c P-10)			
	540.00	cft	@Rs 3327.50	P% Cft	Rs. 17969
4		Dismantelling of CC reinforced separating reinforcement from concrete, cleaning and straighting the same. (GSI #.20, P-10)			
	15.00	cft	@Rs 5445.00	P% Cft	Rs. 817
5		Excavation for pipe line in trenches, & pits in soft soils i/c: trimming & dressing sides to true alignment & shape levelling of beds of trenches to correct level and grade, cutting joint holes & disposal of surplus earth within a one chain as directed by Engineer Incharge, providing fence guards, lights, flags and temporary crossing for non-vehicular traffic where ever required lift upto 5 ft. (1.52 m) & lead upto one chain (30.5 m) (PHSI # 1, P-60)			
	23575.00	Cft	@Rs 3600.00	P%0 Cft	Rs. 84870
6		Excavation for pipe line in trenches, & pits in wet soils clay or mud i/c: trimming & dressing sides to true alignment & shape levelling of beds of trenches to correct level and grade, cutting joint holes & disposal of surplus earth within a one chain as directed by Engineer Incharge, providing fence guards, lights, flags and temporary crossing for non-vehicular traffic where ever required lift upto 5 ft.(1.52 m) & lead upto one chain (30.5 m) (PHSI #.14, P-66)			
	19462.50	Cft	@Rs 5400.00	P%0 Cft	Rs. 105098
7		Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without shuttering Ratio 1:4:8 (G.S.I-5(i) P/16)			
	4325.00	Cft	@Rs 11288.75	P% Cft	Rs. 488238

Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without shuttering Ratio 1:2:4 (G.S.I-5(a) P-16)

16939.40 cft

@Rs 14429.25

P.% Cft

Rs. 2444228

9 Erection and removal of centering for R.C.C or plain C.C works of partial wood of 2nd class, Ratio 1:4:8 (CSI #.B19, P- 18)

9124.50 sft

@Rs: 3127.41

P.% sft

Rs. 287237

10 R.C.C work i/c: all labour and material except the cost of steel reinforcement and its labour for bending and binding which will be paid separately. This rate also includes all kinds of forms moulds lifting shuttering curing rendering and finishing the exposed surface i/c screening and washing of shingle (a) R.C work in roof slab members laid in situ or precast laid in position complete in a respect. (i) Ratio 1:2:4 90 Lbs cement 2 cft sand 4 cft shingle 1/8" to 1/4" gauge. (G.S.I-6(a) P/17)

15646.25 Cft

@Rs 337.00

P-Cft

Rs. 5272786

11 Fabrication of mild steel reinforcement for cement concrete i/c cutting bending laying in position making joints and fastening i/c cost of binding wire also includes removal of rust from bars. (G.S.I-8(a) P/17)

628.64 Cwt

@Rs 5001.70

P-Cwt

Rs. 3144269

12 Pacca brick work in other than building i/c: striking of joint upto 20' height in cement sand mortar.

6475.50 Cft

@Rs 12899.70

P.% Cft

Rs. 835320

13 Extra labour for Arch work in brick masonry including labour for centering and decentering. (CSI #.18, P-20)

3037.50 sft

@Rs 968.00

P.% sft

Rs. 29403

14 Cement Pointing struct joints on wall Ratio (1:3) (CSI #.19 P-59)

16224.00 Sft

@Rs 1213.58

P.% Sft

Rs. 196891

15 Supplying & mixing chemical admixture platinales B-V-40 or equivalent and mixing with concrete 1:2:4 (approved rate) (N.S.I)

172.53

Ltr

@Rs 80.00

P. Litre

Rs. 13803



Small iron work such as gusset plat kness bends strips, straps, rings etc i/c: cutting, drilling, refilling handling and assembling and fixing but excluding erection in position. (GSI #.1 P-91)

16.45 Cwt @Rs 6420.61 P. Cwt Rs. 105619

17 Refilling the excavated stuff in trenches 6" thick layers levelling i/c: watering to full compation etc complete. (PHSI #.24, P-47)

3750.00 Cwt @Rs 2760.00 P.%0 cft Rs. 10350

18 Add extra for every 50 Ft: additional lead or part there of (Horizontal lead 1 mile) (Schedule of Carriage)

42292.50 Cwt @Rs 407.00 P.% cft Rs. 172130

19 Providing PVC Pipe 2" dia (Non Pressure pipe) (Schedule of mat. Item NO: 1 Page NO: 5)

360.00 Rft @Rs 30.49 P.Rft Rs. 10976

Total : Rs. 13235338

GENERAL ABSTRACT

S. #.	Sub- Works	Schedule Amount	N/S Amount	G.Total:
1	Part-I RCC Covered Nala	13221535 ✓	13803 ✓	Rs 13235338
	G.total:	13221535 ✓	13803 ✓	Rs 13235338

Amount Total (a)

25% above/below on the rates CSR

Total (A) = a+b in words & figure:

Twenty Six Above

Amount to be added /deducted on the basis of premium quoted. TOTAL(b)

CONTRACTOR

Executive Engineer  
Public Health Engg: Division-1  
Larkano

**(INTEGRITY PACT )****DECLARATION OF FEES, COMMISSION AND BROKERAGE ETC****PAYABLE BY CONTRACTORS**

(FOR CONTRACTS WORTH RS. 10.00 MILLION OR MORE)

Contract Number: No.AB/TC/24/2 Dated: 22-11-2017

Contract Value: Rs. 16,672,709/-

Contract Title: Construction of RCC Covered Nala from Jug Chowk to existing type-II Drains (NBP Bank street) for Improvement & Extension of Urban Drainage scheme Naudero.

**M/s. Bakhat Hussain Construction Company** hereby declares that it has not obtained or induced the procurement of any contract, right, interest, privilege or other obligation or benefit from Government of Sindh (GoS) or any administrative sub division or agency thereof or any other entity owned or controlled by it (GoS) through any corrupt business practice.


Without limiting the generality of the foregoing, **M/s. Bakhat Hussain Construction Company** represents and warrants that it has fully declared the brokerage, commission, fees etc. paid or payable to anyone and not given or agreed to give and shall not give or agree to give to anyone within or outside Pakistan either directly or indirectly through any natural or juridical person, including its affiliate, agent, associate, broker, consultant, director, promoter, shareholder, sponsor or subsidiary, any commission, gratification, bribe, finder's fee or kickback, whether described as consultation fee or otherwise, with the object of obtaining or inducing the procurement of a contract, right, interest, privilege or other obligation or benefit, in whatsoever form, from Procuring Agency (PA), except that which has been expressly declared pursuant hereto.

**M/s. Bakhat Hussain Construction Company** accepts full responsibility and strict liability that it has made and will make full disclosure of all agreements and arrangements with all persons in respect of or related to the transaction with PA and has not taken any action or will not take any action to circumvent the above declaration, representation or warranty.

**M/s. Bakhat Hussain Construction Company** accepts full responsibility and strict liability for making any false declaration, not making full disclosure, misrepresenting

facts or taking any action likely to defeat the purpose of this declaration, representation and warranty. It agrees that any contract, right, interest, privilege or other obligation or benefit obtained or procured as aforesaid shall, without prejudice to any other right and remedies available to PA under any law, contract or other instrument, be voidable at the option of PA.

Notwithstanding any rights and remedies exercised by PA in this regard, **M/s. Bakhat Hussain Construction Company** agrees to indemnify PA for any loss or damage incurred by it on account of its corrupt business practices and further pay compensation to PA in an amount equivalent to ten times the sum of any commission, gratification, bribe, finder's fee or kickback given by [Name of Supplier/Contractor/Consultant] as aforesaid for the purpose of obtaining or inducing the procurement of any contract, right, interest, privilege or other obligation or benefit, in whatsoever form, from PA.



Executive Engineer  
Public Health Engg: Division-I  
Larkano  
(Procuring Agency)



**M/s. Bakhat Hussain Construction Company**  
(Contractor)

**SINDH PUBLIC PROCUREMENT REGULATORY AUTHORITY**  
**CONTRACT EVALUATION FORM**

- 1) NAME OF THE ORGANIZATION / DEPTT. **Public Health Engineering Department**
- 2) PROVINCIAL / LOCAL GOVT./ OTHER **Provincial**
- 3) TITLE OF CONTRACT: **CONSTRUCTION OF C.C BLOCKS AND DRAINS IN VARIOUS MUHALLAS OF NAUDERO CITY UNDER IMPROVEMENT & EXTENSION OF DRAINAGE SCHEME NAUDERO TALUKA RATODERO DISTRICT LARKANO.**
- 4) TENDER NUMBER: **(03) No**
- 5) BRIEF DESCRIPTION OF CONTRACT: **Improvement & Extension of urban Drainage Scheme Naudero**
- 6) FORUM THAT APPROVED THE SCHEME : **P&D Department Govt: of Sindh**
- 7) TENDER ESTIMATED VALUE: **9.983 Millions**
- 8) ENGINEER'S ESTIMATE: **9.500 Millions**  
(For civil works only)
- 9) ESTIMATED COMPLETION PERIOD (AS PER CONTRACT) **06 Months**
- 10) TENDER OPENED ON (DATE & TIME) **15/09/2017 at 1.00 PM**
- 11) NUMBER OF TENDER DOCUMENTS SOLD: **10 Nos**  
(Attach list of buyers)
- 12) NUMBER OF BIDS RECEIVED **10 Nos**
- 13) NUMBER OF BIDDERS PRESENT AT THE TIME OF OPENING OF BIDS: **10 Nos**
- 14) BID EVALUATION REPORT: **Hoisted on SPPRA website at EV ID # 2746/2017 dated 14/11/2017**
- 15) NAME AND ADDRESS OF THE SUCCESSFUL BIDDER **Mr. Imdad Ali Khaskheli**
- 16) CONTRACT AWARD PRICE **9.983 Millions**
- 17) RANKING OF SUCCESSFUL BIDDER IN EVALUATION REPORT  
(i.e. 1<sup>st</sup>, 2<sup>nd</sup>, 3<sup>rd</sup> EVALUATION BID). **1<sup>st</sup> Lowest**
- 18) METHOD OF PROCUREMENT USED :- (Tick one)
- a) SINGLE STAGE – ONE ENVELOPE PROCEDURE: **Yes**
- b) SINGLE STAGE – TWO ENVELOPE PROCEDURE:
- c) TWO STAGE BIDDING PROCEDURE
- d) TWO STAGE – TWO ENVELOPE BIDDING PROCEDURE
- PLEASE SPECIFY IF ANY OTHER METHOD OF PROCUREMENT WAS ADOPTED i.e. EMERGENCY, DIRECT CONTRACTING / NEGOTIATION ETC. WITH BRIEF REASONS:
- 19) APPROVING AUTHORITY FOR AWARD OF CONTRACT: **Chief Engineer PHED Govt: of Sindh Sukkur**
- 20) WHETHER THE PROCUREMENT WAS INCLUDED IN ANNUAL PROCUREMENT PLAN? **Yes**
- 21) ADVERTISEMENT : **Yes**
- i) SPPRA Website **No. 34269 dated: 25/08/2017**  
( If yes, give date and SPPRA Identification No.)
- ii) News Papers **Yes**  
( If yes, give names of newspapers and dates)
- Daily Imroz, dated: 26/08/2017**  
**Daily Awami Soch, dated: 30/08/2017**  
**Daily The Mail, dated: 26/08/2017**

- |  |                      |
|--|----------------------|
| 22) NATURE OF CONTRACT   | Local                |
| 23) WHETHER QUALIFICATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?<br>(If yes, enclose a copy)   | Yes ( Copy Enclosed) |
| 24) WHETHER BID EVALUATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?<br>( If yes, enclose a copy)   | Yes<br>N/A           |
| 25) WHETHER APPROVAL OF COMPETENT AUTHORITY WAS OBTAINED FOR USING A METHOD OTHER THAN OPEN COMPETITIVE BIDDING?   | Yes                  |
| 26) WAS BID SECURITY OBTAINED FROM ALL THE BIDDERS?  | Yes                  |
| 27) WHETHER THE SUCCESSFUL BID WAS LOWEST EVALUATED BID / BEST EVALUATED BID (in case of Consultancies)  | Lowest Evaluated Bid |
| 28) WHETHER THE SUCCESSFUL BIDDER WAS TECHNICALLY COMPLIANT ?  | Yes                  |
| 29) WHETHER NAMES OF THE BIDDERS AND THEIR QUOTED PRICES WERE READ OUT AT THE TIME OF OPENING OF BIDS?   | Yes                  |
| 30) WHETHER EVALUATION REPORT GIVEN TO BIDDERS BEFORE THE AWARD OF CONTRACT?<br>( Attach copy of the bid evaluation report)  | Yes                  |
| 31) ANY COMPLAINTS RECEIVED  | No                   |
| 32) ANY DEVIATION FROM SPECIFICATIONS GIVEN IN THE TENDER NOTICE / DOCUMENTS<br>( If yes, give details)  | No                   |
| 33) WAS THE EXTENSION MADE IN RESPONSE TIME?<br>( If yes, give reasons)  | No                   |
| 34) DEVIATION FROM QUALIFICATION CRITERIA<br>( If yes, give detailed reasons.)   | No                   |
| 35) WAS IT ASSURED BY THE PROCURING AGENCY THAT THE SELECTED FIRM IS NOT BLACK LISTED  | Yes                  |
| 36) WAS A VISIT MADE BY ANY OFFICER/OFFICIAL OF THE PROCURING AGENCY TO THE SUPPLIER'S PREMISES IN CONNECTION WITH THE PROCUREMENT? IF SO, DETAILS TO BE ASCERTAINED REGARDING FINANCING OF VISIT, IF ABROAD:<br>( If yes, enclose a copy) | No                   |
| 37) WERE PROPER SAFEGUARDS PROVIDED ON MOBILIZATION ADVANCE PAYMENT IN THE CONTRACT (BANK GUARANTEE ETC.)?   | N/A                  |
| 38) SPECIAL CONDITIONS, IF ANY<br>( If yes, give Brief Description)  | N/A                  |

Signature & Official Stamp of

Authorized Officer

  
Executive Engineer  
Public Health Engg: Division  
Larkana



EXECUTIVE ENGINEER  
PUBLIC HEALTH ENGG: DIVISION I  
LARKANO

# 074-9410326  
# 074-9410326  
phedxen@gmail.com

No. AB/TC/  
Larkano dated:

2405  
20 /of/2017  
/Nov/2017

**LETTER OF ACCEPTANCE**

To,

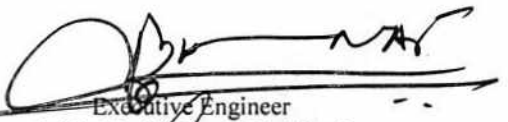
*Mr. Imdad Hussain Khaskheli,  
Government Contractor,  
Larkano.*

**Subject: CONSTRUCTION OF RCC COVERED NALA FROM JUG CHOWK TO EXISTING TYPE-II DRAINS (NBP BANK STREET) FOR IMPROVEMENT & EXTENSION OF URBAN DRAINAGE SCHEME NAUDERO.**

This is to notify that your Bid dated: 15/09/2017 for execution of the subject work @ 51% above on the schedule rates has been accepted by the Executive Engineer Public Health Engineering Division I Larkano Amounting to Rs: 99,82,904/- (Ninety Nine Lacs Eighty Two Thousand Nine Hundred & Four Only).

The 5% Earnest Money of the subject work has already been received in the shape of Call Deposit / Pay Order amounting to Rs: 4,75,000/- Hence you are requested to furnish the cost of Stamps amounting Rs: 35,000/- to be fixed on the agreement to be executed / will have to be borne by you within 03 days of the receipt of this acceptance letter in accordance to the conditions of contract and sign the agreement attached herewith within stipulated time mentioned above, failing which the acceptance will be treated as cancelled and the amount of bid security will be forfeited without any further notice.

Copy forwarded with compliments to:

  
Executive Engineer  
Public Health Engg: Division I  
Larkano

- The Chief Engineer, Public Health Engineering Department Government of Sindh Sukkur for kind information and necessary action.
- The Superintending Engineer, Public Health Engg: Circle Larkano for information.

contd. of CC Dms cc B lock in Housing Dms Scheme  
Naudero Taluka Radodero

34900/2

SGP (Klp.) D. No. 105-11-94-50,000 L.F. of 8 L. each.

P.W.D. 287

G.R. P.W.D. Nos. 7938 of 6-4-35  
56-1 of 8-6-36, 19314-W of 27-9-37, G.C.M.P.  
and M. Deputt. No. 383-1/37 of 9-11-37  
(P.W.D.) No. 5-173, 2-W of 22-2-38,  
(J. R. (P.W.D.) No. 1038-1 of 22-2-37  
12-10-44 and 2-5-44 694-W of 22-2-39  
12-10-44, and 2-5-44, 45-W 1038/11-1 of  
23-3-49, 1-47-W 2 of 12-12-50.

FORM B-1

PUBLIC WORKS DEPARTMENT

PHECIRCLE Larkana  
PHE DIVISION Larkana

Mr: Imdad Ali Khaskheli

FILED

Percentage Rate Tender and Contract



When a tender being submitted by a firm, it must be signed by all the partners, or in the event of the absence of any partner, by a person holding a power-of-attorney on behalf of the partners, or by some other person authorized to give attested receipts for the firm.

When a tender is made on account of any work, when executed by a firm, it must be signed by all the partners, except where the contract is for a small amount in which case the receipt shall be given by the partners, or by some other person authorized to give attested receipts for the firm.

Who submits a tender shall fill up the usual printed form attached above or below the rates specified in 'Schedule B' and state the items of work to be carried out; he is willing to undertake the work. Only one rate of such percentage, on all the items of work, shall be tendered. Tenders, which propose any alteration in the works specified in the said form of invitation to tender or in the time allowed for carrying out the work, or which contain any other conditions, will be liable to rejection. No printed form of tender shall include a tender for more than one work, but if contractors wish to tender for two or more works they shall submit a separate tender for each. Tenders shall have the name and number of the work to which they refer written outside the envelope.

5. The Executive Engineer or his duly authorized Assistant shall open tenders in the presence of contractors who have submitted tenders or their representatives who may be present at the time, and he will enter the amounts of the several tenders in a comparative statement in a suitable form. In the identification, sign copies of the specifications and other documents mentioned in Rule 1. In the event of a tender being rejected the Divisional Officer shall authorize the Treasury Officer concerned to refund the amount of the earnest money for deposited to the contractor making the tender, on his giving a receipt for the return of the money.

6. The Officer competent to dispose of the tenders shall have the right of rejecting all or any of the tenders.

Imdad Ali  
Contracts

[Signature]  
Executive Engineer  
Public Works Department  
Larkana



EXECUTIVE ENGINEER  
PUBLIC HEALTH ENGG: DIVISION I  
LARKANO

# 074-9410326

# 074-9410326

phedxen@gmail.com

No. AB/TC/:  
Larkano dated:

24/3  
22. /of/2017  
/Nov/ 2017

### "WORK ORDER"

*Mr. Imdad Hussain Khaskheli*  
Government Contractor,  
Larkano.

Subject: CONSTRUCTION OF C.C BLOCKS AND DRAINS IN VARIOUS MUHALLAS OF NAUDERO CITY UNDER IMP: & EXT: OF DRG: SCHEME NAUDERO.

Reference: - Your B-I Tender opened on dated: 15/09/2017

Your percentage rate Tender for **Rs.66,11,195/=** (Rupees Sixty Six Lacs, Eleven Thousand, One Hundred & Ninety Five) only @ **51% above** the schedule items viz: **Rs.99,82,904/=** (Rupees Ninety Nine Lacs, Eighty Two Thousand, Nine Hundred, & Four) only being the lowest rates is hereby approved/ accepted by the Chief Engineer, PHED Sukkur vide No. GM/PHED/3914 dated 31/10/2017 and endorsed by the Superintending Engineer, PHE Circle Larkana vide Letter No. GC-II/PHED/2569 dated: 03/11/2017

You are, therefore, directed to please start the work within seven (07) days after issue of the 'Work order' according to drawing design & PWD specifications under the supervision of Assistant Engineer, Public Health Engg: S/Division Ratodero & instructions from the undersigned.

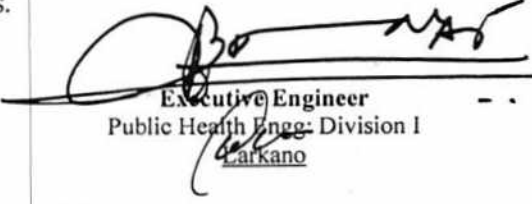
No premium will be allowed on non-schedule items.

No Extra charges such as Taxes, Octroi packing or transportation of material etc will be paid separately.

The work shall have to be completed by you within the period six (06) months as provided in the tender.

The Sindh Sales Tax Special Producer (withholding) Rules, 2011 shall apply to taxable service as or supplied, provided or rendered to persons, specified as withholding agents, in the withholding procedure, for the purpose of deduction and deposit of sales tax.

The undersigned reserves the right to reject any or all parts of it or order for replacement if it is not done as per drawing, design and P.H.E specifications.

  
Executive Engineer  
Public Health Engg: Division I  
Larkano

**C.F.W. Cs for favour of information to:**

1. The Superintending Engineer, Public Health Engg: Circle Larkana
2. The Assistant Engineer, Public Health Engg: S/Division Larkana



BILL OF QUANTITIES

(A)

Construction of C.C Blocks and Drains in various muhallas of Naudero city under Imp: & Ext: of Drg: scheme Naudero (under ADP 2008-09)

Item	Quantities	Description and rate of Item to be executed at site	Rate	Unit	Amount in Rupees
1	2	3	4	5	6
<u>Part-I C.C Drains</u>					
1		Excavation in foundation of building bridges and other structures i/c dag belling dressing refilling around the structures with excavated earth watering ramming lead up to 5ft (b) in ordinary soil (G.S.I-18/ P/4)			
	24825.00 cft		@Rs. 3176.25	P%0Cft	Rs. 78850
2		Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without shuttering Ratio 1:4:8 (G.S.I-5(ii) P/17			
	5275.00 Cft		@Rs. 11288.75	P%Cft	Rs. 595482
3		Construction of standard open type drains cunette block of C.C 1:2:4 in situ to the design profile i/c cost of mould as per drawing i/c applying floating cost of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detailed drawing. (P.H.S.I No D. P/ 58)			
	Type A 5000.0 Rft		@Rs. 94.00	P-Rft	Rs. 470000
	Type B 3000.0 Rft		@Rs. 174.00	P-Rft	Rs. 522000
4		Pacca brick work in foundation and plinth in cement sand mortar(1:6) (G.S.I No. 4 (e) P/ 21)			
	15375.00 cft		@Rs. 11948.36	P%Cft	Rs. 1837060
5		Cement plaster (1:4) up to 20'height 1/2" thick (G.S.I-11(b) / P/52)			
	23000.00 Sft		@Rs. 2283.93	P%Sft	Rs. 525304
6		R.C.C work i/c all labour and material except the cost of steel reinforcement and its labour for bending and binding which will be paid separately. This rate also includes all kinds of forms moulds lifting shuttering curing rendering and finishing the exposed surface i/c screening and washing of shingle (a) R.C work in roof slab beams columns,rafts lintels & other structural members laid in situ or precast laid in position complete in a respect. (i) Ratio 1;2;4 90 lbs cement 2 cft sand 4 cft shingle 1/8" to 1/4" gauge. (G.S.I-6(a) P/17)			
	216.31 Cft		@Rs. 337.00	P-Cft	Rs. 72897

- 7 Fabrication of mild steel reinforcement for cement concrete i/c cutting bending laying in position making joints and fastening i/c cost of binding wire also includes removal of rust from bars.  
(G.S.I-8-b P/17)

7.72 Cwt

@Rs. 5001.70 P-Cwt Rs. 38613

- 8 Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without shuttering Ratio 1:2:4 (G.S.I-5 f P/15)

310.48 Cft

@Rs. 14429.25 P% Cft Rs. 44799

Total: (A) Rs. 41850.05 ✓

Part- II CC BLOCKS

- 1 Barrow pit excavation undressed lead upto 100ft ordinary soil  
(G.S.I. No. 3 (a) p/ 1)

9665.00 Cft ✓

@Rs. 2117.50 P%0Cft Rs. 20466 ✓

- 2 Laying arth in 6" thick layers levelling and dressing etc completed  
(G.S.I.No. 13 a p/ 3)

34490.00 Cft ✓

@Rs. 263.00 P%0Cft Rs. 9071 ✓

- 3 Extra lead for every 50' Ft: additional lead or part thereof. (GSI NO.8P-3)

9665.00 Cft ✓

@Rs. 5039.00 P%0Cft Rs. 48702 ✓

- 4 Cement concrete bricks or stone ballest 1/2" to 2" gauge. (Ratio 1:4:8)  
(G.S.I. No. 4(b) p/ 15)

11382 Cft ✓

@Rs. 9416.28 P%cft Rs. 1071733 ✓

- 5 Cement concrete plain i/c placing compacting, finishing and curing etc complete i/c sreening & washing of stone aggregate without shuttering (Ratio 1:2:4) (G.S.I No. 5 p/ 16)

8623 Cft ✓

@Rs. 14429.25 P%cft Rs. 1244162 ✓

- 6 Erection and removal of centering for R.C.C or plain C.C works of deodar wood (2nd class) (b) for partal wood (vertical).  
(G.S.I.No. 19 p/ 18)

1025.00 sft ✓

@Rs. 3127.41 P% sft Rs. 32056 ✓

Total: Rs. 2426190 ✓

General Abstract

S.#	Sub- Works	Schedule Amount	N/S Amount	G.Total:
1	Part-I C.C drains	4185005 ✓	0 ✓	0 4185005 ✓
2	Part-II C.C Blocks	2426190 ✓	0 ✓	0 2426190 ✓
	<b>G.total:</b>	<b>6611195 ✓</b>	<b>0 ✓</b>	<b>0 6611195 ✓</b>

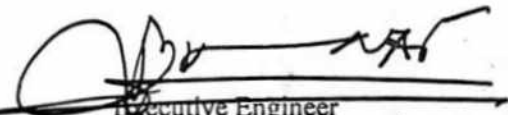
Amount Total (a)

51% % above / below on the rates CSR

Amount to be added /deducted on the basis of premium quoted. TOTAL(b)

Total (A) = a+b in words & figure:

CONTRACTOR

  
Executive Engineer  
Public Health Engg: Division-1  
Larkano

**SINDH PUBLIC PROCUREMENT REGULATORY AUTHORITY**  
**CONTRACT EVALUATION FORM**

- 1) NAME OF THE ORGANIZATION / DEPTT. **Public Health Engineering Department**
- 2) PROVINCIAL / LOCAL GOVT./ OTHER **Provincial**
- 3) TITLE OF CONTRACT: **CONSTRUCTION OF DISPOSAL WORK FOR VILLAGE BHAI KHAN GHANGHRO (UNDER CONSTRUCTION OF CC DRAINS, CC BLOCKS IN VARIOUS VILLAGES(10 VILLAGES) OF TALUKA RATODERO.**
- 4) TENDER NUMBER: **(04) No**
- 5) BRIEF DESCRIPTION OF CONTRACT: **Providing drainage facility to the residence of area**
- 6) FORUM THAT APPROVED THE SCHEME **P&D Department Govt: of Sindh**
- 7) TENDER ESTIMATED VALUE: **5.283 Millions**
- 8) ENGINEER'S ESTIMATE: **4.560 Millions**  
(For civil works only)
- 9) ESTIMATED COMPLETION PERIOD (AS PER CONTRACT) **06 Months**
- 10) TENDER OPENED ON (DATE & TIME) **15/09/2017 at 1.00 PM**
- 11) NUMBER OF TENDER DOCUMENTS SOLD: **08 Nos**  
(Attach list of buyers)
- 12) NUMBER OF BIDS RECEIVED **08 Nos**
- 13) NUMBER OF BIDDERS PRESENT AT THE TIME OF OPENING OF BIDS: **08 Nos**
- 14) BID EVALUATION REPORT **Hoisted on SPPRA website at EV ID # 2746/2017 dated 14/11/2017**
- 15) NAME AND ADDRESS OF THE SUCCESSFUL BIDDER **M/s. Qadri Ayaz Ali**
- 16) CONTRACT AWARD PRICE **5.283 Millions**
- 17) RANKING OF SUCCESSFUL BIDDER IN EVALUATION REPORT  
(i.e. 1<sup>st</sup>, 2<sup>nd</sup>, 3<sup>rd</sup> EVALUATION BID). **1<sup>st</sup> Lowest**
- 18) METHOD OF PROCUREMENT USED :- (Tick one)
- a) SINGLE STAGE – ONE ENVELOPE PROCEDURE: **Yes**
- b) SINGLE STAGE – TWO ENVELOPE PROCEDURE:
- c) TWO STAGE BIDDING PROCEDURE
- d) TWO STAGE – TWO ENVELOPE BIDDING PROCEDURE
- PLEASE SPECIFY IF ANY OTHER METHOD OF PROCUREMENT WAS ADOPTED i.e. EMERGENCY, DIRECT CONTRACTING / NEGOTIATION ETC. WITH BRIEF REASONS:
- 19) APPROVING AUTHORITY FOR AWARD OF CONTRACT: **Chief Engineer PHED Govt: of Sindh Sukkur**
- 20) WHETHER THE PROCUREMENT WAS INCLUDED IN ANNUAL PROCUREMENT PLAN? **Yes**
- 21) ADVERTISEMENT :
- i) SPPRA Website **No. 34269 dated: 25/08/2017**  
( If yes, give date and SPPRA Identification No.)
- ii) News Papers **Yes**  
( If yes, give names of newspapers and dates) **Daily Imroz, dated: 26/08/2017  
Daily Awami Soch, dated: 30/08/2017  
Daily The Mail, dated: 26/08/2017**
- 22) NATURE OF CONTRACT **Local**

- |  |                      |
|--|----------------------|
| 23) WHETHER QUALIFICATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?<br>(If yes, enclose a copy)   | Yes ( Copy Enclosed) |
| 24) WHETHER BID EVALUATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?<br>( If yes, enclose a copy)   | Yes<br>N/A           |
| 25) WHETHER APPROVAL OF COMPETENT AUTHORITY WAS OBTAINED FOR USING A METHOD OTHER THAN OPEN COMPETITIVE BIDDING?   | Yes                  |
| 26) WAS BID SECURITY OBTAINED FROM ALL THE BIDDERS?  | Yes                  |
| 27) WHETHER THE SUCCESSFUL BID WAS LOWEST EVALUATED BID / BEST EVALUATED BID (in case of Consultancies)  | Lowest Evaluated Bid |
| 28) WHETHER THE SUCCESSFUL BIDDER WAS TECHNICALLY COMPLIANT ?  | Yes                  |
| 29) WHETHER NAMES OF THE BIDDERS AND THEIR QUOTED PRICES WERE READ OUT AT THE TIME OF OPENING OF BIDS?   | Yes                  |
| 30) WHETHER EVALUATION REPORT GIVEN TO BIDDERS BEFORE THE AWARD OF CONTRACT?<br>( Attach copy of the bid evaluation report)  | Yes                  |
| 31) ANY COMPLAINTS RECEIVED  | No                   |
| 32) ANY DEVIATION FROM SPECIFICATIONS GIVEN IN THE TENDER NOTICE / DOCUMENTS<br>( If yes, give details)  | No                   |
| 33) WAS THE EXTENSION MADE IN RESPONSE TIME?<br>( If yes, give reasons)  | No                   |
| 34) DEVIATION FROM QUALIFICATION CRITERIA<br>( If yes, give detailed reasons.)   | No                   |
| 35) WAS IT ASSURED BY THE PROCURING AGENCY THAT THE SELECTED FIRM IS NOT BLACK LISTED  | Yes                  |
| 36) WAS A VISIT MADE BY ANY OFFICER/OFFICIAL OF THE PROCURING AGENCY TO THE SUPPLIER'S PREMISES IN CONNECTION WITH THE PROCUREMENT? IF SO, DETAILS TO BE ASCERTAINED REGARDING FINANCING OF VISIT, IF ABROAD:<br>( If yes, enclose a copy) | No                   |
| 37) WERE PROPER SAFEGUARDS PROVIDED ON MOBILIZATION ADVANCE PAYMENT IN THE CONTRACT (BANK GUARANTEE ETC.)?   | N/A                  |
| 38) SPECIAL CONDITIONS, IF ANY<br>( If yes, give Brief Description)  | N/A                  |

Signature & Official Stamp of  
Authorized Officer

  
Executive Engineer  
Public Health Engg. Division  
Larkana



EXECUTIVE ENGINEER  
PUBLIC HEALTH ENGG: DIVISION I  
LARKANO

# 074-9410326  
# 074-9410326  
phedxen@gmail.com

No. AB/TC/  
Larkano dated:

2402 /of/2017  
20 /Nov/2017

**LETTER OF ACCEPTANCE**

To,

*M/s. Qadri Ayaz Ali,  
Government Contractor,  
Larkano.*

Subject: **CONSTRUCTION OF DISPOSAL WORK FOR VILLAGE BHAI KHAN GHANGHRO (UNDER CONSTRUCTION OF CC DRAINS, CC BLOCKS IN VARIOUS VILLAGES (10 VILLAGES) OF TALUKA RATODERO.**

This is to notify that your Bid dated: 15/09/2017 for execution of the subject work @ 34% above on the schedule rates has been accepted by the Executive Engineer Public Health Engineering Division I Larkano Amounting to Rs: 52,83,313/- (Fifty Two Lacs Eighty Three Thousand Three Hundred & Thirteen Only).

The 5% Earnest Money of the subject work has already been received in the shape of Call Deposit / Pay Order amounting to Rs: 2,28,000/- Hence you are requested to furnish the cost of Stamps amounting Rs: 18,500/- to be fixed on the agreement to be executed / will have to be borne by you within 03 days of the receipt of this acceptance letter in accordance to the conditions of contract and sign the agreement attached herewith within stipulated time mentioned above, failing which the acceptance will be treated as cancelled and the amount of bid security will be forfeited without any further notice.

Copy forwarded with compliments to:

  
Executive Engineer  
Public Health Engg: Division I  
Larkano

- The Chief Engineer, Public Health Engineering Department Government of Sindh Sukkur for kind information and necessary action.
- The Superintending Engineer, Public Health Engg: Circle Larkano for information.

*Contd. of Disposal work for Village Bhai Khan Bahadur under  
Contd. of CC works in various villages (10 villages) of Tardika  
Ratodero Dist: Larkana*

SGP (Khp.) D. No. 105-11-9-1-50,000 L.F. of 8 ls. each.

P.W.D. 237

18500/5

G. R. P. W. D. Nos. 7934 of 6-4-35  
86-1 of 8-6-36, 1951-W of 27-9-37, O.C.M.P.  
and M. Deptt. No. 383-1/37 of 7-11-37  
(P. W. D.) No. 5-173, 2-W of 22-2-38,  
G. R. (P. W. D.) No. 1038-1 of 22-2-37  
12-10-44 and 2-5-44 64-W of 22-2-39  
12-10-44, and 2-5-44, 45-W 1038/1-1 of  
25-3-49, 1-47-W 2 of 12-12-50.

FORM B-1

PUBLIC WORKS DEPARTMENT

PHE CIRCLE Larkana  
PHE DIVISION Larkana

*M/s - Qadri Ayaz Ali*

*1139  
21/11/57*

Percentage Rate Tender and Contract  
for works

General Rules and Directions



When a tender being submitted by a firm, it must be signed by each partner thereof, or in the event of the absence of any partner, it shall be signed on his behalf by a person holding a power-of-attorney authorizing him to do so.

3. Receipts for payments made on account of any work, when executed by a firm, shall also be signed by all the partners, except where the contractors are described in their tender as a firm, in which case the receipt shall be signed in the name of the firm by one of the partners, or by some other persons having authority to give official receipts for the firm.

4. Any person who submits a tender shall fill up the usual printed form stating at what percentage above or below the rates specified in Schedule 'B' memorandum showing items of work to be carried out he is willing to undertake the work. Only one rate of such percentage, on all the <sup>Estimated rates</sup> ~~Scheduled rates~~ shall be framed. Tenders, which propose any alteration in the works specified in the said form of invitation to tender or in the time allowed for carrying out the work, or which contain any other conditions, will be liable to rejection. No printed form of tender shall include a tender for more than one work, but if contractors wish to tender for two or more works they shall submit a separate tender for each. Tenders shall have the name and number of the work to which they refer written outside the envelope.

5. The Executive Engineer or his duly authorized Assistant shall open tenders in the presence of contractors who have submitted tenders or their representatives who may be present at the time, and he will enter the amounts of the several tenders in a comparative statement in a suitable form. In the identification, sign copies of the specifications and other documents mentioned in Rule 1. In the event of a tender being rejected the Divisional Officer shall authorize the Treasury Officer concerned to refund the amount of the earnest money for deposited to the contractor making the tender, on his giving a receipt for the return of the money.

6. The Officer competent to dispose of the tenders shall have the right of rejecting all or any of the tenders.

*Contractor*

*[Signature]*  
Executive Engineer  
Public Works Deptt. Division  
Larkana



EXECUTIVE ENGINEER  
PUBLIC HEALTH ENGG: DIVISION I  
LARKANO

# 074-9410326

# 074-9410326

phedxen@gmail.com

No. AB/TC:  
Larkano dated:

24/11  
22. /of/2017  
/Nov/ 2017

**"WORK ORDER"**

M/s. Qadri Ayaz Ali  
Government Contractor,  
Larkano.

Subject: **CONSTRUCTION OF DISPOSAL WORK FOR VILLAGE BHAI KHAN GHANGHRO (UNDER CONSTRUCTION OF CC DRAINS, CC BLOCKS IN VARIOUS VILLAGES (10 VILLAGES) OF TALUKA RATODERO.**

Reference: - Your B-I Tender opened on dated: 15/09/2017

Your percentage rate Tender for **Rs.29,05,719/=** (Rupees Twenty Nine Lacs, Five Thousand, Seven Hundred & Ninety Nine) only @ **34% above** the schedule items viz: **Rs.52,83,313/=** (Rupees Fifty Two Lacs, Eighty Three Thousand, Three Hundred & Thirteen) only being the lowest rates is hereby approved/ accepted by the Chief Engineer, PHED Sukkur vide No. GM/PHED/3888 dated 30/10/2017 and endorsed by the Superintending Engineer, PHE Circle Larkana vide Letter No. GC-II/PHED/2567 dated: 01/11/2017

You are, therefore, directed to please start the work within seven (07) days after issue of the 'Work order' according to drawing design & PWD specifications under the supervision of Assistant Engineer, Public Health Engg: S/Division Ratodero & instructions from the undersigned.


No premium will be allowed on non-schedule items.

No Extra charges such as Taxes, Octroi packing or transportation of material etc will be paid separately.

The work shall have to be completed by you within the period six (06) months as provided in the tender.

The Sindh Sales Tax Special Producer (withholding) Rules, 2011 shall apply to taxable service as or supplied, provided or rendered to persons, specified as withholding agents, in the withholding procedure, for the purpose of deduction and deposit of sales tax.

The undersigned reserves the right to reject any or all parts of it or order for replacement if it is not done as per drawing, design and P.H.E specifications.

  
Executive Engineer  
Public Health Engg: Division I  
Larkano

**C.F.W. Cs for favour of information to:**

1. The Superintending Engineer, Public Health Engg: Circle Larkana
2. The Assistant Engineer, Public Health Engg: S/Division Larkana



## " Bill of Quantity"

4

(A)

Construction of Disposal work for Village Bhai Khan Ghangro (under Construction of CC Drains, CC blocks in various Villages (10 Villages) of Taluka Ratodero.

(B)

(Under Provincial ADP 2012-13)

S.#	Qty	Description	Rate	Unit	Amount
-----	-----	-------------	------	------	--------

**(A) REPAIR OF CIVIL STRUCTURES**

1		Dismantling cement concrete reinforcement separating reinforcement from concrete cleaning and straightening the same (CSINo.20, P.11)		P% Cft	Rs 15520.00
	285.0300	Cft	@Rs 5445.00		
2		Pacca brick work in ground floor i/c striking of joints upto 20 ft height Ratio 1:6 (G.S.I No. 7 P/ 21)		P% Cft	Rs 63153.00
	498.27	cft	@Rs 12674.36		
3		Pacca brick work in foundation and plinth in cement sand mortar(1:6) (G.S.I No. 4 P/ 24)		P% Cft	Rs 9412.00
	78.77	cft	@Rs 11948.36		
4		Small iron work such as guest plate, knees, bends strips, straps, rings etc i/c cutting, drilling, re vitting, handling, assembling and fixing but excluding erection in position. (CSINo.1, P.90)		P.Cwt	Rs 12385.00
	1.9290	CWT	@Rs 6420.61		
5		Cement Plaster (1:6) 1/2" thick up to 12' height (G.S.I-11.b/ P.52)		P% Sft	Rs 55105.00
	2497.28	Cft	@Rs 2206.60		
6		Reinforced cement concrete work including all labour and material except the cost of steel reinforcement and its labour for bending and binding which will be paid separately. This rate also includes all kinds of forms moulds lifting shuttering curing rendering and finishing the exposed surface i/c screening and washing of shingle (a) R.C work in roof slab members laid in situ or precast laid in position complete in a respect. (i) Ratio 1;2;4 90 lbs cement 2 cft sand 4 cft shingle 1/8" to 1/4" gauge. (G.S.I-6 P/16)		P. cft	Rs 96048.00
	285.01	Cft	@Rs 337.00		
7		Fabrication of mild steel reinforcement for cement concrete i/c cutting bending laying in position making joints and fastening i/c cost of binding wire also includes removal of rust from bars. (G.S.I-7 (ii) (a) P/19)		P-Cwt	Rs 57269.00
	11.45	cwt	@Rs 5001.70		
8		Cement Pointing struck joints on walls. (CSI No: 11, P-51) Ratio 1:3		P.% sft	Rs 5789.00
	447.00	sft	@Rs 1213.58		

fabrication of heavy steel work with angles tees flate iron round iron sheet iron for making girder tanks etc i/c cutting drilling revilling holding assembling and fixing but excluding erection in position (CSINO.2, P.91)

5.89	cwt	@Rs 4928.49	P-Cwt	Rs 29029.00
10	Filling watering and ramming earth in floors with surplus earth from foundation lead upto one chain and lift upto 5ft: (CSINO.21, P.5)			
1074.00	Cft	@Rs 3630.00	P%0 cft	Rs 3899.00
11	Cement concrete Brick or stone ballast 1:1/2" to 2" guage Ratio 1:4:8 (CSI No.5 P.18)			
127.38	Cft	@Rs 9416.28	P% Cft	Rs 11994.00
12	Cement Plaster 1:4, 3/8" thick upto 20' height (CSI No.10 P.52)			
2497.28	Sft	@Rs 2197.52	P% Sft	Rs 54878.00
13	Providing Laying 3" thick topping C.C 1:2:4 i/c surface finishing and dividing into panels 3" thick, (CSINO.16, P.41)			
358.00	Sft	@Rs 4411.82	P% Sft	Rs 15794.00
14	Primary coat of chalk distempering. (CSI #.23, P-53)			
1983.00	Sft	@Rs 442.75	P% Sft	Rs 8780.00
15	Distempering two coats. (CSINO.24, P.54)			
1983.00	Sft	@Rs 1043.90	P% Sft	Rs 20701.00
16	Preparing surface & painting of doors and windows any type i/c edges. (CSINO.5 c, P.69)			
283.00	Sft	@Rs 2116.41	P% Sft	Rs 5989.00
17	Cleaning of Collecting Tank/ Sump below ground level i/c dewatering of sullage water and disposal of garbage solid waste etc out side the tank etc complete (PHSINO.1, P.59)			
1613.00	Cft	@Rs 10900.00	P%0 Cft	Rs 17582.00
18	Earth work excavation in ashes, sand soft soil or silt clearance lead upto 50ft: (GSI #.2, P-1)			
9552.57	Cft	@Rs 1663.75	P%0 Cft	Rs 15893.00
19	Extra lead for every 50' Ft: additional lead or part thereof (CSINO.8, P.2)			
9552.57	Cft	@Rs 503.90	P%0 Cft	Rs 4814.00
			Total:	Rs 498245

COMPOUND WALL SIZE (100' x 75')

1	Excavation in foundation of building bridges and other structures i/c dag belling dressing refilling around the structures with excavated Earth watering ramming up to 5ft (b) in ordinary soil (G.S.I-18/ P/4)	18.00 cft	@Rs 3176.25	P% Cft	Rs 57.00
2	C.C Brick or stone ballast 1:1/2" to 2" guage Ratio 1:4:8 (CSI No.5 P.18)	9.00 Cft	@Rs 9416.28	P% Cft	Rs 847.00
3	Pacca brick work in foundation and plinth in cement sand mortar(1:6) (G.S.I No. 4 P/ 24)	1186.00 cft	@Rs 11948.36	P% Cft	Rs 141708.00
4	Damp proof course with (Cement sand and shingle) concrete 1:2:4 i/c two coats of asphalt mixture (CSINo.27, P.19) 3" thick	395.06 Sft	@Rs 4982.18	P% Cft	Rs <del>19469.00</del> 79683
5	Pacca brick work in other than building i/c strucking of joints upto 20; height in cement sand mortar(1:6)(CSINo.7(i), P.26)	1011.00 cft	@Rs 12346.65	P% Cft	Rs 124825.00
6	Cement plaster (1:6) 1/2" thick up to 20' height (G.S.I-11.b/ P.52)	2578.37 sft	@Rs 2206.60	P% Sft	Rs 56894.00
7	Cement plaster (1:4) 3/8" thick up to 20' height (G.S.I-11(a), P.51)	2578.37 sft	@Rs 2197.52	P% Sft	Rs 56660.00
8	Cement pointing struck joints on walls (CSINo.11, P.51) Ratio 1:3	1348.00 sft	@Rs 1213.58	P% sft	Rs 16359.00
9	Fabrication of heavy steel work with angles tees flate iron round iron sheet iron for making girder tanks etc i/c cutting drilling revilling holding assembling and fixing but excluding erection in position (CSINO.2, P.91)	6.42 Cwt	@Rs 4928.49	P.Cwt	Rs 31641.00
10	Reinforced cement concrete work including all labour and material except the cost of steel reinforcement and its labour for bending and binding which will be paid separately. This rate also includes all kinds of forms moulds lifting shuttering curing rendering and finishing the exposed surface i/c screening and washing of shingle (a) R.C work in roof slab members laid in situ or pprcast laid in position complete in a respect. (i) Ratio 1:2:4 90 lbs cement 2 cft sand 4 cft shingle 1/8" to 1/4" gauge. (G.S.I-6 P/16)	51.50 cft	@Rs 337.00	P-Cft	Rs 17356.00

- 11 Fabrication of mild steel reinforcement for cement concrete i/c cutting bending laying in position making joints and fastening i/c cost of binding wire also includes removal of rust from bars. (G.S.I-7 (ii) (a) P/19)

2.06 cwt @Rs 5001.70 P-Cwt Rs 10304.00

- 12 Preparing surface painting with weather coat (CSINo.38, P.56)

2578.37 Sft @Rs 1948.10 P% Sft Rs 50229.00

- 13 Painting new surface preparing surface & painting of guard bars gates of iron bars grating railing i/c standard braces etc (T.Similr open work) (CSINo.4(d) P.76 2 coats

120.00 Sft @Rs 1489.68 P% Sft Rs 1788.00

Total

Rs 528137

528,357

(C) A.C RISING MAIN 6" DIA

- 1 Excavation for pipe line in trenches i/c pits in soft soil or mud plaster i/c: trimming and dressing sides to true alignment and shape leveling of beds of trenches to correct level and grade cutting, joints holes & disposal of surplus earth within one chain or as directed by Engineer Incharge i/c providing fence guards light flanges and temporary crossing for non vehicular traffic where ever required lift upto 5' and lead upto one chain. (PHSI No:1, P-60)

36000.0 Cft @Rs 3600.00 P% Cft Rs 129600.00

- 2 Providing Laying Jointing & Testing Fiber pressure pipe & comet joints of class "B" and fixing in trenches i/c cutting fitting and jointing with rubber rings i/c testing with water to a had of 122 meters of 400 feet (PHSI No 1, P.19)

6" dia  
6000.0 Rft @Rs 263.00 P.Rft Rs 1578000.0

- 3 Supplying C.I Bend 90 A.C Pipes (MSI #.2, P-12)

6" dia  
2.0 No @Rs 2212.00 Each Rs 4424.0

- 4 Supplying C.I Bend 45 A.C Pipes (MSI #.2, P-21)

6" dia  
1.0 No @Rs 1787.50 Each Rs 1788.0

- 5 Supplying C.I Jibault Joints (MSI #.14, P-16)

6" dia  
2.0 No @Rs 1062.50 Each Rs 2124.0

- 6 Supplying A.C Collars 'B' class for A.C pipes (PHSI No.4, P-5)

6" dia  
3.0 No @Rs 194.00 Each Rs 582.0

supplying one pair or rubber rings for A.C pressure pipes 'B' class (PHSI No.7, P-5)

<u>6" dia</u>				
6.0	Pair	@Rs 129.00	Each	Rs 774.0

- 8 Making jointing C.I specials fitting i/c laying and required diameter and testing, the joints along with A.C pressure pipe line to specified pressure and testing the all leaky joints etc complete (PHSI No.1, P.49)

<u>6" dia</u>				
5.0	Joint	@Rs 72.00	Each	Rs 360.0

- 9 Refilling the excavated stuff in trenches 6" thick layer i/c waterring raming to full compaction etc complete (PHSI-24 P.77)

32400.0	Cft	@Rs 2750.00	P.%0 Cft	Rs 89424.0
			<b>Total</b>	<b>Rs 1807076</b>

**(D) REPAIR OF TRANSFORMER (N.S.I)**

- 1 Supplying & installing coil for 25 KVA transformer (LQR)

<u>LT</u>	3.0	coil	@Rs 8000.00	P. coil	Rs 24000.0
-----------	-----	------	-------------	---------	------------

<u>HT</u>	3.0	coil	@Rs 15000.00	P. coil	Rs 45000.0
-----------	-----	------	--------------	---------	------------

- 2 Transformer Oil. (LQR)

30.0	Liters	@Rs 150.00	P. Liter	Rs 4500.0
------	--------	------------	----------	-----------

- 3 Labour charges. (LQR)

1.0	Job	@Rs 5000.00	P. Job	Rs 5000.0
-----	-----	-------------	--------	-----------

			<b>Total</b>	<b>Rs 78500</b>
--	--	--	--------------	-----------------

**(E) PUMPING MACHINERY 7.5 BHP**

- 1 Supplying & installing in position i/c transportation to site of work Village Bhai Khan Ghanghro Electric pumping set consisting of A.C Electric motor 7.5 BHP 3 phase 50 cycles 400/420 volts 1450 RPM Siemens made (Type ILG4 - 183) size 2"x2 1/2" mounted on common steel frame or base plate capable of discharge 80 GPM against a head of 40 i/c installing of Pumping set on C.C foundation ration 1:2:4 & C.C (1:4:8) with ballest with MS nuts & bolts of 3/8" dia to be embedded in c.c foundation, i/c providing motor control unit MCU consists of circuit breaker magnetic contractor, over load protection under / over voltage protection automatic star-delta change over switch control an power cables, indicating lights and all these coponents are fixed in a metalic dust and smoke proof box (NICE Co ) i/c i/c 72 hours testing charges. (N.S.I)

1.0	Set	@Rs 704000.0	P.Set	Rs 704000.0
-----	-----	--------------	-------	-------------

- 2 Supplying and fixing C.I Reflex Valve heavy pattern test pressure 21.0 KG sq.cm 300 lbs wq inch (PHSINO.8, P.6)

<u>3" dia</u>				
4.0	Nos	@Rs 1543.75	Each	Rs 6175.0

	supplying and fixing C.I Sluice Valve heavy pattern test pressure 21.0 KG sq.cm 300 lbs wq inch (PHSINo.1, P.35)				
	<u>3" dia</u>				
	2.0	Nos	@Rs 4290.00	Each	Rs 8580.0
4	Providing and fixing M.S Pipe 4" dia made out of M.S sheet 3/16" thick M.S sheet i/c cutting folding to crvature and shape i/c welding etc complete (Based on schedule)				
	<u>3" dia</u>				
	16.0	Rft	@Rs 385.89	P.Rft	Rs 6174.0
5	Manufacturing and installing with M.S flanges 4" dia made out of MS sheet 3/16" thick i/c cutting drilling holes etc complete (Based on schedule)				
	<u>3" dia</u>				
	16.0	Nos	@Rs 500.89	Each	Rs 8014.0
6	Supplying C.I bend with flanged ends with holes i/c turning and facing of flanges for all size (SMI No.8, P.11) Bend 90				
	<u>3" dia</u>				
	1.11	Cwt	@Rs 6096.00	Each	Rs 6767.0
7	Supplying of Earthing Set. (N.S.I)				
	1.0	No	@Rs 25000.00	Each	Rs 25000.0
8	C.I Tapper flat bottomed or central tapered 4" dia. (MSI #.9, P-12)				
	0.53	Cwt	@Rs 6096.00	Each	Rs 3231.0
9	Providing laying & fixing in trench i/c fitting jointing and testing etc: complete in all respect the high density polythelene PE pipes (HDPE-100) for W/S confirming ISO 4427/DIN8074/8075 B.S 3580 & PSI 3051. (PHSINo.1, P.25) PN 10 (110 mm)				
	<u>3" dia</u>				
	36.0	Rft	@Rs 178.00	P.Rft	Rs 6408.0
10	Jointing C.I . MS flanged and specials pipes and inside a trenches i/c supplying of the rubber packing of the required thickness nuts bolts and washers etc and other tools required for jointing and testing the joints in the specifics pressure etc complete (CSI No.1 P.35)				
	<u>3" dia</u>				
	18.0	Joints	@Rs 499.00	P.Joint	Rs 8982.0
11	Tee with flanged ends with holes i/c turning and facing of flanged all size (SMI No.10, P.11)				
	<u>3" dia</u>				
	0.22	Cwt	@Rs 6096.00	Each	Rs 1341.0
12	Butt fusion joint 3" dia. (PHSI #.H, P-20)				
	18.0	Nos	@Rs 600.00	Each	Rs 10800.0

Total

Rs = 80,762.22/-

f) **DIESEL ENGINE 16 BHP**

Providing & installing in position i/c transportation to site of work at Drainage Scheme Bhai Khan Ghanghro Diesel Engine Pumping Set 16 BHP with 1500 RPM coupled with non-clogging pump type GSWG-103 size 2"x2 1/2" mounted on common steel frame or base plate capable of discharge 80 gallons per minute against a head of 49 ft i/c making cement concrete foundation ratio (1:2:4) and C.C (1:4:8) with ballast with MS nuts bolts of 1/2" dia to be embedded in cement concrete foundation i/c testing of pumping set against the required head of 72 hours etc complete. (N.S.I)

1.00 Set @Rs. 570000.00 P.each Rs. 570000  
Total: Rs 570000.0

**GENERAL ABSTRACT**

S.#	Sub- Works	Schedule Amount	N/S Amount	G.Total:
A	Repair of Civil Structure	498245 ✓	0	498245 ✓
B	Compound Wall (size 100' x 75')	528351 ✓ <del>528137</del>	0	528351 ✓ <del>528137</del>
C	A.C Pipe Rising Main 6" dia	1807076 ✓	0	1807076 ✓
D	Repair of Transformer	0	78500 ✓✓	78500 ✓✓
E	Pumping Machinery	66472 ✓✓	741150 ✓✓	807622 ✓✓
F	Diesel Engine 16 BHP	0	570000 ✓✓	570000 ✓✓
	G.Total :-	<del>2899930</del>	1389650 ✓	4289580 ✓

Amount Total (a) ✓  
34% Above / below on the rates CSR

Amount to be added /deducted on the basis of premium quoted. TOTAL(b)

Total (A) = a+b in words & figure:

  
CONTRACTOR

  
Executive Engineer  
Public Health Engg:Division-I  
Larkano

**SINDH PUBLIC PROCUREMENT REGULATORY AUTHORITY  
CONTRACT EVALUATION FORM**

- 1) NAME OF THE ORGANIZATION / DEPTT. **Public Health Engineering Department**
- 2) PROVINCIAL / LOCAL GOVT/ OTHER **Provincial**
- 3) TITLE OF CONTRACT: **CONSTRUCTION OF DISPOSAL WORK, RCC COLLECTING TANK (15' DIA) SCREENING CHAMBER, PUMP HOUSE AND COMPOUND WALL FOR NANDHA MOHIL AND AHMED SHAH MOHALLA / DAHASER COLONY UNDER IMPROVEMENT & EXTENSION OF DRAINAGE SCHEME NAUDERO.**
- 4) TENDER NUMBER: **(05) No**
- 5) BRIEF DESCRIPTION OF CONTRACT: **Improvement & Extension of urban Drainage Scheme Naudero**
- 6) FORUM THAT APPROVED THE SCHEME **P&D Department Govt: of Sindh**
- 7) TENDER ESTIMATED VALUE: **4.585 Millions**
- 8) ENGINEER'S ESTIMATE: **4.100 Millions**  
(For civil works only)
- 9) ESTIMATED COMPLETION PERIOD (AS PER CONTRACT) **06 Months**
- 10) TENDER OPENED ON (DATE & TIME) **15/09/2017 at 1.00 PM**
- 11) NUMBER OF TENDER DOCUMENTS SOLD: **08 Nos**  
(Attach list of buyers)
- 12) NUMBER OF BIDS RECEIVED **08 Nos**
- 13) NUMBER OF BIDDERS PRESENT AT THE TIME OF OPENING OF BIDS: **08 Nos**
- 14) BID EVALUATION REPORT **Hoisted on SPPRA website at EV ID # 2746/2017 dated 14/11/2017**
- 15) NAME AND ADDRESS OF THE SUCCESSFUL BIDDER **M/s. Sahil Builders**
- 16) CONTRACT AWARD PRICE **4.585 Millions**
- 17) RANKING OF SUCCESSFUL BIDDER IN EVALUATION REPORT  
(i.e. 1<sup>st</sup>, 2<sup>nd</sup>, 3<sup>rd</sup> EVALUATION BID). **1<sup>st</sup> Lowest**
- 18) METHOD OF PROCUREMENT USED : - (Tick one)
- a) SINGLE STAGE – ONE ENVELOPE PROCEDURE: **Yes**
- b) SINGLE STAGE – TWO ENVELOPE PROCEDURE:
- c) TWO STAGE BIDDING PROCEDURE
- d) TWO STAGE – TWO ENVELOPE BIDDING PROCEDURE
- PLEASE SPECIFY IF ANY OTHER METHOD OF PROCUREMENT WAS ADOPTED i.e. EMERGENCY, DIRECT CONTRACTING / NEGOTIATION ETC. WITH BRIEF REASONS:
- 19) APPROVING AUTHORITY FOR AWARD OF CONTRACT: **Chief Engineer PHED Govt: of Sindh Sukkur**
- 20) WHETHER THE PROCUREMENT WAS INCLUDED IN ANNUAL PROCUREMENT PLAN? **Yes**
- 21) ADVERTISEMENT : **Yes**
- i) SPPRA Website **No. 34269 dated: 25/08/2017**  
( If yes, give date and SPPRA Identification No.)
- ii) News Papers **Yes**  
( If yes, give names of newspapers and dates)
- Daily Imroz, dated: 26/08/2017**  
**Daily Awami Soch, dated: 30/08/2017**  
**Daily The Mail, dated: 26/08/2017**



- |  |                      |
|--|----------------------|
| 22) NATURE OF CONTRACT   | Local                |
| 23) WHETHER QUALIFICATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?<br>(If yes, enclose a copy)   | Yes ( Copy Enclosed) |
| 24) WHETHER BID EVALUATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?<br>( If yes, enclose a copy)   | Yes<br>N/A           |
| 25) WHETHER APPROVAL OF COMPETENT AUTHORITY WAS OBTAINED FOR USING A METHOD OTHER THAN OPEN COMPETITIVE BIDDING?   | Yes                  |
| 26) WAS BID SECURITY OBTAINED FROM ALL THE BIDDERS?  | Yes                  |
| 27) WHETHER THE SUCCESSFUL BID WAS LOWEST EVALUATED BID / BEST EVALUATED BID (in case of Consultancies)  | Lowest Evaluated Bid |
| 28) WHETHER THE SUCCESSFUL BIDDER WAS TECHNICALLY COMPLIANT ?  | Yes                  |
| 29) WHETHER NAMES OF THE BIDDERS AND THEIR QUOTED PRICES WERE READ OUT AT THE TIME OF OPENING OF BIDS?   | Yes                  |
| 30) WHETHER EVALUATION REPORT GIVEN TO BIDDERS BEFORE THE AWARD OF CONTRACT?<br>( Attach copy of the bid evaluation report)  | Yes                  |
| 31) ANY COMPLAINTS RECEIVED  | No                   |
| 32) ANY DEVIATION FROM SPECIFICATIONS GIVEN IN THE TENDER NOTICE / DOCUMENTS<br>( If yes, give details)  | No                   |
| 33) WAS THE EXTENSION MADE IN RESPONSE TIME?<br>( If yes, give reasons)  | No                   |
| 34) DEVIATION FROM QUALIFICATION CRITERIA<br>( If yes, give detailed reasons.)   | No                   |
| 35) WAS IT ASSURED BY THE PROCURING AGENCY THAT THE SELECTED FIRM IS NOT BLACK LISTED  | Yes                  |
| 36) WAS A VISIT MADE BY ANY OFFICER/OFFICIAL OF THE PROCURING AGENCY TO THE SUPPLIER'S PREMISES IN CONNECTION WITH THE PROCUREMENT? IF SO, DETAILS TO BE ASCERTAINED REGARDING FINANCING OF VISIT, IF ABROAD:<br>( If yes, enclose a copy) | No                   |
| 37) WERE PROPER SAFEGUARDS PROVIDED ON MOBILIZATION ADVANCE PAYMENT IN THE CONTRACT (BANK GUARANTEE ETC.)?   | N/A                  |
| 38) SPECIAL CONDITIONS, IF ANY<br>( If yes, give Brief Description)  | N/A                  |

Signature & Official Stamp of

Authorized Officer

Executive Engineer  
Public Health Engg: Division  
Larkana



EXECUTIVE ENGINEER  
PUBLIC HEALTH ENGG: DIVISION I  
LARKANO

# 074-9410326  
# 074-9410326  
phedxen@gmail.com

No. AB/TC/:  
Larkano dated:

2409 /of/2017  
20 /Nov/2017

**LETTER OF ACCEPTANCE**

To,

*M/s. Sahil Builders,  
Government Contractor,  
Larkano.*

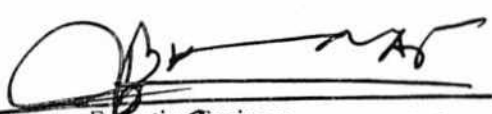
Subject: **CONSTRUCTION OF DISPOSAL WORK, RCC COLLECTING TANK (15' DIA ) SCREENING CHAMBER, PUMP HOUSE AND COMPOUND WALL FOR NANDHA MOHIL AND AHMED SHAH MOHALLA / DAHASER COLONY UNDER IMPROVEMENT & EXTENSION OF DRAINAGE SCHEME NAUDERO.**

This is to notify that your Bid dated: 15/09/2017 for execution of the subject work @ 22% above on the schedule rates has been accepted by the Executive Engineer Public Health Engineering Division I Larkano Amounting to Rs: 45,53,453/- (Forty Five Lacs Fifty Three Thousand Four Hundred & Fifty Three Only).

The 5% Earnest Money of the subject work has already been received in the shape of Call Deposit / Pay Order amounting to Rs: 2,05,000/- Hence you are requested to furnish the cost of Stamps amounting Rs: 16,000/- to be fixed on the agreement to be executed / will have to be borne by you within 03 days of the receipt of this acceptance letter in accordance to the conditions of contract and sign the agreement attached herewith within stipulated time mentioned above, failing which the acceptance will be treated as cancelled and the amount of bid security will be forfeited without any further notice.

Copy forwarded with compliments to:

- The Chief Engineer, Public Health Engineering Department Government of Sindh Sukkur for kind information and necessary action.
- The Superintending Engineer, Public Health Engg: Circle Larkano for information.

  
Executive Engineer  
Public Health Engg: Division I  
Larkano

Const. of Disposal work Rec collecting Tank (DIA)  
 Screening chamber Pump house And compound wall for  
 Nandha Mahal and Ahmed Shah Muhalla Dahaser Colony  
 6000/2

S.G.P. (Klp.) D. No. 105-11-91-50,000 L.F. of S.L. each.  
 G.P. P.W.D. No. 7018 of 6-4-35  
 86-1 of 9-6-36, 1950-W of 27-9-37, G.C.M.P.  
 and M. Deutt. No. 383-1/37 of 7-11-37  
 (P.W.D.) No. 5-173, 2-W of 22-2-39,  
 (J. R. (P.W.D.) No. 1038-1 of 22-2-39  
 12-10-44 and 2-5-44 G.S. IV of 22-2-39  
 12-10-44, and 2-5-44, 3-W 1038/11-1 of  
 25-3-49, 1-4-47-W 2 of 12-12-50.

P.W.D. 257

FORM B-1

PUBLIC WORKS DEPARTMENT

PHE CIRCLE Lucknow

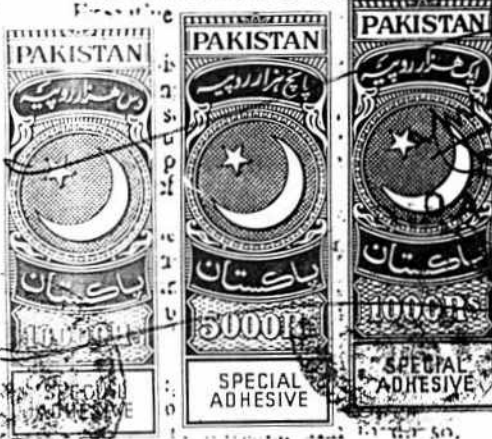
PHE DIVISION Lucknow

M/s Sahil Builders

Percentage Rate Tender and Contract  
 for works

General Rules and Directions for the Guidance of Contractors

1. All work proposed to be executed by contract shall be notified in a form of invitation to tender, a board hung up in the office of the Executive Engineer.



as well as the date for the time allowed for carrying out the work to be deposited with the tender, and deposited by the successful tenderers and from the ground, rests will be provided for drawings and estimated quantities required in connection with the work. The Engineer for the purpose of identification by contractors at the office of the Executive Engineer.

Sahil Builders

3. Receipts for payments made on account of any work, when executed by a firm, shall also be signed by all the partners, except where the contractors are described in their tender as a firm, in which case the receipt shall be signed in the name of the firm by one of the partners, or by some other persons having authority to give official receipts for the firm.

4. Any person who submits a tender shall fill up the usual printed form stating at what percentage above or below the rates specified in Schedule 'B' memorandum showing items of work to be carried out; he is willing to undertake the work. Only one rate of such percentage, on all the estimated rates shall be framed. Tenders, which propose any alteration in the works specified in the said form of invitation to tender or in the time allowed for carrying out the work, or which contain any other conditions, will be liable to rejection. No printed form of tender shall include a tender for more than one work, but if contractors wish to tender for two or more works they shall submit a separate tender for each. Tenders shall have the name and number of the work to which they refer written outside the envelope.

5. The Executive Engineer or his duly authorized Assistant shall open tenders in the presence of contractors who have submitted tenders or their representatives who may be present at the time, and he will enter the amounts of the several tenders in a comparative statement in a suitable form. In the identification, sign copies of the specifications and other documents mentioned in Rule 1. In the event of a tender being rejected the Divisional Officer shall authorize the Treasury Officer concerned to refund the amount of the earnest money for deposited to the contractor making the tender, on his giving a receipt for the return of the money.

6. The Officer competent to dispose of the tenders shall have right of rejecting all or any of the tenders.

*(Signature)*  
 Contractor

*(Signature)*  
 Executive Engineer  
 Public Works Department, Division  
 Lucknow



EXECUTIVE ENGINEER  
PUBLIC HEALTH ENGG: DIVISION I  
LARKANO

# 074-9410326

# 074-9410326

phedxen@gmail.com

No. AB/TC/  
Larkano dated:

2416 /of/2017  
22. /Nov/ 2017

## **"WORK ORDER"**

*M/s. Sahil Builders*  
Government Contractor,  
Larkano.

**Subject:** CONSTRUCTION OF DISPOSAL WORK, RCC COLLECTING TANK (15' DIA )  
SCREENING CHAMBER, PUMP HOUSE AND COMPOUND WALL FOR NANDHA  
MOHIL AND AHMED SHAH MOHALLA / DAHASER COLONY UNDER  
IMPROVEMENT & EXTENSION OF DRAINAGE SCHEME NAUDERO.

Reference: - Your B-I Tender opened on dated: 15/09/2017

Your percentage rate Tender for **Rs.37,58,586/=** (Rupees Thirty Seven Lacs, Fifty Eight Thousand, Five Hundred & Eighty Six) only @ **22%** above the schedule items viz: **Rs.45,85,453/=** (Rupees Forty Five Lacs, Eighty Five Thousand, Four Hundred & Fifty Three) only being the lowest rates is hereby approved/ accepted by the Superintending Engineer, PHE Circle Larkana vide Letter No. GC-II/PHED/2573 dated: 03/11/2017

You are, therefore, directed to please start the work within seven (07) days after issue of the 'Work order' according to drawing design & PWD specifications under the supervision of Assistant Engineer, Public Health Engg: S/Division Ratodero & instructions from the undersigned.

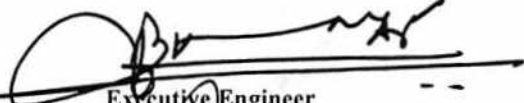
No premium will be allowed on non-schedule items.

No Extra charges such as Taxes, Octroi packing or transportation of material etc will be paid separately.

The work shall have to be completed by you within the period six (06) months as provided in the tender.

The Sindh Sales Tax Special Producer (withholding) Rules, 2011 shall apply to taxable service as or supplied, provided or rendered to persons, specified as withholding agents, in the withholding procedure, for the purpose of deduction and deposit of sales tax.

The undersigned reserves the right to reject any or all parts of it or order for replacement if it is not done as per drawing, design and P.H.E specifications.

  
Executive Engineer  
Public Health Engg: Division I  
Larkano

**C.F.W.Cs for favour of information to:**

1. The Superintending Engineer, Public Health Engg: Circle Larkana
2. The Assistant Engineer, Public Health Engg: S/Division Larkana

## " Bill of Quantity "

Construction of Disposal Work, RCC Collecting Tank (15' dia ) Screening chamber, Pump House and compound Wall for Nandha Mohil and Ahmed Shah mohalla / Dahaser Colony under Improvement & Extension of Drainage scheme Naudero.

(5)

(B) (Under Provincial ADP 2008-09))

S.#	Qty	Description	Rate	Unit	Amount
<b>Part-I</b>					
<b>RCC Collecting Tank 15' dia</b>					
1		Excavatin of well in dry upto 20' below ground level & disposal of soil with in one chain. In ordinary soil (CSINO.1, P.85)			
	1570.0	Cft	@Rs 2247.58	P%0 Cft	Rs 3529.00
2		R.C.C work i/c all labour and material except the cost of steel reinforcement and its labour for bending and binding which will be paid separately. This rate also includes all kinds of forms moulds lifting shuttering curing rendering and finishing the exposed surface i/c screening and washing of shingle (a) R.C work in roof slab members laid in situ or pprcast laid in position complete in a respect. (i) Ratio 1:2:4 90 lbs cement 2 cft sand 4 cft shingle 1/8" to 1/4" gauge. (G.S.I-6 P/16)			
	993.93	Cft	@Rs 337.00	P% cft	Rs 334954.00
3		Fabrication of mild steel reinforcement for cement concrete i/c cutting bending laying in position making joints and fastening i/c cost of binding wire also includes removal of rust from bars. (G.S.I-7 (ii) (a) P/19)			
	41.97	cwt	@Rs 5001.70	P-Cwt	Rs 209921.00
4		Wet sinking of well for depth below spring level by means of drivers i/c all charges of shoring and removing excavated material within one chain (CSINO.3, P.03)			
		<u>5' to 10' depth</u>			
	1202.32	Cft	@Rs 11763.80	P%0 Cft	Rs 14140.00
		<u>10' to 15' depth</u>			
	1202.03	Cft	@Rs 24200.00	P%0 Cft	Rs 29089.00
		<u>15' to 20' depth</u>			
	480.81	Cft	@Rs 37230.77	P%0 Cft	Rs 17901.00
5		Bailing or pumping sub soil watering excavated centering cost of situ or masonry work in foundation etc complete operation of sinking qty: (PHSINO.17, P.75)			
	3355.87	Cft	@Rs 543	P% Cft	Rs 18222.00
6		Providing "Expension Joints" in concrete work of 9" wide corrugated PVC water stoper with bulbs i/c soldering cost of material and labour (PHSINO.2, P 56)			
	100.48	Rft	@Rs 86	P.Rft	Rs 8641.00
7		C.C Brick or stone ballast 1:1/2" to 2" guage Ratio 1:4:8 (CSI No.5 P.17)			
	366.07	Cft	@Rs 9416.28	P% Cft	Rs 34470.00

ment concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without shuttering. (G.S.I-5(a) P-17)

Ratio 1:4:8

176.62 Cft @Rs 11288.75 P% Cft Rs 19939.00

Ratio 1:2:4

176.62 Cft @Rs 14429.25 P% Cft Rs 25485.00

Ratio 1:3:6

176.62 Cft @Rs 12595.00 P% Cft Rs 22245.00

- 10 Excavation for pipe line in trenches i/c pits in soft soil or mud plaster i/c: trimming and dressing sides to true alignment and shape leveling of beds of trenches to correct level and grade cutting, joints holes & disposal of surplus earth within one chain or as directed by Engineer Incharge i/o providing fence guards light flanges and temporary crossing for non vehicular traffic where ever required lift upto 5' and lead upto one chain. (PHSI No:1, P-60)

For Interconnection of Screening Chamber & Collecting Tank

90.0 Cft @Rs 3600.00 P%0 Cft Rs 324.00

- 11 Providing RCC pipe & Collars of class "B" & fixing in trenches i/c cutting, fitting & jointing with maxphalt composition & cement mortar (1:1) i/c testing with water to a head of 75' (PHSINO.2. P.15) 12" dia

8.0 Rft @Rs 412.00 P.Rft Rs 2288.00

- 12 Refilling the excavated stuff in trenches 6" thick layer i/c watterring raming to full compaction etc complete (PHSI-24 P.77)

81.0 Cft @Rs 2760.00 P.%0 Cft Rs 224.0  
Total: Rs 742380.00

PART-II

SCREENING CHAMBER (SIZE 5'X8)

- 1 Excavation in foundation of building bridges and other structures i/c dag belling dressing refilling around the structures with excavated Earth watterring ramming up to 5ft (b) in ordinary soil (G.S.I-18/ P/4)

570.93 cft @Rs 3176.25 P%0 Cft Rs 1813.00

- 2 Extra for wet earth work (GSINO,15, P.3)

177.18 Cft @Rs 1058.75 P%0 Cft Rs 188.00

- 3 C.C Brick or stone ballast 1:1/2" to 2" guage Ratio 1:4:8 (CSI No.5 P.18)

59.06 Cft @Rs 9416.28 P% Cft Rs 5561.00

reinforced cement concrete work including all labour and material except the cost of steel reinforcement and its labour for bending and binding which will be paid separately. This rate also includes all kinds of forms moulds lifting shuttering curing rendering and finishing the exposed surface i/c screening and washing of shingle (a) R.C work in roof slab members laid in situ or precast laid in position complete in a respect. (i) Ratio 1:2:4 90 lbs cement 2 cft sand 4 cft shingle 1/8" to 1/4" gauge. (G.S.I-6 P/16)

219.25	Cft	@Rs 337.00	P% cft	Rs 73887
5	Fabrication of mild steel reinforcement for cement concrete i/c cutting bending laying in position making joints and fastening i/c cost of binding wire also includes removal of rust from bars. (G.S.I-7 (ii) (a) P/19)			
8.80	cwt	@Rs 5001.70	P-Cwt	Rs 44015
6	Providing construction joints in concrete work of 9" (225mm) made corrugated PVC water stop (with bulb) i/c soldering, cost of material and labour (PHSI-1 P.56)			
29.00	Cwt	@Rs 86	P.Rft	Rs 2494
7	Providing & fixing C.I manhole cover & frams i/c cost of material. (PHSI #.1, P-35)			
1.00	Cwt	@Rs 6985.70	P.cwt	Rs 6986
8	Fabrication of heavy steel work with angles tees, flat iron round iron and sheet iron for making trusses girders, tanks etc: i/c cutting tanks etc: i/c cutting drilling riveting handling assembling and fixing but excluding erection in position (CSINo.2 P.91)			
2.06	Cwt	@Rs 4928.49	P.Cwt	Rs 10153
9	Erection and fitting in position of iron trusses staging of water tanks etc: (CSINo.3, P.3)			
2.06	Cwt	@Rs 271.04	P.Cwt	Rs 558.00
10	Pacca brick work in foundation and plinth in cement sand mortar(1:6) (G.S.I.No. 4 P/ 24)			
13.23	cft	@Rs 11948.36	P% Cft	Rs 1581.00
11	Cement plaster (1:4) up to 12' height 1/2" thick (G.S.I-13 P.51)			
49.15	Sft	@Rs 2283.93	P% Sft	Rs 1123.00
			Total:	Rs 148359

**PART-III**

**PUMP HOUSE (16'X12')**

1	Excavation in foundation of building bridges and other structures i/c dag belling dressing refilling around the structures with excavated Earth watering ramming up to 5ft (b) in ordinary soil (G.S.I-18/ P/4)			
198.50	cft	@Rs 3176.25	P%0 Cft	Rs 630.00

Brick or stone ballast 1:1/2" to 2" gauge Ratio 1:4:8 (CSI No.5 P.18)

108.58 Cft	@Rs 9416.28	P% Cft	Rs 10225.00
3 Pacca brick work in foundation and plinth in cement sand mortar(1:6) (G.S.I No. 4 P/ 20)			
355.08 cft	@Rs 11948.36	P% Cft	Rs 42427.00
4 Damp proof course with (Cement sand and shingle) concrete 1:2:4 i/c two coats of asphalt mixture (CSINo.27, P.19) 3" thick			
66.64 Sft	@Rs 4982.18	P% sft	Rs 3320.00
5 Pacca brick work in ground floor i/c striking of joints upto 20 ft height Ratio 1:6 (G.S.I No. 7 P/ 21)			
407.63 cft	@Rs 12674.36	P% Cft	Rs 51665.00
6 Supplying & fixing in position iron /steel grill of 3/4"x14" size flat iron of approved desing i/c painting 3 coats etc completed( weight not to be less than 3.7 lbs /sq: feet on finished grill) (GSI NO.26P- 92)			
24.00 cft	@Rs 180.50	P.sft	Rs 4332.00
7 Fabrication of heavy steel work with angles tees, flat iron round iron and sheet iron for making tresses, girders, tanks etc i/c cutting tanks etc i/c cutting, drilling, riveting, handling, assembling and fixing but excluding, erection in position. (CSI #.2, P-91)			
4.40 Cwt	@Rs 4928.49	P.Cwt	Rs 21709.00
8 R.C.C work i/c all labour and material except the cost of steel reinforcement and its labour for b/b which will be paid separately. This rate also i/c all kinds of forms moulds lifting, shutting, curing, rendering and finishing the exposed surface (i/c s/w of shingle) (a) R.C work in roof slab beams columns rafts lintels and other structural members laid in situ or precast laid in position complete in all respect. (I) Ratio 2:2:4 Lbs cement 2 Cft, sand 4 cft shingle 1/8" to 1/4" gauge. (GSI #.6, P-16)			
146.93 Cft	@Rs 337.00	P% Sft	Rs 49515.00
9 Fabrication of mild steel reinforcement for cement concrete i/c cutting bending laying in position making joints and fastening i/c cost of binding wire also includes removal of rust from bars. (G.S.I-7 (ii) (a) P/19)			
5.90 cwt	@Rs 5001.70	P-Cwt	Rs 29510.00
10 Cement plaster (1:6) 1/2" thick up to 12' height (G.S.I #.11(b), P-51)			
761.92 sft	@Rs 2206.60	P% Sft	Rs 16813.00
11 Cement Plaster 1:4, 3/8" thick upto 20' height (CSI No.10, P-51)			
761.92 sft	@Rs 2197.52	P% sft	Rs 16743.00



ment pointing struck joints on walls (CSINo.11, P.51) Ratio 1:3

	568.00 sft	@Rs 1213.58	P% sft	Rs 6893.00
13	Filling watering and ramming earth in floors with surplus earth from foundation lead upto one chain and lift upto 5ft: (CSINo.21, P.5)			
	636.21 cft	@Rs 1512.50	P.%0 cft	Rs 962.00
14	Providing laying 3" thick topping cement concrete Ratio 1:2:4 i/c surface finishing dividing into panel (CSINo.16, P.41)			
	192.00 Sft	@Rs 4411.82	P% Sft	Rs 8471.00
15	Painting new surfaces, preparing of surfaces and painting of doors and windows of any type i/c edges (GSINo.5, P.68) 3 Coats			
	104.00 Cft	@Rs 2116.41	P% Sft	Rs 1549.00
16	Primary coat of chalk distumbering. (CSI #.23, P-53)			
	761.92 Sft	@Rs 442.75	P% Sft	Rs 3373.00
17	White washing two coats ( CSI No.23P- 59)			
	294.00 Sft	@Rs 425.84	P% Sft	Rs 1252.00
18	Distembering two coats. (CSI #.24, P-53)			
	761.92 Sft	@Rs 1043.90	P% Sft	Rs 7954.00
			Total	Rs 277343.00

#### PART-IV

#### COMPOUND WALL (100'x40')

1	Excavation in foundation of building bridges and other structures i/c dag belling dressing refilling around the structures with excavated Earth watering ramming up to 5ft (b) in ordinary soil (G.S.I-18/ P/4)			
	588.00 cft	@Rs 3176.25	P%0 Cft	Rs 1868.00
2	C.C Brick or stone ballast 1:1/2" to 2" guage Ratio 1:4:8 (CSI No.5 P.18)			
	147.00 Cft	@Rs 9416.28	P% Cft	Rs 13842.00
3	Pacca brick work in foundation and plinth in cement sand mortar(1:6) (G.S.I No. 4 P/ 24)			
	831.68 cft	@Rs 11948.36	P% Cft	Rs 99372.00
4	Damp proof course with (Cement sand and shingle) concrete 1:2:4 i/c two coats of asphalt mixture (CSINo.27, P.19) 2" thick			
	207.92 Sft	@Rs 4982.18	P% Cft	Rs 10359

reinforced cement concrete work including all labour and material except the cost of steel reinforcement and its labour for bending and binding which will be paid separately. This rate also includes all kinds of forms moulds lifting shuttering curing rendering and finishing the exposed surface i/c screening and washing of shingle (a) R.C work in roof slab members laid in situ or precast laid in position complete in a respect. (i) Ratio 1:2:4 90 lbs cement 2 cft sand 4 cft shingle 1/8" to 1/4" gauge. (G.S.I-6 P/16)

	51.50 Cft	@Rs 337.00	P% cft	Rs 17356.00
6	Fabrication of mild steel reinforcement for cement concrete i/c cutting bending laying in position making joints and fastening i/c cost of binding wire also includes removal of rust from bars. (G.S.I-7 (ii) (a) P/19)			
	2.06 Cwt	@Rs 5001.7	P-Cwt	Rs 10304.00
7	Pacca brick work in other than building i/c striking of joints upto 20; height in cement sand mortar(1:6)(CSINo.7(i), P.26)			
	561.00 cft	@Rs 12346.65	P% Cft	Rs 69265.00
8	Cement plaster (1:6) 1/2" thick up to 12' height (G.S.I-11.b/ P.52)			
	1808.25 Cft	@Rs 2206.6	P% Sft	Rs 39901.00
9	Cement plaster (1:4) 3/8" thick up to 12' height (G.S.I-11.a/ P.51)			
	1808.25 sft	@Rs 2197.52	P% Sft	Rs 39737.00
10	Cement pointing struck joints on walls (CSINo.11, P.51) Ratio 1:3			
	748.00 Sft	@Rs 1213.58	P% sft	Rs 9078.00
11	Fabrication of heavy steel work with angles tees flate iron round iron sheet iron for making girder tanks etc i/c cutting drilling revilling holding assembling and fixing but excluding erection in position (CSINO.2, P.91)			
	6.42 Cwt	@Rs 4928.49	P.Cwt	Rs 31641.00
13	Painting new surface preparing surface & painting of guard bars gates of iron bars grating railing i/c standard braces etc (T.Similr open work) (CSINo.4(d) P.76 3 coats			
	120.00 Sft	@Rs 2116.41	P% Sft	Rs 2540.00
14	Preparing surface painting with weather coat (CSINo.38, P.56)			
	1808.25 Sft	@Rs 1948.10	P% Sft	Rs 35227.00
			Total:	Rs 377950

**- V P.E Pipe Rising main**

Excavation for pipe line in trenches i/c pits in soft soil or mud plaster i/c: trimming and dressing sides to true alignment and shape leveling of beds of trenches to correct level and grade cutting, joints holes & disposal of surplus earth within one chain or as directed by Engineer Incharge i/c providing fence guards light flanges and temporary crossing for non vehicular traffic where ever required lift upto 5' and lead upto one chain. (PHSI No:1, P-60) 18" dia

18900.0 Cft @Rs 3600.00 P%0 Cft Rs 68040.00

2 Providing laying & fixing in trench i/c fitting jointing and testing etc: complete in all respect the high density polythylene PE pipes (HDPE-100) for W/S confirming ISO 4427/DIN8074/8075 B.S 3580 & PSI 3051. (PHSINO.1, P.25) PN 08 (160 mm) (210 mm) 6" dia P,E Pipe

2400.0 Rft @Rs 860.00 P.Rft Rs 2064000.0

3 HDPE (PE100) fitting (PH Sch: of Mat: Item No. A, P.18) 6" dia 160mm Elbo band 45 Degree

2.0 Nos @Rs 5500.00 Each Rs 11000.0

6" dia 160 mm Elbo band 90 Degree. (225 mm) (SMINO: B, P.NO: 18)

2.0 Nos @Rs 6874.00 Each Rs 13748.0

4 But fusion joint (PH Sch: of Mat: I-H, P.20) 8" dia (110 mm)

4.0 Nos @Rs 2200.00 Each Rs 8800.0

5 Refilling the excavated stuff in trenches 6" thick layer i/c watterring raming to full compaction etc complete (PHSI-24 P.77)

18900.0 Cft @Rs 2760.00 P.%0 Cft Rs 46948.0

Total: Rs 2212536.0

**GENERAL ABSTRACT**

S.#	Works	Schedule Amount	N/S Amount	G.Total
1	RCC Collecting Tank 15' dia ✓	742380 ✓	0	742380 ✓
2	Screening Chamber (size 5'x8') ✓	148359 ✓	0	148359 ✓
3	Pump House (size 10'x12') ✓	277343 ✓	0	277343 ✓
4	Compound Wall (60'x40') ✓	377950 ✓	0	377950 ✓
5	P.E Pipe Rising main 8" dia ✓	2212536 ✓	0	2212536 ✓
<b>G.Total :-</b>		<b>3758568 ✓</b>	<b>0</b>	<b>3758568 ✓</b>

Amount Total (a)

22% above/below on the rates CSR

Total (A) = a+b in words & figure:

Amount to be added /deducted on the basis of premium quoted. TOTAL(b)

CONTRACTOR


  
 Executive Engineer  
 Public Health Engg: Division-I  
 Larkano

**SINDH PUBLIC PROCUREMENT REGULATORY AUTHORITY**  
**CONTRACT EVALUATION FORM**

- 1) NAME OF THE ORGANIZATION / DEPTT. **Public Health Engineering Department**  
2) PROVINCIAL / LOCAL GOVT./ OTHER **Provincial**
- 3) TITLE OF CONTRACT: **CONSTRUCTION OF DISPOSAL WORK, PROVIDING & INSTALLING PUMPING MACHINERY & PROVIDING LAYING JOINTING & TESTING RISISING MAIN FOR VILLAGE KAMAL KHAN CHANDIO TALUKA RATODERO (10 VILLAGES) OF TALUKA RATODERO.**
- 4) TENDER NUMBER: (06) No
- 5) BRIEF DESCRIPTION OF CONTRACT: **Providing drainage facility to the residence of area**
- 6) FORUM THAT APPROVED THE SCHEME **P&D Department Govt: of Sindh**  
7) TENDER ESTIMATED VALUE: **4.432 Millions**
- 8) ENGINEER'S ESTIMATE: **4.000 Millions**  
(For civil works only)
- 9) ESTIMATED COMPLETION PERIOD (AS PER CONTRACT) **06 Months**
- 10) TENDER OPENED ON (DATE & TIME) **15/09/2017 at 1.00 PM**
- 11) NUMBER OF TENDER DOCUMENTS SOLD: **08 Nos**  
(Attach list of buyers)
- 12) NUMBER OF BIDS RECEIVED **08 Nos**
- 13) NUMBER OF BIDDERS PRESENT AT THE TIME OF OPENING OF BIDS: **08 Nos**
- 14) BID EVALUATION REPORT **Hoisted on SPPRA website at EV ID # 2746/2017 dated 14/11/2017**
- 15) NAME AND ADDRESS OF THE SUCCESSFUL BIDDER **M/s. Ali Raza Khokhar**
- 16) CONTRACT AWARD PRICE **4.432 Millions**
- 17) RANKING OF SUCCESSFUL BIDDER IN EVALUATION REPORT  
(i.e. 1<sup>st</sup>, 2<sup>nd</sup>, 3<sup>rd</sup> EVALUATION BID). **1<sup>st</sup> Lowest**
- 18) METHOD OF PROCUREMENT USED :- (Tick one)
- a) SINGLE STAGE – ONE ENVELOPE PROCEDURE: **Yes**
- b) SINGLE STAGE – TWO ENVELOPE PROCEDURE:
- c) TWO STAGE BIDDING PROCEDURE
- d) TWO STAGE – TWO ENVELOPE BIDDING PROCEDURE
- PLEASE SPECIFY IF ANY OTHER METHOD OF PROCUREMENT WAS ADOPTED i.e. EMERGENCY, DIRECT CONTRACTING / NEGOTIATION ETC. WITH BRIEF REASONS:
- 19) APPROVING AUTHORITY FOR AWARD OF CONTRACT: **Chief Engineer PHED Govt: of Sindh Sukkur**
- 20) WHETHER THE PROCUREMENT WAS INCLUDED IN ANNUAL PROCUREMENT PLAN? **Yes**
- 21) ADVERTISEMENT : **Yes**
- i) SPPRA Website **No. 34269 dated: 25/08/2017**  
( If yes, give date and SPPRA Identification No.)
- ii) News Papers **Yes**  
( If yes, give names of newspapers and dates)
- Daily Imroz, dated: 26/08/2017**  
**Daily Awami Soch, dated: 30/08/2017**  
**Daily The Mail, dated: 26/08/2017**
- 22) NATURE OF CONTRACT **Local**

23) WHETHER QUALIFICATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS? (If yes, enclose a copy)	Yes ( Copy Enclosed)
24) WHETHER BID EVALUATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS? ( If yes, enclose a copy)	Yes N/A
25) WHETHER APPROVAL OF COMPETENT AUTHORITY WAS OBTAINED FOR USING A METHOD OTHER THAN OPEN COMPETITIVE BIDDING?	Yes
26) WAS BID SECURITY OBTAINED FROM ALL THE BIDDERS?	Yes
27) WHETHER THE SUCCESSFUL BID WAS LOWEST EVALUATED BID / BEST EVALUATED BID (in case of Consultancies)	Lowest Evaluated Bid
28) WHETHER THE SUCCESSFUL BIDDER WAS TECHNICALLY COMPLIANT ?	Yes
29) WHETHER NAMES OF THE BIDDERS AND THEIR QUOTED PRICES WERE READ OUT AT THE TIME OF OPENING OF BIDS?	Yes
30) WHETHER EVALUATION REPORT GIVEN TO BIDDERS BEFORE THE AWARD OF CONTRACT? ( Attach copy of the bid evaluation report)	Yes
31) ANY COMPLAINTS RECEIVED	No
32) ANY DEVIATION FROM SPECIFICATIONS GIVEN IN THE TENDER NOTICE / DOCUMENTS ( If yes, give details)	No
33) WAS THE EXTENSION MADE IN RESPONSE TIME? ( If yes, give reasons)	No
34) DEVIATION FROM QUALIFICATION CRITERIA ( If yes, give detailed reasons.)	No
35) WAS IT ASSURED BY THE PROCURING AGENCY THAT THE SELECTED FIRM IS NOT BLACK LISTED	Yes
36) WAS A VISIT MADE BY ANY OFFICER/OFFICIAL OF THE PROCURING AGENCY TO THE SUPPLIER'S PREMISES IN CONNECTION WITH THE PROCUREMENT? IF SO, DETAILS TO BE ASCERTAINED REGARDING FINANCING OF VISIT, IF ABROAD: ( If yes, enclose a copy)	No
37) WERE PROPER SAFEGUARDS PROVIDED ON MOBILIZATION ADVANCE PAYMENT IN THE CONTRACT (BANK GUARANTEE ETC.)?	N/A
38) SPECIAL CONDITIONS, IF ANY ( If yes, give Brief Description)	N/A

Signature & Official Stamp of  
Authorized Officer

  
Executive Engineer  
Public Health Engg: Division  
Larkana



EXECUTIVE ENGINEER  
PUBLIC HEALTH ENGG: DIVISION I  
LARKANO

# 074-9410326  
# 074-9410326  
phedxen@gmail.com

No. AB/TC/  
Larkano dated:

2404 /of/2017  
20 /Nov/2017

**LETTER OF ACCEPTANCE**

To.

*M/s. Ali Raza Khokhar,  
Government Contractor,  
Larkano.*

Subject:

**CONSTRUCTION OF DISPOSAL WORK, PROVIDING & INSTALLING PUMPING MACHINERY & PROVIDING LAYING JOINTING & TESTING RISING MAIN FOR VILLAGE KAMAL KHAN CHANDIO TALUKA RATODERO (10 VILLAGES) OF TALUKA RATODERO.**

This is to notify that your Bid dated: 15/09/2017 for execution of the subject work @ 35% above on the schedule rates has been accepted by the Executive Engineer Public Health Engineering Division I Larkano Amounting to Rs: 44,32,065/- (Forty Four Lacs Thirty Two Thousand & Sixty Five Only).

The 5% Earnest Money of the subject work has already been received in the shape of Call Deposit / Pay Order amounting to Rs: 2,00,000/- Hence you are requested to furnish the cost of Stamps amounting Rs: 15,500/- to be fixed on the agreement to be executed / will have to be borne by you within 03 days of the receipt of this acceptance letter in accordance to the conditions of contract and sign the agreement attached herewith within stipulated time mentioned above, failing which the acceptance will be treated as cancelled and the amount of bid security will be forfeited without any further notice.

Copy forwarded with compliments to:

  
Executive Engineer  
Public Health Engg: Division I  
Larkano

- The Chief Engineer, Public Health Engineering Department Government of Sindh Sukkur for kind information and necessary action.
- The Superintending Engineer, Public Health Engg: Circle Larkano for information.

Const: of Disposal work providing & installing Pumping Machine  
 providing Laying Jointing Testing Raising Main for Villages  
 Kamal Khan Chandio Taluka Roddeo (10 Villages) 15500/-

S.G. (K.P.) No. 105-11-9-1-50,000 L.F. of 8 ls. each.

P.W.D. 197

G.R. P.W.D. Nos. 793\* of 6-4-35  
 86-1 of 8-6-36, 1950-W of 27-9-37, O.C.M.P.  
 and M. Deutt. No. 383-J/37 of 9-11-37  
 (P.W.D.) No. 5-173, 2-W of 22-2-39,  
 O. R. (P.W.D.) No. 1038-1 of 22-2-39  
 12-10-44 and 2-5-44 644-W of 22-2-39  
 12-10-44, and 2-5-44, 45-W 1038/11-1 of  
 28-3-49, 1-47-W 2 of 12-12-50.

FORM B-1

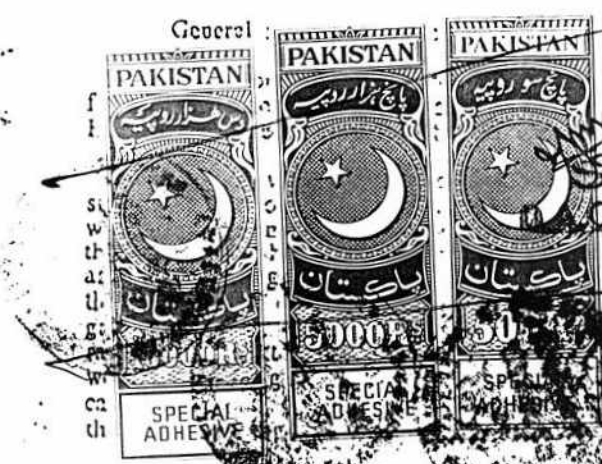
PUBLIC WORKS DEPARTMENT

PHE CIRCLE Larkana  
 PHE DIVISION Larkana

Ali Raza Khokhar

1139  
 8/11/17

Percentage Rate Tender and Contract  
 for works



General Instructions of Contractors  
 The contract shall be notified in a  
 notice up in the office of the  
 Engineer.  
 The date for  
 LARKANA  
 carrying out the  
 deposited with the tender, and  
 by the successful tenderers  
 bills. It will also state whe-  
 times and ground rests will be  
 and drawings and estimated  
 required in connection with the  
 for the purpose of identifi-  
 contractors at the office of

2. In the event of the tender being submitted by a firm, it must be signed separately by each partner thereof or in the event of the absence of any partner, it shall be signed on his behalf by a person holding a power-of-attorney authorizing him to do so.

3. Receipts for payments made on account of any work, when executed by a firm, shall also be signed by all the partners, except where the contractors are described in their tender as a firm, in which case the receipt shall be signed in the name of the firm by one of the partners, or by some other persons having authority to give official receipts for the firm.

4. Any person who submits a tender shall fill up the usual printed form stating at what percentage above or below the rates specified in Schedule 'B' memorandum showing items of work to be carried out; he is willing to undertake the work. Only one rate of such percentage, on all the <sup>Estimated rates</sup> ~~Schedule rates~~ shall be framed. Tenders, which propose any alteration in the works specified in the said form of invitation to tender or in the time allowed for carrying out the work, or which contain any other conditions, will be liable to rejection. No printed form of tender shall include a tender for more than one work, but if contractors wish to tender for two or more works they shall submit a separate tender for each. Tenders shall have the name and number of the work to which they refer written outside the envelope.

5. The Executive Engineer or his duly authorized Assistant shall open tenders in the presence of contractors who have submitted tenders or their representatives who may be present at the time, and he will enter the amounts of the several tenders in a comparative statement in a suitable form. In the identification, sign copies of the specifications and other documents mentioned in Rule 1. In the event of a tender being rejected, the Divisional Officer shall authorize the Treasury Officer concerned to refund the amount of the earnest money for deposited to the contractor making the tender, on his giving a receipt for the return of the money.

6. The Officer competent to dispose of the tenders shall have the right of rejecting all or any of the tenders.

*[Handwritten signature]*

*[Handwritten signature]*  
 Executive Engineer  
 Public Works Department  
 Larkana



EXECUTIVE ENGINEER  
PUBLIC HEALTH ENGG: DIVISION I  
LARKANO

# 074-9410326

# 074-9410326

phedxen@gmail.com

No. AB/TC/:  
Larkano dated:

2417 /of/2017  
22. /Nov/ 2017

**"WORK ORDER"**

*M/s. Ali Raza Khokhar*  
Government Contractor,  
Larkano.

**Subject:** Construction of Disposal Work, Providing & Installing Pumping Machinery & Providing Laying Jointing & Testing Raising main for Village Kamal Khan Chandio Taluka Ratodero (10 Villages) of Taluka Ratodero.

Reference: - Your B-I Tender opened on dated: 15/09/2017

Your percentage rate Tender for **Rs.23,23,497/=** (Rupees Twenty Three Lacs, Twenty Three Thousand, Four Hundred & Ninety Seven) only @ **35% above** the schedule items viz: **Rs.44,32,065/=** (Rupees Forty Four Lacs, Thirty Two & Sixty Five) only being the lowest rates is hereby approved/ accepted by the Superintending Engineer, PHE Circle Larkana vide Letter No. GC-II/PHED/2497 dated: 30/10/2017

You are, therefore, directed to please start the work within seven (07) days after issue of the 'Work order' according to drawing design & PWD specifications under the supervision of Assistant Engineer, Public Health Engg: S/Division Ratodero & instructions from the undersigned.


No premium will be allowed on non-schedule items.

No Extra charges such as Taxes, Octroi packing or transportation of material etc will be paid separately.

The work shall have to be completed by you within the period six (06) months as provided in the tender.

The Sindh Sales Tax Special Producer (withholding) Rules, 2011 shall apply to taxable service as or supplied, provided or rendered to persons, specified as withholding agents, in the withholding procedure, for the purpose of deduction and deposit of sales tax.

The undersigned reserves the right to reject any or all parts of it or order for replacement if it is not done as per drawing, design and P.H.E specifications.

  
Executive Engineer  
Public Health Engg: Division I  
Larkano

**C.F.W.Cs for favour of information to:**

1. The Superintending Engineer, Public Health Engg: Circle Larkana
2. The Assistant Engineer, Public Health Engg: S/Division Larkana



## " Bill of Quantity "

Construction of Disposal Work, Providing & Installing Pumping Machinery  
& Providing Laying Jointing & Testing Raising main for Village Kamal  
Khan Chandio Taluka Ratodero (10 Villages) of Taluka Ratodero ADP

(B) (Under Provincial ADP 2012-13)

S.#	Qty	Description	Rate	Unit	Amount
-----	-----	-------------	------	------	--------

### RCC Collecting Tank 10' dia

1		Excavation of well in dry upto 20' below ground level & disposal of soil with in one chain. In ordinary soil (CSINO.1, P.85)			
	883.1200	Cft	@Rs 2247.00	P%0 Cft	Rs 1948.00
2		Reinforced cement concrete work including all labour and material except the cost of steel reinforcement and its labour for bending and binding which will be paid separately. This rate also includes all kinds of forms moulds lifting shuttering curing rendering and finishing the exposed surface i/c screening and washing of shingle (a) R.C work in roof slab members laid in situ or precast laid in position complete in a respect. (i) Ratio 1;2;4 90 lbs cement 2 cft sand 4 cft shingle 1/8" to 1/4" gauge. (G.S.I-6 P/16)			
	631.77	Cft	@Rs 337.00	P% cft	Rs 212906.00
3		Fabrication of mild steel reinforcement for cement concrete i/c cutting bending laying in position making joints and fastening i/c cost of binding wire also includes removal of rust from bars. (G.S.I-7 (ii) (a) P/19)			
	26.79	cwt	@Rs 5001.70	P-Cwt	Rs 133996.00
4		Wet sinking of well for depth below spring level by means of drivers i/c all charges of shoring and removing excavated material within one chain (CSINO.3, P.03)			
		<u>5' to 10' depth</u>			
	613.28	Cft	@Rs 11763.80	P%0 Cft	Rs 7215.00
		<u>10' to 15' depth</u>			
	613.28	Cft	@Rs 24200	P%0 Cft	Rs 14841.00
5		Bailing or pumping sub soil watering excavated centering cost of situ or masonry work in foundation etc complete operation of sinking qty: (PHSINO.17, P.75)			
	1177.50	Cft	@Rs 539	P% Cft	Rs 6347.00
6		Providing "Expansion Joints" in concrete work of 9" wide corrugated PVC water stopper with bulbs i/c soldering cost of material and labour. (PHSINO.2, P 56)			
	69.08	Rft	@Rs 86	P.Rft	Rs 5940.00
7		C.C Brick or stone ballast 1:1/2" to 2" gauge Ratio 1:4:8 (CSI No.5 P.17)			
	166.18	Cft	@Rs 9416.28	P% Cft	Rs 15648.00

Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without shuttering. (G.S.I-5(a) P-17)

Ratio 1:4:8

78.50	Cft	@Rs 11288.75	P% Cft	Rs 8862.00
-------	-----	--------------	--------	------------

Ratio 1:3:6

78.50	Cft	@Rs 12595.00	P% Cft	Rs 9887.00
-------	-----	--------------	--------	------------

Ratio 1:2:4

78.50	Cft	@Rs 14429.25	P% Cft	Rs 11327.00
-------	-----	--------------	--------	-------------

- 10 Excavation for pipe line in trenches i/c pits in soft soil or mud plaster i/c: trimming and dressing sides to true alignment and shape leveling of beds of trenches to correct level and grade cutting, joints holes & disposal of surplus earth within one chain or as directed by Engineer Incharge i/c providing fence guards light flanges and temporary crossing for non vehicular traffic where ever required lift upto 5' and lead upto one chain. (PHSI No:1, P-60)

90.0	Cft	@Rs 3600.00	P%0 Cft	Rs 324.00
------	-----	-------------	---------	-----------

- 11 Providing RCC pipe & Collars of class "B" & fixing in trenches i/c cutting, fitting & jointing with maxphalt composition & cement mortar (1:1) i/c testing with water to a head of 75' (PHSINO.2. P.15) 12" dia

8.0	Rft	@Rs 286.00	P.Rft	Rs 2288.00
-----	-----	------------	-------	------------

- 12 Refilling the excavated stuff in trenches 6" thick layer i/c waterring raming to full compaction etc complete (PHSI-24 P.77)

81.0	Cft	@Rs 2760.00	P.%0 Cft	Rs 224.0
			<b>Total:</b>	<b>Rs 431753.00</b>

### SCREENING CHAMBER (size 5' x 8')

- 1 Excavation in foundation of building bridges and other structures i/c dag belling dressing refilling around the structures with excavated Earth watering ramming up to 5ft (b) in ordinary soil (G.S.I-18/ P/4)

492.18	cft	@Rs 3176.25	P%0 Cft	Rs 1563.00
--------	-----	-------------	---------	------------

- 2 Extra for wet earth work (GSINO,15, P.3)

255.93	Cft	@Rs 1058.75	P%0 Cft	Rs 271.00
--------	-----	-------------	---------	-----------

- 3 C.C Brick or stone ballast 1:1/2" to 2" guage Ratio 1:4:8 (CSI No.5 P.18)

59.06	Cft	@Rs 9416.28	P% Cft	Rs 5561.00
-------	-----	-------------	--------	------------

reinforced cement concrete work including all labour and material except the cost of steel reinforcement and its labour for bending and binding which will be paid separately. This rate also includes all kinds of forms moulds lifting shuttering curing rendering and finishing the exposed surface i/c screening and washing of shingle (a) R.C work in roof slab members laid in situ or precast laid in position complete in a respect. (i) Ratio 1;2;4 90 lbs cement 2 cft sand 4 cft shingle 1/8" to 1/4" gauge. (G.S.I-6 P/16)

186.75	Cft	@Rs 337.00	P% Sft	Rs 62935.00
5	Fabrication of mild steel reinforcement for cement concrete i/c cutting bending laying in position making joints and fastening i/c cost of binding wire also includes removal of rust from bars. (G.S.I-7 (ii) (a) P/19)			
7.50	cwt	@Rs 5001.70	P-Cwt	Rs 37513.00
6	Providing construction joints in concrete work of 9" (225mm) made corrugated PVC water stop (with bulb) i/c soldering, cost of material and labour (PHSI-1 P.56)			
29.00	Cwt	@Rs 86	P.Rft	Rs 2494.00
7	Fabrication of heavy steel work with angles tees, flat iron round iron and sheet iron for making trusses girders, tanks etc: i/c cutting tanks etc: i/c cutting drilling riveting handling assembling and fixing but excluding erection in position (CSINo.2 P.91)			
2.06	Cwt	@Rs 4928.49 ✓	P.Cwt	Rs 10153.00
8	Erection and fitting in position of iron trusses staging of water tanks etc: (CSINo.3, P.3)			
1.47	Cwt	@Rs 271.04	P.Cwt	Rs 398.00
9	Pacca brick work in foundation and plinth in cement sand mortar(1:6) (G.S.I No. 4 P/ 24)			
13.23	cft	@Rs 11948.36	P% Cft	Rs 1581.00
10	Cement Plaster (1:4) up to 12' height 1/2" thick (G.S.I-13 P.51)			
49.15	Sft	@Rs 2283.93	P% Sft	Rs 1123.00
			<b>Total:</b>	<b>Rs 123592.00</b>

### PUMP HOUSE (size 10' x 12')

1	Excavation in foundation of building bridges and other structures i/c dag belling dressing refilling around the structures with excavated Earth watering ramming up to 5ft (b) in ordinary soil (G.S.I-18/ P/4)			
146.70	cft	@Rs 3176.25	P%0 Cft	Rs 466.00
2	C.C Brick or stone ballast 1:1/2" to 2" guage Ratio 1:4:8 (CSI No.5 P.18)			
94.06	Cft	@Rs 9416.28	P% Cft	Rs 8857.00

	Pacca brick work in foundation and plinth in cement sand mortar(1:6) (G.S.I No. 4 P/ 24)	333.09 cft	@Rs 11948.36	P% Cft	Rs 39799.00
4	Damp proof course with (Cement sand and shingle) concrete 1:2:4 i/c two coats of asphalt mixture (CSINo.27, P.19) 2" thick	53.0874 Sft	@Rs 3912.85	P% Cft	Rs 2077.00
5	Pacca brick work in ground floor i/c striking of joints upto 20 ft height Ratio 1:6 (G.S.I No. 7 P/ 21)	317.63 cft	@Rs 12674.36	P% Cft	Rs 40258.00
6	Cement Plaster (1:6) 1/2" thick up to 12' height (G.S.I-11.b/ P.52)	666.67 sft	@Rs 2206.60	P% Sft	Rs 14711.00
7	Cement Plaster 1:4, 3/8" thick upto 20' height (CSI No.10 P.52)	666.67 Cft	@Rs 2197.52	P% Cft	Rs 14650.00
8	Reinforced cement concrete work including all labour and material except the cost of steel reinforcement and its labour for bending and binding which will be paid separately. This rate also includes all kinds of forms moulds lifting shuttering curing rendering and finishing the exposed surface i/c screening and washing of shingle (a) R.C work in roof slab members laid in situ or pprecast laid in position complete in a respect. (i) Ratio 1;2;4 90 lbs cement 2 cft sand 4 cft shingle 1/8" to 1/4" gauge. (G.S.I-6 P/16)	105.74 Cft	@Rs 337.00 ✓	P% Sft	Rs 35636.00
9	Fabrication of mild steel reinforcement for cement concrete i/c cutting bending laying in position making joints and fastening i/c cost of binding wire also includes removal of rust from bars. (G.S.I-7 (ii) (a) P/19)	4.24 cwt	@Rs 5001.70	P-Cwt	Rs 21207.00
10	Cement pointing struck joints on walls (CSINo.11, P.51) Ratio 1:3	452.00 sft	@Rs 1213.58	P% sft	Rs 5485.00
11	Fabrication of heavy steel work with angles tees flate iron round iron sheet iron for making girder tanks etc i/c cutting drilling revilling holding assembling and fixing but excluding erection in position (CSINO.2, P.91)	4.24 Cwt	@Rs 4928.49	P.Cwt	Rs 20897.00
12	Painting new surfaces, preparing of surfaces and painting of ddors and windows of any type i/c edges (GSINo.5, P.68) 3 Coats	100.00 Cft	@Rs 2116.41	P% cft	Rs 2116.00

	Primary coat of chalk distumbering. (CSI #.23, P-53)			
	669.52 Sft	@Rs 442.75	P% Sft	Rs 2964.00
14	Distembering two coats. (CSI #.24, P-53)			
	669.52 Sft	@Rs 1043.90	P% Sft	Rs 6989.00
15	Filling watering and ramming earth in floors with surplus earth from foundation lead upto one chain and lift upto 5ft: (CSINo.21, P.5)			
	391.24 Cft	@Rs 1512.50	P.%0 cft	Rs 592.00
16	Providing laying 3" thick toping cement concrete Ratio 1:2:4 i/c surface finishing dividing into panel (CSINo.16, P.41)			
	111.78 Sft	@Rs 4411.82	P% Sft	Rs 4932.00
			Total:	Rs 221635.00

### COMPOUND WALL (size 60' x 40')

1	Excavation in foundation of building bridges and other structures i/c dag belling dressing refilling around the structures with excavated Earth watering ramming up to 5ft (b) in ordinary soil (G.S.I-18/ P/4)			
	579.00 cft	@Rs 3176.25	P%0 Cft	Rs 1839.00
2	C.C Brick or stone ballast 1:1/2" to 2" guage Ratio 1:4:8 (CSI No.5 P.18)			
	193.00 Cft	@Rs 9416.28	P% Cft	Rs 18173.00
3	Pacca brick work in foundation and plinth in cement sand mortar(1:6) (G.S.I No. 4 P/ 24)			
	940.72 cft	@Rs 11948.36	P% Cft	Rs 112401.00
4	Damp proof course with (Cement sand and shingle) concrete 1:2:4 i/c two coats of asphalt mixture (CSINo.27, P.19) 2" thick			
	209.05 Sft	@Rs 3912.85	P% Cft	Rs 8180.00
5	Reinforced cement concrete work including all labour and material except the cost of steel reinforcement and its labour for bending and binding which will be paid separately. This rate also includes all kinds of forms moulds lifting shuttering curing rendering and finishing the exposed surface i/c screening and washing of shingle (a) R.C work in roof slab members laid in situ or pprecast laid in position complete in a respect. (i) Ratio 1;2;4 90 lbs cement 2 cft sand 4 cft shingle 1/8" to 1/4" gauge. (G.S.I-6 P/16)			
	51.50 Cft	@Rs 337.00	P% cft	Rs 17356.00
6	Fabrication of mild steel reinforcement for cement concrete i/c cutting bending laying in position making joints and fastening i/c cost of binding wire also includes removal of rust from bars. (G.S.I-7 (ii) (a) P/19)			
	2.06 cwt	@Rs 5001.70	P-Cwt	Rs 10304.00

...cca brick work in other than building i/c striking of joints upto 20; height in cement sand mortar(1:6)(CSINo.7(i), P.26)

561.00	cft	@Rs 12346.65	P% Cft	Rs 69265.00
8 Cement plaster (1:6) 1/2" thick up to 12' height (G.S.I-11.b/ P.52)				
2183.25	Sft	@Rs 2206.60	P% Sft	Rs 48176.00
9 Cement plaster (1:4) 3/8" thick up to 12' height (G.S.I-11.a/ P.51)				
2183.50	sft	@Rs 2197.52	P% Sft	Rs 47983.00
10 Cement pointing struck joints on walls (CSINo.11, P.51) Ratio 1:3				
748.00	Sft	@Rs 1213.58	P% sft	Rs 9078.00
11 Fabrication of heavy steel work with angles tees flate iron round iron sheet iron for making girder tanks etc i/c cutting drilling revilling holding assembling and fixing but excluding erection in position (CSINO.2, P.91)				
5.35	Cwt	@Rs 4928.49	P.Cwt	Rs 26367.00
13 Painting new surface preparing surface & painting of guard bars gates of iron bars grating railing i/c standard braces etc (T.Similr open work) (CSINo.4(d) P.76 3 coats				
100.00	Sft	@Rs 2116.41	P% Sft	Rs 2116.00
14 Preparing surface painting with weather coat (CSINo.38, P.56)				
2183.50	Sft	@Rs 1948.10	P% Sft	Rs 42537.00
			<b>Total:</b>	<b>Rs 413775</b>

### PUMPING MACHINERY

1 Supplying & installing in position i/c transportation to site of work at village Kamal Khan Chandio Electric pumping set consisting of A.C Electric motor 7.5 BHP 3 phase 50 cycles 400/420 volts 1450 RPM Siemens made (Type ILG4 - 183) size 2"x2 1/2" mounted on common steel framme or base plate capable of discharge 80 GPM against a head of 40 i/c installing of Pumping set on C.C foundation ration 1:2:4 & C.C (1:4:8) with ballest with MS nuts & bolts of 3/8"dia to be embeded in c.c foundation, i/c providing motor control unit MCU consists of circuit breaker magnetic contractor, over load protection under / over voltage protection automatic star-delta change over switch control an power cables, indicating lights and all these coponents are fixed in a metallic dust and smoke proof box (NICE Co ) i/c i/c 72 hours testing charges. (N.S.I)				
1.0	Set	@Rs 687000.0	P.Set	Rs 687000.0
2 Supplying and fixing C.I Reflex Valve heavy pattern test pressure 21.0 KG sq.cm 300 lbs wq inch (PHSI #.8, P.6)				
<b>3" dia</b>				
4.0	Nos	@Rs 1543.75	Each	Rs 6175.0

supplying and fixing C.I Sluice Valve heavy pattern test pressure 21.0 KG sq.cm  
300 lbs wq inch (PHSINo.1, P.35)

3" dia

2.0	Nos	@Rs 4290.00	Each	Rs 8580.0
4	Providing and fixing M.S Pipe 4" dia made out of M.S sheet 3/16" thick M.S sheet i/c cutting folding to crvature and shape i/c welding etc complete (Based on schedule) 3" dia			
16.0	Rft	@Rs 385.89	P.Rft	Rs 6174.0
5	Manufacturing and installing with M.S flanges 4" dia made out of MS sheet 3/16" thick i/c cutting drilling holes etc complete (Based on schedule) 3" dia			
16.0	Nos	@Rs 500.89	Each	Rs 8014.0
6	Supplying C.I bend with flanged ends with holes i/c turning and facing of flanges for all sizes. (SMI No.8, P.11)			
<u>Bend 90 3" dia</u>				
1.11	Cwt	@Rs 6096.00	Each	Rs 6767.0
7	Supplying of Earthing set. (N.S.I)			
1.0	No	@Rs 25000.00	Each	Rs 25000.0
8	C.I Tapper: flat bottomed or central tapered 4" dia. (SMI #.8, P-11)			
0.53	Cwt	@Rs 6096.00	Each	Rs 3231.0
9	Providing laying & fixing in trench i/c fitting jointing and testing etc: complete in all respect the high density polythelene PE pipes (HDPE-100) for W/S confirming ISO 4427/DIN8074/8075 B.S 3580 & PSI 3051. (PHSINo.1, P.25) PN 10 (110 mm) 3" dia			
36.0	Rft	@Rs 178.00	P.Rft	Rs 6408.0
10	Jointing C.I . MS flanged and specials pipes and inside a trenches i/c supplying of the rubber packing of the required thickness nuts bolts and washers etc and other tools required for jointing and testing the joints in the specifics pressure etc complete (CSI No.1 P.35) 3" dia			
18.0	Joints	@Rs 499.00	P.Joint	Rs 8982.0
11	Tee with flanged ends with holes i/c turning and facing of flanged all size (SMI No.10, P.11)			
0.22	Cwt	@Rs 6096.00	Each	Rs 1341.0
12	Butt fusion joint 3" dia. (PHSMI #.H, P-20)			
18.0	Nos	@Rs 600.00	Each	Rs 10800.0

supplying of Flange Adapter (N.S.I)

3" dia

18.0 Nos

@Rs 675.00

Each

Rs 12150.0

### DIESEL ENGINE

- 1 Providing & installing in position i/c transportation to site of work at Drainage Scheme Kamal Khan Chandio Diesel Engine Pumping Set 8 BHP with 2200 RPM coupled with non-clogging pump type 65-315 size 3"x2 1/2" mounted on common steel frame or base plate capable of discharge 100 gallons per minute against a head of 40 ft i/c making cement concrete foundation ratio (1"2"4) and CC (1:4:8) with ballast with MS nuts bolts of 1/2" dia to be embedded in cement concrete foundation i/c testing of Pumping set against the required head of 72 hours etc complete. (N.S.I)

1.0 Set

@Rs 570000.0

P.Set

Rs 570000.0

Total

Rs 1360622.0

### A.C RISING MAIN 6" DIA

- 1 Excavation for pipe line in trenches i/c pits in soft soil or mud plaster i/c: trimming and dressing sides to true alignment and shape leveling of beds of trenches to correct level and grade cutting, joints holes & disposal of surplus earth within one chain or as directed by Engineer Incharge i/c providing fence guards light flanges and temporary crossing for non vehicular traffic where ever required lift upto 5' and lead upto one chain. (PHSI No:1, P-60)

32500.0 Cft

@Rs 3600.00

P%0 Cft

Rs 117000.00

- 2 Providing Asbesto Cement pressure pipe and comet jointing of class "B" and fixing trenches i/c: cutting fitting and jointing with rubber ring i/c: testing with water to a head of 122 meter or 400 ft: (PHSINO.1, P.19)

4" dia

5000.0 Rft

@Rs 172.00

P.Rft

Rs 860000.0

- 3 Supplying C.I Bend 45 degree. (MSINO.2, P-21)

4" dia

2.0 No

@Rs 893.75

Each

Rs 1788.0

- 4 AC Collar B Class (SMI # 4, P.5)

4" dia

2.0 No

@Rs 157.00

Each

Rs 314.0

- 5 One pair of rubber ring for AC Pipe B Class. (SMI # , P- )

4" dia

4.0 No

@Rs 95.00

Each

Rs 380.0

- 6 Making jointing C.I specials fitting for AC pressure pipe laying and required diameter and testing the joints along with A.C pressure pipe line to specified pressure and testing the all leaky joints etc complete (PHSI #.1, P.56)

4" dia

4.0 Joint

@Rs 62.00

Each

Rs 248.0

- 7 Supplying & installing M.S pipe 3/16" (5mm) thick of best and approved quality and cutting, folding etc complete. (Based on schedule rates)

4" dia

8.0 Nos

@Rs 506.60

Each

Rs 4053.0



Jointing C.I MS flanges pipe and specials langes and inside trenches i/c: supplying (PHSINo.M, P.35)

4" dia

2.0 Nos @Rs 513.00 Each Rs 1026.0

9 M.I with webling M.S flange 4" dia madeout of 3/8" thick etc complete. (Rate approved) (N.S.I)

4" dia

2.0 Nos @Rs 596.75 Each Rs 1194.0

10 Supplying C.I Jibault Joint (SMI #.14, P-6)

1.0 Nos @Rs 731.25 Each Rs 731.0

11 Refilling the excavated stuff in trenches 6" thick layer i/c watterring raming to full compaction etc complete (PHSI-24 P.77)

29250.0 Cft @Rs 2760.00 P.%0 Cft Rs 80730.0

Total: Rs 1067464

### GENERAL ABSTRACT

S.#	Sub- Works	Schedule Amount	N/S Amount	G.Total:
1	RCC Collecting Tank 10' dia	431753 ✓	0	431753 ✓
2	Screening Chamber (size 5' x 8')	123592 ✓	0	123592 ✓
3	Pump House (size 10' x 12')	221635 ✓	0	221635 ✓
4	Compound Wall (size 60' x 40')	413775 ✓	0	413775 ✓
5	Pumping Machinery & Diesel Engine	66472 ✓	1294150.0 ✓	1360622 ✓
6	A.C Pipe Rising main 4" dia	1066270 ✓	1194 ✓	1067464 ✓
	G.Total :-	2323497 ✓	1295344 ✓	3618841 ✓

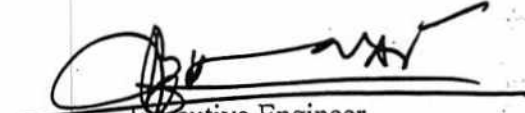
Amount Total (a)

35% % above /below on the rates CSR

Amount to be added /deducted on the basis of premium quoted. TOTAL(b)

Total (A) = a+b in words & figure:

CONTRACTOR

  
Executive Engineer  
Public Health Engg:Division-I  
Larkano

**SINDH PUBLIC PROCUREMENT REGULATORY AUTHORITY**  
**CONTRACT EVALUATION FORM**

- 1) NAME OF THE ORGANIZATION / DEPTT. **Public Health Engineering Department**
- 2) PROVINCIAL / LOCAL GOVT./ OTHER **Provincial**
- 3) TITLE OF CONTRACT: **CONSTRUCTION OF DISPOSAL WORK, PROVIDING & INSTALLING PUMPING MACHINERY & PROVIDING LAYIN JOINTING & TESTING P.E PIPE RISING MAIN 6" DIA FOR LABOUR COLONY (UNDER IMPROVEMENT & EXTENSION OF URBAN DRAINAGE SCHEME NAUDERO.**
- 4) TENDER NUMBER: **(07) No**
- 5) BRIEF DESCRIPTION OF CONTRACT: **Improvement & Extension of urban Drainage Scheme Naudero**
- 6) FORUM THAT APPROVED THE SCHEME: **P&D Department Govt: of Sindh**
- 7) TENDER ESTIMATED VALUE: **3.677 Millions**
- 8) ENGINEER'S ESTIMATE: **3.100 Millions**  
(For civil works only)
- 9) ESTIMATED COMPLETION PERIOD (AS PER CONTRACT) **06 Months**
- 10) TENDER OPENED ON (DATE & TIME) **15/09/2017 at 1.00 PM**
- 11) NUMBER OF TENDER DOCUMENTS SOLD: **09 Nos**  
(Attach list of buyers)
- 12) NUMBER OF BIDS RECEIVED **09 Nos**
- 13) NUMBER OF BIDDERS PRESENT AT THE TIME OF OPENING OF BIDS: **09 Nos**
- 14) BID EVALUATION REPORT **Hoisted on SPPRA website at EV ID # 2746/2017 dated 14/11/2017**
- 15) NAME AND ADDRESS OF THE SUCCESSFUL BIDDER **M/s. Saeed Jatoi & Co**
- 16) CONTRACT AWARD PRICE **3.677 Millions**
- 17) RANKING OF SUCCESSFUL BIDDER IN EVALUATION REPORT  
(i.e. 1<sup>st</sup>, 2<sup>nd</sup>, 3<sup>rd</sup> EVALUATION BID). **1<sup>st</sup> Lowest**
- 18) METHOD OF PROCUREMENT USED :- (Tick one)
- a) SINGLE STAGE – ONE ENVELOPE PROCEDURE: **Yes**
- b) SINGLE STAGE – TWO ENVELOPE PROCEDURE:
- c) TWO STAGE BIDDING PROCEDURE
- d) TWO STAGE – TWO ENVELOPE BIDDING PROCEDURE
- PLEASE SPECIFY IF ANY OTHER METHOD OF PROCUREMENT WAS ADOPTED i.e. EMERGENCY, DIRECT CONTRACTING / NEGOTIATION ETC. WITH BRIEF REASONS:
- 19) APPROVING AUTHORITY FOR AWARD OF CONTRACT: **Chief Engineer PHED Govt: of Sindh Sukkur**
- 20) WHETHER THE PROCUREMENT WAS INCLUDED IN ANNUAL PROCUREMENT PLAN? **Yes**
- 21) ADVERTISEMENT :
- i) SPPRA Website **Yes**  
No. 34269 dated: 25/08/2017  
( If yes, give date and SPPRA Identification No.)
- ii) News Papers **Yes**  
( If yes, give names of newspapers and dates) **Daily Imroz, dated: 26/08/2017**  
**Daily Awami Soch, dated: 30/08/2017**  
**Daily The Mail, dated: 26/08/2017**
- 22) NATURE OF CONTRACT **Local**

- |  |                      |
|--|----------------------|
| 23) WHETHER QUALIFICATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?<br>(If yes, enclose a copy)   | Yes ( Copy Enclosed) |
| 24) WHETHER BID EVALUATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?<br>( If yes, enclose a copy)   | Yes<br>N/A           |
| 25) WHETHER APPROVAL OF COMPETENT AUTHORITY WAS OBTAINED FOR USING A METHOD OTHER THAN OPEN COMPETITIVE BIDDING?   | Yes                  |
| 26) WAS BID SECURITY OBTAINED FROM ALL THE BIDDERS?  | Yes                  |
| 27) WHETHER THE SUCCESSFUL BID WAS LOWEST EVALUATED BID / BEST EVALUATED BID (in case of Consultancies)  | Lowest Evaluated Bid |
| 28) WHETHER THE SUCCESSFUL BIDDER WAS TECHNICALLY COMPLIANT ?  | Yes                  |
| 29) WHETHER NAMES OF THE BIDDERS AND THEIR QUOTED PRICES WERE READ OUT AT THE TIME OF OPENING OF BIDS?   | Yes                  |
| 30) WHETHER EVALUATION REPORT GIVEN TO BIDDERS BEFORE THE AWARD OF CONTRACT?<br>( Attach copy of the bid evaluation report)  | Yes                  |
| 31) ANY COMPLAINTS RECEIVED  | No                   |
| 32) ANY DEVIATION FROM SPECIFICATIONS GIVEN IN THE TENDER NOTICE / DOCUMENTS<br>( If yes, give details)  | No                   |
| 33) WAS THE EXTENSION MADE IN RESPONSE TIME?<br>( If yes, give reasons)  | No                   |
| 34) DEVIATION FROM QUALIFICATION CRITERIA<br>( If yes, give detailed reasons.)   | No                   |
| 35) WAS IT ASSURED BY THE PROCURING AGENCY THAT THE SELECTED FIRM IS NOT BLACK LISTED  | Yes                  |
| 36) WAS A VISIT MADE BY ANY OFFICER/OFFICIAL OF THE PROCURING AGENCY TO THE SUPPLIER'S PREMISES IN CONNECTION WITH THE PROCUREMENT? IF SO, DETAILS TO BE ASCERTAINED REGARDING FINANCING OF VISIT, IF ABROAD:<br>( If yes, enclose a copy) | No                   |
| 37) WERE PROPER SAFEGUARDS PROVIDED ON MOBILIZATION ADVANCE PAYMENT IN THE CONTRACT (BANK GUARANTEE ETC.)?   | N/A                  |
| 38) SPECIAL CONDITIONS, IF ANY<br>( If yes, give Brief Description)  | N/A                  |

Signature & Official Stamp of  
Authorized Officer

  
Executive Engineer  
Public Health Engg: Division  
Larkana



EXECUTIVE ENGINEER  
PUBLIC HEALTH ENGG: DIVISION I  
LARKANO

# 074-9410326  
# 074-9410326  
phedxen@gmail.com

No. AB/TC/  
Larkano dated:

2403 /of/2017  
20 /Nov/2017

### LETTER OF ACCEPTANCE

To,

*M/s. Saeed Jatoi & Co,  
Government Contractor,  
Larkano.*

**Subject: CONSTRUCTION OF DISPOSAL WORK, PROVIDING & INSTALLING PUMPING MACHINERY & PROVIDING LAYIN JOINTING & TESTING P.E PIPE RISING MAIN 6" DIA FOR LABOUR COLONY (UNDER IMPROVEMENT & EXTENSION OF URBAN DRAINAGE SCHEME NAUDERO.**

This is to notify that your Bid dated: 15/09/2017 for execution of the subject work @ 35% above on the schedule rates has been accepted by the Executive Engineer Public Health Engineering Division I Larkano Amounting to Rs: 36,77,413/- (Thirty Six Lacs Seventy Seven Thousand Four Hundred & Thirteen Only).

The 5% Earnest Money of the subject work has already been received in the shape of Call Deposit / Pay Order amounting to Rs: 1,55,000/- Hence you are requested to furnish the cost of Stamps amounting Rs: 12,900/- to be fixed on the agreement to be executed / will have to be borne by you within 03 days of the receipt of this acceptance letter in accordance to the conditions of contract and sign the agreement attached herewith within stipulated time mentioned above, failing which the acceptance will be treated as cancelled and the amount of bid security will be forfeited without any further notice.

Copy forwarded with compliments to:

  
Executive Engineer  
Public Health Engg. Division I  
Larkano

- The Chief Engineer, Public Health Engineering Department Government of Sindh Sukkur for kind information and necessary action.
- The Superintending Engineer, Public Health Engg: Circle Larkano for information.

Const. of Disposal work providing Testing P.E Pipe Rising Manholes  
 DIA For Labour Colony Urban Drainage Scheme Naudera 0

SGP (Klp.) D. No. 105-11-94-50,000 L.F. of 8 Ls. each.

P.W.D. 257

12900/5

O.R. P.W.D. Nos. 7934 of 6-4-35  
 56-1 of 8-6-36, 1950-W of 27-9-37, O.C.M.P.  
 and M. Deutt. No. 383-1/37 of 9-11-37  
 (P.W.D.) No. 5-173, 2-W of 22-2-30,  
 G. Rs (P.W.D.) No. 1038-1 of 22-2-37  
 12-10-44 and 2-5-44 654-IV of 22-2-39  
 12-10-44, and 2-5-44, W 1038/11-1 of  
 28-3-49, 2-47-W 2 of 12-12-50.

FORM B-1

PUBLIC WORKS DEPARTMENT

PHECIRCLE Lahore

PHE DIVISION Lahore

Mr. Saeed Ahmed Jatoi

1138/511/116

Percentage Rate Tender and Contract  
 for works

General Rules and Directions for the Guidance of Contractors

1. All work proposed to be executed in a



of the

date for  
 out the  
 tender, and  
 tender  
 will be  
 estimated  
 with the  
 specific  
 of the

must be  
 in the  
 presence of

any person who is not signed on his behalf by a person holding a power-of-attorney in favour of him to do so.

3. Receipts for payments made on account of any work, when executed by a firm, shall also be signed by all the partners, except where the contractors are described in their tender as a firm, in which case the receipt shall be signed in the name of the firm by one of the partners, or by some other persons having authority to give official receipts for the firm.

4. Any person who submits a tender shall fill up the usual printed form stating at what percentage above or below the rates specified in 'Schedule B' memorandum showing items of work to be carried out; he is willing to undertake the work. Only one rate of such percentage, on all the <sup>Estimated rates</sup> ~~Schedule B rates~~ shall be framed. Tenders, which propose any alteration in the works specified in the said form of invitation to tender or in the time allowed for carrying out the work, or which contain any other conditions, will be liable to rejection. No printed form of tender shall include a tender for more than one work, but if contractors wish to tender for two or more works they shall submit a separate tender for each. Tenders shall have the name and number of the work to which they refer written outside the envelope.

5. The Executive Engineer or his duly authorized Assistant shall open tenders in the presence of contractors who have submitted tenders or their representatives who may be present at the time, and he will enter the amounts of the several tenders in a comparative statement in a suitable form. In the identification, sign copies of the specifications and other documents mentioned in Rule 1. In the event of a tender being rejected the Divisional Officer shall authorize the Treasury Officer concerned to refund the amount of the earnest money for deposited to the contractor making the tender, on his giving a receipt for the return of the money.

6. The Officer competent to dispose of the tenders shall have right of rejecting all or any of the tenders.

*[Signature]*  
 Contracts

*[Signature]*  
 Executive Engineer



EXECUTIVE ENGINEER  
PUBLIC HEALTH ENGG: DIVISION I  
LARKANO

# 074-9410326

# 074-9410326

phedxen@gmail.com

No. AB/TC/:  
Larkano dated:

2420 /of/2017  
29. /Nov/ 2017

## "WORK ORDER"

*M/s. Saeed Jatoi & Co*  
*Government Contractor,*  
*Larkano.*

**Subject:** Construction of Disposal Work, Providing & Installing Pumping Machinery & Providing Layin Jointing & Testing P.E Pipe Rising main 6" dia for Labour Colony (under Improvement & Extension of Urban Drainage Scheme Naudero.

Reference: - Your B-I Tender opened on dated: 15/09/2017

Your percentage rate Tender for **Rs.17,52,399/=** (Rupees Seventeen Lacs, Fifty Two Thousand, Three Hundred & Ninety Nine) only @ **36%** above the schedule items viz: **Rs.36,77,413/=** (Rupees One Crore, Forty Two Lacs, Seventy Two Thousand, One Hundred & Eighty Nine) only being the lowest rates is hereby approved/ accepted by the Superintending Engineer, PHE Circle Larkana vide Letter No. GC-II/PHED/2483 dated: 27/10/2017

You are, therefore, directed to please start the work within seven (07) days after issue of the 'Work order' according to drawing design & PWD specifications under the supervision of Assistant Engineer, Public Health Engg: S/Division Ratodero & instructions from the undersigned.

No premium will be allowed on non-schedule items.

No Extra charges such as Taxes, Octroi packing or transportation of material etc will be paid separately.

The work shall have to be completed by you within the period six (06) months as provided in the tender.

The Sindh Sales Tax Special Producer (withholding) Rules, 2011 shall apply to taxable service as or supplied, provided or rendered to persons, specified as withholding agents, in the withholding procedure, for the purpose of deduction and deposit of sales tax.

The undersigned reserves the right to reject any or all parts of it or order for replacement if it is not done as per drawing, design and P.H.E specifications.

  
Executive Engineer  
Public Health Engg: Division I  
Larkano

**C.F.W.Cs for favour of information to:**

1. The Superintending Engineer, Public Health Engg: Circle Larkana
2. The Assistant Engineer, Public Health Engg: S/Division Larkana

" Bill of Quantity "

Construction of Disposal Work, Providing & Installing Pumping Machinery & Providing Layin Jointing & Testing P.E Pipe Rising main 6" dia for Labour Colony (under Improvement & Extension of Urban Drainage Scheme Naudero

A)

HEAD OF ACCOUNT :- (Under ADP Programme 2008-2009)

S.#	Qty	Description	Rate	Unit	Amount
<b>PART- PUMP HOUSE (10'x12')</b>					
1		Excavation in foundation of building bridges and other structures i/c dag belling dressing refilling around the structures with excavated Earth watering ramming up to 5ft (b) in ordinary soil (G.S.I-18/ P/4)			
	146.76	cft	@Rs 3176.00	P% Cft	Rs 466.00
2		C.C Brick or stone ballast 1:1/2" to 2" guage Ratio 1:4:8 (CSI No.5 P.18)			
	94.06	Cft	@Rs 9416.28	P% Cft	Rs 8857.00
3		Pacca brick work in foundation and plinth in cement sand mortar(1:6) (G.S.I No. 4 P/ 24)			
	333.0:	cft	@Rs 11948.36	P% Cft	Rs 39799.00
4		Damp proof course with (Cement sand and shingle) concrete 1:2:4 i/c two coats of asphalt mixture (CSINo.27, P.19) 2" thick			
	53.0874	Sft	@Rs 3912.85	P% Cft	Rs 2077.00
5		Pacca brick work in ground floor in cement sand mortar(1:6) (CSINo.5, P.20)			
	317.63	cft	@Rs 12674.36	P% Cft	Rs 40257.00
6		Cement plaster (1:6) 1/2" thick up to 12' height (G.S.I-11.b/ P.52)			
	666.67	Sft	@Rs 2206.60	P% Sft	Rs 14711.00
7		Cement plaster (1:4) 3/8" thick up to 12' height (G.S.I-11.a/ P.51)			
	666.67	sft	@Rs 2197.52	P% Sft	Rs 14650.00
8		R.C.C work i/c all labour and material except the cost of steel reinforcement and its labour for bending and binding which will be paid separately. This rate also includes all kinds of forms moulds lifting shuttering curing rendering and finishing the exposed surface i/c screening and washing of shingle (a) R.C work in roof slab members laid in situ or precast laid in position complete in a respect. (i) Ratio 1:2:4 90 lbs cement 2 cft sand 4 cft shingle 1/8" to 1/4" gauge. (G.S.I-6 P/16)			
	105.74	cft	@Rs 337.00	P-Cft	Rs 35636.00
9		Fabrication of mild steel reinforcement for cement concrete i/c cutting bending laying in position making joints and fastening i/c cost of binding wire also includes removal of rust from bars. (G.S.I-7 (ii) (a) P/19)			
	4.24	cwt	@Rs 5001.70	P-Cwt	Rs 21207.00

*Qis*

ement pointing struck joints on walls (CSINo.11, P.51) Ratio 1:3

	452.00 / Cft	@Rs 1213.58	P% Cft ✓	Rs 5485.00
11	Fabrication of heavy steel work with angles teer (CSINo.2, P.91)			
	4.24 / cwt	@Rs 4928.49	P-Cwt ✓	Rs 20897.00
12	Painting new surfaces, preparing of surfaces and painting of doors and windows of any type i/c edges (GSINo.5, P.68) 3 Coats			
	100.00 / Sft	@Rs 2116.41	P% Sft ✓	Rs 2116.00
13	Primary coat of chalk distumbering. (CSI #.23, P-53)			
	669.52 / Sft	@Rs 442.75	P% Sft ✓	Rs 2964.00
14	Destembling two coats. (CSI #.24, P-53)			
	669.52 / Sft	@Rs 1043.90	P% Sft ✓	Rs 6989.00
15	Filling watering and ramming earth in floors with surplus earth from foundation lead upto one chain and lift upto 5ft: (CSINo.21, P.5)			
	391.24 / Cft	@Rs 1512.50	P% Sft ✓	Rs 592.00
16	Providing laying 3" thick topping cement concrete Ratio 1:2:4 i/c surface finishing dividing into panel (CSINo.16, P.41)			
	111.78 / Sft	@Rs 4411.82	P% Sft ✓	Rs 4932.00
			Total:	Rs 221635

## PART-II P.E Pipe Rising main

- 1 Excavation for pipe line in trenches i/c pits in soft soil or mud plaster i/c: trimming and dressing sides to true alignment and shape leveling of beds of trenches to correct level and grade cutting, joints holes & disposal of surplus earth within one chain or as directed by Engineer Incharge i/c providing fence guards light flanges and temporary crossing for non vehicular traffic where ever required lift upto 5' and lead upto one chain. (PHSI No:1, P-60)

21000.0 / Cft ✓ @Rs 3600.00 P%0 Cft Rs 75600.00

- 2 Providing laying & fixing in trench i/c fitting jointing and testing etc: complete in all respect the high density polythylene PE pipes (HDPE-100) for W/S confirming ISO 4427/DIN8074/8075 B.S 3580 & PSI 3051. (PHSINo.1, P.25)

### PN 08 (160 mm) 6" dia

3000.0 / Rft ✓ @Rs 440.00 P.Rft Rs 1320000.0

- 3 HDPE (PE100) fitting (PH Sch: of Mat: Item No.1, P.18)  
6" dia 160mm Elbo band 45 Degree

2.0 / Nos ✓ @Rs 2784.00 Each Rs 5568.0

### 6" dia 160mm Elbo band 45 Degree

2.0 / Nos ✓ @Rs 3480.00 Each Rs 6960.0

- 4 But fusion joint (PH Sch: of Mat: I-H, P.20) 4" dia (110 mm)

4.0 / Nos ✓ @Rs 1000.00 Each Rs 4000.0

- 5 Refilling the excavated stuff in trenches 6" thick layer i/c watering raming to full compaction etc complete (PHSI-24 P.77)

18900.0 / Cft ✓ @Rs 2760.00 P.%0 Cft Rs 52164.0

Total: Rs 1464292.0

*Qis*



### PART-III Diesel Engine (16 BHP)(N/S)

Providing & installing in position i/c transportation to site of work at Drainage Scheme Diesel Engine Pumping Set 16 BHP with 2200 RPM coupled with non-clogging pump type 65-315 size 3"x2 1/2" mounted on common steel frame or base plate capable of discharge 200 galoons per minute against a head of 60 ft i/c making cement concrete foundation ratio (1:2:4) and C.C (1:4:8) with ballast with MS nuts bolts of 1/2" dia to be embedded in cement concrete foundation i/c testing of pumping set against the required head of 72 hours etc complete. (N.S.I)

1.0	set	@Rs 570000	P.Set	Rs 570000.0
			Total:	Rs 570000.0

### PART-III Pumping Machinery (N/S)

1 Supplying & installing in position i/c transportation to site of work Labour Colony Electric pumping set consisting of A.C Electric motor 7.5 BHP 3 phase 50 cycles 400/420 volts 1450 RPM Siemens made (Type ILG4 - 183) size 2"x2 1/2" mounted on common steel frame or base plate capable of discharge 80 GPM against a head of 40 i/c installing of Pumping set on C.C foundation ration 1:2:4 & C.C (1:4:8) with ballest with MS nuts & bolts of 3/8" dia to be embeded in c.c foundation, i/c providing motor control unit MCU consists of circuit breaker magnetic contractor, over load protection under / over voltage protection automatic star-delta change over switch control an power cables, indicating lights and all these coponents are fixed in a metallic dust and smoke proof box (NICE Co) i/c i/c 72 hours testing charges. (N.S.I)

1.0	Set	@Rs 687000.0	P.Set	Rs 687000.0
-----	-----	--------------	-------	-------------

2 Supplying and fixing C.I Reflex Valve heavy pattern test pressure 21.0 KG sq.cm 300 lbs wq inch (PHSINo.8, P.6)

4.0	Nos	@Rs 1543.75	Each	Rs 6175.0
-----	-----	-------------	------	-----------

3 Supplying and fixing C.I Sluice Valve heavy pattern test pressure 21.0 KG sq.cm 300 lbs wq inch (PHSINo.1, P.35)

2.0	Nos	@Rs 4290.00	Each	Rs 8580.0
-----	-----	-------------	------	-----------

4 Providing and fixing M.S Pipe 4" dia made out of M.S sheet 3/16" thick M.S sheet i/c cutting folding to crvature and shape i/c welding etc complete. (Based on schedule) 3" dia

16.0	Rft	@Rs 385.89	P.Rft	Rs 6174.0
------	-----	------------	-------	-----------

5 Manufacturing and installing with M.S flanges 4" dia made out of MS sheet 3/16" thick i/c cutting drilling holes etc complete. (Based on schedule) 3" dia

16.0	Nos	@Rs 500.89	Each	Rs 8014.0
------	-----	------------	------	-----------

6 Supplying C.I bend with flanged ends with holes i/c turning and facing of flanges for all size (SMI No.8, P.11)

Bend 90 3" dia

1.11	Cwt	@Rs 6096.00	Each	Rs 6767.0
------	-----	-------------	------	-----------

7. Supplying of Earthing Set. (N.S.I)

1.0	No	@Rs 25000.00	Each	Rs 25000.0
-----	----	--------------	------	------------

*Dis*

C.I Tapper flat bottomed or central tapered 4" dia. (PHSI #.9, P-12)

0.53 Cwt @Rs 6096.00 Each Rs 3231.0

- 9 Providing laying & fixing in trench i/c fitting jointing and testing etc: complete in all respect the high density polythelene PE pipes (HDPE-100) for W/S confirming ISO 4427/DIN8074/8075 B.S 3580 & PSI 3051. (PHSNo.1, P.25)

PN 10 (110 mm) 3" dia

36.0 Rft @Rs 178.00 P.Rft Rs 6408.0

- 10 Jointing C.I . MS flanged and specials pipes and inside a trenches i/c supplying of the rubber packing of the required thickness nuts bolts and washers etc and other tools required for jointing and testing the joints in the specifics pressure etc complete (CSI No.1 P.35)

3" dia

18.0 Joints @Rs 499.00 P.Joint Rs 8982.0

- 11 Tee with flanged ends with holes i/c turning and facing of flanged all size. (SMI No.10, P.11)

0.22 Cwt @Rs 6096.00 Each Rs 1341.0

- 12 Butt fusion joint 3" dia. (CSI #.H, P-20)

18.0 Nos @Rs 600.00 Each Rs 10800.0

- 13 Flange Adapter, 3" dia. (N.S.I)

18.0 Nos @Rs 675.00 Each Rs 12150.0

Total: Rs 790622.0

### GENERAL ABSTRACT

S.#	Sub- Works	Schedule Amount	N/S Amount	G.Total:
1	Part-I, Pump House (10' x 12')	221635	0	221635
2	Part-II, P.E Pipe Rising Main	1464292	0	1464292
3	Part-III, Diesel Engine (16 BHP)	0	570000	570000
	Part-IV Pumping Machinery	66472	724150	790622
	G.Total :-	1752399	1294150	3046549

Amount Total (a)

36% above/below on the rates CSR

Amount to be added /deducted on the basis of premium quoted. TOTAL(b)

Total (A) = a+b in words & figure:

CONTRACTOR

Executive Engineer  
Public Health Engg:Division-I

**SINDH PUBLIC PROCUREMENT REGULATORY AUTHORITY**  
**CONTRACT EVALUATION FORM**

- 1) NAME OF THE ORGANIZATION / DEPTT. **Public Health Engineering Department**
- 2) PROVINCIAL / LOCAL GOVT/ OTHER **Provincial**
- 3) TITLE OF CONTRACT: **CONSTRUCTION OF DISPOSAL WORK, PROVIDING & INSTALLING PUMPING MACHINERY & PLJ & TESTING RISING MAIN FOR VILLAGE DATAR DINO AGANI, TALUKA RATODERO (UNDER 10 VILLAGES).**
- 4) TENDER NUMBER: **(08) No**
- 5) BRIEF DESCRIPTION OF CONTRACT: **Providing drainage facility to the residence of area**
- 6) FORUM THAT APPROVED THE SCHEME **P&D Department Govt: of Sindh**
- 7) TENDER ESTIMATED VALUE: **2.838 Millions**
- 8) ENGINEER'S ESTIMATE: **2.560 Millions**  
(For civil works only)
- 9) ESTIMATED COMPLETION PERIOD (AS PER CONTRACT) **06 Months**
- 10) TENDER OPENED ON (DATE & TIME) **15/09/2017 at 1.00 PM**
- 11) NUMBER OF TENDER DOCUMENTS SOLD: **07 Nos**  
(Attach list of buyers)
- 12) NUMBER OF BIDS RECEIVED **07 Nos**
- 13) NUMBER OF BIDDERS PRESENT AT THE TIME OF OPENING OF BIDS: **07 Nos**
- 14) BID EVALUATION REPORT **Hoisted on SPPRA website at EV ID # 2746/2017 dated 14/11/2017**
- 15) NAME AND ADDRESS OF THE SUCCESSFUL BIDDER **M/s. Aftab Ahmed Abbasi**
- 16) CONTRACT AWARD PRICE **2.838 Millions**
- 17) RANKING OF SUCCESSFUL BIDDER IN EVALUATION REPORT  
(i.e. 1<sup>st</sup>, 2<sup>nd</sup>, 3<sup>rd</sup> EVALUATION BID). **1<sup>st</sup> Lowest**
- 18) METHOD OF PROCUREMENT USED : - (Tick one)
- a) SINGLE STAGE – ONE ENVELOPE PROCEDURE: **Yes**
- b) SINGLE STAGE – TWO ENVELOPE PROCEDURE:
- c) TWO STAGE BIDDING PROCEDURE
- d) TWO STAGE – TWO ENVELOPE BIDDING PROCEDURE
- PLEASE SPECIFY IF ANY OTHER METHOD OF PROCUREMENT WAS ADOPTED i.e. EMERGENCY, DIRECT CONTRACTING / NEGOTIATION ETC. WITH BRIEF REASONS:
- 19) APPROVING AUTHORITY FOR AWARD OF CONTRACT: **Chief Engineer PHED Govt: of Sindh Sukkur**
- 20) WHETHER THE PROCUREMENT WAS INCLUDED IN ANNUAL PROCUREMENT PLAN? **Yes**
- 21) ADVERTISEMENT : **Yes**
- i) SPPRA Website **No. 34269 dated: 25/08/2017**  
( If yes, give date and SPPRA Identification No.)
- ii) News Papers **Yes**  
( If yes, give names of newspapers and dates) **Daily Imroz, dated: 26/08/2017**  
**Daily Awami Soch, dated: 30/08/2017**  
**Daily The Mail, dated: 26/08/2017**
- 22) NATURE OF CONTRACT **Local**
- 23) WHETHER QUALIFICATION CRITERIA **Yes ( Copy Enclosed)**

WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?

(If yes, enclose a copy)

24) WHETHER BID EVALUATION CRITERIA

Yes

WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?

N/A

( If yes, enclose a copy)

25) WHETHER APPROVAL OF COMPETENT AUTHORITY WAS OBTAINED FOR USING A METHOD OTHER THAN OPEN COMPETITIVE BIDDING?

Yes

26) WAS BID SECURITY OBTAINED FROM ALL THE BIDDERS?

Yes

27) WHETHER THE SUCCESSFUL BID WAS LOWEST EVALUATED BID / BEST EVALUATED BID (in case of Consultancies)

Lowest Evaluated Bid

28) WHETHER THE SUCCESSFUL BIDDER WAS TECHNICALLY COMPLIANT ?

Yes

29) WHETHER NAMES OF THE BIDDERS AND THEIR QUOTED PRICES WERE READ OUT AT THE TIME OF OPENING OF BIDS?

Yes

30) WHETHER EVALUATION REPORT GIVEN TO BIDDERS BEFORE THE AWARD OF CONTRACT?

Yes

( Attach copy of the bid evaluation report)

31) ANY COMPLAINTS RECEIVED

No

32) ANY DEVIATION FROM SPECIFICATIONS GIVEN IN THE TENDER NOTICE / DOCUMENTS

( If yes, give details)

No

33) WAS THE EXTENSION MADE IN RESPONSE TIME?

No

( If yes, give reasons)

34) DEVIATION FROM QUALIFICATION CRITERIA

No

( If yes, give detailed reasons.)

35) WAS IT ASSURED BY THE PROCURING AGENCY THAT THE SELECTED FIRM IS NOT BLACK LISTED

Yes

36) WAS A VISIT MADE BY ANY OFFICER/OFFICIAL OF THE PROCURING AGENCY TO THE SUPPLIER'S PREMISES IN CONNECTION WITH THE PROCUREMENT? IF SO, DETAILS TO BE ASCERTAINED REGARDING FINANCING OF VISIT, IF ABROAD:

No

( If yes, enclose a copy)

37) WERE PROPER SAFEGUARDS PROVIDED ON MOBILIZATION ADVANCE PAYMENT IN THE CONTRACT (BANK GUARANTEE ETC.)?

N/A

38) SPECIAL CONDITIONS, IF ANY

N/A

( If yes, give Brief Description)

Signature & Official Stamp of

Authorized Officer

Executive Engineer  
Public Health Engg: Division  
Larkana



EXECUTIVE ENGINEER  
PUBLIC HEALTH ENGG: DIVISION I  
LARKANO

# 074-9410326  
# 074-9410326  
phedxen@gmail.com

No. AB/TC/:  
Larkano dated:

2407 /of/2017  
20 /Nov/2017

**LETTER OF ACCEPTANCE**

To,

*M/s. Aftab Ahmed Abbasi,  
Government Contractor,  
Larkano.*

Subject: **CONSTRUCTION OF DISPOSAL WORK, PROVIDING & INSTALLING PUMPING MACHINERY & PLJ & TESTING RISING MAIN FOR VILLAGE DATAR DINO AGANI, TALUKA RATODERO (UNDER 10 VILLAGES).**

This is to notify that your Bid dated: 15/09/2017 for execution of the subject work @ 28% above on the schedule rates has been accepted by the Executive Engineer Public Health Engineering Division I Larkano Amounting to Rs: 28,38,195/- (Twenty Eight Lacs Thirty Eight Thousand One Hundred & Ninety Five Only).

The 5% Earnest Money of the subject work has already been received in the shape of Call Deposit / Pay Order amounting to Rs: 1,28,000/- Hence you are requested to furnish the cost of Stamps amounting Rs: 9,900/- to be fixed on the agreement to be executed / will have to be borne by you within 03 days of the receipt of this acceptance letter in accordance to the conditions of contract and sign the agreement attached herewith within stipulated time mentioned above, failing which the acceptance will be treated as cancelled and the amount of bid security will be forfeited without any further notice.

Copy forwarded with compliments to:

  
(Barkat Ali Khuwaja)  
Executive Engineer  
Public Health Engg. Division I  
Larkano

- The Chief Engineer, Public Health Engineering Department Government of Sindh Sukkur for kind information and necessary action.
- The Superintending Engineer, Public Health Engg: Circle Larkano for information.

Const: of Disposal work providing & installing Pumping Machinery  
 Millay Datar Dino Agani Taluka Rato Dero (under village)

SGP (Khp.) D. No. 105-11-94-50,000 L.F. of 8 ls. each.

P.W.D. 287

G. R. P. W. D. Nos. 7934 of 6-4-35  
 56-1 of 8-6-36, 19511-W of 27-9-37, G.C.M.P.  
 and M. Deputt. No. 383-P/37 of 9-11-37  
 (P. W. D.) No. 5-173, 2-W of 22-2-39,  
 G. R. (P. W. D.) No. 1038-1 of 22-2-37  
 12-10-44 and 2-5-44 694-W of 22-2-39  
 12-10-44, and 2-5-44, 45-W 1038/11-1 of  
 28-3-49, 4-47-W 2 of 12-12-50.

FORM B-1

PUBLIC WORKS DEPARTMENT

PHE CIRCLE Larkana

PHE DIVISION Larkana

Mr. Aftab Ahmed Abasi

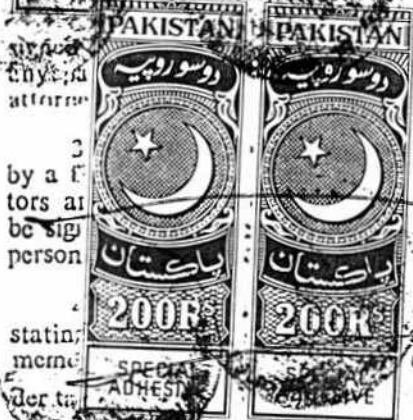
Percentage Rate Tender and Contract  
 for works

General Rules and Regulations for the Guidance of Contractors



all be notified in a  
 the office of the

as the date for  
 carrying out the  
 the tender, and  
 successful tenderers  
 will be liable for the  
 ground rents will be  
 rings and estimated  
 connection with the  
 purpose of identifier  
 at the office of



being submitted by a firm, it must be  
 in the event of the absence of  
 is behalf by a person holding a power-of-

is on account of any work, when executed  
 all the partners, except where the contrac-  
 as a firm, in which case the receipt shall  
 by one of the partners, or by some other  
 official receipts for the firm.

a tender shall fill up the usual printed form  
 or below the rates specified in Schedule 'B'  
 work to be carried out; he is willing to un-  
 such percentage, on all the  $\frac{\text{Estimated rates}}{\text{Scheduled rates}}$  shall

by tenderers, which propose any alteration in the works specified in  
 the said form of invitation to tender or in the time allowed for carrying out  
 the work, or which contain any other conditions, will be liable to rejection.  
 No printed form of tender shall include a tender for more than one work,  
 but if contractors wish to tender for two or more works they shall submit a  
 separate tender for each. Tenders shall have the name and number of the  
 work to which they refer written outside the envelope.

5. The Executive Engineer or his duly authorised Assistant shall open  
 tenders in the presence of contractors who have submitted tenders or their  
 representatives who may be present at the time, and he will enter the amounts  
 of the several tenders in a comparative statement in a suitable form. In the  
 identification, sign copies of the specifications and other documents mentio-  
 ned in Rule 1. In the event of a tender being rejected the Divisional Officer  
 shall authorize the Treasury Officer concerned to refund the amount of the  
 earnest money for deposited to the contractor making the tender, on his giving  
 a receipt for the return of the money.

6. The Officer competent to dispose of the tenders shall have right of  
 rejecting all or any of the tenders.

*[Signature]*  
 Executive Engineer  
 Public Works Engg. Division  
 Larkana

*[Signature]*



EXECUTIVE ENGINEER  
PUBLIC HEALTH ENGG: DIVISION I  
LARKANO

# 074-9410326

# 074-9410326

phedxen@gmail.com

No. AB/TC/  
Larkano dated:

2421 /of/2017  
29 /Nov/ 2017

## "WORK ORDER"

*M/s. Aftab Ahmed Abbasi*  
*Government Contractor,*  
*Larkano.*

**Subject: CONSTRUCTION OF DISPOSAL WORK, PROVIDING & INSTALLING PUMPING MACHINERY & PLJ & TESTING RISING MAIN FOR VILLAGE DATAR DINO AGANI, TALUKA RATODERO (UNDER 10 VILLAGES).**

Reference: - Your B-I Tender opened on dated: 15/09/2017

Your percentage rate Tender for **Rs.23,09,029/=** (Rupees Twenty Three Lacs, Nine Thousand & Twenty Nine) only @ **28% above** the schedule items viz: **Rs.28,38,195/=** (Rupees Twenty Eight Lacs, Thirty Eight Thousand, One Hundred & Ninety Five) only being the lowest rates is hereby approved/ accepted by the Superintending Engineer, PHE Circle Larkana vide Letter No. GC-II/PHED/2500 dated: 30/10/2017

You are, therefore, directed to please start the work within seven (07) days after issue of the 'Work order' according to drawing design & PWD specifications under the supervision of Assistant Engineer, Public Health Engg: S/Division Ratodero & instructions from the undersigned.


No premium will be allowed on non-schedule items.

No Extra charges such as Taxes, Octroi packing or transportation of material etc will be paid separately.

The work shall have to be completed by you within the period six (06) months as provided in the tender.

The Sindh Sales Tax Special Producer (withholding) Rules, 2011 shall apply to taxable service as or supplied, provided or rendered to persons, specified as withholding agents, in the withholding procedure, for the purpose of deduction and deposit of sales tax.

The undersigned reserves the right to reject any or all parts of it or order for replacement if it is not done as per drawing, design and P.H.E specifications.

  
Executive Engineer  
Public Health Engg: Division I  
Larkano

**C.F.W.Cs for favour of information to:**

1. The Superintending Engineer, Public Health Engg: Circle Larkana
2. The Assistant Engineer, Public Health Engg: S/Division Larkana

## BILL OF QUANTITIES

Construction of Disposal Work, Providing & Installing Pumping machinery & PLJ & Testing Rising main for village Datar Dino Agani, taluka Ratodero (under 10 villages)

(B) under Provincial ADP 2012-13

Item #	Quantities	Description and rate of Item to be executed at site	Rate	Unit	Amount in Rupees
1	2	3	4	5	6
<b>Part-I Collecting Tank &amp; Screening Chamber</b>					
1		Excavation of well in dry upto 20' ft height around level and disposal of soil within one chain. (in ordinary soil) (GSI No: 1, P-85)			
	825.23 cft		@Rs 2247.58	P%0 Cft	Rs. 1855
2		Excavation in foundation of building bridges and other structures i/c dig billing dressing refilling around the structures with excavated Earth watering ramming up to 5ft (b) in ordinary soil (C.S.I-18/ P/5)			
	385.94 cft		@Rs 3176.25	P%0 Cft	Rs. 1226
3		Extra for wet earth work (GSI No.15, P.3)			
	200.69 cft		@Rs 1058.75	P%0 Cft	Rs. 212
4		R.C.C work i/c all labour and material except the cost of steel reinforcement and its labour for bending and binding which will be paid separately. This rate also includes all kinds of forms moulds lifting shuttering curing rendering and finishing the exposed surface i/c screening and washing of shingle (a) R.C work in roof slab members laid in situ or precast laid in position complete in a respect. (i) Ratio 1:2:4 90 lbs cement 2 cft sand 4 cft shingle			
	797.01 cft		@Rs 337.00	P-Cft	Rs. 268593
5		Fabrication of mild steel reinforcement for cement concrete i/c cutting bending laying in position making joints and fastening i/c cost of binding wire also includes removal of rust from bars. (G.S.I- 8 P/16)			
	32.98 Cwt		@Rs 5001.70	P-Cwt	Rs. 164957
6		Wet Sinking of walls for depth below spring level by means of driver i/c all charges for shoring leading & removal excavated material within one chain. (GSI No: 3, P-85)			
	613.28 Cft	0' - 5'	@Rs 11763.80	P.%0 Cft	Rs. 7215
	613.28 Cft	5' - 10'	@Rs 24000.00	P.%0 Cft	Rs. 14719
7		Cement concrete brick or stone ballast 1 1/2" to 2" gauged ratio (1:4:8) (CSI No: 4, P-14)			
	163.50 Cft		@Rs 9416.28	P% Cft	Rs. 15396
8		Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without shuttering. (G.S.I - 5,			
	78.50 Cft	Ratio 1:4:8	@Rs 11288.75	P% Cft	Rs. 8862
	78.50 cft	Ratio 1:3:6	@Rs 12595.00	P% Cft	Rs. 9887
	78.50 cft	Ratio 1:2:4	@Rs 14429.25	P% Cft	Rs. 11327



ing or pumping out sub-soil water during excavation, concreting, cost in situ concrete or masonry work in foundation etc. (PHSI No.18, P.No.75)

	1413.00	cft		@Rs 543.00	P% Cft	Rs. 7673
10	Providing expansion Joints in concrete work of 9" (225mm) wide corrugated P.V.C water stop (with bulb) i/c holding cost of material and labour. (PHSI No.2, P-37)					
	69.08	Cwt		@Rs 86.00	P-Rft	Rs. 5941
11	Pacca brick work in foundation and plinth in cement sand mortar(1:6) (C.S.I No. 4 P/ 19)					
	11.28	Cft.		@Rs 11948.36	P% Cft	Rs. 1347
12	Cement plaster (1:4) up to 20'height 1/2"thick (C.S.I-11/ P/51)					
	33.46	sft		@Rs 2283.93	P% Sft	Rs. 764
13	Small iron work such as gusset plate lines lenab, girding tank etc including cutting riveting handling erection in position. (CSI No:19, P-91)					
	1.18	cwt		@Rs 6420.61	P-Cwt	Rs. 7576
14	Erection & Fitting in Position of iron trusses staging of water tanks etc. (CSI No: 3, P-70)					
	1.18	cwt		@Rs 271.04	P-Cwt	Rs. 320
15	Excavation for pipe lines in trench and pits in soft soil i/c trimming and dressing sides to true alignment shape leveling of beds of trenches to correct level and grade cutting joints holes and disposal of surplus earth within one chain as directed by engineer incharge providing fence guards lights whenever and temporary crossing for non-vehicular traffic whenever required lift upto 5 ft and lead upto one chain. (PHSI No: 1, P-46)					
	196.00	cft	<u>0' - 5' Dia</u>	@Rs 3600.00	P%0 Cft	Rs. 706
16	Providing R.C.C Pipes of ASTM C-76-62 C-76-70 class - II wall bend fixing in trenches i/c cutting fitting and jointing with rubber ring i/c testing with water to specified pressure. (PHSI No: 1, P-22)					
	8.00	Rft	<u>12" Dia</u>	@Rs 412.00	P-Rft	Rs. 3296
17	Refilling the excavated stuff in trenches 6" thick layers i/c watering ramming to full compaction etc complete. (PHSI #.24, P-77)					
	176.40	cft		@Rs 2760.00	P%0 Cft	Rs. 487
<b>Total</b>						<b>Rs. 532357</b>

**SUB-WORK NO: 2 PUMP HOUSE**

1	Excavation in foundation of building bridges and other structures i/c dig billing dressing refilling around the structures with excavated Earth watering ramming up to 5ft (b) in ordinary soil (C.S.I-18/ P/4)					
	146.70	cft		@Rs 3176.25	P%0 Cft	Rs 466
2	C.C Brick or stone ballast 1: 1/2" to 2" guage Ratio 1:4:8 (CSI No.5, P-18)					
	94.06	cft	<u>Ratio 1:4:8</u>	@Rs 9416.28	P% Cft	Rs 8857

	Pacca brick work in foundation and plinth in cement sand mortar(1:6) (C.S.I No. 4 P/ 19)			
333.09	cft	@Rs 11948.36	P% Cft	Rs 39799
4	Damp proof course with (cement sand and shingle) concrete 1:2:4 i/c two coats of asphalt mixture. (CSI No: 27, P-19). <u>2" thick</u>			
53.08	cft	@Rs 3912.85	P% Cft	Rs 2077
5	Pacca brick work in ground floor in cement sand mortar (1:6) (CSI No.5, P.No.20)			
317.63	cft	@Rs 12674.36	P% Cft	Rs 40258
6	Cement plaster 1:6 1/2" thick upto 12' height. (CSI No: 11/b, P-52)			
666.67	cft	@Rs 2206.60	P% Sft	Rs 14711
7	Cement Plaster 1:4 3/8" thick upto 12' height. (CSI No: 11/a, P-51)			
666.67	cft	@Rs 2197.52	P% Sft	Rs 14650
8	R.C.C work i/c all labour and material except the cost of steel reinforcement and its labour for bending and binding which will be paid separately. This rate also includes all kinds of forms moulds lifting shuttering curing rendering and finishing the exposed surface i/c screening and washing of shingle (a) R.C work in roof slab members laid in situ or precast laid in position complete in a respect. (i) Ratio 1;2;4 90 lbs cement 2 cft sand 4 cft shingle 1/8" to 1/4" gauge. (G.S.I-6 P/16)			
105.74	cft	@Rs 337.00	P-Cft	Rs 35636
9	Fabrication of mild steel reinforcement for cement concrete i/c cutting bending laying in position making joints and fastening i/c cost of binding wire also includes removal of rust from bars. (G.S.I- 8 P/17)			
4.24	Cwt	@Rs 5001.70	P-Cwt	Rs 21207
10	Cement Pointing struck joints on walls. (CSI No: 11, P-51) Ratio 1:3			
452.00	sft	@Rs 1213.58	P% Sft	Rs 5485
11	Fabrication of heavy steel work with angles teer. (CSI No: 2, P-91)			
4.24	cwt	@Rs 4928.49	P-Cwt	Rs 20897
12	Painting new surfaces, preparing of surfaces and painting of doors and windows of any type i/c edges. (GSI No: 5, P-68)			
100.00	sft <u>3 coats</u>	@Rs 2116.41	P% Sft	Rs 2116
13	Primary Coat of Chalk distumbering. (CSI #.23, P-40)			
669.52	sft	@Rs 442.75	P% Sft	Rs 2964
14	Distumbering two coats. (CSI #.24, P-53)			
669.52	Sft	@Rs 1043.90	P% Sft	Rs 6989

ing Watering and Ramming earth in floors with surplus earth from foundation lead upto one chain and lift upto 5ft.(CSI No. 21, P-5)

391.25 cft @Rs 1512.50 P% Cft Rs 592

- 16 Providing Laying 3" thick toping cement concrete Ratio 1:2:4 i/c surface finishing dividing into panel (CSI No.16, P.41)

111.78 sft 3" thick @Rs 4411.82 P% Sft Rs 4932

Total Rs: 221635

PART-5 COMPOUND WALL (SIZE 100X75)

- 1 Excavation in foundation of building bridges and other structures. i/c dag belling dressing refilling around the structures with excavated Earth watering ramming lead up to one chain and lift up to 5' (CSI #. No. 18, P-4)

579.00 Rft @Rs: 3176.25 P% Cft Rs: 1839

- 2 Cement concrete brick or stone ballast 1 1/2" to 2" gauge. (Ratio 1:4:8) (CSI #.5, P-18)

193.00 cft @Rs: 9416.28 P% Cft Rs: 18173

- 3 Pacca brick work in other then building i/c stricking of joints upto 20ft height in cement, sand, mortar (1:6) (CSI #.4, P-19)

940.72 Cft @Rs: 11948.36 P% Cft Rs: 112401

- 4 Damp proof course with (cement & shingle) concrete 1:2:4 i/c: two coats of asphalt mixture. (CSI #.27, P-19) 2" thick

209.05 Cft @Rs: 3912.85 P% Cft Rs: 8180

- 5 R.C.C work i/c all labour and material except the cost of steel reinforcement and its labour for b/b which will be paid separately. This rate also i/c all kinds of forms moulds lifting, shutting, curing, rendering and finishing the exposed surface (i/c s/w of shingle) (a) R.C work in roof slab beams columns rafts lintels and other structural members laid in situ or p/precast laid in position complete in all respect. (I) Ratio 2:2:4 Lbs cement 2 Cft, sand 4 cft shingle 1/8" to 1/4" gauge. (GSI #.6, P-16)

51.50 Cft @Rs: 337 P/Cft Rs: 17356

- 6 Fabrication of mild steel reinforcement for C.C i/c cutting, bending, laying in position making joints and fastening i/c cost of binding wire (also i/c removal of rust from bars). (CSI #.2, P-91)

2.06 Cwt @Rs: 5001.70 P. Cwt Rs: 10304

- 7 Pacca brick work in other then building i/c stricking of joints upto 20' ft height in cement, sand, mortar (1:6) (CSI #.7, P-21)

561.00 Cft @Rs: 12346.65 P% Cft Rs: 69265

- 8 Cement, Plaster (1:6) up to 12' height 1/2" thick (CSI #.13, P-52)

2183.25 sft @Rs: 2206.60 P% Sft Rs: 48176

- 9 Cement, Plaster (1:4) upto 12' ft. height 3/8" thick (CSI #.13, P-52)

2183.25 sft @Rs: 2197.52 P% Sft Rs: 47977

ment, Pointing struck joint on walls Ratio (1:3) (CSI #.11, P-51)

748.00	sft		@Rs: 1213.58	P% Sft	Rs: 9078
11	Fabrication of mild steel reinforcement for C.C i/c cutting, bending, laying in position making joints and fastening i/c cost of binding wire (also i/c removal of rust from bars). (CSI #.2, P-91)				
5.35	Cwt		@Rs: 4928.49	P. Cwt	Rs: 26367
12	Paint in new surfaces, preparing of surfaces and painting of doors and windows of any type i/c: edges and painting of door and window any type i/c: edges. (G.S.I. No.5, P-69)				
100.0	sft	3 coats	@Rs: 2116.41	P% Sft	Rs: 2116
13	Preparing the surface & painting with weather coat i/c: rubbing the surface with rubbing brackage / sand paper filling the viods with chalk plaster of the paint with weather coat of approved make. (CSI #.33, P-56)				
2183.25	sft		@Rs: 1948.10	P% sft	Rs: 42532
				Total	Rs: 413763

SUB-WORK NO: 3 PUMPING MACHINERY

1	Supplying and installing in position i/c transportation at site of work at Drainage Scheme Amrot Sharif Electric Pumping set consisting of A.C electric Motor 5.50 BHP 3 phase 50 cycles 400/420 volts of 960 RPM Siemens made (Type KWPZ-65-315) size 2" x 2 1/2" mounted on common steel frame or 80 base plate capable of discharge 80 gallons per minute against a head of 49 ft i/c installation of pumping set on cement concrete foundation Ratio 1:2:4 and C.C (1:4:8) with ballast with MS nuts bolts of 3/8" dia to be embedded in cement concrete foundation i/c providing Motor Control Unit MCU consists of circuit breker, magnetic contractor, over load protection, under / over voltage protection automatic star - delta change over switch control an power cables, indicating lights and all these coponents are fixed in a metallic dust and smoke proof box (NICE Co. made) i/c: 72 hours testing charges. (N.S.I)				
1.00	set		@Rs 186000	P.Set	Rs 186000
2	Supplying and fixing C.I Reflex valve heavy pattern test pressure 21.0 kg sq cm 300 lbs sq inch. (PHSI No.8, P-6)				
4.00	No.	3" Dia	@Rs 1543.75	Each	Rs 6175
3	Supplying and fixing C.I sluice valve heavy pattern test pressure 21.0 kg sq cm 300 lbs sq inch. (PHSI No.1, P-35)				
2.00	No.	3" Dia	@Rs 4290.00	Each	Rs 8580
4	Providing and fixing M.S Pipe 4" dia made out of M.S Sheet 3/16" thick M.S sheet i/c cutting folding to curvature and shape i/c welding etc complete. (Based on Schedule).				
16	Rft	3" Dia	@Rs 385.89	P-Rft	Rs 6174
5	Manufacturing and installing with M.S flanges 4" dia made out of MS sheet 3/16" thick i/c cutting drilling holes etc complete. (Based on Schedule rates).				
16.0	No.	3" Dia	@Rs 500.89	Each	Rs 8014
6	Supplying C.I bend with flanged ends with holes i/c turning and facing of flanges for all size (SMI No.8, P-11). <u>Bend 90</u>				
1.11	cwt	3" Dia	@Rs 6096.00	Each	Rs 6767
7	Supplying of Earthing Set. (N.S.I)				
1.00	No.		@Rs 25000.0	Each	Rs 25000

C.I taper flat bottomed or central tapered. (PHS(M)I #.4, P-12)

0.53	No.		@Rs 6096.00	Each	Rs 3231
9	Providing laying and fixing in trench i/c fitting jointing & testing etc complete in all respect the high density polythelene PE pipes (HDPE-100) for W/S confirming ISO 4427/DIN8074 B.S 3580 & PSI 3051 (PHSI No.F-1 P-25).				
36.00	Rft	<u>for P.E Pipe 3" dia</u>	@Rs 178.00	P-Rft	Rs 6408
10	Jointing C.I / M.S flanged and specials pipes and inside a trenches i/c supplying of the rubber packing of the required thickness nuts bolts and washers etc and other tools required for jointing and testing the joints in the specifics pressure etc complete (CSI No.1 P-35).				
18.00	Joints	<u>3" Dia</u>	@Rs 499	P-Joint	Rs 8982
11	Tee with flanged ends with holes i/c turning and facing of flanged all size (SMI No.10, P.11)				
0.22	cwt	<u>3" Dia</u>	@Rs 6096.00	P. cwt	Rs 1341
12	Butt Fusion Joint. (PHSMI #.H, P-20)				
18.00	No.	<u>3" Dia</u>	@Rs 600.00	Each	Rs 10800
13	Flange Adapter. (NSI).				
18.00	No.	<u>3" Dia</u>	@Rs 675.00	Each	Rs 12150
				Total	Rs: 289622

**DIESEL ENGINE**

Providing & installing in position i/c transportation to site of work at Drainage Scheme Amrot Sharif Diesel Engine Pumping Set 16 BHP with 2200 RPM coupled with non-clogging pump type GSWG-103 size 2"x2 1/2" mounted on common steel frame or base plate capable of discharge 80 gallons per minute against a head of 49 ft i/c making cement concrete foundation ratio (1:2:4) and C.C (1:4:8) with ballast with MS nuts bolts of 1/2" dia to be embedded in cement concrete foundation i/c testing of pumping set against the required head of 72 hours etc complete. (N.S.I)

1.00	Set	@Rs. 196000.00	P.each	Rs. 196000	
				Total	Rs. 196000

**SUB-WORK NO: 4 A.C RISING MAIN**

1	Excavation for pipe lines in trenches and pits in soft soil i/c trimming and dressing sides to true alignment and shape leveling of beds of trenches to correct level and grade cutting joint holes and disposal or surplus earth within a one chain as directed by Engineering incharge providing fence guards. Lights flags and temporary crossing for non vehicular traffic where ever required lift upto 5ft: (1.52m)and lead upto one chain (30.50m) (PHSI No.1, P.No.60)				
21000	CFT		@Rs 3600.00	P%0Cft	Rs. 75600
2	Providing Asbesto Cement pressure pipe and comet jointing of class "B" and fixing trenches i/c: cutting, fitting and jointing with rubber ring i/c: testing with water to a head of 122 meter or 400 ft. (PHSI #.1, P-19)				
3000.00	Rft	<u>4" Dia</u>	@Rs 172.00	P-Rft	Rs. 516000
3	Supplying C.I Bend 45 degree. (Sch: of Mat. #.1, P- )				
3.00	Nos	<u>4" dia</u>	@Rs 731.25	Each	Rs. 2194

	3.00	No.	4" dia	@Rs 157.00	Each	Rs. 471
5	One pair of rubber ring for AC pipe B class. (SMI #. , P- )					
	6.00	No.	4" Dia	@Rs 95.00	Each	Rs. 570
6	Making, Jointing C.I special fitting for AC pressure pipe laying of the required dia meter and testing the joints along with the AC pipe line to the specified pressure and making good. (PHSI #.10, P-56)					
	3.00	No.	4" Dia	@Rs 62.00	Each	Rs. 186
7	Supplying & installing M.S Pipe 3/16" (5mm) thick of best and approved quality and cutting, folding etc complete. (RA based on schedule Rate)					
	8.00	No.	4" Dia	@Rs 506.60	Each	Rs. 4053
9	Jointing C.I MS flanges pipe an specials langes and inside trenches i/c: supplying (PHSI #.M, P-35)					
	2.00	No.		@Rs 513.00	Each	Rs. 1026
10	M.I with webbing M.S flange 4" dia made out of 3/8" thick etc complete.(Based on Schedule Rates)					
	2.00	No.	4" Dia	@Rs 596.75	Each	Rs. 1194
11	Supplying C.I gibault joints (SM item #.14, P-6)					
	3.00	No.		@Rs 731.25	Each	Rs. 2194
12	Refilling the excavated stuff in trenches 6" thick layers for levelling dressing i/c: watering, ramming to full compaction etc complete. (PHSI #.24, P-53)					
	18900.0	cft		@Rs 2760.00	P.%0cft	Rs. 52164
				<b>Total</b>		<b>Rs: 655652</b>

### GENERAL ABSTRACT

S.#	Sub- Works	Schedule Amount	N/S Amount	G.Total:
1	Sub Work #.1, Collecting Tank & Screening Chamber	532357	0	532357
2	Sub Work #.2, Pump House	221635	0	221635
3	Sub Work #.3, Pumping Machinery (1Set) i/c: Diesel Engine (1 Set)	66472	419150	485622
4	Sub Work #.4, A.C Rising Main	655652	0	655652
5	Sub Work #.5, Compound Wall	413763	0	413763
	<b>G.Total :-</b>	<b>1889879</b>	<b>419150</b>	<b>2309029</b>

Amount Total (a)

28

% above /below on the rates CSR

Total (A) = a+b in words & figure:

CONTRACTOR

Amount to be added /deducted on the basis of premium quoted. TOTAL(b)

Executive Engineer

Public Health Engg: Division-1  
Larkano

**SINDH PUBLIC PROCUREMENT REGULATORY AUTHORITY**  
**CONTRACT EVALUATION FORM**

- 1) NAME OF THE ORGANIZATION / DEPTT. **Public Health Engineering Department**
- 2) PROVINCIAL / LOCAL GOVT./ OTHER **Provincial**
- 3) TITLE OF CONTRACT: **CONSTRUCTION OF C.C DRAINS & C.C BLOCKS IN VILLAGE KAMAL KHAN CHANDIO TALUKA RATODERO. (UNDER 10 VILLAGES)**
- 4) TENDER NUMBER: **(09) No**
- 5) BRIEF DESCRIPTION OF CONTRACT: **Providing drainage facility to the residence of area**
- 6) FORUM THAT APPROVED THE SCHEME **P&D Department Govt: of Sindh**
- 7) TENDER ESTIMATED VALUE: **2.492 Millions**
- 8) ENGINEER'S ESTIMATE: **2.500 Millions**  
(For civil works only)
- 9) ESTIMATED COMPLETION PERIOD (AS PER CONTRACT) **06 Months**
- 10) TENDER OPENED ON (DATE & TIME) **15/09/2017 at 1.00 PM**
- 11) NUMBER OF TENDER DOCUMENTS SOLD: **10 Nos**  
(Attach list of buyers)
- 12) NUMBER OF BIDS RECEIVED **10 Nos**
- 13) NUMBER OF BIDDERS PRESENT AT THE TIME OF OPENING OF BIDS: **10 Nos**
- 14) BID EVALUATION REPORT **Hoisted on SPPRA website at EV ID # 2746/2017 dated 14/11/2017**
- 15) NAME AND ADDRESS OF THE SUCCESSFUL BIDDER **M/s. Muddesar Hussain**
- 16) CONTRACT AWARD PRICE **2.492 Millions**
- 17) RANKING OF SUCCESSFUL BIDDER IN EVALUATION REPORT  
(i.e. 1<sup>st</sup>, 2<sup>nd</sup>, 3<sup>rd</sup> EVALUATION BID). **1<sup>st</sup> Lowest**
- 18) METHOD OF PROCUREMENT USED : - (Tick one)
- a) SINGLE STAGE – ONE ENVELOPE PROCEDURE: **Yes**
- b) SINGLE STAGE – TWO ENVELOPE PROCEDURE:
- c) TWO STAGE BIDDING PROCEDURE
- d) TWO STAGE – TWO ENVELOPE BIDDING PROCEDURE
- PLEASE SPECIFY IF ANY OTHER METHOD OF PROCUREMENT WAS ADOPTED i.e. EMERGENCY, DIRECT CONTRACTING / NEGOTIATION ETC. WITH BRIEF REASONS:
- 19) APPROVING AUTHORITY FOR AWARD OF CONTRACT: **Chief Engineer PHED Govt: of Sindh Sukkur**
- 20) WHETHER THE PROCUREMENT WAS INCLUDED IN ANNUAL PROCUREMENT PLAN? **Yes**
- 21) ADVERTISEMENT :
- i) SPPRA Website **No. 34269 dated: 25/08/2017**  
( If yes, give date and SPPRA Identification No.)
- ii) News Papers **Yes**  
( If yes, give names of newspapers and dates) **Daily Imroz, dated: 26/08/2017**  
**Daily Awami Soch, dated: 30/08/2017**  
**Daily The Mail, dated: 26/08/2017**
- 22) NATURE OF CONTRACT **Local**
- 23) WHETHER QUALIFICATION CRITERIA **Yes ( Copy Enclosed)**

WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?

(If yes, enclose a copy)

24) WHETHER BID EVALUATION CRITERIA

Yes

WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?

N/A

( If yes, enclose a copy)

25) WHETHER APPROVAL OF COMPETENT AUTHORITY WAS OBTAINED FOR USING A METHOD OTHER THAN OPEN COMPETITIVE BIDDING?

Yes

26) WAS BID SECURITY OBTAINED FROM ALL THE BIDDERS?

Yes

27) WHETHER THE SUCCESSFUL BID WAS LOWEST EVALUATED

Lowest Evaluated Bid

BID / BEST EVALUATED BID (in case of Consultancies)

28) WHETHER THE SUCCESSFUL BIDDER WAS TECHNICALLY COMPLIANT ?

Yes

29) WHETHER NAMES OF THE BIDDERS AND THEIR QUOTED PRICES WERE READ OUT AT THE TIME OF OPENING OF BIDS?

Yes

30) WHETHER EVALUATION REPORT GIVEN TO BIDDERS BEFORE THE AWARD OF CONTRACT?

Yes

( Attach copy of the bid evaluation report)

31) ANY COMPLAINTS RECEIVED

No

32) ANY DEVIATION FROM SPECIFICATIONS GIVEN IN THE TENDER NOTICE / DOCUMENTS

( If yes, give details)

No

33) WAS THE EXTENSION MADE IN RESPONSE TIME?

No

( If yes, give reasons)

34) DEVIATION FROM QUALIFICATION CRITERIA

No

( If yes, give detailed reasons.)

35) WAS IT ASSURED BY THE PROCURING AGENCY THAT THE SELECTED FIRM IS NOT BLACK LISTED

Yes

36) WAS A VISIT MADE BY ANY OFFICER/OFFICIAL OF THE PROCURING AGENCY TO THE SUPPLIER'S PREMISES IN CONNECTION WITH THE PROCUREMENT? IF SO, DETAILS TO BE ASCERTAINED REGARDING FINANCING OF VISIT, IF ABROAD:

No

( If yes, enclose a copy)

37) WERE PROPER SAFEGUARDS PROVIDED ON MOBILIZATION ADVANCE PAYMENT IN THE CONTRACT (BANK GUARANTEE ETC.)?

N/A

38) SPECIAL CONDITIONS, IF ANY

N/A

( If yes, give Brief Description)

Signature & Official Stamp of

Authorized Officer

  
Executive Engineer  
Public Health Engg: Division  
Larkana





EXECUTIVE ENGINEER  
PUBLIC HEALTH ENGG: DIVISION I  
LARKANO

# 074-9410326

# 074-9410326

phedxen@gmail.com

No. AB/TC/  
Larkano dated:

2397 /of/2017  
20 /Nov/2017

**LETTER OF ACCEPTANCE**

To,

*Mr. Muddesar Hussain,  
Government Contractor,  
Larkano.*

**Subject: CONSTRUCTION OF C.C DRAINS & C.C BLOCKS IN VILLAGE  
KAMAL KHAN CHANDIO TALUKA RATODERO. (UNDER 10  
VILLAGES)**

This is to notify that your Bid dated: 15/09/2017 for execution of the subject work @ 53% above on the schedule rates has been accepted by the Executive Engineer Public Health Engineering Division I Larkano Amounting to Rs: 24,91,546/- (Twenty Four Lacs Ninety One Thousand Five Hundred & Forty Six Only).

The 5% Earnest Money of the subject work has already been received in the shape of Call Deposit / Pay Order amounting to Rs: 1,25,000/- Hence you are requested to furnish the cost of Stamps amounting Rs: 8,700/- to be fixed on the agreement to be executed / will have to be borne by you within 03 days of the receipt of this acceptance letter in accordance to the conditions of contract and sign the agreement attached herewith within stipulated time mentioned above, failing which the acceptance will be treated as cancelled and the amount of bid security will be forfeited without any further notice.

Copy forwarded with compliments to:

  
Executive Engineer  
Public Health Engg: Division I  
Larkano

- The Chief Engineer, Public Health Engineering Department Government of Sindh Sukkur for kind information and necessary action.
- The Superintending Engineer, Public Health Engg: Circle Larkano for information.

Const. of CC Drains CC Block in village Kamal Khan  
Chandio Taluka Ratodero (under 10 villages)

8700/-

SGP (Klip.) D. No. 105-11-94-50,000 L.F. of 8 Ls. each.

P.W.D. 287

G.R. P.W.D. Nos. 7934 of 6-4-35  
66-1 of 8-6-36, 1951-W of 27-9-37, O.C.M.P.  
and M. Deput. No. 383-1/37 of 7-11-37  
(P.W.D.) No. 5-173, 2-W of 22-2-38,  
(J. Rs (P.W.D.) No. 1038-1 of 22-2-37  
12-10-44 and 2-5-44, 6-4-W of 22-2-39  
12-10-44, and 2-5-44, 10-11-1 of  
25-3-49, 1-47-W 2 of 12-12-50.

FORM B-1

PUBLIC WORKS DEPARTMENT

PHE CIRCLE Larkana  
PHE DIVISION Larkana

M/s - Mullis Hussain

1139  
11/11/6

Percentage Rate Tender and Contract  
for works

General Rules and Directions for the Guidance of Contractors



S.D.K  
O. LARKANA

by, and whether the... in the event of... of  
any partner, it shall be signed on his behalf by a person holding a power-of-  
attorney authorizing him to do so.

3. Receipts for payments made on account of any work, when executed by a firm, shall also be signed by all the partners, except where the contractors are described in their tender as a firm, in which case the receipt shall be signed in the name of the firm by one of the partners, or by some other persons having authority to give official receipts for the firm.

4. Any person who submits a tender shall fill up the usual printed form stating at what percentage above or below the rates specified in Schedule 'B' memorandum showing items of work to be carried out; he is willing to under take the work. Only one rate of such percentage, on all the  $\frac{\text{Estimated rates}}{\text{Schedule rates}}$  shall be framed. Tenders, which propose any alteration in the works specified in the said form of invitation to tender or in the time allowed for carrying out the work, or which contain any other conditions, will be liable to rejection. No printed form of tender shall include a tender for more than one work, but if contractors wish to tender for two or more works they shall submit a separate tender for each. Tenders shall have the name and number of the work to which they refer written outside the envelope.

5. The Executive Engineer or his duly authorized Assistant shall open tenders in the presence of contractors who have submitted tenders or their representatives who may be present at the time, and he will enter the amounts of the several tenders in a comparative statement in a suitable form. In the identification, sign copies of the specifications and other documents mentioned in Rule 1. In the event of a tender being rejected the Divisional Officer shall authorize the Treasury Officer concerned to refund the amount of the earnest money for deposited to the contractor making the tender, on his giving a receipt for the return of the money.

6. The Officer competent to dispose of the tenders shall have right of rejecting all or any of the tenders.

M/s  
Contract

*[Signature]*  
Executive Engineer  
Public Works Department  
Larkana



EXECUTIVE ENGINEER  
PUBLIC HEALTH ENGG: DIVISION I  
LARKANO

# 074-9410326

# 074-9410326

phedxen@gmail.com

No. AB/TC/:  
Larkano dated:

2422 /of/2017  
22. /Nov/ 2017

### "WORK ORDER"

*Mr. Muddesar Hussain*  
Government Contractor,  
Larkano.

Subject: Construction of C.C Drains & C.C Blocks in village Kamal Khan Chandio Taluka Ratodero. (under 10 villages)

Reference: - Your B-I Tender opened on dated: 15/09/2017

Your percentage rate Tender for Rs.16,25,847/= (Rupees Sixteen Lacs, Twenty Five Thousand, Eight Hundred, Forty Seven) only @ 53% above the schedule items viz: Rs.24,91,546/= (Rupees Twenty Four Lacs, Ninety One Thousand, Five Hundred & Forty Six) only being the lowest rates is hereby approved/ accepted by the Superintending Engineer, PHE Circle Larkana vide Letter No. GC-II/PHED/2486 dated: 30/10/2017

You are, therefore, directed to please start the work within seven (07) days after issue of the 'Work order' according to drawing design & PWD specifications under the supervision of Assistant Engineer, Public Health Engg: S/Division Ratodero & instructions from the undersigned.

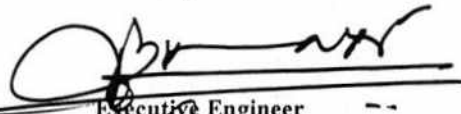
No premium will be allowed on non-schedule items.

No Extra charges such as Taxes, Octroi packing or transportation of material etc will be paid separately.

The work shall have to be completed by you within the period six (06) months as provided in the tender.

The Sindh Sales Tax Special Producer (withholding) Rules, 2011 shall apply to taxable service as or supplied, provided or rendered to persons, specified as withholding agents, in the withholding procedure, for the purpose of deduction and deposit of sales tax.

The undersigned reserves the right to reject any or all parts of it or order for replacement if it is not done as per drawing, design and P.H.E specifications.

  
Executive Engineer  
Public Health Engg: Division I  
Larkano

*C.F.W.Cs for favour of information to:*

1. The Superintending Engineer, Public Health Engg: Circle Larkana
2. The Assistant Engineer, Public Health Engg: S/Division Larkana

BILL OF QUANTITIES

(A)

Construction of C.C Drains & c.C Blocks in village Kamal Khan  
Chandio (under CC Blocks & CC Drains in various villages of Taluka

(B)

(Provincial ADP 2012-13)

Item	Quantities	Description and rate of Item to be executed at site	Rate	Unit	Amount in Rupees
1	2	3	4	5	6

Part-I C.C Drains

- 1 Excavation in foundation of building bridges and other structures  
i/c dag belling dressing refilling around the structures with excavated  
earth watering ramming lead up to 5ft (b) in ordinary soil (G.S.I-18/ P/4) ✓  
2952.00 cft ✓ @Rs 3176.25 ✓ P%0Cft ✓ Rs 9376 ✓
- 2 Cement concrete plain i/c placing compacting finishing  
and curing complete i/c screening and washing of stone  
aggregate without shuttering Ratio 1:4:8 (G.S.I-5(ii) P/17 ✓  
859.00 Cft ✓ @Rs 11288.75 ✓ P%0Cft ✓ Rs 96970 ✓
- 3 Construction of standard open type drains cunette block of C.C  
1:2:4 in situ to the design profile i/c cost of mould as per drawing  
i/c applying floating cost of cement 1/32" thick to the exposed face  
finished smooth curing etc complete as per detailed drawing .  
(P.H.S.I No D. P/ 58)  
Type A 800.0 Rft ✓ @Rs 94.00 ✓ P-Rft ✓ Rs 75200 ✓  
Type B 500.0 Rft ✓ @Rs 174.00 ✓ P-Rft ✓ Rs 87000 ✓
- 4 Pacca brick work in foundation and plinth in cement sand mortar(1:6)  
(G.S.I No. 4 (e) P/ 21) ✓  
2512.50 cft ✓ @Rs 11948.36 ✓ P%0Cft ✓ Rs 300203 ✓
- 5 Cement plaster (1:4) up to 20'height ½" thick (G.S.I-11(b) / P/52) ✓  
3750.00 Sft ✓ @Rs 2283.93 ✓ P%0Sft ✓ Rs 85647 ✓
- 6 R.C.C work i/c all labour and material except the cost of steel  
reinforcement and its labour for bending and binding which will  
be paid separately. This rate also includes all kinds of forms moulds  
lifting shuttering curing rendering and finishing the exposed surface  
i/c screening and washing of shingle (a) R.C work in roof slab beams  
columns,rafts lintels & other structural members  
laid in situ or precast laid in position complete in a respect. (i)  
Ratio 1;2;4 90 lbs cement 2 cft sand 4 cft shingle 1/8" to ¼" gauge.  
(G.S.I-6(a) P/17) ✓  
138.79 Cft ✓ @Rs 337.00 ✓ P-Cft ✓ Rs 46771 ✓
- 7 Fabrication of mild steel reinforcement for cement concrete i/c  
cutting bending laying in position making joints and fastening i/c  
cost of binding wire also includes removal of rust from bars.  
(G.S.I-8-b P/17) ✓  
4.9E Cwt ✓ @Rs 5001.70 ✓ P-Cwt ✓ Rs 24758 ✓

ment concrete plain i/c placing compacting finishing  
and curing complete i/c screening and washing of stone  
aggregate without shuttering Ratio 1:2:4 (G.S.I-5 f P/15)

72.94 Cft

@Rs. 14429.25 P% Cft Rs 10524

Total: (A) Rs 736449

Part- II CC BLOCKS

1 Barrow pit excavation undressed lead upto 100ft ordinary soil

(G.S.I. No. 3 (a) p/ 1)

9048.00 Cft

@Rs 2117.50 P%0Cft Rs 19159

2 Laying arth in 6" thick layers levelling and dressing etc completed

(G.S.I.No. 13 a p/ 3)

12000.00 Cft

@Rs 263.00 P%0Cft Rs 3156

3 Extra lead for every 50' Ft: additional lead or part thereof.(GSI NO.8P-3)

9048.00 Cft

@Rs 5039.00 P%0Cft Rs 45593

4 Cement concrete bricks or stone ballest 1/2" to 2" gauge.(Ratio 1:4:8)

(G.SI. No. 4(b) p/ 15)

3960 Cft

@Rs 9416.28 P%cft Rs 372885

5 Cement concrete plain i/c placing compacting, finishing  
and curing etc complete i/c sreening & washing of stone aggregate  
without shuttering (Ratio 1:2:4) (G.S.I No. 5 p/ 16)

3000 Cft

@Rs 14429.25 P%cft Rs 432878

6 Erection and removal of centering for R.C.C or plain C.C works  
of deodar wood (2nd class) (b) for partal wood (vertical).

(G.S.I.No. 19 p/ 18)

375.00 sft

@Rs 3127.41 P%sft Rs 11728

Total: Rs 885398

7 Supplying and fixing M.S iron board size (2x2.50) (LQR)

1 No

@Rs 4000.0 P.Each Rs 4000

Total: (B) Rs 889398

General Abstract

S.#	Sub- Works	Schedule Amount	N/S Amount	G.Total:
1	Part-I C.C drains	736449	0	Rs 736449
2	Part-II C.C Blocks	885398	4000	Rs 889398
	G.total:	1621847	4000	Rs 1625847

Amount Total (a)

53 % above / below on the rates CSR

Amount to be added /deducted on the  
basis of premium quoted. TOTAL(b)

Total (A) = a+b in words & figure:

Mi  
CONTRACTOR

[Signature]  
Executive Engineer  
Public Health Engg: Division-1  
Larkano

**SINDH PUBLIC PROCUREMENT REGULATORY AUTHORITY**  
**CONTRACT EVALUATION FORM**

- 1) NAME OF THE ORGANIZATION / DEPTT. **Public Health Engineering Department**
- 2) PROVINCIAL / LOCAL GOVT./ OTHER: **Provincial**
- 3) TITLE OF CONTRACT: **CONSTRUCTION OF C.C BLOCKS AND DRAINS IN VARIOUS MUHALLAS OF BENAZIR COLONY NAUDERO.**
- 4) TENDER NUMBER: **(10) No**
- 5) BRIEF DESCRIPTION OF CONTRACT: **Providing drainage facility to the residence of area**
- 6) FORUM THAT APPROVED THE SCHEME **P&D Department Govt: of Sindh**
- 7) TENDER ESTIMATED VALUE: **2.976 Millions**
- 8) ENGINEER'S ESTIMATE: **3.000 Millions**  
(For civil works only)
- 9) ESTIMATED COMPLETION PERIOD (AS PER CONTRACT) **06 Months**
- 10) TENDER OPENED ON (DATE & TIME) **15/09/2017 at 1.00 PM**
- 11) NUMBER OF TENDER DOCUMENTS SOLD: **07 Nos**  
(Attach list of buyers)
- 12) NUMBER OF BIDS RECEIVED **07 Nos**
- 13) NUMBER OF BIDDERS PRESENT AT THE TIME OF OPENING OF BIDS: **07 Nos**
- 14) BID EVALUATION REPORT **Hoisted on SPPRA website at EV ID # 2746/2017 dated 14/11/2017**
- 15) NAME AND ADDRESS OF THE SUCCESSFUL BIDDER **M/s. Asad & Brothers**
- 16) CONTRACT AWARD PRICE **2.976 Millions**
- 17) RANKING OF SUCCESSFUL BIDDER IN EVALUATION REPORT  
(i.e. 1<sup>st</sup>, 2<sup>nd</sup>, 3<sup>rd</sup> EVALUATION BID). **1<sup>st</sup> Lowest**
- 18) METHOD OF PROCUREMENT USED : - (Tick one)
- a) SINGLE STAGE – ONE ENVELOPE PROCEDURE: **Yes**
- b) SINGLE STAGE – TWO ENVELOPE PROCEDURE:
- c) TWO STAGE BIDDING PROCEDURE
- d) TWO STAGE – TWO ENVELOPE BIDDING PROCEDURE
- PLEASE SPECIFY IF ANY OTHER METHOD OF PROCUREMENT WAS ADOPTED i.e. EMERGENCY, DIRECT CONTRACTING / NEGOTIATION ETC. WITH BRIEF REASONS:
- 19) APPROVING AUTHORITY FOR AWARD OF CONTRACT: **Chief Engineer PHED Govt: of Sindh Sukkur**
- 20) WHETHER THE PROCUREMENT WAS INCLUDED IN ANNUAL PROCUREMENT PLAN? **Yes**
- 21) ADVERTISEMENT : **Yes**
- i) SPPRA Website **No. 34269 dated: 25/08/2017**  
( If yes, give date and SPPRA Identification No.)
- ii) News Papers **Yes**  
( If yes, give names of newspapers and dates) **Daily Imroz, dated: 26/08/2017**  
**Daily Awami Soch, dated: 30/08/2017**  
**Daily The Mail, dated: 26/08/2017**
- 22) NATURE OF CONTRACT **Local**
- 23) WHETHER QUALIFICATION CRITERIA **Yes ( Copy Enclosed)**

WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?

(If yes, enclose a copy)

24) WHETHER BID EVALUATION CRITERIA

Yes

WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?

N/A

( If yes, enclose a copy)

25) WHETHER APPROVAL OF COMPETENT AUTHORITY WAS OBTAINED FOR USING A METHOD OTHER THAN OPEN COMPETITIVE BIDDING?

Yes

26) WAS BID SECURITY OBTAINED FROM ALL THE BIDDERS?

Yes

27) WHETHER THE SUCCESSFUL BID WAS LOWEST EVALUATED BID / BEST EVALUATED BID (in case of Consultancies)

Lowest Evaluated Bid

28) WHETHER THE SUCCESSFUL BIDDER WAS TECHNICALLY COMPLIANT ?

Yes

29) WHETHER NAMES OF THE BIDDERS AND THEIR QUOTED PRICES WERE READ OUT AT THE TIME OF OPENING OF BIDS?

Yes

30) WHETHER EVALUATION REPORT GIVEN TO BIDDERS BEFORE THE AWARD OF CONTRACT?

Yes

( Attach copy of the bid evaluation report)

31) ANY COMPLAINTS RECEIVED

No

32) ANY DEVIATION FROM SPECIFICATIONS GIVEN IN THE TENDER NOTICE / DOCUMENTS

( If yes, give details)

No

33) WAS THE EXTENSION MADE IN RESPONSE TIME?

No

( If yes, give reasons)

34) DEVIATION FROM QUALIFICATION CRITERIA

No

( If yes, give detailed reasons.)

35) WAS IT ASSURED BY THE PROCURING AGENCY THAT THE SELECTED FIRM IS NOT BLACK LISTED

Yes

36) WAS A VISIT MADE BY ANY OFFICER/OFFICIAL OF THE PROCURING AGENCY TO THE SUPPLIER'S PREMISES IN CONNECTION WITH THE PROCUREMENT? IF SO, DETAILS TO BE ASCERTAINED REGARDING FINANCING OF VISIT, IF ABROAD:

No

( If yes, enclose a copy)

37) WERE PROPER SAFEGUARDS PROVIDED ON MOBILIZATION ADVANCE PAYMENT IN THE CONTRACT (BANK GUARANTEE ETC.)?

N/A

38) SPECIAL CONDITIONS, IF ANY

N/A

( If yes, give Brief Description)

Signature & Official Stamp of

Authorized Officer

Executive Engineer  
Public Health Engg: Division  
Larkana



EXECUTIVE ENGINEER  
PUBLIC HEALTH ENGG: DIVISION I  
LARKANO

# 074-9410326  
# 074-9410326  
phedxen@gmail.com

No. AB/TC/  
Larkano dated:

2408 /of/2017  
20 /Nov/2017

**LETTER OF ACCEPTANCE**

To,


*M/s. Asad & Brothers,  
Government Contractor,  
Larkano.*

**Subject: CONSTRUCTION OF C.C BLOCKS AND DRAINS IN VARIOUS MUHALLAS OF BENAZIR COLONY NAUDERO.**

This is to notify that your Bid dated: 15/09/2017 for execution of the subject work @ 51.50% above on the schedule rates has been accepted by the Executive Engineer Public Health Engineering Division I Larkano Amounting to Rs: 29,75,741/- (Twenty Nine Lacs Seventy Five Thousand Seven Hundred & Forty One Only).

The 5% Earnest Money of the subject work has already been received in the shape of Call Deposit / Pay Order amounting to Rs: 1,50,000/- Hence you are requested to furnish the cost of Stamps amounting Rs: 10,400/- to be fixed on the agreement to be executed will have to be borne by you within 03 days of the receipt at this acceptance letter in accordance to the conditions of contract and sign the agreement attached herewith within stipulated time mentioned above, failing which the acceptance will be treated as cancelled and the amount of bid security will be forfeited without any further notice.

Copy forwarded with compliments to:

  
Executive Engineer  
Public Health Engg: Division I  
Larkano

- The Chief Engineer, Public Health Engineering Department Government of Sindh Sukkur for kind information and necessary action.
- The Superintending Engineer, Public Health Engg: Circle Larkano for information.



Const. of CC Black and Dring in various Municipalities of  
Benazir Colony, Naudero.

SGP (Klp.) D. No. 105-11-94-50,000 L.F. of 8 ls. each.

P.W.D. 287

G.R. P.W.D. Nos. 7934 of 6-4-35  
86-1 of 8-6-36, 1951-W of 27-9-37, O.C.M.P.  
and M. Deptt. No. 383-P/37 of 9-11-37  
(P.W.D.) No. 5-17J, 2-W of 22-2-39,  
(G. R. (P.W.D.) No. 1038-1 of 22-2-37  
12-10-44 and 2-5-44 644-W of 22-2-39  
12-10-44, and 2-5-44, 43-W 1038/11-1 of  
28-3-49, 5-47-W 2 of 12-12-50.

FORM B-1

PUBLIC WORKS DEPARTMENT

PHE CIRCLE *Larkano*

PHE DIVISION *Larkano*

*M/s Asad & Brothers*

*139  
8/11/74*

Percentage Rate Tender and Contract  
for works

General Rules and Directions for the Guidance of Contractors



contract shall be notified in a  
hung up in the office of the  
Engineer.

as well as the date for  
allowed for carrying out the  
deposited with the tender, and  
by the successful tenderers  
It will also state whe-  
and ground rents will be  
and drawings and estimated  
required in connection with the  
for the purpose of identifi-  
contractors at the office of

being submitted by a firm, it must be  
signed separately by each partner thereof, or in the event of the absence of  
any partner, it shall be signed on his behalf by a person holding a power-of-  
attorney authorizing him to do so.

3. Receipts for payments made on account of any work, when executed  
by a firm, shall also be signed by all the partners, except where the contrac-  
tors are described in their tender as a firm, in which case the receipt shall  
be signed in the name of the firm by one of the partners, or by some other  
persons having authority to give official receipts for the firm.

4. Any person who submits a tender shall fill up the usual printed form  
stating at what percentage above or below the rates specified in 'Schedule 'B'  
memorandum showing items of work to be carried out: he is willing to un-  
der take the work. Only one rate of such percentage, on all the <sup>Estimated rates</sup> ~~Schedule rates~~ shall  
be framed. Tenders, which propose any alteration in the works specified in  
the said form of invitation to tender or in the time allowed for carrying out  
the work, or which contain any other conditions, will be liable to rejection.  
No printed form of tender shall include a tender for more than one work,  
but if contractors wish to tender for two or more works they shall submit a  
separate tender for each. Tenders shall have the name and number of the  
work to which they refer written outside the envelope.

5. The Executive Engineer or his duly authorized Assistant shall open  
tenders in the presence of contractors who have submitted tenders or their  
representatives who may be present at the time, and he will enter the amounts  
of the several tenders in a comparative statement in a suitable form. In the  
identification, sign copies of the specifications and other documents mention-  
ed in Rule 1. In the event of a tender being rejected the Divisional Officer  
shall authorize the Treasury Officer concerned to refund the amount of the  
earnest money for deposited to the contractor making the tender, on his giving  
a receipt for the return of the money.

6. The Officer competent to dispose of the tenders shall have right of  
rejecting all or any of the tenders.

*Asad*

*[Signature]*  
Executive Engineer  
Public Works Deptt. Division  
Larkana

*10400/5*



EXECUTIVE ENGINEER  
PUBLIC HEALTH ENGG: DIVISION I  
LARKANO

# 074-9410326

# 074-9410326

phedxen@gmail.com

No. AB/TC/:  
Larkano dated:

2426 /of/2017  
/Nov/ 2017

## "WORK ORDER"

*M/s. Asad & Brothers*  
*Government Contractor,*  
*Larkano.*

**Subject: CONSTRUCTION OF C.C BLOCKS AND DRAINS IN VARIOUS MUHALLAS OF BENAZIR COLONY NAUDERO.**

Reference: - Your B-I Tender opened on dated: 15/09/2017

Your percentage rate Tender for Rs.19,61,545/= (Rupees Nineteen Lacs, Sixty One Thousand, Five Hundred & Forty Five) only @ 51.50% above the schedule items viz: Rs.29,75,741/= (Rupees Twenty Nine Lacs, Seventy Five Thousand, Seven Hundred & Forty One) only being the lowest rates is hereby approved/ accepted by the Superintending Engineer, PHED Circle Larkana vide Letter No. GC-II/PHED/2498 dated: 30/10/2017

You are, therefore, directed to please start the work within seven (07) days after issue of the 'Work order' according to drawing design & PWD specifications under the supervision of Assistant Engineer, Public Health Engg: S/Division Ratodero & instructions from the undersigned.

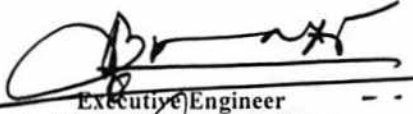
No premium will be allowed on non-schedule items.

No Extra charges such as Taxes, Octroi packing or transportation of material etc will be paid separately.

The work shall have to be completed by you within the period six (06) months as provided in the tender.

The Sindh Sales Tax Special Producer (withholding) Rules, 2011 shall apply to taxable service as or supplied, provided or rendered to persons, specified as withholding agents, in the withholding procedure, for the purpose of deduction and deposit of sales tax.

The undersigned reserves the right to reject any or all parts of it or order for replacement if it is not done as per drawing, design and P.H.E specifications.

  
Executive Engineer  
Public Health Engg: Division I  
Larkano

*C.F.W.Cs for favour of information to:*

1. The Superintending Engineer, Public Health Engg: Circle Larkana
2. The Assistant Engineer, Public Health Engg: S/Division Larkana

BILL OF QUANTITIES

Construction of C.C Blocks and Drains in various muhallas of  
Benazir colony Naudero (under District ADP New schemes 2016-17)

Item	Quantities	Description and rate of Item to be executed at site	Rate	Unit	Amount in Rupees
1	2	3	4	5	6

Part-I C.C Drains

- 1 Excavation in foundation of building bridges and other structures  
i/c dag belling dressing refilling around the structures with excavated  
earth watering ramming lead up to 5ft (b) in ordinary soil (G.S.I-18/ P/4)  
3615.00 cft @Rs 3176.25 P%0Cf Rs 11482
- 2 Cement concrete plain i/c placing compacting finishing  
and curing complete i/c screening and washing of stone  
aggregate without shuttering Ratio 1:4:8 (G.S.I-5(ii) P/17)  
1055.00 Cft @Rs 11288.75 P%Cft Rs 119096
- 3 Construction of standard open type drains cunette block of C.C  
1:2:4 in situ to the design profile i/c cost of mould as per drawing  
i/c applying floating cost of cement 1/32" thick to the exposed face  
finished smooth curing etc complete as per detailed drawing .  
(P.H.S.I No D, P/ 58)  
Type A 1000.0 Rft @Rs 94.00 P-Rft Rs 94000  
Type B 600.0 Rft @Rs 174.00 P-Rft Rs 104400
- 4 Pacca brick work in foundation and plinth in cement sand mortar(1:6)  
(G.S.I No. 4 (e) P/ 21)  
3075.00 cft @Rs 11948.36 P%Cft Rs 367412
- 5 Cement plaster (1:4) up to 20'height 1/2" thick (G.S.I-11(b) / P/52)  
4300.00 Sft @Rs 2283.93 P%Sft Rs 98209
- 6 R.C.C work i/c all labour and material except the cost of steel  
reinforcement and its labour for bending and binding which will  
be paid separately. This rate also includes all kinds of forms moulds  
lifting shuttering curing rendering and finishing the exposed surface  
i/c screening and washing of shingle (a) R.C work in roof slab beams  
columns,rafts lintels & other structural members  
laid in situ or precast laid in position complete in a respect. (i)  
Ratio 1;2;4 90 lbs cement 2 cft sand 4 cft shingle 1/8" to 1/4" gauge.  
(G.S.I-6(a) P/17)  
168.79 Cft @Rs 337.00 P-Cft Rs 56881
- 7 Fabrication of mild steel reinforcement for cement concrete i/c  
cutting bending laying in position making joints and fastening i/c  
cost of binding wire also includes removal of rust from bars.  
(G.S.I-8-b P/17)  
6.78 Cwt @Rs 5001.70 P-Cwt Rs 33920

Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without shuttering Ratio 1:2:4 (G.S.I-5 f P/15)

98.32 / Cft

@Rs. 14429.25 P% Cft Rs 14186

Total: (A) Rs 899587

Part- II CC BLOCKS

1 Barrow pit excavation undressed lead upto 100ft ordinary soil

(G.S.I. No. 3 (a) p/ 1)

10785.00 Cft

@Rs 2117.50 P%0Cf Rs 22837

2 Laying earth in 6" thick layers levelling and dressing etc completed

(G.S.I.No. 13 a p/ 3)

14400.00 Cft

@Rs 263.00 P%0Cf Rs 3787

3 Extra lead for every 50' Ft: additional lead or part thereof. (G.S.I NO.8P-3)

10785.00 Cft

@Rs 5039.00 P%0Cf Rs 54346

4 Cement concrete bricks or stone ballest 1/2" to 2" gauge. (Ratio 1:4:8)

(G.S.I. No. 4(b) p/ 15)

4752 Cft

@Rs 9416.28 P%cft Rs 447462

5 Cement concrete plain i/c placing compacting, finishing and curing etc complete i/c screening & washing of stone aggregate without shuttering (Ratio 1:2:4) (G.S.I No. 5 p/ 16)

3600 Cft

@Rs 14429.25 P%cft Rs 519453

6 Erection and removal of centering for R.C.C or plain C.C works

of deodar wood (2nd class) (b) for partial wood (vertical).

(G.S.I.No. 19 p/ 18)

450.00 sft

@Rs 3127.41 P% sft Rs 14073

Total: Rs 1061958

7 Supplying and fixing M.S iron board size (2x2.50) (LQR)

1 No

@Rs 4000.0 P.Each Rs 4000

Total: (B) Rs 1065958

General Abstract

S.#	Sub- Works	Schedule Amount	N/S Amount	G.Total:
1	Part-I C.C drains	899587	0	Rs 899587
2	Part-II C.C Blocks	1061958	4000	Rs 1065958
	G.total:	1961545	4000	Rs 1965545

Amount Total (a)

51.50% above/below on the rates CSR

Amount to be added /deducted on the basis of premium quoted. TOTAL(b)

Total (A) = a+b in words & figure:

CONTRACTOR

Executive Engineer  
Public Health Engg; Division-1  
Larkano