



KARACHI WATER & SEWERAGE BOARD

OFFICE OF THE DIRECTOR (DESIGN & ESTIMATE)

BID EVALUATION REPORT


1	Name of Procuring Agency:	KARACHI WATER & SEWERAGE BOARD
2	Tender Reference No:	SPPRA Serial No.35654 I.D No. _____
3	Tender Description/Name of Work/Item:	REPLACEMENT OF 12" DIA SUNK DOWN / UNSERVICEABLE RCC SEWERS COMMERCIAL MARKET, OPP. HAJI TARQI KABAB HOUSE BL-2, UC-8, TARIQ ROAD JAMSHED TOWN (SEWERAGE)-I
4	Method of Procurement:	Single Stage (One Envelop)
5	Tender Published:	Through SPPRA Web Site
6	Total Bid Documents Sold:	2 Nos
7	Total Bid Received:	2 Nos
8	Technical Bid Opening Date (if applicable):	N/A
9	No. of Bid Technically Qualified (if applicable)	N/A
10	Bid (s) Rejected:	NIL
11	Financial Bid Opening Date:	29-12-2017

12 BID EVALUATION REPORT


S#	Name of Firm / Bidder	COST OFFERED BY THE BIDDER	RANKING IN TERMS OF COST	COMPARISON WITH ESTIMATED COST	REASON FOR ACCEPTANCE / REJECTION	REMARKS
1	M/s. M.A Khan's Group of Construction	Rs.9,89,989/-	1 st Lowest	@0.008% Below	Pay Order and required documents are available. P.O # 18439330 dt:22-12-2017 Rs.20,000/-from HBL Hassan Square Branch Karachi	Substantially Responsive
2	M/s. Yar Jan & Brothers	Rs.9,91,873/-	2 nd Lowest	@0.182% Above	Pay Order and required documents are available. P.O # 18439331 dt:22-12-2017 Rs.20,000/-from HBL Hassan Square Branch Karachi	Substantially Responsive


The all concerned bidders are being informed accordingly.

The E.E Concerned for compliance of Rule-45 of SPPRA 2010 **M/s.M.A.Khan's Group of Construction** declared as the lowest responsive bidder by the Committee and recommended for sanction from Competent Authority.


(Muhammad Nawaz Khan)
D.A.O (District East)
Member / Secretary


(Saif-ul-Haque)
Additional Director Internal
Audit – KMC Member


(Maqsood Ahmed Shaikh)
Superintending Engineer (KMC)
Member


(Roshin Din Memon)
S.E (District East-A)
Member


(Saifuddin)
Director (Design & Estimate)
Convener

NIT No. SPPRA Serial No.35654

Method of Procurement: Single Stage Single Envelope.

Name of Work: REPLACEMENT OF 12" DIA SUNK DOWN / UNSERVICEABLE
RCC SEWERS COMMERCIAL MARKET, OPP. HAJI TARQI
KABAB HOUSE BL-2, UC-8, TARIQ ROAD JAMSHED TOWN
(SEWERAGE)-I

MINUTES OF BID OPENING MEETING.

A meeting of the procurement committee of this department was held on 29-12-2017 for opening the bids received in respect of subject NIT till deadlines of submission. The meeting was attended by all / following members of the procurement committee and the representative of bidders. (Attendance sheet is enclosed).

2. Two bidders submitted their bids till the deadline of submission.

- i. M/s. M.A.Khan's Group of Construction
- ii. M/s. Yar Jan & Brothers


3. The bids were opened at 2:30 P.M in the presence of the above mentioned participants and the rates quoted by bidders were read aloud and encircled by Chairman of the Procurement Committee.


S. No	Name of Firm	Quoted Price	Amount of Bid Security	Pay Order No- / Date
01	M/s. M.A Khan's Group of Const.	Rs.9,89,989/-	Rs.20,000/-	P.O # 18439330 dt:22-12-2017 from HBL Hassan Square Branch Karachi
02	M/s. Yar Jan & Brothers	Rs.9,91,873/-	Rs.20,000/-	P.O # 18439331 dt:22-12-2017 from HBL Hassan Square Branch Karachi


4. The bids do not contain any cutting or over-writing.


5. The committee shall examine all the bids as per the qualification / eligibility criteria provided in the bidding document and verify the documents and bid security submitted by the bidders (if required).


The meeting ended with the vote of thanks to and from the chair.


(Muhammad Nawaz Khan)
D.A.O (District East)
Member / Secretary


(Saif-ul-Haque)
Additional Director Internal
Audit – KMC Member


(Maqsood Ahmed Shaikh)
Superintending Engineer (KMC)
Member


(Roshin Din Memon)
S.E (District East-A)
Member


(Saifuddin)
Director (Design & Estimate)
Convener

Method and procedure of procurement: Open Competitive Bidding (National/ International Competitive Bidding) (Single Stage-One Envelope)


Description of work: **REPLACEMENT OF 12" DIA SUNK DOWN / UNSERVICEABLE RCC SEWERS COMMERCIAL MARKET, OPP. HAJI TARQI KABAB HOUSE BL-2, UC-8, TARIQ ROAD JAMSHED TOWN (SEWERAGE)-I**

Date of Opening: 29-12-2017


BIDDERS' ELIGIBILITY/ QUALIFICATION REPORT


Eligibility/ Qualification Criteria:

S. No.	Eligibility / Qualification Criteria	Bidders' Name	
		M/s.M.A.Khan's Group of Const.	M/s.Yar Jan & Brothers
1.	Registration with PEC (if applicable)	N/A	N/A
2.	NTN	Yes	Yes
3.	Sales Tax Registration (FBR)	N/A	N/A
4.	Registration with Sindh Revenue Board (SRB)	Yes	Yes
	Qualification Criteria:		
5.	Minimum three years' experience of relevant field.	Yes	Yes
6.	Turnover of at least last three years	Yes	Yes
7.	Required Bid Security is attached.	Yes	Yes
8.	Bid is signed, named and stamped by the authorized person of the firm along with Authorization letter.	Yes	Yes
9.	Any other factor deemed to be relevant by the procuring agency subject to provision of Rule-44	N/A	N/A
10.	Qualified/ disqualified	Qualified	Qualified


(Muhammad Nawaz Khan)
D.A.O (District East)
Member / Secretary


(Saif-ul-Haque)
Additional Director Internal
Audit – KMC Member


(Maqsood Ahmed Shaikh)
Superintending Engineer (KMC)
Member


(Roshin Din Memon)
S.E (District East-A)
Member


(Saifuddin)
Director (Design & Estimate)
Convener

COMPARATIVE STATEMENT

**Name of Work: REPLACEMENT OF 12" DIA SUNK DOWN / UNSERVICEABLE RCC SEWERS COMMERCIAL MARKET,
OPP. HAJI TARQI KABAB HOUSE BL-2, UC-8, TARIQ ROAD JAMSHED TOWN (SEWERAGE)-I**

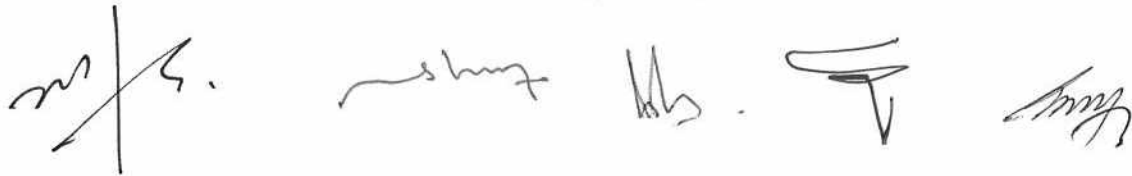
Item No	Description of Work	Estimated Cost				M/s.M.A.Khan's Group of Const.		M/s.Yar Jan & Brothers	
		Quantity	Rate	Per	Amount	Rate	Amount	Rate	Amount
1	Dismantling and removing road matling	2076.00 Cft	605.00	%Cft	12,559.80	600.00	12,456.00	800.00	16,608.00
2	Excavation for pipe line in trenches and pits in all kind of soil of murum i/c trimming and dressing sides to true alignment and shape leveling of beds of trenches to correct level and grade cutting joints holes and disposal of surplus earth within one chain as directed by Engineer Incharge providing fence guards, lights, flags sand temporary crossing for non-vehicular traffic wherever required lift upto 5 ft (1.52 m) and lead upto one chain (30.5m). i) Lift 0' - 5'ft	8304.00 Cft	4650.00	%0Cft	38,613.60	5000.00	41,520.00	5000.00	41,520.00
	ii) Lift 05' - 08'	6228.00 Cft	5200.00	%0Cft	32,385.60	5000.00	31,140.00	3000.00	18,684.00
3	Providing Manhole 4' feet inside with C.I Frame 15 Kg 5 feet clear depth 1:2:4 cast in situ with in 9" thick wall, 1:4:8: C.C in 6ft dia and 6" inch thick in foundation 1:2:4 C.C in benching 1/2" thick cement plaster with 1:3 cement mortar on all inside wall surfaces of channel and benching i/c making required nos of main and branch channels, 3/4" dia M.S Foot rest @12" c/c i/c cost of excavation in all kinds of soil, backfilling and disposal of excavated stuff etc complete as per design and instruction of Engineer Incharge.	8.00 Nos	14529.29	Each	116,234.32	15000.00	120,000.00	12000.00	96,000.00
3(i)	Add or deduct for extra / less depth then 5 ft or 4 ft dia manholes i/c footrest.	21.50 (+)Ft	2538.62	P/ft	54,580.33	2500.00	53,750.00	4000.00	86,000.00
4	Full hire charges of pumping set per day i/c of wages of driver and assistant fuel or electric energy platform for placing the pump etc at lower depth with suction and delivery pipes for pumping out water found at various depth from trenches including the cost of erection and dismantling after completion of the job. Hire charges of pumping set upto 10 HP pumping out water from 10 ft deep trench	52.00 Days	1500.00	P/Day	78,000.00	1500.00	78,000.00	3000.00	156,000.00

[Handwritten signatures and initials]

[Handwritten signature]

**Name of Work: REPLACEMENT OF 12" DIA SUNK DOWN / UNSERVICEABLE RCC SEWERS COMMERCIAL MARKET,
OPP. HAJI TARQI KABAB HOUSE BL-2, UC-8, TARIQ ROAD JAMSHED TOWN (SEWERAGE)-I**

Item No	Description of Work	Estimated Cost				M/s.M.A.Khan's Group of Const.		M/s.Yar Jan & Brothers		
		Quantity	Rate	Per	Amount	Rate	Amount	Rate	Amount	
5	Providing & Laying of RCC Pipes with Rubber Ring Joint and fitting in trench including cutting, fitting, jointing with rubber ring i/c testing with water to specified pressure. 12" Dia	692.00	Rft	367.00	P/Rft	253,964.00	360.00	249,120.00	500.00	346,000.00
6	Manufacturing and supplying of RCC Manhole covers cast in situ 1:2:4 concrete ratio 3" deep at centre, reinforced with 1/2" dia tor steel bars @ 4" C/C welded to a 3/16" thick 2" wide M.S plate two hook of 3/8" dia tor bar including compacting i/c cutting and transportation with in 10 miles. 21" dia.	20.00	Nos	913.63	Each	18,272.60	900.00	18,000.00	400.00	8,000.00
7	Making connection with the existing manhole including the cost of cutting hole in wall, making them good in C.C 1:2:4 and making the required channel etc. complete	6.00	Nos	180.00	Each	1,080.00	200.00	1,200.00	100.00	600.00
8	Manufacturing and supplying of RCC Ring Slab of 21" dia (inside) and 36" dia outside 7 1/2" width and 6" thick i/c 3/8" dia tor steel bars two concentric rings with 3/8" dia 8 Nos cross linked bars welded and two sunk type hooks, casted in 1:1 1/2:3 concrete with embedded 15 Kg C.I Frame in perfect position i/c transportation charges for an average lead of 20 Km per trip from casting yard to town office. (A minimum of 25 slabs per trip will be transported.	20.00	Nos	1906.60	Each	38,132.00	1900.00	38,000.00	500.00	10,000.00
9	Shifting to the site and fixing 36" dia ring slab in perfect position on damaged manhole i/c cutting of the position of damaged manhole in proper shape laying in layer of C.M in 2" thickness and disposal of the debris.	20.00	Nos	563.09	Each	11,261.80	600.00	12,000.00	400.00	8,000.00



**Name of Work: REPLACEMENT OF 12" DIA SUNK DOWN / UNSERVICEABLE RCC SEWERS COMMERCIAL MARKET,
OPP. HAJI TARQI KABAB HOUSE BL-2, UC-8, TARIQ ROAD JAMSHED TOWN (SEWERAGE)-I**

Item No	Description of Work	Estimated Cost				M/s.M.A.Khan's Group of Const.		M/s.Yar Jan & Brothers		
		Quantity	Rate	Per	Amount	Rate	Amount	Rate	Amount	
10	Cement concrete plain including placing compacting, fitting finishing and curing, complete (including screening and washing at stone aggregate without shuttering. Ratio 1:2:4	410.65	Cft	14429.25	%Cft	59,253.72	14000.00	57,491.00	8000.00	32,852.00
11	Providing and fixing C.I Frame including cost of material etc.	100.00	Kg	70.00	P/Kg	7,000.00	76.00	7,600.00	50.00	5,000.00
12	Hire charges of Steel shuttering both side for the construction of main hole (circular) at side i/c its erection in proper position and removal after concrete etc complete.	45.00	Ft	99.00	P/Ft	4,455.00	100.00	4,500.00	50.00	2,250.00
13	Sand Haro or any other source sand of same modules of the fineness (Hill Sand)	2076.00	Cft	2425.00	%Cft	50,343.00	2000.00	41,520.00	700.00	14,532.00
14	Refilling the excavated stuff in trenches 6" thick layer i/c watering ramming to full compaction etc complete.	11606.41	Cft	2760.00	%0Cft	32,033.69	2000.00	23,212.82	700.00	8,124.49
15	Carriage of 100 Cft / 5 Tons of all materials like stonne aggregate, spawl, coal, lime, surkhi etc B.G Rail fastening points and crossing bridges, Girders, pipes sheet Rail, M.S Bars etc. or 1000 Nos bricks, 10"x 5"x3" or 1000 Nos: tiles, 12" x6"x2" or 150 Cft of timber or 100 Maunds of fuel wood by trucks or any other means owned by the Contractors. Carriage for 05 Miles	2925.59	Cft	714.29	%Cft	20,897.20	700.00	20,479.13	400.00	11,702.36

Handwritten signature

Handwritten signature


Handwritten signature

Handwritten signature


Handwritten signature


**Name of Work: REPLACEMENT OF 12" DIA SUNK DOWN / UNSERVICEABLE RCC SEWERS COMMERCIAL MARKET,
OPP. HAJI TARQI KABAB HOUSE BL-2, UC-8, TARIQ ROAD JAMSHED TOWN (SEWERAGE)-I**


Item No	Description of Work	Estimated Cost				M/s.M.A.Khan's Group of Const.		M/s.Yar Jan & Brothers		
		Quantity	Rate	Per	Amount	Rate	Amount	Rate	Amount	
16	Cleaning inside Sewerage line completely restoring original silt free space / diameter of pipe lines by labour and equipment (Mechanically / Electrically driven). Including accessories like pulley's steel rope, buckets and draggers sizing from 6" to 18" dia their "to and fro" pulling action (No of passes shall be as many as required) would be undertaken in two phases (First phase entire length from down stream to up stream) bringing down peak hours sewage to flow inside pipe line (as free flow) and in 2nd phase from up stream to down stream of entire length using no silt to observed in bucket (6" dia to 18" dia) except only sewage water finally passing a ball of 12" lesser then the diameter of pipe but no exceeding 48" dia ball even for larger dia pipe to ensure perfect cleaning. The job including all the hire / cost of equipment and accessories of above wincing machine / devises alongwith / Engine with winching drum set having, steel rope pulley mounted over it, steel bucket 6" to 18" dia hocks and other protection like safety barriers, traffic signs, traffic cones ensuring no damages to pipe line alongwith ensuring safety to labour and other public property / lives and removla of silts / solid during desilting and clearance of site etc complete as per full satisfaction of site Engineer. 12" dia	2000.00	Ft	80.50	P/Ft	161,000.00	90.00	180,000.00	65.00	130,000.00
TOTAL QUOTED / CORRECTED COST						990,067		989,989		991,873


(Muhammad Nawaz Khan)
D.A.O (Distt. East)
Member / Secretary


(Saif-ul-Haque)
Addl. Director Internal Audit
KMC - Member


(Maqsood Ahmed Shaikh)
Superintending Engineer (K.M.C)
Member


(Roshin Din Memon)
S.E (District East-A)
Member


(Saifuddin)
Director (Design & Estimate)
Convener
01.01.18

