




KARACHI WATER & SEWERAGE BOARD
OFFICE OF THE CHIEF ENGINEER (IP&D)

BID EVALUATION REPORT


1	Name of Procuring Agency	KARACHI WATER & SEWERAGE BOARD
2	Tender Reference No	SPPRA Serial No.18468 I.D No. /2013
3	Tender Description/Name of Work/Item	REPLACEMENT OF 4" DIA A.C / C.I LINE BY PASS 110 MM POLYETHYLENE PIPE AT RATTAN TALAB, GALI NO.1 AND 3. SADDAR TOWN AND REPAIR THE LEAKAGES OF 18" DIA AND 24" DIA WATER LINES AND MANUFACTURING & PROVIDING / FIXING STAINLESS STEEL SPINDLE 18" DIA AND 24" AT DIFFERENT PLACES FOR THE IMPROVEMENT OF WATER SUPPLY POSITION IN SADDAR, DISTRICT SOUTH.
4	Method of Procurement	Single Stage (One Envelop)
5	Tender Published	Through Web Site
6	Total Bid Documents Sold	2 Nos
7	Total Bid Received	2 Nos
8	Technical Bid Opening Date (if applicable)	N/A .
9	No. of Bid Technically Qualified (if applicable)	N/A .
10	Bid (s) rejected	Nil
11	Financial Bid Opening Date	20/01/2014

S#	NAME OF FIRM OR BIDDER	COST OFFERED BY THE BIDDERS	RANKING IN TERMS OF COST	COMPARISON WITH ESTIMATED COST	REASON FOR ACCEPTANCE/ REJECTION	REMARKS
1	M/s. Unity Associates	Rs. 997,654/-	1st Lowest	@ 0.1943% Below	Substantially Responsive	P.O # AAA11135570 Dt: 20/01/2014 Rs 20,000/- Allied Bank Paposh Nagar Br
2	M/s. Saim & Co.	Rs. 1,031,576/-	2nd Lowest	@ 3.1992% Above	Substantially Responsive	P.O # 9621825 Dt: 23/12/2013 Rs 22,000/- HBL Khadija Mark Blk-1 North Nazimabad Br


The all concerned bidder are being informed accordingly.
The E.E Concerned for compliance of rule 45 of SPPRA 2010 M/s. Unity Associates declared as the lowest responsive bidder by the Committee and recommended for Sanction from Competent Authority.


(Muhammad Nawaz Khan)
Accounts Officer (South)
Member/Secretary


(Saif-ul-Haque)
Additional Director Internal
Audit - KMC Member


(Maqsood Ahmed Shaikh)
Superintending Engineer (KMC)
Member


(Muhammad Arif)
Chief Engineer (South)
Member


(Abdul Rahim Khattai)
Chief Engineer (IPD),
(Convener)

COMPARATIVE STATEMENT
NAME OF WORK: REPLACEMENT OF 4" DIA A.C / C.I LINE BY PASS 110 MM POLYETHYLENE PIPE AT RATTAN TALAB, GALI NO.1 AND 3, SADDAR TOWN AND REPAIR THE LEAKAGES OF 18" DIA AND 24" DIA WATER LINES AND MANUFACTURING & PROVIDING / FIXING STAINLESS STEEL SPINDLE 18" DIA AND 24" AT DIFFERENT PLACES FOR THE IMPROVEMENT OF WATER SUPPLY POSITION IN SADDAR, DISTRICT SOUTH.

S.No	Description of Work	Engineer's Estimate				M/s. Unity Associates		M/s. Saim & Co	
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount
1	Dismantling and removing road mantling Excavation for pipe line in trenches & pits in all kind of soil of muram i/c trimming and dressing sides to the true alignment & shape leveling of beds of trenches to correct level and grade cutting joints holes & disposal of surplus earth with in a one chain as directed by Engineer Incharge providing fence guard light flag, and temporary crossing for non-vehicle traffic where ever required lift up to 5ft (1.52m) and lead up to on chain (30.5m)	3125 Cft	605.00	% Cft	18,906.25	605.00	18,906.25	605.00	18,906.25
2	Excavation for pipe line in trenches & pits in wet soil clay or mud i/c trimming and dressing sides to the true alignment & shape leveling of beds of trenches to correct level and grade cutting joints holes & disposal of surplus earth with in a one chain as directed by Engineer Incharge providing fence guard light flag, and temporary crossing for non-vehicle traffic where ever required lift up to 5ft (1.52m) and lead up to on chain (30.5m)	12500 Cft	4,650.00	% 0 Cft	58,125.00	4,650.00	58,125.00	4,650.00	58,125.00
3	Providing Laying & fixing in trench i/c fitting jointing & testing etc complete in all respect the High Density Polyethylene pipe (HDPE-100) for B.S 3580 & psi 3051 (PN-10). 110mm	3125 Cft	5,400.00	% 0 Cft	16,875.00	5,400.00	16,875.00	5,400.00	16,875.00
		3125 Cft	5,950.00	% 0 Cft	18,593.75	5,950.00	18,593.75	5,950.00	18,593.75
4	Providing of C.I. Sluice Valve heavy pattern (test pressure 21.0 kg/sq cm or 300 lbs /sq inch /unported)	1250 Rft	268.00	P/Rft	335,000.00	267.00	333,750.00	268.00	335,000.00
5		2 Nos	5,460.00	Each	10,920.00	5,400.00	10,800.00	6,000.00	12,000.00

NAME OF WORK: REPLACEMENT OF 1" DIA A.C.G. LINE BY PASS 140 MM POLYETHYLENE PIPE AT RATTAN TALAB, GALI NO.1 AND 3, SADDAR TOWN AND REPAIR THE LEAKAGES OF 18" DIA AND 24" DIA WATER LINES AND MANUFACTURING & PROVIDING / FIXING STAINLESS STEEL SPINDLE 18" DIA AND 24" AT DIFFERENT PLACES FOR THE IMPROVEMENT OF WATER SUPPLY POSITION IN SADDAR, DISTRICT SOUTH.

S.No	Description of Work	Engineer's Estimate			M/s. Unity Associates		M/s. Saim & Co		
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount
6	Fixing of Sluice valve with 2 cost iron tail piece one end of flanged And other with socket i/c cost of nut bolts packing and etc complete. 4" dia	2 Nos	1,532.00	Each	3,064.00	1,500.00	3,000.00	2,000.00	4,000.00
7	Providing & Fixing Split Collar Tee on PRCC Pipe of different sizes having with mentioned against each item suit the size of connection fabricated with 3/8" thick M.S Plate existing the cost of the neck it includes the cost of 3/4" thick M.S square bars on both ends 4 Nos 3/4" M.S flanges with a total weight as mentioned against each items. it also includes the cost nut & bolts, rubber packing, labour and sealing material and all the tools & plants. Weight = 104.86 12"x12" (2'-0') Weight = 133.490 18"x18" (2'-0')	1 No 1 No	19,037.00 24,521.00	Each Each	19,037.00 24,521.00	19,000.00 24,500.00	19,000.00 24,500.00	20,000.00 25,000.00	20,000.00 25,000.00
8	Providing and fixing 0-9 long 3/8" thick M/S neck to existing M/S pipe or to split collar Tee having a total weight as mentioned against each item i/c the cost of fabrication and welding to the split collar tee Weight 6.666 Kg..... 4" dia	2 No	1,229.00	Each	2,458.00	1,200.00	2,400.00	1,300.00	2,600.00

Handwritten signature
10/12/18

Handwritten signature
M/s. Saim & Co

Handwritten signature

NAME OF WORK: REPLACEMENT OF 4" DIA A.C. C.I. LINE BY PASS 110 MM POLYETHYLENE PIPE AT RATTAN TALAB, GALI NO.1 AND 3, SADDAR TOWN AND REPAIR THE LEAKAGES OF 18" DIA AND 24" DIA WATER LINES AND MANUFACTURING & PROVIDING / FIXING STAINLESS STEEL SPINDLE 18" DIA AND 24" AT DIFFERENT PLACES FOR THE IMPROVEMENT OF WATER SUPPLY POSITION IN SADDAR, DISTRICT SOUTH.

S.No	Description of Work	Engineer's Estimate			M/s. Unity Associates		M/s. Saim & Co		
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount
9	Construction of C.C Block masonry chamber of size 4 'x4 'x4' (inside dimension) with 24"x24" C.I. cover from with 50 Kg fixed R.C I:2:4 slab 4.5 inches thick with steel 1/2" dia for bars @ 6" C.C with chamber sent up both way distribution bar 6" c.c I:4:8 m foundation 2" thick c.c 1:2:4 flooring 1/2" thick cement plaster 1:3 ratio inside wall surface top and bottom slab outer side wall surface 1 foot deep up to roof slab M.S foot rest 5/8" bars at every 2foot deep 1/2" curing dewatering excavati on refilling and disposal of surplus earth complete 4 'x4 'x4 '.	2 Nos	28,357.00	Each	56,714.00	28300	56600	29000	58,000.00
10	Full hire charges of pumping set i/c wages of driver and Assistant fuel or electric energy plate form required for placing or at lower depths with suction and delivery pipes for pumping and water found at various depth form trenches i/c cost of erection and dismantling after completion of the job.	30 Day	1,500.00	P/Day	45,000.00	1500	45000	1500	45,000.00
11	Add Deduct for extra / less depth then 5 ft of 4ft dia manholes i/c footrest.	24 Inches	187.20	P/Inch	4,492.80	187	4488	190	4,560.00
12	Sand Hero or any other source sand of the same modules of the fitness (Hill Sand)	6079 Cft	2,425.00	% Cft	147,415.75	2,425.00	147,415.75	2,425.00	147,415.75
13	Refilling the excavated stuff in trenches 6" th i/c layer including watering ramming to full compaction etc. complete	12500 Cft	2,760.00	% 0 Cft	34,500.00	2,760.00	34,500.00	2,760.00	34,500.00

(Handwritten signature)
(Handwritten signature)
 10/12/2010

...TALAB, GALI NO.1 AND :
 ... AND MANUFACTURING & PROVIDING / FIXING STAINI
 ... OF WATER SUPPLY POSITION IN SADDAR, DISTRIC
 SOUTH.

S.NO	Description of Work	Engineer's Estimate			M/s. Unity Associates		M/s. Saim & Co		
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount
14	Manufacturing & Providing / Fixing Stainless Spindle & Gum metal nuts of different size of different Source Valve.	2 Nos	23,820.00	Each	47,640.00	23800			
		2 Nos	41,305.00	Each	82,610.00	41300	47600	24000	48,000.00
15	Repair of leaking joints external vaitta on PRCC pipe i/c cost of excavation, labour, sealing material, dewatering and refilling of the excavated stuff	4 Nos	13,841.00	Each	55,364.00				
		1 Nos	18,360.00	Each	18,360.00	13800	55200	20000	80,000.00
	Say				999,596.55	18300	18300	19000	19,000.00
					999,597		997,653.75		1,031,575.75
							997,654		1,031,576

(Signature)
 21/12

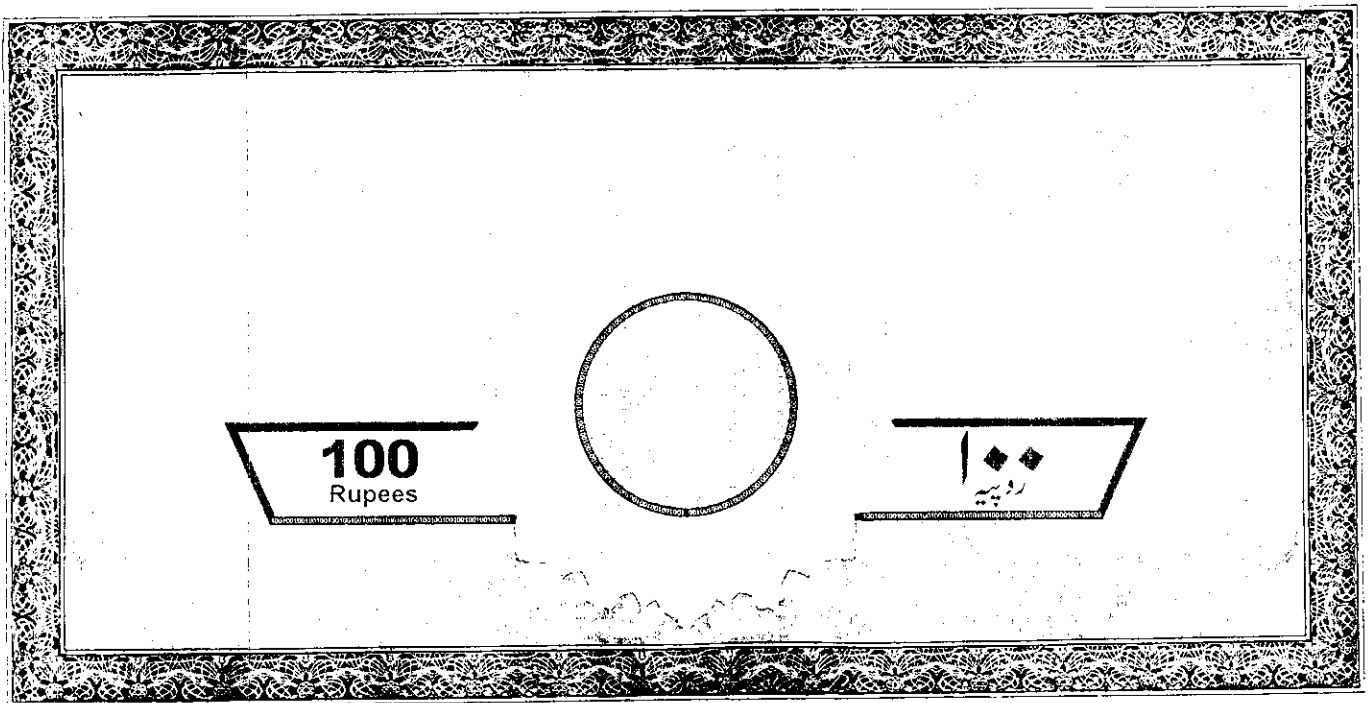
(Muhammad Nawaz Khan)
 Accounts Officer (South)
 Member/Secretary

(Saif-ul-Haque)
 Additional Director Internal
 Audit - KMC Member

(Muhammad Arif)
 Chief Engineer (South)
 Member

(Signature)
 (Abdul Rahim Khattii)
 Chief Engineer (IPD), (Corvener)

(Signature)
 (Maqsood Ahmed Shaikh)
 Superintending Engineer (KMC)
 Member



IN WITNESS WHEREOF, the parties hereto have set their respective hands and seals the day and year first above written.

27 JUN 2013

Signed, Sealed and Delivered by the.

139200

[Faint handwritten text]

For and on behalf of
EMPLOYER

For and on behalf of
CONTRACTOR

[Signature]
MUHAMMAD ARIF
CHIEF ENGINEER DISTRICT SOUTH
K.W.&S.B.

[Signature]
OWAIS AHMED KHAN
MANAGING PARTNER
M/S. UNITY ASSOCIATES.

WITNESS OF EMPLOYER

WITNESS OF CONTRACTOR

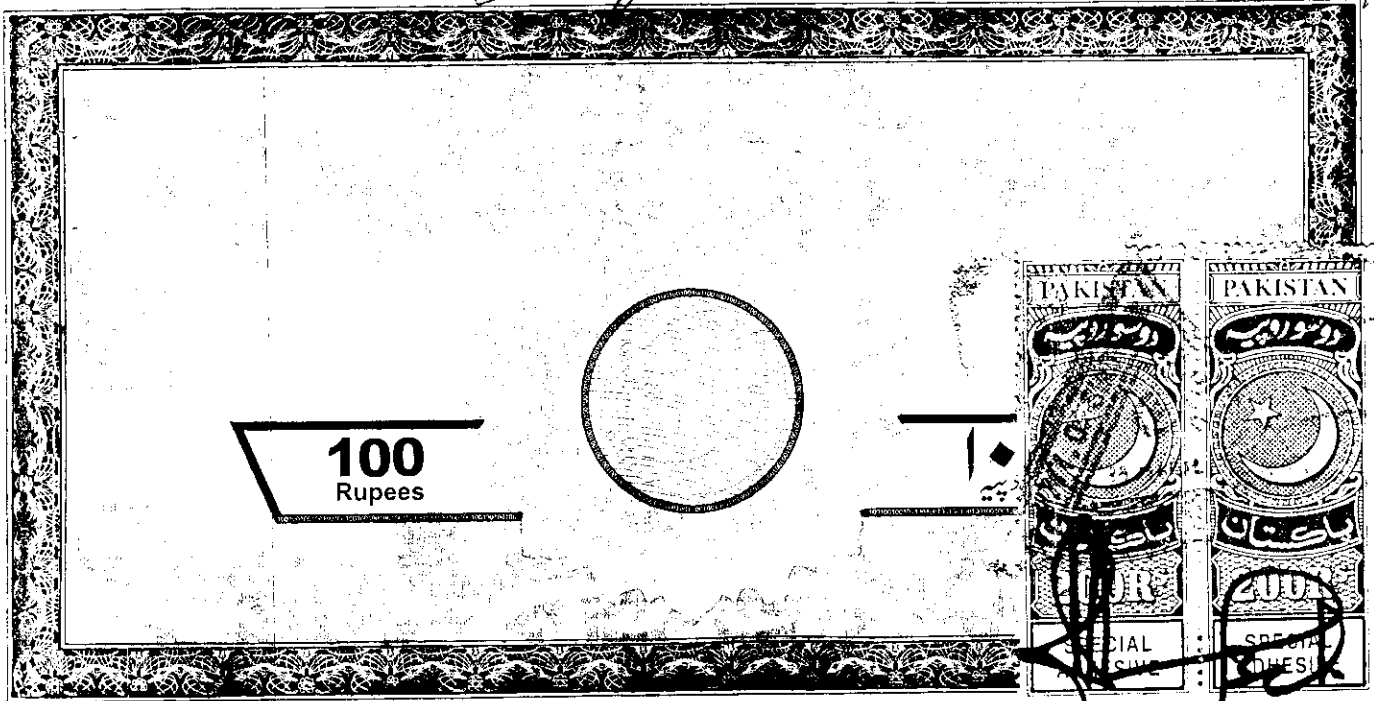
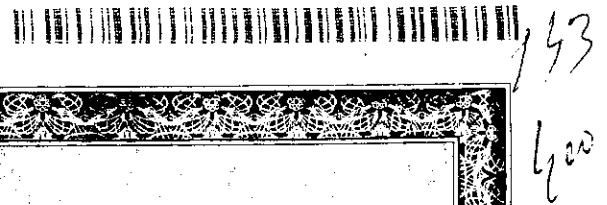
[Signature]
MUHAMMAD ASLAM AWAN
SUPERINTENDING ENGINEER
OLD CITY SADDAR, DISTRICT SOUTH
K.W.&S.B.

[Signature]
W. Iqbal Hussain

[Signature]
TARIQ SHAH BUKHARI
EXECUTIVE ENGINEER (WATER)
OLD CITY SADDAR, DISTRICT SOUTH
K.W.&S.B.

[Signature]
Neel Universal Electric Works

S007



QIB IMRAN STAMP VENDOR

License No. 94 Shop No. 16 Block-14
 West Point, Tadmira-e-Lahar, Karachi

Now this Agreement witnesses as follows:-

1. In this Agreement words and expression shall have the same meanings as are respectively assigned to them in the conditions of Contract hereinafter referred to.


2. The following documents which for the purpose of identification have been signed by **MR. OWAIS AHMED KHAN** on behalf of the contractor and by **MR. MUHAMMAD ARIF, CHIEF ENGINEER, DISTRICT SOUTH, KW&SB**, on behalf the EMPLOYER all of which shall be deemed to form and be read and construed as part of this Agreement.

- a). This Form of Agreement.
- b). Employer letter of Acceptance No.CE/DS/W&S/KW&SB/2014/58 dated: 14-4-2014.
- c). The Tender.
- d). The conditions of the Particular Application – Part-II-A & II-B.
- e). The General Conditions – Part-I.
- f). The Drawings.
- g). The specifications and
- h). The Priced Bill of Quantities.
- i) Time period is 30 Days.

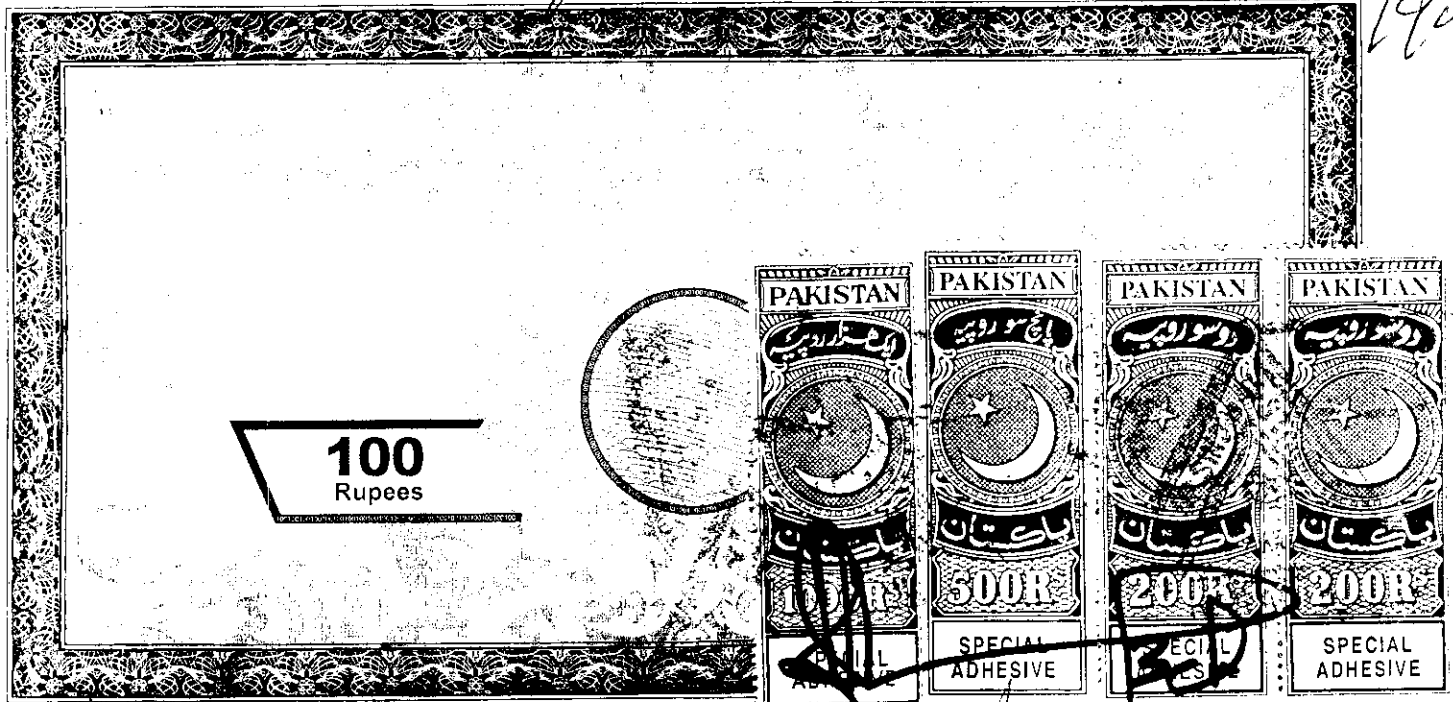
3. In consideration of the payments to be made by the EMPLOYER to the CONTRACTOR has hereinafter mentioned, the CONTRACTOR hereby covenants with the EMPLOYER to execute and complete the WORK and to remedy any defects therein and maintaining the same in conformity in all respects with the provisions of the CONTRACT.

4. THE EMPLOYER hereby covenants to pay to the CONTRACT in the manner prescribed by the CONTRACT.

2007



143
1900



CONTRACT AGREEMENT


28 MAR 2014

089329

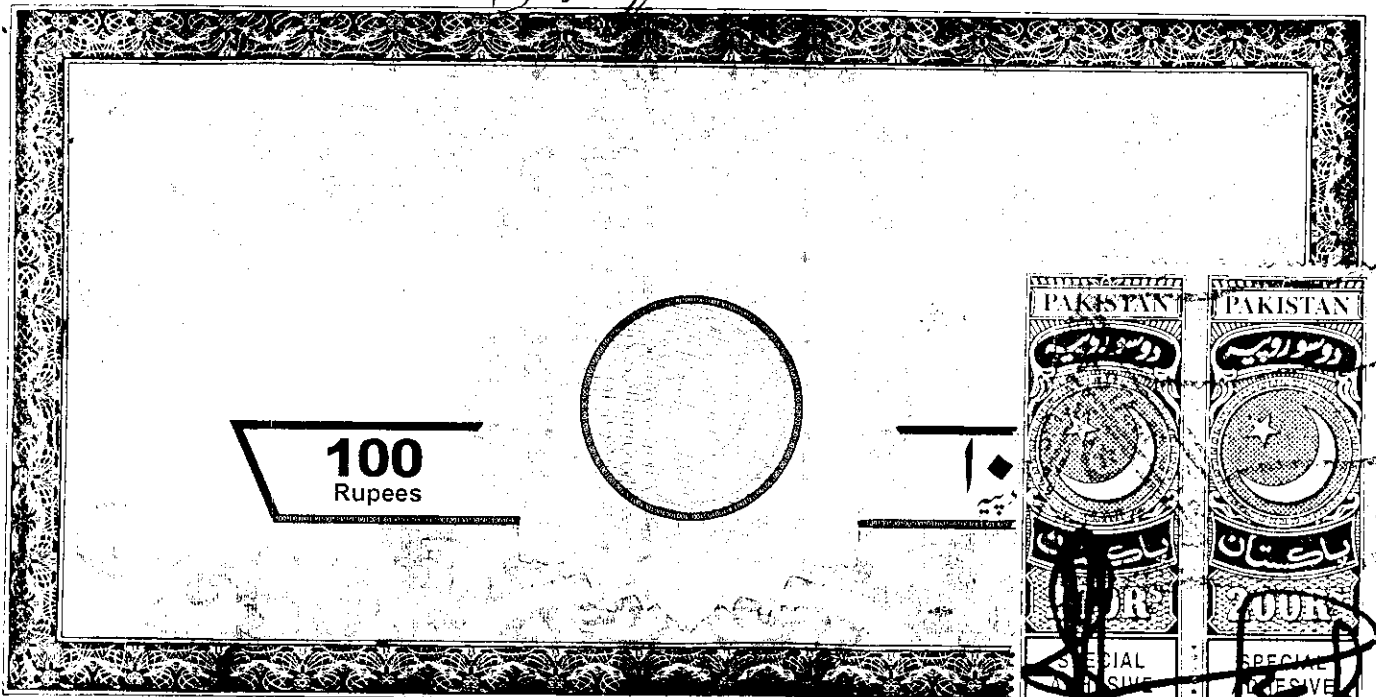
This CONTRACT AGREEMENT made the 14th day of April 2014, between the Karachi Water & Sewerage Board (KW&SB), Government of Sindh, Represented by its Chief Engineer, District South, KW&SB, (hereinafter called the "Employer" which expression shall wherever the context so admits or required to deemed to include their successor) on the one part as first Party M/S. UNITY ASSOCIATES, having their office at 3-A Anarkali Market, Nazimabad No.5, Karachi Represented by the MR. OWAIS AHMED KHAN hereinafter called the "Contractor" (which expression shall wherever the context so admit or required be deemed to include their Executors. Administrators. Successors and permitted Assignees) on other part as second party.

WHEREAS the Employer is desirous to execute the work **"REPLACEMENT OF 4" DIA A.C / C.I LINE BY PASS 110 MM POLYETHYLENE PIPE AT RATTAN TALAB, GALI NO.1 AND 3, SADDAR TOWN AND REPAIR THE LEAKAGES OF 18" DIA AND 24" DIA WATER LINES AND MANUFACTURING & PROVIDING / FIXING STAINLESS STEEL SPINDLE 18" DIA & 24" DIA AT DIFFERENT PLACES FOR THE IMPROVEMENT OF WATER SUPPLY POSITION IN SADDAR, DISTRICT SOUTH"**, UNDER KW&SB'S OWN FUNDED PROGRAMME, for Rs.9,97,654/= (RUPEES NINE LACS NINETY SEVEN THOUSAND SIX HUNDRED FORTY FOUR ONLY), for the construction and completion of such WORKS and the remedying of an defects therein. The tender called upon through Authority's Website of SPPRA Rule-2010, under Serial No.18468.

AND WHEREAS THE CONTRACTOR has already deposited 2% Pay Order for



143
600



QIB IMRAN STAMP VENDOR IN WITNESS WHEREOF, the parties hereto have set their respective hands
and seals the day and year first above written.
Office No 94 Shop No 16 Block 14
Mirza Plaza Gulshan-e-Iqbal Karachi.

DATE: 27 MAR 2014 Signed, Sealed and Delivered by the.

Signature of Muhammad Yaqoob
For and on behalf of
EMPLOYER

Signature of Owais Ahmed Khan
For and on behalf of
CONTRACTOR

MUHAMMAD ARIF
CHIEF ENGINEER DISTRICT SOUTH
K.W.&.S.B.

OWAIS AHMED KHAN
MANAGING PARTNER
M/S. UNITY ASSOCIATES.

WITNESS OF EMPLOYER

WITNESS OF CONTRACTOR

TABISH RAZA HASNAIN
SUPERINTENDING ENGINEER
CLIFTON, DISTRICT SOUTH
K.W.&.S.B.

TANVEER AHMED SHEIKH
EXECUTIVE ENGINEER (WATER)
CLIFTON, DISTRICT SOUTH
K.W.&.S.B.

16822730554423100

http://10.224.253.5/T24ABL/servlet/BrowserServlet



Allied Bank

ALLIED BANKERS CHEQUE

ABC No. AAA 11135570

Date

0168
PAPOSH NAGAR, KARACHI

NOT OVER PKR ***20,000.00***

PAY

Payees A/C Only

20 JAN 2011

OR ORDER

K.W.S.B*****

RUPEES

TWENTY THOUSAND ONLY

Rs.

20,000.00

FOR ALLIED BANK LIMITED

Payable at issuing branch

Please debit Account No.

PKR1757100010168

of branch

0168

Authorized Signatory
IBS No.

Authorized Signatory
IBS No.

DO NOT WRITE BELOW THIS LINE

⑈ 11135570⑈0140168⑈0001757100010000⑈010⑈



KARACHI WATER & SEWERAGE BOARD

OFFICE OF THE EXECUTIVE ENGINEER (W)

(SADDAR OLD CITY DISTRICT SOUTH)

1ST FLOOR UC-8 OFFICE JEHANGIR PUTANGI ROAD SADDAR KARACHI.

Cell: 0331-2435582

SUBJECT:- REPLACEMENT OF 4" DIA A.C /C.I LINE BY PASS 110 MM POLYETHYLENE PIPE AT RATTAN TALAB, GALI NO.1 AND 3, SADDAR TOWN AND REPAIR THE LEAKAGES OF 18" DIA AND 24" DIA WATER LINES AND MANUFACTURING & PROVIDING / FIXING STAINLESS STEEL SPINDLE 18" DIA AND 24" DIA AT DIFFERENT PLACES FOR THE IMPROVEMENT OF WATER SUPPLY POSITION IN SADDAR, DISTRICT SOUTH.

Estimated Cost
Time Limit
Tender Cost
Penalty

On Item Rate Basis
30 Days
Rs.500/=

Rs.500/= Per Day

Issued to M/S.

Unity Associates

Pay Order No.

07

Dated:

15-01-2014

K. W. & S. B.
TENDER CLERK
Finance Department
K. W. & S. B.

ISSUING AUTHORITY

Sr.	Description	Quantity	Rate	Per	Amount
01.	Dismantling and removing road metalling.	3125 Cft	<i>605/-</i> <i>Six hundred</i> <i>Five</i>	% Cft	<i>18906.25/-</i>
02.	Excavation for pipe line in trenches, pits in all kinds of soils of murum i/c. trimming and dressing sides to true alignment and shape leveling and grade, cutting joint holes and disposal of surplus earth within one chain as directed by Engineer Incharge. Providing fence guards ligts, flags and temporary crossing for non vehicular traffic where ever required lift upto 5 ft (1.52m) and lead upto one chain (30.5m). 0' to 5'	12500 Cft	<i>4650/-</i> <i>Four thousand</i> <i>Six hundred</i> <i>Fifty</i>	% OCft	<i>58125/-</i>
03.	Excavation for pipe line in trenches, pits in wet soils clay or mud i/c. trimming and dressing sides to true alignment and shape leveling and grade, cutting joint holes and disposal of surplus earth within one chain as directed by Engineer Incharge. Providing fence guards ligts, flags and temporary crossing for non vehicular traffic where ever required lift upto 5 ft (1.52m) and lead upto one chain (30.5m). 0' to 5'	3125 Cft	<i>5400/-</i> <i>Five thousand</i> <i>Four hundred</i>	% OCft	<i>16875/-</i>
		3125 Cft	<i>5950/-</i> <i>Five thousand</i> <i>Nine hundred</i> <i>Fifty</i>	% OCft	<i>18593.75/-</i>
04.	Providing, laying & Fixing in trenches i/c. fitting, jointing & testing etc. complete in all respect the high Density Polyethylene Pipe (HDPE-100) for B.S 3580 & PSI 3051 (PN-10). 110 mm	1250 Rft	<i>267/-</i> <i>Two hundred</i> <i>Sixty seven</i>	P/Rft	<i>333750/-</i>
05.	Providing C.I Valve heavy pattern test pressure 21.0 kg.sq corner 330 lb/sq. inch. 4" dia	02 Nos.	<i>5400/-</i> <i>Five thousand</i> <i>Four hundred</i>	Each	<i>10800/-</i>

K. W. & S. B.
2-01-14


SUBJECT:- REPLACEMENT OF 4" DIA A.C /C.I LINE BY PASS 110 MM POLYETHYLENE PIPE AT RATTAN TALAB, GALI NO.1 AND 3, SADDAR TOWN AND REPAIR THE LEAKAGES OF 18" DIA AND 24" DIA WATER LINES AND MANUFACTURING & PROVIDING / FIXING STAINLESS STEEL SPINDLE 18" DIA AND 24" DIA AT DIFFERENT PLACES FOR THE IMPROVEMENT OF WATER SUPPLY POSITION IN SADDAR, DISTRICT SOUTH.

Sr.	Description	Quantity	Rate	Per	Amount
06.	Fixing of Sluice Valve with 2 cast iron Tail Pieces, one end flanged and other with socket including the cost of nuts bolts and rubber packing, labour etc. complete. 4" dia	02 Nos.	1500/- Fifteen hundred.	Each	3000/-
07.	Providing & Fixing M.S Split Collar Tee on PRCC Pipe of different sizes having width as mentioned against each item, to suit the size of connection, fabricated with 3/8" thick M.S Plate excluding the cost of the neck. It includes the cost of 3/4" thick M.S Square bars on both ends, 4 Nos. 3/4" thick M.S flanges, with a total weight as includes the cost of nuts & bolts, rubber packing, labour and sealing material and all the tools and plants. Weight = 104.86 Kg. 12" x 12" (2'.0") Weight = 133.490 Kg. 18" x 18" (2'.0")	01 No. 01 No.	19000/- One thousand nine hundred. 24500/- Twenty Four thousand Five hundred.	Each Each	19000/- 24500/-
08.	Providing / Fixing 0-9" long - 3/8" thick M.S Neck to existing M.S Pipe or to a split collar tee having a total weight as mentioned against each item. It includes the cost of fabrication and welding to the split collar tee. Weight = 6.666 Kg 4" dia	02 Nos.	1200/- One thousand Two hundred.	Each	2400/-
09.	Construction of C.C block masonry chambers of (inside dimension) with 24" x 24" C.I cover & frame weighing 50 kg fixed on R.C.C 1:2:4 slab 6" c/c 1/4" dia @ 8" c/c distribution bars @ 6" thick C.C 1:3:6 block masonry walls set in 1:6 C.M 6" thick C.C 1:4:8 in foundation, 2" thick C.C 1:2:4 flooring 1/2" thick cement plaster 1:6 to all inside wall surfaces, top and bottom slab, outré side wall surface 1'-0" deep up to roof slab i/c M.S foot rest 5" dia bars every 2'-0" deep, curing, excavation, de-watering, re filling etc complete. 4' x 4' x 4'	02 Nos.	28300/- Twenty Eight thousand Three hundred.	Each	56600/-
10.	Full Hire Charges of Pumping set per day inclusive of the wages of driver and assistant, fuel and electric energy plate from required for placing the pump etc, at lower depth with suction and delivery pipe for pumping out water pound at various depth from trenches including the cost of erection and dismantling after completion of job of 10HP form 10 Feet Depth.	30 Days	1500/- One thousand Five hundred.	P/Day	45000/-


m/s 20/01






SUBJECT:- REPLACEMENT OF 4" DIA A.C /C.I LINE BY PASS 110 MM POLYETHYLENE PIPE AT RATTAN TALAB, GALI NO.1 AND 3, SADDAR TOWN AND REPAIR THE LEAKAGES OF 18" DIA AND 24" DIA WATER LINES AND MANUFACTURING & PROVIDING / FIXING STAINLESS STEEL SPINDLE 18" DIA AND 24" DIA AT DIFFERENT PLACES FOR THE IMPROVEMENT OF WATER SUPPLY POSITION IN SADDAR, DISTRICT SOUTH.

Sr.	Description	Quantity	Rate	Per	Amount
11.	Add or deduct for extra / less depth then 5 ft of 4 ft dia manholes i/c. footrest.	(+) 24" Inches	127/- One hundred and twenty seven	Per Inch	4482/-
12.	Sand Haro or any other source sand of the same modules of the Fitness (Hill Sand).	6079 Cft	2425/2 Twenty four thousand Two hundred and Twenty Five	% Cft	147415/2
13.	Refilling the excavated stuff in trenches 6" thick layer i/c. watering ramming to full compaction etc. complete.	12500 Cft	2760/- Two thousand seven hundred and sixty	% Cft	34500/-
14.	Manufacturing & Providing / Fixing Stainless Steel Spindle & Gun Metal Nuts of different sizes of different Sluice Valve.	18" Dia	23800/- Twenty three thousand Eight hundred	Each	47600/-
		24" Dia	41300/- Forty one thousand Three hundred	Each	82600/-
15.	Repair of the leakages of PRCC Pipe lines (External Vatta) i/c. cost of Excavation, labour, sealing material, De-watering and refilling of the excavated stuff etc.	18" Dia	13800/- Thirteen thousand Eight hundred	Each	55200/-
		24" Dia	18300/- Eighteen thousand Three hundred	Each	18300/-
				Total	997652/-


 EXECUTIVE ENGINEER (W)
 SADDAR OL CITY DISTRICT SOUTH
 (KW&SB)

I hereby quoted bid amount of Rs. 997652/- (Rupees in words Nine Lacs Ninety seven thousand Six hundred Fifty Two only.)

Signature of Contractor 
 Address 3-A Ancahab Hanrahat Nazimabad No-05

1. Tender RECEIVED IN SEALED COVER/ UNSEALED COVER
 2. Rate Quoted @ Rs 9,97,652/- Nine Lacs Ninety Seven thousand Six hundred Fifty Two only
 3. Cutting and Writing is not found / in hundred Fifty two only
 4. Pay Order attached / Not attached
 P.O. No. 11135570 Dt. 21-7-14 Rs. 20,000/-
 A.D. (South)  A.D. I.A. (KMC)  S.E. (KMC)  C.E. (South)  C.E. (R&D)

SINDH PUBLIC PROCUREMENT REGULATORY AUTHORITY

CONTRACT EVALUATION FORM

**TO BE FILLED IN BY ALL PROCURING AGENCIES FOR PUBLIC CONTRACTS OF
WORKS, SERVICES & GOODS**

- 1) NAME OF THE ORGANIZATION / DEPTT. KW&SB.
- 2) PROVINCIAL / LOCAL GOVT./ OTHER LOCAL GOVERNMENT
- 3) TITLE OF CONTRACT REPLACEMENT OF 4" DIA A.C/C.I LINE BY 110 MM POLYET
- 4) TENDER NUMBER SR.18468.
- 5) BRIEF DESCRIPTION OF CONTRACT Improvement of Water Supply System.
- 6) FORUM THAT APPROVED THE SCHEME M.D KW&SB.
- 7) TENDER ESTIMATED VALUE Rs.9,99,439/=
- 8) ENGINEER'S ESTIMATE Rs.9,99,570/=
(For civil works only)
- 9) ESTIMATED COMPLETION PERIOD (AS PER CONTRACT) 30 Days.
- 10) TENDER OPENED ON (DATE & TIME) 20/01/2014, 2:30 Pm.
- 11) NUMBER OF TENDER DOCUMENTS SOLD 02 Nos.
(Attach list of buyers)
- 12) NUMBER OF BIDS RECEIVED 02 Nos.
- 13) NUMBER OF BIDDERS PRESENT AT THE TIME OF OPENING OF BIDS 02 Nos.
- 14) BID EVALUATION REPORT Copy Enclosed.
(Enclose a copy)
- 15) NAME AND ADDRESS OF THE SUCCESSFUL BIDDER M/s. Unity Associates.
- 16) CONTRACT AWARD PRICE Rs.9,97,654/=
- 17) RANKING OF SUCCESSFUL BIDDER IN EVALUATION REPORT 1st Lowerst.
(i.e. 1st, 2nd, 3rd EVALUATION BID).

18) METHOD OF PROCUREMENT USED :- (Tick one)

- a) SINGLE STAGE – ONE ENVELOPE PROCEDURE _____ Domestic/ Local
- b) SINGLE STAGE – TWO ENVELOPE PROCEDURE _____
- c) TWO STAGE BIDDING PROCEDURE _____
- d) TWO STAGE – TWO ENVELOPE BIDDING PROCEDURE _____

PLEASE SPECIFY IF ANY OTHER METHOD OF PROCUREMENT WAS ADOPTED i.e. EMERGENCY, DIRECT CONTRACTING ETC. WITH BRIEF REASONS:

19) APPROVING AUTHORITY FOR AWARD OF CONTRACT M.D KW&SB.

20) WHETHER THE PROCUREMENT WAS INCLUDED IN ANNUAL PROCUREMENT PLAN?

Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

21) ADVERTISEMENT :

i) SPPRA Website
(If yes, give date and SPPRA Identification No.)

Yes	<input checked="" type="checkbox"/>
No	<input type="checkbox"/>

ii) News Papers
(If yes, give names of newspapers and dates)

Yes	<input type="checkbox"/>
No	<input checked="" type="checkbox"/>

22) NATURE OF CONTRACT

Domestic/ Local	<input checked="" type="checkbox"/>	Int.	<input type="checkbox"/>
--------------------	-------------------------------------	------	--------------------------

23) WHETHER QUALIFICATION CRITERIA
WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?
(If yes, enclose a copy)

Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

24) WHETHER BID EVALUATION CRITERIA
WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?
(If yes, enclose a copy)

Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

25) WHETHER APPROVAL OF COMPETENT AUTHORITY WAS OBTAINED FOR USING A
METHOD OTHER THAN OPEN COMPETITIVE BIDDING?

Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

26) WAS BID SECURITY OBTAINED FROM ALL THE BIDDERS?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

27) WHETHER THE SUCCESSFUL BID WAS LOWEST EVALUATED
BID / BEST EVALUATED BID (in case of Consultancies)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

28) WHETHER THE SUCCESSFUL BIDDER WAS TECHNICALLY
COMPLIANT?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

29) WHETHER NAMES OF THE BIDDERS AND THEIR QUOTED PRICES WERE READ OUT AT
THE TIME OF OPENING OF BIDS?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

30) WHETHER EVALUATION REPORT GIVEN TO BIDDERS BEFORE THE AWARD OF
CONTRACT?

(Attach copy of the bid evaluation report)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

31) ANY COMPLAINTS RECEIVED
(If yes, result thereof)

Yes	
No	<input checked="" type="checkbox"/>

32) ANY DEVIATION FROM SPECIFICATIONS GIVEN IN THE TENDER NOTICE / DOCUMENTS
(If yes, give details)

Yes	
No	<input checked="" type="checkbox"/>

33) WAS THE EXTENSION MADE IN RESPONSE TIME?
(If yes, give reasons)

Yes	
No	<input checked="" type="checkbox"/>

34) DEVIATION FROM QUALIFICATION CRITERIA
(If yes, give detailed reasons.)

Yes	
No	<input checked="" type="checkbox"/>

35) WAS IT ASSURED BY THE PROCURING AGENCY THAT THE SELECTED FIRM IS NOT
BLACK LISTED?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

36) WAS A VISIT MADE BY ANY OFFICER/OFFICIAL OF THE PROCURING AGENCY TO THE
SUPPLIER'S PREMISES IN CONNECTION WITH THE PROCUREMENT? IF SO, DETAILS TO
BE ASCERTAINED REGARDING FINANCING OF VISIT, IF ABROAD:
(If yes, enclose a copy)

Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------


37) WERE PROPER SAFEGUARDS PROVIDED ON MOBILIZATION ADVANCE PAYMENT IN
THE CONTRACT (BANK GUARANTEE ETC.)?

Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

38) SPECIAL CONDITIONS, IF ANY
(If yes, give Brief Description)

Yes	
No	<input checked="" type="checkbox"/>

Signature & Official Stamp of
Authorized Officer


SYED TARIQ SHAH BUKHARI
Executive Engineer (Water)
Saddal Town Zone-II-A, KW&SB

FOR OFFICE USE ONLY

SPPRA, Block. No.8, Sindh Secretariat No.4-A, Court Road, Karachi
Tele: 021-9205356; 021-9205369 & Fax: 021-9206291

Print

Save

Reset



KARACHI WATER & SEWERAGE BOARD
OFFICE OF THE CHIEF ENGINEER (IP&D)


BID EVALUATION REPORT


1	Name of Procuring Agency	KARACHI WATER & SEWERAGE BOARD
2	Tender Reference No	SPPRA Serial No. 18468 I.D No. /2013
3	Tender Description/Name of Work/Item	REPLACEMENT OF 6" DIA & 8" DIA A.C / C.I LINE BY PASS 160 & 200 MM POLYETHYLENE PIPE AT OLD QUEENS ROAD OUTRAM ROAD FOR THE IMPROVEMENT OF WATER SUPPLY POSITION IN SADDAR, DISTRICT SOUTH.
4	Method of Procurement	Single Stage (One Envelop)
5	Tender Published	Through Web Site
6	Total Bid Documents Sold	2 Nos
7	Total Bid Received	2 Nos
8	Technical Bid Opening Date (if applicable)	N/A
9	No. of Bid Technically Qualified (if applicable)	N/A
10	Bid (s) rejected	Nil
11	Financial Bid Opening Date	20/01/2014

S#	NAME OF FIRM OR BIDDER	COST OFFERED BY THE BIDDERS	RANKING IN TERMS OF COST	COMPARISON WITH ESTIMATED COST	REASON FOR ACCEPTANCE/ REJECTION	REMARKS
1	M/s. Unity Associates	Rs. 949,358/-	1st Lowest	@ 0.1601% Below	Substantially Responsive	P O # AAA11135569 Dt: 20/01/2014 Rs 19,000/- Allied Bank Paposh Nagar Br
2	M/s. Saim & Co.	Rs. 967,868/-	2nd Lowest	@ 1.7864% Above	Substantially Responsive	P O # 10107027 Dt: 20/01/2014 Rs 20,000/- HBL Khadija Mark Bik-1 North Nazimabad Br

The all concerned bidder are being informed accordingly.


The E.E Concerned for compliance of rule 45 of SPPRA 2010 M/s. Unity Associates declared as the lowest responsive bidder by the Committee and recommended for Sanction from Competent Authority.


(Muhammad Nawaz Khan)
Accounts Officer (South)
Member/Secretary


(Saif-ul-Haque)
Additional Director Internal
Audit - KMC Member


(Maqsood Ahmed Shaikh)
Superintending Engineer (KMC)
Member

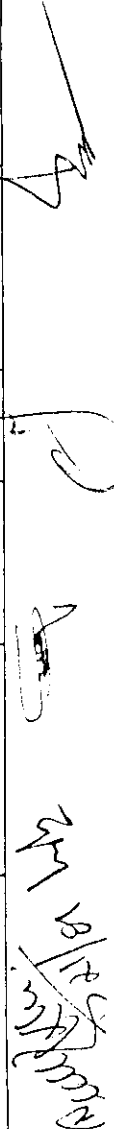

(Muhammad Arif)
Chief Engineer (South)
Member


(Abdul Rahim Khattai)
Chief Engineer (IPD),
ice (Convener)

COMPARATIVE STATEMENT

NAME OF WORK: REPLACEMENT OF 6" DIA & 8" DIA A.C / C.I LINE BY PASS 160 & 200 MM POLYETHYLENE PIPE AT OLD QUEENS ROAD OUTRAM ROAD FOR THE IMPROVEMENT OF WATER SUPPLY POSITION IN SADDAR, DISTRICT SOUTH.

S.No	Description of Work	Engineer's Estimate			M/s. Unity Associates		M/s. Saim & Co		
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount
1	Dismantling and removing road mantling Excavation for pipe line in trenches & pits in all kind of soil of muram i/c trimming and dressing sides to the true alignment & shape leveling of beds of trenches to correct level and grade cutting joints holes & disposal of surplus earth with in a one chain as directed by Engineer Incharge providing fence guard light flag, and temporary crossing for non-vehicle traffic where ever required lift up to 5ft (1.52m) and lead up to on chain (30.5m)	2125 Cft	605.00	% 0 Cft	12,856.25	605.00	12,856.25	605.00	12,856.25
2	Excavation for pipe line in trenches & pits in hard rock by hammering and chiseling i/c trimming and dressing sides to the true alignment & shape leveling of beds of trenches to correct level and grade cutting joints holes & disposal of surplus earth with in a one chain as directed by Engineer Incharge providing fence guard light flag, and temporary crossing for non-vehicle traffic where ever required lift up to 5ft (1.52m) and lead up to on chain (30.5m)	10625 Cft	4,650.00	% 0 Cft	49,406.25	4,650.00	49,406.25	4,650.00	49,406.25
3	Providing Laying & fixing in trench i/c fitting jointing & testing etc complete in all respect the High Density Polyethylene pipe (HDPE-100) for B.S 3580 & psi 3051 (PN-10). 5' - 8'	2125 Cft	24,700.00	% 0 Cft	52,487.50	24,700.00	52,487.50	24,700.00	52,487.50
4	Providing Laying & fixing in trench i/c fitting jointing & testing etc complete in all respect the High Density Polyethylene pipe (HDPE-100) for B.S 3580 & psi 3051 (PN-10). 160mm 200mm	520 Rft 330 Rft	530.00 833.00	P/Rft P/Rft	275,600.00 274,890.00	529.00 832.00	275,080.00 274,560.00	550.00 835.00	286,000.00 275,550.00





NAME OF WORK: REPLACEMENT OF 6" DIA & 8" DIA A.C / C.I LINE BY PASS 160 & 200 MM POLYETHYLENE PIPE AT OLD QUEENS ROAD
OUTRAM ROAD FOR THE IMPROVEMENT OF WATER SUPPLY POSITION IN SADDAR, DISTRICT SOUTH.

S.No	Description of Work	Engineer's Estimate			M/s. Unity Associates		M/s. Saim & Co	
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate
5	Providing of C.I. Sluice Valve heavy pattern (test pressure 21.0 kg/sq cm or 300 lbs /sq inch (Imported).....6" dia	1 Nos	9,360.00	Each	9,360.00	9,300.00	10,000.00	10,000.00
		1 Nos	17,940.00	Each	17,940.00	17,900.00	19,000.00	19,000.00
6	Fixing of Sluice valve with 2 cost iron tail piece one end of flanged And other with socket i/c cost of nut bolts packing and etc complete.	1 Nos	1,886.00	Each	1,886.00	1,800.00	2,000.00	2,000.00
		1 Nos	2,790.00	Each	2,790.00	2,800.00	3,000.00	3,000.00
7	Providing & Fixing Split Collar Tee on PRCC Pipe of different sizes having with mentioned against each item suit the size of connection fabricated with 3/8" thick M.S Plate existing the cost of the neck it includes the cost of 3/4" thick M.S square bars on both ends 4 Nos 3/4" M.S flanges with a total weight as mentioned against each items. it also includes the cost nut & bolts, rubber packing, labour and sealing material and all the tools & plants. Weight = 104.86 12"x12" (2'-0') Weight = 133.490 18"x18" (2'-0')	1 No	19,037.00	Each	19,037.00	19,000.00	20,000.00	20,000.00
		1 No	24,521.00	Each	24,521.00	24,500.00	25,000.00	25,000.00
8	Providing and fixing 0-9 long 3/8" thick M/S neck to existing M/S pipe or to split collar Tee having a total weight as mentioned against each item i/c the cost of fabrication and welding to the split collar tee Weight 10.90 Kg.....6" dia Weight 15.757 Kg.....8" dia	1 No	1,984.00	Each	1,984.00	1,900.00	2,000.00	2,000.00
		1 No	2,804.00	Each	2,804.00	2,800.00	3,000.00	3,000.00

Handwritten signatures and initials:
 M/s. Saim & Co
 M/s. Unity Associates
 Engineer's Estimate
 (Includes a large signature and the word 'M/s' written vertically)

NAME OF WORK: REPLACEMENT OF 6" DIA & 8" DIA A.C / C.I LINE BY PASS 160 & 200 MM POLYETHYLENE PIPE AT OLD QUEENS ROAD
OUTRAM ROAD FOR THE IMPROVEMENT OF WATER SUPPLY POSITION IN SADDAR, DISTRICT SOUTH.

S.No	Description of Work	Engineer's Estimate			M/s. Unity Associates		M/s. Saim & Co		
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount
9	Construction of C.C Block masonry chamber of size 4 'x4 'x4' (inside dimension) with 24"x24" C.I. cover from with 50 Kg fixed R.C 1:2.4 slab 4.5 inches thick with steel 1/2" dia for bars @ 6" C.C with chamber sent up both way distribution bar 6" c.c 1:4.8 m foundation 2" thick c.c 1:2.4 flooring 1/2" thick cement plaster 1:3 ratio inside wall surface top and bottom slab outer side wall surface 1 foot deep up to roof slab M.S foot rest 5/8" bars at every 2 foot deep 1/2 curing dewatering excavation on refilling and disposal of surplus earth complete 4 'x4 'x4'	2 Nos	28,357.00	Each	56,714.00	28300	56600	29000	58,000.00
10	Full hire charges of pumping set i/c wages of driver and Assistant fuel or electric energy plate form required for placing or at lower depths with suction and delivery pipes for pumping and water found at various depth form trenches i/c cost of erection and dismantling after completion of the job. (i) Hire charges of pumping set of upto 10 H.P pumping out water for 10 feet deep trench	20 Day	1,500.00	P/Day	30,000.00	1500	30000	1500	30,000.00
11	Add Duct for extra / less depth then 5 ft of 4ft dia manholes i/c footrest.	24 Inches	187.20	P/Inch	4,492.80	180	4320	180	4,320.00
12	Sand Hero or any other source sand of the same modules of the fitness (Hill Sand)	1893.76 Cft	2,425.00	% Cft	45,923.68	2,425.00	45,923.68	2,425.00	45,923.68
13	Refilling the excavated stuff in trenches 6" th i/c layer including watering ramming to full compaction etc. complete	10625 Cft	2,760.00	% 0 Cft	29,325.00	2,760.00	29,325.00	2,760.00	29,325.00

NAME OF WORK: REPLACEMENT OF 6" DIA & 8" DIA A.C / C.I LINE BY PASS 160 & 200 MM POLYETHYLENE PIPE AT OLD QUEENS ROAD
OUTRAM ROAD FOR THE IMPROVEMENT OF WATER SUPPLY POSITION IN SADDAR, DISTRICT SOUTH.

S.No	Description of Work	Engineer's Estimate			M/s. Unity Associates		M/s. Saim & Co		
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount
14	Repair of leaking joints external vatta on PRCC pipe i/c cost of excavation, labour, sealing material, dewatering and refilling of the excavated stuff	4 Nos	9,716.00	Each	38,864.00	9700	38800	10000	40,000.00
					950,881.48		949,358.48		967,868.48
	Say				950,881		949,358		967,868

(Muhammad Nawaz Khan)
Accounts Officer (South)
Member/Secretary

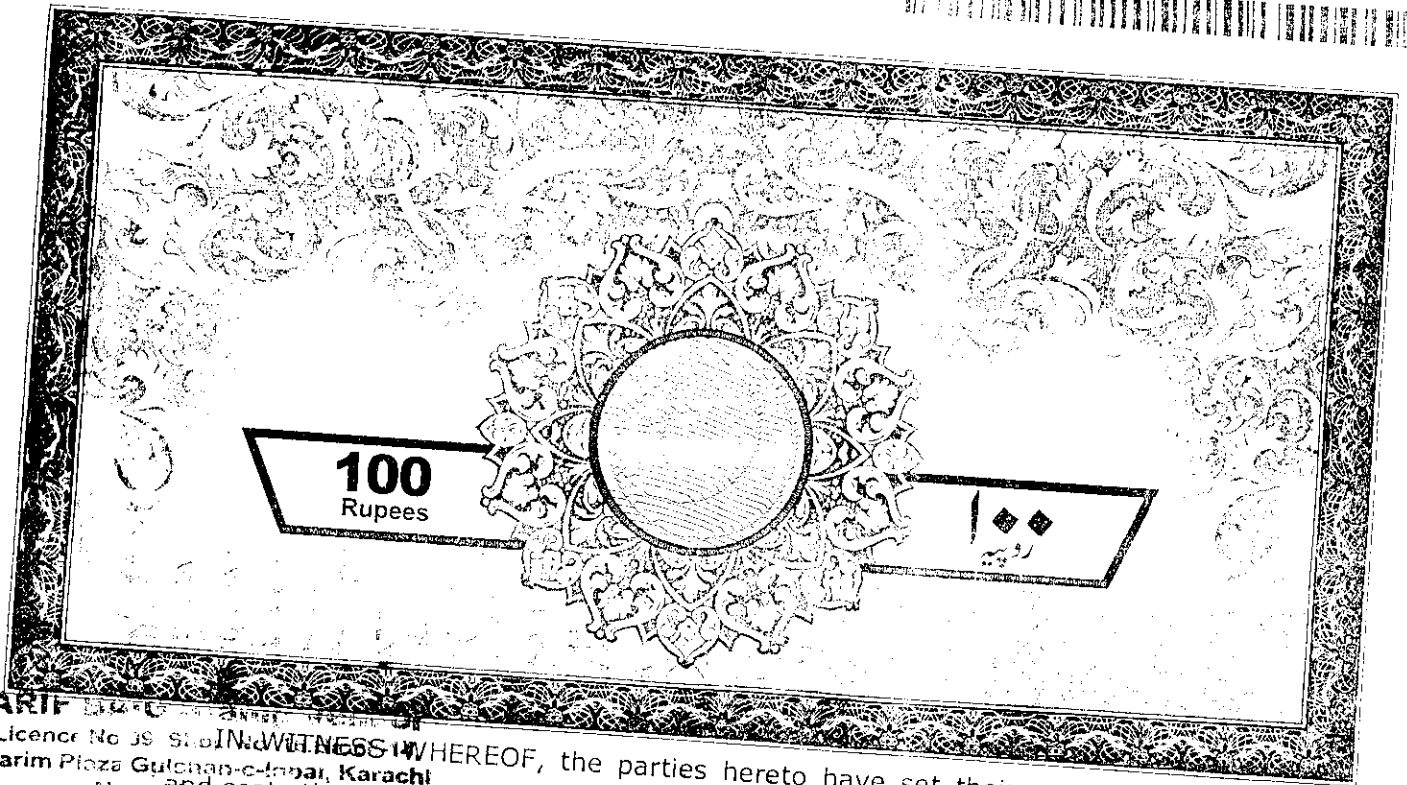
(Saif-ul-Haque)
Additional Director Internal
Audit - KMC Member

(Maqsood Ahmed Shaikh)
Superintending Engineer (KMC)
Member

(Muhammad Arif)
Chief Engineer (South)
Member

(Abdulrahim Khattak)
Chief Engineer (UPD), (Convener)

B722022



ARIF LICENCE No JS 50 IN WITNESS WHEREOF, the parties hereto have set their respective hands
Karim Plaza Gulshan-e-Iqbal, Karachi
Near G.M.C. on the day and year first above written.

S.No. CS-7173 DATE 24 MAR 2014
ISSUED TO WITH ADDRESS _____
THROUGH WITH ADDRESS _____
PURPOSE For and on behalf of
VALUES Advocate.

For and on behalf of
EMPLOYER

For and on behalf of
CONTRACTOR

Muhammad Arif
MUHAMMAD ARIF
CHIEF ENGINEER DISTRICT SOUTH
K.W.&S.B.

Owais Ahmed Khan
OWAIS AHMED KHAN
MANAGING PARTNER
M/S. UNITY ASSOCIATES.

WITNESS OF EMPLOYER

WITNESS OF CONTRACTOR

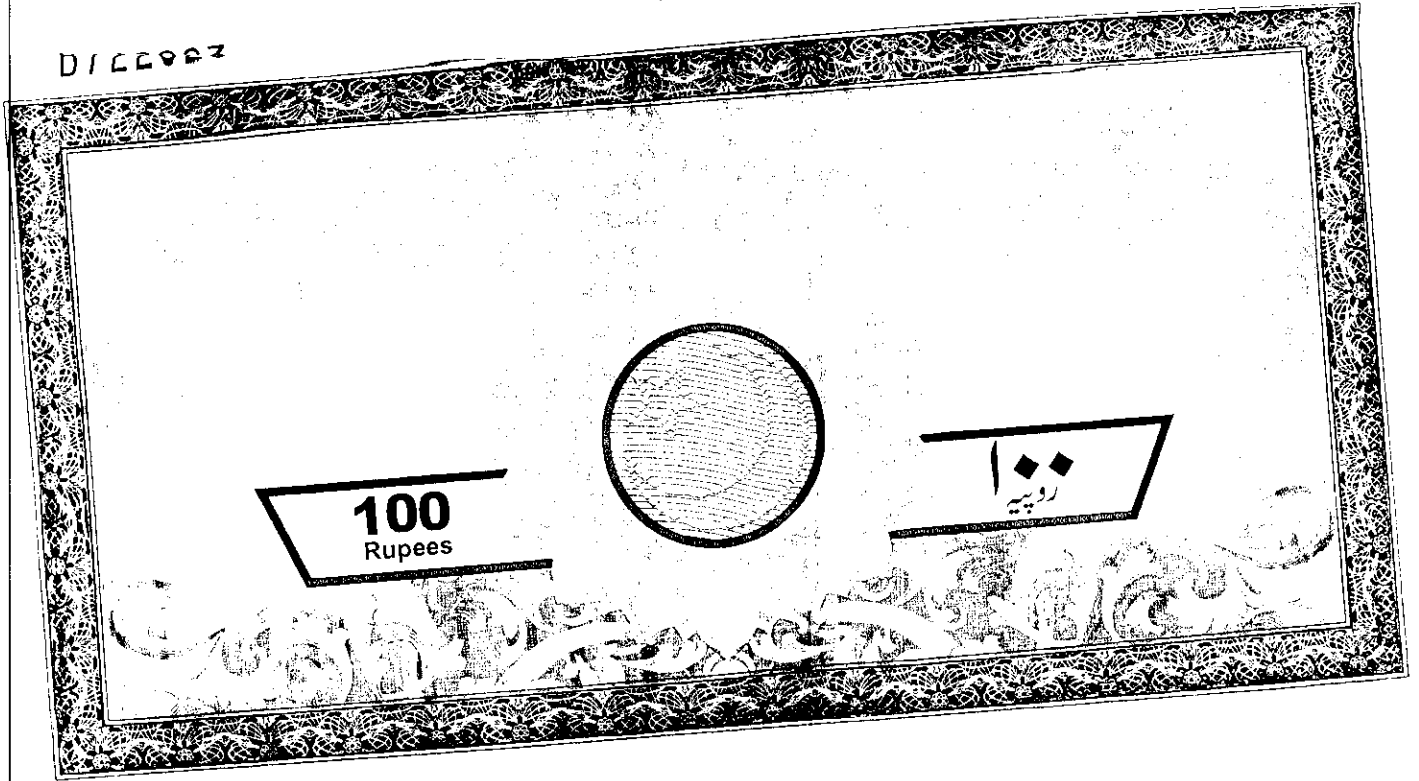
Muhammad Aslam Awan
MUHAMMAD ASLAM AWAN
SUPERINTENDING ENGINEER
SADDAR TOWN, DISTRICT SOUTH
K.W.&S.B.

M/S. Tooba Enterprises

Tariq Shah Bukhari
TARIQ SHAH BUKHARI
EXECUTIVE ENGINEER (WATER)
SADDAR TOWN, DISTRICT SOUTH
K.W.&S.B.

Benit
New Universal Electric Works

D122927



ARIF BAIG Street Vendor
 Licence No.09, Shop No. 16,Block-14,
 Karim Plaza Gulshan-e-Iqbal, Karachi
 Near Civic Centre

ISSUE NO. 007179 DATE 24 MAR 2014 **UTILIZED FOR THE WORK OF**
 ISSUED TO WITH ADDRESS Tajawal, Karachi
 PURPOSE REPLACEMENT OF 6" DIA & 8" DIA A.C / C.I LINE BY
 VALUE RS. 9,49,358/-
 STAMP VENDOR'S SIGNATURE

**REPLACEMENT OF 6" DIA & 8" DIA A.C / C.I LINE BY
 PASS 160 & 200 MM POLYETHYLENE PIPE AT OLD
 QUEENS ROAD OUTRAM ROAD FOR THE
 IMPROVEMENT OF WATER SUPPLY POSITION IN
 SADDAR, DISTRICT SOUTH.**

FOR AMOUNTING TO Rs.9,49,358/=

**(RUPEES NINE LACS FORTY NINE THOUSAND THREE
 HUNDRED FIFTY EIGHT ONLY),**

M/S. UNITY ASSOCIATES.

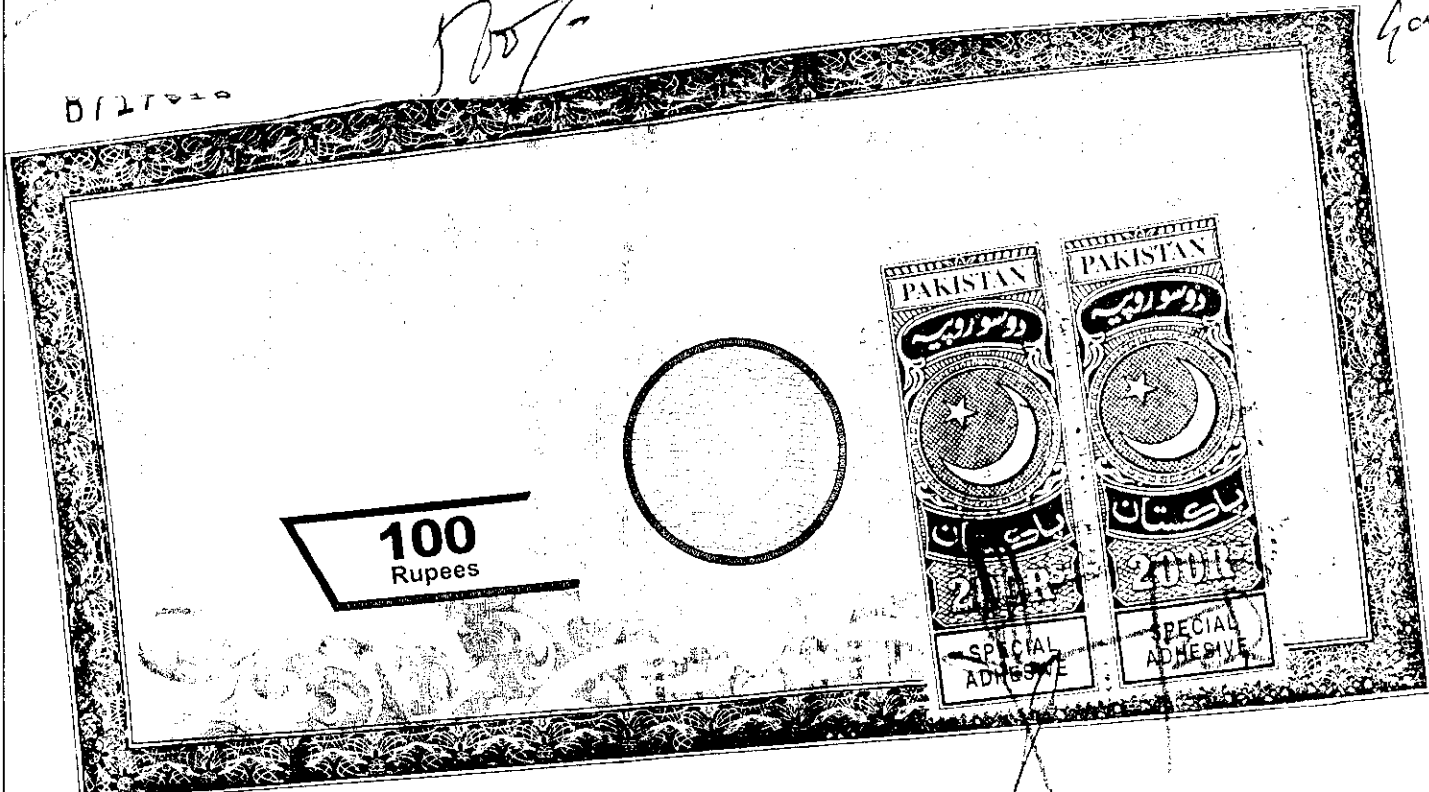
[Signature]
 M/S. UNITY ASSOCIATES.

[Signature]
 EXECUTIVE ENGINEER (WATER)
 SADDAR TOWN, DISTRICT SOUTH
 K.W.&.S.B.

D/127010

500/-

600



ARIF BAIG STAMP VENDOR

Licence No 09 Stamp
Narim Plaza, G-10/1

NOW this Agreement witnesses as follows:-

OS 4748

In this Agreement words and expression shall have the same meanings as are respectively assigned to them in the conditions of Contract hereinafter referred to.

STAMP VENDOR'S

2. The following documents which for the purpose of identification have been signed by **MR. OWAIS AHMED KHAN** on behalf of the contractor and by **MR. MUHAMMAD ARIF, CHIEF ENGINEER, DISTRICT SOUTH, KW&SB**, on behalf the EMPLOYER all of which shall be deemed to form and be read and construed as part of this Agreement.

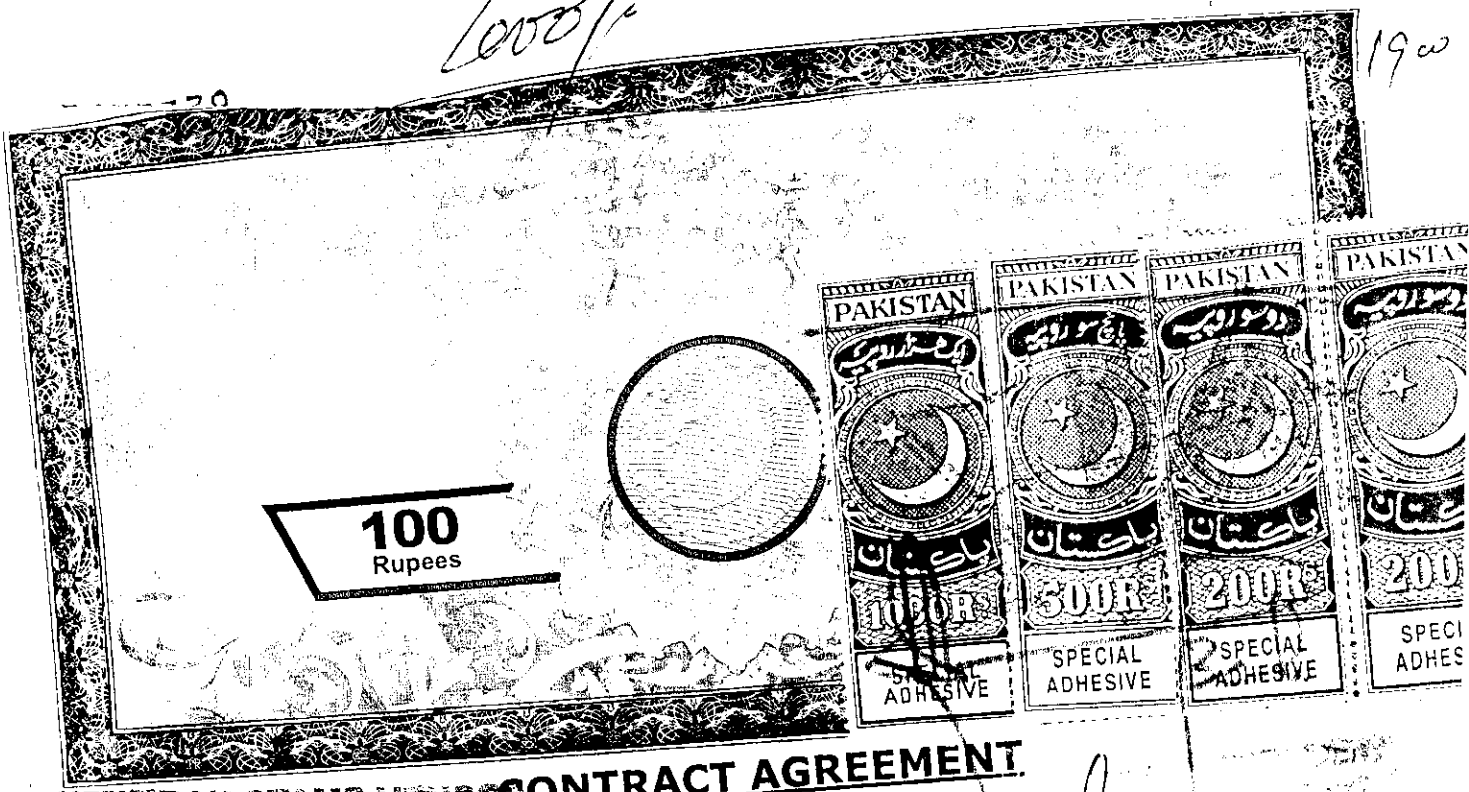
- a). This Form of Agreement.
- b). Employer letter of Acceptance No.CE/DS/W&S/KW&SB/2014/ 59 dated: 14-4-2014.
- c). The Tender.
- d). The conditions of the Particular Application - Part-II-A & II-B.
- e). The General Conditions - Part-I.
- f). The Drawings.
- g). The specifications and
- h). The Priced Bill of Quantities.
- i) Time period is 30 Days.

3. In consideration of the payments to be made by the EMPLOYER to the CONTRACTOR has hereinafter mentioned, the CONTRACTOR hereby covenants with the EMPLOYER to execute and complete the WORK and to remedy any defects therein and maintaining the same in conformity in all respects with the provisions of the CONTRACT.

4. THE EMPLOYER hereby covenants to pay to the CONTRACTOR

2000/-

1900



AQIB IMRAN SVP CONTRACT AGREEMENT

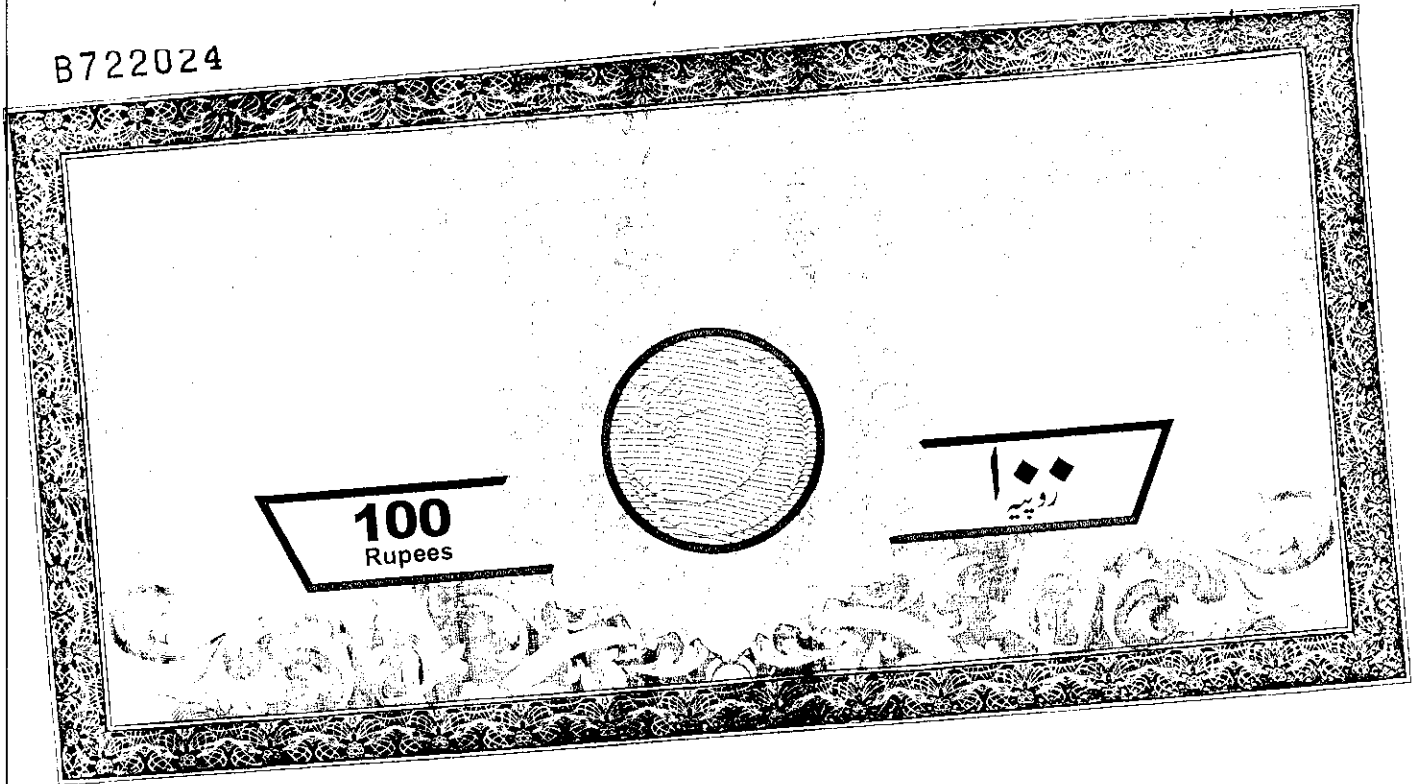
Licence No. 94, Shop No. 16 Block-14,
 Karim Plaza Gulshan-e-Iqbal, Karachi
 Near Civic Centre

This CONTRACT AGREEMENT was made the 14th day of April 2014,
 issued to 187538 on the Karachi Water & Sewerage Board (KW&SB), Government of
 Sindh, Represented by MEHMOOD Engineer, District South, KW&SB,
 (hereinafter called the "Employer" which expression shall wherever the
 context so admits or required to be deemed to include their successor) on the
 one part as first party M/S. UNITY ASSOCIATES, having their office at
3-A Anarkali Market, Nazimabad No.5, Karachi Represented by the
MR. OWAIS AHMED KHAN hereinafter called the "Contractor" (which
 expression shall wherever the context so admit or required be deemed to
 include their Executors. Administrators. Successors and permitted Assignees)
 on other part as second party.

WHEREAS the Employer is desirous to execute the work "**REPLACEMENT OF 6" DIA & 8" DIA A.C / C.I LINE BY PASS 160 & 200 MM POLYETHYLENE PIPE AT OLD QUEENS ROAD OUTRAM ROAD FOR THE IMPROVEMENT OF WATER SUPPLY POSITION IN SADDAR, DISTRICT SOUTH**", UNDER KW&SB'S OWN FUNDED PROGRAMME, for Rs.9,49,358/= (RUPEES NINE LACS FORTY NINE THOUSAND THREE HUNDRED FIFTY EIGHT ONLY), for the construction and completion of such WORKS and the remedying of an defects therein. The tender called upon through Authority's Website of SPPRA Rule-2010, under Serial No.18468.

AND WHEREAS THE CONTRACTOR has already deposited 2% Pay Order for amounting to **Rs.19,000/=**, vide Pay Order No. **AAA 11135569**, dated **20-10-2014**, issued from **Allied Bank Limited, Paposh Nagar Branch,**

B722024



ARIF BAIG Stamp Vendor
 Licence No. 09, Shop No. 16, Block-14,
 Karim Plaza Gulshan-e-Iqbal, Karachi
 Near Civic Centre

STAMP NO. 087183 DATE 26 MAR 2011
 USED TO Advocate
 THROUGH WITH ADDRESS Fazal Din Qureshi
 PURPOSE Advocate
 VALUE RS. 9,49,358/-
 STAMP VENDOR'S SIGNATURE

UTILIZED FOR THE WORK OF

REPLACEMENT OF 6" DIA & 8" DIA A.C / C.I LINE BY

**PASS 160 & 200 MM POLYETHYLENE PIPE AT OLD
 QUEENS ROAD OUTRAM ROAD FOR THE
 IMPROVEMENT OF WATER SUPPLY POSITION IN
 SADDAR, DISTRICT SOUTH.**

FOR AMOUNTING TO Rs.9,49,358/=

**(RUPEES NINE LACS FORTY NINE THOUSAND THREE
 HUNDRED FIFTY EIGHT ONLY),**

M/S. UNITY ASSOCIATES.

M/S. UNITY ASSOCIATES.

EXECUTIVE ENGINEER (WATER)
 SADDAR TOWN, DISTRICT SOUTH
 K.W.&.S.B.



KARACHI WATER & SEWERAGE BOARD
OFFICE OF THE EXECUTIVE ENGINEER (WATER)
(SADDAR OL CITY DISTRICT SOUTH)

No. E.E/W/S/O.C/D.S/KW&SB/2014/02.

Dated: 16-4-2014.

M/s. UNITY ASSOCIATES.,
3-A Anarkali Market,
Nazimabad No.5,
Karachi.

WORK ORDER

SUBJECT:- **REPLACEMENT OF 6" DIA & 8" DIA A.C / C.I LINE BY PASS 160 & 200 MM POLYETHYLENE PIPE AT OLD QUEENS ROAD AND OUTRAM ROAD FOR THE IMPROVEMENT OF WATER SUPPLY POSITION IN SADDAR, DISTRICT SOUTH.**

Consequent upon the submission of the formal acceptance of your side the Condition of Contract and Letter of Acceptance, you are here by directed to commence the work in strict accordance with the contract with shall be reckoned from the receipt of this letter and get completed within 30 Days, in case of any unjustified delay the penalty will be imposed Rs.500/= Per Day.


Please acknowledge the receipt of the letter by signature in the space provided below.


EXECUTIVE ENGINEER (WATER)
SADDAR OLD CITY DISTRICT SOUTH
(KW&SB)

Copy to:-

1. Chief Engineer District South.
2. Superintending Engineer District South.
3. Budget Office, KW&SB.
4. Office Copy.

RECEIVED THE LETTER

Signature  _____

M/s. Unity Associates. _____

Proprietor: _____

Dated: _____

Report 16822731764391400



Allied Bank

ALLIED BANKERS CHEQUE

http://10.224.253.5/T24ABL/servlet/BrowserServlet

ABC No. AAA 11135569

Date

0168
PAPOSH NAGAR, KARACHI

NOT OVER PKR ***19,000.00***

PAY

Payees A/C Only

20 JAN 2011

OR ORDER

K.W.S.B*****

RUPEES

NINETEEN THOUSAND ONLY

FOR ALLIED BANK LIMITED

Rs. ***19,000.00

Payable at issuing branch

Please debit Account No.

PKR1757100010168

of branch

0168

Authorized Signatory
IBS No.

Authorized Signatory
IBS No.

DO NOT WRITE BELOW THIS LINE

⑈ 1 1 1 3 5 5 6 9 ⑈ 0 1 4 0 1 6 8 ⑈ 0 0 0 1 7 5 7 1 0 0 0 1 0 0 0 0 ⑈ 0 1 0 ⑈



KARACHI WATER & SEWERAGE BOARD

OFFICE OF THE EXECUTIVE ENGINEER (W)

(SADDAR OLD CITY DISTRICT SOUTH)

1st FLOOR UC-8 OFFICE JEHANGIR PUTANGI ROAD SADDAR KARACHI.

Cell: 0331-2435582

SUBJECT:- REPLACEMENT OF 6" DIA & 8" DIA A.C / C.I LINE BY PASS 160 & 200 MM POLYETHYLENE PIPE AT OLD QUEENS ROAD AND OUTRAM ROAD FOR THE IMPROVEMENT OF WATER SUPPLY POSITION IN SADDAR, DISTRICT SOUTH.

Estimated Cost On Item Rate Basis.
 Time Limit 30 Days
 Tender Cost Rs.500/= ~~Per Day~~
 Penalty Rs.500/= ~~Per Day~~

Issued to M/S. Unity Associates.
 Pay Order No. 8 Dated: 15-01-2014

TENDER CLERK
 Finance Department
K. W. & S.B.

ISSUING AUTHORITY


Sr.	Description	Quantity	Rate	Per	Amount
01.	Dismantling and removing road metalling.	2125 Cft	605/- <i>Six hundred and five</i>	% Cft	12856.25/-
02.	Excavation for pipe line in trenches, pits in all kinds of soils of murum i/c. trimming and dressing sides to true alignment and shape leveling and grade, cutting joint holes and disposal of surplus earth within one chain as directed by Engineer Incharge. Providing fence guards ligts, flags and temporary crossing for non vehicular traffic where ever required lift upto 5 ft (1.52m) and lead upto one chain (30.5m). 0' to 5'	10625 Cft	4650/- <i>Four thousand six hundred fifty</i>	% Cft	49406/-
03.	Excavation for pipe line in trenches, pits in hard rock by hammering and chiseling i/c. trimming and dressing sides to true alignment and shape leveling and grade, cutting joint holes and disposal of surplus earth within one chain as directed by Engineer Incharge. Providing fence guards ligts, flags and temporary crossing for non vehicular traffic where ever required lift upto 5 ft (1.52m) and lead upto one chain (30.5m). 5' to 8'	2125 Cft	24700/- <i>Twenty four thousand seven hundred</i>	% Cft	52427.50/-
04.	Providing, laying & Fixing in trenches i/c. fitting, jointing & testing etc. complete in all respect the high Density Polyethylene Pipe (HDPE-100) for B.S 3580 & PSI 3051 (PN-10). 160 mm	520 Rft	529/- <i>Five hundred Twenty Nine</i>	P/Rft	275080/-
	200 mm	330 Rft	832/- <i>Eight hundred Thirty Two</i>	P/Rft	274560/-
05.	Providing C.I Valve heavy pattern test pressure 21.0 kg.sq corner 330 lb/sq. inch. 6" dia	01 No.	9300/- <i>Nine thousand three hundred</i>	Each	9300/-
	8" dia	01 No.	17900/- <i>Seventeen thousand Nine hundred</i>	Each	17900/-

SUBJECT:- REPLACEMENT OF 6" DIA & 8" DIA A.C / C.I LINE BY PASS 160 & 200 MM POLYETHYLENE PIPE AT OLD QUEENS ROAD AND OUTRAM ROAD FOR THE IMPROVEMENT OF WATER SUPPLY POSITION IN SADDAR, DISTRICT SOUTH.

Sr.	Description	Quantity	Rate	Per	Amount
06.	Fixing of Sluice Valve with 2 cast iron Tail Pieces, one end flanged and other with socket including the cost of nuts bolts and rubber packing, labour etc. complete. 6" dia 8" dia	01 Nos.	1800/- One thousand eight hundred	Each	1800/-
		01 No.	2800/- Two thousand Eight hundred	Each	2800/-
07.	Providing & Fixing M.S Split Collar Tee on PRCC Pipe of different sizes having width as mentioned against each item, to suit the size of connection, fabricated with 3/8" thick M.S Plate excluding the cost of the neck. It includes the cost of 3/4" thick M.S Square bars on both ends, 4 Nos. 3/4" thick M.S flanges, with a total weight as includes the cost of nuts & bolts, rubber packing, labour and sealing material and all the tools and plants. Weight = 104.86 Kg. 12" x 12" (2'.0") Weight = 133.490 Kg. 18" x 18" (2'.0")	01 No.	19000/- Nineteen thousand	Each	19000/-
		01 No.	24500/- Twenty Four thousand Five hundred	Each	24500/-
08.	Providing / Fixing 0-9" long - 3/8" thick M.S Neck to existing M.S Pipe or to a split collar tee having a total weight as mentioned against each item. It includes the cost of fabrication and welding to the split collar tee. Weight = 10.90 Kg 6" dia Weight = 15.75 Kg 8" dia	01 No.	1900/- One thousand nine hundred	Each	1900/-
		01 No.	2800/- Two thousand Eight hundred	Each	2800/-
09.	Construction of C.C block masonry chambers of (inside dimension) with 24" x 24" C.I cover & frame weighing 50 kg fixed on R.C.C 1:2:4 slab 6" c/c 1/4" dia @ 8" c/c distribution bars @ 6" thick C.C 1:3:6 block masonry walls set in 1:6 C.M 6" thick C.C 1:4:8 in foundation, 2" thick C.C 1:2:4 flooring 1/2" thick cement plaster 1:6 to all inside wall surfaces, top and bottom slab, outré side wall surface 1'-0" deep up to roof slab i/c M.S foot rest 5" dia bars every 2'-0" deep, curing, excavation, de-watering, re filling etc complete. 4' x 4' x 4'	02 Nos.	28300/- Twenty Eight thousand Three hundred	Each	56600/-
10.	Full Hire Charges of Pumping set per day inclusive of the wages of driver and assistant, fuel and electric energy plate from required for placing the pump etc, at lower depth with suction and delivery pipe for pumping out water pound at various depth from trenches including the cost of erection and dismantling after completion of job of 10HP form 10 Feet Depth.	20 Days	1500/- One thousand Five hundred	P/Day	30000/-

SUBJECT:- REPLACEMENT OF 6" DIA & 8" DIA A.C / C.I LINE BY PASS 160 & 200 MM POLYETHYLENE PIPE AT OLD QUEENS ROAD AND OUTRAM ROAD FOR THE IMPROVEMENT OF WATER SUPPLY POSITION IN SADDAR, DISTRICT SOUTH.

Sr.	Description	Quantity	Rate	Per	Amount
11.	Add or deduct for extra / less depth then 5 ft of 4 ft dia manholes i/c. footrest.	(+) 24" Inches	180/- <i>One hundred</i>	P/Inch	4320/-
12.	Sand Haro or any other source sand of the same modules of the Fitness (Hill Sand).	1893.76 Cft	2425/- <i>Two thousand</i>	% Cft	45923/-
13.	Refilling the excavated stuff in trenches 6" thick layer i/c. watering ramming to full compaction etc. complete.	10625 Cft	2760/- <i>Two thousand seven hundred sixty</i>	% 0Cft	29325/-
14.	Repair of the leakages of PRCC Pipe lines (External Vatta) i/c. cost of Excavation, labour, sealing material, De-watering and refilling of the excavated stuff etc. 12" Dia	04 Nos.	9700/- <i>Nine thousand seven hundred</i>	Each	38800/-
Total					949358/-


 EXECUTIVE ENGINEER (W)
 SADDAR OL CITY DISTRICT SOUTH
 (KW&SB)

I hereby quoted bid amount of Rs 949358/- (Rupees in words *Nine Lacs Forty Nine Thousand*

Three hundred Fifty Eight only.

Signature of Contractor *[Signature]*






Address *3-A Amalika Market Nazimabad No-05.*

1. Tender RECEIVED IN SEALED COVER / UNSEALED COVER

2. Rate Rs 9,49,358/- *Nine Lacs Forty nine thousand three*

3. *hundred Fifty eight only)*

P.O. No. 11135569 Dt. 20-01-14 Rs: 19,000/-

 A.O. (South)
  A.D.O. (A) (KMC)
  S.E. (KMC)
  C.E. (S&A)
  C.E. (IP&D)

SINDH PUBLIC PROCUREMENT REGULATORY AUTHORITY

CONTRACT EVALUATION FORM

TO BE FILLED IN BY ALL PROCURING AGENCIES FOR PUBLIC CONTRACTS OF WORKS, SERVICES & GOODS

- 1) NAME OF THE ORGANIZATION / DEPTT. KW&SB.
- 2) PROVINCIAL / LOCAL GOVT./ OTHER LOCAL GOVERNMENT
- 3) TITLE OF CONTRACT REPLACEMENT OF 6" DIA & 8" DIA A.C/I LINE BY PASS
- 4) TENDER NUMBER SR.18468.
- 5) BRIEF DESCRIPTION OF CONTRACT Improvement of Water Supply System.
- 6) FORUM THAT APPROVED THE SCHEME M.D KW&SB.
- 7) TENDER ESTIMATED VALUE Rs.9,99,273/=
- 8) ENGINEER'S ESTIMATE Rs.9,50,881/=
(For civil works only)
- 9) ESTIMATED COMPLETION PERIOD (AS PER CONTRACT) 30 Days.
- 10) TENDER OPENED ON (DATE & TIME) 20/01/2014, 2:30 Pm.
- 11) NUMBER OF TENDER DOCUMENTS SOLD 02 Nos.
(Attach list of buyers)
- 12) NUMBER OF BIDS RECEIVED 02 Nos.
- 13) NUMBER OF BIDDERS PRESENT AT THE TIME OF OPENING OF BIDS 02 Nos.
- 14) BID EVALUATION REPORT Copy Enclosed.
(Enclose a copy)
- 15) NAME AND ADDRESS OF THE SUCCESSFUL BIDDER M/s. Unity Associates.
- 16) CONTRACT AWARD PRICE Rs.9,49,358/=
- 17) RANKING OF SUCCESSFUL BIDDER IN EVALUATION REPORT 1st Lowerst.
(i.e. 1st, 2nd, 3rd EVALUATION BID).

18) METHOD OF PROCUREMENT USED : - (Tick one)

- a) SINGLE STAGE – ONE ENVELOPE PROCEDURE Domestic/Local
- b) SINGLE STAGE – TWO ENVELOPE PROCEDURE
- c) TWO STAGE BIDDING PROCEDURE
- d) TWO STAGE – TWO ENVELOPE BIDDING PROCEDURE

PLEASE SPECIFY IF ANY OTHER METHOD OF PROCUREMENT WAS ADOPTED i.e. EMERGENCY, DIRECT CONTRACTING ETC. WITH BRIEF REASONS:

19) APPROVING AUTHORITY FOR AWARD OF CONTRACT M.D KW&SB.

20) WHETHER THE PROCUREMENT WAS INCLUDED IN ANNUAL PROCUREMENT PLAN?

Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

21) ADVERTISEMENT :

i) SPPRA Website
(If yes, give date and SPPRA Identification No.)

Yes	<input checked="" type="checkbox"/>
No	<input type="checkbox"/>

ii) News Papers
(If yes, give names of newspapers and dates)

Yes	<input type="checkbox"/>
No	<input checked="" type="checkbox"/>

22) NATURE OF CONTRACT

OR

Domestic/ Local	<input checked="" type="checkbox"/>	Int.	<input type="checkbox"/>
--------------------	-------------------------------------	------	--------------------------

23) WHETHER QUALIFICATION CRITERIA
WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?
(If yes, enclose a copy)

Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

24) WHETHER BID EVALUATION CRITERIA
WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?
(If yes, enclose a copy)

Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

25) WHETHER APPROVAL OF COMPETENT AUTHORITY WAS OBTAINED FOR USING A
METHOD OTHER THAN OPEN COMPETITIVE BIDDING?

Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

26) WAS BID SECURITY OBTAINED FROM ALL THE BIDDERS?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

27) WHETHER THE SUCCESSFUL BID WAS LOWEST EVALUATED
BID / BEST EVALUATED BID (in case of Consultancies)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

28) WHETHER THE SUCCESSFUL BIDDER WAS TECHNICALLY
COMPLIANT?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

29) WHETHER NAMES OF THE BIDDERS AND THEIR QUOTED PRICES WERE READ OUT AT
THE TIME OF OPENING OF BIDS?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

30) WHETHER EVALUATION REPORT GIVEN TO BIDDERS BEFORE THE AWARD OF
CONTRACT?

(Attach copy of the bid evaluation report)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

31) ANY COMPLAINTS RECEIVED
(If yes, result thereof)

Yes	
No	<input checked="" type="checkbox"/>

32) ANY DEVIATION FROM SPECIFICATIONS GIVEN IN THE TENDER NOTICE / DOCUMENTS
(If yes, give details)

Yes	
No	<input checked="" type="checkbox"/>

33) WAS THE EXTENSION MADE IN RESPONSE TIME?
(If yes, give reasons)

Yes	
No	<input checked="" type="checkbox"/>

34) DEVIATION FROM QUALIFICATION CRITERIA
(If yes, give detailed reasons.)

Yes	
No	<input checked="" type="checkbox"/>

35) WAS IT ASSURED BY THE PROCURING AGENCY THAT THE SELECTED FIRM IS NOT
BLACK LISTED?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

36) WAS A VISIT MADE BY ANY OFFICER/OFFICIAL OF THE PROCURING AGENCY TO THE
SUPPLIER'S PREMISES IN CONNECTION WITH THE PROCUREMENT? IF SO, DETAILS TO
BE ASCERTAINED REGARDING FINANCING OF VISIT, IF ABROAD:
(If yes, enclose a copy)

Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------


37) WERE PROPER SAFEGUARDS PROVIDED ON MOBILIZATION ADVANCE PAYMENT IN
THE CONTRACT (BANK GUARANTEE ETC.)?

Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

38) SPECIAL CONDITIONS, IF ANY
(If yes, give Brief Description)

Yes	
No	<input checked="" type="checkbox"/>

Signature & Official Stamp of
Authorized Officer


SYED TARIQ SHAH BUKHARI

Executive Engineer (Water)

FOR OFFICE USE ONLY Saurdar Town Zone-II-A, KW&SB.

SPPRA, Block. No.8, Sindh Secretariat No.4-A, Court Road, Karachi
Tele: 021-9205356; 021-9205369 & Fax: 021-9206291

Print

Save

Reset



KARACHI WATER & SEWERAGE BOARD
OFFICE OF THE CHIEF ENGINEER (IP&D)


BID EVALUATION REPORT

1	Name of Procuring Agency	KARACHI WATER & SEWERAGE BOARD
2	Tender Reference No	SPPRA Serial No.18468 I.D No. /2013
3	Tender Description/Name of Work/Item	REPLACEMENT OF 4" DIA A.C / C.I LINE BY PASS 110 MM POLYETHYLENE PIPE AT RATTAN TALAB. GALI NO.1 AND 3, SADDAR TOWN AND REPAIR THE LEAKAGES OF 18" DIA AND 24" DIA WATER LINES AND MANUFACTURING & PROVIDING / FIXING STAINLESS STEEL SPINDLE 18" DIA AND 24" AT DIFFERENT PLACES FOR THE IMPROVEMENT OF WATER SUPPLY POSITION IN SADDAR. DISTRICT SOUTH.
4	Method of Procurement	Single Stage (One Envelop)
5	Tender Published	Through Web Site
6	Total Bid Documents Sold	2 Nos
7	Total Bid Received	2 Nos
8	Technical Bid Opening Date (if applicable)	N/A .
9	No. of Bid Technically Qualified (if applicable)	N/A .
10	Bid (s) rejected	Nil
11	Financial Bid Opening Date	20/01/2014
12	Bid Evaluation Report	


S #	NAME OF FIRM OR BIDDER	COST OFFERED BY THE BIDDERS	RANKING IN TERMS OF COST	COMPARISON WITH ESTIMATED COST	REASON FOR ACCEPTANCE/ REJECTION	REMARKS
1	M/s. Unity Associates	Rs. 997,654/-	1st Lowest	@ 0.1943% Below	Substantially Responsive	P.O # AAA11135570 Dt. 20/01/2014 Rs.20,000/- Allied Bank Paposh Nagar Br
2	M/s. Saim & Co.	Rs. 1,031,576/-	2nd Lowest	@ 3.1992% Above	Substantially Responsive	P.O # 9621825 Dt: 23/12/2013 Rs.22,000/- HBL Khadija Mark Blk-1 North Nazimabad Br


The all concerned bidder are being informed accordingly.

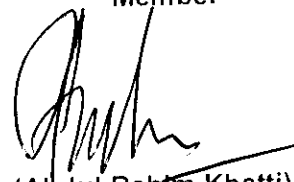
The E.E Concerned for compliance of rule 45 of SPPRA 2010 M/s. Unity Associates declared as the lowest responsive bidder by the Committee and recommended for Sanction from Competent Authority.


(Muhammad Nawaz Khan)
Accounts Officer (South)
Member/Secretary


(Saif-ul-Haque)
Additional Director Internal
Audit - KMC Member


(Maqsood Ahmed Shaikh)
Superintending Engineer (KMC)
Member


(Muhammad Arif)
Chief Engineer (South)
Member


(Abdul Rahim Khatti)
Chief Engineer (IPD),
102 (Convener)

COMPARATIVE STATEMENT

NAME OF WORK: REPLACEMENT OF 4" DIA A.C / C.I LINE BY PASS 110 MM POLYETHYLENE PIPE AT RATTAN TALAB, GALI NO.1 AND 3, SADDAR TOWN AND REPAIR THE LEAKAGES OF 18" DIA AND 24" DIA WATER LINES AND MANUFACTURING & PROVIDING / FIXING STAINLESS STEEL SPINDLE 18" DIA AND 24" AT DIFFERENT PLACES FOR THE IMPROVEMENT OF WATER SUPPLY POSITION IN SADDAR, DISTRICT SOUTH.

S.No	Description of Work	Engineer's Estimate			M/s. Unity Associates		M/s. Saim & Co		
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount
1	Dismantling and removing road mantling	3125 Cft	605.00	% 0 Cft	18,906.25	605.00	18,906.25	605.00	18,906.25
2	Excavation for pipe line in trenches & pits in all kind of soil of muram i/c trimming and dressing sides to the true alignment & shape leveling of beds of trenches to correct level and grade cutting joints holes & disposal of surplus earth with in a one chain as directed by Engineer Incharge providing fence guard light flag, and temporary crossing for non-vehicle traffic where ever required lift up to 5ft (1.52m) and lead up to on chain (30.5m)	12500 Cft	4,650.00	% 0 Cft	58,125.00	4,650.00	58,125.00	4,650.00	58,125.00
3	Excavation for pipe line in trenches & pits in wet soil clay or mud i/c trimming and dressing sides to the true alignment & shape leveling of beds of trenches to correct level and grade cutting joints holes & disposal of surplus earth with in a one chain as directed by Engineer Incharge providing fence guard light flag, and temporary crossing for non-vehicle traffic where ever required lift up to 5ft (1.52m) and lead up to on chain (30.5m)	3125 Cft	5,400.00	% 0 Cft	16,875.00	5,400.00	16,875.00	5,400.00	16,875.00
		3125 Cft	5,950.00	% 0 Cft	18,593.75	5,950.00	18,593.75	5,950.00	18,593.75
4	Providing Laying & fixing in trench i/c fitting jointing & testing etc complete in all respect the High Density Polyethylene pipe (HDPE-100) for B.S 3580 & psi 3051 (PN-10). 110mm	1250 Rft	268.00	P/Rft	335,000.00	267.00	333,750.00	268.00	335,000.00
5	Providing of C.I. Sluice Valve heavy pattern (test pressure 21.0 kg/sq cm or 300 lbs /sq inch (Imported).....4" dia	2 Nos	5,460.00	Each	10,920.00	5,400.00	10,800.00	6,000.00	12,000.00


NAME OF WORK: REPLACEMENT OF 4" DIA A.C / C.I LINE BY PASS 110 MM POLYETHYLENE PIPE AT RATTAN TALAB, GALI NO.1 AND 3, SADDAR TOWN AND REPAIR THE LEAKAGES OF 18" DIA AND 24" DIA WATER LINES AND MANUFACTURING & PROVIDING / FIXING STAINLESS STEEL SPINDLE 18" DIA AND 24" AT DIFFERENT PLACES FOR THE IMPROVEMENT OF WATER SUPPLY POSITION IN SADDAR, DISTRICT SOUTH.


S.No	Description of Work	Engineer's Estimate			M/s. Unity Associates		M/s. Saim & Co		
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount
9	Construction of C.C Block masonry chamber of size 4 'x4 'x4' (inside dimension) with 24"x24" C.I. cover from with 50 Kg fixed R.C 1:2:4 slab 4.5 inches thick with steel 1" dia for bars @ 6" C.C with chamber sent up both way distribution bar 6"c.c 1:4:8 m foundation 2" thick c.c 1:2:4 flooring 1" thick cement plaster 1:3 ratio inside wall surface top and bottom slab outer side wall surface 1 feet deep up to roof slab M.S foot rest 5/8" bars at every 2 foot deep 1/2 curing dewatering excavation on refilling and disposal of surplus earth complete 4 'x4 'x4 '.	2 Nos	28,357.00	Each	56,714.00	28300	56600	29000	58,000.00
10	Full hire charges of pumping set i/c wages of driver and Assistant fuel or electric energy plate form required for placing or at lower depths with suction and delivery pipes for pumping and water found at carious depth form trenches i/c cost of erection and dismantling after completion of the job. (i) Hire charges of pumping set of upto 10 H.P pumping out water for 10 feet deep trench	30 Day	1,500.00	P/Day	45,000.00	1500	45000	1500	45,000.00
11	Add Deduct for extra / less depth then 5 ft of 4ft dia manholes i/c footrest.	24 Inches	187.20	P/Inch	4,492.80	187	4488	190	4,560.00
12	Sand Hero or any other source sand of the same modules of the fitness (Hill Sand)	6079 Cft	2,425.00	% Cft	147,415.75	2,425.00	147,415.75	2,425.00	147,415.75
13	Refilling the excavated stuff in trenches 6" th i/c layer including watering ramming to full compaction etc. complete	12500 Cft	2,760.00	% 0 Cft	34,500.00	2,760.00	34,500.00	2,760.00	34,500.00


(Handwritten signatures and initials)


NAME OF WORK: REPLACEMENT OF 4" DIA A.C / C/LINE BY PASS 110 MM POLYETHYLENE PIPE AT RATTAN TALAB, GALI NO.1 AND 3, SADDAR TOWN AND REPAIR THE LEAKAGES OF 18" DIA AND 24" DIA WATER LINES AND MANUFACTURING & PROVIDING / FIXING STAINLESS STEEL SPINDLE 18" DIA AND 24" AT DIFFERENT PLACES FOR THE IMPROVEMENT OF WATER SUPPLY POSITION IN SADDAR, DISTRICT SOUTH.


S.No	Description of Work	Engineer's Estimate			M/s. Unity Associates		M/s. Saim & Co		
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount
14	Manufacturing & Providing / Fixing Stainless spindle & Gun metal nuts of different size of different Sluice Valve. 18" Dia	2 Nos	23,820.00	Each	47,640.00	23800	47600	24000	48,000.00
	24" Dia	2 Nos	41,305.00	Each	82,610.00	41300	82600	42000	84,000.00
15	Repair of leaking joints external vatta on PRCC pipe i/c cost of excavation, labour, sealing material, dewatering and refilling of the excavated stuff 18" Dia	4 Nos	13,841.00	Each	55,364.00	13800	55200	20000	80,000.00
	24" Dia	1 Nos	18,360.00	Each	18,360.00	18300	18300	19000	19,000.00
					999,596.55		997,653.75		1,031,575.75
	Say				999,597		997,654		1,031,576


(Muhammad Nawaz Khan)
Accounts Officer (South)
Member/Secretary


(Saif-ul-Haque)
Additional Director Internal
Audit - KMC Member


(Maqsood Ahmed Shaikh)
Superintending Engineer (KMC)
Member


(Muhammad Arif)
Chief Engineer (South)
Member


(Abdul Rafiq Khattak)
Chief Engineer (IPD) (Convener)



KARACHI WATER & SEWERAGE BOARD
OFFICE OF THE CHIEF ENGINEER (IP&D)

BID EVALUATION REPORT


1	Name of Procuring Agency	KARACHI WATER & SEWERAGE BOARD
2	Tender Reference No	SPPRA Serial No.18468 I.D No. /2013
3	Tender Description/Name of Work/Item	REPLACEMENT OF 6" DIA & 8" DIA A.C / C.I LINE BY PASS 160 & 200 MM POLYETHYLENE PIPE AT OLD QUEENS ROAD OUTRAM ROAD FOR THE IMPROVEMENT OF WATER SUPPLY POSITION IN SADDAR, DISTRICT SOUTH.
4	Method of Procurement	Single Stage (One Envelop)
5	Tender Published	Through Web Site
6	Total Bid Documents Sold	2 Nos
7	Total Bid Received	2 Nos
8	Technical Bid Opening Date (if applicable)	N/A .
9	No. of Bid Technically Qualified (if applicable)	N/A .
10	Bid (s) rejected	Nil
11	Financial Bid Opening Date	20/01/2014


12 Bid Evaluation Report


S #	NAME OF FIRM OR BIDDER	COST OFFERED BY THE BIDDERS	RANKING IN TERMS OF COST	COMPARISON WITH ESTIMATED COST	REASON FOR ACCEPTANCE/ REJECTION	REMARKS
1	M/s. Unity Associates	Rs. 949,358/-	1st Lowest	@ 0.1601% Below	Substantially Responsive	P.O # AAA11135569 Dt: 20/01/2014 Rs.19,000/- Allied Bank Paposh Nagar Br
2	M/s. Saim & Co.	Rs. 967,868/-	2nd Lowest	@ 1.7864% Above	Substantially Responsive	P.O # 10107027 Dt: 20/01/2014 Rs.20,000/- HBL Khadija Mark Blk-1 North Nazimabad Br


The all concerned bidder are being informed accordingly.

The E.E Concerned for compliance of rule 45 of SPPRA 2010 M/s. Unity Associates declared as the lowest responsive bidder by the Committee and recommended for Sanction from Competent Authority.


(Muhammad Nawaz Khan)
Accounts Officer (South)
Member/Secretary


(Saif-ul-Haque)
Additional Director Internal
Audit - KMC Member


(Maqsood Ahmed Shaikh)
Superintending Engineer (KMC)
Member


(Muhammad Arif)
Chief Engineer (South)
Member


(Abou Rahim Khatti)
Chief Engineer (IPD),
id (Convener)

COMPARATIVE STATEMENT

NAME OF WORK: REPLACEMENT OF 6" DIA & 8" DIA A.C / C.I LINE BY PASS 160 & 200 MM POLYETHYLENE PIPE AT OLD QUEENS ROAD OUTRAM ROAD FOR THE IMPROVEMENT OF WATER SUPPLY POSITION IN SADDAR, DISTRICT SOUTH.

S.No	Description of Work	Engineer's Estimate				M/s. Unity Associates		M/s. Saim & Co	
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount
1	Dismantling and removing road mantling Excavation for pipe line in trenches & pits in all kind of soil of muram i/c trimming and dressing sides to the true alignment & shape leveling of beds of trenches to correct level and grade cutting joints holes & disposal of surplus earth with in a one chain as directed by Engineer Incharge providing fence guard light flag, and temporary crossing for non-vehicle traffic where ever required lift up to 5ft (1.52m) and lead up to on chain (30.5m)	2125 Cft.	605.00	% Cft	12,856.25	605.00	12,856.25	605.00	12,856.25
2	Excavation for pipe line in trenches & pits in hard rock by hammering and chiseling i/c trimming and dressing sides to the true alignment & shape leveling of beds of trenches to correct level and grade cutting joints holes & disposal of surplus earth with in a one chain as directed by Engineer Incharge providing fence guard light flag, and temporary crossing for non-vehicle traffic where ever required lift up to 5ft (1.52m) and lead up to on chain (30.5m)	10625 Cft	4,650.00	% 0 Cft	49,406.25	4,650.00	49,406.25	4,650.00	49,406.25
3	Providing Laying & fixing in trench i/c fitting jointing & testing etc complete in all respect the High Density Polyethylene pipe (HDPE-100) for B.S 3580 & psi 3051 (PN-10). 160mm 200mm	2125 Cft 5' - 8'	24,700.00	% 0 Cft	52,487.50	24,700.00	52,487.50	24,700.00	52,487.50
4	Providing Laying & fixing in trench i/c fitting jointing & testing etc complete in all respect the High Density Polyethylene pipe (HDPE-100) for B.S 3580 & psi 3051 (PN-10). 160mm 200mm	520 Rft 330 Rft	530.00 833.00	P/Rft P/Rft	275,600.00 274,890.00	529.00 832.00	275,080.00 274,560.00	550.00 835.00	286,000.00 275,550.00











NAME OF WORK: REPLACEMENT OF 6" DIA & 8" DIA A.C / C.I LINE BY PASS 160 & 70 MM POLYETHYLENE PIPE AT OLD QUEENS ROAD
 OUTRAM ROAD FOR THE IMPROVEMENT OF WATER SUPPLY POSITION IN SADDAR, DISTRICT SOUTH.

S.No	Description of Work	Engineer's Estimate				M/s. Unity Associates		M/s. Saim & Co	
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount
5	Providing of C.I. Sluice Valve heavy pattern (test pressure 21.0 kg/sq cm or 300 lbs /sq inch (Imported).....6" dia	1 Nos	9,360.00	Each	9,360.00	9,300.00	9,300.00	10,000.00	10,000.00
		1 Nos	17,940.00	Each	17,940.00	17,900.00	17,900.00	19,000.00	19,000.00
6	Fixing of Sluice valve with 2 cost iron tail piece one end of flanged And other with socket i/c cost of nut bolts packing and etc complete.6" dia	1 Nos	1,886.00	Each	1,886.00	1,800.00	1,800.00	2,000.00	2,000.00
		1 Nos	2,790.00	Each	2,790.00	2,800.00	2,800.00	3,000.00	3,000.00
7	Providing & Fixing Split Collar Tee on PRCC Pipe of different sizes having with mentioned against each item suit the size of connection fabricated with 3/8" thick M.S Plate existing the cost of the neck it includes the cost of 3/4" thick M.S square bars on both ends 4 Nos 3/4" M.S flanges with a total weight as mentioned against each items. it also includes the cost nut & bolts, rubber packing, labour and sealing material and all the tools & plants. Weight =104.86 12"x12" (2'-0") Weight =133.490 18"x18" (2'-0")	1 No	19,037.00	Each	19,037.00	19,000.00	19,000.00	20,000.00	20,000.00
		1 No	24,521.00	Each	24,521.00	24,500.00	24,500.00	25,000.00	25,000.00
8	Providing and fixing 0-9 long 3/8" thick M/S neck to existing M/S pipe or to split collar Tee having a total weight as mentioned against each item i/c the cost of fabrication and welding to the split collar tee Weight 10.90 Kg.....6" dia Weight 15.757 Kg.....8" dia	1 No	1,984.00	Each	1,984.00	1,900.00	1,900.00	2,000.00	2,000.00
		1 No	2,804.00	Each	2,804.00	2,800.00	2,800.00	3,000.00	3,000.00




 Wb
 10/12/01


NAME OF WORK: REPLACEMENT OF 6" DIA & 8" DIA A.C / C.I LINE BY PASS 160 & 200 MM POLYETHYLENE PIPE AT OLD QUEENS ROAD OUTRAM ROAD FOR THE IMPROVEMENT OF WATER SUPPLY POSITION IN SADDAR, DISTRICT SOUTH.

S.No	Description of Work	Engineer's Estimate			M/s. Unity Associates		M/s. Saim & Co		
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount
14	Repair of leaking joints external vatta on PRCC pipe i/c cost of excavation, labour, sealing material, dewatering and refilling of the excavated stuff	4 Nos	9,716.00	Each	38,864.00	9700	38800	10000	40,000.00
					950,881.48		949,358.48		967,868.48
	Say				950,881		949,358		967,868

(Signature)
 (Muhammad Nawaz Khan)
 Accounts Officer (South)
 Member/Secretary

(Signature)
 (Saif-ul-Haque)
 Additional Director Internal
 Audit - KMC Member

(Signature)
 (Maqsood Ahmed Shaikh)
 Superintending Engineer (KMC)
 Member

(Signature)
 (Abdul Rahim Khattai)
 Chief Engineer (IPD), (Convener)

(Signature)
 (Muhammad Arif)
 Chief Engineer (South)
 Member



KARACHI WATER & SEWERAGE BOARD
OFFICE OF THE CHIEF ENGINEER (IP&D)


BID EVALUATION REPORT


1	Name of Procuring Agency	KARACHI WATER & SEWERAGE BOARD
2	Tender Reference No	KWSB/DPR/2014/03 Published in i) Daily Dawn on dated: 05-01-2014 ii) Daily Jang iii) Daily Express Tribune on dated 06-01-2014 and SPPRA Serial No.18539 I.D No. /2014
3	Tender Description/Name of Work/Item	REPLACEMENT OF OLD UNSERVICEABLE DAMAGED PORTION 18" DIA. & 12" DIA SEWER LINE AT GIZRI COLONY-SHER MUHAMMAD BALOCH WALI GALI CLIFTON / SADDAR DISTRICT SOUTH.
4	Method of Procurement	Single Stage (One Envelop)
5	Tender Published	Through Web Site / Press
6	Total Bid Documents Sold	5 Nos
7	Total Bid Received	5 Nos
8	Technical Bid Opening Date (if applicable)	N/A .
9	No. of Bid Technically Qualified (if applicable)	N/A .
10	Bid (s) rejected	One
11	Financial Bid Opening Date	28/01/2014
12	Bid Evaluation Report	

S#	NAME OF FIRM OR BIDDER	COST OFFERED BY THE BIDDERS	RANKING IN TERMS OF COST	COMPARISON WITH ESTIMATED COST	REASON FOR ACCEPTANCE/ REJECTION	REMARKS
1	M/s Fashat & Co.	Rs. 1,694,474/-	1st Lowest	@ 13.6776% Below	Substantially Responsive	P.O # 2230106 Dt: 23/01/2014 Rs. 52,000/- Askari Bank Gulshan-e-Iqbal Br
2	M/s. King Asif Rehman & Bros	Rs. 1,825,429/-	3rd Lowest	@ 7.0063% Below	Substantially Responsive	P.O # 8039041 Dt: 28/01/2014 Rs. 18,500/- UBL Chandni Chowk Br P.O # 7806964 Dt: 27/01/2014 Rs. 10,000/- UBL Chandni Chowk Br P.O # 7806965 Dt: 27/01/2014 Rs. 10,000/- UBL Chandni Chowk Br
3	M/s. MD Construction & Co	Rs. 1,807,934/-	2nd Lowest	@ 7.8976% Below	Substantially Responsive	P.O # DRA/576339/243780 Dt: 28/01/2014 Rs. 39,260/- Islamic Bank Pakistan Al-Hilal Society
4	M/s Niaz Muhammad Construction Contractor	Rs. 1,958,161/-	4th Lowest	@ 0.2445% Below	Substantially Responsive	P.O # 1343732 Dt: 28/01/2014 Rs. 39,259/- Silk Bank SITE Br
5	M/s. Saifullah Muhammad Shahi	Not Quoted			Un Responsive	

The all concerned bidder are being informed accordingly.

The E E Concerned for compliance of rule 45 of SPPRA 2010 M/s. Fashat & Co. declared as the lowest responsive bidder by the Committee and recommended for Sanction from Competent Authority.


(Muhammad Nawaz Khan)
Accounts Officer (South)
Member/Secretary


(Saif-ul-Haque)
Additional Director Internal
Audit - KMC Member


(Maqsood Ahmed Shaikh)
Superintending Engineer (KMC)
Member


(Muhammad Arif)
Chief Engineer (South)
Member


(Abdul Rahim Khattai)
Chief Engineer (IPD),
(Convener)

COMPARATIVE STATEMENT
NAME OF WORK: REPLACEMENT OF OLD UNSERVICEABLE DAMAGED PORTION 18" DIA, & 12" DIA SEWER LINE AT GIZRI COLONY, SHER MUHAMMAD BALOCH WALI GALI CLIFTON / SADDAR DISTRICT SOUTH.

S.No	Description of Work	Engineer's Estimate			M/s. Fashat & Co.		M/s. King Asif Rehman & Bros		M/s. MD Construction & Co		M/s. Niaz Muhammad Construction Contractor	
		Quantity	Rate	Unit	Rate	Amount	Rate	Amount	Rate	Amount	Rate	Amount
1	Scarifying the existing road surface.	4250 Sft	116.16	%Sft	125.00	5,312.50	200.00	8,500.00	200.00	8,500.00	116.16	4,936.80
2	Dismantling and removing road metalling.	4250 Cft	605.00	%Cft	620.00	26,350.00	300.00	12,750.00	200.00	6,500.00	605.00	25,712.50
3	Excavation for pipe line in trenches, and pits in all kind of soils of murum i/c trimming and dressing sides to true alignment and shape leveling of beds of trenches to correct level and grade, cutting joint holes and disposal of surplus earth within a one chaine as directed by Engineer Incharge. Providing fence guard, lights, flags and temporary crossings for non-vehicular traffic where ever required lift upto 5ft (1.52m) and lead upto one chain(30.5m).	13800 Cft 4100 Cft 2800 Cft	4,650.00 5,200.00 5,750.00	% 0 Cft % 0 Cft % 0 Cft	4,690.00 5,300.00 6,000.00	64,722.00 21,730.00 16,800.00	5,000.00 2,000.00 2,000.00	69,000.00 8,200.00 5,600.00	5,000.00 6,000.00 6,000.00	69,000.00 24,600.00 16,800.00	4,650.00 5,200.00 5,750.00	64,170.00 21,320.00 16,100.00
4	Excavation for pipe line in trenches, and pits in hard rock by hammering and chiseling i/c trimming and dressing sides to true alignment and shape leveling of beds of trenches to correct level and grade, cutting joint holes and disposal of surplus earth within a one chaine as directed by Engineer Incharge. Providing fence guard, lights, flags and temporary crossings for non-vehicular traffic where ever required lift upto 5ft (1.52m) and lead upto one chain(30.5m).	3200 Cft 6400 Cft 5600 Cft	24,150.00 24,700.00 25,250.00	% 0 Cft % 0 Cft % 0 Cft	25,000.00 25,200.00 25,900.00	80,000.00 161,280.00 145,040.00	5,000.00 3,000.00 2,000.00	16,000.00 19,200.00 11,200.00	1,000.00 1,000.00 1,000.00	3,200.00 6,400.00 5,600.00	24,150.00 24,700.00 25,250.00	77,280.00 158,080.00 141,400.00
	Full hire charges of the pumping set per day inclusive of the wages of driver & assistant fuel or electric energy plate forms required for placing pumps etc. at lower depth with suction and delivery pipes for pumping out water found at various depths from trenches, including the cost of erection and dismantling after completion of the job of above 10 H.P from 10ft depth trench	48 Day	1,500.00	P/Day	2,000.00	96,000.00	1,000.00	48,000.00	1,000.00	48,000.00	1,400.00	67,200.00

Handwritten signature

Handwritten signature

Handwritten signature

Handwritten signature

NAME OF WORK: REPLACEMENT OF OLD UNSEALVICABLE DAMAGED PORTION 18" DIA, & 12" DIA SEWER LINE AT GIZRI COLDN, SHER MUHAMMAD BALOCH WALI GALI CLIFTON / SADDAR DISTRICT SOUTH.

S.No	Description of Work	Engineer's Estimate			M/s. Fashat & Co.		M/s. King Asif Rehman & Bros		M/s. MD Construction & Co		M/s. Niaz Muhammad Construction Contractor		
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount	Rate	Amount	Rate	Amount
12	Manufacturing and supplying of 21" dia RCC Manhole cover cast in 1:2:4 cement concrete ratio (50% graded bajri & 50% crush) 3" deep at centre reinforced with 1/2" dia M.S bar @ 4" c/c welded to 3/16" thick 2" wide M.S plat and two hook of 3/8" dia for bars i/c compacting, curing & transportation within 10 miles.	100 Nos	913.63	Each	91,363.00	1,500.00	150,000.00	600.00	60,000.00	1,500.00	150,000.00	913.63	91,363.00
	Total Quoted / Corrected Cost				1,962,961.22		2,118,092.64		1,825,429.07		1,807,934.28		1,958,161.22
	Say				1,962,961	20% Rebit	423,619		1,825,429		1,807,934		1,958,161
							1,694,474						

(Signature)
 (Muhammad Nawaz Khan)
 Accounts Officer (South)
 Member/Secretary

(Signature)
 (Saif-ul-Haque)
 Additional Director Internal
 Audit - KMC Member

(Signature)
 (Maqsood Ahmed Shaikh)
 Superintending Engineer (KMC)
 Member

(Signature)
 (Muhammad Arif)
 Chief Engineer (South)
 Member

(Signature)
 (Abdul Wahid Khattai)
 Chief Engineer (IPD) (Convener)