

Handwritten signature and stamp at the top right of the document.



Allied Bank

RASHID MINHAS ROAD BRANCH,  
KARACHI.

Not Over Rs. 44,000 \* \* \*

P.O. No 1980253

1980253/01243

DATE 28/01/2014

AYM.W.&.S.B.

OR ORDER

UPEES: FORTY FOUR THOUSAND ONLY.

ACCOUNT OF: SHAZIA SOHAIL

For Allied Bank of Pakistan Ltd.

Rs \*\*\*\*\*44,000.00

DO NOT WRITE BELOW THIS LINE

Handwritten signature and the word OFFICER printed below it.

Handwritten signature and the word OFFICER printed below it.

1980253 0140683:0000000000 020



# KARACHI WATER & SEWERAGE BOARD

## OFFICE OF THE EXECUTIVE ENGINEER (WATER)

### (SADDAR OLD CITY, DISTRICT SOUTH)

1<sup>ST</sup> UC-8, Office Jehangir Putangi Road Saddar Karachi.

Cell: 0331-2435582

SUBJECT: REPLACEMENT OF 4" DIA & 8" DIA A.C /C.I BY 110 MM & 200 MM POLYETHYLENE PIPE AT DIFFERENT STREETS OF RAM SWAMI AND HEERA NAND KHAMCHAND ROAD AND MANUFACTURING AND PROVIDING / FIXING OF STAINLESS STEEL SPINDLE & GUN METAL NUTS FOR 15", 18" AND 24" DIA SLUICE VALVE AT DIFFERENT PLACES OF THE IMPROVEMENT OF WATER SUPPLY POSITION IN OLD CITY AREAS OF SADDAR TOWN DISTRICT SOUTH.

Time Limit 45 Days.

Issued to M/s. Fasahat & Co

Penalty 1000 Per Day

Pay order No. 1980191 Date: 15-01-2014

TENDER CLERK  
Finance Department  
K. W. & S.B.

Issued as on dt. 22-01-2014.

ISSUING AUTHORITY

Sr.	Description	Quantity	Rate	Per	Amount
1.	Dismantling and removing road metalling.	6750 Cft	<u>640-00</u>	% Cft	43200-00
2.	Excavation for pipe line in trenches, pits in all kinds of soils of murum i/c. trimming and dressing sides to true alignment and shape leveling and grade, cutting joint holes and disposal of surplus earth within one chain as directed by Engineer Incharge. Providing fence guards ligts, flags and temporary crossing for non vehicular traffic where ever required lift upto 5 ft (1.52m) and lead upto one chain (30.5m). 0' to 5'	27250 Cft	<u>4720</u>	% 0Cft	128620-00
3.	Excavation for pipe line in trenches, pits in wet soils clay or mud i/c. trimming and dressing sides to true alignment and shape leveling and grade, cutting joint holes and disposal of surplus earth within one chain as directed by Engineer Incharge. Providing fence guards ligts, flags and temporary crossing for non vehicular traffic where ever required lift upto 5 ft (1.52m) and lead upto one chain (30.5m). 5' to 8'	10000 Cft	<u>6000</u>	% 0Cft	60000-00
4.	Providing, laying & Fixing in trenches i/c. fitting, jointing & testing etc. complete in all respect the high Density Polyethylene Pipe (HDPE-100) for B.S 3580 & PSI 3051 (PN-10). 110 mm	1300 Rft	<u>280-00</u>	P/Rft	364000-00
	200 mm	1400 Rft	<u>842-00</u>	P/Rft	1178800-00
5.	Providing C.I Valve heavy pattern test pressure 21.0 kg.sq corner 330 lb/sq. inch. 4" Dia	04 Nos.	<u>6000-00</u>	Each	24000-00
	8" Dia	02 Nos.	<u>20000-00</u>	Each	40000-00
	12" Dia	02 Nos.	<u>80000-00</u>	Each	160000-00

*Attested*

SYED TARIQ SHAH BUKHARI  
Executive Engineer (Water)  
Saddar town Zone-II-A, KW&SB

SUBJECT:

**REPLACEMENT OF 4" DIA & 8" DIA A.C /C.I BY 110 MM & 200 MM POLYETHYLENE PIPE AT DIFFERENT STREETS OF RAM SWAMI AND HEERA NAND KHAMCHAND ROAD AND MANUFACTURING AND PROVIDING / FIXING OF STAINLESS STEEL SPINDLE & GUN METAL NUTS FOR 15", 18" AND 24" DIA SLUICE VALVE AT DIFFERENT PLACES OF THE IMPROVEMENT OF WATER SUPPLY POSITION IN OLD CITY AREAS OF SADDAR TOWN DISTRICT SOUTH.**

Sr.	Description	Quantity	Rate	Per	Amount
6.	Fixing of Sluice Valve with 2 cast iron Tail Pieces, one end flanged and other with socket including the cost of nuts bolts and rubber packing, labour etc. complete.	4" Dia	04 Nos.	2000-00	Each 8000-00
		8" Dia	02 Nos.	3000-00	Each 6000-00
		12" Dia	02 Nos.	4200-00	Each 8400-00
7.	Providing / Fixing M.S Tail Piece (Dholki) on A.C Pipe fabricated with 1/4" thick M.S Plate, having dimension and weight as mentioned against item. It includes the cost of labour and sealing material etc. complete. Weight = 6.290 Kg. 4" Dia Weight = 12.750 Kg. 8" Dia	02 Nos.	1200-00	Each 2400-00	
		02 Nos.	2500-00	Each 5000-00	
8.	i. Providing & Fixing M.S Split Collar Tee on PRCC Pipe of different sizes having width as mentioned against each item to stuff the size of connection, fabricated with 3/8" thick M.S plate excluding the cost of the neck. It includes the cost of 3/4" thick M.S square bars on both ends, 4 Nos. 3/4" thick M.S flanges, with a total Nuts & Bolts, Rubber Packing, Labour and Sealing Material and all the tools and plants. Weight = 162.120 kg. 24" X 24" (2'.0") ii. C.I Special for UPVC / AC Pressure Pipe (Standart Weight for AC/L "B" Class) 6" x 4"	01 No.	33000-00	Each 33000-00	
		04 Nos.	1600-00	Each 6400-00	
9.	Providing & Fixing 0'-9' long - 3/8" thick M.S Neck to existing M.S Pipe or to a split collar tee having a total weight as mentioned against each item. It includes the cost of fabrication and welding to the split collar tee. Weight = 6.666 Kg. 4" Dia Weight = 15.757 Kg. 8" Dia	04 Nos.	2000-00	Each 8000-00	
		01 No.	3500-00	Each 3500-00	
10.	Construction of C.C block masonry chambers of (inside dimension) with 24" x 24" C.I cover & frame weighing 50 kg fixed on R.C.C 1:2:4 slab 6" c/c 1/4" dia @ 8" c/c distribution bars @ 6" thick C.C 1:3:6 block masonry walls set in 1:6 C.M 6" thick C.C 1:4:8 in foundation, 2" thick C.C 1:2:4 flooring 1/2" thick cement plaster 1:6 to all inside wall surfaces, top and bottom slab, out side wall surface 1"-0" deep up to roof slab i/c M.S foot rest 5" dia bars every 2"-0" deep, curing, excavation, de-watering, re filling etc complete. 4' x 4' x 4'	04 Nos.	29600	Each 118400-00	

Attested

SYED TARIQ SHAH RUKHARI  
Executive Engineer (Water)  
Saddar Town Zone-II-A. KVA&SB

**SUBJECT: REPLACEMENT OF 4" DIA & 8" DIA A.C /C.I BY 110 MM & 200 MM POLYETHYLENE PIPE AT DIFFERENT STREETS OF RAM SWAMI AND HEERA NAND KHAMCHAND ROAD AND MANUFACTURING AND PROVIDING / FIXING OF STAINLESS STEEL SPINDLE & GUN METAL NUTS FOR 15", 18" AND 24" DIA SLUICE VALVE AT DIFFERENT PLACES OF THE IMPROVEMENT OF WATER SUPPLY POSITION IN OLD CITY AREAS OF SADDAR TOWN DISTRICT SOUTH.**

Sr.	Description	Quantity	Rate	Per	Amount	
11.	Full Hire Charges of Pumping set per day inclusive of the wages of driver and assistant, fuel and electric energy plate from required for placing the pump etc, at lower depth with suction and delivery pipe for pumping out water pound at various depth from trenches including the cost of erection and dismantling after completion of job of 10HP form 10 Feet Depth, hire charges of pumping set of upto 10 HP pumping out water from 10 ft deep trench.	30 Days.	2000-00	P/Day	60000-00	
12.	Add of Deduct for extra / less depth then 5 ft of 4 ft dia manhole i/c. footrest.	(+) 36 Inches	240-00	P/Inch	8640-00	
13.	Refilling the excavated stuff in trenches 6" thick layer i/c. watering ramming to full compaction etc. complete.	36455.81 Cft	2800-00	% 0Cft	102076.26	
14.	Manufacturing & Providing / Fixing Stainless Steel Spindle & Gun Metal Nuts of different sizes of different Sluice Valve.	15" Dia	02 Nos.	20000-00	Each	40000-00
		18" Dia	02 Nos.	25000-00	Each	50000-00
		24" Dia	02 Nos.	44000-00	Each	88000-00
<b>Total</b>					<b>2546436.26</b>	

*m/28/01*

EXECUTIVE ENGINEER (W)  
SADDAR OLD CITY DISTRICTS SOUTH  
(KW&SB)

I hereby quoted bid amount of Rs. 2164472.82 (Rupees in words)

*Twenty one Lac Sixty Four thousand*

*Four hundred Seventy & eighty two Paise*  
*& 2/100 - Two Paise*

Signature of Contractor \_\_\_\_\_  
Address \_\_\_\_\_

1. Tender RECEIVED IN SEALED COVER  
2. Bid amount - 21,64,472.82/- Twenty One Lac Sixty Four thousand Four hundred Seventy & eighty two Paise only  
3. Bid amount - 44,000/- 44,000/- 44,000/- 44,000/-  
4. Bid amount - 21,64,472.82/-  
5. Bid amount - 21,64,472.82/-  
6. Bid amount - 21,64,472.82/-  
7. Bid amount - 21,64,472.82/-  
8. Bid amount - 21,64,472.82/-  
9. Bid amount - 21,64,472.82/-  
10. Bid amount - 21,64,472.82/-  
11. Bid amount - 21,64,472.82/-  
12. Bid amount - 21,64,472.82/-  
13. Bid amount - 21,64,472.82/-  
14. Bid amount - 21,64,472.82/-  
15. Bid amount - 21,64,472.82/-  
16. Bid amount - 21,64,472.82/-  
17. Bid amount - 21,64,472.82/-  
18. Bid amount - 21,64,472.82/-  
19. Bid amount - 21,64,472.82/-  
20. Bid amount - 21,64,472.82/-  
21. Bid amount - 21,64,472.82/-  
22. Bid amount - 21,64,472.82/-  
23. Bid amount - 21,64,472.82/-  
24. Bid amount - 21,64,472.82/-  
25. Bid amount - 21,64,472.82/-  
26. Bid amount - 21,64,472.82/-  
27. Bid amount - 21,64,472.82/-  
28. Bid amount - 21,64,472.82/-  
29. Bid amount - 21,64,472.82/-  
30. Bid amount - 21,64,472.82/-

*Accepted*

**SYED TARIQ SHAH BIKHARI**  
Executive Engineer (Water)  
Saddar Town Zone-II-A, KW&SB



**KARACHI WATER & SEWERAGE BOARD**  
**OFFICE OF THE CHIEF ENGINEER (IP&D)**


**BID EVALUATION REPORT**


1	Name of Procuring Agency	KARACHI WATER & SEWERAGE BOARD
2	Tender Reference No	KWSB/DPR/2014/04 Published in i) Daily Dawn on dated: 07-01-2014 ii) Daily Jang iii) Daily Express Tribune on dated 06-01-2014 and SPPRA Serial No.18538 I.D No. /2014
3	Tender Description/Name of Work/Item	REPLACEMENT OF 4" DIA & 8" DIA A C / C I BY 110 & 200 MM POLYETHYLENE PIPE AT DIFFERENT STREETS OF RAM SWAMI AND HEERA NAND KHAMCHAND ROAD AND MANUFACTURING & PROVIDING / FIXING OF STAINLESS STEEL SPINDLE & GUN METAL NUTS FOR 15", 18" AND 24" DIA SLUICE VALVE AT DIFFERENT PLACES OF THE IMPROVEMENT OF WATER SUPPLY POSITION IN OLD CITY AREAS OF SADDAR TOWN, DISTRICT SOUTH.
4	Method of Procurement	Single Stage (One Envelop)
5	Tender Published	Through Web Site / Press
6	Total Bid Documents Sold	5 Nos
7	Total Bid Received	5 Nos
8	Technical Bid Opening Date ( if applicable)	N/A.
9	No. of Bid Technically Qualified ( if applicable)	N/A.
10	Bid (s) rejected	One
11	Financial Bid Opening Date	28/01/2014
12	Bid Evaluation Report	


S #	NAME OF FIRM OR BIDDER	COST OFFERED BY THE BIDDERS	RANKING IN TERMS OF COST	COMPARISON WITH ESTIMATED COST	REASON FOR ACCEPTANCE/ REJECTION	REMARKS
1	M/s Fashat & Co	Rs. 2,164,471/-	1st Lowest	@ 11.7301% Below	Substantially Responsive	P.O # 1980253 Dt: 28/01/2014 Rs 44,000/- Allied Bank Rashid Minhas Rd Br
2	M/s Unity Associates	Rs. 2,227,964/-	2nd Lowest	@ 9.1408% Below	Substantially Responsive	P.O # AAA11135590 Dt: 27/01/2014 Rs 50,000/- Allied Bank Paposh Nagar Br
3	M/s King Asif Rehman & Bros	Rs. 2,399,484/-	3rd Lowest	@ 2.1460% Below	Substantially Responsive	P.O # 8039042 Dt: 28/01/2014 Rs 48,000/- UBL Chandni Chowk Br
4	M/s SOH Construction & Co	Rs. 2,507,248/-	4th Lowest	@ 2.2487% Above	Substantially Responsive	P.O # 10107120 Dt: 28/01/2014 Rs 51,000/- HBL Khadija Mark B k-1 North Nazimabad Br
5	M/s Saifullah Muhammad Shahi	Not Quoted			Un Responsive	


The all concerned bidder are being informed accordingly.


The E.E Concerned for compliance of rule 45 of SPPRA 2010 M/s. Fashat & Co. declared as the lowest responsive bidder by the Committee and recommended for Sanction from Competent Authority.

  
(Muhammad Nawaz Khan)  
Accounts Officer (South)  
Member/Secretary

  
(Saif-ul-Haque)  
Additional Director Internal  
Audit - KMC Member

  
(Maqsood Ahmed Shaikh)  
Superintending Engineer (KMC)  
Member

  
(Muhammad Arif)  
Chief Engineer (South)  
Member

  
(Abdul Rahim Khatt)  
Chief Engineer (IPD),  
(Convener)

**COMPARATIVE STATEMENT**

**NAME OF WORK: REPLACEMENT OF 4" DIA & 8" DIA A.C / C.I BY 110 & 200 MM POLYETHYLENE PIPE AT DIFFERENT STREETS OF RAM SWAMI AND HEERA NAND KHAMCHAND ROAD AND MANUFACTURING & PROVIDING / FIXING OF STAINLESS STEEL SPINDLE & GUN METAL NUTS FOR 15", 18" AND 24" DIA SLUICE VALVE AT DIFFERENT PLACES OF THE IMPROVEMENT OF WATER SUPPLY POSITION IN OLD CITY AREAS OF SADDAR TOWN, DISTRICT SOUTH.**

S.No	Description of Work	Engineer's Estimate				M/s. Fashat & Co.		M/s. Unity Associates		M/s. King Asif Rehman & Bros		M/s. SOH Construction & Co	
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount	Rate	Amount	Rate	Amount
		6750 Cft	605.00	% Cft	40,837.50	640.00	43,200.00	605.00	40,837.50	300.00	20,250.00	605.00	40,837.50
1	Dismantling and removing road mantling Excavation for pipe line in trenches & pits in all kind of soil of muram i/c trimming and dressing sides to the true alignment & shape leveling of beds of trenches to correct level and grade cutting joints holes & disposal of surplus earth with in a one chain as directed by Engineer Incharge providing fence guard light flag, and temporary crossing for non vehicle traffic where ever required lift up to 5ft (1.52m) and lead up to on chain (30.5m)	27250 Cft	4,650.00	% 0 Cft	126,712.50	4,720.00	128,620.00	4,650.00	126,712.50	5,000.00	136,250.00	4,650.00	126,712.50
2	Excavation for pipe line in trenches & pits in wet soil clay or mud i/c trimming and dressing sides to the true alignment & shape leveling of beds of trenches to correct level and grade cutting joints holes & disposal of surplus earth with in a one chain as directed by Engineer Incharge providing fence guard light flag, and temporary crossing for non vehicle traffic where ever required lift up to 5ft (1.52m) and lead up to on chain (30.5m)	10000 Cft	5,950.00	% 0 Cft	59,500.00	6,000.00	60,000.00	5,950.00	59,500.00	5,000.00	50,000.00	5,950.00	59,500.00
3	Providing laying & fixing in trench i/c fitting jointing & testing etc complete in all respect the B.S 3530 & psi 3051 (PVC 107)	1300 Rft 1400 Rft	268.00 833.00	P/Rft P/Rft	348,400.00 1,166,200.00	280.00 842.00	364,000.00 1,178,800.00	240.00 700.00	312,000.00 980,000.00	480.00 850.00	624,000.00 1,190,000.00	275.00 850.00	357,500.00 1,190,000.00
5	Providing of C.I Sluice Valve heavy pattern (test pressure 210 kg/sq cm or 300 lbs/sq inch (unimported))	4 Nos 2 Nos 2 Nos	5,460.00 17,040.00 78,000.00	Each Each Each	21,840.00 35,880.00 156,000.00	6,000.00 20,000.00 80,000.00	24,000.00 40,000.00 160,000.00	5,400.00 17,900.00 78,000.00	21,600.00 35,800.00 156,000.00	5,000.00 10,000.00 20,000.00	20,000.00 20,000.00 40,000.00	5,500.00 17,900.00 78,000.00	22,000.00 35,800.00 156,000.00
6	Fixing of Sluice valve with 2 cast iron tail piece one end of flanged And other with socket i/c cost of nut bolts parking and etc complete.	4 Nos 2 Nos 2 Nos	1,532.00 2,790.00 3,821.00	Each Each Each	6,128.00 5,580.00 7,642.00	2,000.00 3,000.00 4,200.00	8,000.00 6,000.00 8,400.00	1,500.00 2,800.00 3,800.00	6,000.00 5,600.00 7,600.00	2,000.00 3,000.00 4,000.00	8,000.00 6,000.00 8,000.00	1,500.00 3,000.00 4,000.00	6,000.00 6,000.00 8,000.00

*Handwritten signatures and initials are present on the right side of the page, including a large signature that appears to read 'M/s. SOH Construction & Co' and other smaller initials.*


NAME OF WORK: REPLACEMENT OF 4" DIA & 8" DIA A.C / C.I BY 110 & 200 MM POLYETHYLENE PIPE AT DIFFERENT STREETS OF RAM SWAMI AND HEERA NAND KHAMCHAND ROAD AND MANUFACTURE & PROVIDING / FIXING OF STAINLESS STEEL SPINDLE & GUN METAL NUTS FOR 15", 18" AND 24" DIA SLUICE VALVE AT DIFFERENT PLACES OF THE IMPROVEMENT OF WATER SUPPLY POSITION IN OLD CITY AREAS OF SADDAR TOWN, DISTRICT SOUTH.


S No	Description of Work	Engineer's Estimate			M/s. Fashat & Co.		M/s. Unity Associates		M/s. King Asif Rehman & Bros		M/s. SOH Construction & Co	
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount	Rate	Amount	Rate
7	Providing & Fixing M.S Tail Piece (Dholki) on AC Pipe fabricated with 1/4" thick M.S Plate having dimension and weight as mentioned against each items. it includes the cost of labour and sealing material etc complete. Weight = 6.290 Kg 4" Dia Weight = 12.750 Kg 8" Dia	2 Nos 2 Nos	1.098 00 2.199 00	Each Each	2,196 00 4,398 00	1,200 00 2,500 00	2,200 00 4,400 00	10,000 00 10,000 00	20,000 00 20,000 00	1,200 00 2,200 00	2,400 00 5,000 00	2,400 00 4,400 00
8	Providing & Fixing Split Collar Tee on PRCC Pipe of different sizes having with mentioned against each item suit the size of connection fabricated with 3/8" thick M.S Plate existing the cost of the neck it includes the cost of 3/4" thick M.S square bars on both ends 4 Nos 3/4" M.S flanges with a total weight as mentioned against each items. it also includes the cost nut & bolts, rubber packing, labour and sealing material and all the tools & plants. Weight = 162.120 Kg 24"x24" (2'-0") # C.I Special for UPVC / Ac Pressure pipe (standard weight for ACIL 'B' Class) 6"x4"	1 No 4 Nos	29,155 00 1,375 00	Each Each	29,155 00 5,500 00	33,000 00 1,000 00	29,000 00 4,500 00	5,000 00 4,500 00	5,000 00 4,500 00	30,000 00 1,500 00	33,000 00 6,000 00	5,000 00 4,500 00
10	Providing and fixing 0-9 long 3/8" thick M/S neck to existing M/S pipe or to split collar Tee having a total weight as mentioned against each item ifc the cost of fabrication and welding to the split collar tee Weight 6.665 Kg 4" dia Weight 15.757 Kg 6" dia Construction of C.C Block masonry chamber of size 4'x4'x4' (inside dimension) with 24"x24" C.I cover from with 50 Kg fixed R.C 1:2.4 slab 4.5 inches thick with steel 1/2" dia for bars @ 6" C.C with chamber sent up both way distribution bar 6" c.c 1:4.8 m four ndation 2" thick c.c 1:2.4 flooring 1/2" thick cement plaster 1:3 ratio inside wall surface top and bottom slab outer side wall surface 1 feet deep up to roof slab M.S foot rest 5/8" bars at every 2foot gap 1/2" curing dewatering excavated on trenching and disposal of surplus earth complete 4'x4'x4'	4 Nos 1 No 4 Nos	1,229 00 2,804 00 1,375 00	Each Each Each	4,916 00 2,804 00 5,500 00	2,000 00 3,500 00 1,000 00	1,229 00 2,804 00 4,500 00	4,916 00 3,500 00 4,500 00	40,000 00 3,500 00 4,500 00	10,000 00 3,500 00 1,500 00	8,000 00 3,500 00 4,500 00	40,000 00 3,500 00 4,500 00
					113,428 00	29,600 00	113,200 00	5,000 00	20,000 00	30,000 00	118,400 00	120,000 00


*(Handwritten signatures and initials)*


NAME OF WORK: REPLACEMENT OF 4" DIA & 8" DIA A.C / C.I BY 110 & 200 MM POLYETHYLENE PIPE AT DIFFERENT STREETS OF RAM SWAMI AND HEERA NAB-KHAMSHAND ROAD AND MANUFACTURING & PROVIDING / FIXING OF STAINLESS STEEL SPINDLE & GUN METAL NUTS FOR 15", 18" AND 24" DIA SLUICE VALVE AT DIFFERENT PLACES OF THE IMPROVEMENT OF WATER SUPPLY POSITIDN IN OLD CITY AREAS OF SADDAR TOWN, DISTRICT SOUTH.


S.No	Description of Work	Engineer's Estimate			M/s. Fashat & Co.		M/s. Unity Associates		M/s. King Asif Rehman & Bros		M/s. SOH Construction & Co	
		Quantity	Rate	Unit	Rate	Amount	Rate	Amount	Rate	Amount	Rate	Amount
11	Full hire charges of pumping set i/c wages of driver and Assistant fuel or electric energy plate form required for placing or at lower depths with suction and delivery pipes for pumping and water found at various depth form trenches i/c cost of erection and dismantling after completion of the job. (i) Hire charges of pumping set of upto 10 H.P. pumping out water for 10 feet deep trench Add Deduct for extra / less depth then 5 ft of 4ft dia manholes i/c footrest	30 Day	1,500.00	P/Day	2000	60,000.00	1500	45000	1000	30,000.00	1600	48,000.00
12	Refilling the excavated stuff in trenches 6" th i/c layer including watering ramming to full compaction etc. complete	36 inches	187.20	P/Inch	240	8,640.00	180	6,480	2	72.00	180	6,480.00
13	Manufacturing & Providing / Fixing Stainless spindle & Gun metal nuts of different size of different Sluice Valve.	36455 81 Cft	2,760.00	% 0 Cft	2,800.00	102,076.27	2,760.00	100,618.04	2,000.00	72,911.62	2,760.00	100,618.04
14		2 Nos	16,191.00	Each	20000	40000	16000	32000	5000	10,000.00	20000	40,000.00
		2 Nos	23,820.00	Each	25000	50000	23800	47600	5000	10,000.00	24000	48,000.00
		2 Nos	41,305.00	Each	44000	88000	41300	82600	7000	14,000.00	42000	84,000.00
						2,546,436.27		2,227,964.04		2,399,483.62		2,507,248.04
	Say					2,546,436		2,227,964		2,399,484		2,507,248
					15% Rebit	381,965						
						2,164,471						

  
(Maqsood Ahmed Shaikh)  
Superintending Engineer (KMC)  
Member

  
(Abdul Rahim Khattak)  
Chief Engineer (IPB), (Convener)

  
(Saif-ul-Haque)  
Additional Director Internal  
Audit - KMC Member

  
(Muhammad Nawaz Khan)  
Accounts Officer (South)  
Member/Secretary


  
(Muhammad Arif)  
Chief Engineer (South)  
Member



74333

2000/9

25  
1900

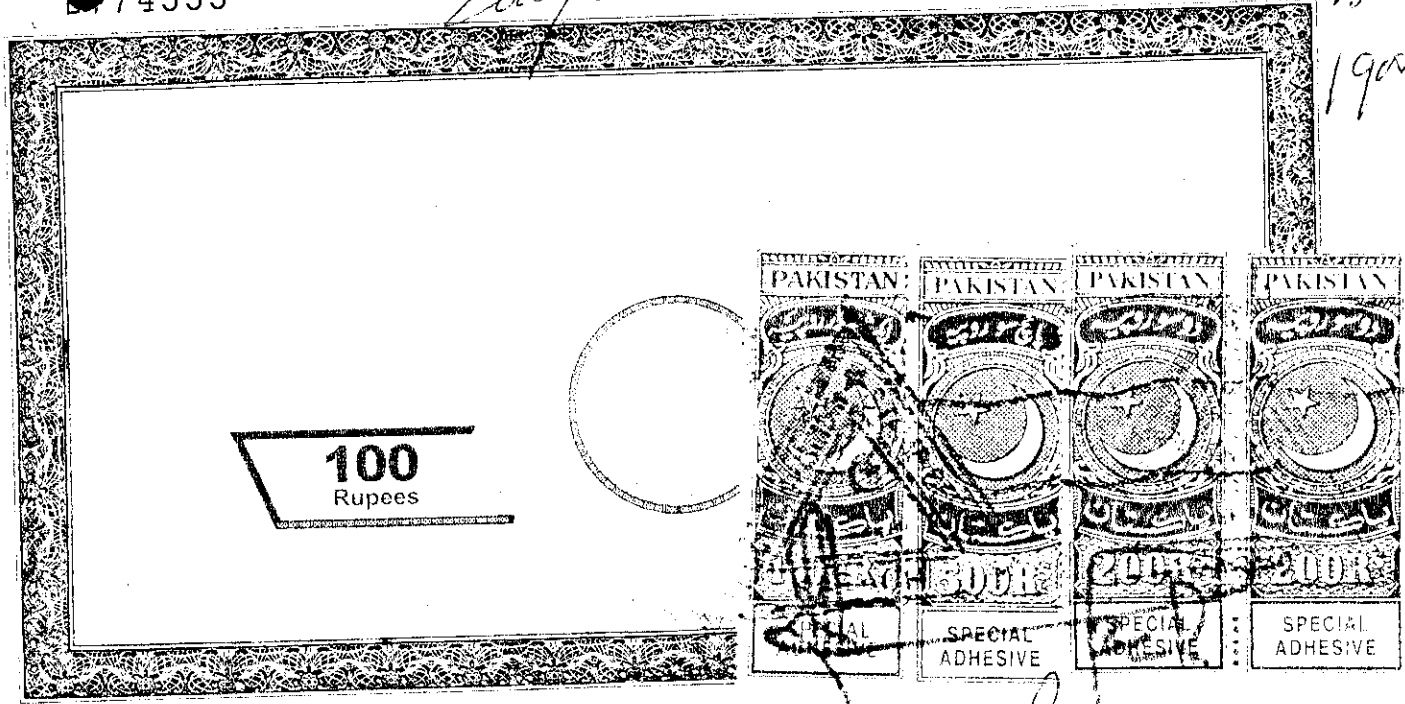

**ARIF BAIG STAMP VENDOR**  
 Licence No. 11, District of Karachi  
 Karim Plaza, Block 13, Gulshan-e-Iqbal


**CONTRACT AGREEMENT**

0,  
 DATE 10  
 ISSUED TO  
 THROUGH  
 PURPOSE  
 VALUE RS  
 VENDOR'S SIGN

This **CONTRACT AGREEMENT** made the 1<sup>st</sup> day of April 2014, between the **Karachi Water & Sewerage Board (KW&SB)**, Government of Sindh, Represented by its Chief Engineer, District South, KW&SB, (hereinafter called the "Employer" which expression shall wherever the context so admits or required to deemed to include their successor) on the one part as first Party **M/S. FASAHAHAT & CO.**, having their office at L-26, Block-13, Gulshan-e-Iqbal, Represented by the **MR. FASAHAHAT ULLAH KHAN** hereinafter called the "Contractor" (which expression shall wherever the context so admit or required be deemed to include their Executors, Administrators, Successors and permitted Assignees) on other part as second party.

WHEREAS the Employer is desirous to execute the work By **"REPLACEMENT OF 4" DIA & 8" DIA A.C / C.I BY 110 & 200 MM POLYETHYLENE PIPE AT DIFFERENT STREETS OF RAM SWAMI AND HEERA NAND KHAMCHAND ROAD AND MANUFACTURING & PROVIDING / FIXING OF STAINLESS STEEL SPINDLE & GUN METAL NUTS FOR 15", 18' & 24" DIA SLUICE VALVE AT DIFFERENT PLACES OF THE IMPROVEMENT OF WATER SUPPLY POSITION IN OLD CITY AREAS OF SADDAR TOWN, DISTRICT SOUTH."** Under KW&SB'S OWN FUNDED PROGRAMME and has accepted the Tender of the CONTRACTOR for **Rs.21,64,471/= (RUPEES TWENTY ONE LACS SIXTY FOUR THOUSAND FOUR HUNDRED SEVENTY ONE ONLY)** for the construction and completion of such WORKS and the remedying of an defects therein.

AND WHEREAS THE CONTRACTOR has already deposited 2% Pay Order for

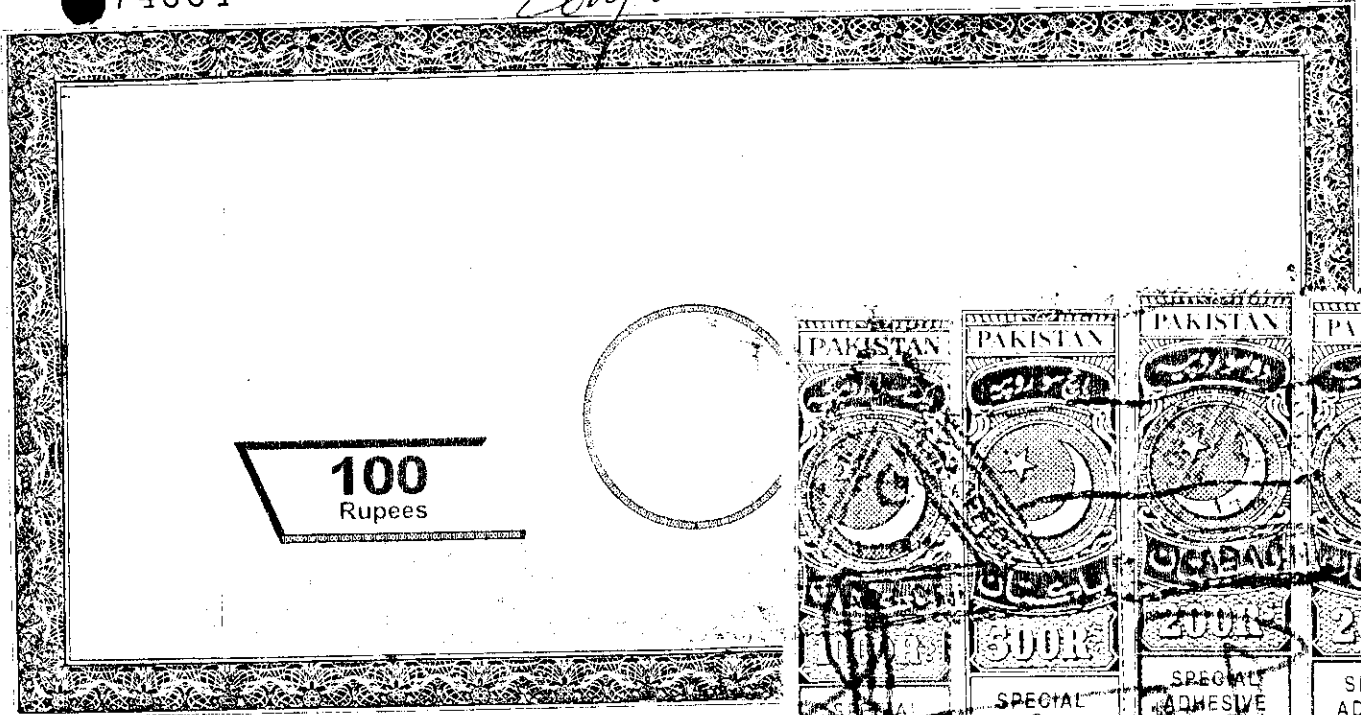

100  
Rupees

VENDOR

Hyderabad  
Sindh

080229

NOW this Agreement witnesses as follows:-

3. In this Agreement words and expression shall have the same meanings as are respectively assigned to them in the conditions of Contract hereinafter referred to.


4. The following documents which for the purpose of identification have been signed by **MR. FASAHAT ULLAH KHAN** on behalf of the contractor and by **MR. MUHAMMAD ARIF, CHIEF ENGINEER DISTRICT SOUTH, KW&SB**, on behalf the EMPLOYER all of which shall be deemed to form and be read and construed as part of this Agreement.

- a). This Form of Agreement.
- b). Employer letter of Acceptance No.CE/DE/W&S/LOA/KW&SB/2014/ 52 dated: 01-4-2014.
- c). The Tender.
- d). The conditions of the Particular Application - Part-II-A & II-B.
- e). The General Conditions - Part-I.
- f). The Drawings.
- g). The specifications and
- h). The Priced Bill of Quantities.


3. In consideration of the payments to be made by the EMPLOYER to the CONTRACTOR has hereinafter mentioned, the CONTRACTOR hereby covenants with the EMPLOYER to execute and complete the WORK and to remedy any defects therein and maintaining the same in conformity in all respects provisions of the CONTRACT.

5. THE EMPLOYER hereby covenants to pay to the CO

856713



48  
400

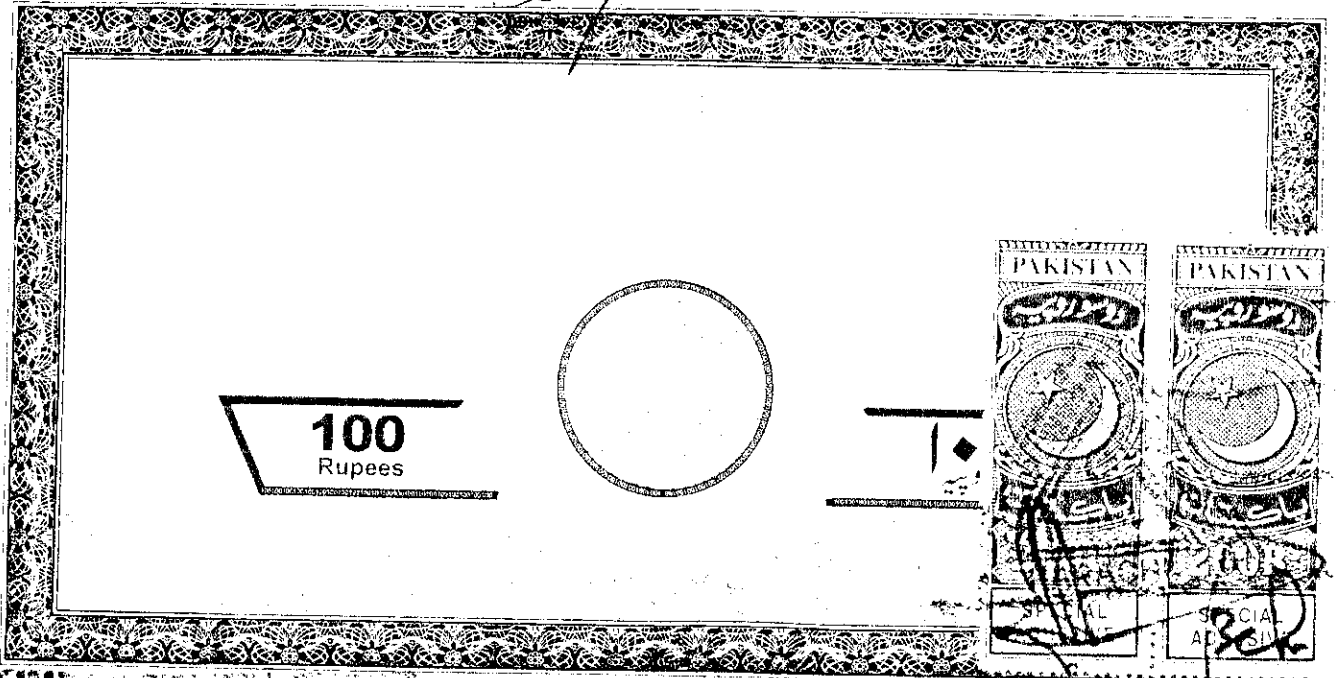

AGIR TIME  
Licence No  
Karnal 2014

083147

07 MAR 2014

ZOHIO MENMOOD

TO BE UTILIZED ONLY FOR THE WORK OF

REPLACEMENT OF 4" DIA & 8" DIA A.C / C.I BY 110 & 200 MM  
POLYETHYLENE PIPE AT DIFFERENT STREETS OF RAM SWAMI  
AND HEERA NAND KHAMCHAND ROAD AND MANUFACTURING &  
PROVIDING / FIXING OF STAINLESS STEEL SPINDLE & GUN  
METAL NUTS FOR 15", 18' & 24" DIA SLUICE VALVE AT  
DIFFERENT PLACES OF THE IMPROVEMENT OF WATER SUPPLY  
POSITION IN OLD CITY AREAS OF SADDAR TOWN, DISTRICT  
SOUTH"

FOR AMOUNTING TO Rs.21,64,471/=



(RUPEES TWENTY ONE LACS SIXTY FOUR THOUSAND FOUR  
HUNDRED SEVENTY ONE ONLY).

INFAVOUR OF M/S. FASAHAT & CO.

M/S. FASAHAT & CO.

EXECUTIVE ENGINEER (WATER)  
CLIFTON / SADDAR TOWN, DIST. SOUTH  
K.W.&S.B.

B709725

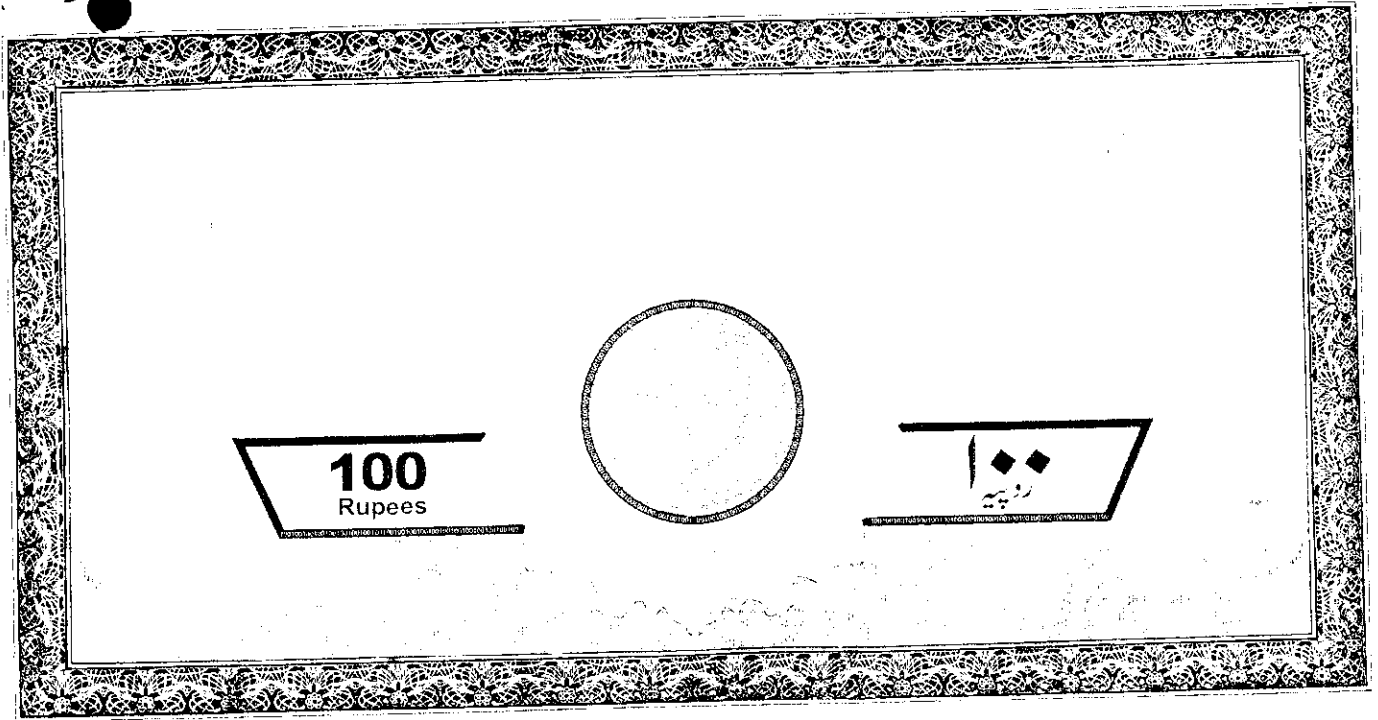

REVENUE ANNOTATED  
Licence No. 172  
K. Am. Pkt.

S. NO. **075886** 12 MAR 2011

REVENUE  
LICENCE  
NO. 172  
K. AM. PKT.

ZAHID  
Advocates

**TO BE UTILIZED ONLY FOR THE WORK OF**

**REPLACEMENT OF 4" DIA & 8" DIA A.C / C.I BY 110 & 200 MM  
POLYETHYLENE PIPE AT DIFFERENT STREETS OF RAM SWAMI  
AND HEERA NAND KHAMCHAND ROAD AND MANUFACTURING &  
PROVIDING / FIXING OF STAINLESS STEEL SPINDLE & GUN  
METAL NUTS FOR 15", 18' & 24" DIA SLUICE VALVE AT  
DIFFERENT PLACES OF THE IMPROVEMENT OF WATER SUPPLY  
POSITION IN OLD CITY AREAS OF SADDAR TOWN, DISTRICT  
SOUTH"**

**FOR AMOUNTING TO Rs.21,64,471/=**

**(RUPEES TWENTY ONE LACS SIXTY FOUR THOUSAND FOUR  
HUNDRED SEVENTY ONE ONLY).**

**INFAVOUR OF M/S. FASAHAAT & CO.**


M/S. FASAHAAT & CO.

EXECUTIVE ENGINEER (WATER)  
CLIFTON / SADDAR TOWN, DIST. SOUTH  
K. W. S. C. B.


200/-



2.  
19

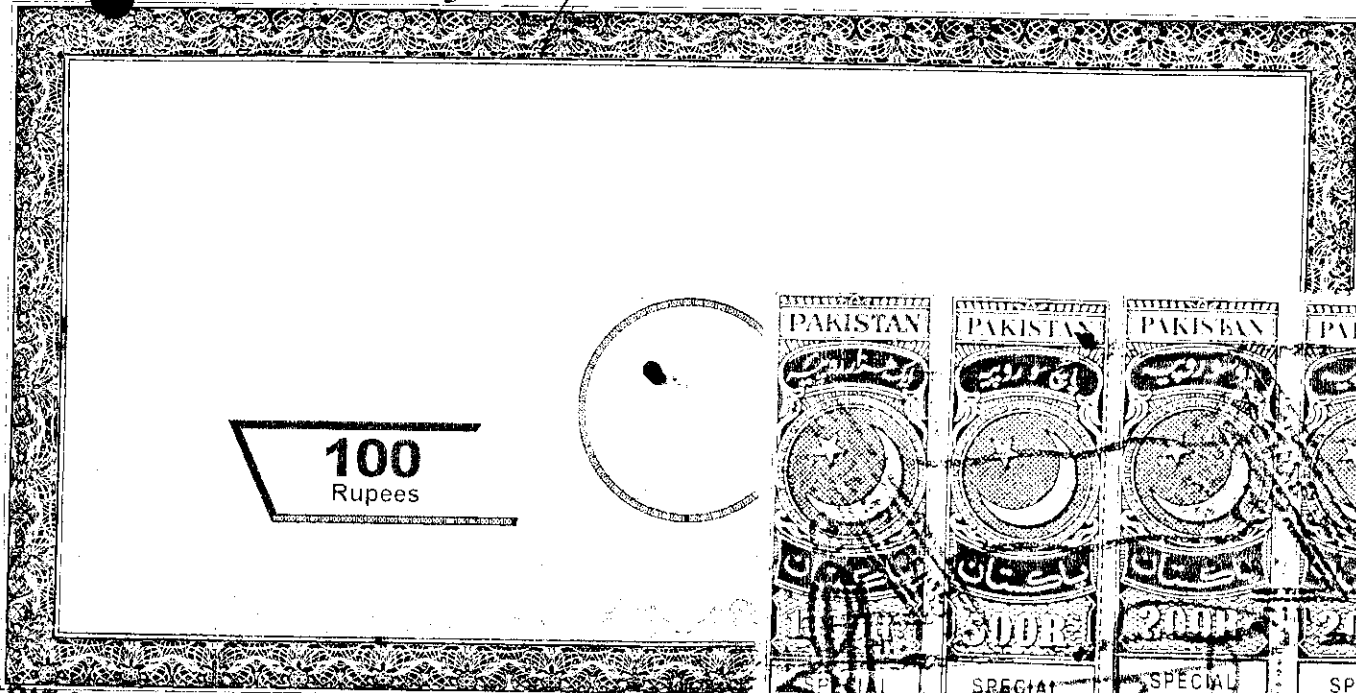

100  
Rupees

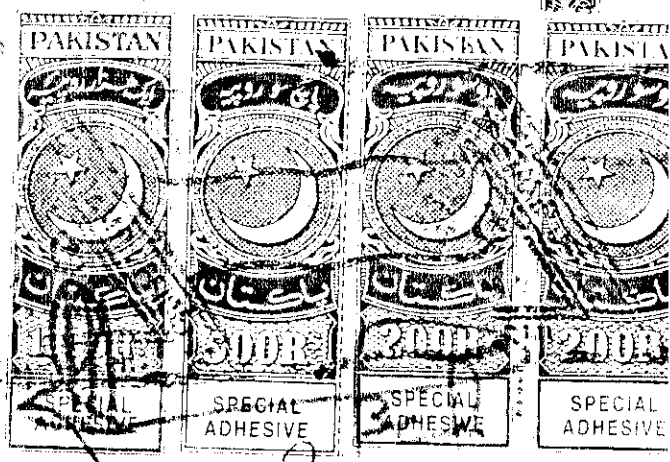

**ARIF BAIG STAMP VENDOR**

Licence No 09 Shop No 15 Block-14.  
Karim Plaza Gulshan-e-Iqbal

IN WITNESS WHEREOF, the parties hereto have set their respective hands  
and seats the day and year first above written.

S NO. 10 MAR 2014 080230

ISSUED THROUGH PURPOSE VALUE IN STAMP VENDOR'S SIGNATURE  
Signed, Sealed and Delivered by the

For and on behalf of  
EMPLOYER

For and on behalf of  
CONTRACTOR

**MUHAMMAD ARIF**  
CHIEF ENGINEER, DISTRICT SOUTH  
KW&SB.

**FASAHAT ULLAH KHAN**  
MANAGING PARTNER  
M/S. FASAHAT & CO.

WITNESS OF EMPLOYER

WITNESS OF CONTRACTOR

*Ansar Ahmed Khan*  
**ANSAR AHMED KHAN**  
SUPERINTENDING ENGINEER  
SADDAR TOWN, DISTRICT SOUTH  
K.W.&S.B.

PROJECT COORDINATOR

**SYED TARIQ SHAH BUKHARI**  
EXECUTIVE ENGINEER (WATER)  
SADDAR TOWN, DISTRICT SOUTH  
K.W.&S.B.



**KARACHI WATER & SEWERAGE BOARD**  
**OFFICE OF THE EXECUTIVE ENGINEER (WATER)**  
**(SADDAR OL CITY, DISTRICT SOUTH)**

No. E.E/W/S/O.C/D.S/KW&SB/2014/02.

Dated: 01-04-2014


**M/s. Fasahat & Co,**  
Office L-26, Block-13,  
Gulshan-e-iqbal  
Karachi.

**WORK ORDER**

SUBJECT:- **REPLACEMENT OF 4" DIA & 8" DIA A.C /C.I BY 110 MM & 200 MM POLYETHYLENE PIPE AT DIFFERENT STREETS OF RAM SWAMI AND HEERA NAND KHAMCHAND ROAD AND MANUFACTURING AND PROVIDING / FIXING OF STAINLESS STEEL SPINDLE & GUN METAL NUTS FOR 15", 18" AND 24" DIA SLUICE VALVE AT DIFFERENT PLACES OF THE IMPROVEMENT OF WATER SUPPLY POSITION IN OLD CITY AREAS OF SADDAR TOWN DISTRICT SOUTH.**

Consequent upon the submission of the formal acceptance of your side the Condition of Contract and Letter of Acceptance, you are here by directed to commence the work in strict accordance with the contract with shall be reckoned from the receipt of this letter and get completed within 45 Days, in case of any unjustified delay the penalty will be imposed Rs.1000/= Per Day.

Please acknowledge the receipt of the letter by signature in the space provided below.

  
EXECUTIVE ENGINEER (WATER)  
SADDAR OLD CITY DISTRICT SOUTH  
(KW&SB)

Copy to:-

1. Chief Engineer District South.
2. Superintending Engineer District South.
3. Budget Office, KW&SB.
4. Office Copy.

RECEIVED THE LETTER

Signature \_\_\_\_\_

Name: Fasahat & Co., \_\_\_\_\_

Proprietor: \_\_\_\_\_

Dated: \_\_\_\_\_

**A Allied Bank**

RASHID MINHAS ROAD BRANCH,  
KARACHI.

Not Over Rs. 44,000 \* \* \*

AYE W. S. S. B.

RUPEES: FORTY FOUR THOUSAND ONLY.

ACCOUNT OF: SHAZIA SOHAIL

Rs \*\*\*\*\*44,000.00

DO NOT WRITE BELOW THIS LINE

OFFICER

OFFICER

*2% Bid Security  
Pay Orders*

P.O. No 1980253

198025301243  
DATE 28/01/2014

OR ORDER

For Allied Bank of Pakistan Ltd.

⑈ 1980253⑈0140683⑈0000000000⑈020⑈



# KARACHI WATER & SEWERAGE BOARD

**OFFICE OF THE EXECUTIVE ENGINEER (WATER)**

**(SADDAR OLD CITY, DISTRICT SOUTH)**

1<sup>ST</sup> UC-8, Office Jehangir Putangi Road Saddar Karachi.  
Cell: 0331-2435582

**SUBJECT: REPLACEMENT OF 4" DIA & 8" DIA A.C /C.I BY 110 MM & 200 MM POLYETHYLENE PIPE AT DIFFERENT STREETS OF RAM SWAMI AND HEERA NAND KHAMCHAND ROAD AND MANUFACTURING AND PROVIDING / FIXING OF STAINLESS STEEL SPINDLE & GUN METAL NUTS FOR 15", 18" AND 24" DIA SLUICE VALVE AT DIFFERENT PLACES OF THE IMPROVEMENT OF WATER SUPPLY POSITION IN OLD CITY AREAS OF SADDAR TOWN DISTRICT SOUTH.**

Time Limit 45 Days.

Issued to M/s. Fasahat Etc

Penalty 1000 Per Day

Pay order No. 1980191 Date: 15-01-2014

*Issued as on dt. 22-01-2014.*

*[Signature]*  
TENDER CLERK  
Finance Department  
K. W. & S. B.

ISSUING AUTHORITY

Sr.	Description	Quantity	Rate	Per	Amount
1	Dismantling and removing road metalling.	6750 Cft	(640-00)	% Cft	43200-00
2	Excavation for pipe line in trenches, pits in all kinds of soils of murum i/c. trimming and dressing sides to true alignment and shape leveling and grade, cutting joint holes and disposal of surplus earth within one chain as directed by Engineer Incharge. Providing fence guards ligts, flags and temporary crossing for non vehicular traffic where ever required lift upto 5 ft (1.52m) and lead upto one chain (30.5m). 0' to 5'	27250 Cft	(4720)	% 0Cft	128626-00
3	Excavation for pipe line in trenches, pits in wet soils clay or mud i/c. trimming and dressing sides to true alignment and shape leveling and grade, cutting joint holes and disposal of surplus earth within one chain as directed by Engineer Incharge. Providing fence guards ligts, flags and temporary crossing for non vehicular traffic where ever required lift upto 5 ft (1.52m) and lead upto one chain (30.5m). 5' to 8'	10000 Cft	(6000)	% 0Cft	60000-00
4	Providing, laying & Fixing in trenches i/c. fitting, jointing & testing etc. complete in all respect the high Density Polyethylene Pipe (HDPE-100) for B.S 3580 & PSI 3051 (PN-10). 110 mm	1300 Rft	(280-00)	P/Rft	364000-00
	200 mm	1400 Rft	(842-00)	P/Rft	1178800-00
5	Providing C.I Valve heavy pattern test pressure 21.0 kg.sq corner 330 lb/sq. inch. 4" Dia	04 Nos.	(6000-00)	Each	24000-00
	8" Dia	02 Nos.	(20000-00)	Each	40000-00
	12" Dia	02 Nos.	(8000-00)	Each	16000-00



DIFFERENT STREETS OF RAM SWAMI AND HEERA NAND KHAMCHAND ROAD AND MANUFACTURING AND PROVIDING / FIXING OF STAINLESS STEEL SPINDLE & GUN METAL NUTS FOR 15", 18" AND 24" DIA SLUICE VALVE AT DIFFERENT PLACES OF THE IMPROVEMENT OF WATER SUPPLY POSITION IN OLD CITY AREAS OF SADDAR TOWN DISTRICT SOUTH.

Sr.	Description	Quantity	Rate	Per	Amount
6.	Fixing of Sluice Valve with 2 cast iron Tail Pieces, one end flanged and other with socket including the cost of nuts bolts and rubber packing, labour etc. complete. 4" Dia	04 Nos.	2000-00	Each	8000-00
		02 Nos.	3000-00	Each	6000-00
		02 Nos.	4200-00	Each	8400-00
7.	Providing / Fixing M.S Tail Piece (Dholki) on A.C Pipe fabricated with 1/4" thick M.S Plate, having dimension and weight as mentioned against item. It includes the cost of labour and sealing material etc. complete. Weight = 6.290 Kg. 4" Dia Weight = 12.750 Kg. 8" Dia	02 Nos.	1200-00	Each	2400-00
		02 Nos.	2500-00	Each	5000-00
8.	i. Providing & Fixing M.S Split Collar Tee on PRCC Pipe of different sizes having width as mentioned against each item to stuff the size of connection, fabricated with 3/8" thick M.S plate excluding the cost of the neck. It includes the cost of 3/4" thick M.S square bars on both ends, 4 Nos. 3/4" thick M.S flanges, with a total Nuts & Bolts, Rubber Packing, Labour and Sealing Material and all the tools and plants. Weight = 162.120 kg. 24" X 24" (2'0") ii. C.I Special for UPVC / AC Pressure Pipe (Standart Weight for AC/L "B" Class) 6" x 4"	01 No.	33000-00	Each	33000-00
		04 Nos.	1600-00	Each	6400-00
9.	Providing & Fixing 0'-9' long - 3/8" thick M.S Neck to existing M.S Pipe or to a split collar tee having a total weight as mentioned against each item. It includes the cost of fabrication and welding to the split collar tee. Weight = 6.666 Kg. 4" Dia Weight = 15.757 Kg. 8" Dia	04 Nos.	2000-00	Each	8000-00
		01 No.	3500-00	Each	3500-00
10.	Construction of C.C block masonry chambers of (inside dimension) with 24" x 24" C.I cover & frame weighing 50 kg fixed on R.C.C 1:2:4 slab 6" c/c 1/4" dia @ 8" c/c distribution bars @ 6" thick C.C 1:3:6 block masonry walls set in 1:6 C.M 6" thick C.C 1:4:8 in foundation, 2" thick C.C 1:2:4 flooring 1/2" thick cement plaster 1:6 to all inside wall surfaces, top and bottom slab, outé side wall surface 1"-0" deep up to roof slab i/c M.S foot rest 5" dia bars every 2"-0" deep, curing, excavation, de-watering, re filling etc complete. 4' x 4' x 4'	04 Nos.	29600	Each	118400-00

*m/ 28/07*

SUBJECT: REPLACEMENT OF 4" DIA & 8" DIA A.C /C.I BY 110 MM & 200 MM POLYETHYLENE PIPE AT DIFFERENT STREETS OF RAM SWAMI AND HEERA NAND KHAMCHAND ROAD AND MANUFACTURING AND PROVIDING / FIXING OF STAINLESS STEEL SPINDLE & GUN METAL NUTS FOR 15", 18" AND 24" DIA SLUICE VALVE AT DIFFERENT PLACES OF THE IMPROVEMENT OF WATER SUPPLY POSITION IN OLD CITY AREAS OF SADDAR TOWN DISTRICT SOUTH.

Sr.	Description	Quantity	Rate	Per	Amount
11.	Full Hire Charges of Pumping set per day inclusive of the wages of driver and assistant, fuel and electric energy plate from required for placing the pump etc, at lower depth with suction and delivery pipe for pumping out water pound at various depth from trenches including the cost of erection and dismantling after completion of job of 10HP form 10 Feet Depth, hire charges of pumping set of upto 10 HP pumping out water from 10 ft deep trench.	30 Days.	2000-00	P/Day	60000-00
12.	Add of Deduct for extra / less depth then 5 ft of 4 ft dia manhole i/c. footrest.	(+) 36 Inches	240-00	P/Inch	8640-00
13.	Refilling the excavated stuff in trenches 6" thick layer i/c. watering ramming to full compaction etc. complete.	36455.81 Cft	2800-00	% OCft	102076.26
14.	Manufacturing & Providing / Fixing Stainless Steel Spindle & Gun Metal Nuts of different sizes of different Sluice Valve.				
	15" Dia	02 Nos.	20000-00	Each	40000-00
	18" Dia	02 Nos.	25000-00	Each	50000-00
	24" Dia	02 Nos.	44000-00	Each	88000-00
<b>Total</b>					<b>2546436.26</b>

*m/28/01*

EXECUTIVE ENGINEER (W)  
SADDAR OLD CITY DISTRICTS SOUTH  
(KW&SB)

I hereby quoted bid amount of Rs. 21,64,475.22 (Rupees in words)

*Twenty One Lacs Eighty Two thousand Four hundred and seventy five and 22/100*

*Department - Sewerage*

Signature of Contractor \_\_\_\_\_

Address \_\_\_\_\_

RECEIVED IN SEALED COVER  
21,64,475.22/100  
Twenty One Lacs Eighty Two thousand Four hundred and seventy five and 22/100  
44,000/100 - District Bank Rashtreeya  
28-01-14  
S.E. (KMO)  
S.E. (IP&C)

**SINDH PUBLIC PROCUREMENT REGULATORY AUTHORITY**

**CONTRACT EVALUATION FORM**

**TO BE FILLED IN BY ALL PROCURING AGENCIES FOR PUBLIC CONTRACTS OF WORKS, SERVICES & GOODS**

- 1) NAME OF THE ORGANIZATION / DEPTT. Kw & SB
- 2) PROVINCIAL / LOCAL GOVT / OTHER Local Govt.
- 3) TITLE OF CONTRACT Replacement of 4" & 8" of A.C/C.I P.E pipe.
- 4) TENDER NUMBER SR. 18538
- 5) BRIEF DESCRIPTION OF CONTRACT Improvement of water supply system.
- 6) FORUM THAT APPROVED THE SCHEME M.D (Kw & SB)
- 7) TENDER ESTIMATED VALUE Rs. 24,47,981/=
- 8) ENGINEER'S ESTIMATE (For civil works only) Rs. 24,59,420/=
- 9) ESTIMATED COMPLETION PERIOD (AS PER CONTRACT) 45 Days
- 10) TENDER OPENED ON (DATE & TIME) 28-01-2014, 2:30 p.m.
- 11) NUMBER OF TENDER DOCUMENTS SOLD (Attach list of buyers) 05 Nos.
- 12) NUMBER OF BIDS RECEIVED 05 Nos.
- 13) NUMBER OF BIDDERS PRESENT AT THE TIME OF OPENING OF BIDS 05 Nos.
- 14) BID EVALUATION REPORT (Enclose a copy) Copy Enclosed
- 15) NAME AND ADDRESS OF THE SUCCESSFUL BIDDER M/S. FASA HAT & Co. (BIR-13, Gulcheraj)
- 16) CONTRACT AWARD PRICE Rs. 21,64,471/=
- 17) RANKING OF SUCCESSFUL BIDDER IN EVALUATION REPORT (i.e. 1<sup>st</sup>, 2<sup>nd</sup>, 3<sup>rd</sup> EVALUATION BID). 1<sup>st</sup> lowest

18) METHOD OF PROCUREMENT USED : - (Tick one)

- a) SINGLE STAGE – ONE ENVELOPE PROCEDURE  Domestic/ Local
- b) SINGLE STAGE – TWO ENVELOPE PROCEDURE
- c) TWO STAGE BIDDING PROCEDURE
- d) TWO STAGE – TWO ENVELOPE BIDDING PROCEDURE

PLEASE SPECIFY IF ANY OTHER METHOD OF PROCUREMENT WAS ADOPTED i.e. EMERGENCY, DIRECT CONTRACTING ETC. WITH BRIEF REASONS:

19) APPROVING AUTHORITY FOR AWARD OF CONTRACT M.D (KWSB).

20) WHETHER THE PROCUREMENT WAS INCLUDED IN ANNUAL PROCUREMENT PLAN?

Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

21) ADVERTISEMENT :

i) SPPRA Website  
(If yes, give date and SPPRA Identification No.)

Yes	<input checked="" type="checkbox"/>
No	<input type="checkbox"/>

ii) News Papers  
(If yes, give names of newspapers and dates)

Yes	<input checked="" type="checkbox"/>
No	<input type="checkbox"/>

22) NATURE OF CONTRACT

Domestic/ Local	<input checked="" type="checkbox"/>	Int.	<input type="checkbox"/>
--------------------	-------------------------------------	------	--------------------------

23) WHETHER QUALIFICATION CRITERIA  
WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?  
(If yes, enclose a copy)

Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

24) WHETHER BID EVALUATION CRITERIA  
WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?  
(If yes, enclose a copy)

Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

25) WHETHER APPROVAL OF COMPETENT AUTHORITY WAS OBTAINED FOR USING A  
METHOD OTHER THAN OPEN COMPETITIVE BIDDING?

Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

26) WAS BID SECURITY OBTAINED FROM ALL THE BIDDERS?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

27) WHETHER THE SUCCESSFUL BID WAS LOWEST EVALUATED  
BID / BEST EVALUATED BID (in case of Consultancies)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

28) WHETHER THE SUCCESSFUL BIDDER WAS TECHNICALLY  
COMPLIANT?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

29) WHETHER NAMES OF THE BIDDERS AND THEIR QUOTED PRICES WERE READ OUT AT  
THE TIME OF OPENING OF BIDS?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

30) WHETHER EVALUATION REPORT GIVEN TO BIDDERS BEFORE THE AWARD OF  
CONTRACT?

(Attach copy of the bid evaluation report)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

31) ANY COMPLAINTS RECEIVED  
(If yes, result thereof)

Yes	
No	✓

32) ANY DEVIATION FROM SPECIFICATIONS GIVEN IN THE TENDER NOTICE / DOCUMENTS  
(If yes, give details)

Yes	
No	✓

33) WAS THE EXTENSION MADE IN RESPONSE TIME?  
(If yes, give reasons)

Yes	
No	✓

34) DEVIATION FROM QUALIFICATION CRITERIA  
(If yes, give detailed reasons.)

Yes	
No	✓

35) WAS IT ASSURED BY THE PROCURING AGENCY THAT THE SELECTED FIRM IS NOT BLACK LISTED?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

36) WAS A VISIT MADE BY ANY OFFICER/OFFICIAL OF THE PROCURING AGENCY TO THE SUPPLIER'S PREMISES IN CONNECTION WITH THE PROCUREMENT? IF SO, DETAILS TO BE ASCERTAINED REGARDING FINANCING OF VISIT, IF ABROAD:  
(If yes, enclose a copy)

Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

37) WERE PROPER SAFEGUARDS PROVIDED ON MOBILIZATION ADVANCE PAYMENT IN THE CONTRACT (BANK GUARANTEE ETC.)?

Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

38) SPECIAL CONDITIONS, IF ANY  
(If yes, give Brief Description)

Yes	
No	✓

Signature & Official Stamp of  
Authorized Officer

**FOR OFFICE USE ONLY**

***SPPRA, Block. No.8, Sindh Secretariat No.4-A, Court Road, Karachi***  
***Tele: 021-9205356; 021-9205369 & Fax: 021-9206291***

Print

Save

Reset



**KARACHI WATER & SEWERAGE BOARD**  
**OFFICE OF THE CHIEF ENGINEER (IP&D)**


**BID EVALUATION REPORT**

1	Name of Procuring Agency	KARACHI WATER & SEWERAGE BOARD
2	Tender Reference No	KWSB/DPR/2014/04 Published in i) Daily Dawn on dated: 07-01-2014 ii) Daily Jang iii) Daily Express Tribune on dated 06-01-2014 and SPPRA Serial No.18538 I.D No. /2014
3	Tender Description/Name of Work/Item	REPLACEMENT OF 4" DIA & 8" DIA A.C / C.I BY 110 & 200 MM POLYETHYLENE PIPE AT DIFFERENT STREETS OF RAM SWAMI AND HEERA NAND KHAMCHAND ROAD AND MANUFACTURING & PROVIDING / FIXING OF STAINLESS STEEL SPINDLE & GUN METAL NUTS FOR 15", 18" AND 24" DIA SLUICE VALVE AT DIFFERENT PLACES OF THE IMPROVEMENT OF WATER SUPPLY POSITION IN OLD CITY AREAS OF SADDAR TOWN, DISTRICT SOUTH.
4	Method of Procurement	Single Stage (One Envelop)
5	Tender Published	Through Web Site / Press
6	Total Bid Documents Sold	5 Nos
7	Total Bid Received	5 Nos
8	Technical Bid Opening Date (if applicable)	N/A.
9	No. of Bid Technically Qualified (if applicable)	N/A.
10	Bid (s) rejected	One
11	Financial Bid Opening Date	28/01/2014
12	Bid Evaluation Report	


S#	NAME OF FIRM OR BIDDER	COST OFFERED BY THE BIDDERS	RANKING IN TERMS OF COST	COMPARISON WITH ESTIMATED COST	REASON FOR ACCEPTANCE/ REJECTION	REMARKS
1	M/s. Fashat & Co.	Rs. 2,164,471/-	1st Lowest	@ 11.7301% Below	Substantially Responsive	P.O # 1980253 Dt. 28/01/2014 Rs.44,000/- Allied Bank Rashid Minhas Rd Br
2	M/s. Unity Associates	Rs. 2,227,964/-	2nd Lowest	@ 9.1408% Below	Substantially Responsive	P.O # AAA11135590 Dt. 27/01/2014 Rs.50,000/- Allied Bank Paposh Nagar Br
3	M/s. King Asif Rehman & Bros	Rs. 2,399,484/-	3rd Lowest	@ 2.1460% Below	Substantially Responsive	P.O # 8039042 Dt. 28/01/2014 Rs.48,000/- UBL Chandni Chowk Br
4	M/s. SOH Construction & Co	Rs. 2,507,248/-	4th Lowest	@ 2.2487% Above	Substantially Responsive	P.O # 10107120 Dt. 28/01/2014 Rs.51,000/- HBL Khadija Mark Bk-1 North Nazimabad Br
5	M/s. Saifullah Muhammad Shahi	Not Quoted			Un Responsive	

The all concerned bidder are being informed accordingly.


The E.E Concerned for compliance of rule 45 of SPPRA 2010 M/s. Fashat & Co. declared as the lowest responsive bidder by the Committee and recommended for Sanction from Competent Authority.

  
(Muhammad Nawaz Khan)  
Accounts Officer (South)  
Member/Secretary

  
(Saif-ul-Haque)  
Additional Director Internal  
Audit - KMC Member

  
(Maqsood Ahmed Shaikh)  
Superintending Engineer (KMC)  
Member






  
(Muhammad Arif)  
Chief Engineer (South)  
Member

  
(Abdul Rahim Khatt)  
Chief Engineer (IPD),  
(Convener)

**COMPARATIVE STATEMENT**

**NAME OF WORK: REPLACEMENT OF 4" DIA & 8" DIA A.C / C.I BY 110 & 200 MM POLYETHYLENE PIPE AT DIFFERENT STREETS OF RAM SWAMI AND HEERA NAND KHAMCHAND ROAD AND MANUFACTURING & PROVIDING / FIXING OF STAINLESS STEEL SPINDLE & GUN METAL NUTS FOR 15", 18" AND 24" DIA SLUICE VALVE AT DIFFERENT PLACES OF THE IMPROVEMENT OF WATER SUPPLY POSITION IN OLD CITY AREAS OF SADDAR TOWN, DISTRICT SOUTH.**

S.No	Description of Work	Engineer's Estimate			M/s. Fashat & Co.		M/s. Unity Associates		M/s. King Asif Rehman & Bros		M/s. SOH Construction & Co	
		Quantity	Rate	Unit	Rate	Amount	Rate	Amount	Rate	Amount	Rate	Amount
1	Dismantling and removing road mantling Excavation for pipe line in trenches & pits in all kind of soil of muram i/c trimming and dressing sides to the true alignment & shape leveling of beds of trenches to correct level and grade cutting joints holes & disposal of surplus earth with in a one chain as directed by Engineer Incharge providing fence guard light flag, and temporary crossing for non-vehicle traffic where ever required lift up to 5ft (1.52m) and lead up to on chain (30.5m)	6750 Cft	605.00	% Cft	640.00	40,837.50	605.00	40,837.50	300.00	20,250.00	605.00	40,837.50
2	Excavation for pipe line in trenches & pits in wet soil clay or mud i/c trimming and dressing sides to the true alignment & shape leveling of beds of trenches to correct level and grade cutting joints holes & disposal of surplus earth with in a one chain as directed by Engineer Incharge providing fence guard light flag, and temporary crossing for non-vehicle traffic where ever required lift up to 5ft (1.52m) and lead up to on chain (30.5m)	27250 Cft	4,650.00	% 0 Cft	4,720.00	126,712.50	4,650.00	126,712.50	5,000.00	136,250.00	4,650.00	126,712.50
3	Providing Laying & fixing in trench i/c fitting jointing & testing etc complete in all respect the High Density Polyethylene pipe ( HDPE-100) for B.S 3580 & psi 3051 (PN-10).	10000 Cft	5,950.00	% 0 Cft	6,000.00	59,500.00	5,950.00	59,500.00	5,000.00	50,000.00	5,950.00	59,500.00
4	110mm 200mm Providing of C.I. Sluice Valve heavy pattern ( test pressure 21.0 kg/sq cm or 300 lbs /sq inch (Imported))	1300 Rft 1400 Rft	268.00 833.00	P/Rft P/Rft	280.00 842.00	348,400.00 1,166,200.00	240.00 700.00	312,000.00 980,000.00	480.00 850.00	624,000.00 1,190,000.00	275.00 850.00	357,500.00 1,190,000.00
5	8" dia 12" dia Fixing of Sluice valve with 2 cost iron tail piece one end of flanged And other with socket i/c cost of nut bolts packing and etc complete.	4 Nos 2 Nos 2 Nos	5,460.00 17,940.00 78,000.00	Each Each Each	6,000.00 20,000.00 80,000.00	24,000.00 40,000.00 160,000.00	5,400.00 17,900.00 78,000.00	21,600.00 35,800.00 156,000.00	5,000.00 10,000.00 20,000.00	20,000.00 20,000.00 40,000.00	5,500.00 17,900.00 78,000.00	22,000.00 35,800.00 156,000.00
6	4" dia 8" dia 12" dia	4 Nos 2 Nos 2 Nos	1,532.00 2,790.00 3,821.00	Each Each Each	2,000.00 3,000.00 4,200.00	8,000.00 6,000.00 8,400.00	1,500.00 2,800.00 3,800.00	6,000.00 5,600.00 7,600.00	2,000.00 3,000.00 4,000.00	8,000.00 6,000.00 8,000.00	1,500.00 3,000.00 4,000.00	6,000.00 6,000.00 8,000.00

NAME OF WORK: REPLACEMENT OF 4" DIA & 8" DIA A.C / C.I BY 110 & 200 MM POLYETHYLENE PIPE AT DIFFERENT STREETS OF RAM SWAMI AND HEERA NAND KHAMCHAND ROAD AND MANUFACTURING & PROVIDING / FIXING OF STAINLESS STEEL SPINDLE & GUN METAL NUTS FOR 15", 18" AND 24" DIA SLUICE VALVE AT DIFFERENT PLACES OF THE IMPROVEMENT OF WATER SUPPLY POSITION IN OLD CITY AREAS OF SADDAR TOWN, DISTRICT SOUTH.

S.No	Description of Work	Engineer's Estimate			M/s. Fashat & Co.		M/s. Unity Associates		M/s. King Asif Rehman & Bros		M/s. SOH Construction & Co		
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount	Rate	Amount	Rate	Amount
7	Providing & Fixing M.S Tail Piece (Dholki) on AC Pipe fabricated with 1/4" thick M.S Plate having dimension and weight as mentioned against each items. it includes the cost of labour and sealing material etc complete. Weight = 6,290 Kg 4" Dia	2 Nos	1,098.00	Each	2,196.00	1,200.00	2,400.00	1,100.00	2,200.00	10,000.00	20,000.00	1,200.00	2,400.00
		2 Nos	2,199.00	Each	4,398.00	2,500.00	5,000.00	2,200.00	4,400.00	10,000.00	20,000.00	2,200.00	4,400.00
8	Providing & Fixing Split Collar Tee on PRCC Pipe of different sizes having with mentioned against each item suit the size of connection fabricated with 3/8" thick M.S Plate existing the cost of the neck it includes the cost of 3/4" thick M.S square bars on both ends 4 Nos 3/4" M.S flanges with a total weight as mentioned against each items. it also includes the cost nut & bolts, rubber packing, labour and sealing material and all the tools & plants. Weight = 162,120 Kg 24"x24" (2'-0")	1 No	29,155.00	Each	29,155.00	33,000.00	33,000.00	29,000.00	29,000.00	5,000.00	5,000.00	30,000.00	30,000.00
		4 Nos	1,375.00	Each	5,500.00	1,600.00	6,400.00	1,375.00	5,500.00	5,000.00	20,000.00	1,500.00	6,000.00
	ii. C.I Special for UPVC / Ac Pressure pipe (standard weight for ACIL 'B' Class) 6"x4"	4 Nos	1,229.00	Each	4,916.00	2,000.00	8,000.00	1,229.00	4,916.00	10,000.00	40,000.00	1,500.00	6,000.00
		1 No	2,804.00	Each	2,804.00	3,500.00	3,500.00	2,800.00	2,800.00	15,000.00	15,000.00	3,000.00	3,000.00
10	Construction of C.C Block masonry chamber of size 4'x4'x4' (inside dimension) with 24"x24" C.I. cover from with 50 Kg fixed R.C 1:2.4 slab 4.5 inches thick with steel 1/2" dia for bars @ 6" C.C with chamber sent up both way distribution bar 6" c.c 1:4.8 m foundation 2" thick c.c 1:2.4 flooring 1/2" thick cement plaster 1:3 ratio inside wall surface top and bottom slab outer side wall surface 1 feet deep up to roof slab M.S foot rest 5/8" bars at every 2 foot deep 1/2" curing dewatering excavati on refilling and disposal of surplus earth complete 4'x4'x4'	4 Nos	28,357.00	Each	113,428.00	29,600	118,400.00	28,320	113,200	5,000	20,000.00	30,000	120,000.00

*Handwritten signature and date: 10/29/2010*



NAME OF WORK: REPLACEMENT OF 4" DIA & 8" DIA A.C / C.I BY 110 & 200 MM POLYETHYLENE PIPE AT DIFFERENT STREETS OF RAM SWAMI AND HEERA NAND KHAMCHAND ROAD AND MANUFACTURING & PROVIDING / FIXING OF STAINLESS STEEL SPINDLE & GUN METAL NUTS FOR 15", 18" AND 24" DIA SLUICE VALVE AT DIFFERENT PLACES OF THE IMPROVEMENT OF WATER SUPPLY POSITION IN OLD CITY AREAS OF SADDAR TOWN, DISTRICT SOUTH.

S.No	Description of Work	Engineer's Estimate			M/s. Fashat & Co.		M/s. Unity Associates		M/s. King Asif Rehman & Bros		M/s. SOH Construction & Co	
		Quantity	Rate	Unit	Rate	Amount	Rate	Amount	Rate	Amount	Rate	Amount
11	Full hire charges of pumping set i/c wages of driver and Assistant fuel or electric energy plate form required for placing or at lower depths with suction and delivery pipes for pumping and water found at various depth form trenches i/c cost of erection and dismantling after completion of the job.											
	(i) Hire charges of pumping set of upto 10 H.P. pumping out water for 10 feet deep trench	30 Day	1,500.00	P/Day	2000	60,000.00	1500	45000	1000	30,000.00	1600	48,000.00
12	Add Deduct for extra / less depth then 5 ft of 4ft dia manholes i/c footrest.	36 Inches	187.20	P/Inch	240	8,640.00	180	6480	2	72.00	180	6,480.00
13	Refilling the excavated stuff in trenches 6" th i/c layer including watering ramming to full compaction etc. complete	36455.81 Cft	2,760.00	% 0 Cft	2,800.00	102,076.27	2,760.00	100,618.04	2,000.00	72,911.62	2,760.00	100,618.04
14	Manufacturing & Providing / Fixing Stainless spindle & Gun metal nuts of different size of different Sluice Valve.											
	15" Dia	2 Nos	16,191.00	Each	20000	40000	16000	32000	5000	10,000.00	20000	40,000.00
	18" Dia	2 Nos	23,820.00	Each	25000	50000	23800	47600	5000	10,000.00	24000	48,000.00
	24" Dia	2 Nos	41,305.00	Each	44000	88000	41300	82600	7000	14,000.00	42000	84,000.00
	Say					2,452,106.24		2,227,954.04		2,399,483.62		2,507,248.04
						15% Rebit		2,227,964		2,399,484		2,507,248
						2,164,471						

(Saif-ul-Haque)  
Additional Director Internal  
Audit - KMC Member

(Maqsood Ahmed Shaikh)  
Superintending Engineer (KMC)  
Member

(Abdul Rahim Khattai)  
Chief Engineer (IPD), (Convener)

(Muhammad Nawaz Khan)  
Accounts Officer (South)  
Member/Secretary

(Muhammad Arif)  
Chief Engineer (South)  
Member