

**SINDH PUBLIC PROCUREMENT REGULATORY AUTHORITY**  
**CONTRACT EVALUATION FORM**

**TO BE FILLED IN BY ALL PROCURING AGENCIES FOR PUBLIC**  
**CONTRACTORS OF WORKS, SERVICES & GOODS.**

- 1). NAME OF THE ORGANIZATION / DEPTT. Town Committee, Chuhar Jamali, Sujawal
- 2). PROVINCIAL / LOCAL GOVT. / OTHER LOCAL GOVERNMENT
- 3). TITLE OF CONTRACT: **"CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN WARD NO-1 TOWN COMMITTEE CHUHAR JAMALI"**
- 4) TENDER NUMBER: as above
- 5). BRIEF DESCRIPTION OF CONTRACT: CC Paver Block & CC Drain
- 6). FORUM THAT APPROVED THE SCHEME Town Committee, Chuhar Jamali
- 7). TENDER ESTIMATED VALUE Rs. 10,00,000/=
- 8). ENGINEER'S ESTIMATE PC - Cost Rs: 1000000/-  
(FOR CIVIL WORK ONLY)
- 9). ESTIMATED COMPLETION PERIOD (AS PER CONTRACT) (0 1) MONTH
- 10). TENDER OPENED ON DATE AND TIME 02-11-2017 AT 02:00 PM.
- 11). NUMBER OF TENDER DOCUMENTS SOLD 03  
(Attach list of buyers).
- 12). NUMBER OF BIDS RECEIVED 03
- 13). NUMBERS OF BIDDERS PRESENT AT THE TIME OF OPEINING OF BIDS 03
- 14). BID EVALUATION REPORT YES  
(Enclose a copy)
- 15). NAME AND ADDRESS OF THE SUCCESSFUL BIDDER. M/S Muhammad Juman Mandhrio
- 16). CONTRACT AWARD PRICE SANCTION RUPEES Rs: 499862/-
- 17). RANKING OF SUCCESSFUL BIDDER IN EVALUATION REPORT 1<sup>st</sup> Lowest M/S Muhammad Juman Mandhrio  
(I.E. 1ST 2ND 3RD EVALUATION BID). 2<sup>nd</sup> LOWEST M/S Abdul Sattar Kehar  
3<sup>rd</sup> LOWEST M/S Abdul Hakeem Chandio
- 18). METHOD OF PROCUREMENT USED: - (TICK ONE)
- A). SINGLE STAGE-ONE ENVELOPE PROCEDURE \_\_\_\_\_ ✓ \_\_\_\_\_
- B). SINGLE STAGE-TWO ENVELOPE PROCEDURE \_\_\_\_\_
- C). TWO STAGE BIDDING PROCEDURE \_\_\_\_\_
- D). TWO STAGE-TWO ENVELOPE BIDDING PROCEDURE \_\_\_\_\_

PLEASE SPECIFY IF ANY OTHER METHOD OF PROCUREMENT WAS ADOPTED i.e. EMERGENCY, DIRECT CONTRACTING ETC. WITH BRIEF REASONS.

19). PROVIDING AUTHORITY FOR AWARD OF CONTRACT CHAIRMAN TC, CHUHAR JAMALI

20). WHETHER THE PROCUREMENT WAS INCLUDED IN ANNUAL PROCUREMENT PLAN

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

21). ADVERTISEMENT:

i) SPPRA Website  
(if yes give date & SPPRA Identification No.

YES	<a href="http://www.pprasindhgov.pk">www.pprasindhgov.pk</a> SPPRA Tender SR No. 34792 Dt: 02-11-2017		
-----	--	--	--

ii) Newspapers  
(if yes give names of newspapers & dates)

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

22). NATURE OF CONTRACT

DOMESTIC/ LOCAL	<input checked="" type="checkbox"/> LOCAL	INT	
-----------------	--	-----	--

23). WHETHER QUALIFICATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?

(If yes, enclose copy).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

24). WHETHER BID EVALUATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?

(if, yes enclose a copy).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

25). WHETHER APPROVAL OF COMPETENT AUTHORITY WAS OBTAINED FOR USING A METHOD OTHER THAN OPEN COMPETITIVE BIDDING?

YES		NO	N/A
-----	--	----	-----

26). WAS BID SECURITY OBTAINED FROM ALL THE BIDDERS?

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

27). WHETHER THE SUCCESSFUL BID WAS LOWEST EVALUATED BID / BEST EVALUATED BID (In case of Consultancies).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

28). WHETHER THE SUCCESSFUL BIDDER WAS TECHNICALLY COMPLAINT?

YES		NO	N/A
-----	--	----	-----

29). WHETHER NAMES OF THE BIDDERS AND THEIR QUOTED PRICES WERE READ OUT AT THE TIME OF OPENING OF BIDS?

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

30). WHETHER EVALUATION REPORT GIVEN TO BIDDERS BEFORE THE AWARD OF CONTRACT?

(Attach a copy of the bid evaluation report).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

31). ANY COMPLAINTS RECEIVED  
(if yes, result thereof).

YES		NO	N/A
-----	--	----	-----

32). ANY DEVIATION FROM SPECIFICATIONS GIVEN IN THE TENDER  
NOTICE / DOCUMENTS ( if yes, given details).

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

33). WAS THE EXTENSION MADE IN RESPONSE TIME?  
(if yes, given reasons)

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

34). DEVIATION FROM QUALIFICATION CRITERIA  
(if yes, detailed reasons).

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

35). WAS IT ASSURED BY THE PROCURING AGENCY THAT THE SELECTED  
FIRM IS NOT BLACK LISTED?

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

36). WAS A VISIT MADE BY ANY OFFICER / OFFICIAL OF THE PROCURING  
AGENCY TO THE SUPPLIER'S PREMISES IN CONNECTION WITH THE PROCUREMENT?  
IF SO, DETAILS TO BE ASCERTAINED REGARDING FINANCING OF VISIT, IF ABROAD:  
(if yes, enclose a copy)

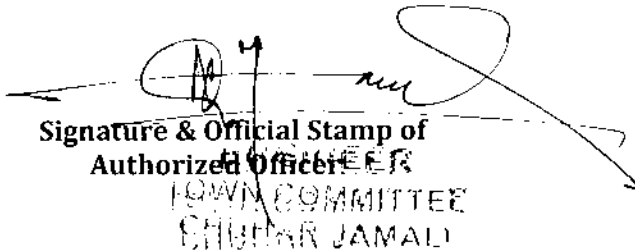
YES		NO	N/A
-----	--	----	-----

37). WERE PROPER SAFEGUARDS PROVIDED ON MOBILIZATION ADVANCE PAYMENT IN THE  
CONTRACT ( BANK GUARANTEE ETC)?

YES		NO	N/A
-----	--	----	-----

38). SPECIAL CONDITION, IF ANY  
(if yes, give Brief Description)

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

  
Signature & Official Stamp of  
Authorized Officer  
TOWN COMMITTEE  
SHIBPUR JAMALI

FOR OFFICE USE ONLY

**SPPRA, Block No. 8, Sindh Secretariat No. 4-A, Court Road, Karachi**  
Tel: 021-9205356, 021-9205369 & Fax No. 021-9206291.

# OFFICE OF THE TOWN COMMITTEE

## CHUHAR JAMALI

NO.T.C.C.J./T.O/ 31

/2017

Dated: 15/10/2017

M/s. MUHAMMAD JUMAN MANDHRIO,  
GOVERNMENT CONTRACTOR

### LETTER OF ACCEPTANCE / SANCTION ORDER

**Subject: CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN WARD NO-1 TOWN COMMITTEE CHUHAR JAMALI**

On behalf of the employer it is notified that following the approval of accepted of Chairman, Town Committee, Chuhar Jamali, vide Para 01 /No, your bid for the subject is hereby accepted for the sum of **Rs:9,99,862/- (Rupees. NINE LAC NINETY NINE THOUSAND EIGHT HUNDRED SIXTY TWO ONLY)** as approved by the competent authority Town Committee, Chuhar Jamali.

There is now binding contract between Town Committee, Chuhar Jamali and **M/s. Mohammad Juman Mandhrio,**

In accordance with the general condition of contract, you are required to enter in to and execute a contract agreement this agreement shall be signed by employer and **M/s. Mohammad Juman Mandhrio,**

In accordance with condition of contract as per SPPRA-2010 the 2% Bid security Rs:20,000/- and remaining 8% Security may deduct from bill.

All correspondence on onward shall be carried out through Town Officer, Town Committee, Chuhar Jamali.

  
TOWN OFFICER


TOWN COMMITTEE, CHUHAR JAMALI

Copy to:-

- 1- Chairman, Town Committee, Chuhar Jamali.
- 2- Assistant Executive Engineer, (Town Committee, Chuhar Jamali)
- 3- Office Copy.

# TOWN COMMITTEE CHUHAR JAMALI

## AGREEMENT



Subject: - CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN WARD NO-1 TOWN COMMITTEE CHUHAR JAMALI

Cost Rs.9,99,862/-

Completion Time (03 Months) penalty \_\_\_\_\_

The Agreement is made on this 20<sup>th</sup> Dec day of 2017 at Thatta, between Town Committee, Chuhar Jamali herein after called the Chuhar Jamali, Sujawal (Which expression shall mean and include his successors) on the one part and M/s. MOHAMMAD JUMAN MANDHRIQ have the office at Chairman T.C. Chuhar Jamali through their proprietor \_\_\_\_\_ hereinafter call the "Contractor" (Which expression shall mean and include his successors, administrator and assignees) on the other part.

Whereas the Town Committee, Chuhar Jamali, has accepted the tender of the contractor for construction and completion of the work namely CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN WARD NO-1 TOWN COMMITTEE CHUHAR JAMALI at a cost of Rs.9,99,862/- within a period of (03 Month) and penalty Rs. \_\_\_\_\_ according to the specification and general conditions of the contract signed by the Contractor after having made himself full acquainted with their meaning.

And whereas the Contractor has already furnished with the Town Committee, Chuhar Jamali the 2% bid amount of Rs.20,000/- (Rupees Twenty Thousand Only) on account of Bid / Performance security for the said contract.

The following documents after incorporating addenda, except those parts relating to instructions to bidders shall be deemed to form and be read and construed as part of this Agreement, viz:

- a) The Contract Agreement;
- b) The Letter of Acceptance;
- c) The Completed form of Bid;
- d) The Standard and special Terms & Conditions of Contract – Part;
- e) The priced Bill of Quantities

In consideration of the payments to be made by the Town Committee, Chuhar Jamali to the Contractor as hereinafter mentioned, the contractor hereby covenants with the Town Committee, Chuhar Jamali to execute and complete the works and remedy defects therein In conformity and in all respects with the provisions of the contract.

The Town Committee, Chuhar Jamali hereby covenants to pay the contractor, in consideration of the execution and completion of the works as per provisions of contract, the contract Price or such other sum as may become payable under the provisions of the contract at the time and in the manner prescribed by the contractor.

The contractor has given a lien to the Town Committee, Chuhar Jamali over the Security for due fulfillment of the contract and do hereby bind himself, his heirs, successors legal representative and assignee to pay to the Town Committee, Chuhar Jamali penalty through forfeiture of the said Security in case of breach of any condition of the Contract without prejudice to the right of Town Committee, Chuhar Jamali to recover the damages from the Contractor for any such breach as per condition of the contract.

Now therefore this agreement witnesses that the Town Committee, Chuhar Jamali and the Contractor shall respectively and shall well truly carry out and fulfill the contract and abide by all terms and conditions and specifications thereof.

In witness whereof the said parties have set their respective hands on this 20<sup>th</sup> of Dec 2017

Witness:

1. Noor Ahmed Mandhriq
2. Gul Hassan Mandhriq

Juman  
Contractor

[Signature]  
CHAIRMAN  
TOWN COMMITTEE, CHUHAR JAMALI

NAME OF WORK: - CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN WARD NO-1 TOWN  
COMMITTEE CHUHAR JAMALI

BILL OF QUANTITIES

## (A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
<b>PART – A (CONSTRUCTION OF DRAIN)</b>					
1.	138.0Cft	Dismantling and removing Road Metalling...etc	Rs:605.00	%Cft	Rs:835.00
2.	9.38Cft	Dismantling of Brick work in lime or cement mortar ..etc complete	Rs:1285.63	%Cft	Rs:121.00
3.	6.25 Cft	Dismantling of CC plain 1:2:4..etc complete	Rs:3327.50	%Cft	Rs:208.00
4.	10.50Cft	Dismantling of C.C Reinforced separating Reinforcement from concrete, cleaning and straitening the same ...etc complete	Rs:5445.00	%Cft	Rs:572.00
5.	603.50Cft	Excavation in foundation of building and bridges and others structure i/c dag bellig dressing and refilling ground structure with excavated earth watering and ramming lead up to 5'ft in ordinary soil.	Rs:3176.25	%Ocft	Rs:1914.00
6.	150.60Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:17004.00
7.	964.0Sft	Erection and removal of centering for RCC work ....etc complete	Rs:3127.41	%Sft	Rs:30148.00
8.	241.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:12595.00	%Cft	Rs:30354.00
9.	26.40Cft	RCC work in roof slab, beams coloums rafts, lintels and others structural member laid in situ or precast laid in position complete in all respects (b) ratio 1:2:4 90 lbs cement 2Cft sand 4cft shingle 1/8" to 1/2" gauge (G.Sch: P-No: It/No:	Rs:337.00	P.Cft	Rs:8897.0
10.	1.06Cwt	Fabrication of mild steel reinforcement for cement concrete including cutting, bending laying in position, making joints and fastening including cost of binding wire (also includes removal of rust bars ) using tor bars(G.Sch:P-No.16 It/No:8(b).	Rs:5001.70	P.Cwt	Rs:5305.00

11.	241.0Rft	Construction of standard open type drains connuttee block of C.C 1:2:4 cost of situ to the design profile i.c cost of mould as per drawing i/c supplying floating cost of cement 1/32" thick to expose surface finished smooth curing complete as per drawing design..etc complete	Rs:94.00	P.Rft	Rs:22654.00
12.	439.0Cft	Cement plaster 1:4 up to 12' height ½" thick (G.Sch: P-No:51 It/No:11(b).	Rs:2283.93	%Sft	Rs:10018.00
				Total:-	Rs:1,28,029/-
<b>PART-B (PROVIDING AND FIXING OF PAVER BLOCK)</b>					
1.	2650.0Cft	Earth work excavation undressed lead upto a single throw of Kassi phawarah of shovel in ordinary soil ..etc	Rs:1361.25	%Ocft	Rs:3607.00
2.	2650.0Cft	Dressing and leveling of earth wok to designed section, in ordinary soil etc complete	Rs:187.55	%Ocft	Rs:497.00
3.	1325.0Cft	Supplying and filling pit sand under floor and plunging into wells...	Rs:1141.25	%Ocft	Rs:15122.
4.	875.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 l/5(f)	Rs:11288.75	%Cft	Rs:98720.00
5.	2650.0Sft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quddra / cable shape with pigmented b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:657650.00
				Total:-	Rs:7,75,596.00

Amount Total (a+b) **Rs:9,03,625/-**

10.65% Above/Below On The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

999862  
Total (A) = a + b in words

Nine Lac Ninety Nine Thousand  
Eight hundred fifty two

*Jimani*  
Contractor

*[Signature]*  
Executive Engineer / Procuring Agency





NAME OF WORK: - CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN WARD NO-1 TOWN COMMITTEE CHUHAR JAMALI

BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
<b>PART – A (CONSTRUCTION OF DRAIN)</b>					
1.	138.0Cft	Dismantling and removing Road Metalling...etc	Rs:605.00	%Cft	Rs:835.00
2.	9.38Cft	Dismantling of Brick work in lime or cement mortar ..etc complete	Rs:1285.63	%Cft	Rs:121.00
3.	6.25 Cft	Dismantling of CC plain 1:2:4..etc complete	Rs:3327.50	%Cft	Rs:208.00
4.	10.50Cft	Dismantling of C.C Reinforced separating Reinforcement from concrete, cleaning and straitening the same ...etc complete	Rs:5445.00	%Cft	Rs:572.00
5.	603.50Cft	Excavation in foundation of building and bridges and others structure i/c dag bellig dressing and refilling ground structure with excavated earth watering and ramming lead up to 5'ft in ordinary soil.	Rs:3176.25	%Ocft	Rs:1914.00
6.	150.60Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:17004.00
7.	964.0Sft	Erection and removal of centering for RCC work ....etc complete	Rs:3127.41	%Sft	Rs:30148.00
8.	241.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:12595.00	%Cft	Rs:30354.00
9.	26.40Cft	RCC work in roof slab, beams coloums rafts, lintels and others structural member laid in situ or precast laid in position complete in all respects (b) ratio 1:2:4 90 lbs cement 2Cft sand 4cft shingle 1/8" to 1/2" gauge (G.Sch: P-No: It/No:	Rs:337.00	P.Cft	Rs:8897.0
10.	1.06Cwt	Fabrication of mild steel reinforcement for cement concrete including cutting, bending laying in position, making joints and fastening including cost of binding wire (also includes removal of rust bars ) using tor bars(G.Sch:P-No:16 It/No:8(b).	Rs:5001.70	P.Cwt	Rs:5305.00

11.	241.0Rft	Construction of standard open type drains connuttee block of C.C 1:2:4 cost of situ to the design profile i.c cost of mould as per drawing i/c supplying floating cost of cement 1/32" thick to expose surface finished smooth curing complete as per drawing design..etc complete	Rs:94.00	P.Rft	Rs:22654.00
12.	439.0Cft	Cement plaster 1:4 up to 12' height ½" thick (G.Sch: P-No:51 It/No:11(b).	Rs:2283.93	%Sft	Rs:10018.00
				Total:-	Rs:1,28,029/-
<b>PART-B (PROVIDING AND FIXING OF PAVER BLOCK)</b>					
1.	2650.0Cft	Earth work excavation undressed lead upto a single throw of Kassi phawarah of shovel in ordinary soil ..etc	Rs:1361.25	%Ocft	Rs:3607.00
2.	2650.0Cft	Dressing and leveling of earth wok to designed section, in ordinary soil etc complete	Rs:187.55	%Ocft	Rs:497.00
3.	1325.0Cft	Supplying and filling pit sand under floor and plunging into wells...	Rs:1141.25	%Ocft	Rs:15122.
4.	875.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening, and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:98720.00
5.	2650.0Sft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quddra / cable shape with pigmented b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:657650.00
				Total:-	Rs:7,75,596.00

Amount Total (a+b) **Rs:9,03,625/-**

117 %Above/Below On The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

Total (A) = a + b in words

1003024

Ten Lakh three thousand two hundred and four only

A Satter K.  
Contractor

Executive Engineer / Procuring Agency

# Summary of Bill of Quantities

Cost of Bid

Amount 1003024

- 1 (A) Cost based on composite Schedule of Rate
- 2 (B) Cost of based on Non / Offered Schedule of Rates.

TOTAL COST OF BID (C) = TOTAL (A) + Total (B)

1003024

*A. S. Khan*  
Contractor

*[Signature]*  
Executive Engineer / Procuring Agency

NAME OF WORK: - CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN WARD NO-1 TOWN  
COMMITTEE CHUHAR JAMALI

BILL OF QUANTITIES

## (A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
<b>PART – A (CONSTRUCTION OF DRAIN)</b>					
1.	138.0Cft	Dismantling and removing Road Metalling...etc	Rs:605.00	%Cft	Rs:835.00
2.	9.38Cft	Dismantling of Brick work in lime or cement mortar ..etc complete	Rs:1285.63	%Cft	Rs:121.00
3.	6.25 Cft	Dismantling of CC plain 1:2:4...etc complete	Rs:3327.50	%Cft	Rs:208.00
4.	10.50Cft	Dismantling of C.C Reinforced separating Reinforcement from concrete, cleaning and straitening the same ...etc complete	Rs:5445.00	%Cft	Rs:572.00
5.	603.50Cft	Excavation in foundation of building and bridges and others structure i/c dag bellig dressing and refilling ground structure with excavated earth watering and ramming lead up to 5'ft in ordinary soil.	Rs:3176.25	%Ocft	Rs:1914.00
6.	150.60Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:17004.00
7.	964.05ft	Erection and removal of centering for RCC work ....etc complete	Rs:3127.41	%Sft	Rs:30148.00
8.	241.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:12595.00	%Cft	Rs:30354.00
9.	26.40Cft	RCC work in roof slab, beams coloums rafts, lintels and others structural member laid in situ or precast laid in position complete in all respects (b) ratio 1:2:4 90 lbs cement 2Cft sand 4cft shingle 1/8" to 1/2" gauge (G.Sch: P-No: It/No:	Rs:337.00	P.Cft	Rs:8897.0
10.	1.06Cwt	Fabrication of mild steel reinforcement for cement concrete including cutting, bending laying in position, making joints and fastening including cost of binding wire (also includes removal of rust bars ) using tor bars(G.Sch:P-No:16 It/No:8(b).	Rs:5001.70	P.Cwt	Rs:5305.00

11.	241.0Rft	Construction of standard open type drains connuttee block of C.C 1:2:4 cost of situ to the design profile i.c cost of mould as per drawing i/c supplying floating cost of cement 1/32" thick to expose surface finished smooth curing complete as per drawing design..etc complete	Rs:94.00	P.Rft	Rs:22654.00
12.	439.0Cft	Cement plaster 1:4 up to 12' height ½" thick (G.Sch: P-No:51 It/No:11(b).	Rs:2283.93	%Sft	Rs:10018.00
				Total:-	Rs:1,28,029/-
<b>PART-B (PROVIDING AND FIXING OF PAVER BLOCK)</b>					
1.	2650.0Cft	Earth work excavation undressed lead upto a single throw of Kassi phawarah of shovel in ordinary soil ..etc	Rs:1361.25	%Ocft	Rs:3607.00
2.	2650.0Cft	Dressing and leveling of earth wok to designed section, in ordinary soil etc complete	Rs:187.55	%Ocft	Rs:497.00
3.	1325.0Cft	Supplying and filling pit sand under floor and plunging into wells...	Rs:1141.25	%Ocft	Rs:15122.
4.	875.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:98720.00
5.	2650.0Sft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quddra / cable shape with pigmented b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:657650.00
				Total:-	Rs:7,75,596.00

Amount Total (a+b) Rs:9,03,625/-

12% %Above/Below On The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

1012061  
Total (A) = a + b in words

Ten Lac twelve thousand  
Sixty one only

*A. S. Sreenivasulu Reddy*

Contractor

*[Signature]*  
Executive Engineer / Procuring Agency

# Summary of Bill of Quantities

Cost of Bid

Amount 10 12061

1 (A) Cost based on composite Schedule of Rate

\_\_\_\_\_

2 (B) Cost of based on Non / Offered Schedule of Rates.

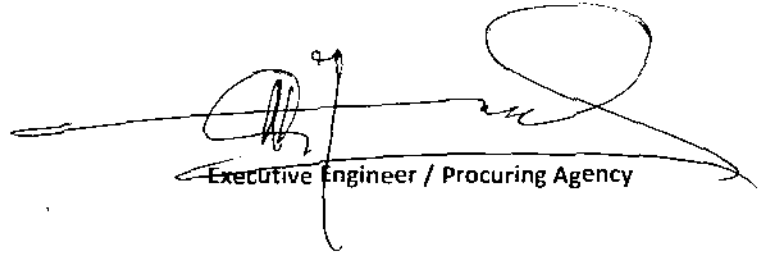
\_\_\_\_\_

TOTAL COST OF BID (C) = TOTAL (A) + Total (B)

1012061

*Abdullah*

Contractor

  
Executive Engineer / Procuring Agency

**SINDH PUBLIC PROCUREMENT REGULATORY AUTHORITY**  
**CONTRACT EVALUATION FORM**

**TO BE FILLED IN BY ALL PROCURING AGENCIES FOR PUBLIC**  
**CONTRACTORS OF WORKS, SERVICES & GOODS.**

- 1). NAME OF THE ORGANIZATION / DEPTT. Town Committee, Chuhar Jamali, Sujawal
- 2). PROVINCIAL / LOCAL GOVT. / OTHER LOCAL GOVERNMENT
- 3). TITLE OF CONTRACT: "CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN WARD NO-2 TOWN COMMITTEE CHUHAR JAMALI"
- 4) TENDER NUMBER: as above
- 5). BRIEF DESCRIPTION OF CONTRACT: CC Paver Block & CC Drain
- 6). FORUM THAT APPROVED THE SCHEME Town Committee, Chuhar Jamali
- 7). TENDER ESTIMATED VALUE Rs. 10,00,000/=
- 8). ENGINEER'S ESTIMATE PC -Cost Rs: 1000000/-  
(FOR CIVIL WORK ONLY)
- 9). ESTIMATED COMPLETION PERIOD (AS PER CONTRACT) (0 1) MONTH
- 10). TENDER OPENED ON DATE AND TIME 02-11-2017 AT 02:00 PM.
- 11). NUMBER OF TENDER DOCUMENTS SOLD (Attach list of buyers). 03
- 12). NUMBER OF BIDS RECEIVED 03
- 13). NUMBERS OF BIDDERS PRESENT AT THE TIME OF OPEINING OF BIDS 03
- 14). BID EVALUATION REPORT (Enclose a copy) YES
- 15). NAME AND ADDRESS OF THE SUCCESSFUL BIDDER. M/S Abdul Sattar Kehar
- 16). CONTRACT AWARD PRICE SANCTION RUPEES Rs: 999862/-
- 17). RANKING OF SUCCESSFUL BIDDER IN EVALUATION REPORT (I.F. 1ST 2ND 3RD EVALUATION BID). 1<sup>st</sup> Lowest M/S Abdul Sattar Kehar  
2<sup>nd</sup> LOWEST M/S Muhammad Juman Mandhrio  
3<sup>rd</sup> LOWEST M/S Abdul Hakeem Chandio
- 18). METHOD OF PROCUREMENT USED: - (TICK ONE)
- A). SINGLE STAGE-ONE ENVELOPE PROCEDURE \_\_\_\_\_ ✓ \_\_\_\_\_
- B). SINGLE STAGE-TWO ENVELOPE PROCEDURE \_\_\_\_\_
- C). TWO STAGE BIDDING PROCEDURE \_\_\_\_\_
- D). TWO STAGE-TWO ENVELOPE BIDDING PROCEDURE \_\_\_\_\_

PLEASE SPECIFY IF ANY OTHER METHOD OF PROCUREMENT WAS ADOPTED i.e. EMERGENCY, DIRECT CONTRACTING ETC. WITH BRIEF REASONS.

19). PROVIDING AUTHORITY FOR AWARD OF CONTRACT CHAIRMAN TC, CHUHAR JAMALI

20). WHETHER THE PROCUREMENT WAS INCLUDED IN ANNUAL PROCUREMENT PLAN

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

21). ADVERTISEMENT:

i) SPPRA Website  
(if yes give date & SPPRA Identification No.

YES	<a href="http://www.pprasindhgov.pk">www.pprasindhgov.pk</a> SPPRA Tender SR No. 34792 Dt: 02-11-2017
-----	--

ii) Newspapers  
(if yes give names of newspapers & dates)

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

22). NATURE OF CONTRACT

DOMESTIC/ LOCAL	<input checked="" type="checkbox"/> LOCAL	INT	
-----------------	---	-----	--

23). WHETHER QUALIFICATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?

(If yes, enclose copy).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

24). WHETHER BID EVALUATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?

(if, yes enclose a copy).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

25). WHETHER APPROVAL OF COMPETENT AUTHORITY WAS OBTAINED FOR USING A METHOD OTHER THAN OPEN COMPETITIVE BIDDING?

YES		NO	N/A
-----	--	----	-----

26). WAS BID SECURITY OBTAINED FROM ALL THE BIDDERS?

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

27). WHETHER THE SUCCESSFUL BID WAS LOWEST EVALUATED BID / BEST EVALUATED BID (In case of Consultancies).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

28). WHETHER THE SUCCESSFUL BIDDER WAS TECHNICALLY COMPLAINT?

YES		NO	N/A
-----	--	----	-----

29). WHETHER NAMES OF THE BIDDERS AND THEIR QUOTED PRICES WERE READ OUT AT THE TIME OF OPENING OF BIDS?

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

30). WHETHER EVALUATION REPORT GIVEN TO BIDDERS BEFORE THE AWARD OF CONTRACT?

(Attach a copy of the bid evaluation report).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--



31). ANY COMPLAINTS RECEIVED  
(if yes, result thereof).

YES	<input type="checkbox"/>	NO	<input type="checkbox"/>	N/A	<input type="checkbox"/>
-----	--------------------------	----	--------------------------	-----	--------------------------

32). ANY DEVIATION FROM SPECIFICATIONS GIVEN IN THE TENDER  
NOTICE / DOCUMENTS ( if yes, given details).

YES	<input type="checkbox"/>	NO	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

33). WAS THE EXTENSION MADE IN RESPONSE TIME?  
(if yes, given reasons)

YES	<input type="checkbox"/>	NO	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

34). DEVIATION FROM QUALIFICATION CRITERIA  
(if yes, detailed reasons).

YES	<input type="checkbox"/>	NO	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

35). WAS IT ASSURED BY THE PROCURING AGENCY THAT THE SELECTED  
FIRM IS NOT BLACK LISTED?

YES	<input type="checkbox"/>	NO	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

36). WAS A VISIT MADE BY ANY OFFICER / OFFICIAL OF THE PROCURING  
AGENCY TO THE SUPPLIER'S PREMISES IN CONNECTION WITH THE PROCUREMENT?  
IF SO, DETAILS TO BE ASCERTAINED REGARDING FINANCING OF VISIT, IF ABROAD:  
(if yes, enclose a copy)

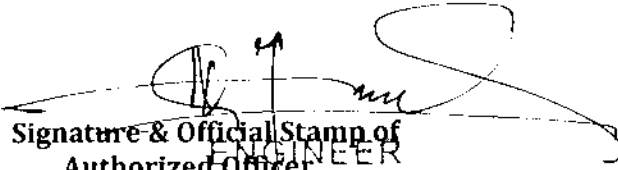
YES	<input type="checkbox"/>	NO	<input type="checkbox"/>	N/A	<input type="checkbox"/>
-----	--------------------------	----	--------------------------	-----	--------------------------

37). WERE PROPER SAFEGUARDS PROVIDED ON MOBILIZATION ADVANCE PAYMENT IN THE  
CONTRACT ( BANK GUARANTEE ETC)?

YES	<input type="checkbox"/>	NO	<input type="checkbox"/>	N/A	<input type="checkbox"/>
-----	--------------------------	----	--------------------------	-----	--------------------------

38). SPECIAL CONDITION, IF ANY  
(if yes, give Brief Description)

YES	<input type="checkbox"/>	NO	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

  
Signature & Official Stamp of  
Authorized Officer  
ENGINEER  
TOWN COMMITTEE  
CHUHAR JAMALI

FOR OFFICE USE ONLY

**SPPRA, Block No. 8, Sindh Secretariat No. 4-A, Court Road, Karachi**  
Tel: 021-9205356, 021-9205369 & Fax No. 021-9206291.

# OFFICE OF THE TOWN COMMITTEE

## CHUHAR JAMALI

No. O.T.C.C.J./T.O/ 32

/2017

Dated: 15/12/2017

M/s. ABDUL SATTAR KEHAR,  
GOVERNMENT CONTRACTOR

### LETTER OF ACCEPTANCE / SANCTION ORDER

**Subject: CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN WARD NO-2 TOWN COMMITTEE CHUHAR JAMALI**

On behalf of the employer it is notified that following the approval of accepted of Chairman, Town Committee, Chuhar Jamali, vide Para 02 /No, your bid for the subject is hereby accepted for the sum of Rs:9,99,862/- (Rupees. NINE LAC NINETY NINE THOUSAND EIGHT HUNDRED SIXTY TWO ONLY) as approved by the competent authority Town Committee, Chuhar Jamali.

There is now binding contract between Town Committee, Chuhar Jamali and M/s. Abdul Sattar Kehar,

In accordance with the general condition of contract, you are required to enter in to and execute a contract agreement this agreement shall be signed by employer and M/s. Abdul Sattar Kehar.

In accordance with condition of contract as per SPPRA-2010 the 2% Bid security Rs:20,000/- and remaining 8% Security may deduct from bill.

All correspondence on onward shall be carried out through Town Officer, Town Committee, Chuhar Jamali.

  
TOWN OFFICER  
TOWN COMMITTEE, CHUHAR JAMALI

Copy to:-

- 1- Chairman, Town Committee, Chuhar Jamali.
- 2- Assistant Executive Engineer, (Town Committee, Chuhar Jamali)
- 3- Office Copy.

# TOWN COMMITTEE CHUHAR JAMALI

## AGREEMENT

Subject: - CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN WARD NO-2 TOWN COMMITTEE CHUHAR JAMALI

Cost Rs.9,99,862/-

Completion Time (03 Months) penalty \_\_\_\_\_

The Agreement is made on this 20<sup>th</sup> Dec day of 2017 at Thatta: Town Committee, Chuhar Jamali herein after called the Chuhar Jamali, Sujawal (Which shall mean and include his successors) on the one part and M/s. ABDUL SATTAR KEEL office at Chairman TC Chuhar Jamali through their proprietor \_\_\_\_\_ hereinafter call the "Contractor" (Which expression shall mean and include his successors, and assignees) on the other part.



Whereas the Town Committee, Chuhar Jamali, has accepted the tender of \_\_\_\_\_ for construction and completion of the work namely CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN WARD NO-2 TOWN COMMITTEE CHUHAR JAMALI at a cost of Rs.9,99,862/- within a period of (03 Month) and penalty Rs. \_\_\_\_\_ according to the specification and general conditions of the contract signed by the Contractor after having made himself full acquainted with their meaning.

And whereas the Contractor has already furnished with the Town Committee, Chuhar Jamali the 2% bid amount of Rs.20,000/- (Rupees Twenty Thousand Only) on account of Bid / Performance security for the said contract.

The following documents after incorporating addenda, except those parts relating to instructions to bidders shall be deemed to form and be read and construed as part of this Agreement, viz:

- a) The Contract Agreement;
- b) The Letter of Acceptance;
- c) The Completed form of Bid;
- d) The Standard and special Terms & Conditions of Contract – Part;
- e) The priced Bill of Quantities

In consideration of the payments to be made by the Town Committee, Chuhar Jamali to the Contractor as hereinafter mentioned, the contractor hereby covenants with the Town Committee, Chuhar Jamali to execute and complete the works and remedy defects therein In conformity and in all respects with the provisions of the contract.

The Town Committee, Chuhar Jamali hereby covenants to pay the contractor, in consideration of the execution and completion of the works as per provisions of contract, the contract Price or such other sum as may become payable under the provisions of the contract at the time and in the manner prescribed by the contractor.

The contractor has given a lien to the Town Committee, Chuhar Jamali over the Security for due fulfillment of the contract and do hereby bind himself, his heirs, successors legal representative and assignee to pay to the Town Committee, Chuhar Jamali penalty through forfeiture of the said Security in case of breach of any condition of the Contract without prejudice to the right of Town Committee, Chuhar Jamali to recover the damages from the Contractor for any such breach as per condition of the contract.

Now therefore this agreement witnesses that the Town Committee, Chuhar Jamali and the Contractor shall respectively and shall well truly carry out and fulfill the contract and abide by all terms and conditions and specifications thereof.

To witness whereof the said parties have set their respective hands on this \_\_\_\_\_ of \_\_\_\_\_ 2017

Witness:

1. [Signature]  
41407-2335478-7

2. [Signature]  
41407-6120584-3

[Signature]  
**ABDUL SATTAR KEEL**  
Govt. Contractor

[Signature]  
**CHAIRMAN**  
TOWN COMMITTEE, CHUHAR JAMALI

41407-5608062-5

NAME OF WORK: - CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN WARD NO-2 TOWN  
COMMITTEE CHUHAR JAMALI

BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
<b>PART - A (CONSTRUCTION OF DRAIN)</b>					
1.	138.0Cft	Dismantling and removing Road Metalling...etc	Rs:605.00	%Cft	Rs:835.00
2.	9.38Cft	Dismantling of Brick work in lime or cement mortar ..etc complete	Rs:1285.63	%Cft	Rs:121.00
3.	6.25 Cft	Dismantling of CC plain 1:2:4..etc complete	Rs:3327.50	%Cft	Rs:208.00
4.	10.50Cft	Dismantling of C.C Reinforced separating Reinforcement from concrete, cleaning and straitening the same ...etc complete	Rs:5445.00	%Cft	Rs:572.00
5.	603.50Cft	Excavation in foundation of building and bridges and others structure i/c dag bellig dressing and refilling ground structure with excavated earth watering and ramming lead up to 5`ft in ordinary soil.	Rs:3176.25	%Cft	Rs:1914.00
6.	150.60Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:17004.00
7.	964.05ft	Erection and removal of centering for RCC work ....etc complete	Rs:3127.41	%Sft	Rs:30148.00
8.	241.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:12595.00	%Cft	Rs:30354.00
9.	26.40Cft	RCC work in roof slab, beams coloums rafts, lintels and others structural member laid in situ or precast laid in position complete in all respects (b) ratio 1:2:4 90 lbs cement 2Cft sand 4cft shingle 1/8" to 1/4" gauge (G.Sch: P-No: It/No:	Rs:337.00	P.Cft	Rs:8897.0
10.	1.06Cwt	Fabrication of mild steel reinforcement for cement concrete including cutting, bending laying in position, making joints and fastening including cost of binding wire (also includes removal of rust bars ) using tor bars(G.Sch:P-No:16 It/No:8(b).	Rs:5001.70	P.Cwt	Rs:5305.00

11.	241.0Rft	Construction of standard open type drains connuttee block of C.C 1:2:4 cost of situ to the design profile i.c cost of mould as per drawing i/c supplying floating cost of cement 1/32" thick to expose surface finished smooth curing complete as per drawing design..etc complete	Rs:94.00	P.Rft	Rs:22654.00
12.	439.0Cft	Cement plaster 1:4 up to 12' height 1/2" thick (G.Sch: P-No:51 It/No:11(b).	Rs:2283.93	%Sft	Rs:10018.00
				Total:-	Rs:1,28,029/-
<b>PART-B (PROVIDING AND FIXING OF PAVER BLOCK)</b>					
1.	2650.0Cft	Earth work excavation undressed lead upto a single throw of Kassi phawarah of shovel in ordinary soil ..etc	Rs:1361.25	%Ocft	Rs:3607.00
2.	2650.0Cft	Dressing and leveling of earth wok to designed section, in ordinary soil etc complete	Rs:187.55	%Ocft	Rs:497.00
3.	1325.0Cft	Supplying and filling pit sand under floor and plunging into wells...	Rs:1141.25	%Ocft	Rs:15122.
4.	875.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:98720.00
5.	2650.0Sft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quddra / cable shape with pigmented b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:657650.00
				Total:-	Rs:7,75,596.00

Amount Total (a+b) **Rs:9,03,625/-**

10.65% Above/Below On The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

999862  
Total (A) = a + b in words

Nine Lac Ninety Nine thousand eight hundred eighty two only

*A S Sankar*  
Contractor

*[Signature]*  
Executive Engineer / Procuring Agency

Summary of Bill of Quantities

Cost of Bid

Amount 999862

1 (A) Cost based on composite Schedule of Rate

\_\_\_\_\_

2 (B) Cost of based on Non / Offered Schedule of Rates.

\_\_\_\_\_

TOTAL COST OF BID (C) = TOTAL (A) + Total (B)

999862

*A. S. K.*  
Contractor

*[Signature]*  
Executive Engineer / Procuring Agency

NAME OF WORK: - CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN WARD NO-2 TOWN  
COMMITTEE CHUHAR JAMALI

BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
<b>PART – A (CONSTRUCTION OF DRAIN)</b>					
1.	138.0Cft	Dismantling and removing Road Metalling...etc	Rs:605.00	%Cft	Rs:835.00
2.	9.38Cft	Dismantling of Brick work in lime or cement mortor ..etc complete	Rs:1285.63	%Cft	Rs:121.00
3.	6.25 Cft	Dismantling of CC plain 1:2:4..etc complete	Rs:3327.50	%Cft	Rs:208.00
4.	10.50Cft	Dismantling of C.C Reinforced separating Reinforcement from concrete, cleaning and straitening the same ...etc complete	Rs:5445.00	%Cft	Rs:572.00
5.	603.50Cft	Excavation in foundation of building and bridges and others structure i/c dag bellig dressing and refilling ground structure with excavated earth watering and ramming lead up to 5'ft in ordinary soil.	Rs:3176.25	%Oft	Rs:1914.00
6.	150.60Cft	P/L cement concrete plain i/c piacing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 l/5(f)	Rs:11288.75	%Cft	Rs:17004.00
7.	964.0Sft	Erection and removal of centering for RCC work ....etc complete	Rs:3127.41	%Sft	Rs:30148.00
8.	241.0Cft	P/L cement concrete plain i/c piacing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 l/5(f)	Rs:12595.00	%Cft	Rs:30354.00
9.	26.40Cft	RCC work in roof slab, beams coloums rafts, lintels and others structural member laid in situ or precast laid in position complete in all respects (b) ratio 1:2:4 90 lbs cement 2Cft sand 4cft shingle 1/8" to 1/2" gauge (G.Sch: P-No: It/No:	Rs:337.00	P.Cft	Rs:8897.0
10.	1.06Cwt	Fabrication of mild steel reinforcement for cement concrete including cutting, bending laying in position, making joints and fastening including cost of binding wire (also includes removal of rust bars ) using tor bars(G.Sch:P-No:16 It/No:8(b).	Rs:5001.70	P.Cwt	Rs:5305.00

11.	241.0Rft	Construction of standard open type drains connuttee block of C.C 1:2:4 cost of situ to the design profile i.c cost of mould as per drawing i/c supplying floating cost of cement 1/32" thick to expose surface finished smooth curing complete as per drawing design..etc complete	Rs:94.00	P.Rft	Rs:22654.00
12.	439.0Cft	Cement plaster 1:4 up to 12' height 1/2" thick (G.Sch: P-No:51 It/No:11(b)).	Rs:2283.93	%Sft	Rs:10018.00
				Total:-	Rs:1,28,029/-
<b>PART-B (PROVIDING AND FIXING OF PAVER BLOCK)</b>					
1.	2650.0Cft	Earth work excavation undressed lead upto a single throw of Kassi phawarah of shovel in ordinary soil ..etc	Rs:1361.25	%Ocft	Rs:3607.00
2.	2650.0Cft	Dressing and leveling of earth wok to designed section, in ordinary soil etc complete	Rs:187.55	%Ocft	Rs:497.00
3.	1325.0Cft	Supplying and filling pit sand under floor and plunging into wells...	Rs:1141.25	%Ocft	Rs:15122.
4.	875.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 1/5(f))	Rs:11288.75	%Cft	Rs:98720.00
5.	2650.0Sft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quddra / cable shape with pigmented b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:657650.00
				Total:-	Rs:7,75,596.00

Amount Total (a+b) Rs:9,03,625/-

11 %Above/Below On The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

Total (A) = a + b in words

1003025

Ten lac three thousand and twenty four

Contractor

Executive Engineer / Procuring Agency



Summary of Bill of Quantities

Cost of Bid

Amount 1063024

1 (A) Cost based on composite Schedule of Rate

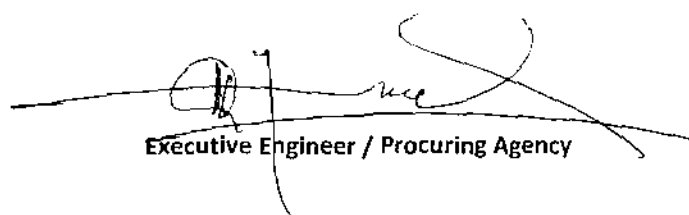
2 (B) Cost of based on Non / Offered Schedule of Rates.

TOTAL COST OF BID (C) = TOTAL (A) + Total (B)

1063024

  
Contractor

  
Executive Engineer / Procuring Agency

NAME OF WORK: - CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN WARD NO-2 TOWN  
COMMITTEE CHUHAR JAMALI

BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
<b>PART – A (CONSTRUCTION OF DRAIN)</b>					
1.	138.0Cft	Dismantling and removing Road Metalling...etc	Rs:605.00	%Cft	Rs:835.00
2.	9.38Cft	Dismantling of Brick work in lime or cement mortor ..etc complete	Rs:1285.63	%Cft	Rs:121.00
3.	6.25 Cft	Dismantling of CC plain 1:2:4..etc complete	Rs:3327.50	%Cft	Rs:208.00
4.	10.50Cft	Dismantling of C.C Reinforced separating Reinforcement from concrete, cleaning and straitening the same ...etc complete	Rs:5445.00	%Cft	Rs:572.00
5.	603.50Cft	Excavation in foundation of building and bridges and others structure i/c dag bellig dressing and refilling ground structure with excavated earth watering and ramming lead up to 5'ft in ordinary soil.	Rs:3176.25	%Ocft	Rs:1914.00
6.	150.60Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:17004.00
7.	964.0Sft	Erection and removal of centering for RCC work ....etc complete	Rs:3127.41	%Sft	Rs:30148.00
8.	241.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:12595.00	%Cft	Rs:30354.00
9.	26.40Cft	RCC work in roof slab, beams coloums rafts, lintels and others structural member laid in situ or precast laid in position complete in all respects (b) ratio 1:2:4 90 lbs cement 2Cft sand 4cft shingle 1/8" to 1/2" gauge (G.Sch: P-No: It/No:	Rs:337.00	P.Cft	Rs:8897.0
10.	1.06Cwt	Fabrication of mild steel reinforcement for cement concrete including cutting, bending laying in position, making joints and fastening including cost of binding wire (also includes removal of rust bars ) using tor bars(G.Sch:P-No:16 It/No:8(b).	Rs:5001.70	P.Cwt	Rs:5305.00

11.	241.0Rft	Construction of standard open type drains connuttee block of C.C 1:2:4 cost of situ to the design profile i.c cost of mould as per drawing i/c supplying floating cost of cement 1/32" thick to expose surface finished smooth curing complete as per drawing design..etc complete	Rs:94.00	P.Rft	Rs:22654.00
12.	439.0Cft	Cement plaster 1:4 up to 12' height 1/2" thick (G.Sch: P-No:51 It/No:11(b).	Rs:2283.93	%Sft	Rs:10018.00
				Total:-	Rs:1,28,029/-
<b>PART-B (PROVIDING AND FIXING OF PAVER BLOCK)</b>					
1.	2650.0Cft	Earth work excavation undressed lead upto a single throw of Kassi phawarah of shovel in ordinary soil ..etc	Rs:1361.25	%Ocft	Rs:3607.00
2.	2650.0Cft	Dressing and leveling of earth wok to designed section, in ordinary soil etc complete	Rs:187.55	%Ocft	Rs:497.00
3.	1325.0Cft	Supplying and filling pit sand under floor and plunging into wells...	Rs:1141.25	%Ocft	Rs:15122.
4.	875.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:98720.00
5.	2650.0Sft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quddra / cable shape with pigmented b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:657650.00
				Total:-	Rs:7,75,596.00

Amount Total (a+b) Rs:9,03,625/-

12% %Above/Below On The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

Total (A) = a + b in words

1012061

Ten Lakh Twelve thousand Sixty One Only

*Abhiscam*  
Contractor

*[Signature]*  
Executive Engineer / Procuring Agency

# Summary of Bill of Quantities

Cost of Bid

Amount 1012061

1 (A) Cost based on composite Schedule of Rate

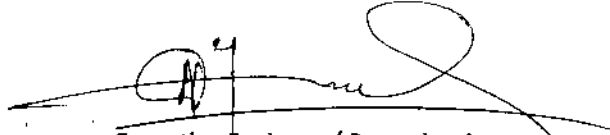
←

2 (B) Cost of based on Non / Offered Schedule of Rates.

TOTAL COST OF BID (C) = TOTAL (A) + Total (B)

1012062

*Alkaram*  
Contractor

  
Executive Engineer / Procuring Agency

# OFFICE OF THE TOWN COMMITTEE

## CHUHAR JAMALI

NO.T.C.C.J./T.O/ 33

/ 2017

Dated: 15/12/2017

M/s. ABDUL SATTAR KEHAR,  
GOVERNMENT CONTRACTOR

### LETTER OF ACCEPTANCE / SANCTION ORDER

**Subject: CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN WARD NO-3 TOWN COMMITTEE CHUHAR JAMALI**

On behalf of the employer it is notified that following the approval of accepted of Chairman, Town Committee, Chuhar Jamali, vide Para 03 /No, your bid for the subject is hereby accepted for the sum of Rs:9,41,389/- (Rupees. NINE LAC FORTY ONE THOUSAND THREE HUNDRED EIGHTY NINE ONLY) as approved by the competent authority Town Committee, Chuhar Jamali.

There is now binding contract between Town Committee, Chuhar Jamali and M/s. Abdul Sattar Kehar,

In accordance with the general condition of contract, you are required to enter in to and execute a contract agreement this agreement shall be signed by employer and M/s. Abdul Sattar Kehar.

In accordance with condition of contract as per SPPRA-2010 the 2% Bid security Rs:18,830/- and remaining 8% Security may deduct from bill.

All correspondence on onward shall be carried out though Town Officer, Town Committee, Chuhar Jamali.

  
TOWN OFFICER

TOWN COMMITTEE, CHUHAR JAMALI

Copy to:-

- 1- Chairman, Town Committee, Chuhar Jamali.
- 2- Assistant Executive Engineer, (Town Committee, Chuhar Jamali)
- 3- Office Copy.

**SINDH PUBLIC PROCUREMENT REGULATORY AUTHORITY**  
**CONTRACT EVALUATION FORM**

**TO BE FILLED IN BY ALL PROCURING AGENCIES FOR PUBLIC**  
**CONTRACTORS OF WORKS, SERVICES & GOODS.**

- 1). NAME OF THE ORGANIZATION / DEPTT. Town Committee, Chuhar Jamali, Sujawal
- 2). PROVINCIAL / LOCAL GOVT. / OTHER LOCAL GOVERNMENT
- 3). TITLE OF CONTRACT: "CONSTRUCTION OF PAVAR BLOCK & C.C DRAIN IN WARD NO-3 TOWN COMMITTEE CHUHAR JAMALI"
- 4) TENDER NUMBER: as above
- 5). BRIEF DESCRIPTION OF CONTRACT: CC Paver Block & CC Drain
- 6). FORUM THAT APPROVED THE SCHEME Town Committee, Chuhar Jamali
- 7). TENDER ESTIMATED VALUE Rs. 9,41,500/=
- 8). ENGINEER'S ESTIMATE PC -Cost Rs: 941500/-  
(FOR CIVIL WORK ONLY)
- 9). ESTIMATED COMPLETION PERIOD (AS PER CONTRACT) (0 1) MONTH
- 10). TENDER OPENED ON DATE AND TIME 02-11-2017 AT 02:00 PM.
- 11). NUMBER OF TENDER DOCUMENTS SOLD (Attach list of buyers). 03
- 12). NUMBER OF BIDS RECEIVED 03
- 13). NUMBERS OF BIDDERS PRESENT AT THE TIME OF OPEINING OF BIDS 03
- 14). BID EVALUATION REPORT (Enclose a copy) YES
- 15). NAME AND ADDRESS OF THE SUCCESSFUL BIDDER. M/S Abdul Sattar Kehar
- 16). CONTRACT AWARD PRICE SANCTION RUPEES Rs: 941309/-
- 17). RANKING OF SUCCESSFUL BIDDER IN EVALUATION REPORT (I.E. 1ST 2ND 3RD EVALUATION BID). 1<sup>st</sup> Lowest M/S Abdul Sattar Kehar  
2<sup>nd</sup> LOWEST M/S Abdul Hakeem Chandio  
3<sup>rd</sup> LOWEST M/S Liaqat Ali & Company
- 18). METHOD OF PROCUREMENT USED: - (TICK ONE)
- A). SINGLE STAGE-ONE ENVELOPE PROCEDURE \_\_\_\_\_✓\_\_\_\_\_
- B). SINGLE STAGE-TWO ENVELOPE PROCEDURE \_\_\_\_\_
- C). TWO STAGE BIDDING PROCEDURE \_\_\_\_\_

31). ANY COMPLAINTS RECEIVED  
(if yes, result thereof).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

32). ANY DEVIATION FROM SPECIFICATIONS GIVEN IN THE TENDER  
NOTICE / DOCUMENTS ( if yes, given details).

YES		NO	N/A
-----	--	----	-----

33). WAS THE EXTENSION MADE IN RESPONSE TIME?  
(if yes, given reasons)

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

34). DEVIATION FROM QUALIFICATION CRITERIA  
(if yes, detailed reasons).

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

35). WAS IT ASSURED BY THE PROCURING AGENCY THAT THE SELECTED  
FIRM IS NOT BLACK LISTED?

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

36). WAS A VISIT MADE BY ANY OFFICER / OFFICIAL OF THE PROCURING  
AGENCY TO THE SUPPLIER'S PREMISES IN CONNECTION WITH THE PROCUREMENT?  
IF SO, DETAILS TO BE ASCERTAINED REGARDING FINANCING OF VISIT, IF ABROAD:  
(if yes, enclose a copy)

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

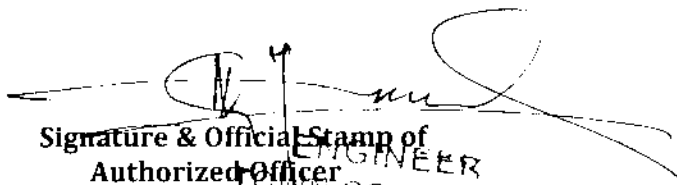
37). WERE PROPER SAFEGUARDS PROVIDED ON MOBILIZATION ADVANCE PAYMENT IN THE  
CONTRACT ( BANK GUARANTEE ETC)?

YES		NO	N/A
-----	--	----	-----

38). SPECIAL CONDITION, IF ANY  
(if yes, give Brief Description)

YES		NO	N/A
-----	--	----	-----

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

  
Signature & Official Stamp of  
Authorized Officer  
ENGINEER  
TOWN COMMITTEE  
CHUHAR JAWALI

FOR OFFICE USE ONLY

**SPPRA, Block No. 8, Sindh Secretariat No. 4-A, Court Road, Karachi**

**Tel: 021-9205356, 021-9205369 & Fax No. 021-9206291.**

D). TWO STAGE-TWO ENVELOPE BIDDING PROCEDURE \_\_\_\_\_

PLEASE SPECIFY IF ANY OTHER METHOD OF PROCUREMENT WAS ADOPTED i.e. EMERGENCY, DIRECT CONTRACTING ETC. WITH BRIEF REASONS.

19). PROVIDING AUTHORITY FOR AWARD OF CONTRACT CHAIRMAN TC, CHUHAR JAMALI

20). WHETHER THE PROCUREMENT WAS INCLUDED IN ANNUAL PROCUREMENT PLAN

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

21). ADVERTISEMENT:

i) SPPRA Website  
(if yes give date & SPPRA Identification No.

YES	<a href="http://www.pprasindhgov.pk">www.pprasindhgov.pk</a> SPPRA Tender SR No. 34792 Dt: 02-11-2017
-----	--

ii) Newspapers  
(if yes give names of newspapers & dates)

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

22). NATURE OF CONTRACT

DOMESTIC/ LOCAL	<input checked="" type="checkbox"/> LOCAL	INT	
-----------------	--	-----	--

23). WHETHER QUALIFICATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?

(If yes, enclose copy).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

24). WHETHER BID EVALUATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?

(if, yes enclose a copy).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

25). WHETHER APPROVAL OF COMPETENT AUTHORITY WAS OBTAINED FOR USING A METHOD OTHER THAN OPEN COMPETITIVE BIDDING?

YES		NO	N/A
-----	--	----	-----

26). WAS BID SECURITY OBTAINED FROM ALL THE BIDDERS?

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

27). WHETHER THE SUCCESSFUL BID WAS LOWEST EVALUATED BID / BEST EVALUATED BID (In case of Consultancies).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

28). WHETHER THE SUCCESSFUL BIDDER WAS TECHNICALLY COMPLAINT?

YES		NO	N/A
-----	--	----	-----

29). WHETHER NAMES OF THE BIDDERS AND THEIR QUOTED PRICES WERE READ OUT AT THE TIME OF OPENING OF BIDS?

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

30). WHETHER EVALUATION REPORT GIVEN TO BIDDERS BEFORE THE AWARD OF CONTRACT?

(Attach a copy of the bid evaluation report).



# TOWN COMMITTEE CHUHAR JAMALI

## AGREEMENT

Subject: - CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN WARD NO-3 TOWN COMMITTEE CHUHAR JAMALI

Cost Rs.9,41,389/-

Completion Time (03 Months)

penalty \_\_\_\_\_

The Agreement is made on this 20th day of Dec 2017 at The Town Committee, Chuhar Jamali herein after called the Chuhar Jamali, Sujawal (We shall mean and include his successors) on the one part and M/s. ABDUL SATTAR KHAN office at Chairman T.C. Chuhar Jamali through their proprietor \_\_\_\_\_ hereinafter call the "Contractor" (Which expression shall mean and include his successor and assignees) on the other part.



Whereas the Town Committee, Chuhar Jamali, has accepted the tender of \_\_\_\_\_ for construction and completion of the work namely CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN WARD NO-3 TOWN COMMITTEE CHUHAR JAMALI, at a cost of Rs.9,41,389/- within a period of (03 Month) and penalty Rs. \_\_\_\_\_ according to the specification and general conditions of the contract signed by the Contractor after having made himself full acquainted with their meaning.

And whereas the Contractor has already furnished with the Town Committee, Chuhar Jamali the 2% bid amount of Rs.20,000/- (Rupees Twenty Thousand Only) on account of Bid / Performance security for the said contract.

The following documents after incorporating addenda, except those parts relating to instructions to bidders shall be deemed to form and be read and construed as part of this Agreement, viz:

- a) The Contract Agreement;
- b) The Letter of Acceptance;
- c) The Completed form of Bid;
- d) The Standard and special Terms & Conditions of Contract - Part;
- e) The priced Bill of Quantities

In consideration of the payments to be made by the Town Committee, Chuhar Jamali to the Contractor as hereinafter mentioned, the contractor hereby covenants with the Town Committee, Chuhar Jamali to execute and complete the works and remedy defects therein In conformity and in all respects with the provisions of the contract.

The Town Committee, Chuhar Jamali hereby covenants to pay the contractor, in consideration of the execution and completion of the works as per provisions of contract, the contract Price or such other sum as may become payable under the provisions of the contract at the time and in the manner prescribed by the contractor.

The contractor has given a lien to the Town Committee, Chuhar Jamali over the Security for due fulfillment of the contract and do hereby bind himself, his heirs, successors legal representative and assignee to pay to the Town Committee, Chuhar Jamali penalty through forfeiture of the said Security in case of breach of any condition of the Contract without prejudice to the right of Town Committee, Chuhar Jamali to recover the damages from the Contractor for any such breach as per condition of the contract.

Now therefore this agreement witnesses that the Town Committee, Chuhar Jamali and the Contractor shall respectively and shall well truly carry out and fulfill the contract and abide by all terms and conditions and specifications thereof.

In witness whereof the said parties have set their respective hands on this 20th of Dec 2017

Witness:

1. [Signature]  
41407-2335428-7

2. [Signature]  
41407-6120584-3

[Signature]  
ABDUL SATTAR KHAN  
Govt Contractor

[Signature]  
CHAIRMAN  
TOWN COMMITTEE, CHUHAR JAMALI

41407-5408062-5

NAME OF WORK: - CONSTRUCTION OF PAVAR BLOCK & C.C DRAIN IN WARD NO-3 TOWN  
COMMITTEE CHUHAR JAMALI

BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
<b>PART – A (CONSTRUCTION OF DRAIN)</b>					
1.	138.0Cft	Dismantling and removing Road Metalling...etc	Rs:605.00	%Cft	Rs:835.00
2.	9.38Cft	Dismantling of Brick work in lime or cement mortar ..etc complete	Rs:1285.63	%Cft	Rs:121.00
3.	6.25 Cft	Dismantling of CC plain 1:2:4..etc complete	Rs:3327.50	%Cft	Rs:208.00
4.	10.50Cft	Dismantling of C.C Reinforced separating Reinforcement from concrete, cleaning and straitening the same ...etc complete	Rs:5445.00	%Cft	Rs:572.00
5.	598.0Cft	Excavation in foundation of building and bridges and others structure i/c dag bellig dressing and refilling ground structure with excavated earth watering and ramming lead up to 5'ft in ordinary soil.	Rs:3176.25	%Ocft	Rs:1898.00
6.	149.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:16863.00
7.	956.0Sft	Erection and removal of centering for RCC work ....etc complete	Rs:3127.41	%Sft	Rs:29898.00
8.	239.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:12595.00	%Cft	Rs:30102.00
9.	26.40Cft	RCC work in roof slab, beams coloums rafts, lintels and others structural member laid in situ or precast laid in position complete in all respects (b) ratio 1:2:4 90 lbs cement 2Cft sand 4cft shingle 1/8" to 1/2" gauge (G.Sch: P-No: It/No:	Rs:337.00	P.Cft	Rs:8897.0
10.	1.06Cwt	Fabrication of mild steel reinforcement for cement concrete including cutting, bending laying in position, making joints and fastening including cost of binding wire (also includes removal of rust bars ) using tor bars(G.Sch:P-No:16 It/No:8(b).	Rs:5001.70	P.Cwt	Rs:5305.00

11.	239.0Rft	Construction of standard open type drains connuttee block of C.C 1:2:4 cost of situ to the design profile i.c cost of mould as per drawing i/c supplying floating cost of cement 1/32" thick to expose surface finished smooth curing complete as per drawing design..etc complete	Rs:94.00	P.Rft	Rs:22466.00
12.	435.0Cft	Cement plaster 1:4 up to 12' height 1/2" thick (G.Sch: P-No:51 lt/No:11(b).	Rs:2283.93	%Sft	Rs:9935.00
				Total:-	Rs:1,27,098/-
<b>PART-B (PROVIDING AND FIXING OF PAVER BLOCK)</b>					
1.	2470.0Cft	Earth work excavation undressed lead upto a single throw of Kassi phawarah of shovel in ordinary soil ..etc	Rs:1361.25	%Ocft	Rs:3362.00
2.	2470.0Cft	Dressing and leveling of earth wok to designed section, in ordinary soil etc complete	Rs:187.55	%Ocft	Rs:463.00
3.	1235.0Cft	Supplying and filling pit sand under floor and plunging into wells...	Rs:1141.25	%Ocft	Rs:14094.00
4.	815.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:92014.00
5.	2470.0Sft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quddra / cable shape with pigmented b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:612979.00
				Total:-	Rs:7,72,914.00

Amount Total (a+b) **Rs:8,50,012/-**

18.75 %Above/Below On The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

Total (A) = a + b in words

941389

Nine Lac forty One thousand three hundred eighty nine only

*ASattark*  
Contractor

*[Signature]*  
Executive Engineer / Procuring Agency

# Summary of Bill of Quantities

Cost of Bid

Amount 941,389

1 (A) Cost based on composite Schedule of Rate

\_\_\_\_\_

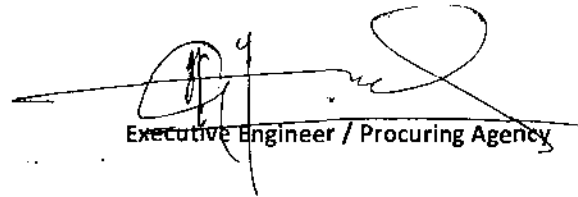
2 (B) Cost of based on Non / Offered Schedule of Rates.

\_\_\_\_\_

TOTAL COST OF BID (C) = TOTAL (A) + Total (B)

941,389

*ASattor K*  
Contractor

  
Executive Engineer / Procuring Agency

NAME OF WORK: - CONSTRUCTION OF PAVAR BLOCK & C.C DRAIN IN WARD NO-3 TOWN  
COMMITTEE CHUHAR JAMALI

BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
<b>PART – A (CONSTRUCTION OF DRAIN)</b>					
1.	138.0Cft	Dismantling and removing Road Metalling...etc	Rs:605.00	%Cft	Rs:835.00
2.	9.38Cft	Dismantling of Brick work in lime or cement mortar ..etc complete	Rs:1285.63	%Cft	Rs:121.00
3.	6.25 Cft	Dismantling of CC plain 1:2:4..etc complete	Rs:3327.50	%Cft	Rs:208.00
4.	10.50Cft	Dismantling of C.C Reinforced separating Reinforcement from concrete, cleaning and straitening the same ...etc complete	Rs:5445.00	%Cft	Rs:572.00
5.	598.0Cft	Excavation in foundation of building and bridges and others structure i/c dag bellig dressing and refilling ground structure with excavated earth watering and ramming lead up to 5'ft in ordinary soil.	Rs:3176.25	%Oft	Rs:1898.00
6.	149.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:16863.00
7.	956.0Sft	Erection and removal of centering for RCC work ....etc complete	Rs:3127.41	%Sft	Rs:29898.00
8.	239.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:12595.00	%Cft	Rs:30102.00
9.	26.40Cft	RCC work in roof slab, beams coloums rafts, lintels and others structural member laid in situ or precast laid in position complete in all respects (b) ratio 1:2:4 90 lbs cement 2Cft sand 4cft shingle 1/8" to 1/4" gauge (G.Sch: P-No: It/No:	Rs:337.00	P.Cft	Rs:8897.0
10.	1.06Cwt	Fabrication of mild steel reinforcement for cement concrete including cutting, bending laying in position, making joints and fastening including cost of binding wire (also includes removal of rust bars ) using tor bars(G.Sch:P-No:16 It/No:8(b).	Rs:5001.70	P.Cwt	Rs:5305.00

11.	239.0Rft	Construction of standard open type drains connuttee block of C.C 1:2:4 cost of situ to the design profile i.c cost of mould as per drawing i/c supplying floating cost of cement 1/32" thick to expose surface finished smooth curing complete as per drawing design..etc complete	Rs:94.00	P.Rft	Rs:22466.00
12.	435.0Cft	Cement plaster 1:4 up to 12' height 1/2" thick (G.Sch: P-No:51 It/No:11(b).	Rs:2283.93	%5ft	Rs:9935.00
				Total:-	Rs:1,27,098/-
<b>PART-B (PROVIDING AND FIXING OF PAVER BLOCK)</b>					
1.	2470.0Cft	Earth work excavation undressed lead upto a single throw of Kassi phawarah of shovel in ordinary soil ..etc	Rs:1361.25	%0cft	Rs:3362.00
2.	2470.0Cft	Dressing and leveling of earth wok to designed section, in ordinary soil etc complete	Rs:187.55	%0cft	Rs:463.00
3.	1235.0Cft	Supplying and filling pit sand under floor and plunging into wells...	Rs:1141.25	%0cft	Rs:14094.00
4.	815.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:92014.00
5.	2470.0Sft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quddra / cable shape with pigmented b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:612979.00
				Total:-	Rs:7,72,914.00

Amount Total (a+b) Rs:8,50,012/-

11.58%  
%Above/Below On The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

947763

Total (A) = a + b in words

Nine Lacs forty seven Thousand Seven hundred sixty Three

*Signature*  
Contractor

*Signature*  
Executive Engineer / Procuring Agency

Summary of Bill of Quantities

Cost of Bid

Amount 947763

1 (A) Cost based on composite Schedule of Rate

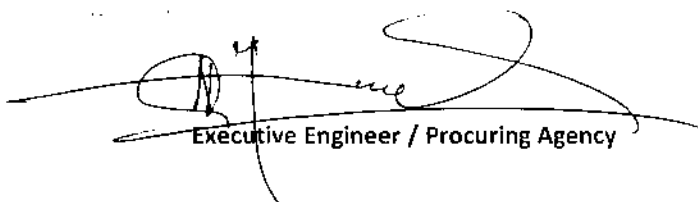
2 (B) Cost of based on Non / Offered Schedule of Rates.

TOTAL COST OF BID (C) = TOTAL (A) + Total (B)

947763

*Abdullah*  
Contractor

  
Executive Engineer / Procuring Agency

NAME OF WORK: - CONSTRUCTION OF PAVAR BLOCK & C.C DRAIN IN WARD NO-3 TOWN  
COMMITTEE CHUHAR JAMALI

BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
<b>PART – A (CONSTRUCTION OF DRAIN)</b>					
1.	138.0Cft	Dismantling and removing Road Metalling...etc	Rs:605.00	%Cft	Rs:835.00
2.	9.38Cft	Dismantling of Brick work in lime or cement mortor ..etc complete	Rs:1285.63	%Cft	Rs:121.00
3.	6.25 Cft	Dismantling of CC plain 1:2:4..etc complete	Rs:3327.50	%Cft	Rs:208.00
4.	10.50Cft	Dismantling of C.C Reinforced separating Reinforcement from concrete, cleaning and straitening the same ...etc complete	Rs:5445.00	%Cft	Rs:572.00
5.	598.0Cft	Excavation in foundation of building and bridges and others structure i/c dag bellig dressing and refilling ground structure with excavated earth watering and ramming lead up to 5'ft in ordinary soil.	Rs:3176.25	%Ocft	Rs:1898.00
6.	149.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:16863.00
7.	956.0Sft	Erection and removal of centering for RCC work ....etc complete	Rs:3127.41	%Sft	Rs:29898.00
8.	239.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:12595.00	%Cft	Rs:30102.00
9.	26.40Cft	RCC work in roof slab, beams coloums rafts, lintels and others structural member laid in situ or precast laid in position complete in all respects (b) ratio 1:2:4 90 lbs cement 2Cft sand 4cft shingle 1/8" to 1/4" gauge (G.Sch: P-No: It/No:	Rs:337.00	P.Cft	Rs:8897.0
10.	1.06Cwt	Fabrication of mild steel reinforcement for cement concrete including cutting, bending laying in position, making joints and fastening including cost of binding wire (also includes removal of rust bars ) using tor bars(G.Sch:P-No:16 It/No:8(b).	Rs:5001.70	P.Cwt	Rs:5305.00



11.	239.0Rft	Construction of standard open type drains connuttee block of C.C 1:2:4 cost of situ to the design profile i.c cost of mould as per drawing i/c supplying floating cost of cement 1/32" thick to expose surface finished smooth curing complete as per drawing design..etc complete	Rs:94.00	P.Rft	Rs:22466.00
12.	435.0Cft	Cement plaster 1:4 up to 12' height 1/2" thick (G.Sch: P-No:51 lt/No:11(b).	Rs:2283.93	%Sft	Rs:9935.00
				Total:-	Rs:1,27,098/-
<b>PART-B (PROVIDING AND FIXING OF PAVER BLOCK)</b>					
1.	2470.0Cft	Earth work excavation undressed lead upto a single throw of Kassi phawarah of shovel in ordinary soil ..etc	Rs:1361.25	%Ocft	Rs:3362.00
2.	2470.0Cft	Dressing and leveling of earth wok to designed section, in ordinary soil etc complete	Rs:187.55	%Ocft	Rs:463.00
3.	1235.0Cft	Supplying and filling pit sand under floor and plunging into wells...	Rs:1141.25	%Ocft	Rs:14094.00
4.	815.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 l/5(f)	Rs:11288.75	%Cft	Rs:92014.00
5.	2470.0Sft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quddra / cable shape with pigmented b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:612979.00
				Total:-	Rs:7,72,914.00

Amount Total (a+b) Rs:8,50,012/-

12.25% Above/Below On The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

1056709 / -

Total (A) = a + b in words

Ten Lac fifty six thousand seven hundred

Contractor

Executive Engineer / Procuring Agency

Summary of Bill of Quantities

Cost of Bid

Amount 1056709

1 (A) Cost based on composite Schedule of Rate

\_\_\_\_\_


2 (B) Cost of based on Non / Offered Schedule of Rates.

\_\_\_\_\_

TOTAL COST OF BID (C) = TOTAL (A) + Total (B)

1056709

  
Contractor

  
Executive Engineer / Procuring Agency

**SINDH PUBLIC PROCUREMENT REGULATORY AUTHORITY**  
**CONTRACT EVALUATION FORM**

**TO BE FILLED IN BY ALL PROCURING AGENCIES FOR PUBLIC**  
**CONTRACTORS OF WORKS, SERVICES & GOODS.**

- 1). NAME OF THE ORGANIZATION / DEPTT. Town Committee, Chuhar Jamali, Sujawal
- 2). PROVINCIAL / LOCAL GOVT. / OTHER LOCAL GOVERNMENT
- 3). TITLE OF CONTRACT: "CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN MESHWARI MOHALLA WARD NO-4 TOWN COMMITTEE CHUHAR JAMALI"
- 4) TENDER NUMBER: as above
- 5). BRIEF DESCRIPTION OF CONTRACT: CC Paver Block & CC Drain
- 6). FORUM THAT APPROVED THE SCHEME Town Committee, Chuhar Jamali
- 7). TENDER ESTIMATED VALUE Rs. 10,00,000/=
- 8). ENGINEER'S ESTIMATE PC -Cost Rs: 1000000/-  
(FOR CIVIL WORK ONLY)
- 9). ESTIMATED COMPLETION PERIOD (AS PER CONTRACT) (0 1) MONTH
- 10). TENDER OPENED ON DATE AND TIME 02-11-2017 AT 02:00 PM.
- 11). NUMBER OF TENDER DOCUMENTS SOLD (Attach list of buyers). 03
- 12). NUMBER OF BIDS RECEIVED 03
- 13). NUMBERS OF BIDDERS PRESENT AT THE TIME OF OPEINING OF BIDS 03
- 14). BID EVALUATION REPORT (Enclose a copy) YES
- 15). NAME AND ADDRESS OF THE SUCCESSFUL BIDDER. M/S Abdul Sattar Kehar
- 16). CONTRACT AWARD PRICE SANCTION RUPEES Rs: 999862/-
- 17). RANKING OF SUCCESSFUL BIDDER IN EVALUATION REPORT (I.E. 1ST 2ND 3RD EVALUATION BID). 1<sup>st</sup> Lowest M/S Abdul Sattar Kehar  
2<sup>nd</sup> LOWEST M/S Muhammad Juman Mandhrio  
3<sup>rd</sup> LOWEST M/S Abdul Hakeem Chandio
- 18). METHOD OF PROCUREMENT USED: - (TICK ONE)
- A). SINGLE STAGE-ONE ENVELOPE PROCEDURE \_\_\_\_\_ ✓ \_\_\_\_\_
- B). SINGLE STAGE-TWO ENVELOPE PROCEDURE \_\_\_\_\_
- C). TWO STAGE BIDDING PROCEDURE \_\_\_\_\_

D). TWO STAGE-TWO ENVELOPE BIDDING PROCEDURE \_\_\_\_\_

PLEASE SPECIFY IF ANY OTHER METHOD OF PROCUREMENT WAS ADOPTED i.e. EMERGENCY, DIRECT CONTRACTING ETC. WITH BRIEF REASONS.

19). PROVIDING AUTHORITY FOR AWARD OF CONTRACT CHAIRMAN TC, CHUHAR JAMALI

20). WHETHER THE PROCUREMENT WAS INCLUDED IN ANNUAL PROCUREMENT PLAN

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

21). ADVERTISEMENT:

i) SPPRA Website  
(if yes give date & SPPRA Identification No.

YES	<a href="http://www.pprasindhgov.pk">www.pprasindhgov.pk</a> SPPRA Tender SR No. 34792 Dt: 02-11-2017
-----	--

ii) Newspapers  
(if yes give names of newspapers & dates)

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

22). NATURE OF CONTRACT

DOMESTIC/ LOCAL	<input checked="" type="checkbox"/> LOCAL	INT	
-----------------	---	-----	--

23). WHETHER QUALIFICATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?

(If yes, enclose copy).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

24). WHETHER BID EVALUATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?

(if, yes enclose a copy).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

25). WHETHER APPROVAL OF COMPETENT AUTHORITY WAS OBTAINED FOR USING A METHOD OTHER THAN OPEN COMPETITIVE BIDDING?

YES		NO	N/A
-----	--	----	-----

26). WAS BID SECURITY OBTAINED FROM ALL THE BIDDERS?

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

27). WHETHER THE SUCCESSFUL BID WAS LOWEST EVALUATED BID / BEST EVALUATED BID (In case of Consultancies).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

28). WHETHER THE SUCCESSFUL BIDDER WAS TECHNICALLY COMPLAINT?

YES		NO	N/A
-----	--	----	-----

29). WHETHER NAMES OF THE BIDDERS AND THEIR QUOTED PRICES WERE READ OUT AT THE TIME OF OPENING OF BIDS?

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

30). WHETHER EVALUATION REPORT GIVEN TO BIDDERS BEFORE THE AWARD OF CONTRACT?

(Attach a copy of the bid evaluation report).

31). ANY COMPLAINTS RECEIVED  
(if yes, result thereof).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

YES		NO	N/A
-----	--	----	-----

32). ANY DEVIATION FROM SPECIFICATIONS GIVEN IN THE TENDER  
NOTICE / DOCUMENTS ( if yes, given details).

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

33). WAS THE EXTENSION MADE IN RESPONSE TIME?  
(if yes, given reasons)

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

34). DEVIATION FROM QUALIFICATION CRITERIA  
(if yes, detailed reasons).

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

35). WAS IT ASSURED BY THE PROCURING AGENCY THAT THE SELECTED  
FIRM IS NOT BLACK LISTED?

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

36). WAS A VISIT MADE BY ANY OFFICER / OFFICIAL OF THE PROCURING  
AGENCY TO THE SUPPLIER'S PREMISES IN CONNECTION WITH THE PROCUREMENT?  
IF SO, DETAILS TO BE ASCERTAINED REGARDING FINANCING OF VISIT, IF ABROAD:  
(if yes, enclose a copy)

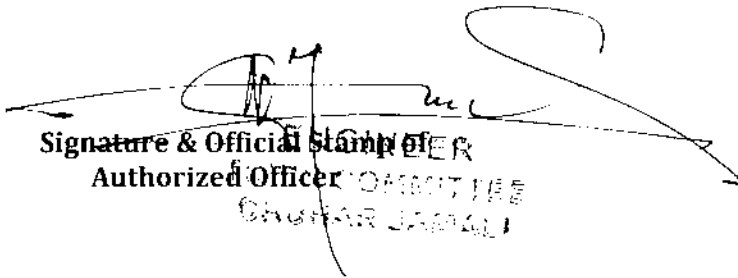
YES		NO	N/A
-----	--	----	-----

37). WERE PROPER SAFEGUARDS PROVIDED ON MOBILIZATION ADVANCE PAYMENT IN THE  
CONTRACT ( BANK GUARANTEE ETC)?

YES		NO	N/A
-----	--	----	-----

38). SPECIAL CONDITION, IF ANY  
(if yes, give Brief Description)

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

  
Signature & Official Stamp of  
Authorized Officer  
CHUNKAR JAGGALI

FOR OFFICE USE ONLY

**SPPRA, Block No. 8, Sindh Secretariat No. 4-A, Court Road, Karachi**

**Tel: 021-9205356, 021-9205369 & Fax No. 021-9206291.**

# OFFICE OF THE TOWN COMMITTEE

## CHUHAR JAMALI

NO.T.C.C.J./T.O/ 34

/ 2017

Dated: 15/12/2017

M/s. ABDUL SATTAR KEHAR,  
GOVERNMENT CONTRACTOR

### LETTER OF ACCEPTANCE / SANCTION ORDER

**Subject: CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN MESHWARI MOHALLA  
WARD NO-4 TOWN COMMITTEE CHUHAR JAMALI**

On behalf of the employer it is notified that following the approval of accepted of Chairman, Town Committee, Chuhar Jamali, vide Para 04 /No, your bid for the subject is hereby accepted for the sum of Rs:9,99,862/- (Rupees. NINE LAC NINETY NINE THOUSAND EIGHT HUNDRED SIXTY TWO ONLY) as approved by the competent authority Town Committee, Chuhar Jamali.

There is now binding contract between Town Committee, Chuhar Jamali and M/s. Abdul Sattar Kehar,

In accordance with the general condition of contract, you are required to enter in to and execute a contract agreement this agreement shall be signed by employer and M/s. Abdul Sattar Kehar.

In accordance with condition of contract as per SPPRA-2010 the 2% Bid security Rs:20,000/- and remaining 8% Security may deduct from bill.

All correspondence on onward shall be carried out though Town Officer, Town Committee, Chuhar Jamali.

  
TOWN OFFICER  
TOWN COMMITTEE, CHUHAR JAMALI

**Copy to:-**

- 1- Chairman, Town Committee, Chuhar Jamali.
- 2- Assistant Executive Engineer, (Town Committee, Chuhar Jamali)
- 3- Office Copy.

# TOWN COMMITTEE CHUHAR JAMALI

## AGREEMENT

Subject: -

CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN MESHWARI MOHALLA WARD NO-4 TOWN COMMITTEE CHUHAR JAMALI

Cost Rs.9,99,862/-

Completion Time (03 Months)

penalty \_\_\_\_\_

The Agreement is made on this 20th Dec day of 2017 at Thatta Town Committee, Chuhar Jamali herein after called the Chuhar Jamali, Sujawal (Which shall mean and include his successors) on the one part and M/s. ABDUL SATTAR KEH office at Chairman TC Chuhar Jamali through their proprietor \_\_\_\_\_ hereinafter call the "Contractor" (Which expression shall mean and include his successors, and assignees) on the other part.

Whereas the Town Committee, Chuhar Jamali, has accepted the tender of \_\_\_\_\_ for construction and completion of the work namely CONSTRUCTION OF PAVER C.C.DRAIN IN MESHWARI MOHALLA WARD NO-4 TOWN COMMITTEE CHUHAR JAMALI at a cost of Rs.9,99,862/- within a period of (03 Month) and penalty Rs. \_\_\_\_\_ according to the specification and general conditions of the contract signed by the Contractor after having made himself full acquainted with their meaning.

And whereas the Contractor has already furnished with the Town Committee, Chuhar Jamali the 2% bid amount of Rs.20,000/- (Rupees Twenty Thousand Only) on account of Bid / Performance security for the said contract.

The following documents after incorporating addenda, except those parts relating to instructions to bidders shall be deemed to form and be read and construed as part of this Agreement, viz:

- a) The Contract Agreement;
- b) The Letter of Acceptance;
- c) The Completed form of Bid;
- d) The Standard and special Terms & Conditions of Contract - Part;
- e) The priced Bill of Quantities

In consideration of the payments to be made by the Town Committee, Chuhar Jamali to the Contractor as hereinafter mentioned, the contractor hereby covenants with the Town Committee, Chuhar Jamali to execute and complete the works and remedy defects therein In conformity and in all respects with the provisions of the contract.

The Town Committee, Chuhar Jamali hereby covenants to pay the contractor, in consideration of the execution and completion of the works as per provisions of contract, the contract Price or such other sum as may become payable under the provisions of the contract at the time and in the manner prescribed by the contractor.

The contractor has given a lien to the Town Committee, Chuhar Jamali over the Security for due fulfillment of the contract and do hereby bind himself, his heirs, successors legal representative and assignee to pay to the Town Committee, Chuhar Jamali penalty through forfeiture of the said Security in case of breach of any condition of the Contract without prejudice to the right of Town Committee, Chuhar Jamali to recover the damages from the Contractor for any such breach as per condition of the contract.

Now therefore this agreement witnesses that the Town Committee, Chuhar Jamali and the Contractor shall respectively and shall well truly carry out and fulfill the contract and abide by all terms and conditions and specifications thereof.

In witness whereof the said parties have set their respective hands on this 20th of Dec 2017

Witness:

1. [Signature]  
41407-2335479-7

2. [Signature]  
41407-672-584-3

[Signature]  
Contractor

41407-5908062-5

[Signature]  
CHAIRMAN  
TOWN COMMITTEE, CHUHAR JAMALI



NAME OF WORK: - CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN MESHWARI MOHALLA  
WARD NO-4 TOWN COMMITTEE CHUHAR JAMALI

BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
<b>PART – A (CONSTRUCTION OF DRAIN)</b>					
1.	138.0Cft	Dismantling and removing Road Metalling...etc	Rs:605.00	%Cft	Rs:835.00
2.	9.38Cft	Dismantling of Brick work in lime or cement mortor ..etc complete	Rs:1285.63	%Cft	Rs:121.00
3.	6.25 Cft	Dismantling of CC plain 1:2:4..etc complete	Rs:3327.50	%Cft	Rs:208.00
4.	10.50Cft	Dismantling of C.C Reinforced separating Reinforcement from concrete, cleaning and straitening the same ...etc complete	Rs:5445.00	%Cft	Rs:572.00
5.	603.50Cft	Excavation in foundation of building and bridges and others structure i/c dag bellig dressing and refilling ground structure with excavated earth watering and ramming lead up to 5 ft in ordinary soil.	Rs:3176.25	%Ocft	Rs:1914.00
6.	150.60Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 l/5(f)	Rs:11288.75	%Cft	Rs:17004.00
7.	964.0Sft	Erection and removal of centering for RCC work ....etc complete	Rs:3127.41	%Sft	Rs:30148.00
8.	241.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 l/5(f)	Rs:12595.00	%Cft	Rs:30354.00
9.	26.40Cft	RCC work in roof slab, beams coloums rafts, lintels and others structural member laid in situ or precast laid in position complete in all respects (b) ratio 1:2:4 90 lbs cement 2Cft sand 4cft shingle 1/8" to 3/4" gauge (G.Sch: P-No: It/No:	Rs:337.00	P.Cft	Rs:8897.0
10.	1.06Cwt	Fabrication of mild steel reinforcement for cement concrete including cutting, bending laying in position, making joints and fastening including cost of binding wire (also includes removal of rust bars ) using tor bars(G.Sch:P-No:16 It/No:8(b).	Rs:5001.70	P.Cwt	Rs:5305.00



11.	241.0Rft	Construction of standard open type drains connuttee block of C.C 1:2:4 cost of situ to the design profile i.c cost of mould as per drawing i/c supplying floating cost of cement 1/32" thick to expose surface finished smooth curing complete as per drawing design..etc complete	Rs:94.00	P.Rft	Rs:22654.00
12.	439.0Cft	Cement plaster 1:4 up to 12' height ½" thick (G.Sch: P-No:51 It/No:11(b).	Rs:2283.93	%Sft	Rs:10018.00
				Total:-	Rs:1,28,029/-
<b>PART-B (PROVIDING AND FIXING OF PAVER BLOCK)</b>					
1.	2650.0Cft	Earth work excavation undressed lead upto a single throw of Kassi phawarah of shovel in ordinary soil ..etc	Rs:1361.25	%Ocft	Rs:3607.00
2.	2650.0Cft	Dressing and leveling of earth wok to designed section, in ordinary soil etc complete	Rs:187.55	%Ocft	Rs:497.00
3.	1325.0Cft	Supplying and filling pit sand under floor and plunging into wells...	Rs:1141.25	%Ocft	Rs:15122.
4.	875.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:98720.00
5.	2650.0Sft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quddra / cable shape with pigmented b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:657650.00
				Total:-	Rs:7,75,596.00

Amount Total (a+b) Rs:9,03,625/-

10.65 %Above/Below On The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

999862

Total (A) = a + b in words

Nine Lac Ninety Nine thousand Eight hundred Sixty two only

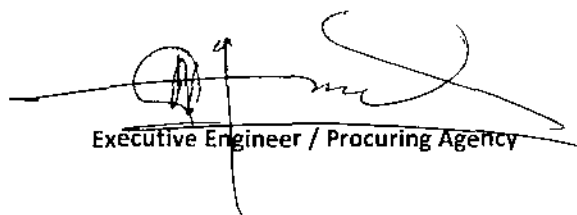
*ASATK*  
Contractor

*[Signature]*  
Executive Engineer / Procuring Agency

Summary of Bill of Quantities

Cost of Bid	Amount
1 (A) Cost based on composite Schedule of Rate	<u>999 862</u>
2 (B) Cost of based on Non / Offered Schedule of Rates.	<u>—</u>
TOTAL COST OF BID (C) = TOTAL (A) + Total (B)	<u>999 862</u>

*Asstov K*  
Contractor

  
Executive Engineer / Procuring Agency

NAME OF WORK: - CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN MESHWARI MOHALLA  
WARD NO-4 TOWN COMMITTEE CHUHAR JAMALI

BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
<b>PART – A (CONSTRUCTION OF DRAIN)</b>					
1.	138.0Cft	Dismantling and removing Road Metalling...etc	Rs:605.00	%Cft	Rs:835.00
2.	9.38Cft	Dismantling of Brick work in lime or cement mortar ..etc complete	Rs:1285.63	%Cft	Rs:121.00
3.	6.25 Cft	Dismantling of CC plain 1:2:4..etc complete	Rs:3327.50	%Cft	Rs:208.00
4.	10.50Cft	Dismantling of C.C Reinforced separating Reinforcement from concrete, cleaning and straitening the same ...etc complete	Rs:5445.00	%Cft	Rs:572.00
5.	603.50Cft	Excavation in foundation of building and bridges and others structure i/c dag bellig dressing and refilling ground structure with excavated earth watering and ramming lead up to 5'ft in ordinary soil.	Rs:3176.25	%Ocft	Rs:1914.00
6.	150.60Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 l/5(f)	Rs:11288.75	%Cft	Rs:17004.00
7.	964.0Sft	Erection and removal of centering for RCC work ....etc complete	Rs:3127.41	%Sft	Rs:30148.00
8.	241.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 l/5(f)	Rs:12595.00	%Cft	Rs:30354.00
9.	26.40Cft	RCC work in roof slab, beams coloums rafts, lintels and others structural member laid in situ or precast laid in position complete in all respects (b) ratio 1:2:4 90 lbs cement 2Cft sand 4cft shingle 1/8" to 3/4" gauge (G.Sch: P-No: It/No:	Rs:337.00	P.Cft	Rs:8897.0
10.	1.06Cwt	Fabrication of mild steel reinforcement for cement concrete including cutting, bending laying in position, making joints and fastening including cost of binding wire (also includes removal of rust bars ) using tor bars(G.Sch:P-No:16 It/No:8(b).	Rs:5001.70	P.Cwt	Rs:5305.00

11.	241.0Rft	Construction of standard open type drains connuttee block of C.C 1:2:4 cost of situ to the design profile i.c cost of mould as per drawing i/c supplying floating cost of cement 1/32" thick to expose surface finished smooth curing complete as per drawing design..etc complete	Rs:94.00	P.Rft	Rs:22654.00
12.	439.0Cft	Cement plaster 1:4 up to 12' height ½" thick (G.Sch: P-No:51 It/No:11(b).	Rs:2283.93	%Sft	Rs:10018.00
				Total:-	Rs:1,28,029/-

**PART-B (PROVIDING AND FIXING OF PAVER BLOCK)**

1.	2650.0Cft	Earth work excavation undressed lead upto a single throw of Kassi phawarah of shovel in ordinary soil ..etc	Rs:1361.25	%Ocft	Rs:3607.00
2.	2650.0Cft	Dressing and leveling of earth wok to designed section, in ordinary soil etc complete	Rs:187.55	%Ocft	Rs:497.00
3.	1325.0Cft	Supplying and filling pit sand under floor and plunging into wells...	Rs:1141.25	%Ocft	Rs:15122.
4.	875.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:98720.00
5.	2650.0Sft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quddra / cable shape with pigmented b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:657650.00
				Total:-	Rs:7,75,596.00

Amount Total (a+b) Rs:9,03,625/-

11% %Above/Below On The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

Total (A) = a + b in words

1002024 Ten Lakh two thousand twenty four only

*Juman*  
Contractor

*Juman*  
Executive Engineer / Procuring Agency

Summary of Bill of Quantities

Cost of Bid

Amount 1003024

1 (A) Cost based on composite Schedule of Rate

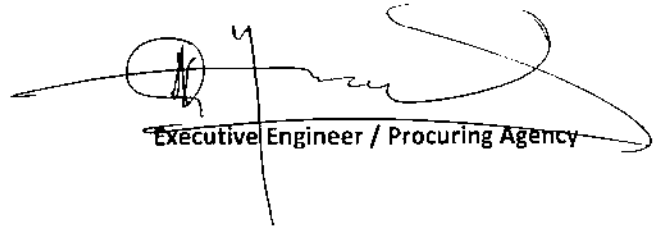
2 (B) Cost of based on Non / Offered Schedule of Rates.

TOTAL COST OF BID (C) = TOTAL (A) + Total (B)

1003024

  
Contractor

  
Executive Engineer / Procuring Agency

NAME OF WORK: - CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN MESHWARI MOHALLA  
WARD NO-4 TOWN COMMITTEE CHUHAR JAMALI

BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
<b>PART – A (CONSTRUCTION OF DRAIN)</b>					
1.	138.0Cft	Dismantling and removing Road Metalling...etc	Rs:605.00	%Cft	Rs:835.00
2.	9.38Cft	Dismantling of Brick work in lime or cement mortar ..etc complete	Rs:1285.63	%Cft	Rs:121.00
3.	6.25 Cft	Dismantling of CC plain 1:2:4..etc complete	Rs:3327.50	%Cft	Rs:208.00
4.	10.50Cft	Dismantling of C.C Reinforced separating Reinforcement from concrete, cleaning and straitening the same ...etc complete	Rs:5445.00	%Cft	Rs:572.00
5.	603.50Cft	Excavation in foundation of building and bridges and others structure i/c dag bellig dressing and refilling ground structure with excavated earth watering and ramming lead up to 5'ft in ordinary soil.	Rs:3176.25	%Ocft	Rs:1914.00
6.	150.60Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:17004.00
7.	964.05ft	Erection and removal of centering for RCC work ....etc complete	Rs:3127.41	%Sft	Rs:30148.00
8.	241.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:12595.00	%Cft	Rs: 30354.00
9.	26.40Cft	RCC work in roof slab, beams coloums rafts, lintels and others structural member laid in situ or precast laid in position complete in all respects (b) ratio 1:2:4 90 lbs cement 2Cft sand 4cft shingle 1/8" to 1/4" gauge (G.Sch: P-No: It/No:	Rs:337.00	P.Cft	Rs:8897.0
10.	1.06Cwt	Fabrication of mild steel reinforcement for cement concrete including cutting, bending laying in position, making joints and fastening including cost of binding wire (also includes removal of rust bars ) using tor bars(G.Sch:P-No:16 It/No:8(b).	Rs:5001.70	P.Cwt	Rs:5305.00

11.	241.0Rft	Construction of standard open type drains connuttee block of C.C 1:2:4 cost of situ to the design profile i.c cost of mould as per drawing i/c supplying floating cost of cement 1/32" thick to expose surface finished smooth curing complete as per drawing design..etc complete	Rs:94.00	P.Rft	Rs:22654.00
12.	439.0Cft	Cement plaster 1:4 up to 12' height 1/2" thick (G.Sch: P-No:51 It/No:11(b).	Rs:2283.93	%Sft	Rs:10018.00
				Total:-	Rs:1,28,029/-
<b>PART-B (PROVIDING AND FIXING OF PAVER BLOCK)</b>					
1.	2650.0Cft	Earth work excavation undressed lead upto a single throw of Kassi phawarah of shovel in ordinary soil ..etc	Rs:1361.25	%Ocft	Rs:3607.00
2.	2650.0Cft	Dressing and leveling of earth wok to designed section, in ordinary soil etc complete	Rs:187.55	%Ocft	Rs:497.00
3.	1325.0Cft	Supplying and filling pit sand under floor and plunging into wells...	Rs:1141.25	%Ocft	Rs:15122.
4.	875.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 1/5(f)	Rs:11288.75	%Cft	Rs:98720.00
5.	2650.0Sft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quddra / cable shape with pigmented b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:657650.00
				Total:-	Rs:7,75,596.00

Amount Total (a+b) Rs:9,03,625/-

12) %Above/Below On The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

10/2061 Ten lac twelve thousand sixty two  
Total (A) = a + b in words

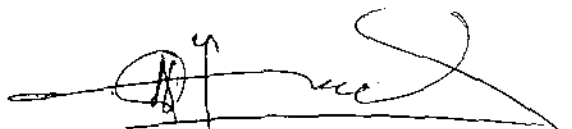
*A. H. Khan*  
Contractor

*[Signature]*  
Executive Engineer / Procuring Agency

Summary of Bill of Quantities

Cost of Bid	Amount <u>1012061</u>
 1 (A) Cost based on composite Schedule of Rate	 _____
 2 (B) Cost of based on Non / Offered Schedule of Rates.	 _____
 TOTAL COST OF BID (C) = TOTAL (A) + Total (B)	 <u>1012061</u>

*A. H. Khan*  
Contractor

  
 Executive Engineer / Procuring Agency



**SINDH PUBLIC PROCUREMENT REGULATORY AUTHORITY**  
**CONTRACT EVALUATION FORM**

**TO BE FILLED IN BY ALL PROCURING AGENCIES FOR PUBLIC**  
**CONTRACTORS OF WORKS, SERVICES & GOODS.**

- 1). NAME OF THE ORGANIZATION / DEPTT. Town Committee, Chuhar Jamali, Sujawal
- 2). PROVINCIAL / LOCAL GOVT. / OTHER LOCAL GOVERNMENT
- 3). TITLE OF CONTRACT: "CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN JATOI MOHALLA WARD NO-4 TOWN COMMITTEE CHUHAR JAMALI"
- 4) TENDER NUMBER: as above
- 5). BRIEF DESCRIPTION OF CONTRACT: CC Paver Block & CC Drain
- 6). FORUM THAT APPROVED THE SCHEME Town Committee, Chuhar Jamali
- 7). TENDER ESTIMATED VALUE Rs. 10,00,000/=
- 8). ENGINEER'S ESTIMATE PC -Cost Rs: 1000000/-  
(FOR CIVIL WORK ONLY)
- 9). ESTIMATED COMPLETION PERIOD (AS PER CONTRACT) (0 1) MONTH
- 10). TENDER OPENED ON DATE AND TIME 02-11-2017 AT 02:00 PM.
- 11). NUMBER OF TENDER DOCUMENTS SOLD (Attach list of buyers). 03
- 12). NUMBER OF BIDS RECEIVED 03
- 13). NUMBERS OF BIDDERS PRESENT AT THE TIME OF OPEINING OF BIDS 03
- 14). BID EVALUATION REPORT (Enclose a copy) YES
- 15). NAME AND ADDRESS OF THE SUCCESSFUL BIDDER. M/S Abdul Sattar Kehar
- 16). CONTRACT AWARD PRICE SANCTION RUPEES Rs: 999862/-
- 17). RANKING OF SUCCESSFUL BIDDER IN EVALUATION REPORT (I.E. 1ST 2ND 3RD EVALUATION BID). 1<sup>st</sup> Lowest M/S Abdul Sattar Kehar  
2<sup>nd</sup> LOWEST M/S Muhammad Juman Mandhrio  
3<sup>rd</sup> LOWEST M/S Abdul Hakeem Chandio
- 18). METHOD OF PROCUREMENT USED: - (TICK ONE)
- A). SINGLE STAGE-ONE ENVELOPE PROCEDURE \_\_\_\_\_ ✓ \_\_\_\_\_
- B). SINGLE STAGE-TWO ENVELOPE PROCEDURE \_\_\_\_\_
- C). TWO STAGE BIDDING PROCEDURE \_\_\_\_\_

D). TWO STAGE-TWO ENVELOPE BIDDING PROCEDURE \_\_\_\_\_

PLEASE SPECIFY IF ANY OTHER METHOD OF PROCUREMENT WAS ADOPTED i.e. EMERGENCY, DIRECT CONTRACTING ETC. WITH BRIEF REASONS.

19). PROVIDING AUTHORITY FOR AWARD OF CONTRACT CHAIRMAN TC, CHUHAR JAMALI

20). WHETHER THE PROCUREMENT WAS INCLUDED IN ANNUAL PROCUREMENT PLAN

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

21). ADVERTISEMENT:

i) SPPRA Website  
(if yes give date & SPPRA Identification No.

YES	<a href="http://www.pprasindhgov.pk">www.pprasindhgov.pk</a> SPPRA Tender SR No. 34792 Dt: 02-11-2017
-----	--

ii) Newspapers  
(if yes give names of newspapers & dates)

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

22). NATURE OF CONTRACT

DOMESTIC/ LOCAL	<input checked="" type="checkbox"/> LOCAL	INT	
-----------------	--	-----	--

23). WHETHER QUALIFICATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?

(If yes, enclose copy).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

24). WHETHER BID EVALUATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?

(if, yes enclose a copy).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

25). WHETHER APPROVAL OF COMPETENT AUTHORITY WAS OBTAINED FOR USING A METHOD OTHER THAN OPEN COMPETITIVE BIDDING?

YES		NO	N/A
-----	--	----	-----

26). WAS BID SECURITY OBTAINED FROM ALL THE BIDDERS?

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

27). WHETHER THE SUCCESSFUL BID WAS LOWEST EVALUATED BID / BEST EVALUATED BID (In case of Consultancies).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

28). WHETHER THE SUCCESSFUL BIDDER WAS TECHNICALLY COMPLAINT?

YES		NO	N/A
-----	--	----	-----

29). WHETHER NAMES OF THE BIDDERS AND THEIR QUOTED PRICES WERE READ OUT AT THE TIME OF OPENING OF BIDS?

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

30). WHETHER EVALUATION REPORT GIVEN TO BIDDERS BEFORE THE AWARD OF CONTRACT?

(Attach a copy of the bid evaluation report).

31). ANY COMPLAINTS RECEIVED  
(if yes, result thereof).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

32). ANY DEVIATION FROM SPECIFICATIONS GIVEN IN THE TENDER  
NOTICE / DOCUMENTS ( if yes, given details).

YES		NO	N/A
-----	--	----	-----

33). WAS THE EXTENSION MADE IN RESPONSE TIME?  
(if yes, given reasons)

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

34). DEVIATION FROM QUALIFICATION CRITERIA  
(if yes, detailed reasons).

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

35). WAS IT ASSURED BY THE PROCURING AGENCY THAT THE SELECTED  
FIRM IS NOT BLACK LISTED?

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

36). WAS A VISIT MADE BY ANY OFFICER / OFFICIAL OF THE PROCURING  
AGENCY TO THE SUPPLIER'S PREMISES IN CONNECTION WITH THE PROCUREMENT?  
IF SO, DETAILS TO BE ASCERTAINED REGARDING FINANCING OF VISIT, IF ABROAD:  
(if yes, enclose a copy)

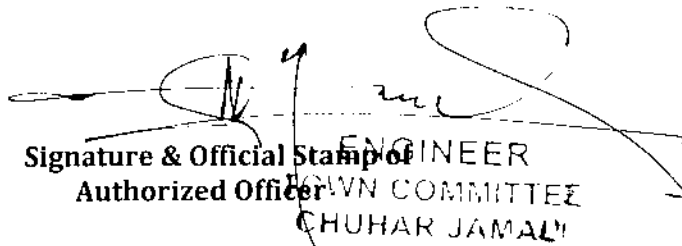
YES		NO	N/A
-----	--	----	-----

37). WERE PROPER SAFEGUARDS PROVIDED ON MOBILIZATION ADVANCE PAYMENT IN THE  
CONTRACT ( BANK GUARANTEE ETC)?

YES		NO	N/A
-----	--	----	-----

38). SPECIAL CONDITION, IF ANY  
(if yes, give Brief Description)

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

  
Signature & Official Stamp of  
Authorized Officer  
ENGINEER  
TOWN COMMITTEE  
CHUHAR JAMAL

FOR OFFICE USE ONLY

**SPPRA, Block No. 8, Sindh Secretariat No. 4-A, Court Road, Karachi**

**Tel: 021-9205356, 021-9205369 & Fax No. 021-9206291.**

# OFFICE OF THE TOWN COMMITTEE

## CHUHAR JAMALI

\*NO.T.C.C.J./T.O/ 35

/2017

Dated: 15/12/2017

M/s. ABDUL SATTAR KEHAR,  
GOVERNMENT CONTRACTOR

### LETTER OF ACCEPTANCE / SANCTION ORDER

**Subject: CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN JATOI MOHALLA WARD  
NO-4 TOWN COMMITTEE CHUHAR JAMALI**

On behalf of the employer it is notified that following the approval of accepted of Chairman, Town Committee, Chuhar Jamali, vide Para OS /No, your bid for the subject is hereby accepted for the sum of Rs:9,99,862/- (Rupees. NINE LAC NINETY NINE THOUSAND EIGHT HUNDRED SIXTY TWO ONLY) as approved by the competent authority Town Committee, Chuhar Jamali.

There is now binding contract between Town Committee, Chuhar Jamali and M/s. Abdul Sattar Kehar,

In accordance with the general condition of contract, you are required to enter in to and execute a contract agreement this agreement shall be signed by employer and M/s. Abdul Sattar Kehar.

In accordance with condition of contract as per SPPRA-2010 the 2% Bid security Rs:20,000/- and remaining 8% Security may deduct from bill.

All correspondence on onward shall be carried out though Town Officer, Town Committee, Chuhar Jamali.

  
TOWN OFFICER  
TOWN COMMITTEE, CHUHAR JAMALI

**Copy to:-**

- 1- Chairman, Town Committee, Chuhar Jamali.
- 2- Assistant Executive Engineer, (Town Committee, Chuhar Jamali)
- 3- Office Copy.

# TOWN COMMITTEE CHUHAR JAMALI

## AGREEMENT

Subject: - CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN JATOI MOHALLA WARD NO-4 TOWN COMMITTEE CHUHAR JAMALI

Cost Rs.9,99,862/-

Completion Time (03 Months) penalty \_\_\_\_\_

The Agreement is made on this 20th Dec day of 2017 at Thatta, between the Town Committee, Chuhar Jamali herein after called the Chuhar Jamali, Sujawal (Which expression shall mean and include his successors), on the one part and M/s. ABDUL SATTAR KEHAR, have the office at Tc Chuhar Jamali through their proprietor \_\_\_\_\_ hereinafter call the "Contractor" (Which expression shall mean and include his successors, administrator and assignees) on the other part.

Whereas the Town Committee, Chuhar Jamali, has accepted the tender of the contractor for construction and completion of the work namely CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN JATOI MOHALLA WARD NO-4 TOWN COMMITTEE CHUHAR JAMALI, at a cost of Rs.9,99,862/- within a period of (03 Month) and penalty Rs. \_\_\_\_\_ according to the specification and general conditions of the contract signed by the Contractor after having made himself full acquainted with their meaning.

And whereas the Contractor has already furnished with the Town Committee, Chuhar Jamali the 2% bid amount of Rs.20,000/- (Rupees Twenty Thousand Only) on account of Bid / Performance security for the said contract.

The following documents after incorporating addenda, except those parts relating to instructions to bidders shall be deemed to form and be read and construed as part of this Agreement, viz:

- a) The Contract Agreement;
- b) The Letter of Acceptance;
- c) The Completed form of Bid;
- d) The Standard and special Terms & Conditions of Contract – Part;
- e) The priced Bill of Quantities

In consideration of the payments to be made by the Town Committee, Chuhar Jamali to the Contractor as hereinafter mentioned, the contractor hereby covenants with the Town Committee, Chuhar Jamali to execute and complete the works and remedy defects therein in conformity and in all respects with the provisions of the contract.

The Town Committee, Chuhar Jamali hereby covenants to pay the contractor, in consideration of the execution and completion of the works as per provisions of contract, the contract Price or such other sum as may become payable under the provisions of the contract at the time and in the manner prescribed by the contractor.

The contractor has given a lien to the Town Committee, Chuhar Jamali over the Security for due fulfillment of the contract and do hereby bind himself, his heirs, successors legal representative and assignee to pay to the Town Committee, Chuhar Jamali penalty through forfeiture of the said Security in case of breach of any condition of the Contract without prejudice to the right of Town Committee, Chuhar Jamali to recover the damages from the Contractor for any such breach as per condition of the contract.

Now therefore this agreement witnesses that the Town Committee, Chuhar Jamali and the Contractor shall respectively and shall well truly carry out and fulfill the contract and abide by all terms and conditions and specifications thereof.

In witness whereof the said parties have set their respective hands on this 20th Dec of 2017

Witness:

1.

[Signature]

41407-2335978-7

2.

[Signature]

41407-6120584-8

[Signature]  
Contractor  
ABDUL SATTAR KEHAR  
Govt. Contractor

[Signature]  
CHAIRMAN  
TOWN COMMITTEE, CHUHAR JAMALI

41407-5408062-5

NAME OF WORK: - CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN JATOI MOHALLA WARD  
NO-4 TOWN COMMITTEE CHUHAR JAMALI

BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
<b>PART - A (CONSTRUCTION OF DRAIN)</b>					
1.	138.0Cft	Dismantling and removing Road Metalling...etc	Rs:605.00	%Cft	Rs:835.00
2.	9.38Cft	Dismantling of Brick work in lime or cement mortar ..etc complete	Rs:1285.63	%Cft	Rs:121.00
3.	6.25 Cft	Dismantling of CC plain 1:2:4..etc complete	Rs:3327.50	%Cft	Rs:208.00
4.	10.50Cft	Dismantling of C.C Reinforced separating Reinforcement from concrete, cleaning and straitening the same ...etc complete	Rs:5445.00	%Cft	Rs:572.00
5.	603.50Cft	Excavation in foundation of building and bridges and others structure i/c dag bellig dressing and refilling ground structure with excavated earth watering and ramming lead up to 5'ft in ordinary soil.	Rs:3176.25	%Ocft	Rs:1914.00
6.	150.60Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:17004.00
7.	964.0Sft	Erection and removal of centering for RCC work ....etc complete	Rs:3127.41	%Sft	Rs:30148.00
8.	241.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:12595.00	%Cft	Rs:30354.00
9.	26.40Cft	RCC work in roof slab, beams coloums rafts, lintels and others structural member laid in situ or precast laid in position complete in all respects (b) ratio 1:2:4 90 lbs cement 2Cft sand 4cft shingle 1/8" to 1/4" gauge (G.Sch: P-No: It/No:	Rs:337.00	P.Cft	Rs:8897.0
10.	1.06Cwt	Fabrication of mild steel reinforcement for cement concrete including cutting, bending laying in position, making joints and fastening including cost of binding wire (also includes removal of rust bars ) using tor bars(G.Sch:P-No:16 It/No:8(b).	Rs:5001.70	P.Cwt	Rs:5305.00

11.	241.0Rft	Construction of standard open type drains connuttee block of C.C 1:2:4 cost of situ to the design profile i.c cost of mould as per drawing i/c supplying floating cost of cement 1/32" thick to expose surface finished smooth curing complete as per drawing design..etc complete	Rs:94.00	P.Rft	Rs:22654.00
12.	439.0Cft	Cement plaster 1:4 up to 12' height 1/2" thick (G.Sch: P-No:51 It/No:11(b).	Rs:2283.93	%Sft	Rs:10018.00
				Total:-	Rs:1,28,029/-
<b>PART-B (PROVIDING AND FIXING OF PAVER BLOCK)</b>					
1.	2650.0Cft	Earth work excavation undressed lead upto a single throw of Kassi phawarah of shovel in ordinary soil ..etc	Rs:1361.25	%Ocft	Rs:3607.00
2.	2650.0Cft	Dressing and leveling of earth wok to designed section, in ordinary soil etc complete	Rs:187.55	%Ocft	Rs:497.00
3.	1325.0Cft	Supplying and filling pit sand under floor and plunging into wells...	Rs:1141.25	%Ocft	Rs:15122.
4.	875.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 l/5(f)	Rs:11288.75	%Cft	Rs:98720.00
5.	2650.0Sft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quddra / cable shape with pigmented b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:657650.00
				Total:-	Rs:7,75,596.00

Amount Total (a+b) Rs:9,03,625/-

10.65 %Above/Below On The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

999862

Total (A) = a + b in words

Nine Lac Ninety Nine thousand Eight hundred Sixty two only

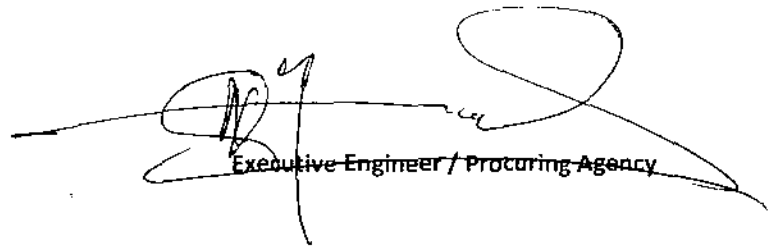
A. S. G. K.  
Contractor

Executive Engineer / Procuring Agency

## Summary of Bill of Quantities

Cost of Bid	Amount
1 (A) Cost based on composite Schedule of Rate	<u>999862</u>
2 (B) Cost of based on Non / Offered Schedule of Rates.	<u>          </u>
TOTAL COST OF BID (C) = TOTAL (A) + Total (B)	<u>999862</u>

  
 Contractor

  
 Executive Engineer / Procuring Agency



NAME OF WORK: -

**CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN JATOI MOHALLA WARD  
NO-4 TOWN COMMITTEE CHUHAR JAMALI**

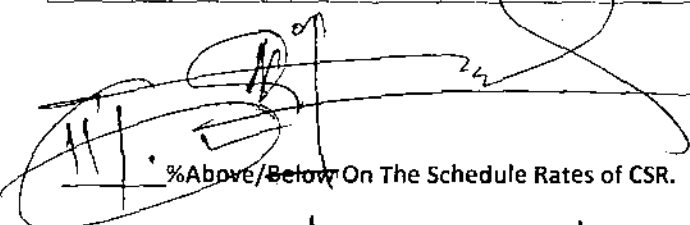
**BILL OF QUANTITIES**

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
<b>PART – A (CONSTRUCTION OF DRAIN)</b>					
1.	138.0Cft	Dismantling and removing Road Metalling...etc	Rs:605.00	%Cft	Rs:835.00
2.	9.38Cft	Dismantling of Brick work in lime or cement mortar ..etc complete	Rs:1285.63	%Cft	Rs:121.00
3.	6.25 Cft	Dismantling of CC plain 1:2:4..etc complete	Rs:3327.50	%Cft	Rs:208.00
4.	10.50Cft	Dismantling of C.C Reinforced separating Reinforcement from concrete, cleaning and straitening the same ...etc complete	Rs:5445.00	%Cft	Rs:572.00
5.	603.50Cft	Excavation in foundation of building and bridges and others structure i/c dag bellig dressing and refilling ground structure with excavated earth watering and ramming lead up to 5'ft in ordinary soil.	Rs:3176.25	%Ocft	Rs:1914.00
6.	150.60Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:17004.00
7.	964.0Sft	Erection and removal of centering for RCC work ....etc complete	Rs:3127.41	%Sft	Rs:30148.00
8.	241.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:12595.00	%Cft	Rs:30354.00
9.	26.40Cft	RCC work in roof slab, beams coloums rafts, lintels and others structural member laid in situ or precast laid in position complete in all respects (b) ratio 1:2:4 90 lbs cement 2Cft sand 4cft shingle 1/8" to 1/4" gauge (G.Sch: P-No: It/No:	Rs:337.00	P.Cft	Rs:8897.0
10.	1.06Cwt	Fabrication of mild steel reinforcement for cement concrete including cutting, bending laying in position, making joints and fastening including cost of binding wire (also includes removal of rust bars ) using tor bars(G.Sch:P-No:16 It/No:8(b).	Rs:5001.70	P.Cwt	Rs:5305.00

11.	241.0Rft	Construction of standard open type drains connuttee block of C.C 1:2:4 cost of situ to the design profile i.c cost of mould as per drawing i/c supplying floating cost of cement 1/32" thick to expose surface finished smooth curing complete as per drawing design..etc complete	Rs:94.00	P.Rft	Rs:22654.00
12.	439.0Cft	Cement plaster 1:4 up to 12' height ½" thick (G.Sch: P-No:51 It/No:11(b).	Rs:2283.93	%Sft	Rs:10018.00
				Total:-	Rs:1,28,029/-
<b>PART-B (PROVIDING AND FIXING OF PAVER BLOCK)</b>					
1.	2650.0Cft	Earth work excavation undressed lead upto a single throw of Kassi phawarah of shovel in ordinary soil ..etc	Rs:1361.25	%Ocft	Rs:3607.00
2.	2650.0Cft	Dressing and leveling of earth wok to designed section, in ordinary soil etc complete	Rs:187.55	%Ocft	Rs:497.00
3.	1325.0Cft	Supplying and filling pit sand under floor and plunging into wells...	Rs:1141.25	%Ocft	Rs:15122.
4.	875.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:98720.00
5.	2650.0Sft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quddra / cable shape with pigmented b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:657650.00
				Total:-	Rs:7,75,596.00

Amount Total (a+b) **Rs:9,03,625/-**

 %Above/Below On The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

1003024/2  
Total (A) = a + b in words

Ten lac Three Thousand Twenty Four and 2/100

  
Contractor

  
Executive Engineer / Procuring Agency

Summary of Bill of Quantities

Cost of Bid

Amount 1003024

1 (A) Cost based on composite Schedule of Rate

\_\_\_\_\_

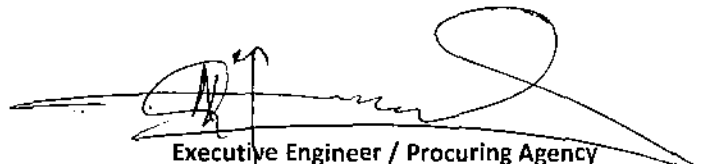
2 (B) Cost of based on Non / Offered Schedule of Rates.

\_\_\_\_\_

TOTAL COST OF BID (C) = TOTAL (A) + Total (B)

1003024

Heenan  
Contractor

  
Executive Engineer / Procuring Agency

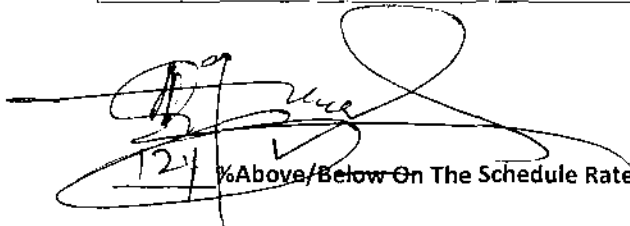
NAME OF WORK: - CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN JATOI MOHALLA WARD NO-4 TOWN COMMITTEE CHUHAR JAMALI

BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
<b>PART – A (CONSTRUCTION OF DRAIN)</b>					
1.	138.0Cft	Dismantling and removing Road Metalling...etc	Rs:605.00	%Cft	Rs:835.00
2.	9.38Cft	Dismantling of Brick work in lime or cement mortar ..etc complete	Rs:1285.63	%Cft	Rs:121.00
3.	6.25 Cft	Dismantling of CC plain 1:2:4..etc complete	Rs:3327.50	%Cft	Rs:208.00
4.	10.50Cft	Dismantling of C.C Reinforced separating Reinforcement from concrete, cleaning and straitening the same ...etc complete	Rs:5445.00	%Cft	Rs:572.00
5.	603.50Cft	Excavation in foundation of building and bridges and others structure i/c dag bellig dressing and refilling ground structure with excavated earth watering and ramming lead up to 5'ft in ordinary soil.	Rs:3176.25	%Ocft	Rs:1914.00
6.	150.60Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:17004.00
7.	964.0Sft	Erection and removal of centering for RCC work ....etc complete	Rs:3127.41	%Sft	Rs:30148.00
8.	241.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:12595.00	%Cft	Rs:30354.00
9.	26.40Cft	RCC work in roof slab, beams coloums rafts, lintels and others structural member laid in situ or precast laid in position complete in all respects (b) ratio 1:2:4 90 lbs cement 2Cft sand 4cft shingle 1/8" to 1/4" gauge (G.Sch: P-No: It/No:	Rs:337.00	P.Cft	Rs:8897.0
10.	1.06Cwt	Fabrication of mild steel reinforcement for cement concrete including cutting, bending laying in position, making joints and fastening including cost of binding wire (also includes removal of rust bars ) using tor bars(G.Sch:P-No:16 It/No:8(b).	Rs:5001.70	P.Cwt	Rs:5305.00

11.	241.0Rft	Construction of standard open type drains connuttee block of C.C 1:2:4 cost of situ to the design profile i.c cost of mould as per drawing i/c supplying floating cost of cement 1/32" thick to expose surface finished smooth curing complete as per drawing design..etc complete	Rs:94.00	P.Rft	Rs:22654.00
12.	439.0Cft	Cement plaster 1:4 up to 12' height ½" thick (G.Sch: P-No:51 It/No:11(b).	Rs:2283.93	%Sft	Rs:10018.00
				Total:-	Rs:1,28,029/-
<b>PART-B (PROVIDING AND FIXING OF PAVER BLOCK)</b>					
1.	2650.0Cft	Earth work excavation undressed lead upto a single throw of Kassi phawarah of shovel in ordinary soil ..etc	Rs:1361.25	%Ocft	Rs:3607.00
2.	2650.0Cft	Dressing and leveling of earth wok to designed section, in ordinary soil etc complete	Rs:187.55	%Ocft	Rs:497.00
3.	1325.0Cft	Supplying and filling pit sand under floor and plunging into wells...	Rs:1141.25	%Ocft	Rs:15122.
4.	875.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:98720.00
5.	2650.0Sft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quddra / cable shape with pigmented b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:657650.00
				Total:-	Rs:7,75,596.00

  
12/1 %Above/Below On The Schedule Rates of CSR.

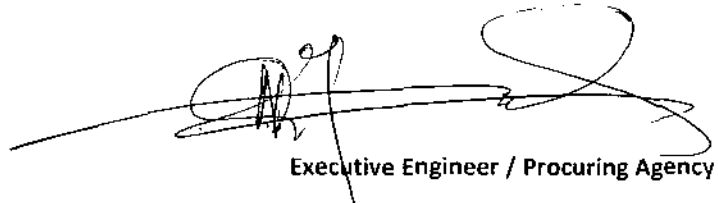
Amount Total (a+b) Rs:9,03,625/-

Amount to be Added/Deducted on the basis of premium quoted Total (b)

1012 061  
Total (A) = a + b in words

Ten Lac Twelve thousand Sixty one only

  
Contractor

  
Executive Engineer / Procuring Agency

# Summary of Bill of Quantities

Cost of Bid

Amount 1012 061

1 (A) Cost based on composite Schedule of Rate

\_\_\_\_\_

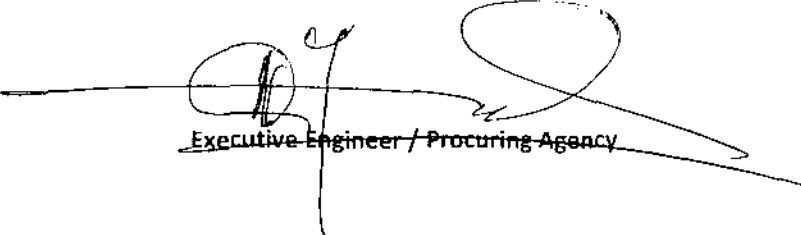
2 (B) Cost of based on Non / Offered Schedule of Rates.

\_\_\_\_\_

TOTAL COST OF BID (C) = TOTAL (A) + Total (B)

1012-061

*Alh. Ceem*  
Contractor

  
Executive Engineer / Procuring Agency

**SINDH PUBLIC PROCUREMENT REGULATORY AUTHORITY**  
**CONTRACT EVALUATION FORM**

**TO BE FILLED IN BY ALL PROCURING AGENCIES FOR PUBLIC**  
**CONTRACTORS OF WORKS, SERVICES & GOODS.**

- 1). NAME OF THE ORGANIZATION / DEPTT. Town Committee, Chuhar Jamali, Sujawal
- 2). PROVINCIAL / LOCAL GOVT. / OTHER LOCAL GOVERNMENT
- 3). TITLE OF CONTRACT: "CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN MALLAH MOHALLA WARD NO-4 TOWN COMMITTEE CHUHAR JAMALI"
- 4) TENDER NUMBER: as above
- 5). BRIEF DESCRIPTION OF CONTRACT: CC Paver Block & CC Drain
- 6). FORUM THAT APPROVED THE SCHEME Town Committee, Chuhar Jamali
- 7). TENDER ESTIMATED VALUE Rs. 10,00,000/=
- 8). ENGINEER'S ESTIMATE PC -Cost Rs: 1000000/-  
(FOR CIVIL WORK ONLY)
- 9). ESTIMATED COMPLETION PERIOD (AS PER CONTRACT) (0 1) MONTH
- 10). TENDER OPENED ON DATE AND TIME 02-11-2017 AT 02:00 PM.
- 11). NUMBER OF TENDER DOCUMENTS SOLD (Attach list of buyers). 03
- 12). NUMBER OF BIDS RECEIVED 03
- 13). NUMBERS OF BIDDERS PRESENT AT THE TIME OF OPEINING OF BIDS 03
- 14). BID EVALUATION REPORT (Enclose a copy) YES
- 15). NAME AND ADDRESS OF THE SUCCESSFUL BIDDER. M/S Abdul Sattar Kehar
- 16). CONTRACT AWARD PRICE SANCTION RUPEES Rs: 999862/-
- 17). RANKING OF SUCCESSFUL BIDDER IN EVALUATION REPORT (I.E. 1ST 2ND 3RD EVALUATION BID). 1<sup>st</sup> Lowest M/S Abdul Sattar Kehar  
2<sup>nd</sup> LOWEST M/S Liaqat Ali Company  
3<sup>rd</sup> LOWEST M/S Abdul Hakeem Chandio
- 18). METHOD OF PROCUREMENT USED: - (TICK ONE)
- A). SINGLE STAGE-ONE ENVELOPE PROCEDURE \_\_\_\_\_ ✓ \_\_\_\_\_
- B). SINGLE STAGE-TWO ENVELOPE PROCEDURE \_\_\_\_\_
- C). TWO STAGE BIDDING PROCEDURE \_\_\_\_\_

D). TWO STAGE-TWO ENVELOPE BIDDING PROCEDURE \_\_\_\_\_

PLEASE SPECIFY IF ANY OTHER METHOD OF PROCUREMENT WAS ADOPTED i.e. EMERGENCY, DIRECT CONTRACTING ETC. WITH BRIEF REASONS.

19). PROVIDING AUTHORITY FOR AWARD OF CONTRACT CHAIRMAN TC, CHUHAR JAMALI

20). WHETHER THE PROCUREMENT WAS INCLUDED IN ANNUAL PROCUREMENT PLAN

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

21). ADVERTISEMENT:

i) SPPRA Website  
(if yes give date & SPPRA Identification No.

YES	<a href="http://www.pprasindhgov.pk">www.pprasindhgov.pk</a> SPPRA Tender SR No. 34792 Dt: 02-11-2017
-----	--

ii) Newspapers  
(if yes give names of newspapers & dates)

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

22). NATURE OF CONTRACT

DOMESTIC/ LOCAL	<input checked="" type="checkbox"/> LOCAL	INT	
-----------------	---	-----	--

23). WHETHER QUALIFICATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?

(If yes, enclose copy).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

24). WHETHER BID EVALUATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?

(if, yes enclose a copy).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

25). WHETHER APPROVAL OF COMPETENT AUTHORITY WAS OBTAINED FOR USING A METHOD OTHER THAN OPEN COMPETITIVE BIDDING?

YES		NO	N/A
-----	--	----	-----

26). WAS BID SECURITY OBTAINED FROM ALL THE BIDDERS?

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

27). WHETHER THE SUCCESSFUL BID WAS LOWEST EVALUATED BID / BEST EVALUATED BID (In case of Consultancies).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

28). WHETHER THE SUCCESSFUL BIDDER WAS TECHNICALLY COMPLAINT?

YES		NO	N/A
-----	--	----	-----

29). WHETHER NAMES OF THE BIDDERS AND THEIR QUOTED PRICES WERE READ OUT AT THE TIME OF OPENING OF BIDS?

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

30). WHETHER EVALUATION REPORT GIVEN TO BIDDERS BEFORE THE AWARD OF CONTRACT?

(Attach a copy of the bid evaluation report).



31). ANY COMPLAINTS RECEIVED  
(if yes, result thereof).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

32). ANY DEVIATION FROM SPECIFICATIONS GIVEN IN THE TENDER  
NOTICE / DOCUMENTS ( if yes, given details).

YES		NO	N/A
-----	--	----	-----

33). WAS THE EXTENSION MADE IN RESPONSE TIME?  
(if yes, given reasons)

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

34). DEVIATION FROM QUALIFICATION CRITERIA  
(if yes, detailed reasons).

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

35). WAS IT ASSURED BY THE PROCURING AGENCY THAT THE SELECTED  
FIRM IS NOT BLACK LISTED?

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

36). WAS A VISIT MADE BY ANY OFFICER / OFFICIAL OF THE PROCURING  
AGENCY TO THE SUPPLIER'S PREMISES IN CONNECTION WITH THE PROCUREMENT?  
IF SO, DETAILS TO BE ASCERTAINED REGARDING FINANCING OF VISIT, IF ABROAD:  
(if yes, enclose a copy)

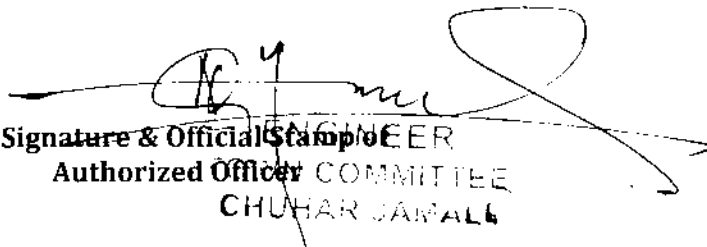
YES		NO	N/A
-----	--	----	-----

37). WERE PROPER SAFEGUARDS PROVIDED ON MOBILIZATION ADVANCE PAYMENT IN THE  
CONTRACT ( BANK GUARANTEE ETC)?

YES		NO	N/A
-----	--	----	-----

38). SPECIAL CONDITION, IF ANY  
(if yes, give Brief Description)

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

  
Signature & Official Stamp of  
Authorized Officer ENGINEER  
COMMITTEE  
CHUHAR SARFAL

FOR OFFICE USE ONLY

**SPPRA, Block No. 8, Sindh Secretariat No. 4-A, Court Road, Karachi**

**Tel: 021-9205356, 021-9205369 & Fax No. 021-9206291.**

# OFFICE OF THE TOWN COMMITTEE

## CHUHAR JAMALI

NO.T.C.C.J./T.O/ 36

/ 2017

Dated: 15/12/2017

M/s. ABDUL SATTAR KEHAR,  
GOVERNMENT CONTRACTOR

### LETTER OF ACCEPTANCE / SANCTION ORDER

**Subject: CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN MALLAH MOHALLA WARD  
NO-4 TOWN COMMITTEE CHUHAR JAMALI**

On behalf of the employer it is notified that following the approval of accepted of Chairman, Town Committee, Chuhar Jamali, vide Para 06 /No, your bid for the subject is hereby accepted for the sum of Rs:9,99,862/- (Rupees. NINE LAC NINETY NINE THOUSAND EIGHT HUNDRED SIXTY TWO ONLY) as approved by the competent authority Town Committee, Chuhar Jamali.

There is now binding contract between Town Committee, Chuhar Jamali and **M/s. Abdul Sattar Kehar,**

In accordance with the general condition of contract, you are required to enter in to and execute a contract agreement this agreement shall be signed by employer and **M/s. Abdul Sattar Kehar.**

In accordance with condition of contract as per SPPRA-2010 the 2% Bid security Rs:20,000/- and remaining 8% Security may deduct from bill.

All correspondence on onward shall be carried out though Town Officer, Town Committee, Chuhar Jamali.



**TOWN OFFICER**  
**TOWN COMMITTEE, CHUHAR JAMALI**

Copy to:-

- 1- Chairman, Town Committee, Chuhar Jamali.
- 2- Assistant Executive Engineer, (Town Committee, Chuhar Jamali)
- 3- Office Copy.

# TOWN COMMITTEE CHUHAR JAMALI

## AGREEMENT

Subject: - CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN MALLAH MOHALLA WARD NO-4 TOWN COMMITTEE CHUHAR JAMALI

Cost Rs.9,99,862/-

Completion Time (03 Months) penalty \_\_\_\_\_

The Agreement is made on this 20th Dec day of 2017 at Thatta, between the Town Committee, Chuhar Jamali herein after called the Chuhar Jamali, Sujawal (Which expression shall mean and include his successors) on the one part and M/s. ABDUL SATTAR KEHAR, have the office at Chairman T.C Chuhar Jamali through their proprietor \_\_\_\_\_ hereinafter call the "Contractor" (Which expression shall mean and include his successors, administrator and assignees) on the other part.

Whereas the Town Committee, Chuhar Jamali, has accepted the tender of the contractor for construction and completion of the work namely CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN MALLAH MOHALLA WARD NO-4 TOWN COMMITTEE CHUHAR JAMALI at a cost of Rs.9,99,862/- within a period of (03 Month) and penalty Rs. \_\_\_\_\_ according to the specification and general conditions of the contract signed by the Contractor after having made himself full acquainted with their meaning.

And whereas the Contractor has already furnished with the Town Committee, Chuhar Jamali the 2% bid amount of Rs.20,000/- (Rupees Twenty Thousand Only) on account of Bid / Performance security for the said contract.

The following documents after incorporating addenda, except those parts relating to instructions to bidders shall be deemed to form and be read and construed as part of this Agreement, viz:

- a) The Contract Agreement;
- b) The Letter of Acceptance;
- c) The Completed form of Bid;
- d) The Standard and special Terms & Conditions of Contract – Part;
- e) The priced Bill of Quantities

In consideration of the payments to be made by the Town Committee, Chuhar Jamali to the Contractor as hereinafter mentioned, the contractor hereby covenants with the Town Committee, Chuhar Jamali to execute and complete the works and remedy defects therein In conformity and in all respects with the provisions of the contract.

The Town Committee, Chuhar Jamali hereby covenants to pay the contractor, in consideration of the execution and completion of the works as per provisions of contract, the contract Price or such other sum as may become payable under the provisions of the contract at the time and in the manner prescribed by the contractor.

The contractor has given a lien to the Town Committee, Chuhar Jamali over the Security for due fulfillment of the contract and do hereby bind himself, his heirs, successors legal representative and assignee to pay to the Town Committee, Chuhar Jamali penalty through forfeiture of the said Security in case of breach of any condition of the Contract without prejudice to the right of Town Committee, Chuhar Jamali to recover the damages from the Contractor for any such breach as per condition of the contract.

Now therefore this agreement witnesses that the Town Committee, Chuhar Jamali and the Contractor shall respectively and shall well truly carry out and fulfill the contract and abide by all terms and conditions and specifications thereof.

In witness whereof the said parties have set their respective hands on this 20th of Dec 2017

Witness:

1. [Signature]  
61407-2335477  
 Contractor

2. [Signature]  
61407-612058403

[Signature]  
 CHAIRMAN  
 TOWN COMMITTEE, CHUHAR JAMALI

NAME OF WORK: - CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN MALLAH MOHALLA  
WARD NO-4 TOWN COMMITTEE CHUHAR JAMALI

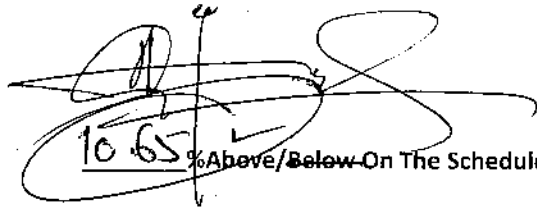
BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
<b>PART – A (CONSTRUCTION OF DRAIN)</b>					
1.	138.0Cft	Dismantling and removing Road Metalling...etc	Rs:605.00	%Cft	Rs:835.00
2.	9.38Cft	Dismantling of Brick work in lime or cement mortar ..etc complete	Rs:1285.63	%Cft	Rs:121.00
3.	6.25 Cft	Dismantling of CC plain 1:2:4..etc complete	Rs:3327.50	%Cft	Rs:208.00
4.	10.50Cft	Dismantling of C.C Reinforced separating Reinforcement from concrete, cleaning and straitening the same ...etc complete	Rs:5445.00	%Cft	Rs:572.00
5.	603.50Cft	Excavation in foundation of building and bridges and others structure i/c dag bellig dressing and refilling ground structure with excavated earth watering and ramming lead up to 5'ft in ordinary soil.	Rs:3176.25	%Ocft	Rs:1914.00
6.	150.60Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:17004.00
7.	964.0Sft	Erection and removal of centering for RCC work ....etc complete	Rs:3127.41	%Sft	Rs:30148.00
8.	241.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:12595.00	%Cft	Rs:30354.00
9.	26.40Cft	RCC work in roof slab, beams coloums rafts, lintels and others structural member laid in situ or precast laid in position complete in all respects (b) ratio 1:2:4 90 lbs cement 2Cft sand 4cft shingle 1/8" to 3/4" gauge (G.Sch: P-No: It/No:	Rs:337.00	P.Cft	Rs:8897.0
10.	1.06Cwt	Fabrication of mild steel reinforcement for cement concrete including cutting, bending laying in position, making joints and fastening including cost of binding wire (also includes removal of rust bars ) using tor bars(G.Sch:P-No:16 It/No:8(b).	Rs:5001.70	P.Cwt	Rs:5305.00

11.	241.0Rft	Construction of standard open type drains concrete block of C.C 1:2:4 cost of situ to the design profile i.e cost of mould as per drawing i/c supplying floating cost of cement 1/32" thick to expose surface finished smooth curing complete as per drawing design..etc complete	Rs:94.00	P.Rft	Rs:22654.00
12.	439.0Cft	Cement plaster 1:4 up to 12' height ½" thick (G.Sch: P-No:51 It/No:11(b).	Rs:2283.93	%Sft	Rs:10018.00
				Total:-	Rs:1,28,029/-
<b>PART-B (PROVIDING AND FIXING OF PAVER BLOCK)</b>					
1.	2650.0Cft	Earth work excavation undressed lead upto a single throw of Kassiphawarah of shovel in ordinary soil ..etc	Rs:1361.25	%Ocft	Rs:3607.00
2.	2650.0Cft	Dressing and leveling of earth work to designed section, in ordinary soil etc complete	Rs:187.55	%Ocft	Rs:497.00
3.	1325.0Cft	Supplying and filling pit sand under floor and plunging into wells...	Rs:1141.25	%Ocft	Rs:15122.
4.	875.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:98720.00
5.	2650.0Sft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quaddra / cable shape with pigmented b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:657650.00
				Total:-	Rs:7,75,596.00

Amount Total (a+b) Rs:9,03,625/-

  
10.65% Above/Below On The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

Total (A) = a + b in words

999862 Nine Lac Ninety Nine Thousand Eight hundred Sixty Two Only

  
Contractor

Executive Engineer / Procuring Agency

Summary of Bill of Quantities

Cost of Bid

Amount 999862

1 (A) Cost based on composite Schedule of Rate

2 (B) Cost of based on Non / Offered Schedule of Rates.

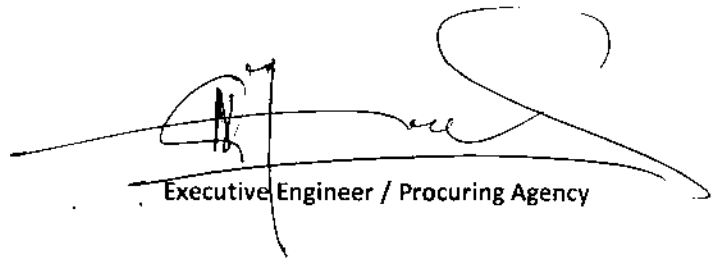
        

TOTAL COST OF BID (C) = TOTAL (A) + Total (B)

999862

*Asterk*

Contractor



Executive Engineer / Procuring Agency

NAME OF WORK: - CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN MALLAH MOHALLA  
WARD NO-4 TOWN COMMITTEE CHUHAR JAMALI

BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
<b>PART – A (CONSTRUCTION OF DRAIN)</b>					
1.	138.0Cft	Dismantling and removing Road Metalling...etc	Rs:605.00	%Cft	Rs:835.00
2.	9.38Cft	Dismantling of Brick work in lime or cement mortar ..etc complete	Rs:1285.63	%Cft	Rs:121.00
3.	6.25 Cft	Dismantling of CC plain 1:2:4..etc complete	Rs:3327.50	%Cft	Rs:208.00
4.	10.50Cft	Dismantling of C.C Reinforced separating Reinforcement from concrete, cleaning and straitening the same ...etc complete	Rs:5445.00	%Cft	Rs:572.00
5.	603.50Cft	Excavation in foundation of building and bridges and others structure i/c dag bellig dressing and refilling ground structure with excavated earth watering and ramming lead up to 5' ft in ordinary soil.	Rs:3176.25	%Ocft	Rs:1914.00
6.	150.60Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 l/5(f)	Rs:11288.75	%Cft	Rs:17004.00
7.	964.0Sft	Erection and removal of centering for RCC work ....etc complete	Rs:3127.41	%Sft	Rs:30148.00
8.	241.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 l/5(f)	Rs:12595.00	%Cft	Rs:30354.00
9.	26.40Cft	RCC work in roof slab, beams coloums rafts, lintels and others structural member laid in situ or precast laid in position complete in all respects (b) ratio 1:2:4 90 lbs cement 2Cft sand 4cft shingle 1/8" to 1/4" gauge (G.Sch: P-No: It/No:	Rs:337.00	P.Cft	Rs:8897.0
10.	1.06Cwt	Fabrication of mild steel reinforcement for cement concrete including cutting, bending laying in position, making joints and fastening including cost of binding wire (also includes removal of rust bars ) using tor bars(G.Sch:P-No:16 It/No:8(b).	Rs:5001.70	P.Cwt	Rs:5305.00

11.	241.0Rft	Construction of standard open type drains connuttee block of C.C 1:2:4 cost of situ to the design profile i.c cost of mould as per drawing i/c supplying floating cost of cement 1/32" thick to expose surface finished smooth curing complete as per drawing design..etc complete	Rs:94.00	P.Rft	Rs:22654.00
12.	439.0Cft	Cement plaster 1:4 up to 12' height ½" thick (G.Sch: P-No:51 lt/No:11(b).	Rs:2283.93	%Sft	Rs:10018.00
				Total:-	Rs:1,28,029/-
<b>PART-B (PROVIDING AND FIXING OF PAVER BLOCK)</b>					
1.	2650.0Cft	Earth work excavation undressed lead upto a single throw of Kassi phawarah of shovel in ordinary soil ..etc	Rs:1361.25	%Ocft	Rs:3607.00
2.	2650.0Cft	Dressing and leveling of earth wok to designed section, in ordinary soil etc complete	Rs:187.55	%Ocft	Rs:497.00
3.	1325.0Cft	Supplying and filling pit sand under floor and plunging into wells...	Rs:1141.25	%Ocft	Rs:15122.
4.	875.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch:P/15 l/5(f)	Rs:11288.75	%Cft	Rs:98720.00
5.	2650.0Sft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quddra / cable shape with pigmented b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:657650.00
				Total:-	Rs:7,75,596.00

Amount Total (a+b) Rs:9,03,625/-

11.1 %Above/Below On The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

Total (A) = a + b in words

1003024

Ten Lac three thousand.  
Twenty four only

*Razartelli*  
Contractor

*[Signature]*  
Executive Engineer / Procuring Agency



Summary of Bill of Quantities

Cost of Bid

Amount 1003024

1 (A) Cost based on composite Schedule of Rate

2 (B) Cost of based on Non / Offered Schedule of Rates.

TOTAL COST OF BID (C) = TOTAL (A) + Total (B)

1003024

*[Signature]*  
Contractor

*[Signature]*  
Executive Engineer / Procuring Agency

NAME OF WORK: - CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN MALLAH MOHALLA  
WARD NO-4 TOWN COMMITTEE CHUHAR JAMALI

BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
<b>PART – A (CONSTRUCTION OF DRAIN)</b>					
1.	138.0Cft	Dismantling and removing Road Metalling...etc	Rs:605.00	%Cft	Rs:835.00
2.	9.38Cft	Dismantling of Brick work in lime or cement mortar ..etc complete	Rs:1285.63	%Cft	Rs:121.00
3.	6.25 Cft	Dismantling of CC plain 1:2:4..etc complete	Rs:3327.50	%Cft	Rs:208.00
4.	10.50Cft	Dismantling of C.C Reinforced separating Reinforcement from concrete, cleaning and straitening the same ...etc complete	Rs:5445.00	%Cft	Rs:572.00
5.	603.50Cft	Excavation in foundation of building and bridges and others structure i/c dag bellig dressing and refilling ground structure with excavated earth watering and ramming lead up to 5 ft in ordinary soil.	Rs:3176.25	%Ocft	Rs:1914.00
6.	150.60Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 l/5(f)	Rs:11288.75	%Cft	Rs:17004.00
7.	964.0Sft	Erection and removal of centering for RCC work ....etc complete	Rs:3127.41	%Sft	Rs:30148.00
8.	241.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 l/5(f)	Rs:12595.00	%Cft	Rs:30354.00
9.	26.40Cft	RCC work in roof slab, beams coloums rafts, lintels and others structural member laid in situ or precast laid in position complete in all respects (b) ratio 1:2:4 90 lbs cement 2Cft sand 4cft shingle 1/8" to 3/8" gauge (G.Sch: P-No: lt/No:	Rs:337.00	P.Cft	Rs:8897.0
10.	1.06Cwt	Fabrication of mild steel reinforcement for cement concrete including cutting, bending laying in position, making joints and fastening including cost of binding wire (also includes removal of rust bars ) using tor bars(G.Sch:P-No:16 lt/No:8(b).	Rs:5001.70	P.Cwt	Rs:5305.00

11.	241.0Rft	Construction of standard open type drains connuttee block of C.C 1:2:4 cost of situ to the design profile i.c cost of mould as per drawing i/c supplying floating cost of cement 1/32" thick to expose surface finished smooth curing complete as per drawing design..etc complete	Rs:94.00	P.Rft	Rs:22654.00
12.	439.0Cft	Cement plaster 1:4 up to 12' height ½" thick (G.Sch: P-No:51 It/No:11(b).	Rs:2283.93	%Sft	Rs:10018.00
				Total:-	Rs:1,28,029/-

**PART-B (PROVIDING AND FIXING OF PAVER BLOCK)**

1.	2650.0Cft	Earth work excavation undressed lead upto a single throw of Kassi phawarah of shovel in ordinary soil .etc	Rs:1361.25	%Ocft	Rs:3607.00
2.	2650.0Cft	Dressing and leveling of earth wok to designed section, in ordinary soil etc complete	Rs:187.55	%Ocft	Rs:497.00
3.	1325.0Cft	Supplying and filling pit sand under floor and plunging into wells...	Rs:1141.25	%Ocft	Rs:15122.
4.	875.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:98720.00
5.	2650.0Sft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quddra / cable shape with pigmented b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:657650.00
				Total:-	Rs:7,75,596.00

*[Handwritten signature]*  
 12 / %Above/Below On The Schedule Rates of CSR.

Amount Total (a+b) **Rs:9,03,625/-**

Amount to be Added/Deducted on the basis of premium quoted Total (b)

Total (A) = a + b in words

1012061 Ten lac Twelve Thousand Sixty one only

*[Handwritten signature]*  
Contractor

*[Handwritten signature]*  
Executive Engineer / Procuring Agency



**SINDH PUBLIC PROCUREMENT REGULATORY AUTHORITY**  
**CONTRACT EVALUATION FORM**

**TO BE FILLED IN BY ALL PROCURING AGENCIES FOR PUBLIC**  
**CONTRACTORS OF WORKS, SERVICES & GOODS.**

- 1). NAME OF THE ORGANIZATION / DEPTT. Town Committee, Chuhar Jamali, Sujawal
- 2). PROVINCIAL / LOCAL GOVT. / OTHER LOCAL GOVERNMENT
- 3). TITLE OF CONTRACT: "CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN WARD NO-5 TOWN COMMITTEE CHUHAR JAMALI"
- 4) TENDER NUMBER: as above
- 5). BRIEF DESCRIPTION OF CONTRACT: CC Paver Block & CC Drain
- 6). FORUM THAT APPROVED THE SCHEME Town Committee, Chuhar Jamali
- 7). TENDER ESTIMATED VALUE Rs. 10,00,000/=
- 8). ENGINEER'S ESTIMATE PC -Cost Rs: 100000/-  
(FOR CIVIL WORK ONLY)
- 9). ESTIMATED COMPLETION PERIOD (AS PER CONTRACT) (01) MONTH
- 10). TENDER OPENED ON DATE AND TIME 02-11-2017 AT 02:00 PM.
- 11). NUMBER OF TENDER DOCUMENTS SOLD (Attach list of buyers). 03
- 12). NUMBER OF BIDS RECEIVED 03
- 13). NUMBERS OF BIDDERS PRESENT AT THE TIME OF OPEINING OF BIDS 03
- 14). BID EVALUATION REPORT (Enclose a copy) YES
- 15). NAME AND ADDRESS OF THE SUCCESSFUL BIDDER. M/S Abdul Sattar Kehar
- 16). CONTRACT AWARD PRICE SANCTION RUPEES Rs: 999262/-
- 17). RANKING OF SUCCESSFUL BIDDER IN EVALUATION REPORT (I.E. 1ST 2ND 3RD EVALUATION BID). 1<sup>st</sup> Lowest M/S Abdul Sattar Kehar  
2<sup>nd</sup> LOWEST M/S Liaqat Ali & Company  
3<sup>rd</sup> LOWEST M/S Abdul Hakeem Chandio
- 18). METHOD OF PROCUREMENT USED: - (TICK ONE)
- A). SINGLE STAGE-ONE ENVELOPE PROCEDURE \_\_\_\_\_ ✓ \_\_\_\_\_
- B). SINGLE STAGE-TWO ENVELOPE PROCEDURE \_\_\_\_\_
- C). TWO STAGE BIDDING PROCEDURE \_\_\_\_\_

D). TWO STAGE-TWO ENVELOPE BIDDING PROCEDURE

PLEASE SPECIFY IF ANY OTHER METHOD OF PROCUREMENT WAS ADOPTED i.e. EMERGENCY, DIRECT CONTRACTING ETC. WITH BRIEF REASONS.

19). PROVIDING AUTHORITY FOR AWARD OF CONTRACT CHAIRMAN TC, CHUHAR JAMALI

20). WHETHER THE PROCUREMENT WAS INCLUDED IN ANNUAL PROCUREMENT PLAN

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

21). ADVERTISEMENT:

i) SPPRA Website  
(if yes give date & SPPRA Identification No.

YES	<a href="http://www.pprasindhgov.pk">www.pprasindhgov.pk</a> SPPRA Tender SR No. 34792 Dt: 02-11-2017		
-----	--	--	--

ii) Newspapers  
(if yes give names of newspapers & dates)

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

22). NATURE OF CONTRACT

	<input checked="" type="checkbox"/>		
DOMESTIC/ LOCAL	LOCAL	INT	

23). WHETHER QUALIFICATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?

(If yes, enclose copy).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

24). WHETHER BID EVALUATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?

(if, yes enclose a copy).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

25). WHETHER APPROVAL OF COMPETENT AUTHORITY WAS OBTAINED FOR USING A METHOD OTHER THAN OPEN COMPETITIVE BIDDING?

YES		NO	N/A
-----	--	----	-----

26). WAS BID SECURITY OBTAINED FROM ALL THE BIDDERS?

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

27). WHETHER THE SUCCESSFUL BID WAS LOWEST EVALUATED BID / BEST EVALUATED BID (In case of Consultancies).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

28). WHETHER THE SUCCESSFUL BIDDER WAS TECHNICALLY COMPLAINT?

YES		NO	N/A
-----	--	----	-----

29). WHETHER NAMES OF THE BIDDERS AND THEIR QUOTED PRICES WERE READ OUT AT THE TIME OF OPENING OF BIDS?

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

30). WHETHER EVALUATION REPORT GIVEN TO BIDDERS BEFORE THE AWARD OF CONTRACT?

(Attach a copy of the bid evaluation report).

31). ANY COMPLAINTS RECEIVED  
(if yes, result thereof).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

YES		NO	N/A
-----	--	----	-----

32). ANY DEVIATION FROM SPECIFICATIONS GIVEN IN THE TENDER  
NOTICE / DOCUMENTS ( if yes, given details).

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

33). WAS THE EXTENSION MADE IN RESPONSE TIME?  
(if yes, given reasons)

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

34). DEVIATION FROM QUALIFICATION CRITERIA  
(if yes, detailed reasons).

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

35). WAS IT ASSURED BY THE PROCURING AGENCY THAT THE SELECTED  
FIRM IS NOT BLACK LISTED?

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

36). WAS A VISIT MADE BY ANY OFFICER / OFFICIAL OF THE PROCURING  
AGENCY TO THE SUPPLIER'S PREMISES IN CONNECTION WITH THE PROCUREMENT?  
IF SO, DETAILS TO BE ASCERTAINED REGARDING FINANCING OF VISIT, IF ABROAD:  
(if yes, enclose a copy)

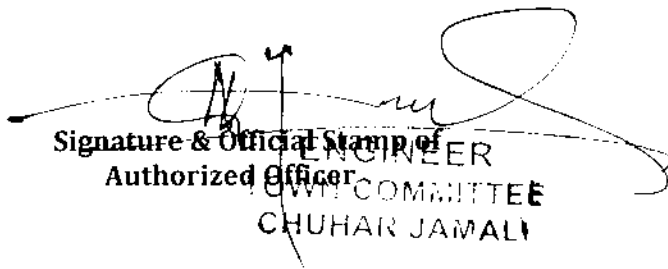
YES		NO	N/A
-----	--	----	-----

37). WERE PROPER SAFEGUARDS PROVIDED ON MOBILIZATION ADVANCE PAYMENT IN THE  
CONTRACT ( BANK GUARANTEE ETC)?

YES		NO	N/A
-----	--	----	-----

38). SPECIAL CONDITION, IF ANY  
(if yes, give Brief Description)

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

  
Signature & Official Stamp of  
Authorized Officer  
ENGINEER  
BUYING COMMITTEE  
CHUHAR JAMALI

FOR OFFICE USE ONLY

**SPPRA, Block No. 8, Sindh Secretariat No. 4-A, Court Road, Karachi**  
Tel: 021-9205356, 021-9205369 & Fax No. 021-9206291.

# OFFICE OF THE TOWN COMMITTEE

## CHUHAR JAMALI

NO.T.C.C.J./T.O/ 37

/2017

Dated: 15/12/2017

M/s. ABDUL SATTAR KEHAR,  
GOVERNMENT CONTRACTOR

### LETTER OF ACCEPTANCE / SANCTION ORDER

**Subject: CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN WARD NO-5 TOWN COMMITTEE CHUHAR JAMALI**

On behalf of the employer it is notified that following the approval of accepted of Chairman, Town Committee, Chuhar Jamali, vide Para 07 /No, your bid for the subject is hereby accepted for the sum of Rs:9,99,862/- (Rupees. NINE LAC NINETY NINE THOUSAND EIGHT HUNDRED SIXTY TWO ONLY) as approved by the competent authority Town Committee, Chuhar Jamali.

There is now binding contract between Town Committee, Chuhar Jamali and M/s. Abdul Sattar Kehar,

In accordance with the general condition of contract, you are required to enter in to and execute a contract agreement this agreement shall be signed by employer and M/s. Abdul Sattar Kehar.

In accordance with condition of contract as per SPPRA-2010 the 2% Bid security Rs:20,000/- and remaining 8% Security may deduct from bill.

All correspondence on onward shall be carried out though Town Officer, Town Committee, Chuhar Jamali.

  
TOWN OFFICER  
TOWN COMMITTEE, CHUHAR JAMALI

Copy to:-

- 1- Chairman, Town Committee, Chuhar Jamali.
- 2- Assistant Executive Engineer, (Town Committee, Chuhar Jamali)
- 3- Office Copy.



# TOWN COMMITTEE CHUHAR JAMALI

## AGREEMENT

Subject:- CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN WARD NO-5  
TOWN COMMITTEE CHUHAR JAMALI

Cost: Rs.9,99,862/-

Completion Time (03 Months) penalty \_\_\_\_\_

The Agreement is made on this 20th Dec day of 2017 at Thatta, between the Town Committee, Chuhar Jamali herein after called the Chuhar Jamali, Sujawal (Which expression shall mean and include his successors) on the one part and M/s. ABDUL SATTAR KEHAR, have the office at Chairman TE Chuhar through their proprietor \_\_\_\_\_ hereinafter call the "Contractor" (Which expression shall mean and include his successors, administrator and assignees) on the other part.

Whereas the Town Committee, Chuhar Jamali, has accepted the tender of the contractor for construction and completion of the work namely CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN WARD NO-5 TOWN COMMITTEE CHUHAR JAMALI, at a cost of Rs.9,99,862/- within a period of (03 Month) and penalty Rs. \_\_\_\_\_ according to the specification and general conditions of the contract signed by the Contractor after having made himself full acquainted with their meaning.

And whereas the Contractor has already furnished with the Town Committee, Chuhar Jamali the 2% bid amount of Rs.20,000/- (Rupees Twenty Thousand Only) on account of Bid / Performance security for the said contract.

The following documents after incorporating addenda, except those parts relating to instructions to bidders shall be deemed to form and be read and construed as part of this Agreement, viz:

- a) The Contract Agreement;
- b) The Letter of Acceptance;
- c) The Completed form of Bid;
- d) The Standard and special Terms & Conditions of Contract – Part;
- e) The priced Bill of Quantities

In consideration of the payments to be made by the Town Committee, Chuhar Jamali to the Contractor as hereinafter mentioned, the contractor hereby covenants with the Town Committee, Chuhar Jamali to execute and complete the works and remedy defects therein In conformity and in all respects with the provisions of the contract.

The Town Committee, Chuhar Jamali hereby covenants to pay the contractor, in consideration of the execution and completion of the works as per provisions of contract, the contract Price or such other sum as may become payable under the provisions of the contract at the time and in the manner prescribed by the contractor.

The contractor has given a lien to the Town Committee, Chuhar Jamali over the Security for due fulfillment of the contract and do hereby bind himself, his heirs, successors legal representative and assignee to pay to the Town Committee, Chuhar Jamali penalty through forfeiture of the said Security in case of breach of any condition of the Contract without prejudice to the right of Town Committee, Chuhar Jamali to recover the damages from the Contractor for any such breach as per condition of the contract.

Now therefore this agreement witnesses that the Town Committee, Chuhar Jamali and the Contractor shall respectively and shall well truly carry out and fulfill the contract and abide by all terms and conditions and specifications thereof.

In witness whereof the said parties have set their respective hands on this 20th Dec 2017

Witness:

1. Ji R  
41407-2335478-7

2. 60/10  
41407-6120884-3

Abdul Sattar Kehar  
Contractor  
ABDUL SATTAR KEHAR  
Govt. Contractor

41407-5408062-5

Chairman  
CHAIRMAN  
TOWN COMMITTEE, CHUHAR JAMALI

NAME OF WORK: - CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN WARD NO-5 TOWN  
COMMITTEE CHUHAR JAMALI

BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
<b>PART – A (CONSTRUCTION OF DRAIN)</b>					
1.	138.0Cft	Dismantling and removing Road Metalling...etc	Rs:605.00	%Cft	Rs:835.00
2.	9.38Cft	Dismantling of Brick work in lime or cement mortor ..etc complete	Rs:1285.63	%Cft	Rs:121.00
3.	6.25 Cft	Dismantling of CC plain 1:2:4..etc complete	Rs:3327.50	%Cft	Rs:208.00
4.	10.50Cft	Dismantling of C.C Reinforced separating Reinforcement from concrete, cleaning and straitening the same ...etc complete	Rs:5445.00	%Cft	Rs:572.00
5.	603.50Cft	Excavation in foundation of building and bridges and others structure i/c dag bellig dressing and refilling ground structure with excavated earth watering and ramming lead up to 5'ft in ordinary soil.	Rs:3176.25	%Ocft	Rs:1914.00
6.	150.60Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 l/5(f)	Rs:11288.75	%Cft	Rs:17004.00
7.	964.0Sft	Erection and removal of centering for RCC work ....etc complete	Rs:3127.41	%Sft	Rs:30148.00
8.	241.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 l/5(f)	Rs:12595.00	%Cft	Rs:30354.00
9.	26.40Cft	RCC work in roof slab, beams coloums rafts, lintels and others structural member laid in situ or precast laid in position complete in all respects (b) ratio 1:2:4 90 lbs cement 2Cft sand 4cft shingle 1/8" to 1/2" gauge (G.Sch: P-No: It/No:	Rs:337.00	P.Cft	Rs:8897.0
10.	1.06Cwt	Fabrication of mild steel reinforcement for cement concrete including cutting, bending laying in position, making joints and fastening including cost of binding wire (also includes removal of rust bars ) using tor bars(G.Sch:P-No:16 It/No:8(b).	Rs:5001.70	P.Cwt	Rs:5305.00

11.	241.0Rft	Construction of standard open type drains connuttee block of C.C 1:2:4 cost of situ to the design profile i.c cost of mould as per drawing i/c supplying floating cost of cement 1/32" thick to expose surface finished smooth curing complete as per drawing design..etc complete	Rs:94.00	P.Rft	Rs:22654.00
12.	439.0Cft	Cement plaster 1:4 up to 12' height 1/2" thick (G.Sch: P-No:51 It/No:11(b).	Rs:2283.93	%Sft	Rs:10018.00
				Total:-	Rs:1,28,029/-
<b>PART-B (PROVIDING AND FIXING OF PAVER BLOCK)</b>					
1.	2650.0Cft	Earth work excavation undressed lead upto a single throw of Kassi phawarah of shovel in ordinary soil ..etc	Rs:1361.25	%Ocft	Rs:3607.00
2.	2650.0Cft	Dressing and leveling of earth wok to designed section, in ordinary soil etc complete	Rs:187.55	%Ocft	Rs:497.00
3.	1325.0Cft	Supplying and filling pit sand under floor and plunging into wells...	Rs:1141.25	%Ocft	Rs:15122.
4.	875.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:98720.00
5.	2650.0Sft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quddra / cable shape with pigmented b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:657650.00
				Total:-	Rs:7,75,596.00

Amount Total (a+b) Rs:9,03,625/-

10.65% Above/Below On The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

Total (A) = a + b in words

999862

Nine Lac Ninety Nine thousand eight hundred Sixty two only

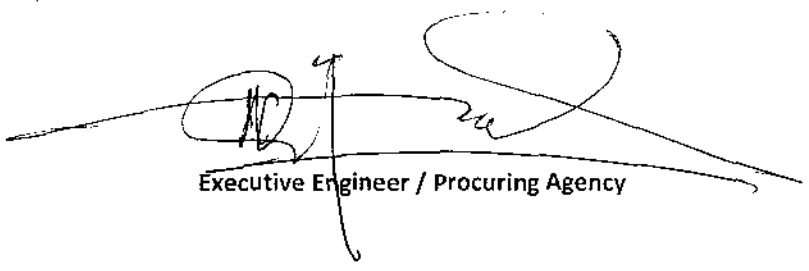
*ASatter*  
Contractor

*[Signature]*  
Executive Engineer / Procuring Agency

Summary of Bill of Quantities

Cost of Bid	Amount
	999862
1 (A) Cost based on composite Schedule of Rate	<hr/>
2 (B) Cost of based on Non / Offered Schedule of Rates.	<hr/>
TOTAL COST OF BID (C) = TOTAL (A) + Total (B)	999862

  
Contractor

  
Executive Engineer / Procuring Agency

NAME OF WORK: - CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN WARD NO-5 TOWN  
COMMITTEE CHUHAR JAMALI

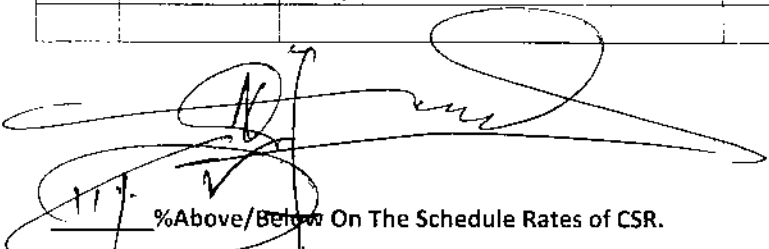
BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
<b>PART – A (CONSTRUCTION OF DRAIN)</b>					
1.	138.0Cft	Dismantling and removing Road Metalling...etc	Rs:605.00	%Cft	Rs:835.00
2.	9.38Cft	Dismantling of Brick work in lime or cement mortar ..etc complete	Rs:1285.63	%Cft	Rs:121.00
3.	6.25 Cft	Dismantling of CC plain 1:2:4..etc complete	Rs:3327.50	%Cft	Rs:208.00
4.	10.50Cft	Dismantling of C.C Reinforced separating Reinforcement from concrete, cleaning and straitening the same ...etc complete	Rs:5445.00	%Cft	Rs:572.00
5.	603.50Cft	Excavation in foundation of building and bridges and others structure i/c dag bellig dressing and refilling ground structure with excavated earth watering and ramming lead up to 5'ft in ordinary soil.	Rs:3176.25	%Oft	Rs:1914.00
6.	150.60Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 l/5(f)	Rs:11288.75	%Cft	Rs:17004.00
7.	964.05ft	Erection and removal of centering for RCC work ....etc complete	Rs:3127.41	%Sft	Rs:30148.00
8.	241.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 l/5(f)	Rs:12595.00	%Cft	Rs:30354.00
9.	26.40Cft	RCC work in roof slab, beams coloums rafts, lintels and others structural member laid in situ or precast laid in position complete in all respects (b) ratio 1:2:4 90 lbs cement 2Cft sand 4cft shingle 1/8" to 3/4" gauge (G.Sch: P-No: It/No:	Rs:337.00	P.Cft	Rs:8897.0
10.	1.06Cwt	Fabrication of mild steel reinforcement for cement concrete including cutting, bending laying in position, making joints and fastening including cost of binding wire (also includes removal of rust bars ) using tor bars(G.Sch:P-No:16 It/No:8(b).	Rs:5001.70	P.Cwt	Rs:5305.00

11.	241.0Rft	Construction of standard open type drains connuttee block of C.C 1:2:4 cost of situ to the design profile i.c cost of mould as per drawing i/c supplying floating cost of cement 1/32" thick to expose surface finished smooth curing complete as per drawing design..etc complete	Rs:94.00	P.Rft	Rs:22654.00
12.	439.0Cft	Cement plaster 1:4 up to 12' height 1/2" thick (G.Sch: P-No:51 It/No:11(b).	Rs:2283.93	%Sft	Rs:10018.00
				Total:-	Rs:1,28,029/-
<b>PART-B (PROVIDING AND FIXING OF PAVER BLOCK)</b>					
1.	2650.0Cft	Earth work excavation undressed lead upto a single throw of Kassi phawarah of shovel in ordinary soil ..etc	Rs:1361.25	%Ocft	Rs:3607.00
2.	2650.0Cft	Dressing and leveling of earth wok to designed section, in ordinary soil etc complete	Rs:187.55	%Ocft	Rs:497.00
3.	1325.0Cft	Supplying and filling pit sand under floor and plunging into welis...	Rs:1141.25	%Ocft	Rs:15122.
4.	875.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:98720.00
5.	2650.0Sft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quddra / cable shape with pigmented b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:657650.00
				Total:-	Rs:7,75,596.00

Amount Total (a+b) **Rs:9,03,625/-**

 %Above/Below On The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

Total (A) = a + b in words

1003029 Ten Lak three thousand twenty (only)

  
Contractor

  
Executive Engineer / Procuring Agency

Summary of Bill of Quantities

Cost of Bid

Amount 1002024

1 (A) Cost based on composite Schedule of Rate

\_\_\_\_\_

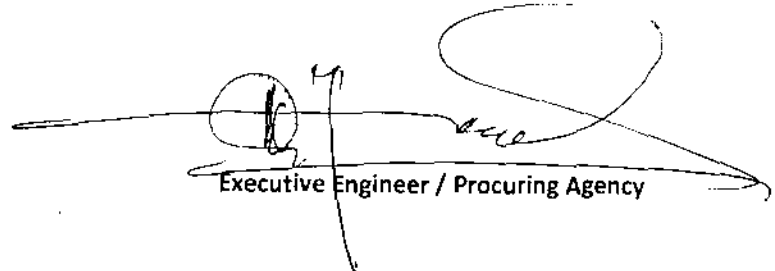
2 (B) Cost of based on Non / Offered Schedule of Rates.

\_\_\_\_\_

TOTAL COST OF BID (C) = TOTAL (A) + Total (B)

1002024

*Logantali*  
Contractor

  
Executive Engineer / Procuring Agency

NAME OF WORK: - CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN WARD NO-5 TOWN  
COMMITTEE CHUHAR JAMALI

BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
<b>PART - A (CONSTRUCTION OF DRAIN)</b>					
1.	138.0Cft	Dismantling and removing Road Metalling...etc	Rs:605.00	%Cft	Rs:835.00
2.	9.38Cft	Dismantling of Brick work in lime or cement mortar ..etc complete	Rs:1285.63	%Cft	Rs:121.00
3.	6.25 Cft	Dismantling of CC plain 1:2:4..etc complete	Rs:3327.50	%Cft	Rs:208.00
4.	10.50Cft	Dismantling of C.C Reinforced separating Reinforcement from concrete, cleaning and straitening the same ...etc complete	Rs:5445.00	%Cft	Rs:572.00
5.	603.50Cft	Excavation in foundation of building and bridges and others structure i/c dag bellig dressing and refilling ground structure with excavated earth watering and ramming lead up to 5'ft in ordinary soil.	Rs:3176.25	%Cft	Rs:1914.00
6.	150.60Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:17004.00
7.	964.0Sft	Erection and removal of centering for RCC work ....etc complete	Rs:3127.41	%Sft	Rs:30148.00
8.	241.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:12595.00	%Cft	Rs:30354.00
9.	26.40Cft	RCC work in roof slab, beams coloums rafts, lintels and others structural member laid in situ or precast laid in position complete in all respects (b) ratio 1:2:4 90 lbs cement 2Cft sand 4cft shingle 1/8" to 1/2" gauge (G.Sch: P-No: It/No:	Rs:337.00	P.Cft	Rs:8897.0
10.	1.06Cwt	Fabrication of mild steel reinforcement for cement concrete including cutting, bending laying in position, making joints and fastening including cost of binding wire (also includes removal of rust bars ) using tor bars(G.Sch:P-No:16 It/No:8(b).	Rs:5001.70	P.Cwt	Rs:5305.00



11.	241.0Rft	Construction of standard open type drains connuttee block of C.C 1:2:4 cost of situ to the design profile i.c cost of mould as per drawing i/c supplying floating cost of cement 1/32" thick to expose surface finished smooth curing complete as per drawing design..etc complete	Rs:94.00	P.Rft	Rs:22654.00
12.	439.0Cft	Cement plaster 1:4 up to 12' height 1/2" thick (G.Sch: P-No:51 It/No:11(b).	Rs:2283.93	%Sft	Rs:10018.00
				Total:-	Rs:1,28,029/-
<b>PART-B (PROVIDING AND FIXING OF PAVER BLOCK)</b>					
1.	2650.0Cft	Earth work excavation undressed lead upto a single throw of Kassi phawarah of shovel in ordinary soil ..etc	Rs:1361.25	%Ocft	Rs:3607.00
2.	2650.0Cft	Dressing and leveling of earth wok to designed section, in ordinary soil etc complete	Rs:187.55	%Ocft	Rs:497.00
3.	1325.0Cft	Supplying and filling pit sand under floor and plunging into wells...	Rs:1141.25	%Ocft	Rs:15122.
4.	875.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 l/5(f)	Rs:11288.75	%Cft	Rs:98720.00
5.	2650.0Sft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quddra / cable shape with pigmented b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:657650.00
				Total:-	Rs:7,75,596.00

Amount Total (a+b) Rs:9,03,625/-

12. %Above/Below On The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

Total (A) = a + b in words

1012061 Ten Lac twelve thousand Sixty one Only

*Alfaleem*

Contractor

*[Signature]*  
Executive Engineer / Procuring Agency

# Summary of Bill of Quantities

Cost of Bid

Amount 1012061

1 (A) Cost based on composite Schedule of Rate

\_\_\_\_\_

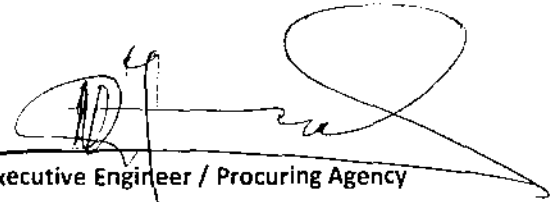
2 (B) Cost of based on Non / Offered Schedule of Rates.

\_\_\_\_\_

TOTAL COST OF BID (C) = TOTAL (A) + Total (B)

1012061

*AH Kew*  
Contractor

  
Executive Engineer / Procuring Agency

**SINDH PUBLIC PROCUREMENT REGULATORY AUTHORITY**  
**CONTRACT EVALUATION FORM**

**TO BE FILLED IN BY ALL PROCURING AGENCIES FOR PUBLIC**  
**CONTRACTORS OF WORKS, SERVICES & GOODS.**

- 1). NAME OF THE ORGANIZATION / DEPTT. Town Committee, Chuhar Jamali, Sujawal
- 2). PROVINCIAL / LOCAL GOVT. / OTHER LOCAL GOVERNMENT
- 3). TITLE OF CONTRACT: "CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN MEMON MOHALLA WARD NO-6 TOWN COMMITTEE CHUHAR JAMALI"
- 4) TENDER NUMBER: as above
- 5). BRIEF DESCRIPTION OF CONTRACT: CC Paver Block & CC Drain
- 6). FORUM THAT APPROVED THE SCHEME Town Committee, Chuhar Jamali
- 7). TENDER ESTIMATED VALUE Rs. 10,00,000/=
- 8). ENGINEER'S ESTIMATE PC -Cost Rs: 1000000/-  
(FOR CIVIL WORK ONLY)
- 9). ESTIMATED COMPLETION PERIOD (AS PER CONTRACT) (0 1) MONTH
- 10). TENDER OPENED ON DATE AND TIME 02-11-2017 AT 02:00 PM.
- 11). NUMBER OF TENDER DOCUMENTS SOLD (Attach list of buyers). 03
- 12). NUMBER OF BIDS RECEIVED 03
- 13). NUMBERS OF BIDDERS PRESENT AT THE TIME OF OPEINING OF BIDS 03
- 14). BID EVALUATION REPORT (Enclose a copy) YES
- 15). NAME AND ADDRESS OF THE SUCCESSFUL BIDDER. M/S Abdul Sattar Kehar
- 16). CONTRACT AWARD PRICE SANCTION RUPEES Rs: 999262/-
- 17). RANKING OF SUCCESSFUL BIDDER IN EVALUATION REPORT (I.E. 1ST 2ND 3RD EVALUATION BID). 1<sup>st</sup> Lowest M/S Abdul Sattar Kehar  
2<sup>nd</sup> LOWEST M/S Liaqat Ali & Company  
3<sup>rd</sup> LOWEST M/S Abdul Hakeem Chandio
- 18). METHOD OF PROCUREMENT USED: - (TICK ONE)
- A). SINGLE STAGE-ONE ENVELOPE PROCEDURE \_\_\_\_\_ ✓ \_\_\_\_\_
- B). SINGLE STAGE-TWO ENVELOPE PROCEDURE \_\_\_\_\_
- C). TWO STAGE BIDDING PROCEDURE \_\_\_\_\_

D). TWO STAGE-TWO ENVELOPE BIDDING PROCEDURE \_\_\_\_\_

PLEASE SPECIFY IF ANY OTHER METHOD OF PROCUREMENT WAS ADOPTED i.e. EMERGENCY, DIRECT CONTRACTING ETC. WITH BRIEF REASONS.

19). PROVIDING AUTHORITY FOR AWARD OF CONTRACT CHAIRMAN TC, CHUHAR JAMALI

20). WHETHER THE PROCUREMENT WAS INCLUDED IN ANNUAL PROCUREMENT PLAN

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

21). ADVERTISEMENT:

i) SPPRA Website  
(if yes give date & SPPRA Identification No.

YES	<a href="http://www.pprasindhgov.pk">www.pprasindhgov.pk</a> SPPRA Tender SR No. 34792 Dt: 02-11-2017
-----	--

ii) Newspapers  
(if yes give names of newspapers & dates)

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

22). NATURE OF CONTRACT

DOMESTIC/ LOCAL	<input checked="" type="checkbox"/> LOCAL	INT	
-----------------	---	-----	--

23). WHETHER QUALIFICATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?

(If yes, enclose copy).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

24). WHETHER BID EVALUATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?

(if, yes enclose a copy).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

25). WHETHER APPROVAL OF COMPETENT AUTHORITY WAS OBTAINED FOR USING A METHOD OTHER THAN OPEN COMPETITIVE BIDDING?

YES		NO	N/A
-----	--	----	-----

26). WAS BID SECURITY OBTAINED FROM ALL THE BIDDERS?

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

27). WHETHER THE SUCCESSFUL BID WAS LOWEST EVALUATED BID / BEST EVALUATED BID (In case of Consultancies).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

28). WHETHER THE SUCCESSFUL BIDDER WAS TECHNICALLY COMPLAINT?

YES		NO	N/A
-----	--	----	-----

29). WHETHER NAMES OF THE BIDDERS AND THEIR QUOTED PRICES WERE READ OUT AT THE TIME OF OPENING OF BIDS?

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

30). WHETHER EVALUATION REPORT GIVEN TO BIDDERS BEFORE THE AWARD OF CONTRACT?

(Attach a copy of the bid evaluation report).

31). ANY COMPLAINTS RECEIVED  
(if yes, result thereof).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

32). ANY DEVIATION FROM SPECIFICATIONS GIVEN IN THE TENDER  
NOTICE / DOCUMENTS ( if yes, given details).

YES		NO	N/A
-----	--	----	-----

33). WAS THE EXTENSION MADE IN RESPONSE TIME?  
(if yes, given reasons)

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

34). DEVIATION FROM QUALIFICATION CRITERIA  
(if yes, detailed reasons).

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

35). WAS IT ASSURED BY THE PROCURING AGENCY THAT THE SELECTED  
FIRM IS NOT BLACK LISTED?

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

36). WAS A VISIT MADE BY ANY OFFICER / OFFICIAL OF THE PROCURING  
AGENCY TO THE SUPPLIER'S PREMISES IN CONNECTION WITH THE PROCUREMENT?  
IF SO, DETAILS TO BE ASCERTAINED REGARDING FINANCING OF VISIT, IF ABROAD:  
(if yes, enclose a copy)

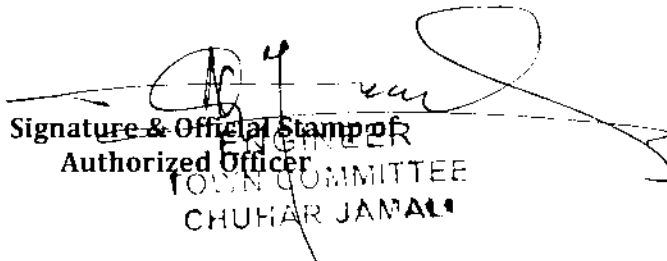
YES		NO	N/A
-----	--	----	-----

37). WERE PROPER SAFEGUARDS PROVIDED ON MOBILIZATION ADVANCE PAYMENT IN THE  
CONTRACT ( BANK GUARANTEE ETC)?

YES		NO	N/A
-----	--	----	-----

38). SPECIAL CONDITION, IF ANY  
(if yes, give Brief Description)

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

  
Signature & Official Stamp of  
Authorized Officer  
ENGINEER  
TOWN COMMITTEE  
CHUHAR JAMALI

FOR OFFICE USE ONLY

**SPPRA, Block No. 8, Sindh Secretariat No. 4-A, Court Road, Karachi**

**Tel: 021-9205356, 021-9205369 & Fax No. 021-9206291.**

# TOWN COMMITTEE CHUHAR JAMALI

## AGREEMENT

Subject: - CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN MEMON MOHALLA WARD NO-6 TOWN COMMITTEE CHUHAR JAMALI

Cost Rs.9,99,862/-

Completion Time (03 Months) penalty \_\_\_\_\_

The Agreement is made on this 20<sup>th</sup> Dec day of 2017 at Thatta, between the Town Committee, Chuhar Jamali herein after called the Chuhar Jamali, Sujawal (Which expression shall mean and include his successors) on the one part and M/s. ABDUL SATTAR KEHAR, have the office at Chairman TC Chuhar Jamali through their proprietor \_\_\_\_\_ hereinafter call the "Contractor" (Which expression shall mean and include his successors, administrator and assignees) on the other part.

Whereas the Town Committee, Chuhar Jamali, has accepted the tender of the contractor for construction and completion of the work namely CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN MEMON MOHALLA WARD NO-6 TOWN COMMITTEE CHUHAR JAMALI, at a cost of Rs.9,99,862/- within a period of (03 Month) and penalty Rs. \_\_\_\_\_ according to the specification and general conditions of the contract signed by the Contractor after having made himself full acquainted with their meaning.

And whereas the Contractor has already furnished with the Town Committee, Chuhar Jamali the 2% bid amount of Rs.20,000/- (Rupees Twenty Thousand Only) on account of Bid / Performance security for the said contract.

The following documents after incorporating addenda, except those parts relating to \_\_\_\_\_ instructions to bidders shall be deemed to form and be read and construed as part of this Agreement. viz:

- a) The Contract Agreement;
- b) The Letter of Acceptance;
- c) The Completed form of Bid;
- d) The Standard and special Terms & Conditions of Contract – Part;
- e) The priced Bill of Quantities

In consideration of the payments to be made by the Town Committee, Chuhar Contractor as hereinafter mentioned, the contractor hereby covenants with the Town Chuhar Jamali to execute and complete the works and remedy defects therein in conformity with the provisions of the contract.

The Town Committee, Chuhar Jamali hereby covenants to pay the contractor in consideration of the execution and completion of the works as per provisions of contract, the contract price or such other sum as may become payable under the provisions of the contract at the time and in the manner prescribed by the contractor.

The contractor has given a lien to the Town Committee, Chuhar Jamali over the Security for due fulfillment of the contract and do hereby bind himself, his heirs, successors legal representative and assignee to pay to the Town Committee, Chuhar Jamali penalty through forfeiture of the said Security in case of breach of any condition of the Contract without prejudice to the right of Town Committee, Chuhar Jamali to recover the damages from the Contractor for any such breach as per condition of the contract.

Now therefore this agreement witnesses that the Town Committee, Chuhar Jamali and the Contractor shall respectively and shall well truly carry out and fulfill the contract and abide by all terms and conditions and specifications thereof.

In witness whereof the said parties have set their respective hands on this \_\_\_\_\_ 2017

Witness:

1. Jilka  
41407-2335478-7

2. Abdul Sattar  
41407-612-884-5

Abdul Sattar Kehar  
Contractor  
Govt. Contractor

41407-540802-5

Chairman  
TOWN COMMITTEE, CHUHAR JAMALI



# OFFICE OF THE TOWN COMMITTEE

## CHUHAR JAMALI

NO.T.C.C.J./T.O/ 38

/ 2017

Dated: 15/12/2017

M/s. ABDUL SATTAR KEHAR,  
GOVERNMENT CONTRACTOR

### LETTER OF ACCEPTANCE / SANCTION ORDER

**Subject: CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN MEMON MOHALLA WARD  
NO-6 TOWN COMMITTEE CHUHAR JAMALI**

On behalf of the employer it is notified that following the approval of accepted of Chairman, Town Committee, Chuhar Jamali, vide Para 08 /No, your bid for the subject is hereby accepted for the sum of Rs:9,99,862/- (Rupees. NINE LAC NINETY NINE THOUSAND EIGHT HUNDRED SIXTY TWO ONLY) as approved by the competent authority Town Committee, Chuhar Jamali.

There is now binding contract between Town Committee, Chuhar Jamali and **M/s. Abdul Sattar Kehar,**

In accordance with the general condition of contract, you are required to enter in to and execute a contract agreement this agreement shall be signed by employer and **M/s. Abdul Sattar Kehar.**

In accordance with condition of contract as per SPPRA-2010 the 2% Bid security Rs:20,000/- and remaining 8% Security may deduct from bill.

All correspondence on onward shall be carried out through Town Officer, Town Committee, Chuhar Jamali.

  
TOWN OFFICER

TOWN COMMITTEE, CHUHAR JAMALI

Copy to:-

- 1- Chairman, Town Committee, Chuhar Jamali.
- 2- Assistant Executive Engineer, (Town Committee, Chuhar Jamali)
- 3- Office Copy.

NAME OF WORK: - **CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN MEMON MOHALLA  
WARD NO-6 TOWN COMMITTEE CHUHAR JAMALI**

**BILL OF QUANTITIES**

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
<b>PART – A (CONSTRUCTION OF DRAIN)</b>					
1.	138.0Cft	Dismantling and removing Road Metalling...etc	Rs:605.00	%Cft	Rs:835.00
2.	9.38Cft	Dismantling of Brick work in lime or cement mortar ..etc complete	Rs:1285.63	%Cft	Rs:121.00
3.	6.25 Cft	Dismantling of CC plain 1:2:4..etc complete	Rs:3327.50	%Cft	Rs:208.00
4.	10.50Cft	Dismantling of C.C Reinforced separating Reinforcement from concrete, cleaning and straitening the same ...etc complete	Rs:5445.00	%Cft	Rs:572.00
5.	603.50Cft	Excavation in foundation of building and bridges and others structure i/c dag bellig dressing and refilling ground structure with excavated earth watering and ramming lead up to 5'ft in ordinary soil.	Rs:3176.25	%Ocft	Rs:1914.00
6.	150.60Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:17004.00
7.	964.05ft	Erection and removal of centering for RCC work ....etc complete	Rs:3127.41	%Sft	Rs:30148.00
8.	241.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:12595.00	%Cft	Rs:30354.00
9.	26.40Cft	RCC work in roof slab, beams coloums rafts, lintels and others structural member laid in situ or precast laid in position complete in all respects (b) ratio 1:2:4 90 lbs cement 2Cft sand 4cft shingle 1/8" to 1/4" gauge (G.Sch: P-No: It/No:	Rs:337.00	P.Cft	Rs:8897.0
10.	1.06Cwt	Fabrication of mild steel reinforcement for cement concrete including cutting, bending laying in position, making joints and fastening including cost of binding wire (also includes removal of rust bars ) using tor bars(G.Sch:P-No:16 It/No:8(b).	Rs:5001.70	P.Cwt	Rs:5305.00



11.	241.0Rft	Construction of standard open type drains connuttee block of C.C 1:2:4 cost of situ to the design profile i.c cost of mould as per drawing i/c supplying floating cost of cement 1/32" thick to expose surface finished smooth curing complete as per drawing design..etc complete	Rs:94.00	P.Rft	Rs:22654.00
12.	439.0Cft	Cement plaster 1:4 up to 12' height 1/2" thick (G.Sch: P-No:51 It/No:11(b).	Rs:2283.93	%Sft	Rs:10018.00
				Total:-	Rs:1,28,029/-
<b>PART-B (PROVIDING AND FIXING OF PAVER BLOCK)</b>					
1.	2650.0Cft	Earth work excavation undressed lead upto a single throw of Kassi phawarah of shovel in ordinary soil ..etc	Rs:1361.25	%Ocft	Rs:3607.00
2.	2650.0Cft	Dressing and leveling of earth wok to designed section, in ordinary soil etc complete	Rs:187.55	%Ocft	Rs:497.00
3.	1325.0Cft	Supplying and filling pit sand under floor and plunging into wells...	Rs:1141.25	%Ocft	Rs:15122.
4.	875.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:98720.00
5.	2650.0Sft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quddra / cable shape with pigmented. b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:657650.00
				Total:-	Rs:7,75,596.00

Amount Total (a+b) Rs:9,03,625/-

10.65%  Above/  Below On The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

999862 Nine lac Ninety Nine Thousand Eight hundred  
Total (A) = a + b in words Sixty Two 000 rupees

*[Signature]*  
Contractor

*[Signature]*  
Executive Engineer / Procuring Agency

Summary of Bill of Quantities

Cost of Bid

Amount

999862 ~

1 (A) Cost based on composite Schedule of Rate

\_\_\_\_\_ ~

2 (B) Cost of based on Non / Offered Schedule of Rates.

\_\_\_\_\_ ~

TOTAL COST OF BID (C) = TOTAL (A) + Total (B)

999862

*D. Bellak*

Contractor

*[Signature]*  
Executive Engineer / Procuring Agency

NAME OF WORK: - CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN MEMON MOHALLA  
WARD NO-6 TOWN COMMITTEE CHUHAR JAMALI

BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
<b>PART – A (CONSTRUCTION OF DRAIN)</b>					
1.	138.0Cft	Dismantling and removing Road Metalling...etc	Rs:605.00	%Cft	Rs:835.00
2.	9.38Cft	Dismantling of Brick work in lime or cement mortar ..etc complete	Rs:1285.63	%Cft	Rs:121.00
3.	6.25 Cft	Dismantling of CC plain 1:2:4..etc complete	Rs:3327.50	%Cft	Rs:208.00
4.	10.50Cft	Dismantling of C.C Reinforced separating Reinforcement from concrete, cleaning and straitening the same ...etc complete	Rs:5445.00	%Cft	Rs:572.00
5.	603.50Cft	Excavation in foundation of building and bridges and others structure i/c dag bellig dressing and refilling ground structure with excavated earth watering and ramming lead up to 5'ft in ordinary soil.	Rs:3176.25	%Ocft	Rs:1914.00
6.	150.60Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:17004.00
7.	964.0Sft	Erection and removal of centering for RCC work ....etc complete	Rs:3127.41	%Sft	Rs:30148.00
8.	241.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:12595.00	%Cft	Rs:30354.00
9.	26.40Cft	RCC work in roof slab, beams coloums rafts, lintels and others structural member laid in situ or precast laid in position complete in all respects (b) ratio 1:2:4 90 lbs cement 2Cft sand 4cft shingle 1/8" to 1/2" gauge (G.Sch: P-No: It/No:	Rs:337.00	P.Cft	Rs:8897.0
10.	1.06Cwt	Fabrication of mild steel reinforcement for cement concrete including cutting, bending laying in position, making joints and fastening including cost of binding wire (also includes removal of rust bars ) using tor bars(G.Sch:P-No:16 It/No:8(b).	Rs:5001.70	P.Cwt	Rs:5305.00

11.	241.0Rft	Construction of standard open type drains connuttee block of C.C 1:2:4 cost of situ to the design profile i.c cost of mould as per drawing i/c supplying floating cost of cement 1/32" thick to expose surface finished smooth curing complete as per drawing design..etc complete	Rs:94.00	P.Rft	Rs:22654.00
12.	439.0Cft	Cement plaster 1:4 up to 12' height 1/2" thick (G.Sch: P-No:51 It/No:11(b).	Rs:2283.93	%Sft	Rs:10018.00
				Total:-	Rs:1,28,029/-
<b>PART-B (PROVIDING AND FIXING OF PAVER BLOCK)</b>					
1.	2650.0Cft	Earth work excavation undressed lead upto a single throw of Kassi phawarah of shovel in ordinary soil ..etc	Rs:1361.25	%Ocft	Rs:3607.00
2.	2650.0Cft	Dressing and leveling of earth wok to designed section, in ordinary soil etc complete	Rs:187.55	%Ocft	Rs:497.00
3.	1325.0Cft	Supplying and filling pit sand under floor and plunging into wells...	Rs:1141.25	%Ocft	Rs:15122.
4.	875.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:98720.00
5.	2650.0Sft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quddra / cable shape with pigmented b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:657650.00
				Total:-	Rs:7,75,596.00

Amount Total (a+b) Rs:9,03,625/-

*11*  
~~11~~ %Above/Below On The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

*1003024 Ten lac three thousand twenty four*  
Total (A) = a + b in words

*Signature*  
Contractor

*Signature*  
Executive Engineer / Procuring Agency



NAME OF WORK: - CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN MEMON MOHALLA  
WARD NO-6 TOWN COMMITTEE CHUHAR JAMALI

BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
<b>PART – A (CONSTRUCTION OF DRAIN)</b>					
1.	138.0Cft	Dismantling and removing Road Metalling...etc	Rs:605.00	%Cft	Rs:835.00
2.	9.38Cft	Dismantling of Brick work in lime or cement mortar ..etc complete	Rs:1285.63	%Cft	Rs:121.00
3.	6.25 Cft	Dismantling of CC plain 1:2:4..etc complete	Rs:3327.50	%Cft	Rs:208.00
4.	10.50Cft	Dismantling of C.C Reinforced separating Reinforcement from concrete, cleaning and straitening the same ...etc complete	Rs:5445.00	%Cft	Rs:572.00
5.	603.50Cft	Excavation in foundation of building and bridges and others structure i/c dag bellig dressing and refilling ground structure with excavated earth watering and ramming lead up to 5'ft in ordinary soil.	Rs:3176.25	%Cft	Rs:1914.00
6.	150.60Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 l/5(f)	Rs:11288.75	%Cft	Rs:17004.00
7.	964.05ft	Erection and removal of centering for RCC work ....etc complete	Rs:3127.41	%Sft	Rs:30148.00
8.	241.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 l/5(f)	Rs:12595.00	%Cft	Rs:30354.00
9.	26.40Cft	RCC work in roof slab, beams coloums rafts, lintels and others structural member laid in situ or precast laid in position complete in all respects (b) ratio 1:2:4 90 lbs cement 2Cft sand 4cft shingle 1/8" to 1/4" gauge (G.Sch: P-No: It/No:	Rs:337.00	P.Cft	Rs:8897.0
10.	1.06Cwt	Fabrication of mild steel reinforcement for cement concrete including cutting, bending laying in position, making joints and fastening including cost of binding wire (also includes removal of rust bars ) using tor bars(G.Sch:P-No:16 It/No:8(b).	Rs:5001.70	P.Cwt	Rs:5305.00

11.	241.0Rft	Construction of standard open type drains connuttee block of C.C 1:2:4 cost of situ to the design profile i.c cost of mould as per drawing i/c supplying floating cost of cement 1/32" thick to expose surface finished smooth curing complete as per drawing design..etc complete	Rs:94.00	P.Rft	Rs:22654.00
12.	439.0Cft	Cement plaster 1:4 up to 12' height ½" thick (G.Sch: P-No:51 It/No:11(b).	Rs:2283.93	%Sft	Rs:10018.00
				Total:-	Rs:1,28,029/-
<b>PART-B (PROVIDING AND FIXING OF PAVER BLOCK)</b>					
1.	2650.0Cft	Earth work excavation undressed lead upto a single throw of Kassi phawarah of shovel in ordinary soil ..etc	Rs:1361.25	%Ocft	Rs:3607.00
2.	2650.0Cft	Dressing and leveling of earth wok to designed section, in ordinary soil etc complete	Rs:187.55	%Ocft	Rs:497.00
3.	1325.0Cft	Supplying and filling pit sand under floor and plunging into wells...	Rs:1141.25	%Ocft	Rs:15122.
4.	875.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:98720.00
5.	2650.0Sft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quddra / cable shape with pigmented b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:657650.00
				Total:-	Rs:7,75,596.00

Amount Total (a+b) **Rs:9,03,625/-**

12% %Above/Below On The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

Total (A) = a + b in words  
1012061

Ten Lac Twelve thousand Sixtyone

  
Contractor

  
Executive Engineer / Procuring Agency

# Summary of Bill of Quantities

Cost of Bid

Amount 1012061

1 (A) Cost based on composite Schedule of Rate

—

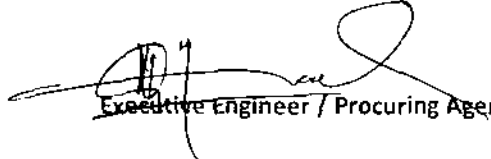
2 (B) Cost of based on Non / Offered Schedule of Rates.

—

TOTAL COST OF BID (C) = TOTAL (A) + Total (B)

1012061

*Alskew*  
Contractor

  
Executive Engineer / Procuring Agency



**SINDH PUBLIC PROCUREMENT REGULATORY AUTHORITY**  
**CONTRACT EVALUATION FORM**

**TO BE FILLED IN BY ALL PROCURING AGENCIES FOR PUBLIC**  
**CONTRACTORS OF WORKS, SERVICES & GOODS.**

- 1). NAME OF THE ORGANIZATION / DEPTT. Town Committee, Chuhar Jamali, Sujawal
- 2). PROVINCIAL / LOCAL GOVT. / OTHER LOCAL GOVERNMENT
- 3). TITLE OF CONTRACT: "CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN KUNBHAR MOHALLA WARD NO-6 TOWN COMMITTEE CHUHAR JAMALI"
- 4) TENDER NUMBER: as above
- 5). BRIEF DESCRIPTION OF CONTRACT: CC Paver Block & CC Drain
- 6). FORUM THAT APPROVED THE SCHEME Town Committee, Chuhar Jamali
- 7). TENDER ESTIMATED VALUE Rs. 10,00,000/=
- 8). ENGINEER'S ESTIMATE PC -Cost Rs: /000000/-  
(FOR CIVIL WORK ONLY)
- 9). ESTIMATED COMPLETION PERIOD (AS PER CONTRACT) (0 1) MONTH
- 10). TENDER OPENED ON DATE AND TIME 02-11-2017 AT 02:00 PM.
- 11). NUMBER OF TENDER DOCUMENTS SOLD (Attach list of buyers). 03
- 12). NUMBER OF BIDS RECEIVED 03
- 13). NUMBERS OF BIDDERS PRESENT AT THE TIME OF OPEINING OF BIDS 03
- 14). BID EVALUATION REPORT (Enclose a copy) YES
- 15). NAME AND ADDRESS OF THE SUCCESSFUL BIDDER. M/S Abdul Sattar Kehar
- 16). CONTRACT AWARD PRICE SANCTION RUPEES Rs: 999262/-
- 17). RANKING OF SUCCESSFUL BIDDER IN EVALUATION REPORT (I.E. 1ST 2ND 3RD EVALUATION BID). 1<sup>st</sup> Lowest M/S Abdul Sattar Kehar  
2<sup>nd</sup> LOWEST M/S Liaqat Ali & Company  
3<sup>rd</sup> LOWEST M/S Mumtaz Hussain Soomro
- 18). METHOD OF PROCUREMENT USED: - (TICK ONE)
- A). SINGLE STAGE-ONE ENVELOPE PROCEDURE \_\_\_\_\_ ✓ \_\_\_\_\_
- B). SINGLE STAGE-TWO ENVELOPE PROCEDURE \_\_\_\_\_
- C). TWO STAGE BIDDING PROCEDURE \_\_\_\_\_

D). TWO STAGE-TWO ENVELOPE BIDDING PROCEDURE \_\_\_\_\_

PLEASE SPECIFY IF ANY OTHER METHOD OF PROCUREMENT WAS ADOPTED i.e. EMERGENCY, DIRECT CONTRACTING ETC. WITH BRIEF REASONS.

19). PROVIDING AUTHORITY FOR AWARD OF CONTRACT CHAIRMAN TC. CHUHAR JAMALI

20). WHETHER THE PROCUREMENT WAS INCLUDED IN ANNUAL PROCUREMENT PLAN

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

21). ADVERTISEMENT:

i) SPPRA Website  
(if yes give date & SPPRA Identification No.

YES	<a href="http://www.pprasindhgov.pk">www.pprasindhgov.pk</a> SPPRA Tender SR No. 34792 Dt: 02-11-2017
-----	--

ii) Newspapers  
(if yes give names of newspapers & dates)

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

22). NATURE OF CONTRACT

DOMESTIC/ LOCAL	<input checked="" type="checkbox"/>	LOCAL	INT	
-----------------	-------------------------------------	-------	-----	--

23). WHETHER QUALIFICATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?

(If yes, enclose copy).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

24). WHETHER BID EVALUATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?

(if, yes enclose a copy).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

25). WHETHER APPROVAL OF COMPETENT AUTHORITY WAS OBTAINED FOR USING A METHOD OTHER THAN OPEN COMPETITIVE BIDDING?

YES		NO	N/A
-----	--	----	-----

26). WAS BID SECURITY OBTAINED FROM ALL THE BIDDERS?

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

27). WHETHER THE SUCCESSFUL BID WAS LOWEST EVALUATED BID / BEST EVALUATED BID (In case of Consultancies).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

28). WHETHER THE SUCCESSFUL BIDDER WAS TECHNICALLY COMPLAINT?

YES		NO	N/A
-----	--	----	-----

29). WHETHER NAMES OF THE BIDDERS AND THEIR QUOTED PRICES WERE READ OUT AT THE TIME OF OPENING OF BIDS?

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

30). WHETHER EVALUATION REPORT GIVEN TO BIDDERS BEFORE THE AWARD OF CONTRACT?

(Attach a copy of the bid evaluation report).

31). ANY COMPLAINTS RECEIVED  
(if yes, result thereof).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

YES		NO	N/A
-----	--	----	-----

32). ANY DEVIATION FROM SPECIFICATIONS GIVEN IN THE TENDER  
NOTICE / DOCUMENTS ( if yes, given details).

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

33). WAS THE EXTENSION MADE IN RESPONSE TIME?  
(if yes, given reasons)

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

34). DEVIATION FROM QUALIFICATION CRITERIA  
(if yes, detailed reasons).

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

35). WAS IT ASSURED BY THE PROCURING AGENCY THAT THE SELECTED  
FIRM IS NOT BLACK LISTED?

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

36). WAS A VISIT MADE BY ANY OFFICER / OFFICIAL OF THE PROCURING  
AGENCY TO THE SUPPLIER'S PREMISES IN CONNECTION WITH THE PROCUREMENT?  
IF SO, DETAILS TO BE ASCERTAINED REGARDING FINANCING OF VISIT, IF ABROAD:  
(if yes, enclose a copy)

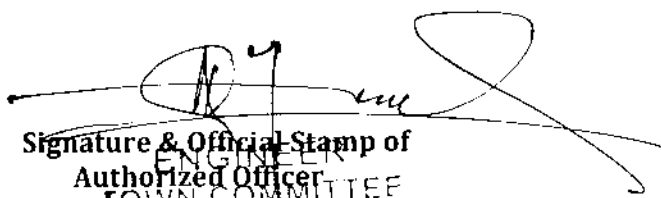
YES		NO	N/A
-----	--	----	-----

37). WERE PROPER SAFEGUARDS PROVIDED ON MOBILIZATION ADVANCE PAYMENT IN THE  
CONTRACT ( BANK GUARANTEE ETC)?

YES		NO	N/A
-----	--	----	-----

38). SPECIAL CONDITION, IF ANY  
(if yes, give Brief Description)

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

  
Signature & Official Stamp of  
ENGINEER  
Authorized Officer  
TOWN COMMITTEE  
CHUHAR JAMALI

FOR OFFICE USE ONLY

**SPPRA, Block No. 8, Sindh Secretariat No. 4-A, Court Road, Karachi**

**Tel: 021-9205356, 021-9205369 & Fax No. 021-9206291.**

# OFFICE OF THE TOWN COMMITTEE

## CHUHAR JAMALI

NO.T.C.C.J./T.O/ 39

/ 2017

Dated: 15/12/2017

M/s. ABDUL SATTAR KEHAR,  
GOVERNMENT CONTRACTOR

### LETTER OF ACCEPTANCE / SANCTION ORDER

**Subject: CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN KUNBHAR MOHALLA  
WARD NO-6 TOWN COMMITTEE CHUHAR JAMALI**

On behalf of the employer it is notified that following the approval of accepted of Chairman, Town Committee, Chuhar Jamali, vide Para 08/No, your bid for the subject is hereby accepted for the sum of Rs:9,99,862/- (Rupees. NINE LAC NINETY NINE THOUSAND EIGHT HUNDRED SIXTY TWO ONLY) as approved by the competent authority Town Committee, Chuhar Jamali.

There is now binding contract between Town Committee, Chuhar Jamali and M/s. **Abdul Sattar Kehar,**

In accordance with the general condition of contract, you are required to enter in to and execute a contract agreement this agreement shall be signed by employer and M/s. **Abdul Sattar Kehar.**

In accordance with condition of contract as per SPPRA-2010 the 2% Bid security Rs:20,000/- and remaining 8% Security may deduct from bill.

All correspondence on onward shall be carried out through Town Officer, Town Committee, Chuhar Jamali.

  
TOWN OFFICER  
TOWN COMMITTEE, CHUHAR JAMALI

Copy to:-

- 1- Chairman, Town Committee, Chuhar Jamali.
- 2- Assistant Executive Engineer, (Town Committee, Chuhar Jamali)
- 3- Office Copy.

# TOWN COMMITTEE CHUHAR JAMALI

## AGREEMENT

Subject: CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN KUNBHAR MOHALLA WARD NO-6 TOWN COMMITTEE CHUHAR JAMALI

Cost Rs.9,99,862/-

Completion Time (03 Months) penalty \_\_\_\_\_

The Agreement is made on this 20th Dec day of 2017 at Thatta, between the Town Committee, Chuhar Jamali herein after called the Chuhar Jamali, Sujawal (Which expression shall mean and include his successors) on the one part and M/s. ABDUL SATTAR KEHAR, have the office at Chairman TC Chuhar Jamali through their proprietor \_\_\_\_\_ hereinafter call the "Contractor" (Which expression shall mean and include his successors, administrator and assignees) on the other part.

Whereas the Town Committee, Chuhar Jamali, has accepted the tender of the contractor for construction and completion of the work namely CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN KUNBHAR MOHALLA WARD NO-6 TOWN COMMITTEE CHUHAR JAMALI at a cost of Rs.9,99,862/- within a period of (03 Month) and penalty Rs. \_\_\_\_\_ according to the specification and general conditions of the contract signed by the Contractor after having made himself full acquainted with their meaning.

And whereas the Contractor has already furnished with the Town Committee, Chuhar Jamali the 2% bid amount of Rs.20,000/- (Rupees Twenty Thousand Only) on account of Performance security for the said contract.

The following documents after incorporating addenda, except those parts relating to \_\_\_\_\_ bidders shall be deemed to form and be read and construed as part of this Agreement, viz:

- a) The Contract Agreement;
- b) The Letter of Acceptance;
- c) The Completed form of Bid;
- d) The Standard and special Terms & Conditions of Contract - Part;
- e) The priced Bill of Quantities



In consideration of the payments to be made by the Town Committee, Chuhar Jamali to the Contractor as hereinafter mentioned, the contractor hereby covenants with the Town Committee, Chuhar Jamali to execute and complete the works and remedy defects therein In conformity and in all respects with the provisions of the contract.

The Town Committee, Chuhar Jamali hereby covenants to pay the contractor, in consideration of the execution and completion of the works as per provisions of contract, the contract Price or such other sum as may become payable under the provisions of the contract at the time and in the manner prescribed by the contractor.

The contractor has given a lien to the Town Committee, Chuhar Jamali over the Security for due fulfillment of the contract and do hereby bind himself, his heirs, successors legal representative and assignee to pay to the Town Committee, Chuhar Jamali penalty through forfeiture of the said Security in case of breach of any condition of the Contract without prejudice to the right of Town Committee, Chuhar Jamali to recover the damages from the Contractor for any such breach as per condition of the contract.

Now therefore this agreement witnesses that the Town Committee, Chuhar Jamali and the Contractor shall respectively and shall well truly carry out and fulfill the contract and abide by all terms and conditions and specifications thereof.

In witness whereof the said parties have set their respective hands on this 20th of Dec 2017

Witness:

1. Jir -  
41407-2335478-7

2. Chairman  
41407-6120584-3

Abdul Sattar Kehar  
Contractor  
Gen. Contractor

Chairman  
TOWN COMMITTEE, CHUHAR JAMALI

41407-5408062-5

NAME OF WORK: -

**CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN KUNBHAR MOHALLA  
WARD NO-6 TOWN COMMITTEE CHUHAR JAMALI**

**BILL OF QUANTITIES**

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
<b>PART – A (CONSTRUCTION OF DRAIN)</b>					
1.	138.0Cft	Dismantling and removing Road Metalling...etc	Rs:605.00	%Cft	Rs:835.00
2.	9.38Cft	Dismantling of Brick work in lime or cement mortar ..etc complete	Rs:1285.63	%Cft	Rs:121.00
3.	6.25 Cft	Dismantling of CC plain 1:2:4..etc complete	Rs:3327.50	%Cft	Rs:208.00
4.	10.50Cft	Dismantling of C.C Reinforced separating Reinforcement from concrete, cleaning and straitening the same ...etc complete	Rs:5445.00	%Cft	Rs:572.00
5.	603.50Cft	Excavation in foundation of building and bridges and others structure i/c dag bellig dressing and refilling ground structure with excavated earth watering and ramming lead up to 5'ft in ordinary soil.	Rs:3176.25	%Ocft	Rs:1914.00
6.	150.60Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 1/5(f)	Rs:11288.75	%Cft	Rs:17004.00
7.	964.0Sft	Erection and removal of centering for RCC work ....etc complete	Rs:3127.41	%Sft	Rs:30148.00
8.	241.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 1/5(f)	Rs:12595.00	%Cft	Rs:30354.00
9.	26.40Cft	RCC work in roof slab, beams coloums rafts, lintels and others structural member laid in situ or precast laid in position complete in all respects (b) ratio 1:2:4 90 lbs cement 2Cft sand 4cft shingle 1/8" to 1/4" gauge (G.Sch: P-No: 1t/No:	Rs:337.00	P.Cft	Rs:8897.0
10.	1.06Cwt	Fabrication of mild steel reinforcement for cement concrete including cutting, bending laying in position, making joints and fastening including cost of binding wire (also includes removal of rust bars ) using tor bars(G.Sch:P-No:16 lt/No:8(b).	Rs:5001.70	P.Cwt	Rs:5305.00

11.	241.0Rft	Construction of standard open type drains connuttee block of C.C 1:2:4 cost of situ to the design profile i.c cost of mould as per drawing i/c supplying floating cost of cement 1/32" thick to expose surface finished smooth curing complete as per drawing design..etc complete	Rs:94.00	P.Rft	Rs:22654.00
12.	439.0Cft	Cement plaster 1:4 up to 12' height 1/2" thick (G.Sch: P-No:51 It/No:11(b).	Rs:2283.93	%Sft	Rs:10018.00
				Total:-	Rs:1,28,029/-
<b>PART-B (PROVIDING AND FIXING OF PAVER BLOCK)</b>					
1.	2650.0Cft	Earth work excavation undressed lead upto a single throw of Kassi phawarah of shovel in ordinary soil ..etc	Rs:1361.25	%Ocft	Rs:3607.00
2.	2650.0Cft	Dressing and leveling of earth wok to designed section, in ordinary soil etc complete	Rs:187.55	%Ocft	Rs:497.00
3.	1325.0Cft	Supplying and filling pit sand under floor and plunging into wells...	Rs:1141.25	%Ocft	Rs:15122.
4.	875.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:98720.00
5.	2650.0Sft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quddra / cable shape with pigmented b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:657650.00
				Total:-	Rs:7,75,596.00

Amount Total (a+b) **Rs:9,03,625/-**

*10.65/100*  
%Above/Below On The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

999 062 -  
Total (A) = a + b in words

*Nine Lacs Ninety Nine Thousands and Eight Hundred Sixty Two*

*Contractor*

*Executive Engineer / Procuring Agency*

Summary of Bill of Quantities

Cost of Bid

Amount 999862

1 (A) Cost based on composite Schedule of Rate

          
\_\_\_\_\_

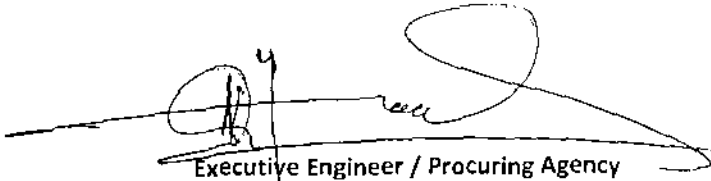
2 (B) Cost of based on Non / Offered Schedule of Rates.

          
\_\_\_\_\_

TOTAL COST OF BID (C) = TOTAL (A) + Total (B)

999862

*D. Belter*  
Contractor

  
Executive Engineer / Procuring Agency



NAME OF WORK: - CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN KUNBHAR MOHALLA  
WARD NO-6 TOWN COMMITTEE CHUHAR JAMALI

BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
<b>PART – A (CONSTRUCTION OF DRAIN)</b>					
1.	138.0Cft	Dismantling and removing Road Metalling...etc	Rs:605.00	%Cft	Rs:835.00
2.	9.38Cft	Dismantling of Brick work in lime or cement mortar ..etc complete	Rs:1285.63	%Cft	Rs:121.00
3.	6.25 Cft	Dismantling of CC plain 1:2:4..etc complete	Rs:3327.50	%Cft	Rs:208.00
4.	10.50Cft	Dismantling of C.C Reinforced separating Reinforcement from concrete, cleaning and straitening the same ...etc complete	Rs:5445.00	%Cft	Rs:572.00
5.	603.50Cft	Excavation in foundation of building and bridges and others structure i/c dag bellig dressing and refilling ground structure with excavated earth watering and ramming lead up to 5'ft in ordinary soil.	Rs:3176.25	%Ocft	Rs:1914.00
6.	150.60Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:17004.00
7.	964.05ft	Erection and removal of centering for RCC work ....etc complete	Rs:3127.41	%Sft	Rs:30148.00
8.	241.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:12595.00	%Cft	Rs:30354.00
9.	26.40Cft	RCC work in roof slab, beams coloums rafts, lintels and others structural member laid in situ or precast laid in position complete in all respects (b) ratio 1:2:4 90 lbs cement 2Cft sand 4cft shingle 1/8" to 3/4" gauge (G.Sch: P-No: It/No:	Rs:337.00	P.Cft	Rs:8897.0
10.	1.06Cwt	Fabrication of mild steel reinforcement for cement concrete including cutting, bending laying in position, making joints and fastening including cost of binding wire (also includes removal of rust bars ) using tor bars(G.Sch:P-No:16 It/No:8(b).	Rs:5001.70	P.Cwt	Rs:5305.00

11.	241.0Rft	Construction of standard open type drains connuttee block of C.C 1:2:4 cost of situ to the design profile i.c cost of mould as per drawing i/c supplying floating cost of cement 1/32" thick to expose surface finished smooth curing complete as per drawing design..etc complete	Rs:94.00	P.Rft	Rs:22654.00
12.	439.0Cft	Cement plaster 1:4 up to 12' height ½" thick (G.Sch: P-No:51 It/No:11(b).	Rs:2283.93	%Sft	Rs:10018.00
				Total:-	Rs:1,28,029/-
<b>PART-B (PROVIDING AND FIXING OF PAVER BLOCK)</b>					
1.	2650.0Cft	Earth work excavation undressed lead upto a single throw of Kassi phawarah of shovel in ordinary soil ..etc	Rs:1361.25	%Ocft	Rs:3607.00
2.	2650.0Cft	Dressing and leveling of earth wok to designed section, in ordinary soil etc complete	Rs:187.55	%Ocft	Rs:497.00
3.	1325.0Cft	Supplying and filling pit sand under floor and plunging into wells...	Rs:1141.25	%Ocft	Rs:15122.
4.	875.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 l/5(f)	Rs:11288.75	%Cft	Rs:98720.00
5.	2650.0Sft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quddra / cable shape with pigmented b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:657650.00
				Total:-	Rs:7,75,596.00

Amount Total (a+b) Rs:9,03,625/-

11/ ✓  
%Above/Below On The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

1003024

Total (A) = a + b in words

Ten lac Three Thousand Twenty four

Contractor  
Surya Prakash

Executive Engineer / Procuring Agency

## Summary of Bill of Quantities

Cost of Bid

Amount 1003024/-

1 (A) Cost based on composite Schedule of Rate

\_\_\_\_\_

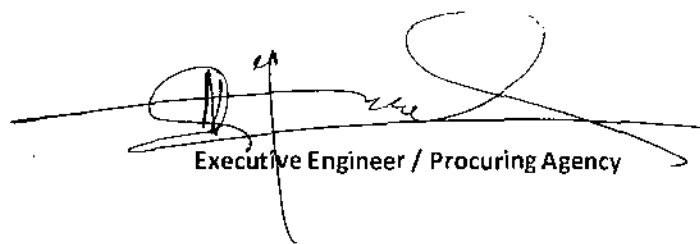
2 (B) Cost of based on Non / Offered Schedule of Rates.

\_\_\_\_\_

TOTAL COST OF BID (C) = TOTAL (A) + Total (B)

1003024/-

  
Contractor

  
Executive Engineer / Procuring Agency

NAME OF WORK: - CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN KUNBHAR MOHALLA  
WARD NO-6 TOWN COMMITTEE CHUHAR JAMALI

BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
<b>PART - A (CONSTRUCTION OF DRAIN)</b>					
1.	138.0Cft	Dismantling and removing Road Metalling...etc	Rs:605.00	%Cft	Rs:835.00
2.	9.38Cft	Dismantling of Brick work in lime or cement mortar ..etc complete	Rs:1285.63	%Cft	Rs:121.00
3.	6.25 Cft	Dismantling of CC plain 1:2:4..etc complete	Rs:3327.50	%Cft	Rs:208.00
4.	10.50Cft	Dismantling of C.C Reinforced separating Reinforcement from concrete, cleaning and straitening the same ...etc complete	Rs:5445.00	%Cft	Rs:572.00
5.	603.50Cft	Excavation in foundation of building and bridges and others structure i/c dag bellig dressing and refilling ground structure with excavated earth watering and ramming lead up to 5'ft in ordinary soil.	Rs:3176.25	%Ocft	Rs:1914.00
6.	150.60Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:17004.00
7.	964.0Sft	Erection and removal of centering for RCC work ....etc complete	Rs:3127.41	%Sft	Rs:30148.00
8.	241.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:12595.00	%Cft	Rs:30354.00
9.	26.40Cft	RCC work in roof slab, beams coloums rafts, lintels and others structural member laid in situ or precast laid in position complete in all respects (b) ratio 1:2:4 90 lbs cement 2Cft sand 4cft shingle 1/8" to 1/4" gauge (G.Sch: P-No: It/No:	Rs:337.00	P.Cft	Rs:8897.0
10.	1.06Cwt	Fabrication of mild steel reinforcement for cement concrete including cutting, bending laying in position, making joints and fastening including cost of binding wire (also includes removal of rust bars ) using tor bars(G.Sch:P-No:16 It/No:8(b).	Rs:5001.70	P.Cwt	Rs:5305.00

11.	241.0Rft	Construction of standard open type drains connuttee block of C.C 1:2:4 cost of situ to the design profile i.c cost of mould as per drawing i/c supplying floating cost of cement 1/32" thick to expose surface finished smooth curing complete as per drawing design..etc complete	Rs:94.00	P.Rft	Rs:22654.00
12.	439.0Cft	Cement plaster 1:4 up to 12' height 1/2" thick (G.Sch: P-No:51 lt/No:11(b).	Rs:2283.93	%Sft	Rs:10018.00
				Total:-	Rs:1,28,029/-
<b>PART-B (PROVIDING AND FIXING OF PAVER BLOCK)</b>					
1.	2650.0Cft	Earth work excavation undressed lead upto a single throw of Kassi phawarah of shovel in ordinary soil ..etc	Rs:1361.25	%Ocft	Rs:3607.00
2.	2650.0Cft	Dressing and leveling of earth wok to designed section, in ordinary soil etc complete	Rs:187.55	%Ocft	Rs:497.00
3.	1325.0Cft	Supplying and filling pit sand under floor and plunging into wells...	Rs:1141.25	%Ocft	Rs:15122.
4.	875.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:98720.00
5.	2650.0Sft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quddra / cable shape with pigmented b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:657650.00
				Total:-	Rs:7,75,596.00

Amount Total (a+b) Rs:9,03,625/-

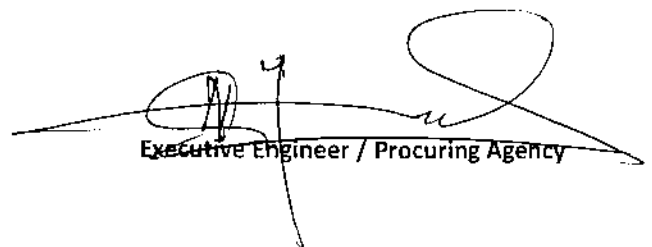
12) %Above/Below On The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

10/2061 Ten lac twelve thousand six hundred

Total (A) = a + b in words

  
Contractor

  
Executive Engineer / Procuring Agency

# Summary of Bill of Quantities

Cost of Bid

Amount 1012061

1 (A) Cost based on composite Schedule of Rate

—  
\_\_\_\_\_

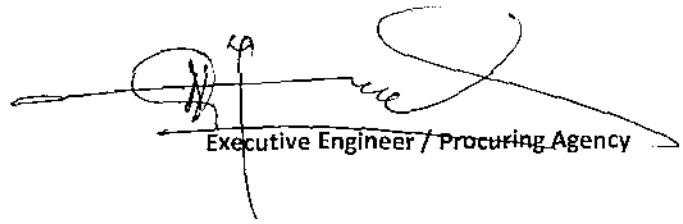
2 (B) Cost of based on Non / Offered Schedule of Rates.

—  
\_\_\_\_\_

TOTAL COST OF BID (C) = TOTAL (A) + Total (B)

1012061 —

  
Contractor

  
Executive Engineer / Procuring Agency

**SINDH PUBLIC PROCUREMENT REGULATORY AUTHORITY**  
**CONTRACT EVALUATION FORM**

**TO BE FILLED IN BY ALL PROCURING AGENCIES FOR PUBLIC**  
**CONTRACTORS OF WORKS, SERVICES & GOODS.**

- 1). NAME OF THE ORGANIZATION / DEPTT. Town Committee, Chuhar Jamali, Sujawal
- 2). PROVINCIAL / LOCAL GOVT. / OTHER LOCAL GOVERNMENT
- 3). TITLE OF CONTRACT: "CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN MEMON MOHALLA WARD NO-7 PHASE-1 TOWN COMMITTEE CHUHAR JAMALI"
- 4) TENDER NUMBER: as above
- 5). BRIEF DESCRIPTION OF CONTRACT: CC Paver Block & CC Drain
- 6). FORUM THAT APPROVED THE SCHEME Town Committee, Chuhar Jamali
- 7). TENDER ESTIMATED VALUE Rs. 10,00,000/=
- 8). ENGINEER'S ESTIMATE PC -Cost Rs: 10,00,000/-  
(FOR CIVIL WORK ONLY)
- 9). ESTIMATED COMPLETION PERIOD (AS PER CONTRACT) (0 1) MONTH
- 10). TENDER OPENED ON DATE AND TIME 02-11-2017 AT 02:00 PM.
- 11). NUMBER OF TENDER DOCUMENTS SOLD 03  
(Attach list of buyers).
- 12). NUMBER OF BIDS RECEIVED 03
- 13). NUMBERS OF BIDDERS PRESENT AT THE TIME OF OPEINING OF BIDS 03
- 14). BID EVALUATION REPORT YES  
(Enclose a copy)
- 15). NAME AND ADDRESS OF THE SUCCESSFUL BIDDER. M/S Abdul Hakeem Chandio
- 16). CONTRACT AWARD PRICE SANCTION RUPEES Rs: 999862/-
- 17). RANKING OF SUCCESSFUL BIDDER IN EVALUATION REPORT (I.E. 1ST 2ND 3RD EVALUATION BID). 1<sup>st</sup> Lowest M/S Abdul Hakeem Chandio  
2<sup>nd</sup> LOWEST M/S Abdul Sattar Kehar  
3<sup>rd</sup> LOWEST M/S Mumtaz Hussain Soomro
- 18). METHOD OF PROCUREMENT USED: - (TICK ONE)
- A). SINGLE STAGE-ONE ENVELOPE PROCEDURE \_\_\_\_\_✓\_\_\_\_\_
- B). SINGLE STAGE-TWO ENVELOPE PROCEDURE \_\_\_\_\_
- C). TWO STAGE BIDDING PROCEDURE \_\_\_\_\_

D). TWO STAGE-TWO ENVELOPE BIDDING PROCEDURE \_\_\_\_\_

PLEASE SPECIFY IF ANY OTHER METHOD OF PROCUREMENT WAS ADOPTED i.e. EMERGENCY, DIRECT CONTRACTING ETC. WITH BRIEF REASONS.

19). PROVIDING AUTHORITY FOR AWARD OF CONTRACT CHAIRMAN TC, CHUHAR JAMALI

20). WHETHER THE PROCUREMENT WAS INCLUDED IN ANNUAL PROCUREMENT PLAN

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

21). ADVERTISEMENT:

i) SPPRA Website  
(if yes give date & SPPRA Identification No.

YES	<a href="http://www.pprasindhgov.pk">www.pprasindhgov.pk</a> SPPRA Tender SR No. 34792 Dt: 02-11-2017
-----	--

ii) Newspapers  
(if yes give names of newspapers & dates)

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

22). NATURE OF CONTRACT

DOMESTIC/ LOCAL	<input checked="" type="checkbox"/>	LOCAL	INT
-----------------	-------------------------------------	-------	-----

23). WHETHER QUALIFICATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?

(If yes, enclose copy).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

24). WHETHER BID EVALUATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?

(if, yes enclose a copy).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

25). WHETHER APPROVAL OF COMPETENT AUTHORITY WAS OBTAINED FOR USING A METHOD OTHER THAN OPEN COMPETITIVE BIDDING?

YES		NO	N/A
-----	--	----	-----

26). WAS BID SECURITY OBTAINED FROM ALL THE BIDDERS?

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

27). WHETHER THE SUCCESSFUL BID WAS LOWEST EVALUATED BID / BEST EVALUATED BID (In case of Consultancies).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

28). WHETHER THE SUCCESSFUL BIDDER WAS TECHNICALLY COMPLAINT?

YES		NO	N/A
-----	--	----	-----

29). WHETHER NAMES OF THE BIDDERS AND THEIR QUOTED PRICES WERE READ OUT AT THE TIME OF OPENING OF BIDS?

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

30). WHETHER EVALUATION REPORT GIVEN TO BIDDERS BEFORE THE AWARD OF CONTRACT?

(Attach a copy of the bid evaluation report).



31). ANY COMPLAINTS RECEIVED  
(if yes, result thereof).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

32). ANY DEVIATION FROM SPECIFICATIONS GIVEN IN THE TENDER  
NOTICE / DOCUMENTS ( if yes, given details).

YES		NO	N/A
-----	--	----	-----

33). WAS THE EXTENSION MADE IN RESPONSE TIME?  
(if yes, given reasons)

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

34). DEVIATION FROM QUALIFICATION CRITERIA  
(if yes, detailed reasons).

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

34). DEVIATION FROM QUALIFICATION CRITERIA  
(if yes, detailed reasons).

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

35). WAS IT ASSURED BY THE PROCURING AGENCY THAT THE SELECTED  
FIRM IS NOT BLACK LISTED?

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

36). WAS A VISIT MADE BY ANY OFFICER / OFFICIAL OF THE PROCURING  
AGENCY TO THE SUPPLIER'S PREMISES IN CONNECTION WITH THE PROCUREMENT?  
IF SO, DETAILS TO BE ASCERTAINED REGARDING FINANCING OF VISIT, IF ABROAD:  
(if yes, enclose a copy)

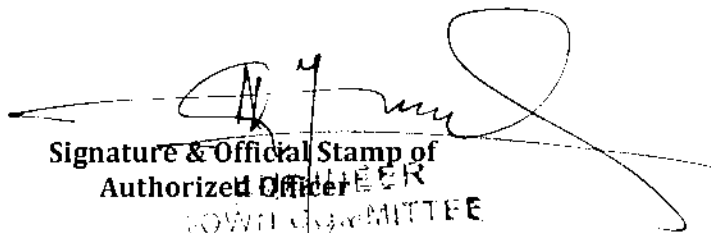
YES		NO	N/A
-----	--	----	-----

37). WERE PROPER SAFEGUARDS PROVIDED ON MOBILIZATION ADVANCE PAYMENT IN THE  
CONTRACT ( BANK GUARANTEE ETC)?

YES		NO	N/A
-----	--	----	-----

38). SPECIAL CONDITION, IF ANY  
(if yes, give Brief Description)

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

  
Signature & Official Stamp of  
Authorized Officer  
POWER COMMITTEE  
CHUNAR KANALI

FOR OFFICE USE ONLY

**SPPRA, Block No. 8, Sindh Secretariat No. 4-A, Court Road, Karachi**

**Tel: 021-9205356, 021-9205369 & Fax No. 021-9206291.**

# OFFICE OF THE TOWN COMMITTEE

## CHUHAR JAMALI

NO.T.C.C.J./T.O/

40

/2017

Dated:

15/10/2017

M/s. ABDUL HAKEEM CHANDIO,  
GOVERNMENT CONTRACTOR

### LETTER OF ACCEPTANCE / SANCTION ORDER

**Subject: CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN MEMON MOHALLA WARD  
NO-7 PHASE-1 TOWN COMMITTEE CHUHAR JAMALI**


On behalf of the employer it is notified that following the approval of accepted of Chairman, Town Committee, Chuhar Jamali, vide Para 10 s/No, your bid for the subject is hereby accepted for the sum of Rs:9,99,862/- **(Rupees. NINE LAC NINETY NINE THOUSAND EIGHT HUNDRED SIXTY TWO ONLY)** as approved by the competent authority Town Committee, Chuhar Jamali.

There is now binding contract between Town Committee, Chuhar Jamali and M/s. **Abdul Hakeem Chandio**,

In accordance with the general condition of contract, you are required to enter in to and execute a contract agreement this agreement shall be signed by employer and M/s. **Abdul Hakeem Chandio**.

In accordance with condition of contract as per SPPRA-2010 the 2% Bid security Rs:20,000/- and remaining 8% Security may deduct from bill.

All correspondence on onward shall be carried out though Town Officer, Town Committee, Chuhar Jamali.



**TOWN OFFICER  
TOWN COMMITTEE, CHUHAR JAMALI**

Copy to:-

- 1- Chairman, Town Committee, Chuhar Jamali.
- 2- Assistant Executive Engineer, (Town Committee, Chuhar Jamali)
- 3- Office Copy.

# TOWN COMMITTEE CHUHAR JAMALI

## AGREEMENT

Subject: - CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN MEMON MOHALLA WARD NO-7 PHASE-1 TOWN COMMITTEE CHUHAR JAMALI

Cost Rs.9,99,862/-

Completion Time (03 Months) penalty \_\_\_\_\_

The Agreement is made on this 20th Dec day of 2017 at Thatta, between the Town Committee, Chuhar Jamali herein after called the Chuhar Jamali, Sujawal (Which expression shall mean and include his successors) on the one part and M/s. ABDUL HAKEEM CHANDIO, having the office at Chuhar Jamali T.C. Office through their proprietor \_\_\_\_\_ hereinafter call the "Contractor" (Which expression shall mean and include his successors, administrators and assignees) on the other part.

Whereas the Town Committee, Chuhar Jamali, has accepted the tender of the contractor for construction and completion of the work namely CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN MEMON MOHALLA WARD NO-7 PHASE-1 TOWN COMMITTEE CHUHAR JAMALI, at a cost of Rs.9,99,862/- within a period of (03 Month) and penalty Rs. \_\_\_\_\_ according to the specification and general conditions of the contract signed by the Contractor having made himself full acquainted with their meaning.

And whereas the Contractor has already furnished with the Town Committee, Chuhar Jamali the 2% bid amount of Rs.20,000/- (Rupees Twenty Thousand Only) on account of Bid Performance security for the said contract.

The following documents after incorporating addenda, except those parts relating to instructions to bidders shall be deemed to form and be read and construed as part of this Agreement, viz:

- a) The Contract Agreement;
- b) The Letter of Acceptance;
- c) The Completed form of Bid;
- d) The Standard and special Terms & Conditions of Contract – Part;
- e) The priced Bill of Quantities

In consideration of the payments to be made by the Town Committee, Chuhar Jamali to the Contractor as hereinafter mentioned, the contractor hereby covenants with the Town Committee, Chuhar Jamali to execute and complete the works and remedy defects therein in conformity and in all respects with the provisions of the contract.

The Town Committee, Chuhar Jamali hereby covenants to pay the contractor, in consideration of the execution and completion of the works as per provisions of contract, the Price or such other sum as may become payable under the provisions of the contract at the time and in the manner prescribed by the contractor.

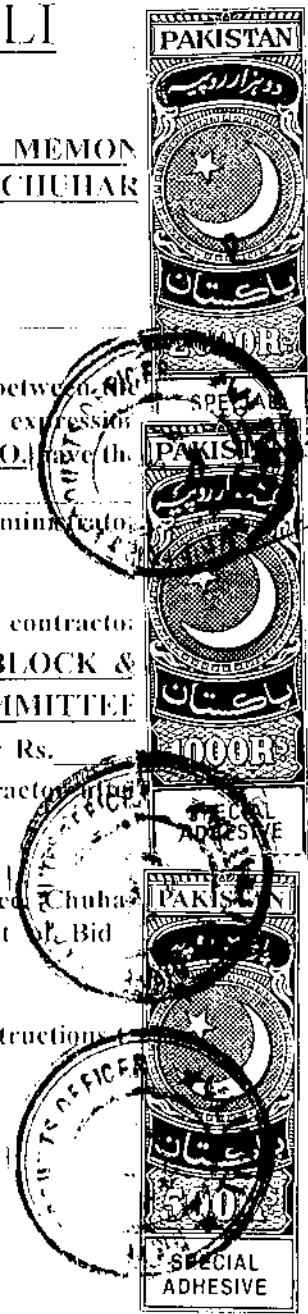
The contractor has given a lien to the Town Committee, Chuhar Jamali over the Security for due fulfillment of the contract and do hereby bind himself, his heirs, successors legal representative and assignee to pay to the Town Committee, Chuhar Jamali penalty through forfeiture of the said Security in case of breach of any condition of the Contract without prejudice to the right of Town Committee, Chuhar Jamali to recover the damages from the Contractor for any such breach as per condition of the contract.

Now therefore this agreement witnesses that the Town Committee, Chuhar Jamali and the Contractor shall respectively and shall well truly carry out and fulfill the contract and abide by all terms and conditions and specifications thereof.

In witness whereof the said parties have set their respective hands on this 20th of Dec 2017

Witness:  
 1. Sajid Abd Chandio Abdul Hakeem  
 Contractor  
 2. Ghulam Mustafa Chandio

[Signature]  
 CHAIRMAN  
 TOWN COMMITTEE, CHUHAR JAMALI



NAME OF WORK: - CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN MEMON MOHALLA  
WARD NO-7 PHASE-1 TOWN COMMITTEE CHUHAR JAMALI

BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
<b>PART – A (CONSTRUCTION OF DRAIN)</b>					
1.	138.0Cft	Dismantling and removing Road Metalling...etc	Rs:605.00	%Cft	Rs:835.00
2.	9.38Cft	Dismantling of Brick work in lime or cement mortar ..etc complete	Rs:1285.63	%Cft	Rs:121.00
3.	6.25 Cft	Dismantling of CC plain 1:2:4..etc complete	Rs:3327.50	%Cft	Rs:208.00
4.	10.50Cft	Dismantling of C.C Reinforced separating Reinforcement from concrete, cleaning and straitening the same ...etc complete	Rs:5445.00	%Cft	Rs:572.00
5.	603.50Cft	Excavation in foundation of building and bridges and others structure i/c dag bellig dressing and refilling ground structure with excavated earth watering and ramming lead up to 5'ft in ordinary soil.	Rs:3176.25	%Ocft	Rs:1914.00
6.	150.60Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:17004.00
7.	964.0Sft	Erection and removal of centering for RCC work ....etc complete	Rs:3127.41	%Sft	Rs:30148.00
8.	241.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:12595.00	%Cft	Rs:30354.00
9.	26.40Cft	RCC work in roof slab, beams coloums rafts, lintels and others structural member laid in situ or precast laid in position complete in all respects (b) ratio 1:2:4 90 lbs cement 2Cft sand 4cft shingle 1/8" to 3/4" gauge (G.Sch: P-No: It/No:	Rs:337.00	P.Cft	Rs:8897.0
10.	1.06Cwt	Fabrication of mild steel reinforcement for cement concrete including cutting, bending laying in position, making joints and fastening including cost of binding wire (also includes removal of rust bars ) using tor bars(G.Sch:P-No:16 It/No:8(b).	Rs:5001.70	P.Cwt	Rs:5305.00

11.	241.0Rft	Construction of standard open type drains connuttee block of C.C 1:2:4 cost of situ to the design profile i.c cost of mould as per drawing i/c supplying floating cost of cement 1/32" thick to expose surface finished smooth curing complete as per drawing design..etc complete	Rs:94.00	P.Rft	Rs:22654.00
12.	439.0Cft	Cement plaster 1:4 up to 12' height 1/2" thick (G.Sch: P-No:51 It/No:11(b).	Rs:2283.93	%Sft	Rs:10018.00
				Total:-	Rs:1,28,029/-
<b>PART-B (PROVIDING AND FIXING OF PAVER BLOCK)</b>					
1.	2650.0Cft	Earth work excavation undressed lead upto a single throw of Kassi phawarah of shovel in ordinary soil ..etc	Rs:1361.25	%Ocft	Rs:3607.00
2.	2650.0Cft	Dressing and leveling of earth wok to designed section, in ordinary soil etc complete	Rs:187.55	%Ocft	Rs:497.00
3.	1325.0Cft	Supplying and filling pit sand under floor and plunging into wells...	Rs:1141.25	%Ocft	Rs:15122.
4.	875.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:98720.00
5.	2650.0Sft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quddra / cable shape with pigmented b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:657650.00
				Total:-	Rs:7,75,596.00

Amount Total (a+b) **Rs:9,03,625/-**

10.65% Above/Below On The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

Total (A) = a + b in words

*(Nine Lac Ninety Nine thousand Eight hundred Sixty two only)*

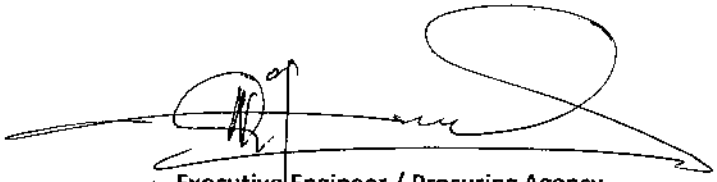
*Att:Deewan*  
Contractor

*(Signature)*  
Executive Engineer / Procuring Agency

# Summary of Bill of Quantities

Cost of Bid	Amount
1 (A) Cost based on composite Schedule of Rate	<u>          </u>
2 (B) Cost of based on Non / Offered Schedule of Rates.	<u>          </u>
TOTAL COST OF BID (C) = TOTAL (A) + Total (B)	<u>999862</u>

*A.H. Keem*  
Contractor

  
Executive Engineer / Procuring Agency

NAME OF WORK: - CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN MEMON MOHALLA  
WARD NO-7 PHASE-1 TOWN COMMITTEE CHUHAR JAMALI

BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
<b>PART – A (CONSTRUCTION OF DRAIN)</b>					
1.	138.0Cft	Dismantling and removing Road Metalling...etc	Rs:605.00	%Cft	Rs:835.00
2.	9.38Cft	Dismantling of Brick work in lime or cement mortar ...etc complete	Rs:1285.63	%Cft	Rs:121.00
3.	6.25 Cft	Dismantling of CC plain 1:2:4..etc complete	Rs:3327.50	%Cft	Rs:208.00
4.	10.50Cft	Dismantling of C.C Reinforced separating Reinforcement from concrete, cleaning and straitening the same ...etc complete	Rs:5445.00	%Cft	Rs:572.00
5.	603.50Cft	Excavation in foundation of building and bridges and others structure i/c dag bellig dressing and refilling ground structure with excavated earth watering and ramming lead up to 5'ft in ordinary soil.	Rs:3176.25	%Ocft	Rs:1914.00
6.	150.60Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:17004.00
7.	964.0Sft	Erection and removal of centering for RCC work ....etc complete	Rs:3127.41	%Sft	Rs:30148.00
8.	241.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:12595.00	%Cft	Rs:30354.00
9.	26.40Cft	RCC work in roof slab, beams coloums rafts, lintels and others structural member laid in situ or precast laid in position complete in all respects (b) ratio 1:2:4 90 lbs cement 2Cft sand 4cft shingle 1/8" to 1/4" gauge (G.Sch: P-No: It/No:	Rs:337.00	P.Cft	Rs:8897.0
10.	1.06Cwt	Fabrication of mild steel reinforcement for cement concrete including cutting, bending laying in position, making joints and fastening including cost of binding wire (also includes removal of rust bars ) using tor bars(G.Sch:P-No:16 It/No:8(b).	Rs:5001.70	P.Cwt	Rs:5305.00

11.	241.0Rft	Construction of standard open type drains connuttee block of C.C 1:2:4 cost of situ to the design profile i.c cost of mould as per drawing i/c supplying floating cost of cement 1/32" thick to expose surface finished smooth curing complete as per drawing design..etc complete	Rs:94.00	P.Rft	Rs:22654.00
12.	439.0Cft	Cement plaster 1:4 up to 12' height 1/2" thick (G.Sch: P-No:51 It/No:11(b).	Rs:2283.93	%Sft	Rs:10018.00
				Total:-	Rs:1,28,029/-

**PART-B (PROVIDING AND FIXING OF PAVER BLOCK)**

1.	2650.0Cft	Earth work excavation undressed lead upto a single throw of Kassi phawarah of shovel in ordinary soil ..etc	Rs:1361.25	%Ocft	Rs:3607.00
2.	2650.0Cft	Dressing and leveling of earth wok to designed section, in ordinary soil etc complete	Rs:187.55	%Ocft	Rs:497.00
3.	1325.0Cft	Supplying and filling pit sand under floor and plunging into wells...	Rs:1141.25	%Ocft	Rs:15122.
4.	875.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 1/5(f)	Rs:11288.75	%Cft	Rs:98720.00
5.	2650.05ft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quddra / cable shape with pigmented b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:657650.00
				Total:-	Rs:7,75,596.00

Amount Total (a+b) Rs:9,03,625/-

*11.1* %Above/Below On The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

1003024  
Total (A) = a + b in words

Ten Lac three thousand twenty four Only-

*Abdulk*  
Contractor

*[Signature]*  
Executive Engineer / Procuring Agency



Summary of Bill of Quantities

Cost of Bid

Amount 1003024

1 (A) Cost based on composite Schedule of Rate

\_\_\_\_\_

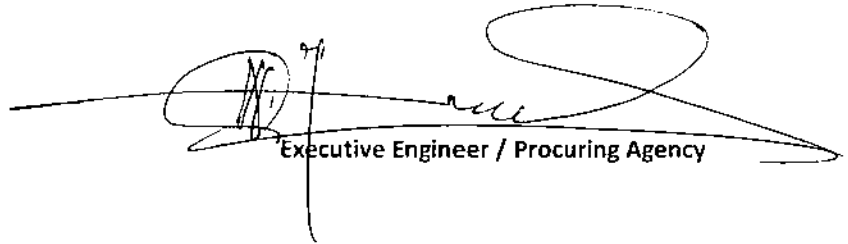
2 (B) Cost of based on Non / Offered Schedule of Rates.

\_\_\_\_\_

TOTAL COST OF BID (C) = TOTAL (A) + Total (B)

1003024

*ASSETK*  
Contractor

  
Executive Engineer / Procuring Agency

NAME OF WORK: - CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN MEMON MOHALLA  
WARD NO-7 PHASE-1 TOWN COMMITTEE CHUHAR JAMALI

BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
<b>PART – A (CONSTRUCTION OF DRAIN)</b>					
1.	138.0Cft	Dismantling and removing Road Metalling...etc	Rs:605.00	%Cft	Rs:835.00
2.	9.38Cft	Dismantling of Brick work in lime or cement mortar ..etc complete	Rs:1285.63	%Cft	Rs:121.00
3.	6.25 Cft	Dismantling of CC plain 1:2:4..etc complete	Rs:3327.50	%Cft	Rs:208.00
4.	10.50Cft	Dismantling of C.C Reinforced separating Reinforcement from concrete, deaning and straitening the same ...etc complete	Rs:5445.00	%Cft	Rs:572.00
5.	603.50Cft	Excavation in foundation of building and bridges and others structure i/c dag bellig dressing and refilling ground structure with excavated earth watering and ramming lead up to 5'ft in ordinary soil.	Rs:3176.25	%Ocft	Rs:1914.00
6.	150.60Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 l/5(f)	Rs:11288.75	%Cft	Rs:17004.00
7.	964.0Sft	Erection and removal of centering for RCC work ....etc complete	Rs:3127.41	%Sft	Rs:30148.00
8.	241.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 l/5(f)	Rs:12595.00	%Cft	Rs:30354.00
9.	26.40Cft	RCC work in roof slab, beams coloums rafts, lintels and others structural member laid in situ or precast laid in position complete in all respects (b) ratio 1:2:4 90 lbs cement 2Cft sand 4cft shingle 1/8" to 1/4" gauge (G.Sch: P-No: It/No:	Rs:337.00	P.Cft	Rs:8897.0
10.	1.06Cwt	Fabrication of mild steel reinforcement for cement concrete including cutting, bending laying in position, making joints and fastening including cost of binding wire (also includes removal of rust bars ) using tor bars(G.Sch:P-No:16 It/No:8(b).	Rs:5001.70	P.Cwt	Rs:5305.00

11.	241.0Rft	Construction of standard open type drains connuttee block of C.C 1:2:4 cost of situ to the design profile i.c cost of mould as per drawing i/c supplying floating cost of cement 1/32" thick to expose surface finished smooth curing complete as per drawing design..etc complete	Rs:94.00	P.Rft	Rs:22654.00
12.	439.0Cft	Cement plaster 1:4 up to 12' height ½" thick (G.Sch: P-No:51 lt/No:11(b).	Rs:2283.93	%Sft	Rs:10018.00
				Total:-	Rs:1,28,029/-
<b>PART-B (PROVIDING AND FIXING OF PAVER BLOCK)</b>					
1.	2650.0Cft	Earth work excavation undressed lead upto a single throw of Kassi phawarah of shovel in ordinary soil ..etc	Rs:1361.25	%Ocft	Rs:3607.00
2.	2650.0Cft	Dressing and leveling of earth wok to designed section, in ordinary soil etc complete	Rs:187.55	%Ocft	Rs:497.00
3.	1325.0Cft	Supplying and filling pit sand under floor and plunging into wells...	Rs:1141.25	%Ocft	Rs:15122.
4.	875.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:98720.00
5.	2650.0Sft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quddra / cable shape with pigmented b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:657650.00
				Total:-	Rs:7,75,596.00

Amount Total (a+b) Rs:9,03,625/-

12% %Above/Below On The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

1012061/2  
Total (A) = a + b in words

Ten Lac twelve thousand Sixty one -

  
Contractor

  
Executive Engineer / Procuring Agency

Summary of Bill of Quantities

Cost of Bid

Amount 1012061

1 (A) Cost based on composite Schedule of Rate

\_\_\_\_\_

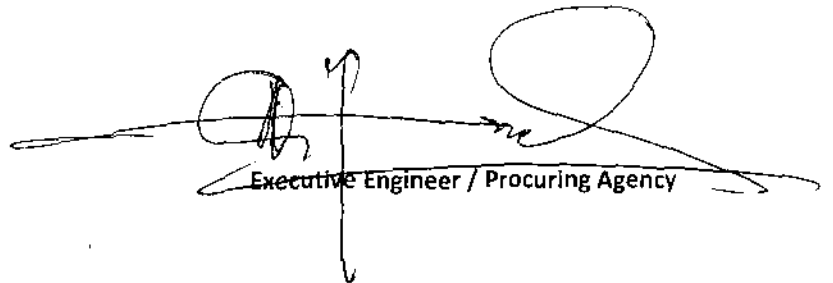
2 (B) Cost of based on Non / Offered Schedule of Rates.

\_\_\_\_\_

TOTAL COST OF BID (C) = TOTAL (A) + Total (B)

1012061

  
Contractor

  
Executive Engineer / Procuring Agency

**SINDH PUBLIC PROCUREMENT REGULATORY AUTHORITY**  
**CONTRACT EVALUATION FORM**

**TO BE FILLED IN BY ALL PROCURING AGENCIES FOR PUBLIC**  
**CONTRACTORS OF WORKS, SERVICES & GOODS.**

- 1). NAME OF THE ORGANIZATION / DEPTT. Town Committee, Chuhar Jamali, Sujawal
- 2). PROVINCIAL / LOCAL GOVT. / OTHER LOCAL GOVERNMENT
- 3). TITLE OF CONTRACT: "CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN MEMON MOHALLA WARD NO-7 PHASE-2 TOWN COMMITTEE CHUHAR JAMALI"
- 4) TENDER NUMBER: as above
- 5). BRIEF DESCRIPTION OF CONTRACT: CC Paver Block & CC Drain
- 6). FORUM THAT APPROVED THE SCHEME Town Committee, Chuhar Jamali
- 7). TENDER ESTIMATED VALUE Rs. 10,00,000/=
- 8). ENGINEER'S ESTIMATE PC -Cost Rs: 10,00,000/-
- (FOR CIVIL WORK ONLY)
- 9). ESTIMATED COMPLETION PERIOD (AS PER CONTRACT) (0 1) MONTH
- 10). TENDER OPENED ON DATE AND TIME 02-11-2017 AT 02:00 PM.
- 11). NUMBER OF TENDER DOCUMENTS SOLD 03  
(Attach list of buyers).
- 12). NUMBER OF BIDS RECEIVED 03
- 13). NUMBERS OF BIDDERS PRESENT AT THE TIME OF OPEINING OF BIDS 03
- 14). BID EVALUATION REPORT YES  
(Enclose a copy)
- 15). NAME AND ADDRESS OF THE SUCCESSFUL BIDDER. M/S Abdul Hakeem Chandio
- 16). CONTRACT AWARD PRICE SANCTION RUPEES Rs: 999862/-
- 17). RANKING OF SUCCESSFUL BIDDER IN EVALUATION REPORT 1<sup>st</sup> Lowest M/S Abdul Hakeem Chandio  
(I.E. 1ST 2ND 3RD EVALUATION BID). 2<sup>nd</sup> LOWEST M/S Abdul Sattar Kehar  
3<sup>rd</sup> LOWEST M/S Mumtaz Hussain Soomro
- 18). METHOD OF PROCUREMENT USED: - (TICK ONE)
- A). SINGLE STAGE-ONE ENVELOPE PROCEDURE \_\_\_\_\_ ✓ \_\_\_\_\_
- B). SINGLE STAGE-TWO ENVELOPE PROCEDURE \_\_\_\_\_
- C). TWO STAGE BIDDING PROCEDURE \_\_\_\_\_

D). TWO STAGE-TWO ENVELOPE BIDDING PROCEDURE \_\_\_\_\_

PLEASE SPECIFY IF ANY OTHER METHOD OF PROCUREMENT WAS ADOPTED i.e. EMERGENCY, DIRECT CONTRACTING ETC. WITH BRIEF REASONS.

19). PROVIDING AUTHORITY FOR AWARD OF CONTRACT CHAIRMAN TC, CHUHAR JAMALI

20). WHETHER THE PROCUREMENT WAS INCLUDED IN ANNUAL PROCUREMENT PLAN

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

21). ADVERTISEMENT:

i) SPPRA Website  
(if yes give date & SPPRA Identification No.

YES	<a href="http://www.pprasindhgov.pk">www.pprasindhgov.pk</a> SPPRA Tender SR No. 34792 Dt: 02-11-2017
-----	--

ii) Newspapers  
(if yes give names of newspapers & dates)

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

22). NATURE OF CONTRACT

DOMESTIC/ LOCAL	<input checked="" type="checkbox"/> LOCAL	INT	
-----------------	---	-----	--

23). WHETHER QUALIFICATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?

(If yes, enclose copy).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

24). WHETHER BID EVALUATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?

(if, yes enclose a copy).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

25). WHETHER APPROVAL OF COMPETENT AUTHORITY WAS OBTAINED FOR USING A METHOD OTHER THAN OPEN COMPETITIVE BIDDING?

YES		NO	N/A
-----	--	----	-----

26). WAS BID SECURITY OBTAINED FROM ALL THE BIDDERS?

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

27). WHETHER THE SUCCESSFUL BID WAS LOWEST EVALUATED BID / BEST EVALUATED BID (In case of Consultancies).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

28). WHETHER THE SUCCESSFUL BIDDER WAS TECHNICALLY COMPLAINT?

YES		NO	N/A
-----	--	----	-----

29). WHETHER NAMES OF THE BIDDERS AND THEIR QUOTED PRICES WERE READ OUT AT THE TIME OF OPENING OF BIDS?

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

30). WHETHER EVALUATION REPORT GIVEN TO BIDDERS BEFORE THE AWARD OF CONTRACT?

(Attach a copy of the bid evaluation report).

31). ANY COMPLAINTS RECEIVED  
(if yes, result thereof).

YES	<input checked="" type="checkbox"/>	NO	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

32). ANY DEVIATION FROM SPECIFICATIONS GIVEN IN THE TENDER  
NOTICE / DOCUMENTS ( if yes, given details).

YES	<input type="checkbox"/>	NO	<input type="checkbox"/>	N/A
-----	--------------------------	----	--------------------------	-----

33). WAS THE EXTENSION MADE IN RESPONSE TIME?  
(if yes, given reasons)

YES	<input type="checkbox"/>	NO	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

YES	<input type="checkbox"/>	NO	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

34). DEVIATION FROM QUALIFICATION CRITERIA  
(if yes, detailed reasons).

YES	<input type="checkbox"/>	NO	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

35). WAS IT ASSURED BY THE PROCURING AGENCY THAT THE SELECTED  
FIRM IS NOT BLACK LISTED?

YES	<input type="checkbox"/>	NO	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

36). WAS A VISIT MADE BY ANY OFFICER / OFFICIAL OF THE PROCURING  
AGENCY TO THE SUPPLIER'S PREMISES IN CONNECTION WITH THE PROCUREMENT?  
IF SO, DETAILS TO BE ASCERTAINED REGARDING FINANCING OF VISIT, IF ABROAD:  
(if yes, enclose a copy)

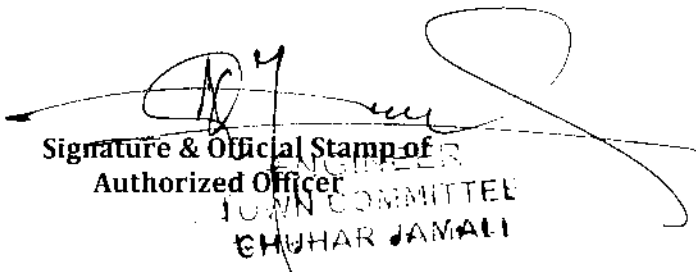
YES	<input type="checkbox"/>	NO	<input type="checkbox"/>	N/A
-----	--------------------------	----	--------------------------	-----

37). WERE PROPER SAFEGUARDS PROVIDED ON MOBILIZATION ADVANCE PAYMENT IN THE  
CONTRACT ( BANK GUARANTEE ETC)?

YES	<input type="checkbox"/>	NO	<input type="checkbox"/>	N/A
-----	--------------------------	----	--------------------------	-----

38). SPECIAL CONDITION, IF ANY  
(if yes, give Brief Description)

YES	<input type="checkbox"/>	NO	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

  
Signature & Official Stamp of  
Authorized Officer  
ENGINEER  
TOWN COMMITTEE  
CHUHAR JAMALI

FOR OFFICE USE ONLY

**SPPRA, Block No. 8, Sindh Secretariat No. 4-A, Court Road, Karachi**

**Tel: 021-9205356, 021-9205369 & Fax No. 021-9206291.**

# OFFICE OF THE TOWN COMMITTEE

## CHUHAR JAMALI

NO.T.C.C.J./T.O/ 41

/ 2017

Dated: 15/12/2017

M/s. ABDUL HAKEEM CHANDIO,  
GOVERNMENT CONTRACTOR

### LETTER OF ACCEPTANCE / SANCTION ORDER

**Subject: CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN MEMON MOHALLA WARD  
NO-7 PHASE-2 TOWN COMMITTEE CHUHAR JAMALI**

On behalf of the employer it is notified that following the approval of accepted of Chairman, Town Committee, Chuhar Jamali, vide Para 11 /No, your bid for the subject is herby accepted for the sum of Rs:9,99,862/- (Rupees. NINE LAC NINETY NINE THOUSAND EIGHT HUNDRED SIXTY TWO ONLY) as approved by the competent authority Town Committee, Chuhar Jamali.

There is now binding contract between Town Committee, Chuhar Jamali and M/s. **Abdul Hakeem Chandio**,

In accordance with the general condition of contract, you are required to enter in to and execute a contract agreement this agreement shall be signed by employer and M/s. **Abdul Hakeem Chandio**.

In accordance with condition of contract as per SPPRA-2010 the 2% Bid security Rs:20,000/- and remaining 8% Security may deduct from bill.

All correspondence on onward shall be carried out though Town Officer, Town Committee, Chuhar Jamali.

  
TOWN OFFICER  
TOWN COMMITTEE, CHUHAR JAMALI

**Copy to:-**

- 1- Chairman, Town Committee, Chuhar Jamali.
- 2- Assistant Executive Engineer, (Town Committee, Chuhar Jamali)
- 3- Office Copy.



# TOWN COMMITTEE CHUHAR JAMALI

## AGREEMENT

Subject: - CONSTRUCTION OF PAVER BLOCK 1/C SURFACE DRAIN IN VARIOUS WARDS (PHASE-2) TOWN COMMITTEE CHUHAR JAMALI

Cost Rs.9,99,862/-

Completion Time (03 Months) penalty \_\_\_\_\_

The Agreement is made on this 20th day of Dec 2017 at Thatta, between the Town Committee, Chuhar Jamali herein after called the Chuhar Jamali, Sujawal (Which expression shall mean and include his successors) on the one part and M/s. ABDUL HAKEEM CHANDIO have the office at \_\_\_\_\_ through their proprietor \_\_\_\_\_ hereinafter call the "Contractor" (Which expression shall mean and include his successors, administrator and assignees) on the other part.

Whereas the Town Committee, Chuhar Jamali, has accepted the tender of the contractor for construction and completion of the work namely CONSTRUCTION OF PAVER BLOCK 1/C SURFACE DRAIN IN VARIOUS WARDS (PHASE-2) TOWN COMMITTEE CHUHAR JAMALI, at a cost of Rs.9,99,862/- within a period of (03 Month) and penalty Rs. \_\_\_\_\_ according to the specification and general conditions of the contract signed by the Contractor after having himself full acquainted with their meaning.

And whereas the Contractor has already furnished with the Town Committee, Chuhar Jamali the 2% bid amount of Rs.20,000/- (Rupees Twenty Thousand Only) on account of Bid Performance security for the said contract.

The following documents after incorporating addenda, except those parts relating to instructions to bidders shall be deemed to form and be read and construed as part of this Agreement, viz:

- a) The Contract Agreement;
- b) The Letter of Acceptance;
- c) The Completed form of Bid;
- d) The Standard and special Terms & Conditions of Contract -- Part;
- e) The priced Bill of Quantities

In consideration of the payments to be made by the Town Committee, Chuhar Jamali to the Contractor as hereinafter mentioned, the contractor hereby covenants with the Town Committee, Chuhar Jamali to execute and complete the works and remedy defects therein In conformity and in accordance with the provisions of the contract.

The Town Committee, Chuhar Jamali hereby covenants to pay the contractor, in consideration of the execution and completion of the works as per provisions of contract, the contract Price or such other sum as may become payable under the provisions of the contract at the time and in the manner prescribed by the contractor.

The contractor has given a lien to the Town Committee, Chuhar Jamali over the Security for due fulfillment of the contract and do hereby bind himself, his heirs, successors legal representative and assignee to pay to the Town Committee, Chuhar Jamali penalty through forfeiture of the said Security in case of breach of any condition of the Contract without prejudice to the right of Town Committee, Chuhar Jamali to recover the damages from the Contractor for any such breach as per condition of the contract.

Now therefore this agreement witnesses that the Town Committee, Chuhar Jamali and the Contractor shall respectively and shall well truly carry out and fulfill the contract and abide by all terms and conditions and specifications thereof.

In witness whereof the said parties have set their respective hands on this 20th of Dec 2017

Witness:

1. Siraj Ahmed Chaudhry Contractor
2. Gulam Mustafa Chaudhry

CHAIRMAN  
TOWN COMMITTEE, CHUHAR JAMALI



**DEPT. REVENUE**  
**D.A.O. THATA**

NAME OF WORK: - CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN MEMON MOHALLA  
WARD NO-7 PHASE-2 TOWN COMMITTEE CHUHAR JAMALI

BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
<b>PART - A (CONSTRUCTION OF DRAIN)</b>					
1.	138.0Cft	Dismantling and removing Road Metalling...etc	Rs:605.00	%Cft	Rs:835.00
2.	9.38Cft	Dismantling of Brick work in lime or cement mortar ..etc complete	Rs:1285.63	%Cft	Rs:121.00
3.	6.25 Cft	Dismantling of CC plain 1:2:4..etc complete	Rs:3327.50	%Cft	Rs:208.00
4.	10.50Cft	Dismantling of C.C Reinforced separating Reinforcement from concrete, cleaning and straitening the same ...etc complete	Rs:5445.00	%Cft	Rs:572.00
5.	603.50Cft	Excavation in foundation of building and bridges and others structure i/c dag bellig dressing and refilling ground structure with excavated earth watering and ramming lead up to 5'ft in ordinary soil.	Rs:3176.25	%Oft	Rs:1914.00
6.	150.60Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 1/5(f)	Rs:11288.75	%Cft	Rs:17004.00
7.	964.0Sft	Erection and removal of centering for RCC work ....etc complete	Rs:3127.41	%Sft	Rs:30148.00
8.	241.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 1/5(f)	Rs:12595.00	%Cft	Rs:30354.00
9.	26.40Cft	RCC work in roof slab, beams coloums rafts, lintels and others structural member laid in situ or precast laid in position complete in all respects (b) ratio 1:2:4 90 lbs cement 2Cft sand 4cft shingle 1/8" to 3/8" gauge (G.Sch; P-No: 1t/No:	Rs:337.00	P.Cft	Rs:8897.0
10.	1.06Cwt	Fabrication of mild steel reinforcement for cement concrete including cutting, bending laying in position, making joints and fastening including cost of binding wire (also includes removal of rust bars ) using tor bars(G.Sch:P-No:16 1t/No:8(b).	Rs:5001.70	P.Cwt	Rs:5305.00

11.	241.0Rft	Construction of standard open type drains connuttee block of C.C 1:2:4 cost of situ to the design profile i.c cost of mould as per drawing i/c supplying floating cost of cement 1/32" thick to expose surface finished smooth curing complete as per drawing design..etc complete	Rs:94.00	P.Rft	Rs:22654.00
12.	439.0Cft	Cement plaster 1:4 up to 12' height 1/2" thick (G.Sch: P-No:51 It/No:11(b).	Rs:2283.93	%Sft	Rs:10018.00
				Total:-	Rs:1,28,029/-
<b>PART-B (PROVIDING AND FIXING OF PAVER BLOCK)</b>					
1.	2650.0Cft	Earth work excavation undressed lead upto a single throw of Kassi phawarah of shovel in ordinary soil ..etc	Rs:1361.25	%Ocft	Rs:3607.00
2.	2650.0Cft	Dressing and leveling of earth wok to designed section, in ordinary soil etc complete	Rs:187.55	%Ocft	Rs:497.00
3.	1325.0Cft	Supplying and filling pit sand under floor and plunging into wells...	Rs:1141.25	%Ocft	Rs:15122.
4.	875.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:98720.00
5.	2650.0Sft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quddra / cable shape with pigmented b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:657650.00
				Total:-	Rs:7,75,596.00

Amount Total (a+b) Rs:9,03,625/-

10.65% Above/Below On The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

999862/- (Rs: Nine lac Ninety Nine Thousand Eight hundred Sixty two)

Total (A) = a + b in words

*AT & Clean*  
Contractor

*[Signature]*  
Executive Engineer / Procuring Agency

# Summary of Bill of Quantities

Cost of Bid

Amount 999862 -

1 (A) Cost based on composite Schedule of Rate

-

2 (B) Cost of based on Non / Offered Schedule of Rates.

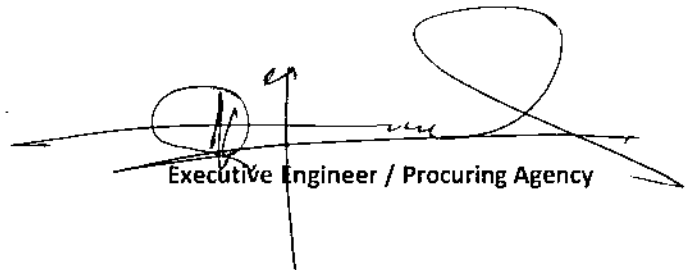
-

TOTAL COST OF BID (C) = TOTAL (A) + Total (B)

999862 -

*Atkinson*

Contractor

  
Executive Engineer / Procuring Agency

NAME OF WORK: - CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN MEMON MOHALLA  
WARD NO-7 PHASE-2 TOWN COMMITTEE CHUHAR JAMALI

BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

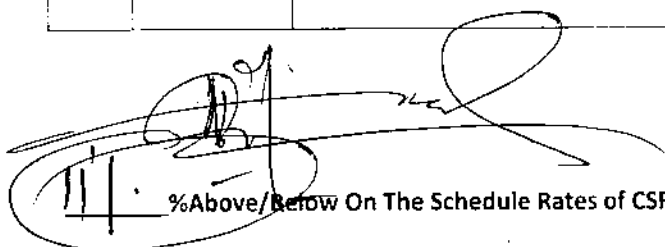
S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
<b>PART – A (CONSTRUCTION OF DRAIN)</b>					
1.	138.0Cft	Dismantling and removing Road Metalling...etc	Rs:605.00	%Cft	Rs:835.00
2.	9.38Cft	Dismantling of Brick work in lime or cement mortar ..etc complete	Rs:1285.63	%Cft	Rs:121.00
3.	6.25 Cft	Dismantling of CC plain 1:2:4...etc complete	Rs:3327.50	%Cft	Rs:208.00
4.	10.50Cft	Dismantling of C.C Reinforced separating Reinforcement from concrete, cleaning and straitening the same ...etc complete	Rs:5445.00	%Cft	Rs:572.00
5.	603.50Cft	Excavation in foundation of building and bridges and others structure i/c dag bellig dressing and refilling ground structure with excavated earth watering and ramming lead up to 5'ft in ordinary soil.	Rs:3176.25	%Ocft	Rs:1914.00
6.	150.60Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:17004.00
7.	964.0Sft	Erection and removal of centering for RCC work ....etc complete	Rs:3127.41	%Sft	Rs:30148.00
8.	241.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:12595.00	%Cft	Rs:30354.00
9.	26.40Cft	RCC work in roof slab, beams coloums rafts, lintels and others structural member laid in situ or precast laid in position complete in all respects (b) ratio 1:2:4 90 lbs cement 2Cft sand 4cft shingle 1/8" to 3/4" gauge (G.Sch: P-No: It/No:	Rs:337.00	P.Cft	Rs:8897.0
10.	1.06Cwt	Fabrication of mild steel reinforcement for cement concrete including cutting, bending laying in position, making joints and fastening including cost of binding wire (also includes removal of rust bars ) using tor bars(G.Sch:P-No:16 It/No:8(b).	Rs:5001.70	P.Cwt	Rs:5305.00

11.	241.0Rft	Construction of standard open type drains connuttee block of C.C 1:2:4 cost of situ to the design profile i.c cost of mould as per drawing i/c supplying floating cost of cement 1/32" thick to expose surface finished smooth curing complete as per drawing design..etc complete	Rs:94.00	P.Rft	Rs:22654.00
12.	439.0Cft	Cement plaster 1:4 up to 12' height ½" thick (G.Sch: P-No:51 It/No:11(b).	Rs:2283.93	%Sft	Rs:10018.00
				Total:-	Rs:1,28,029/-

**PART-B (PROVIDING AND FIXING OF PAVER BLOCK)**

1.	2650.0Cft	Earth work excavation undressed lead upto a single throw of Kassi phawarah of shovel in ordinary soil ..etc	Rs:1361.25	%Ocft	Rs:3607.00
2.	2650.0Cft	Dressing and leveling of earth wok to designed section, in ordinary soil etc complete	Rs:187.55	%Ocft	Rs:497.00
3.	1325.0Cft	Supplying and filling pit sand under floor and plunging into wells...	Rs:1141.25	%Ocft	Rs:15122.
4.	875.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:98720.00
5.	2650.0Sft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quddra / cable shape with pigmented b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:657650.00
				Total:-	Rs:7,75,596.00

Amount Total (a+b) Rs:9,03,625/-

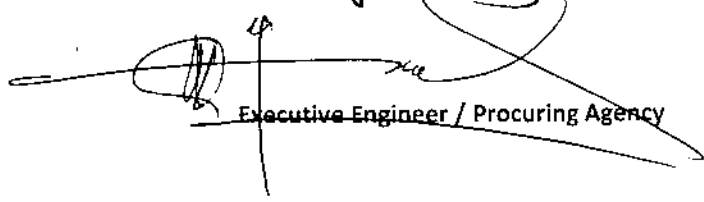
  
%Above/Below On The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

Total (A) = a + b in words 1003024

Ten Lac Three thousand twenty four

  
Contractor

  
Executive Engineer / Procuring Agency

Summary of Bill of Quantities

Cost of Bid

Amount 1003024 -

1 (A) Cost based on composite Schedule of Rate

\_\_\_\_\_

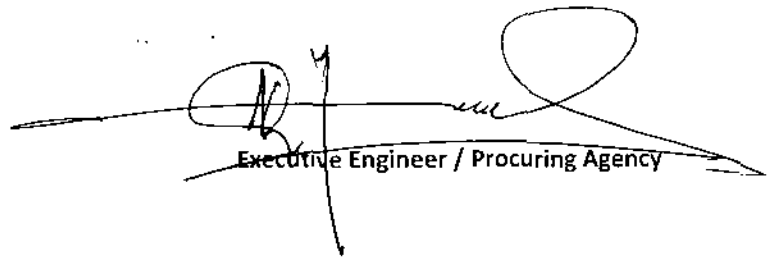
2 (B) Cost of based on Non / Offered Schedule of Rates.

\_\_\_\_\_

TOTAL COST OF BID (C) = TOTAL (A) + Total (B)

1003024 -

*ASSTARK*  
Contractor

  
Executive Engineer / Procuring Agency

NAME OF WORK: - CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN MEMON MOHALLA  
WARD NO-7 PHASE-2 TOWN COMMITTEE CHUHAR JAMALI

BILL OF QUANTITIES

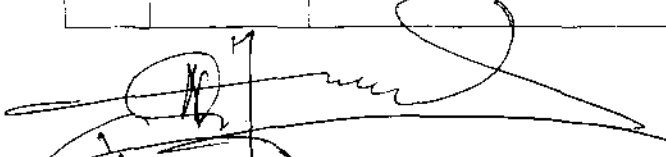
(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
<b>PART – A (CONSTRUCTION OF DRAIN)</b>					
1.	138.0Cft	Dismantling and removing Road Metalling...etc	Rs:605.00	%Cft	Rs:835.00
2.	9.38Cft	Dismantling of Brick work in lime or cement mortar ..etc complete	Rs:1285.63	%Cft	Rs:121.00
3.	6.25 Cft	Dismantling of CC plain 1:2:4..etc complete	Rs:3327.50	%Cft	Rs:208.00
4.	10.50Cft	Dismantling of C.C Reinforced separating Reinforcement from concrete, cleaning and straitening the same ...etc complete	Rs:5445.00	%Cft	Rs:572.00
5.	603.50Cft	Excavation in foundation of building and bridges and others structure i/c dag bellig dressing and refilling ground structure with excavated earth watering and ramming lead up to 5'ft in ordinary soil.	Rs:3176.25	%Ocft	Rs:1914.00
6.	150.60Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:17004.00
7.	964.0Sft	Erection and removal of centering for RCC work ....etc complete	Rs:3127.41	%Sft	Rs:30148.00
8.	241.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:12595.00	%Cft	Rs:30354.00
9.	26.40Cft	RCC work in roof slab, beams coloums rafts, lintels and others structural member laid in situ or precast laid in position complete in all respects (b) ratio 1:2:4 90 lbs cement 2Cft sand 4cft shingle 1/8" to 3/8" gauge (G.Sch: P-No: It/No:	Rs:337.00	P.Cft	Rs:8897.0
10.	1.06Cwt	Fabrication of mild steel reinforcement for cement concrete including cutting, bending laying in position, making joints and fastening including cost of binding wire (also includes removal of rust bars ) using tor bars(G.Sch:P-No:16 It/No:8(b).	Rs:5001.70	P.Cwt	Rs:5305.00



11.	241.0Rft	Construction of standard open type drains connuttee block of C.C 1:2:4 cost of situ to the design profile i.c cost of mould as per drawing i/c supplying floating cost of cement 1/32" thick to expose surface finished smooth curing complete as per drawing design..etc complete	Rs:94.00	P.Rft	Rs:22654.00
12.	439.0Cft	Cement plaster 1:4 up to 12' height ½" thick (G.Sch: P-No:51 It/No:11(b).	Rs:2283.93	%Sft	Rs:10018.00
				Total:-	Rs:1,28,029/-
<b>PART-B (PROVIDING AND FIXING OF PAVER BLOCK)</b>					
1.	2650.0Cft	Earth work excavation undressed lead upto a single throw of Kassi phawarah of shovel in ordinary soil ..etc	Rs:1361.25	%Ocft	Rs:3607.00
2.	2650.0Cft	Dressing and leveling of earth wok to designed section, in ordinary soil etc complete	Rs:187.55	%Ocft	Rs:497.00
3.	1325.0Cft	Supplying and filling pit sand under floor and plunging into wells...	Rs:1141.25	%Ocft	Rs:15122.
4.	875.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 1/5(f)	Rs:11288.75	%Cft	Rs:98720.00
5.	2650.0Sft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quddra / cable shape with pigmented b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:657650.00
				Total:-	Rs:7,75,596.00

Amount Total (a+b) Rs:9,03,625/-

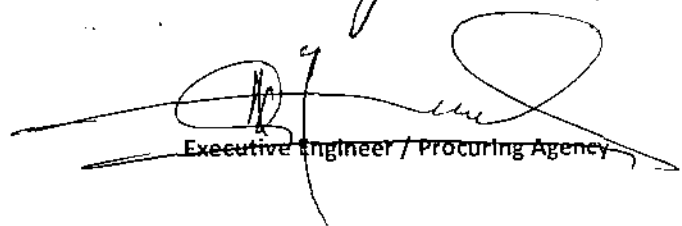
  
 %Above/  Below On The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

Total (A) = a + b in words

*Ten Lacs Twelve thousand Sixty one only*

  
 Contractor

  
 Executive Engineer / Procuring Agency

Summary of Bill of Quantities

Cost of Bid

Amount 10/2061

1 (A) Cost based on composite Schedule of Rate

\_\_\_\_\_

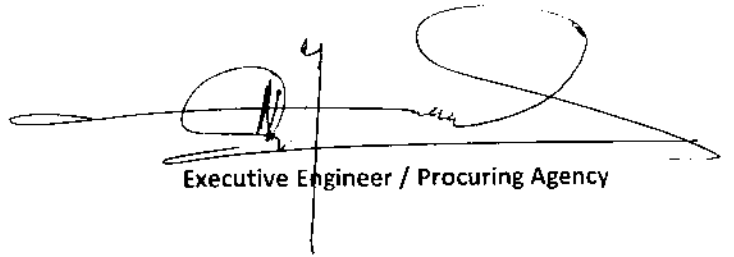
2 (B) Cost of based on Non / Offered Schedule of Rates.

\_\_\_\_\_

TOTAL COST OF BID (C) = TOTAL (A) + Total (B)

10/2061

  
Contractor

  
Executive Engineer / Procuring Agency

**SINDH PUBLIC PROCUREMENT REGULATORY AUTHORITY**  
**CONTRACT EVALUATION FORM**

**TO BE FILLED IN BY ALL PROCURING AGENCIES FOR PUBLIC**  
**CONTRACTORS OF WORKS, SERVICES & GOODS.**

- 1). NAME OF THE ORGANIZATION / DEPTT. Town Committee, Chuhar Jamali, Sujawal
- 2). PROVINCIAL / LOCAL GOVT. / OTHER LOCAL GOVERNMENT
- 3). TITLE OF CONTRACT: "CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN FROM LALA SALEH MEMONTO AHMED LUHAR WARD NO-6 TOWN COMMITTEE CHUHAR JAMALI"
- 4) TENDER NUMBER: as above
- 5). BRIEF DESCRIPTION OF CONTRACT: CC Paver Block & CC Drain
- 6). FORUM THAT APPROVED THE SCHEME Town Committee, Chuhar Jamali
- 7). TENDER ESTIMATED VALUE Rs. 10,00,000/=
- 8). ENGINEER'S ESTIMATE PC -Cost Rs: 1000000/-  
(FOR CIVIL WORK ONLY)
- 9). ESTIMATED COMPLETION PERIOD (AS PER CONTRACT) (0 1) MONTH
- 10). TENDER OPENED ON DATE AND TIME 02-11-2017 AT 02:00 PM.
- 11). NUMBER OF TENDER DOCUMENTS SOLD (Attach list of buyers). 03
- 12). NUMBER OF BIDS RECEIVED 03
- 13). NUMBERS OF BIDDERS PRESENT AT THE TIME OF OPEINING OF BIDS 03
- 14). BID EVALUATION REPORT (Enclose a copy) YES
- 15). NAME AND ADDRESS OF THE SUCCESSFUL BIDDER. M/S Abdul Sattar Kehar
- 16). CONTRACT AWARD PRICE SANCTION RUPEES Rs: 999862/-
- 17). RANKING OF SUCCESSFUL BIDDER IN EVALUATION REPORT (I.E. 1ST 2ND 3RD EVALUATION BID). 1<sup>st</sup> Lowest M/S Abdul Sattar Kehar  
2<sup>nd</sup> LOWEST M/S Muhammad Juman Mandhrio  
3<sup>rd</sup> LOWEST M/S Mumtaz Hussain Soomro
- 18). METHOD OF PROCUREMENT USED: - (TICK ONE)
- A). SINGLE STAGE-ONE ENVELOPE PROCEDURE \_\_\_\_\_✓\_\_\_\_\_
- B). SINGLE STAGE-TWO ENVELOPE PROCEDURE \_\_\_\_\_

- C). TWO STAGE BIDDING PROCEDURE \_\_\_\_\_  
 D). TWO STAGE-TWO ENVELOPE BIDDING PROCEDURE \_\_\_\_\_

PLEASE SPECIFY IF ANY OTHER METHOD OF PROCUREMENT WAS ADOPTED i.e. EMERGENCY, DIRECT CONTRACTING ETC. WITH BRIEF REASONS.

19). PROVIDING AUTHORITY FOR AWARD OF CONTRACT CHAIRMAN TC, CHUHAR JAMALI

20). WHETHER THE PROCUREMENT WAS INCLUDED IN ANNUAL PROCUREMENT PLAN

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

21). ADVERTISEMENT:

- i) SPPRA Website  
 (if yes give date & SPPRA Identification No.

YES	<a href="http://www.pprasindhgov.pk">www.pprasindhgov.pk</a> SPPRA Tender SR No. 34792 Dt: 02-11-2017
-----	--

- ii) Newspapers  
 (if yes give names of newspapers & dates)

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

22). NATURE OF CONTRACT

DOMESTIC/ LOCAL	<input checked="" type="checkbox"/>	LOCAL	INT	
-----------------	-------------------------------------	-------	-----	--

23). WHETHER QUALIFICATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?

(If yes, enclose copy).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

24). WHETHER BID EVALUATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?

(if, yes enclose a copy).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

25). WHETHER APPROVAL OF COMPETENT AUTHORITY WAS OBTAINED FOR USING A METHOD OTHER THAN OPEN COMPETITIVE BIDDING?

YES		NO	N/A
-----	--	----	-----

26). WAS BID SECURITY OBTAINED FROM ALL THE BIDDERS?

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

27). WHETHER THE SUCCESSFUL BID WAS LOWEST EVALUATED BID / BEST EVALUATED BID (In case of Consultancies).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

28). WHETHER THE SUCCESSFUL BIDDER WAS TECHNICALLY COMPLAINT?

YES		NO	N/A
-----	--	----	-----

29). WHETHER NAMES OF THE BIDDERS AND THEIR QUOTED PRICES WERE READ OUT AT THE TIME OF OPENING OF BIDS?

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

30). WHETHER EVALUATION REPORT GIVEN TO BIDDERS BEFORE THE AWARD OF CONTRACT?

(Attach a copy of the bid evaluation report).

31). ANY COMPLAINTS RECEIVED  
(if yes, result thereof).

YES	<input checked="" type="checkbox"/>	NO	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

YES	<input type="checkbox"/>	NO	<input type="checkbox"/>	N/A	<input type="checkbox"/>
-----	--------------------------	----	--------------------------	-----	--------------------------

32). ANY DEVIATION FROM SPECIFICATIONS GIVEN IN THE TENDER  
NOTICE / DOCUMENTS ( if yes, given details).

YES	<input type="checkbox"/>	NO	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

33). WAS THE EXTENSION MADE IN RESPONSE TIME?  
(if yes, given reasons)

YES	<input type="checkbox"/>	NO	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

34). DEVIATION FROM QUALIFICATION CRITERIA  
(if yes, detailed reasons).

YES	<input type="checkbox"/>	NO	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

35). WAS IT ASSURED BY THE PROCURING AGENCY THAT THE SELECTED  
FIRM IS NOT BLACK LISTED?

YES	<input type="checkbox"/>	NO	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

36). WAS A VISIT MADE BY ANY OFFICER / OFFICIAL OF THE PROCURING  
AGENCY TO THE SUPPLIER'S PREMISES IN CONNECTION WITH THE PROCUREMENT?  
IF SO, DETAILS TO BE ASCERTAINED REGARDING FINANCING OF VISIT, IF ABROAD:  
(if yes, enclose a copy)

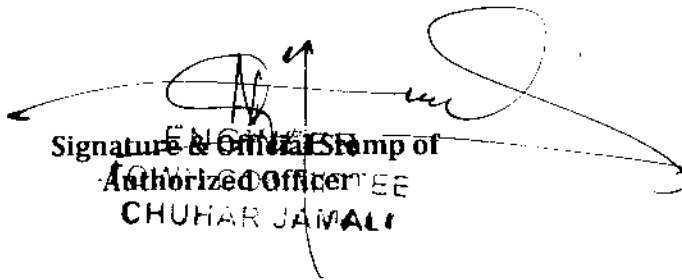
YES	<input type="checkbox"/>	NO	<input type="checkbox"/>	N/A	<input type="checkbox"/>
-----	--------------------------	----	--------------------------	-----	--------------------------

37). WERE PROPER SAFEGUARDS PROVIDED ON MOBILIZATION ADVANCE PAYMENT IN THE  
CONTRACT ( BANK GUARANTEE ETC)?

YES	<input type="checkbox"/>	NO	<input type="checkbox"/>	N/A	<input type="checkbox"/>
-----	--------------------------	----	--------------------------	-----	--------------------------

38). SPECIAL CONDITION, IF ANY  
(if yes, give Brief Description)

YES	<input type="checkbox"/>	NO	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

  
Signature & Official Stamp of  
Authorized Officer  
CHUHAR JAMALI

FOR OFFICE USE ONLY

**SPPRA, Block No. 8, Sindh Secretariat No. 4-A, Court Road, Karachi**

**Tel: 021-9205356, 021-9205369 & Fax No. 021-9206291.**

# OFFICE OF THE TOWN COMMITTEE

## CHUHAR JAMALI

NO.T.C.C.J./T.O/ 42

/ 2017

Dated: 15/12/2017

M/s. ABDUL SATTAR KEHAR,  
GOVERNMENT CONTRACTOR

### LETTER OF ACCEPTANCE / SANCTION ORDER

**Subject:** CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN FROM LALA SALEH MEMONTO AHMED LUHAR WARD NO-6 TOWN COMMITTEE CHUHAR JAMALI


On behalf of the employer it is notified that following the approval of accepted of Chairman, Town Committee, Chuhar Jamali, vide Para 12 /No, your bid for the subject is hereby accepted for the sum of Rs:9,99,862/- (Rupees. NINE LAC NINETY NINE THOUSAND EIGHT HUNDRED SIXTY TWO ONLY) as approved by the competent authority Town Committee, Chuhar Jamali.

There is now binding contract between Town Committee, Chuhar Jamali and M/s. **Abdul Sattar Kehar,**

In accordance with the general condition of contract, you are required to enter in to and execute a contract agreement this agreement shall be signed by employer and M/s. **Abdul Sattar Kehar.**

In accordance with condition of contract as per SPPRA-2010 the 2% Bid security Rs:20,000/- and remaining 8% Security may deduct from bill.

All correspondence on onward shall be carried out through Town Officer, Town Committee, Chuhar Jamali.



TOWN OFFICER  
TOWN COMMITTEE, CHUHAR JAMALI

Copy to:-

- 1- Chairman, Town Committee, Chuhar Jamali.
- 2- Assistant Executive Engineer, (Town Committee, Chuhar Jamali)
- 3- Office Copy.

# TOWN COMMITTEE CHUHAR JAMALI

## AGREEMENT

Subject: - CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN FROM LALA SALEH MEMONTO AHMED LUHAR WARD NO-6 TOWN COMMITTEE CHUHAR JAMALI

Cost Rs.9,99,862/-

Completion Time (03 Months) penalty \_\_\_\_\_

The Agreement is made on this 20th Dec day of 2017 at Thatta, between the Town Committee, Chuhar Jamali herein after called the Chuhar Jamali, Sujawal (Which expression shall mean and include his successors) on the one part and M/s. ABDUL SATTAR KEHAR, have the office at Chuhar TC Club through their proprietor \_\_\_\_\_ hereinafter call the "Contractor" (Which expression shall mean and include his successors, administrator and assignees) on the other part.

Whereas the Town Committee, Chuhar Jamali, has accepted the tender of the contractor for construction and completion of the work namely CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN FROM LALA SALEH MEMONTO AHMED LUHAR WARD NO-6 TOWN COMMITTEE CHUHAR JAMALI, at a cost of Rs.9,99,862/- within a period of (03 Month) and penalty Rs. \_\_\_\_\_ according to the specification and general conditions of the contract signed by the Contractor after having made himself full acquainted with their meaning.

And whereas the Contractor has already furnished with the Town Committee, Chuhar Jamali the 2% bid amount of Rs.20,000/- (Rupees Twenty Thousand Only) on account of Performance security for the said contract.

The following documents after incorporating addenda, except those parts relating to bidders shall be deemed to form and be read and construed as part of this Agreement, viz:

- a) The Contract Agreement;
- b) The Letter of Acceptance;
- c) The Completed form of Bid;
- d) The Standard and special Terms & Conditions of Contract – Part;
- e) The priced Bill of Quantities



In consideration of the payments to be made by the Town Committee, Chuhar Jamali to the Contractor as hereinafter mentioned, the contractor hereby covenants with the Town Committee, Chuhar Jamali to execute and complete the works and remedy defects therein In conformity and in all respects with the provisions of the contract.

The Town Committee, Chuhar Jamali hereby covenants to pay the contractor, in consideration of the execution and completion of the works as per provisions of contract, the contract Price or such other sum as may become payable under the provisions of the contract at the time and in the manner prescribed by the contractor.

The contractor has given a lien to the Town Committee, Chuhar Jamali over the Security for due fulfillment of the contract and do hereby bind himself, his heirs, successors legal representative and assignee to pay to the Town Committee, Chuhar Jamali penalty through forfeiture of the said Security in case of breach of any condition of the Contract without prejudice to the right of Town Committee, Chuhar Jamali to recover the damages from the Contractor for any such breach as per condition of the contract.

Now therefore this agreement witnesses that the Town Committee, Chuhar Jamali and the Contractor shall respectively and shall well truly carry out and fulfill the contract and abide by all terms and conditions and specifications thereof.

In witness whereof the said parties have set their respective hands on this 20th Dec of Dec 2017

Witness:

1. [Signature]  
4140723354779.7

2. [Signature]  
41407612088403

[Signature]  
**ABDUL SATTAR KEHAR**  
Gen. Contractor

414075408062-5

[Signature]  
**CHAIRMAN**  
TOWN COMMITTEE, CHUHAR JAMALI

NAME OF WORK: - CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN FROM LALA SALEH  
MEMONTO AHMED LUHAR WARD NO-6 TOWN COMMITTEE CHUHAR  
JAMALI

BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
<b>PART – A (CONSTRUCTION OF DRAIN)</b>					
1.	138.0Cft	Dismantling and removing Road Metalling...etc	Rs:605.00	%Cft	Rs:835.00
2.	9.38Cft	Dismantling of Brick work in lime or cement mortar ..etc complete	Rs:1285.63	%Cft	Rs:121.00
3.	6.25 Cft	Dismantling of CC plain 1:2:4..etc complete	Rs:3327.50	%Cft	Rs:208.00
4.	10.50Cft	Dismantling of C.C Reinforced separating Reinforcement from concrete, cleaning and straitening the same ...etc complete	Rs:5445.00	%Cft	Rs:572.00
5.	603.50Cft	Excavation in foundation of building and bridges and others structure i/c dag bellig dressing and refilling ground structure with excavated earth watering and ramming lead up to 5'ft in ordinary soil.	Rs:3176.25	%Ocft	Rs:1914.00
6.	150.60Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f))	Rs:11288.75	%Cft	Rs:17004.00
7.	964.05ft	Erection and removal of centering for RCC work ....etc complete	Rs:3127.41	%Sft	Rs:30148.00
8.	241.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f))	Rs:12595.00	%Cft	Rs:30354.00
9.	26.40Cft	RCC work in roof slab, beams coloums rafts, lintels and others structural member laid in situ or precast laid in position complete in all respects (b) ratio 1:2:4 90 lbs cement 2Cft sand 4cft shingle 1/8" to 1/2" gauge (G.Sch: P-No: It/No:	Rs:337.00	P.Cft	Rs:8897.0
10.	1.06Cwt	Fabrication of mild steel reinforcement for cement concrete including cutting, bending laying in position, making joints and fastening including cost of binding wire (also includes removal of rust bars ) using tor bars(G.Sch:P-No:16 It/No:8(b).	Rs:5001.70	P.Cwt	Rs:5305.00



11.	241.0Rft	Construction of standard open type drains connuttee block of C.C 1:2:4 cost of situ to the design profile i.c cost of mould as per drawing i/c supplying floating cost of cement 1/32" thick to expose surface finished smooth curing complete as per drawing design..etc complete	Rs:94.00	P.Rft	Rs:22654.00
12.	439.0Cft	Cement plaster 1:4 up to 12' height ½" thick (G.Sch: P-No:51 It/No:11(b).	Rs:2283.93	%Sft	Rs:10018.00
				Total:-	Rs:1,28,029/-
<b>PART-B (PROVIDING AND FIXING OF PAVER BLOCK)</b>					
1.	2650.0Cft	Earth work excavation undressed lead upto a single throw of Kassi phawarah of shovel in ordinary soil ..etc	Rs:1361.25	%Ocft	Rs:3607.00
2.	2650.0Cft	Dressing and leveling of earth wok to designed section, in ordinary soil etc complete	Rs:187.55	%Ocft	Rs:497.00
3.	1325.0Cft	Supplying and filling pit sand under floor and plunging into wells...	Rs:1141.25	%Ocft	Rs:15122.
4.	875.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:98720.00
5.	2650.0Sft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quddra / cable shape with pigmented b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:657650.00
				Total:-	Rs:7,75,596.00

Amount Total (a+b) Rs:9,03,625/-

*(Signature)*  
10.65% Above/Below On The Schedule Rates of CSR.  
 999862

Amount to be Added/Deducted on the basis of premium quoted Total (b)

Total (A) = a + b in words

Nine Lac Ninety Nine Thousand  
 Eight hundred (sixty two) only

Contractor  
*(Signature)*

*(Signature)*  
 Executive Engineer / Procuring Agency

Summary of Bill of Quantities

Cost of Bid

Amount 999862 -

1 (A) Cost based on composite Schedule of Rate

        -

2 (B) Cost of based on Non / Offered Schedule of Rates.

        -

TOTAL COST OF BID (C) = TOTAL (A) + Total (B)

999862 -

*P. Satter*  
Contractor

*[Handwritten Signature]*  
Executive Engineer / Procuring Agency

NAME OF WORK: - CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN FROM LALA SALEH  
MEMONTO AHMED LUHAR WARD NO-6 TOWN COMMITTEE CHUHAR  
JAMALI

BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
<b>PART – A (CONSTRUCTION OF DRAIN)</b>					
1.	138.0Cft	Dismantling and removing Road Metalling...etc	Rs:605.00	%Cft	Rs:835.00
2.	9.38Cft	Dismantling of Brick work in lime or cement mortar ..etc complete	Rs:1285.63	%Cft	Rs:121.00
3.	6.25 Cft	Dismantling of CC plain 1:2:4..etc complete	Rs:3327.50	%Cft	Rs:208.00
4.	10.50Cft	Dismantling of C.C Reinforced separating Reinforcement from concrete, cleaning and straitening the same ...etc complete	Rs:5445.00	%Cft	Rs:572.00
5.	603.50Cft	Excavation in foundation of building and bridges and others structure i/c dag bellig dressing and refilling ground structure with excavated earth watering and ramming lead up to 5'ft in ordinary soil.	Rs:3176.25	%Ocft	Rs:1914.00
6.	150.60Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:17004.00
7.	964.0Sft	Erection and removal of centering for RCC work ....etc complete	Rs:3127.41	%Sft	Rs:30148.00
8.	241.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:12595.00	%Cft	Rs:30354.00
9.	26.40Cft	RCC work in roof slab, beams coloums rafts, lintels and others structural member laid in situ or precast laid in position complete in all respects (b) ratio 1:2:4 90 lbs cement 2Cft sand 4cft shingle 1/8" to 3/4" gauge (G.Sch: P-No: It/No:	Rs:337.00	P.Cft	Rs:8897.0
10.	1.06Cwt	Fabrication of mild steel reinforcement for cement concrete including cutting, bending laying in position, making joints and fastening including cost of binding wire (also includes removal of rust bars ) using tor bars(G.Sch:P-No:16 It/No:8(b).	Rs:5001.70	P.Cwt	Rs:5305.00

11.	241.0Rft	Construction of standard open type drains connuttee block of C.C 1:2:4 cost of situ to the design profile i.c cost of mould as per drawing i/c supplying floating cost of cement 1/32" thick to expose surface finished smooth curing complete as per drawing design..etc complete	Rs:94.00	P.Rft	Rs:22654.00
12.	439.0Cft	Cement plaster 1:4 up to 12' height ½" thick (G.Sch: P-No:51 It/No:11(b).	Rs:2283.93	%Sft	Rs:10018.00
				Total:-	Rs:1,28,029/-
<b>PART-B (PROVIDING AND FIXING OF PAVER BLOCK)</b>					
1.	2650.0Cft	Earth work excavation undressed lead upto a single throw of Kassi phawarah of shovel in ordinary soil ..etc	Rs:1361.25	%Ocft	Rs:3607.00
2.	2650.0Cft	Dressing and leveling of earth wok to designed section, in ordinary soil etc complete	Rs:187.55	%Ocft	Rs:497.00
3.	1325.0Cft	Supplying and filling pit sand under floor and plunging into wells...	Rs:1141.25	%Ocft	Rs:15122.
4.	875.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:98720.00
5.	2650.0Sft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quddra / cable shape with pigmented b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:657650.00
				Total:-	Rs:7,75,596.00

*[Handwritten Signature]*  
 11/ %Above/Below On The Schedule Rates of CSR.  
 1003024

Amount Total (a+b) **Rs:9,03,625/-**

Amount to be Added/Deducted on the basis of premium quoted Total (b)

Total (A) = a + b in words

*Ten Lakh Three Thousand Twenty Five only*

*Juan*  
Contractor

*[Handwritten Signature]*  
Executive Engineer / Procuring Agency

Summary of Bill of Quantities

Cost of Bid

Amount 10,130,24

1 (A) Cost based on composite Schedule of Rate

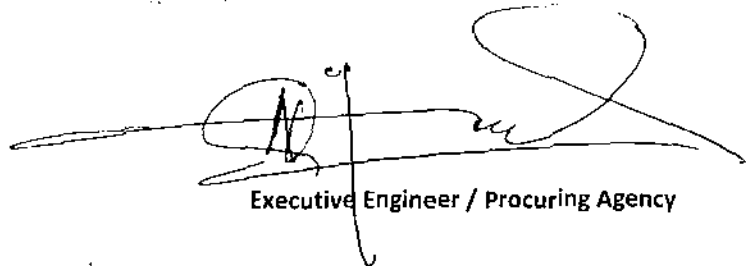
2 (B) Cost of based on Non / Offered Schedule of Rates.

TOTAL COST OF BID (C) = TOTAL (A) + Total (B)

10,030,24 -

  
CONTRACTOR

  
Executive Engineer / Procuring Agency

NAME OF WORK: - CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN FROM LALA SALEH  
MEMONTO AHMED LUHAR WARD NO-6 TOWN COMMITTEE CHUHAR  
JAMALI

BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
<b>PART – A (CONSTRUCTION OF DRAIN)</b>					
1.	138.0Cft	Dismantling and removing Road Metalling...etc	Rs:605.00	%Cft	Rs:835.00
2.	9.38Cft	Dismantling of Brick work in lime or cement mortor ..etc complete	Rs:1285.63	%Cft	Rs:121.00
3.	6.25 Cft	Dismantling of CC plain 1:2:4..etc complete	Rs:3327.50	%Cft	Rs:208.00
4.	10.50Cft	Dismantling of C.C Reinforced separating Reinforcement from concrete, cleaning and straitening the same ...etc complete	Rs:5445.00	%Cft	Rs:572.00
5.	603.50Cft	Excavation in foundation of building and bridges and others structure i/c dag bellig dressing and refilling ground structure with excavated earth watering and ramming lead up to 5'ft in ordinary soil.	Rs:3176.25	%Ocft	Rs:1914.00
6.	150.60Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 l/5(f)	Rs:11288.75	%Cft	Rs:17004.00
7.	964.05ft	Erection and removal of centering for RCC work ....etc complete	Rs:3127.41	%Sft	Rs:30148.00
8.	241.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 l/5(f)	Rs:12595.00	%Cft	Rs:30354.00
9.	26.40Cft	RCC work in roof slab, beams coloums rafts, lintels and others structural member laid in situ or precast laid in position complete in all respects (b) ratio 1:2:4 90 lbs cement 2Cft sand 4cft shingle 1/8" to 1/2" gauge (G.Sch: P-No: It/No:	Rs:337.00	P.Cft	Rs:8897.0
10.	1.06Cwt	Fabrication of mild steel reinforcement for cement concrete including cutting, bending laying in position, making joints and fastening including cost of binding wire (also includes removal of rust bars ) using tor bars(G.Sch:P-No:16 It/No:8(b).	Rs:5001.70	P.Cwt	Rs:5305.00

11.	241.0Rft	Construction of standard open type drains connuttee block of C.C 1:2:4 cost of situ to the design profile i.c cost of mould as per drawing i/c supplying floating cost of cement 1/32" thick to expose surface finished smooth curing complete as per drawing design..etc complete	Rs:94.00	P.Rft	Rs:22654.00
12.	439.0Cft	Cement plaster 1:4 up to 12' height ½" thick (G.Sch: P-No:51 It/No:11(b).	Rs:2283.93	%Sft	Rs:10018.00
				Total:-	Rs:1,28,029/-
<b>PART-B (PROVIDING AND FIXING OF PAVER BLOCK)</b>					
1.	2650.0Cft	Earth work excavation undressed lead upto a single throw of Kassi phawarah of shovel in ordinary soil ..etc	Rs:1361.25	%Ocft	Rs:3607.00
2.	2650.0Cft	Dressing and leveling of earth wok to designed section, in ordinary soil etc complete	Rs:187.55	%Ocft	Rs:497.00
3.	1325.0Cft	Supplying and filling pit sand under floor and plunging into wells...	Rs:1141.25	%Ocft	Rs:15122.
4.	875.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:98720.00
5.	2650.0Sft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quddra / cable shape with pigmented b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:657650.00
				Total:-	Rs:7,75,596.00

Amount Total (a+b) **Rs:9,03,625/-**

12/ %Above/Below On The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

1012061  
Total (A) = a + b in words (Ten Lac twelve Sixty One only)

Contractor

Executive Engineer / Procuring Agency

# Summary of Bill of Quantities

Cost of Bid

Amount 1012061

1 (A) Cost based on composite Schedule of Rate

\_\_\_\_\_

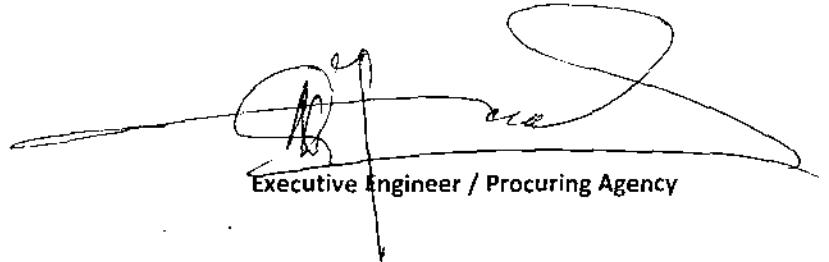
2 (B) Cost of based on Non / Offered Schedule of Rates.

\_\_\_\_\_

TOTAL COST OF BID (C) = TOTAL (A) + Total (B)

1012061

  
Contractor

  
Executive Engineer / Procuring Agency



**SINDH PUBLIC PROCUREMENT REGULATORY AUTHORITY**  
**CONTRACT EVALUATION FORM**

**TO BE FILLED IN BY ALL PROCURING AGENCIES FOR PUBLIC**  
**CONTRACTORS OF WORKS, SERVICES & GOODS.**

- 1). NAME OF THE ORGANIZATION / DEPTT. Town Committee, Chuhar Jamali, Sujawal
- 2). PROVINCIAL / LOCAL GOVT. / OTHER LOCAL GOVERNMENT
- 3). TITLE OF CONTRACT: "CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN FROM HYDRI CHOWK TO HAJI HASHIM HOUSE TOWN COMMITTEE CHUHAR JAMALI"
- 4) TENDER NUMBER: as above
- 5). BRIEF DESCRIPTION OF CONTRACT: CC Paver Block & CC Drain
- 6). FORUM THAT APPROVED THE SCHEME Town Committee, Chuhar Jamali
- 7). TENDER ESTIMATED VALUE Rs. 10,00,000/=
- 8). ENGINEER'S ESTIMATE PC -Cost Rs: 1000000/-  
(FOR CIVIL WORK ONLY)
- 9). ESTIMATED COMPLETION PERIOD (AS PER CONTRACT) (01) MONTH
- 10). TENDER OPENED ON DATE AND TIME 02-11-2017 AT 02:00 PM.
- 11). NUMBER OF TENDER DOCUMENTS SOLD (Attach list of buyers). 03
- 12). NUMBER OF BIDS RECEIVED 03
- 13). NUMBERS OF BIDDERS PRESENT AT THE TIME OF OPEINING OF BIDS 03
- 14). BID EVALUATION REPORT (Enclose a copy) YES
- 15). NAME AND ADDRESS OF THE SUCCESSFUL BIDDER. M/S Abdul Sattar Kehar
- 16). CONTRACT AWARD PRICE SANCTION RUPEES Rs: 999262/-
- 17). RANKING OF SUCCESSFUL BIDDER IN EVALUATION REPORT (I.E. 1ST 2ND 3RD EVALUATION BID). 1<sup>st</sup> Lowest M/S Abdul Sattar Kehar  
2<sup>nd</sup> LOWEST M/S Muhammad Juman Mandhrio  
3<sup>rd</sup> LOWEST M/S Mumtaz Hussain Soomro
- 18). METHOD OF PROCUREMENT USED: - (TICK ONE)
- A). SINGLE STAGE-ONE ENVELOPE PROCEDURE \_\_\_\_\_ ✓ \_\_\_\_\_
- B). SINGLE STAGE-TWO ENVELOPE PROCEDURE \_\_\_\_\_ \_\_\_\_\_

- C). TWO STAGE BIDDING PROCEDURE \_\_\_\_\_  
 D). TWO STAGE-TWO ENVELOPE BIDDING PROCEDURE \_\_\_\_\_

PLEASE SPECIFY IF ANY OTHER METHOD OF PROCUREMENT WAS ADOPTED i.e. EMERGENCY, DIRECT CONTRACTING ETC. WITH BRIEF REASONS.

19). PROVIDING AUTHORITY FOR AWARD OF CONTRACT CHAIRMAN TC, CHUHAR JAMALI

20). WHETHER THE PROCUREMENT WAS INCLUDED IN ANNUAL PROCUREMENT PLAN

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

21). ADVERTISEMENT:

- i) SPPRA Website  
 (if yes give date & SPPRA Identification No.

YES	<a href="http://www.pprasindhgov.pk">www.pprasindhgov.pk</a> SPPRA Tender SR No. 34792 Dt: 02-11-2017
-----	--

- ii) Newspapers  
 (if yes give names of newspapers & dates)

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

22). NATURE OF CONTRACT

DOMESTIC/ LOCAL	<input checked="" type="checkbox"/>	LOCAL	INT
-----------------	-------------------------------------	-------	-----

23). WHETHER QUALIFICATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?

(If yes, enclose copy).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

24). WHETHER BID EVALUATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?

(if, yes enclose a copy).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

25). WHETHER APPROVAL OF COMPETENT AUTHORITY WAS OBTAINED FOR USING A METHOD OTHER THAN OPEN COMPETITIVE BIDDING?

YES		NO	N/A
-----	--	----	-----

26). WAS BID SECURITY OBTAINED FROM ALL THE BIDDERS?

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

27). WHETHER THE SUCCESSFUL BID WAS LOWEST EVALUATED BID / BEST EVALUATED BID (In case of Consultancies).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

28). WHETHER THE SUCCESSFUL BIDDER WAS TECHNICALLY COMPLAINT?

YES		NO	N/A
-----	--	----	-----

29). WHETHER NAMES OF THE BIDDERS AND THEIR QUOTED PRICES WERE READ OUT AT THE TIME OF OPENING OF BIDS?

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

30). WHETHER EVALUATION REPORT GIVEN TO BIDDERS BEFORE THE AWARD OF CONTRACT?

(Attach a copy of the bid evaluation report).

- 31). ANY COMPLAINTS RECEIVED  
(if yes, result thereof). 

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--
- 32). ANY DEVIATION FROM SPECIFICATIONS GIVEN IN THE TENDER  
NOTICE / DOCUMENTS ( if yes, given details). 

YES		NO	N/A
-----	--	----	-----
- 33). WAS THE EXTENSION MADE IN RESPONSE TIME?  
(if yes, given reasons) 

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------
- 34). DEVIATION FROM QUALIFICATION CRITERIA  
(if yes, detailed reasons). 

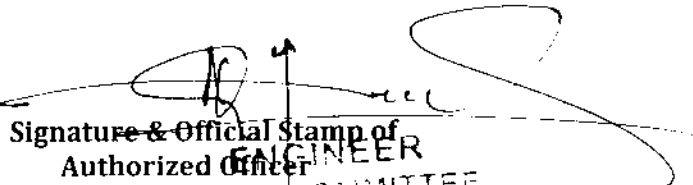
YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------
- 35). WAS IT ASSURED BY THE PROCURING AGENCY THAT THE SELECTED  
FIRM IS NOT BLACK LISTED? 

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------
- 36). WAS A VISIT MADE BY ANY OFFICER / OFFICIAL OF THE PROCURING  
AGENCY TO THE SUPPLIER'S PREMISES IN CONNECTION WITH THE PROCUREMENT?  
IF SO, DETAILS TO BE ASCERTAINED REGARDING FINANCING OF VISIT, IF ABROAD:  
(if yes, enclose a copy) 

YES		NO	N/A
-----	--	----	-----
- 37). WERE PROPER SAFEGUARDS PROVIDED ON MOBILIZATION ADVANCE PAYMENT IN THE  
CONTRACT ( BANK GUARANTEE ETC)? 

YES		NO	N/A
-----	--	----	-----
- 38). SPECIAL CONDITION, IF ANY  
(if yes, give Brief Description) 

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

  
Signature & Official Stamp of  
Authorized Officer  
ENGINEER  
TOWN COMMITTEE  
CHITRA JAMALI

FOR OFFICE USE ONLY  
**SPPRA, Block No. 8, Sindh Secretariat No. 4-A, Court Road, Karachi**  
Tel: 021-9205356, 021-9205369 & Fax No. 021-9206291.

# OFFICE OF THE TOWN COMMITTEE

## CHUHAR JAMALI

NO.T.C.C.J./T.O/ 43

/ 2017

Dated: 15/12/2017

M/s. ABDUL SATTAR KEHAR,  
GOVERNMENT CONTRACTOR

### LETTER OF ACCEPTANCE / SANCTION ORDER

**Subject:** CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN FROM HYDRI CHOWK TO  
HAJI HASHIM HOUSE TOWN COMMITTEE CHUHAR JAMALI

On behalf of the employer it is notified that following the approval of accepted of Chairman, Town Committee, Chuhar Jamali, vide Para 13 /No, your bid for the subject is hereby accepted for the sum of Rs:9,99,862/- (Rupees. NINE LAC NINETY NINE THOUSAND EIGHT HUNDRED SIXTY TWO ONLY) as approved by the competent authority Town Committee, Chuhar Jamali.

There is now binding contract between Town Committee, Chuhar Jamali and **M/s. Abdul Sattar Kehar,**

In accordance with the general condition of contract, you are required to enter in to and execute a contract agreement this agreement shall be signed by employer and **M/s. Abdul Sattar Kehar.**

In accordance with condition of contract as per SPPRA-2010 the 2% Bid security Rs:20,000/- and remaining 8% Security may deduct from bill.

All correspondence on onward shall be carried out though Town Officer, Town Committee, Chuhar Jamali.



TOWN OFFICER

TOWN COMMITTEE, CHUHAR JAMALI

Copy to:-

- 1- Chairman, Town Committee, Chuhar Jamali.
- 2- Assistant Executive Engineer, (Town Committee, Chuhar Jamali)
- 3- Office Copy.

# TOWN COMMITTEE CHUHAR JAMALI

## AGREEMENT

Subject: - CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN FROM HYDRI CHOWK TO HAJI HASHIM HOUSE TOWN COMMITTEE CHUHAR JAMALI

Cost Rs.9,99,862/-

Completion Time (03 Months) penalty \_\_\_\_\_

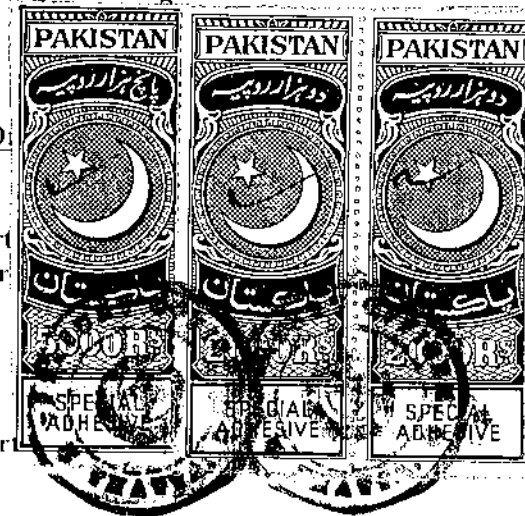
The Agreement is made on this 20<sup>th</sup> Dec day of 2017 at Thatta, between the Town Committee, Chuhar Jamali herein after called the Chuhar Jamali, Sujawal (Which expression shall mean and include his successors) on the one part and M/s. ABDUL SATTAR KEHAR, have the office at Chairman TC Chuhar Jamali through their proprietor \_\_\_\_\_ hereinafter call the "Contractor" (Which expression shall mean and include his successors, administrator and assignees) on the other part.

Whereas the Town Committee, Chuhar Jamali, has accepted the tender of the contractor for construction and completion of the work namely CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN FROM HYDRI CHOWK TO HAJI HASHIM HOUSE TOWN COMMITTEE CHUHAR JAMALI, at a cost of Rs.9,99,862/- within a period of (03 Month) and penalty Rs. \_\_\_\_\_ according to the specification and general conditions of the contract signed by the Contractor after having made himself full acquainted with their meaning.

And whereas the Contractor has already furnished with the Jamali the 2% bid amount of Rs.20,000/- (Rupees Twenty Thousand Only) as Performance security for the said contract.

The following documents after incorporating addenda, except those part bidders shall be deemed to form and be read and construed as part of this Agreement.

- a) The Contract Agreement;
- b) The Letter of Acceptance;
- c) The Completed form of Bid;
- d) The Standard and special Terms & Conditions of Contract – Part \_\_\_\_\_
- e) The priced Bill of Quantities



In consideration of the payments to be made by the Town Committee, Chuhar Jamali to the Contractor as hereinafter mentioned, the contractor hereby covenants with the Town Committee, Chuhar Jamali to execute and complete the works and remedy defects therein In conformity and in all respects with the provisions of the contract.

The Town Committee, Chuhar Jamali hereby covenants to pay the contractor, in consideration of the execution and completion of the works as per provisions of contract, the contract Price or such other sum as may become payable under the provisions of the contract at the time and in the manner prescribed by the contractor.

The contractor has given a lien to the Town Committee, Chuhar Jamali over the Security for due fulfillment of the contract and do hereby bind himself, his heirs, successors legal representative and assignee to pay to the Town Committee, Chuhar Jamali penalty through forfeiture of the said Security in case of breach of any condition of the Contract without prejudice to the right of Town Committee, Chuhar Jamali to recover the damages from the Contractor for any such breach as per condition of the contract.

Now therefore this agreement witnesses that the Town Committee, Chuhar Jamali and the Contractor shall respectively and shall well truly carry out and fulfill the contract and abide by all terms and conditions and specifications thereof.

In witness whereof the said parties have set their respective hands on this 20<sup>th</sup> of Dec 2017

Witness:

1. [Signature]
2. [Signature]

[Signature]  
Contractor  
ABDUL SATTAR KEHAR  
Govt. Contractor

[Signature]  
CHAIRMAN  
TOWN COMMITTEE, CHUHAR JAMALI

41407-2335478.7  
41407-6120583.3  
41407-5408062.5

NAME OF WORK: - CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN FROM HYDRI CHOWK TO HAJI HASHIM HOUSE TOWN COMMITTEE CHUHAR JAMALI

BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
<b>PART – A (CONSTRUCTION OF DRAIN)</b>					
1.	138.0Cft	Dismantling and removing Road Metalling...etc	Rs:605.00	%Cft	Rs:835.00
2.	9.38Cft	Dismantling of Brick work in lime or cement mortar ..etc complete	Rs:1285.63	%Cft	Rs:121.00
3.	6.25 Cft	Dismantling of CC plain 1:2:4..etc complete	Rs:3327.50	%Cft	Rs:208.00
4.	10.50Cft	Dismantling of C.C Reinforced separating Reinforcement from concrete, cleaning and straitening the same ...etc complete	Rs:5445.00	%Cft	Rs:572.00
5.	603.50Cft	Excavation in foundation of building and bridges and others structure i/c dag bellig dressing and refilling ground structure with excavated earth watering and ramming lead up to 5 ft in ordinary soil.	Rs:3176.25	%Ocf	Rs:1914.00
6.	150.60Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 1/5(f)	Rs:11288.75	%Cft	Rs:17004.00
7.	964.0Sft	Erection and removal of centering for RCC work ....etc complete	Rs:3127.41	%Sft	Rs:30148.00
8.	241.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 1/5(f)	Rs:12595.00	%Cft	Rs:30354.00
9.	26.40Cft	RCC work in roof slab, beams coloums rafts, lintels and others structural member laid in situ or precast laid in position complete in all respects (b) ratio 1:2:4 90 lbs cement 2Cft sand 4cft shingle 1/8" to 1/4" gauge (G.Sch: P-No: It/No:	Rs:337.00	P.Cft	Rs:8897.0
10.	1.06Cwt	Fabrication of mild steel reinforcement for cement concrete including cutting, bending laying in position, making joints and fastening including cost of binding wire (also includes removal of rust bars ) using tor bars(G.Sch:P-No:16 lt/No:8(b).	Rs:5001.70	P.Cwt	Rs:5305.00

11.	241.0Rft	Construction of standard open type drains connuttee block of C.C 1:2:4 cost of situ to the design profile i.c cost of mould as per drawing i/c supplying floating cost of cement 1/32" thick to expose surface finished smooth curing complete as per drawing design..etc complete	Rs:94.00	P.Rft	Rs:22654.00
12.	439.0Cft	Cement plaster 1:4 up to 12' height 1/2" thick (G.Sch: P-No:51 lt/No:11(b).	Rs:2283.93	%Sft	Rs:10018.00
				Total:-	Rs:1,28,029/-
<b>PART-B (PROVIDING AND FIXING OF PAVER BLOCK)</b>					
1.	2650.0Cft	Earth work excavation undressed lead upto a single throw of Kassi phawarah of shovel in ordinary soil ..etc	Rs:1361.25	%Ocft	Rs:3607.00
2.	2650.0Cft	Dressing and leveling of earth wok to designed section, in ordinary soil etc complete	Rs:187.55	%Ocft	Rs:497.00
3.	1325.0Cft	Supplying and filling pit sand under floor and plunging into wells...	Rs:1141.25	%Ocft	Rs:15122.
4.	875.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:98720.00
5.	2650.0Sft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quddra / cable shape with pigmented b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:657650.00
				Total:-	Rs:7,75,596.00

Amount Total (a+b) Rs:9,03,625/-

10.65%  
999862  
%Above/Below On The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

Total (A) = a + b in words

*Nine lac Ninety nine Thousand Eight hundred Sixty two only*

Contractor  
*R. S. K*

*N. J. S.*  
Executive Engineer / Procuring Agency

## Summary of Bill of Quantities

Cost of Bid

Amount 999862 -

1 (A) Cost based on composite Schedule of Rate

\_\_\_\_\_

2 (B) Cost of based on Non / Offered Schedule of Rates.

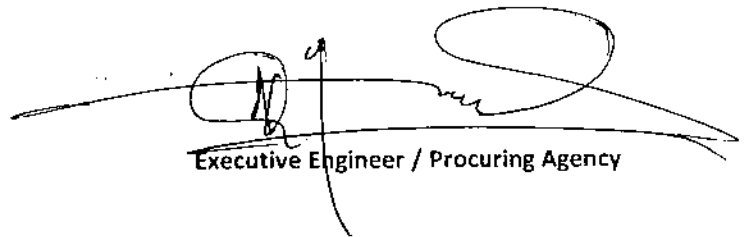
\_\_\_\_\_

TOTAL COST OF BID (C) = TOTAL (A) + Total (B)

999862 -



Contractor



Executive Engineer / Procuring Agency



NAME OF WORK: - CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN FROM HYDRI CHOWK TO HAJI HASHIM HOUSE TOWN COMMITTEE CHUHAR JAMALI

BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
<b>PART – A (CONSTRUCTION OF DRAIN)</b>					
1.	138.0Cft	Dismantling and removing Road Metalling...etc	Rs:605.00	%Cft	Rs:835.00
2.	9.38Cft	Dismantling of Brick work in lime or cement mortar ..etc complete	Rs:1285.63	%Cft	Rs:121.00
3.	6.25 Cft	Dismantling of CC plain 1:2:4..etc complete	Rs:3327.50	%Cft	Rs:208.00
4.	10.50Cft	Dismantling of C.C Reinforced separating Reinforcement from concrete, cleaning and straitening the same ...etc complete	Rs:5445.00	%Cft	Rs:572.00
5.	603.50Cft	Excavation in foundation of building and bridges and others structure i/c dag bellig dressing and refilling ground structure with excavated earth watering and ramming lead up to 5'ft in ordinary soil.	Rs:3176.25	%Ocft	Rs:1914.00
6.	150.60Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:17004.00
7.	964.0Sft	Erection and removal of centering for RCC work ....etc complete	Rs:3127.41	%Sft	Rs:30148.00
8.	241.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:12595.00	%Cft	Rs:30354.00
9.	26.40Cft	RCC work in roof slab, beams coloums rafts, lintels and others structural member laid in situ or precast laid in position complete in all respects (b) ratio 1:2:4 90 lbs cement 2Cft sand 4cft shingle 1/8" to ¼" gauge (G.Sch: P-No: It/No:	Rs:337.00	P.Cft	Rs:8897.0
10.	1.06Cwt	Fabrication of mild steel reinforcement for cement concrete including cutting, bending laying in position, making joints and fastening including cost of binding wire (also includes removal of rust bars ) using tor bars(G.Sch:P-No:16 It/No:8(b).	Rs:5001.70	P.Cwt	Rs:5305.00

11.	241.0Rft	Construction of standard open type drains connuttee block of C.C 1:2:4 cost of situ to the design profile i.c cost of mould as per drawing i/c supplying floating cost of cement 1/32" thick to expose surface finished smooth curing complete as per drawing design..etc complete	Rs:94.00	P.Rft	Rs:22654.00
12.	439.0Cft	Cement plaster 1:4 up to 12' height ½" thick (G.Sch: P-No:51 It/No:11(b).	Rs:2283.93	%Sft	Rs:10018.00
				Total:-	Rs:1,28,029/-
<b>PART-B (PROVIDING AND FIXING OF PAVER BLOCK)</b>					
1.	2650.0Cft	Earth work excavation undressed lead upto a single throw of Kassi phawarah of shovel in ordinary soil ..etc	Rs:1361.25	%Ocft	Rs:3607.00
2.	2650.0Cft	Dressing and leveling of earth wok to designed section, in ordinary soil etc complete	Rs:187.55	%Ocft	Rs:497.00
3.	1325.0Cft	Supplying and filling pit sand under floor and plunging into wells...	Rs:1141.25	%Ocft	Rs:15122.
4.	875.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:98720.00
5.	2650.0Sft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quddra / cable shape with pigmented b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:657650.00
				Total:-	Rs:7,75,596.00

Amount Total (a+b) Rs:9,03,625/-

%Above/Below On The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

Total (A) = a + b in words

Ten Lac Three Thousand

Contractor

Executive Engineer / Procuring Agency

# Summary of Bill of Quantities

Cost of Bid

Amount 1003024-

1 (A) Cost based on composite Schedule of Rate

\_\_\_\_\_

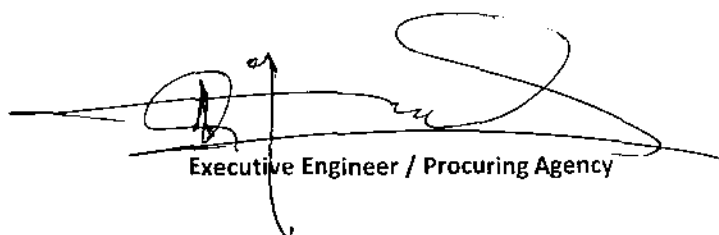
2 (B) Cost of based on Non / Offered Schedule of Rates.

\_\_\_\_\_

TOTAL COST OF BID (C) = TOTAL (A) + Total (B)

1003024

  
Contractor

  
Executive Engineer / Procuring Agency

NAME OF WORK: - CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN FROM HYDRI CHOWK TO HAJI HASHIM HOUSE TOWN COMMITTEE CHUHAR JAMALI

BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
<b>PART – A (CONSTRUCTION OF DRAIN)</b>					
1.	138.0Cft	Dismantling and removing Road Metalling...etc	Rs:605.00	%Cft	Rs:835.00
2.	9.38Cft	Dismantling of Brick work in lime or cement mortar ..etc complete	Rs:1285.63	%Cft	Rs:121.00
3.	6.25 Cft	Dismantling of CC plain 1:2:4..etc complete	Rs:3327.50	%Cft	Rs:208.00
4.	10.50Cft	Dismantling of C.C Reinforced separating Reinforcement from concrete, cleaning and straitening the same ...etc complete	Rs:5445.00	%Cft	Rs:572.00
5.	603.50Cft	Excavation in foundation of building and bridges and others structure i/c dag bellig dressing and refilling ground structure with excavated earth watering and ramming lead up to 5'ft in ordinary soil.	Rs:3176.25	%Ocft	Rs:1914.00
6.	150.60Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:17004.00
7.	964.05ft	Erection and removal of centering for RCC work ....etc complete	Rs:3127.41	%Sft	Rs:30148.00
8.	241.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:12595.00	%Cft	Rs:30354.00
9.	26.40Cft	RCC work in roof slab, beams coloums rafts, lintels and others structural member laid in situ or precast laid in position complete in all respects (b) ratio 1:2:4 90 lbs cement 2Cft sand 4cft shingle 1/8" to 1/4" gauge (G.Sch: P-No: It/No:	Rs:337.00	P.Cft	Rs:8897.0
10.	1.06Cwt	Fabrication of mild steel reinforcement for cement concrete including cutting, bending laying in position, making joints and fastening including cost of binding wire (also includes removal of rust bars ) using tor bars(G.Sch:P-No:16 It/No:8(b).	Rs:5001.70	P.Cwt	Rs:5305.00

11.	241.0Rft	Construction of standard open type drains connuttee block of C.C 1:2:4 cost of situ to the design profile i.c cost of mould as per drawing i/c supplying floating cost of cement 1/32" thick to expose surface finished smooth curing complete as per drawing design..etc complete	Rs:94.00	P.Rft	Rs:22654.00
12.	439.0Cft	Cement plaster 1:4 up to 12' height 1/2" thick (G.Sch: P-No:51 It/No:11(b).	Rs:2283.93	%Sft	Rs:10018.00
				Total:-	Rs:1,28,029/-
<b>PART-B (PROVIDING AND FIXING OF PAVER BLOCK)</b>					
1.	2650.0Cft	Earth work excavation undressed lead upto a single throw of Kassi phawarah of shovel in ordinary soil ..etc	Rs:1361.25	%Ocft	Rs:3607.00
2.	2650.0Cft	Dressing and leveling of earth wok to designed section, in ordinary soil etc complete	Rs:187.55	%Ocft	Rs:497.00
3.	1325.0Cft	Supplying and filling pit sand under floor and plunging into wells...	Rs:1141.25	%Ocft	Rs:15122.
4.	875.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:98720.00
5.	2650.0Sft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quddra / cable shape with pigmented b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:657650.00
				Total:-	Rs:7,75,596.00

Amount Total (a+b) Rs:9,03,625/-

*12/* %Above/Below On The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

Total (A) = a + b in words

*10/1206/-*

*Ten Lac Twelve Thousand Sixty me*

*Qoome*

Executive Engineer / Procuring Agency

# Summary of Bill of Quantities

Cost of Bid

Amount 1012061

1 (A) Cost based on composite Schedule of Rate

\_\_\_\_\_ /

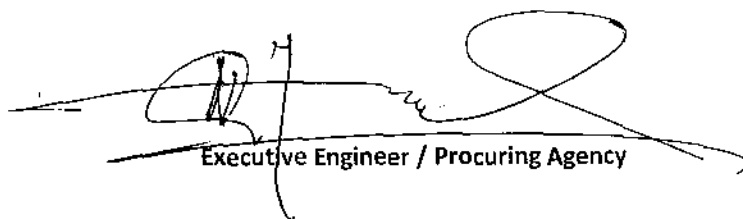
2 (B) Cost of based on Non / Offered Schedule of Rates.

\_\_\_\_\_ /

TOTAL COST OF BID (C) = TOTAL (A) + Total (B)

1012061 =

  
Contractor

  
Executive Engineer / Procuring Agency

**SINDH PUBLIC PROCUREMENT REGULATORY AUTHORITY**  
**CONTRACT EVALUATION FORM**

**TO BE FILLED IN BY ALL PROCURING AGENCIES FOR PUBLIC**  
**CONTRACTORS OF WORKS, SERVICES & GOODS.**

- 1). NAME OF THE ORGANIZATION / DEPTT. Town Committee, Chuhar Jamali, Sujawal
- 2). PROVINCIAL / LOCAL GOVT. / OTHER LOCAL GOVERNMENT
- 3). TITLE OF CONTRACT: **"CONSTRUCTION OF PAVER BLOCK I/C SURFACE DRAIN IN VARIOUS WARDS (PHASE-1) TOWN COMMITTEE CHUHAR JAMALI"**
- 4) TENDER NUMBER: as above
- 5). BRIEF DESCRIPTION OF CONTRACT: CC Paver Block
- 6). FORUM THAT APPROVED THE SCHEME Town Committee, Chuhar Jamali
- 7). TENDER ESTIMATED VALUE **Rs. 10,00,000/=**
- 8). ENGINEER'S ESTIMATE PC -Cost Rs: 1000000/-  
(FOR CIVIL WORK ONLY)
- 9). ESTIMATED COMPLETION PERIOD (AS PER CONTRACT) (01) MONTH
- 10). TENDER OPENED ON DATE AND TIME 02-11-2017 AT 02:00 PM.
- 11). NUMBER OF TENDER DOCUMENTS SOLD (Attach list of buyers). 03
- 12). NUMBER OF BIDS RECEIVED 03
- 13). NUMBERS OF BIDDERS PRESENT AT THE TIME OF OPENING OF BIDS 03
- 14). BID EVALUATION REPORT (Enclose a copy) YES
- 15). NAME AND ADDRESS OF THE SUCCESSFUL BIDDER. M/S Abdul Hakeem Chandio
- 16). CONTRACT AWARD PRICE SANCTION RUPEES Rs: 999862/-
- 17). RANKING OF SUCCESSFUL BIDDER IN EVALUATION REPORT (I.E. 1ST 2ND 3RD EVALUATION BID). **1<sup>st</sup> Lowest M/S Abdul Hakeem Chandio**  
**2<sup>nd</sup> LOWEST M/S Muhammad Iman Mandhrio**  
**3<sup>rd</sup> LOWEST M/S Mumtaz Hussain Soomro**
- 18). METHOD OF PROCUREMENT USED: - (TICK ONE)  
A). SINGLE STAGE-ONE ENVELOPE PROCEDURE ✓

- B). SINGLE STAGE-TWO ENVELOPE PROCEDURE \_\_\_\_\_  
 C). TWO STAGE BIDDING PROCEDURE \_\_\_\_\_  
 D). TWO STAGE-TWO ENVELOPE BIDDING PROCEDURE \_\_\_\_\_

PLEASE SPECIFY IF ANY OTHER METHOD OF PROCUREMENT WAS ADOPTED i.e. EMERGENCY, DIRECT CONTRACTING ETC. WITH BRIEF REASONS.

19). PROVIDING AUTHORITY FOR AWARD OF CONTRACT CHAIRMAN TC, CHUHAR JAMALI

20). WHETHER THE PROCUREMENT WAS INCLUDED IN ANNUAL PROCUREMENT PLAN

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

21). ADVERTISEMENT:

- i) SPPRA Website  
 (if yes give date & SPPRA Identification No.

YES	<a href="http://www.pprasindhgov.pk">www.pprasindhgov.pk</a> SPPRA Tender SR No. 34792 Dt: 02-11-2017
-----	--

- ii) Newspapers  
 (if yes give names of newspapers & dates)

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

22). NATURE OF CONTRACT

DOMESTIC/ LOCAL	<input checked="" type="checkbox"/> LOCAL	INT	
-----------------	---	-----	--

23). WHETHER QUALIFICATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?

(If yes, enclose copy).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

24). WHETHER BID EVALUATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?

(if, yes enclose a copy).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

25). WHETHER APPROVAL OF COMPETENT AUTHORITY WAS OBTAINED FOR USING A METHOD OTHER THAN OPEN COMPETITIVE BIDDING?

YES		NO	N/A
-----	--	----	-----

26). WAS BID SECURITY OBTAINED FROM ALL THE BIDDERS?

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

27). WHETHER THE SUCCESSFUL BID WAS LOWEST EVALUATED BID / BEST EVALUATED BID (In case of Consultancies).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

28). WHETHER THE SUCCESSFUL BIDDER WAS TECHNICALLY COMPLAINT?

YES		NO	N/A
-----	--	----	-----

29). WHETHER NAMES OF THE BIDDERS AND THEIR QUOTED PRICES WERE READ OUT AT THE TIME OF OPENING OF BIDS?

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

30). WHETHER EVALUATION REPORT GIVEN TO BIDDERS BEFORE THE AWARD OF CONTRACT?

(Attach a copy of the bid evaluation report).



YES	<input checked="" type="checkbox"/>	NO	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

31). ANY COMPLAINTS RECEIVED  
(if yes, result thereof).

YES	<input type="checkbox"/>	NO	<input type="checkbox"/>	N/A	<input type="checkbox"/>
-----	--------------------------	----	--------------------------	-----	--------------------------

32). ANY DEVIATION FROM SPECIFICATIONS GIVEN IN THE TENDER  
NOTICE / DOCUMENTS ( if yes, given details).

YES	<input type="checkbox"/>	NO	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

33). WAS THE EXTENSION MADE IN RESPONSE TIME?  
(if yes, given reasons)

YES	<input type="checkbox"/>	NO	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

34). DEVIATION FROM QUALIFICATION CRITERIA  
(if yes, detailed reasons).

YES	<input type="checkbox"/>	NO	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

35). WAS IT ASSURED BY THE PROCURING AGENCY THAT THE SELECTED  
FIRM IS NOT BLACK LISTED?

YES	<input type="checkbox"/>	NO	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

36). WAS A VISIT MADE BY ANY OFFICER / OFFICIAL OF THE PROCURING  
AGENCY TO THE SUPPLIER'S PREMISES IN CONNECTION WITH THE PROCUREMENT?  
IF SO, DETAILS TO BE ASCERTAINED REGARDING FINANCING OF VISIT, IF ABROAD:  
(if yes, enclose a copy)

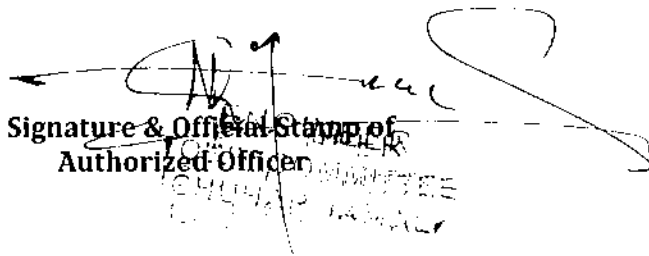
YES	<input type="checkbox"/>	NO	<input type="checkbox"/>	N/A	<input type="checkbox"/>
-----	--------------------------	----	--------------------------	-----	--------------------------

37). WERE PROPER SAFEGUARDS PROVIDED ON MOBILIZATION ADVANCE PAYMENT IN THE  
CONTRACT ( BANK GUARANTEE ETC)?

YES	<input type="checkbox"/>	NO	<input type="checkbox"/>	N/A	<input type="checkbox"/>
-----	--------------------------	----	--------------------------	-----	--------------------------

38). SPECIAL CONDITION, IF ANY  
(if yes, give Brief Description)

YES	<input type="checkbox"/>	NO	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

  
Signature & Official Stamp of  
Authorized Officer

FOR OFFICE USE ONLY

**SPPRA, Block No. 8, Sindh Secretariat No. 4-A, Court Road, Karachi**  
Tel: 021-9205356, 021-9205369 & Fax No. 021-9206291.

# OFFICE OF THE TOWN COMMITTEE

## CHUHAR JAMALI

NO.T.C.C.J./T.O/ 44

/2017

Dated: 15/12/2017

M/s. ABDUL HAKEEM CHANDIO,  
GOVERNMENT CONTRACTOR

### LETTER OF ACCEPTANCE / SANCTION ORDER

**Subject: CONSTRUCTION OF PAVER BLOCK I/C SURFACE DRAIN IN VARIOUS WARDS  
(PHASE-1)TOWN COMMITTEE CHUHAR JAMALI**

On behalf of the employer it is notified that following the approval of accepted of Chairman, Town Committee, Chuhar Jamali, vide Para 14 /No, your bid for the subject is hereby accepted for the sum of Rs:9,99,862/- (Rupees. NINE LAC NINETY NINE THOUSAND EIGHT HUNDRED SIXTY TWO ONLY) as approved by the competent authority Town Committee, Chuhar Jamali.

There is now binding contract between Town Committee, Chuhar Jamali and **M/s. Abdul Hakeem Chandio,**

In accordance with the general condition of contract, you are required to enter in to and execute a contract agreement this agreement shall be signed by employer and **M/s. Abdul Hakeem Chandio.**

In accordance with condition of contract as per SPPRA-2010 the 2% Bid security Rs:20,000/- and remaining 8% Security may deduct from bill.

All correspondence on onward shall be carried out though Town Officer, Town Committee, Chuhar Jamali.

  
**TOWN OFFICER**  
**TOWN COMMITTEE, CHUHAR JAMALI**

Copy to:-

- 1- Chairman, Town Committee, Chuhar Jamali.
- 2- Assistant Executive Engineer, (Town Committee, Chuhar Jamali)
- 3- Office Copy.

# TOWN COMMITTEE CHUHAR JAMALI

## AGREEMENT

Subject: - CONSTRUCTION OF PAVER BLOCK I/C SURFACE DRAIN IN VARIOUS WARDS (PHASE-1) TOWN COMMITTEE CHUHAR JAMALI

Cost Rs.9,99,862/-

Completion Time (03 Months) penalty \_\_\_\_\_

The Agreement is made on this 20<sup>th</sup> Dec day of 2017 at Thatta, between the Town Committee, Chuhar Jamali herein after called the Chuhar Jamali, Sujawal (Which expression shall mean and include his successors) on the one part and M/s. ABDUL HAKEEM CHANDIO office at \_\_\_\_\_ through their proprietor \_\_\_\_\_ hereinafter call the "Contractor" (Which expression shall mean and include his successors, administrators and assignees) on the other part.

Whereas the Town Committee, Chuhar Jamali, has accepted the tender of the contractor for construction and completion of the work namely CONSTRUCTION OF PAVER BLOCK I/C SURFACE DRAIN IN VARIOUS WARDS (PHASE-1) TOWN COMMITTEE CHUHAR JAMALI at a cost of Rs.9,99,862/- within a period of (03 Month) and penalty Rs. \_\_\_\_\_ according to the specification and general conditions of the contract signed by the Contractor after having made himself full acquainted with their meaning.

And whereas the Contractor has already furnished with the Town Committee, Chuhar Jamali the 2% bid amount of Rs.20,000/- (Rupees Twenty Thousand Only) on account of Bid Performance security for the said contract.

The following documents after incorporating addenda, except those parts relating to instructions to bidders shall be deemed to form and be read and construed as part of this Agreement, viz:

- a) The Contract Agreement;
- b) The Letter of Acceptance;
- c) The Completed form of Bid;
- d) The Standard and special Terms & Conditions of Contract - Part;
- e) The priced Bill of Quantities

In consideration of the payments to be made by the Town Committee, Chuhar Jamali to the Contractor as hereinafter mentioned, the contractor hereby covenants with the Town Committee, Chuhar Jamali to execute and complete the works and remedy defects therein In conformity and in all respects with the provisions of the contract.

The Town Committee, Chuhar Jamali hereby covenants to pay the contractor in consideration of the execution and completion of the works as per provisions of contract, the contract Price or such other sum as may become payable under the provisions of the contract at the time and in the manner prescribed by the contractor.

The contractor has given a lien to the Town Committee, Chuhar Jamali over the Security for due fulfillment of the contract and do hereby bind himself, his heirs, successors legal representative and assignee to pay to the Town Committee, Chuhar Jamali penalty through forfeiture of the said Security in case of breach of any condition of the Contract without prejudice to the right of Town Committee, Chuhar Jamali to recover the damages from the Contractor for any such breach as per condition of the contract.

Now therefore this agreement witnesses that the Town Committee, Chuhar Jamali and the Contractor shall respectively and shall well truly carry out and fulfill the contract and abide by all terms and conditions and specifications thereof.

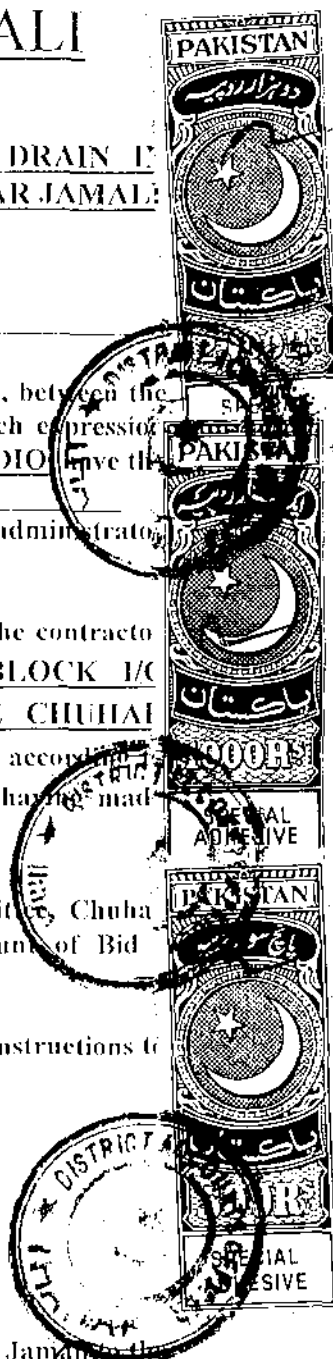
In witness whereof the said parties have set their respective hands on this 20<sup>th</sup> of Dec 2017

Witness:

1. Siraj Azeel Chandio \_\_\_\_\_  
Contractor

2. Shaban Mustafa Chaudhry

\_\_\_\_\_  
CHAIRMAN  
TOWN COMMITTEE, CHUHAR JAMALI



**DEPUTY KEEPER**  
**THATA**

NAME OF WORK: - CONSTRUCTION OF PAVER BLOCK I/C SURFACE DRAIN IN VARIOUS WARDS (PHASE-1)TOWN COMMITTEE CHUHAR JAMALI

BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
<b>PART – A (CONSTRUCTION OF DRAIN)</b>					
1.	138.0Cft	Dismantling and removing Road Metalling...etc	Rs:605.00	%Cft	Rs:835.00
2.	9.38Cft	Dismantling of Brick work in lime or cement mortar ..etc complete	Rs:1285.63	%Cft	Rs:121.00
3.	6.25 Cft	Dismantling of CC plain 1:2:4..etc complete	Rs:3327.50	%Cft	Rs:208.00
4.	10.50Cft	Dismantling of C.C Reinforced separating Reinforcement from concrete, cleaning and straitening the same ...etc complete	Rs:5445.00	%Cft	Rs:572.00
5.	603.50Cft	Excavation in foundation of building and bridges and others structure i/c dag bellig dressing and refilling ground structure with excavated earth watering and ramming lead up to 5'ft in ordinary soil.	Rs:3176.25	%Ocft	Rs:1914.00
6.	150.60Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:17004.00
7.	964.0Sft	Erection and removal of centering for RCC work ....etc complete	Rs:3127.41	%Sft	Rs:30148.00
8.	241.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:12595.00	%Cft	Rs:30354.00
9.	26.40Cft	RCC work in roof slab, beams coloums rafts, lintels and others structural member laid in situ or precast laid in position complete in all respects (b) ratio 1:2:4 90 lbs cement 2Cft sand 4cft shingle 1/8" to ¼" gauge (G.Sch: P-No: It/No:	Rs:337.00	P.Cft	Rs:8897.0
10.	1.06Cwt	Fabrication of mild steel reinforcement for cement concrete including cutting, bending laying in position, making joints and fastening including cost of binding wire (also includes removal of rust bars ) using tor bars(G.Sch:P-No:16 It/No:8(b).	Rs:5001.70	P.Cwt	Rs:5305.00

11.	241.0Rft	Construction of standard open type drains connuttee block of C.C 1:2:4 cost of situ to the design profile i.c cost of mould as per drawing i/c supplying floating cost of cement 1/32" thick to expose surface finished smooth curing complete as per drawing design..etc complete	Rs:94.00	P.Rft	Rs:22654.00
12.	439.0Cft	Cement plaster 1:4 up to 12' height ½" thick (G.Sch: P-No:51 It/No:11(b).	Rs:2283.93	%Sft	Rs:10018.00
				Total:-	Rs:1,28,029/-
<b>PART-B (PROVIDING AND FIXING OF PAVER BLOCK)</b>					
1.	2650.0Cft	Earth work excavation undressed lead upto a single throw of Kassi phawarah of shovel in ordinary soil ..etc	Rs:1361.25	%Ocft	Rs:3607.00
2.	2650.0Cft	Dressing and leveling of earth wok to designed section, in ordinary soil etc complete	Rs:187.55	%Ocft	Rs:497.00
3.	1325.0Cft	Supplying and filling pit sand under floor and plunging into wells...	Rs:1141.25	%Ocft	Rs:15122.
4.	875.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 l/5(f)	Rs:11288.75	%Cft	Rs:98720.00
5.	2650.0Sft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quddra / cable shape with pigmented b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:657650.00
				Total:-	Rs:7,75,596.00

Amount Total (a+b) Rs:9,03,625/-

10.65% Above/Below On The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

999862

Total (A) = a + b in words

Nine Lac Ninety Nine thousand Eight hundred Sixty two only.

AH...  
Contractor

Executive Engineer / Procuring Agency

Summary of Bill of Quantities

Cost of Bid

Amount 999862

1 (A) Cost based on composite Schedule of Rate

—

2 (B) Cost of based on Non / Offered Schedule of Rates.

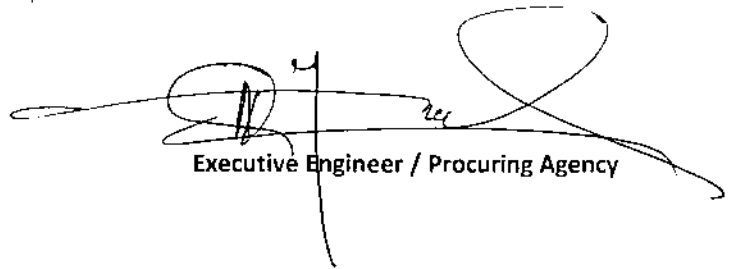
—

TOTAL COST OF BID (C) = TOTAL (A) + Total (B)

999862

*Al-Hadeed*

Contractor

  
Executive Engineer / Procuring Agency

NAME OF WORK: -

**CONSTRUCTION OF PAVER BLOCK 1/C SURFACE DRAIN IN VARIOUS  
WARDS (PHASE-1)TOWN COMMITTEE CHUHAR JAMALI**

**BILL OF QUANTITIES**

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
<b>PART – A (CONSTRUCTION OF DRAIN)</b>					
1.	138.0Cft	Dismantling and removing Road Metalling...etc	Rs:605.00	%Cft	Rs:835.00
2.	9.38Cft	Dismantling of Brick work in lime or cement mortar ..etc complete	Rs:1285.63	%Cft	Rs:121.00
3.	6.25 Cft	Dismantling of CC plain 1:2:4..etc complete	Rs:3327.50	%Cft	Rs:208.00
4.	10.50Cft	Dismantling of C.C Reinforced separating Reinforcement from concrete, cleaning and straitening the same ...etc complete	Rs:5445.00	%Cft	Rs:572.00
5.	603.50Cft	Excavation in foundation of building and bridges and others structure i/c dag bellig dressing and refilling ground structure with excavated earth watering and ramming lead up to 5'ft in ordinary soil.	Rs:3176.25	%Ocft	Rs:1914.00
6.	150.60Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:17004.00
7.	964.05ft	Erection and removal of centering for RCC work ....etc complete	Rs:3127.41	%Sft	Rs:30148.00
8.	241.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:12595.00	%Cft	Rs:30354.00
9.	26.40Cft	RCC work in roof slab, beams, coloums rafts, lintels and others structural member laid in situ or precast laid in position complete in all respects (b) ratio 1:2:4 90 lbs cement 2Cft sand 4cft shingle 1/8" to 1/4" gauge (G.Sch: P-No: It/No:	Rs:337.00	P.Cft	Rs:8897.0
10.	1.06Cwt	Fabrication of mild steel reinforcement for cement concrete including cutting, bending laying in position, making joints and fastening including cost of binding wire (also includes removal of rust bars ) using tor bars(G.Sch:P-No:16 It/No:8(b).	Rs:5001.70	P.Cwt	Rs:5305.00

11.	241.0Rft	Construction of standard open type drains connuttee block of C.C 1:2:4 cost of situ to the design profile i.c cost of mould as per drawing i/c supplying floating cost of cement 1/32" thick to expose surface finished smooth curing complete as per drawing design..etc complete	Rs:94.00	P.Rft	Rs:22654.00
12.	439.0Cft	Cement plaster 1:4 up to 12' height 1/2" thick (G.Sch: P-No:51 lt/No:11(b).	Rs:2283.93	%Sft	Rs:10018.00
				<b>Total:-</b>	<b>Rs:1,28,029/-</b>
<b>PART-B (PROVIDING AND FIXING OF PAVER BLOCK)</b>					
1.	2650.0Cft	Earth work excavation undressed lead upto a single throw of Kassi phawarah of shovel in ordinary soil ..etc	Rs:1361.25	%Ocft	Rs:3607.00
2.	2650.0Cft	Dressing and leveling of earth wok to designed section, in ordinary soil etc complete	Rs:187.55	%Ocft	Rs:497.00
3.	1325.0Cft	Supplying and filling pit sand under floor and plunging into wells...	Rs:1141.25	%Ocft	Rs:15122.
4.	875.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:98720.00
5.	2650.0Sft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quddra / cable shape with pigmented b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:657650.00
				<b>Total:-</b>	<b>Rs:7,75,596.00</b>

Amount Total (a+b) Rs:9,03,625/-

~~11%~~ %Above/Below On The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

Total (A) = a + b in words

1003024

Ten Lac Three Thousand  
Twenty four Only

Executive Engineer / Procuring Agency



Summary of Bill of Quantities

Cost of Bid

Amount 1003024

1 (A) Cost based on composite Schedule of Rate

2 (B) Cost of based on Non / Offered Schedule of Rates:

TOTAL COST OF BID (C) = TOTAL (A) + Total (B)

1003024

*[Handwritten Signature]*  
Contractor

*[Handwritten Signature]*  
Executive Engineer / Procuring Agency

NAME OF WORK: -

**CONSTRUCTION OF PAVER BLOCK I/C SURFACE DRAIN IN VARIOUS  
WARDS (PHASE-1)TOWN COMMITTEE CHUHAR JAMALI**

**BILL OF QUANTITIES**

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
<b>PART – A (CONSTRUCTION OF DRAIN)</b>					
1.	138.0Cft	Dismantling and removing Road Metalling...etc	Rs:605.00	%Cft	Rs:835.00
2.	9.38Cft	Dismantling of Brick work in lime or cement mortar ..etc complete	Rs:1285.63	%Cft	Rs:121.00
3.	6.25 Cft	Dismantling of CC plain 1:2:4..etc complete	Rs:3327.50	%Cft	Rs:208.00
4.	10.50Cft	Dismantling of C.C Reinforced separating Reinforcement from concrete, cleaning and straitening the same ...etc complete	Rs:5445.00	%Cft	Rs:572.00
5.	603.50Cft	Excavation in foundation of building and bridges and others structure i/c dag bellig dressing and refilling ground structure with excavated earth watering and ramming lead up to 5'ft in ordinary soil.	Rs:3176.25	%Ocft	Rs:1914.00
6.	150.60Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:17004.00
7.	964.0Sft	Erection and removal of centering for RCC work ....etc complete	Rs:3127.41	%Sft	Rs:30148.00
8.	241.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:12595.00	%Cft	Rs:30354.00
9.	26.40Cft	RCC work in roof slab, beams coloums rafts, lintels and others structural member laid in situ or precast laid in position complete in all respects (b) ratio 1:2:4 90 lbs cement 2Cft sand 4cft shingle 1/8" to 1/2" gauge (G.Sch: P-No: It/No:	Rs:337.00	P.Cft	Rs:8897.0
10.	1.06Cwt	Fabrication of mild steel reinforcement for cement concrete including cutting, bending laying in position, making joints and fastening including cost of binding wire (also includes removal of rust bars ) using tor bars(G.Sch:P-No:16 It/No:8(b).	Rs:5001.70	P.Cwt	Rs:5305.00

11.	241.0Rft	Construction of standard open type drains connuttee block of C.C 1:2:4 cost of situ to the design profile i.c cost of mould as per drawing i/c supplying floating cost of cement 1/32" thick to expose surface finished smooth curing complete as per drawing design..etc complete	Rs:94.00	P.Rft	Rs:22654.00
12.	439.0Cft	Cement plaster 1:4 up to 12' height ½" thick (G.Sch: P-No:51 It/No:11(b).	Rs:2283.93	%Sft	Rs:10018.00
				Total:-	Rs:1,28,029/-
<b>PART-B (PROVIDING AND FIXING OF PAVER BLOCK)</b>					
1.	2650.0Cft	Earth work excavation undressed lead upto a single throw of Kassi phawarah of shovel in ordinary soil ..etc	Rs:1361.25	%Ocft	Rs:3607.00
2.	2650.0Cft	Dressing and leveling of earth wok to designed section, in ordinary soil etc complete	Rs:187.55	%Ocft	Rs:497.00
3.	1325.0Cft	Supplying and filling pit sand under floor and plunging into wells...	Rs:1141.25	%Ocft	Rs:15122.
4.	875.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 l/5(f)	Rs:11288.75	%Cft	Rs:98720.00
5.	2650.0Sft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quddra / cable shape with pigmented b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:657650.00
				Total:-	Rs:7,75,596.00

Amount Total (a+b) Rs:9,03,625/-

1012061

Amount to be Added/Deducted on the basis of premium quoted Total (b)

12% %Above/Below On The Schedule Rates of CSR.

Total (A) = a + b in words

Ten Lac Twelve thousand Sixty One only

Executive Engineer / Procuring Agency

Contractor

Summary of Bill of Quantities

Cost of Bid

Amount 1012061

1 (A) Cost based on composite Schedule of Rate

\_\_\_\_\_

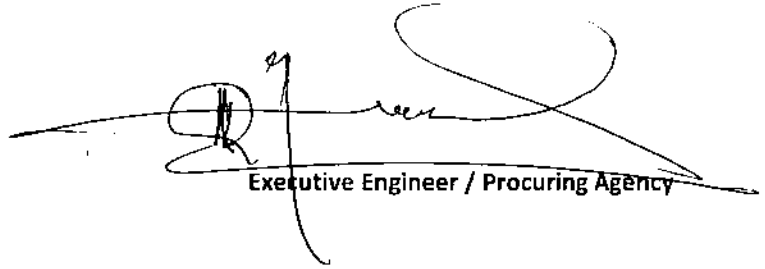
2 (B) Cost of based on Non / Offered Schedule of Rates.

\_\_\_\_\_

TOTAL COST OF BID (C) = TOTAL (A) + Total (B)

1012061

  
Contractor

  
Executive Engineer / Procuring Agency

**SINDH PUBLIC PROCUREMENT REGULATORY AUTHORITY**  
**CONTRACT EVALUATION FORM**

**TO BE FILLED IN BY ALL PROCURING AGENCIES FOR PUBLIC**  
**CONTRACTORS OF WORKS, SERVICES & GOODS.**

- 1). NAME OF THE ORGANIZATION / DEPTT. Town Committee, Chuhar Jamali, Sujawal
- 2). PROVINCIAL / LOCAL GOVT. / OTHER LOCAL GOVERNMENT
- 3). TITLE OF CONTRACT: "CONSTRUCTION OF PAVER BLOCK I/C SURFACE DRAIN IN VARIOUS WARDS (PHASE-2) TOWN COMMITTEE CHUHAR JAMALI"
- 4) TENDER NUMBER: as above
- 5). BRIEF DESCRIPTION OF CONTRACT: CC Paver Block
- 6). FORUM THAT APPROVED THE SCHEME Town Committee, Chuhar Jamali
- 7). TENDER ESTIMATED VALUE Rs. 10,00,000/=
- 8). ENGINEER'S ESTIMATE PC - Cost Rs: 1000000/-  
(FOR CIVIL WORK ONLY)
- 9). ESTIMATED COMPLETION PERIOD (AS PER CONTRACT) (0 1) MONTH
- 10). TENDER OPENED ON DATE AND TIME 02-11-2017 AT 02:00 PM.
- 11). NUMBER OF TENDER DOCUMENTS SOLD (Attach list of buyers). 03
- 12). NUMBER OF BIDS RECEIVED 03
- 13). NUMBERS OF BIDDERS PRESENT AT THE TIME OF OPEINING OF BIDS 03
- 14). BID EVALUATION REPORT (Enclose a copy) YES
- 15). NAME AND ADDRESS OF THE SUCCESSFUL BIDDER. M/S Abdul Hakeem Chandio
- 16). CONTRACT AWARD PRICE SANCTION RUPEES Rs: 999862 /-
- 17). RANKING OF SUCCESSFUL BIDDER IN EVALUATION REPORT (I.E. 1ST 2ND 3RD EVALUATION BID). 1<sup>st</sup> Lowest M/S Abdul Hakeem Chandio  
2<sup>nd</sup> LOWEST M/S Muhammad Iman Mandhrio  
3<sup>rd</sup> LOWEST M/S Mumtaz Hussain Soomro
- 18). METHOD OF PROCUREMENT USED: - (TICK ONE)
- A). SINGLE STAGE-ONE ENVELOPE PROCEDURE \_\_\_\_\_ ✓ \_\_\_\_\_
- B). SINGLE STAGE-TWO ENVELOPE PROCEDURE \_\_\_\_\_
- C). TWO STAGE BIDDING PROCEDURE \_\_\_\_\_

D). TWO STAGE-TWO ENVELOPE BIDDING PROCEDURE

PLEASE SPECIFY IF ANY OTHER METHOD OF PROCUREMENT WAS ADOPTED i.e. EMERGENCY, DIRECT CONTRACTING ETC. WITH BRIEF REASONS.

19). PROVIDING AUTHORITY FOR AWARD OF CONTRACT CHAIRMAN TC, CHUHAR JAMALI

20). WHETHER THE PROCUREMENT WAS INCLUDED IN ANNUAL PROCUREMENT PLAN

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

21). ADVERTISEMENT:

i) SPPRA Website  
(if yes give date & SPPRA Identification No.

YES	<a href="http://www.pprasindhgov.pk">www.pprasindhgov.pk</a>
	SPPRA Tender SR No. 34792 Dt: 02-11-2017

ii) Newspapers  
(if yes give names of newspapers & dates)

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

22). NATURE OF CONTRACT

DOMESTIC/ LOCAL	<input checked="" type="checkbox"/>	LOCAL	INT	
-----------------	-------------------------------------	-------	-----	--

23). WHETHER QUALIFICATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?

(If yes, enclose copy).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

24). WHETHER BID EVALUATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?

(if, yes enclose a copy).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

25). WHETHER APPROVAL OF COMPETENT AUTHORITY WAS OBTAINED FOR USING A METHOD OTHER THAN OPEN COMPETITIVE BIDDING?

YES		NO	N/A
-----	--	----	-----

26). WAS BID SECURITY OBTAINED FROM ALL THE BIDDERS?

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

27). WHETHER THE SUCCESSFUL BID WAS LOWEST EVALUATED BID / BEST EVALUATED BID (In case of Consultancies).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

28). WHETHER THE SUCCESSFUL BIDDER WAS TECHNICALLY COMPLAINT?

YES		NO	N/A
-----	--	----	-----

29). WHETHER NAMES OF THE BIDDERS AND THEIR QUOTED PRICES WERE READ OUT AT THE TIME OF OPENING OF BIDS?

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

30). WHETHER EVALUATION REPORT GIVEN TO BIDDERS BEFORE THE AWARD OF CONTRACT?

(Attach a copy of the bid evaluation report).

31). ANY COMPLAINTS RECEIVED  
(if yes, result thereof).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

YES		NO	N/A
-----	--	----	-----

32). ANY DEVIATION FROM SPECIFICATIONS GIVEN IN THE TENDER  
NOTICE / DOCUMENTS ( if yes, given details).

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

33). WAS THE EXTENSION MADE IN RESPONSE TIME?  
(if yes, given reasons)

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

34). DEVIATION FROM QUALIFICATION CRITERIA  
(if yes, detailed reasons).

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

35). WAS IT ASSURED BY THE PROCURING AGENCY THAT THE SELECTED  
FIRM IS NOT BLACK LISTED?

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

36). WAS A VISIT MADE BY ANY OFFICER / OFFICIAL OF THE PROCURING  
AGENCY TO THE SUPPLIER'S PREMISES IN CONNECTION WITH THE PROCUREMENT?  
IF SO, DETAILS TO BE ASCERTAINED REGARDING FINANCING OF VISIT, IF ABROAD:  
(if yes, enclose a copy)

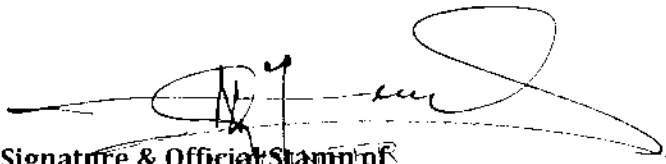
YES		NO	N/A
-----	--	----	-----

37). WERE PROPER SAFEGUARDS PROVIDED ON MOBILIZATION ADVANCE PAYMENT IN THE  
CONTRACT ( BANK GUARANTEE ETC)?

YES		NO	N/A
-----	--	----	-----

38). SPECIAL CONDITION, IF ANY  
(if yes, give Brief Description)

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

  
Signature & Official Stamp of  
Authorized Officer  
TOWNSHIP COMMITTEE  
CHUHAR JAMALI

FOR OFFICE USE ONLY

**SPPRA, Block No. 8, Sindh Secretariat No. 4-A, Court Road, Karachi**  
Tel: 021-9205356, 021-9205369 & Fax No. 021-9206291.

# OFFICE OF THE TOWN COMMITTEE

## CHUHAR JAMALI

NO.T.C.C.J./T.O/ 45

/ 2017

Dated: 15/12/2017

M/s. ABDUL HAKEEM CHANDIO,  
GOVERNMENT CONTRACTOR

### LETTER OF ACCEPTANCE / SANCTION ORDER

**Subject: CONSTRUCTION OF PAVER BLOCK I/C SURFACE DRAIN IN VARIOUS WARDS  
(PHASE-2)TOWN COMMITTEE CHUHAR JAMALI**

On behalf of the employer it is notified that following the approval of accepted of Chairman, Town Committee, Chuhar Jamali, vide Para 15 /No, your bid for the subject is hereby accepted for the sum of Rs:9,99,862/- (Rupees. NINE LAC NINETY NINE THOUSAND EIGHT HUNDRED SIXTY TWO ONLY) as approved by the competent authority Town Committee, Chuhar Jamali.

There is now binding contract between Town Committee, Chuhar Jamali and M/s. **Abdul Hakeem Chandio**,

In accordance with the general condition of contract, you are required to enter in to and execute a contract agreement this agreement shall be signed by employer and M/s. **Abdul Hakeem Chandio**.

In accordance with condition of contract as per SPPRA-2010 the 2% Bid security Rs:20,000/- and remaining 8% Security may deduct from bill.

All correspondence on onward shall be carried out though Town Officer, Town Committee, Chuhar Jamali.

  
TOWN OFFICER

TOWN COMMITTEE, CHUHAR JAMALI

Copy to:-

- 1- Chairman, Town Committee, Chuhar Jamali.
- 2- Assistant Executive Engineer, (Town Committee, Chuhar Jamali)
- 3- Office Copy.



# TOWN COMMITTEE CHUHAR JAMALI

## AGREEMENT

Subject: - CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN MEMON MOHALLA WARD NO-7 PHASE-2 TOWN COMMITTEE CHUHAR JAMALI

Cost Rs.9,99,862/-

Completion Time (03 Months) \_\_\_\_\_ penalty \_\_\_\_\_

The Agreement is made on this 20th day of Dec 2017, at Thatta, between the Town Committee, Chuhar Jamali herein after called the Chuhar Jamali, Supawal (Which expression shall mean and include his successors) on the one part and M/s. ABDUL HAKEEM CHANDIO, have the office at Chairman T.C. Chuhar Jamali through their proprietor hereinafter call the "Contractor" (Which expression shall mean and include his successors, administrators, and assignees) on the other part.

Whereas the Town Committee, Chuhar Jamali, has accepted the tender of the contractor for construction and completion of the work namely CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN MEMON MOHALLA WARD NO-7 PHASE-2 TOWN COMMITTEE CHUHAR JAMALI, at a cost of Rs.9,99,862/- within a period of (03 Month) and penalty Rs. \_\_\_\_\_ according to the specification and general conditions of the contract signed by the Contractor after having made himself full acquainted with their meaning.

And whereas the Contractor has already furnished with the Town Committee, Chuhar Jamali the 2% bid amount of Rs.20,000/- (Rupees Twenty Thousand Only) on account of Performance security for the said contract.

The following documents after incorporating addenda, except those parts relating to instructions to bidders shall be deemed to form and be read and construed as part of this Agreement, viz:

- a) The Contract Agreement;
- b) The Letter of Acceptance;
- c) The Completed form of Bid;
- d) The Standard and special Terms & Conditions of Contract – Part;
- e) The priced Bill of Quantities

In consideration of the payments to be made by the Town Committee, Chuhar Jamali to the Contractor as hereinafter mentioned, the contractor hereby covenants with the Town Committee, Chuhar Jamali to execute and complete the works and remedy defects therein In conformity and in all respects with the provisions of the contract.

The Town Committee, Chuhar Jamali hereby covenants to pay the contractor, in consideration of the execution and completion of the works as per provisions of contract, the contract Price or such other sum as may become payable under the provisions of the contract at the time and in the manner prescribed by the contractor.

The contractor has given a lien to the Town Committee, Chuhar Jamali over the Security for due fulfillment of the contract and do hereby bind himself, his heirs, successors legal representative and assignee to pay to the Town Committee, Chuhar Jamali penalty through forfeiture of the said Security in case of breach of any condition of the Contract without prejudice to the right of Town Committee, Chuhar Jamali to recover the damages from the Contractor for any such breach as per condition of the contract.

Now therefore this agreement witnesses that the Town Committee, Chuhar Jamali and the Contractor shall respectively and shall well truly carry out and fulfill the contract and abide by all terms and conditions and specifications thereof.

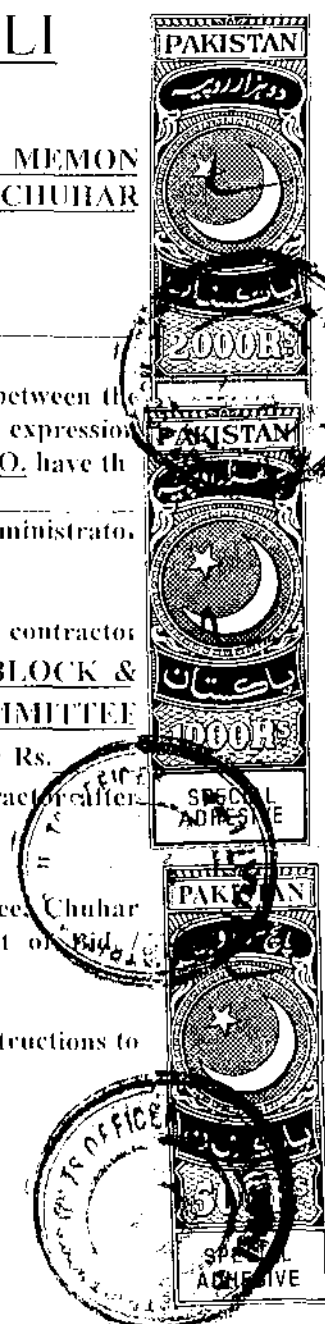
In witness whereof the said parties have set their respective hands on this 20th of Dec 2017

Witness:

1. Sajid Ahmad Chandio \_\_\_\_\_  
Contractor

2. Chuhar Jamali \_\_\_\_\_

Chairman  
TOWN COMMITTEE, CHUHAR JAMALI



DEPUTY KEEPER  
S.A.O. THATA

NAME OF WORK: - CONSTRUCTION OF PAVER BLOCK I/C SURFACE DRAIN IN VARIOUS WARDS (PHASE-2)TOWN COMMITTEE CHUHAR JAMALI

BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
<b>PART – A (CONSTRUCTION OF DRAIN)</b>					
1.	138.0Cft	Dismantling and removing Road Metalling...etc	Rs:605.00	%Cft	Rs:835.00
2.	9.38Cft	Dismantling of Brick work in lime or cement mortar ..etc complete	Rs:1285.63	%Cft	Rs:121.00
3.	6.25 Cft	Dismantling of CC plain 1:2:4..etc complete	Rs:3327.50	%Cft	Rs:208.00
4.	10.50Cft	Dismantling of C.C Reinforced separating Reinforcement from concrete, cleaning and straitening the same ...etc complete	Rs:5445.00	%Cft	Rs:572.00
5.	603.50Cft	Excavation in foundation of building and bridges and others structure i/c dag bellig dressing and refilling ground structure with excavated earth watering and ramming lead up to 5'ft in ordinary soil.	Rs:3176.25	%Ocft	Rs:1914.00
6.	150.60Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:17004.00
7.	964.0Sft	Erection and removal of centering for RCC work ....etc complete	Rs:3127.41	%Sft	Rs:30148.00
8.	241.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:12595.00	%Cft	Rs:30354.00
9.	26.40Cft	RCC work in roof slab, beams coloums rafts, lintels and others structural member laid in situ or precast laid in position complete in all respects (b) ratio 1:2:4 90 lbs cement 2Cft sand 4cft shingle 1/8" to 1/2" gauge (G.Sch: P-No: It/No:	Rs:337.00	P.Cft	Rs:8897.0
10.	1.06Cwt	Fabrication of mild steel reinforcement for cement concrete including cutting, bending laying in position, making joints and fastening including cost of binding wire (also includes removal of rust bars ) using tor bars(G.Sch:P-No:16 It/No:8(b).	Rs:5001.70	P.Cwt	Rs:5305.00

11.	241.0Rft	Construction of standard open type drains connuttee block of C.C 1:2:4 cost of situ to the design profile i.c cost of mould as per drawing i/c supplying floating cost of cement 1/32" thick to expose surface finished smooth curing complete as per drawing design..etc complete	Rs:94.00	P.Rft	Rs:22654.00
12.	439.0Cft	Cement plaster 1:4 up to 12' height ½" thick (G.Sch: P-No:51 It/No:11(b).	Rs:2283.93	%Sft	Rs:10018.00
				Total:-	Rs:1,28,029/-
<b>PART-B (PROVIDING AND FIXING OF PAVER BLOCK)</b>					
1.	2650.0Cft	Earth work excavation undressed lead upto a single throw of Kassi phawarah of shovel in ordinary soil ..etc	Rs:1361.25	%Ocft	Rs:3607.00
2.	2650.0Cft	Dressing and leveling of earth wok to designed section, in ordinary soil etc complete	Rs:187.55	%Ocft	Rs:497.00
3.	1325.0Cft	Supplying and filling pit sand under floor and plunging into wells...	Rs:1141.25	%Ocft	Rs:15122.
4.	875.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 1/5(f)	Rs:11288.75	%Cft	Rs:98720.00
5.	2650.0Sft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quddra / cable shape with pigmented b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:657650.00
				Total:-	Rs:7,75,596.00

Amount Total (a+b) Rs:9,03,625/-

10.65% Above/Below On The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

Total (A) = a + b in words

999862 Nine Lac Ninety Nine thousand Eight hundred Sixty two

*AKR*  
Contractor

*[Signature]*  
Executive Engineer / Procuring Agency

Summary of Bill of Quantities

Cost of Bid

Amount 999862

1 (A) Cost based on composite Schedule of Rate

—

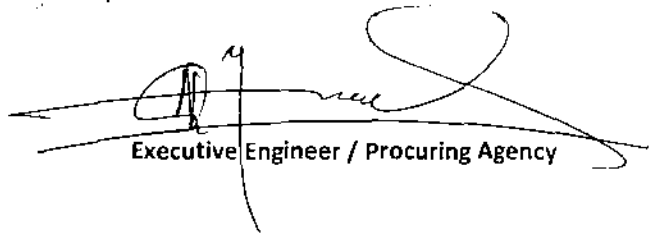
2 (B) Cost of based on Non / Offered Schedule of Rates.

—

TOTAL COST OF BID (C) = TOTAL (A) + Total (B)

999862

*AH New*  
Contractor

  
Executive Engineer / Procuring Agency

NAME OF WORK: - CONSTRUCTION OF PAVER BLOCK I/C SURFACE DRAIN IN VARIOUS WARDS (PHASE-2)TOWN COMMITTEE CHUHAR JAMALI

BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
<b>PART – A (CONSTRUCTION OF DRAIN)</b>					
1.	138.0Cft	Dismantling and removing Road Metalling...etc	Rs:605.00	%Cft	Rs:835.00
2.	9.38Cft	Dismantling of Brick work in lime or cement mortar ..etc complete	Rs:1285.63	%Cft	Rs:121.00
3.	6.25 Cft	Dismantling of CC plain 1:2:4..etc complete	Rs:3327.50	%Cft	Rs:208.00
4.	10.50Cft	Dismantling of C.C Reinforced separating Reinforcement from concrete, cleaning and straitening the same ...etc complete	Rs:5445.00	%Cft	Rs:572.00
5.	603.50Cft	Excavation in foundation of building and bridges and others structure i/c dag bellig dressing and refilling ground structure with excavated earth watering and ramming lead up to 5 ft in ordinary soil.	Rs:3176.25	%Ocft	Rs:1914.00
6.	150.60Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:17004.00
7.	964.0Sft	Erection and removal of centering for RCC work ....etc complete	Rs:3127.41	%Sft	Rs:30148.00
8.	241.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:12595.00	%Cft	Rs:30354.00
9.	26.40Cft	RCC work in roof slab, beams coloums rafts, lintels and others structural member laid in situ or precast laid in position complete in all respects (b) ratio 1:2:4 90 lbs cement 2Cft sand 4cft shingle 1/8" to 3/4" gauge (G.Sch: P-No: It/No:	Rs:337.00	P.Cft	Rs:8897.0
10.	1.06Cwt	Fabrication of mild steel reinforcement for cement concrete including cutting, bending laying in position, making joints and fastening including cost of binding wire (also includes removal of rust bars ) using tor bars(G.Sch:P-No:16 It/No:8(b).	Rs:5001.70	P.Cwt	Rs:5305.00

11.	241.0Rft	Construction of standard open type drains connuttee block of C.C 1:2:4 cost of situ to the design profile i.c cost of mould as per drawing i/c supplying floating cost of cement 1/32" thick to expose surface finished smooth curing complete as per drawing design..etc complete	Rs:94.00	P.Rft	Rs:22654.00
12.	439.0Cft	Cement plaster 1:4 up to 12' height 1/2" thick (G.Sch: P-No:51 It/No:11(b).	Rs:2283.93	%Sft	Rs:10018.00
				Total:-	Rs:1,28,029/-

**PART-B (PROVIDING AND FIXING OF PAVER BLOCK)**

1.	2650.0Cft	Earth work excavation undressed lead upto a single throw of Kassi phawarah of shovel in ordinary soil ..etc	Rs:1361.25	%Ocft	Rs:3607.00
2.	2650.0Cft	Dressing and leveling of earth wok to designed section, in ordinary soil etc complete	Rs:187.55	%Ocft	Rs:497.00
3.	1325.0Cft	Supplying and filling pit sand under floor and plunging into wells...	Rs:1141.25	%Ocft	Rs:15122.
4.	875.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:98720.00
5.	2650.0Sft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quddra / cable shape with pigmented b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:657650.00
				Total:-	Rs:7,75,596.00

Amount Total (a+b) Rs:9,03,625/-

*[Signature]*  
11% %Above/Below On The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

Total (A) = a + b in words

1003024 Ten Lac Three thousand twenty four only

*[Signature]*  
Contractor

*[Signature]*  
Executive Engineer / Procuring Agency

Summary of Bill of Quantities

Cost of Bid

Amount 1003024

1 (A) Cost based on composite Schedule of Rate

\_\_\_\_\_

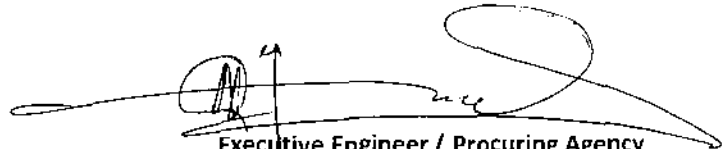
2 (B) Cost of based on Non / Offered Schedule of Rates.

\_\_\_\_\_

TOTAL COST OF BID (C) = TOTAL (A) + Total (B)

1003024

  
Contractor

  
Executive Engineer / Procuring Agency

NAME OF WORK: - CONSTRUCTION OF PAVER BLOCK I/C SURFACE DRAIN IN VARIOUS WARDS (PHASE-2)TOWN COMMITTEE CHUHAR JAMALI

BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
<b>PART – A (CONSTRUCTION OF DRAIN)</b>					
1.	138.0Cft	Dismantling and removing Road Metalling...etc	Rs:605.00	%Cft	Rs:835.00
2.	9.38Cft	Dismantling of Brick work in lime or cement mortar ..etc complete	Rs:1285.63	%Cft	Rs:121.00
3.	6.25 Cft	Dismantling of CC plain 1:2:4..etc complete	Rs:3327.50	%Cft	Rs:208.00
4.	10.50Cft	Dismantling of C.C Reinforced separating Reinforcement from concrete, cleaning and straitening the same ...etc complete	Rs:5445.00	%Cft	Rs:572.00
5.	603.50Cft	Excavation in foundation of building and bridges and others structure i/c dag bellig dressing and refilling ground structure with excavated earth watering and ramming lead up to 5'ft in ordinary soil.	Rs:3176.25	%Cft	Rs:1914.00
6.	150.60Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:17004.00
7.	964.05ft	Erection and removal of centering for RCC work ....etc complete	Rs:3127.41	%Sft	Rs:30148.00
8.	241.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:12595.00	%Cft	Rs:30354.00
9.	26.40Cft	RCC work in roof slab, beams coloums rafts, lintels and others structural member laid in situ or precast laid in position complete in all respects (b) ratio 1:2:4 90 lbs cement 2Cft sand 4cft shingle 1/8" to 3/4" gauge (G.Sch: P-No: It/No:	Rs:337.00	P.Cft	Rs:8897.0
10.	1.06Cwt	Fabrication of mild steel reinforcement for cement concrete including cutting, bending laying in position, making joints and fastening including cost of binding wire (also includes removal of rust bars ) using tor bars(G.Sch:P-No:16 It/No:8(b).	Rs:5001.70	P.Cwt	Rs:5305.00



11.	241.0Rft	Construction of standard open type drains connuttee block of C.C 1:2:4 cost of situ to the design profile i.c cost of mould as per drawing i/c supplying floating cost of cement 1/32" thick to expose surface finished smooth curing complete as per drawing design..etc complete	Rs:94.00	P.Rft	Rs:22654.00
12.	439.0Cft	Cement plaster 1:4 up to 12' height 1/2" thick (G.Sch: P-No:51 lt/No:11(b).	Rs:2283.93	%Sft	Rs:10018.00
				Total:-	Rs:1,28,029/-
<b>PART-B (PROVIDING AND FIXING OF PAVER BLOCK)</b>					
1.	2650.0Cft	Earth work excavation undressed lead upto a single throw of Kassi phawarah of shovel in ordinary soil ..etc	Rs:1361.25	%Ocft	Rs:3607.00
2.	2650.0Cft	Dressing and leveling of earth wok to designed section, in ordinary soil etc complete	Rs:187.55	%Ocft	Rs:497.00
3.	1325.0Cft	Supplying and filling pit sand under floor and plunging into wells...	Rs:1141.25	%Ocft	Rs:15122.
4.	875.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 l/5(f)	Rs:11288.75	%Cft	Rs:98720.00
5.	2650.0Sft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quddra / cable shape with pigmented b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:657650.00
				Total:-	Rs:7,75,596.00

Amount Total (a+b) **Rs:9,03,625/-**

12 %Above/Below On The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

Total (A) = a + b in words 1012061

Thousand

Ten Lac + Twelve  
Sixty One Only)

  
Contractor

Executive Engineer / Procuring Agency

Summary of Bill of Quantities

Cost of Bid

Amount 1012061

1 (A) Cost based on composite Schedule of Rate

\_\_\_\_\_

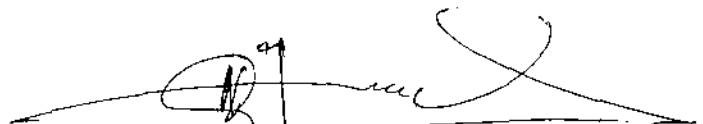
2 (B) Cost of based on Non / Offered Schedule of Rates.

\_\_\_\_\_

TOTAL COST OF BID (C) = TOTAL (A) + Total (B)

1012061

  
Contractor

  
Executive Engineer / Procuring Agency

**SINDH PUBLIC PROCUREMENT REGULATORY AUTHORITY**  
**CONTRACT EVALUATION FORM**

**TO BE FILLED IN BY ALL PROCURING AGENCIES FOR PUBLIC**  
**CONTRACTORS OF WORKS, SERVICES & GOODS.**

- 1). NAME OF THE ORGANIZATION / DEPTT. Town Committee, Chuhar Jamali, Sujawal
- 2). PROVINCIAL / LOCAL GOVT. / OTHER LOCAL GOVERNMENT
- 3). TITLE OF CONTRACT: "CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN VARIOUS WARDS (PHASE-1) TOWN COMMITTEE CHUHAR JAMALI"
- 4) TENDER NUMBER: as above
- 5). BRIEF DESCRIPTION OF CONTRACT: CC Paver Block & CC Drain
- 6). FORUM THAT APPROVED THE SCHEME Town Committee, Chuhar Jamali
- 7). TENDER ESTIMATED VALUE Rs. 10,00,000/=
- 8). ENGINEER'S ESTIMATE PC -Cost Rs: 1000000/-  
(FOR CIVIL WORK ONLY)
- 9). ESTIMATED COMPLETION PERIOD (AS PER CONTRACT) (0 1) MONTH
- 10). TENDER OPENED ON DATE AND TIME 02-11-2017 AT 02:00 PM.
- 11). NUMBER OF TENDER DOCUMENTS SOLD 03  
(Attach list of buyers).
- 12). NUMBER OF BIDS RECEIVED 03
- 13). NUMBERS OF BIDDERS PRESENT AT THE TIME OF OPEINING OF BIDS 03
- 14). BID EVALUATION REPORT YES  
(Enclose a copy)
- 15). NAME AND ADDRESS OF THE SUCCESSFUL BIDDER. M/S Liaqat Ali & Company
- 16). CONTRACT AWARD PRICE SANCTION RUPEES Rs: 999862/-
- 17). RANKING OF SUCCESSFUL BIDDER IN EVALUATION REPORT 1<sup>st</sup> Lowest M/S Liaqat Ali & Company  
(I.E. 1ST 2ND 3RD EVALUATION BID). 2<sup>nd</sup> LOWEST M/S Muhammad Juman Mandhrio  
3<sup>rd</sup> LOWEST M/S Mumtaz Hussain Soomro
- 18). METHOD OF PROCUREMENT USED: - (TICK ONE)
- A). SINGLE STAGE-ONE ENVELOPE PROCEDURE \_\_\_\_\_ ✓ \_\_\_\_\_
- B). SINGLE STAGE-TWO ENVELOPE PROCEDURE \_\_\_\_\_
- C). TWO STAGE BIDDING PROCEDURE \_\_\_\_\_

D). TWO STAGE-TWO ENVELOPE BIDDING PROCEDURE \_\_\_\_\_

PLEASE SPECIFY IF ANY OTHER METHOD OF PROCUREMENT WAS ADOPTED i.e. EMERGENCY, DIRECT CONTRACTING ETC. WITH BRIEF REASONS.

19). PROVIDING AUTHORITY FOR AWARD OF CONTRACT CHAIRMAN TC, CHUHAR JAMALI

20). WHETHER THE PROCUREMENT WAS INCLUDED IN ANNUAL PROCUREMENT PLAN

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

21). ADVERTISEMENT:

i) SPPRA Website  
(if yes give date & SPPRA Identification No.

YES	<a href="http://www.pprasindhgov.pk">www.pprasindhgov.pk</a> SPPRA Tender SR No. 34792 Dt: 02-11-2017
-----	--

ii) Newspapers  
(if yes give names of newspapers & dates)

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

22). NATURE OF CONTRACT

DOMESTIC/ LOCAL	<input checked="" type="checkbox"/> LOCAL	INT	
-----------------	---	-----	--

23). WHETHER QUALIFICATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?

(If yes, enclose copy).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

24). WHETHER BID EVALUATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?

(if, yes enclose a copy).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

25). WHETHER APPROVAL OF COMPETENT AUTHORITY WAS OBTAINED FOR USING A METHOD OTHER THAN OPEN COMPETITIVE BIDDING?

YES		NO	N/A
-----	--	----	-----

26). WAS BID SECURITY OBTAINED FROM ALL THE BIDDERS?

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

27). WHETHER THE SUCCESSFUL BID WAS LOWEST EVALUATED BID / BEST EVALUATED BID (In case of Consultancies).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

28). WHETHER THE SUCCESSFUL BIDDER WAS TECHNICALLY COMPLAINT?

YES		NO	N/A
-----	--	----	-----

29). WHETHER NAMES OF THE BIDDERS AND THEIR QUOTED PRICES WERE READ OUT AT THE TIME OF OPENING OF BIDS?

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

30). WHETHER EVALUATION REPORT GIVEN TO BIDDERS BEFORE THE AWARD OF CONTRACT?

(Attach a copy of the bid evaluation report).

31). ANY COMPLAINTS RECEIVED  
(if yes, result thereof).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

32). ANY DEVIATION FROM SPECIFICATIONS GIVEN IN THE TENDER  
NOTICE / DOCUMENTS ( if yes, given details).

YES		NO	N/A
-----	--	----	-----

33). WAS THE EXTENSION MADE IN RESPONSE TIME?  
(if yes, given reasons)

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

34). DEVIATION FROM QUALIFICATION CRITERIA  
(if yes, detailed reasons).

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

34). DEVIATION FROM QUALIFICATION CRITERIA  
(if yes, detailed reasons).

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

35). WAS IT ASSURED BY THE PROCURING AGENCY THAT THE SELECTED  
FIRM IS NOT BLACK LISTED?

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

36). WAS A VISIT MADE BY ANY OFFICER / OFFICIAL OF THE PROCURING  
AGENCY TO THE SUPPLIER'S PREMISES IN CONNECTION WITH THE PROCUREMENT?  
IF SO, DETAILS TO BE ASCERTAINED REGARDING FINANCING OF VISIT, IF ABROAD:  
(if yes, enclose a copy)

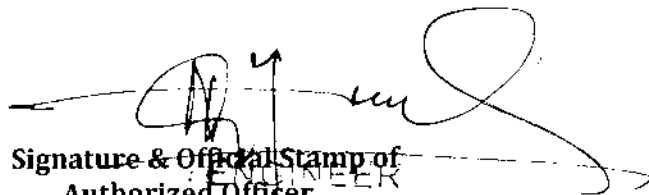
YES		NO	N/A
-----	--	----	-----

37). WERE PROPER SAFEGUARDS PROVIDED ON MOBILIZATION ADVANCE PAYMENT IN THE  
CONTRACT ( BANK GUARANTEE ETC)?

YES		NO	N/A
-----	--	----	-----

38). SPECIAL CONDITION, IF ANY  
(if yes, give Brief Description)

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

  
Signature & Official Stamp of  
Authorized Officer  
ENGINEER  
TOWN COMMITTEE  
CHUHAR WAPDA

FOR OFFICE USE ONLY

**SPPRA, Block No. 8, Sindh Secretariat No. 4-A, Court Road, Karachi**

**Tel: 021-9205356, 021-9205369 & Fax No. 021-9206291.**

# OFFICE OF THE TOWN COMMITTEE

## CHUHAR JAMALI

NO.T.C.C.J./T.O/ 46

/ 2017

Dated: 15/12/2017

M/s. LIAQAT ALI & COMPANY,  
GOVERNMENT CONTRACTOR

### LETTER OF ACCEPTANCE / SANCTION ORDER

**Subject: CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN VARIOUS WARDS  
(PHASE-1) TOWN COMMITTEE CHUHAR JAMALI**


On behalf of the employer it is notified that following the approval of accepted of Chairman, Town Committee, Chuhar Jamali, vide Para 16 /No, your bid for the subject is hereby accepted for the sum of Rs:9,99,862/- (Rupees. NINE LAC NINETY NINE THOUSAND EIGHT HUNDRED SIXTY TWO ONLY) as approved by the competent authority Town Committee, Chuhar Jamali.

There is now binding contract between Town Committee, Chuhar Jamali and **M/s. Liaqat Ali & Company,**

In accordance with the general condition of contract, you are required to enter in to and execute a contract agreement this agreement shall be signed by employer and **M/s. Liaqat Ali & Company.**

In accordance with condition of contract as per SPPRA-2010 the 2% Bid security Rs:20,000/- and remaining 8% Security may deduct from bill.

All correspondence on onward shall be carried out though Town Officer, Town Committee, Chuhar Jamali.

  
TOWN OFFICER  
TOWN COMMITTEE, CHUHAR JAMALI

Copy to:-

- 1- Chairman, Town Committee, Chuhar Jamali.
- 2- Assistant Executive Engineer, (Town Committee, Chuhar Jamali)
- 3- Office Copy.

# TOWN COMMITTEE CHUHAR JAMALI

## AGREEMENT

Subject: CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN VARIOUS WARDS (PHASE-1) TOWN COMMITTEE CHUHAR JAMALI

Cost Rs.9,99,862/-

Completion Time (03 Months) penalty \_\_\_\_\_

The Agreement is made on this 20th Dec day of 2017 at Thatta, between the Town Committee, Chuhar Jamali herein after called the Chuhar Jamali, Sujawal (Which expression shall mean and include his successors) on the one part and M/s. LIAQUAT ALI & COMPANY, have the office at Chairman Te Chuhar Jamali through their proprietor \_\_\_\_\_ hereinafter call the "Contractor" (Which expression shall mean and include his successors, administrators and assignees) on the other part.

Whereas the Town Committee, Chuhar Jamali, has accepted the tender of the contractor for construction and completion of the work namely CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN VARIOUS WARDS (PHASE-1) TOWN COMMITTEE CHUHAR JAMALI a cost of Rs.9,99,862/- within a period of (03 Month) and penalty Rs. \_\_\_\_\_ according to the specification and general conditions of the contract signed by the Contractor after having made himself full acquainted with their meaning.

And whereas the Contractor has already furnished with the Town Committee, Chuhar Jamali the 2% bid amount of Rs.20,000/- (Rupees Twenty Thousand Only) on account of Bid Performance security for the said contract.

The following documents after incorporating addenda, except those parts relating to instructions to bidders shall be deemed to form and be read and construed as part of this Agreement, viz:

- a) The Contract Agreement;
- b) The Letter of Acceptance;
- c) The Completed form of Bid;
- d) The Standard and special Terms & Conditions of Contract -- Part;
- e) The priced Bill of Quantities

In consideration of the payments to be made by the Town Committee, Chuhar Jamali to the Contractor as hereinafter mentioned, the contractor hereby covenants with the Town Committee Chuhar Jamali to execute and complete the works and remedy defects therein in conformity and in all respects with the provisions of the contract.

The Town Committee, Chuhar Jamali hereby covenants to pay the contractor, in consideration of the execution and completion of the works as per provisions of contract, the contract Price or such other sum as may become payable under the provisions of the contract at the time and in the manner prescribed by the contractor.

The contractor has given a lien to the Town Committee, Chuhar Jamali over the Security for due fulfillment of the contract and do hereby bind himself, his heirs, successors legal representatives and assignee to pay to the Town Committee, Chuhar Jamali penalty through forfeiture of the Security in case of breach of any condition of the Contract without prejudice to the right of Town Committee, Chuhar Jamali to recover the damages from the Contractor for any such breach as per condition of the contract.

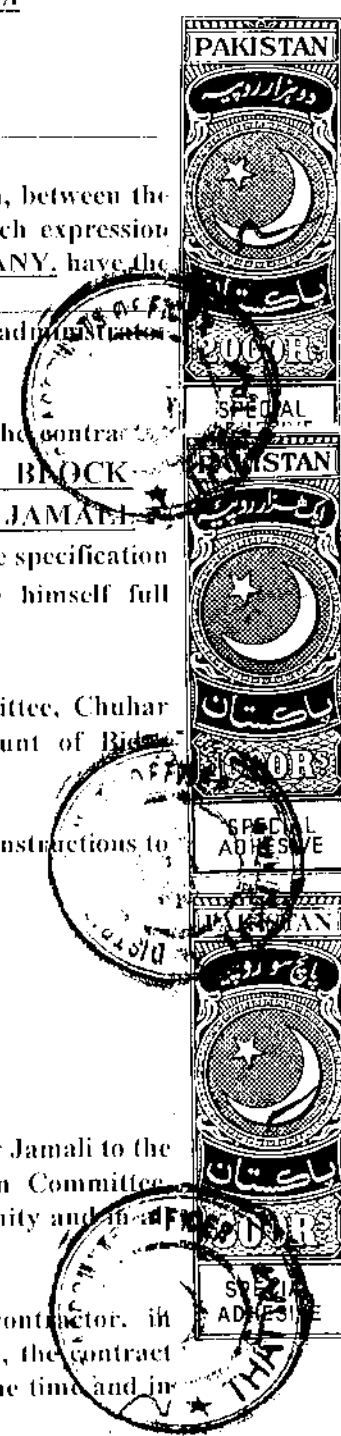
Now therefore this agreement witnesses that the Town Committee, Chuhar Jamali and the Contractor shall respectively and shall well truly carry out and fulfill the contract and abide by all terms and conditions and specifications thereof.

In witness whereof the said parties have set their respective hands on this 20th of Dec 2017

Witness:  
 1. M. Hassam  
 2. Ghulam Mustafa

Sajjad Ali  
 Contractor

[Signature]  
 CHAIRMAN  
 TOWN COMMITTEE, CHUHAR JAMALI



**NOT KEPT**  
 B.A.O. Thatta  
[Signature]

NAME OF WORK: - CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN VARIOUS WARDS  
(PHASE-1) TOWN COMMITTEE CHUHAR JAMALI

BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
<b>PART – A (CONSTRUCTION OF DRAIN)</b>					
1.	138.0Cft	Dismantling and removing Road Metalling...etc	Rs:605.00	%Cft	Rs:835.00
2.	9.38Cft	Dismantling of Brick work in lime or cement mortar ..etc complete	Rs:1285.63	%Cft	Rs:121.00
3.	6.25 Cft	Dismantling of CC plain 1:2:4..etc complete	Rs:3327.50	%Cft	Rs:208.00
4.	10.50Cft	Dismantling of C.C Reinforced separating Reinforcement from concrete, cleaning and straitening the same ...etc complete	Rs:5445.00	%Cft	Rs:572.00
5.	603.50Cft	Excavation in foundation of building and bridges and others structure i/c dag bellig dressing and refilling ground structure with excavated earth watering and ramming lead up to 5'ft in ordinary soil.	Rs:3176.25	%Ocft	Rs:1914.00
6.	150.60Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:17004.00
7.	964.0Sft	Erection and removal of centering for RCC work ....etc complete	Rs:3127.41	%Sft	Rs:30148.00
8.	241.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:12595.00	%Cft	Rs:30354.00
9.	26.40Cft	RCC work in roof slab, beams coloums rafts, lintels and others structural member laid in situ or precast laid in position complete in all respects (b) ratio 1:2:4 90 lbs cement 2Cft sand 4cft shingle 1/8" to 1/4" gauge (G.Sch: P-No: It/No:	Rs:337.00	P.Cft	Rs:8897.0
10.	1.06Cwt	Fabrication of mild steel reinforcement for cement concrete including cutting, bending laying in position, making joints and fastening including cost of binding wire (also includes removal of rust bars ) using tor bars(G.Sch:P-No:16 It/No:8(b).	Rs:5001.70	P.Cwt	Rs:5305.00



11.	241.0Rft	Construction of standard open type drains connuttee block of C.C 1:2:4 cost of situ to the design profile i.c cost of mould as per drawing i/c supplying floating cost of cement 1/32" thick to expose surface finished smooth curing complete as per drawing design..etc complete	Rs:94.00	P.Rft	Rs:22654.00
12.	439.0Cft	Cement plaster 1:4 up to 12' height 1/2" thick (G.Sch: P-No:51 lt/No:11(b).	Rs:2283.93	%Sft	Rs:10018.00
				Total:-	Rs:1,28,029/-
<b>PART-B (PROVIDING AND FIXING OF PAVER BLOCK)</b>					
1.	2650.0Cft	Earth work excavation undressed lead upto a single throw of Kassi phawarah of shovel in ordinary soil ..etc	Rs:1361.25	%Ocft	Rs:3607.00
2.	2650.0Cft	Dressing and leveling of earth wok to designed section, in ordinary soil etc complete	Rs:187.55	%Ocft	Rs:497.00
3.	1325.0Cft	Supplying and filling pit sand under floor and plunging into wells...	Rs:1141.25	%Ocft	Rs:15122.
4.	875.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 1/5(f)	Rs:11288.75	%Cft	Rs:98720.00
5.	2650.0Sft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quddra / cable shape with pigmented b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:657650.00
				Total:-	Rs:7,75,596.00

Amount Total (a+b) Rs:9,03,625/-

*10.65%* %Above/Below On The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

Total (A) = a + b in words

*Nine Lac Ninety Nine Thousand Eight hundred Sixty Two*

Contractor

*Sargandi*

Executive Engineer / Procuring Agency

Summary of Bill of Quantities

Cost of Bid

Amount 999862

1 (A) Cost based on composite Schedule of Rate

\_\_\_\_\_

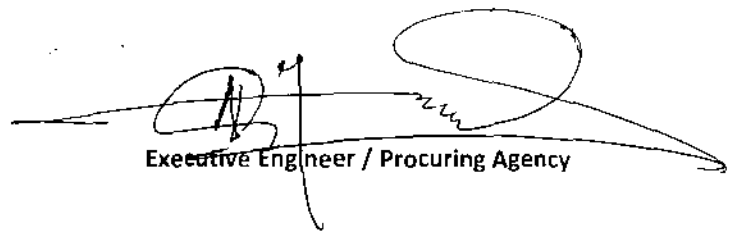
2 (B) Cost of based on Non / Offered Schedule of Rates.

\_\_\_\_\_

TOTAL COST OF BID (C) = TOTAL (A) + Total (B)

999862

*Liagotti*  
Contractor

  
Executive Engineer / Procuring Agency

NAME OF WORK: - **CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN VARIOUS WARDS  
(PHASE-1) TOWN COMMITTEE CHUHAR JAMALI**

**BILL OF QUANTITIES**

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
<b>PART – A (CONSTRUCTION OF DRAIN)</b>					
1.	138.0Cft	Dismantling and removing Road Metalling...etc	Rs:605.00	%Cft	Rs:835.00
2.	9.38Cft	Dismantling of Brick work in lime or cement mortar ..etc complete	Rs:1285.63	%Cft	Rs:121.00
3.	6.25 Cft	Dismantling of CC plain 1:2:4..etc complete	Rs:3327.50	%Cft	Rs:208.00
4.	10.50Cft	Dismantling of C.C Reinforced separating Reinforcement from concrete, cleaning and straitening the same ...etc complete	Rs:5445.00	%Cft	Rs:572.00
5.	603.50Cft	Excavation in foundation of building and bridges and others structure i/c dag bellig dressing and refilling ground structure with excavated earth watering and ramming lead up to 5 ft in ordinary soil.	Rs:3176.25	%Ocft	Rs:1914.00
6.	150.60Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:17004.00
7.	964.0Sft	Erection and removal of centering for RCC work ....etc complete	Rs:3127.41	%Sft	Rs:30148.00
8.	241.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:12595.00	%Cft	Rs:30354.00
9.	26.40Cft	RCC work in roof slab, beams coloums rafts, lintels and others structural member laid in situ or precast laid in position complete in all respects (b) ratio 1:2:4 90 lbs cement 2Cft sand 4cft shingle 1/8" to 3/4" gauge (G.Sch: P-No: It/No:	Rs:337.00	P.Cft	Rs:8897.0
10.	1.06Cwt	Fabrication of mild steel reinforcement for cement concrete including cutting, bending laying in position, making joints and fastening including cost of binding wire (also includes removal of rust bars ) using tor bars(G.Sch:P-No:16 It/No:8(b).	Rs:5001.70	P.Cwt	Rs:5305.00

11.	241.0Rft	Construction of standard open type drains connuttee block of C.C 1:2:4 cost of situ to the design profile i.c cost of mould as per drawing i/c supplying floating cost of cement 1/32" thick to expose surface finished smooth curing complete as per drawing design..etc complete	Rs:94.00	P.Rft	Rs:22654.00
12.	439.0Cft	Cement plaster 1:4 up to 12' height ½" thick (G.Sch: P-No:51 It/No:11(b).	Rs:2283.93	%Sft	Rs:10018.00
				Total:-	Rs:1,28,029/-
<b>PART-B (PROVIDING AND FIXING OF PAVER BLOCK)</b>					
1.	2650.0Cft	Earth work excavation undressed lead upto a single throw of Kassi phawarah of shovel in ordinary soil ..etc	Rs:1361.25	%Ocft	Rs:3607.00
2.	2650.0Cft	Dressing and leveling of earth wok to designed section, in ordinary soil etc complete	Rs:187.55	%Ocft	Rs:497.00
3.	1325.0Cft	Supplying and filling pit sand under floor and plunging into wells...	Rs:1141.25	%Ocft	Rs:15122.
4.	875.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:98720.00
5.	2650.0Sft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quddra / cable shape with pigmented b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:657650.00
				Total:-	Rs:7,75,596.00

Amount Total (a+b) **Rs:9,03,625/-**

%Above/Below On The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

Total (A) = a + b in words

Ten lac Three hundred  
Twenty four) and

Executive Engineer / Procuring Agency



NAME OF WORK: - **CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN VARIOUS WARDS  
(PHASE-1) TOWN COMMITTEE CHUHAR JAMALI**

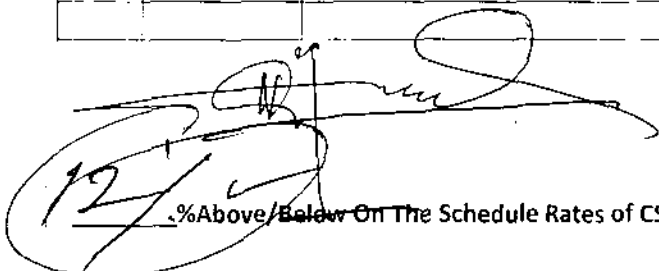
**BILL OF QUANTITIES**

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
<b>PART – A (CONSTRUCTION OF DRAIN)</b>					
1.	138.0Cft	Dismantling and removing Road Metalling...etc	Rs:605.00	%Cft	Rs:835.00
2.	9.38Cft	Dismantling of Brick work in lime or cement mortar ..etc complete	Rs:1285.63	%Cft	Rs:121.00
3.	6.25 Cft	Dismantling of CC plain 1:2:4..etc complete	Rs:3327.50	%Cft	Rs:208.00
4.	10.50Cft	Dismantling of C.C Reinforced separating Reinforcement from concrete, cleaning and straitening the same ...etc complete	Rs:5445.00	%Cft	Rs:572.00
5.	603.50Cft	Excavation in foundation of building and bridges and others structure i/c dag bellig dressing and refilling ground structure with excavated earth watering and ramming lead up to 5'ft in ordinary soil.	Rs:3176.25	%Ocft	Rs:1914.00
6.	150.60Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:17004.00
7.	964.05ft	Erection and removal of centering for RCC work ....etc complete	Rs:3127.41	%5ft	Rs:30148.00
8.	241.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:12595.00	%Cft	Rs:30354.00
9.	26.40Cft	RCC work in roof slab, beams coloums rafts, lintels and others structural member laid in situ or precast laid in position complete in all respects (b) ratio 1:2:4 90 lbs cement 2Cft sand 4cft shingle 1/8" to 1/2" gauge (G.Sch: P-No: It/No:	Rs:337.00	P.Cft	Rs:8897.0
10.	1.06Cwt	Fabrication of mild steel reinforcement for cement concrete including cutting, bending laying in position, making joints and fastening including cost of binding wire (also includes removal of rust bars ) using tor bars(G.Sch:P-No:16 It/No:8(b).	Rs:5001.70	P.Cwt	Rs:5305.00

11.	241.0Rft	Construction of standard open type drains connuttee block of C.C 1:2:4 cost of situ to the design profile i.c cost of mould as per drawing i/c supplying floating cost of cement 1/32" thick to expose surface finished smooth curing complete as per drawing design..etc complete	Rs:94.00	P.Rft	Rs:22654.00
12.	439.0Cft	Cement plaster 1:4 up to 12' height ½" thick (G.Sch: P-No:51 It/No:11(b).	Rs:2283.93	%Sft	Rs:10018.00
				Total:-	Rs:1,28,029/-
<b>PART-B (PROVIDING AND FIXING OF PAVER BLOCK)</b>					
1.	2650.0Cft	Earth work excavation undressed lead upto a single throw of Kassi phawarah of shovel in ordinary soil ..etc	Rs:1361.25	%Ocft	Rs:3607.00
2.	2650.0Cft	Dressing and leveling of earth wok to designed section, in ordinary soil etc complete	Rs:187.55	%Ocft	Rs:497.00
3.	1325.0Cft	Supplying and filling pit sand under floor and plunging into wells...	Rs:1141.25	%Ocft	Rs:15122.
4.	875.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:98720.00
5.	2650.0Sft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quddra / cable shape with pigmented b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:657650.00
				Total:-	Rs:7,75,596.00

Amount Total (a+b) Rs:9,03,625/-

 %Above/Below On The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

Total (A) = a + b in words

10/206/  
Ten Lac Twelve Lac Sixty one/only

Contractor

  
Executive Engineer / Procuring Agency

Summary of Bill of Quantities

Cost of Bid

Amount 10,120,61

1 (A) Cost based on composite Schedule of Rate


—

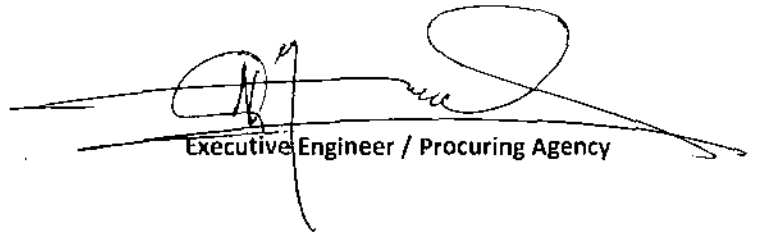
2 (B) Cost of based on Non / Offered Schedule of Rates.

—

TOTAL COST OF BID (C) = TOTAL (A) + Total (B)

10,120,61 -

  
Contractor

  
Executive Engineer / Procuring Agency



**SINDH PUBLIC PROCUREMENT REGULATORY AUTHORITY**  
**CONTRACT EVALUATION FORM**

**TO BE FILLED IN BY ALL PROCURING AGENCIES FOR PUBLIC**  
**CONTRACTORS OF WORKS, SERVICES & GOODS.**

- 1). NAME OF THE ORGANIZATION / DEPTT. Town Committee, Chuhar Jamali, Sujawal
- 2). PROVINCIAL / LOCAL GOVT. / OTHER LOCAL GOVERNMENT
- 3). TITLE OF CONTRACT: "CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN VARIOUS WARDS (PHASE-2) TOWN COMMITTEE CHUHAR JAMALI"
- 4) TENDER NUMBER: as above
- 5). BRIEF DESCRIPTION OF CONTRACT: CC Paver Block & CC Drain
- 6). FORUM THAT APPROVED THE SCHEME Town Committee, Chuhar Jamali
- 7). TENDER ESTIMATED VALUE Rs. 10,00,000/=
- 8). ENGINEER'S ESTIMATE PC -Cost Rs: 1000000/-  
(FOR CIVIL WORK ONLY)
- 9). ESTIMATED COMPLETION PERIOD (AS PER CONTRACT) (0 1) MONTH
- 10). TENDER OPENED ON DATE AND TIME 02-11-2017 AT 02:00 PM.
- 11). NUMBER OF TENDER DOCUMENTS SOLD (Attach list of buyers). 03
- 12). NUMBER OF BIDS RECEIVED 03
- 13). NUMBERS OF BIDDERS PRESENT AT THE TIME OF OPEINING OF BIDS 03
- 14). BID EVALUATION REPORT (Enclose a copy) YES
- 15). NAME AND ADDRESS OF THE SUCCESSFUL BIDDER. M/S Liaqat Ali & Company
- 16). CONTRACT AWARD PRICE SANCTION RUPEES Rs: 999862/-
- 17). RANKING OF SUCCESSFUL BIDDER IN EVALUATION REPORT (I.E. 1ST 2ND 3RD EVALUATION BID). 1<sup>st</sup> Lowest M/S Liaqat Ali & Company  
2<sup>nd</sup> LOWEST M/S Muhammad Juman Mandhrio  
3<sup>rd</sup> LOWEST M/S Mumtaz Hussain Soomro
- 18). METHOD OF PROCUREMENT USED: - (TICK ONE)
- A). SINGLE STAGE-ONE ENVELOPE PROCEDURE \_\_\_\_\_ ✓ \_\_\_\_\_
- B). SINGLE STAGE-TWO ENVELOPE PROCEDURE \_\_\_\_\_
- C). TWO STAGE BIDDING PROCEDURE \_\_\_\_\_

D). TWO STAGE-TWO ENVELOPE BIDDING PROCEDURE \_\_\_\_\_

PLEASE SPECIFY IF ANY OTHER METHOD OF PROCUREMENT WAS ADOPTED i.e. EMERGENCY, DIRECT CONTRACTING ETC. WITH BRIEF REASONS.

19). PROVIDING AUTHORITY FOR AWARD OF CONTRACT CHAIRMAN TC, CHUHAR JAMALI

20). WHETHER THE PROCUREMENT WAS INCLUDED IN ANNUAL PROCUREMENT PLAN

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

21). ADVERTISEMENT:

i) SPPRA Website  
(if yes give date & SPPRA Identification No.

YES	<a href="http://www.pprasindhgov.pk">www.pprasindhgov.pk</a> SPPRA Tender SR No. 34792 Dt: 02-11-2017
-----	--

ii) Newspapers  
(if yes give names of newspapers & dates)

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

22). NATURE OF CONTRACT

DOMESTIC/ LOCAL	<input checked="" type="checkbox"/>	LOCAL	INT
-----------------	-------------------------------------	-------	-----

23). WHETHER QUALIFICATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?

(If yes, enclose copy).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

24). WHETHER BID EVALUATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?

(if, yes enclose a copy).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

25). WHETHER APPROVAL OF COMPETENT AUTHORITY WAS OBTAINED FOR USING A METHOD OTHER THAN OPEN COMPETITIVE BIDDING?

YES		NO	N/A
-----	--	----	-----

26). WAS BID SECURITY OBTAINED FROM ALL THE BIDDERS?

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

27). WHETHER THE SUCCESSFUL BID WAS LOWEST EVALUATED BID / BEST EVALUATED BID (In case of Consultancies).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

28). WHETHER THE SUCCESSFUL BIDDER WAS TECHNICALLY COMPLAINT?

YES		NO	N/A
-----	--	----	-----

29). WHETHER NAMES OF THE BIDDERS AND THEIR QUOTED PRICES WERE READ OUT AT THE TIME OF OPENING OF BIDS?

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

30). WHETHER EVALUATION REPORT GIVEN TO BIDDERS BEFORE THE AWARD OF CONTRACT?

(Attach a copy of the bid evaluation report).

31). ANY COMPLAINTS RECEIVED  
(if yes, result thereof).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

YES		NO	N/A
-----	--	----	-----

32). ANY DEVIATION FROM SPECIFICATIONS GIVEN IN THE TENDER  
NOTICE / DOCUMENTS ( if yes, given details).

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

33). WAS THE EXTENSION MADE IN RESPONSE TIME?  
(if yes, given reasons)

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

34). DEVIATION FROM QUALIFICATION CRITERIA  
(if yes, detailed reasons).

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

35). WAS IT ASSURED BY THE PROCURING AGENCY THAT THE SELECTED  
FIRM IS NOT BLACK LISTED?

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

36). WAS A VISIT MADE BY ANY OFFICER / OFFICIAL OF THE PROCURING  
AGENCY TO THE SUPPLIER'S PREMISES IN CONNECTION WITH THE PROCUREMENT?  
IF SO, DETAILS TO BE ASCERTAINED REGARDING FINANCING OF VISIT, IF ABROAD:  
(if yes, enclose a copy)

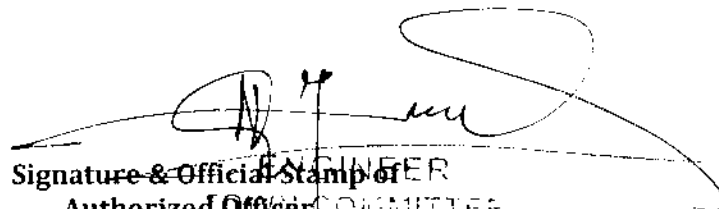
YES		NO	N/A
-----	--	----	-----

37). WERE PROPER SAFEGUARDS PROVIDED ON MOBILIZATION ADVANCE PAYMENT IN THE  
CONTRACT ( BANK GUARANTEE ETC)?

YES		NO	N/A
-----	--	----	-----

38). SPECIAL CONDITION, IF ANY  
(if yes, give Brief Description)

YES		NO	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

  
Signature & Official Stamp of  
Authorized Officer, COMMITTEE  
CHUNAR JAMALI

FOR OFFICE USE ONLY

**SPPRA, Block No. 8, Sindh Secretariat No. 4-A, Court Road, Karachi**

**Tel: 021-9205356, 021-9205369 & Fax No. 021-9206291.**

# TOWN COMMITTEE CHUHAR JAMALI

## AGREEMENT

Subject: - CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN VARIOUS WARDS (PHASE-2) TOWN COMMITTEE CHUHAR JAMALI

Cost Rs.9,99,862/-

Completion Time (03 Months) penalty \_\_\_\_\_

The Agreement is made on this 20<sup>th</sup> day of Dec 2017 at Thatta, between the Town Committee, Chuhar Jamali herein after called the Chuhar Jamali, Sujawal (Which expression shall mean and include his successors) on the one part and M/s. LIAQUAT ALI & COMPANY, have the office at Chairman TC Chuhar Jamali through their proprietor \_\_\_\_\_ hereinafter call the "Contractor" (Which expression shall mean and include his successors, administrators and assignees) on the other part.

Whereas the Town Committee, Chuhar Jamali, has accepted the tender of the contractor for construction and completion of the work namely CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN VARIOUS WARDS (PHASE-2) TOWN COMMITTEE CHUHAR JAMALI at a cost of Rs.9,99,862/- within a period of (03 Month) and penalty Rs. \_\_\_\_\_ according to the specification and general conditions of the contract signed by the Contractor after having made himself full acquainted with their meaning.

And whereas the Contractor has already furnished with the Town Committee, Chuhar Jamali the 2% bid amount of Rs.20,000/- (Rupees Twenty Thousand Only) on account of Bid Performance security for the said contract.

The following documents after incorporating addenda, except those parts relating to instructions to bidders shall be deemed to form and be read and construed as part of this Agreement, viz:

- a) The Contract Agreement;
- b) The Letter of Acceptance;
- c) The Completed form of Bid;
- d) The Standard and special Terms & Conditions of Contract – Part;
- e) The priced Bill of Quantities

In consideration of the payments to be made by the Town Committee, Chuhar Jamali to the Contractor as hereinafter mentioned, the contractor hereby covenants with the Town Committee, Chuhar Jamali to execute and complete the works and remedy defects therein In conformity and in all respects with the provisions of the contract.

The Town Committee, Chuhar Jamali hereby covenants to pay the contractor, in consideration of the execution and completion of the works as per provisions of contract, the contract Price or such other sum as may become payable under the provisions of the contract at the time and in the manner prescribed by the contractor.

The contractor has given a lien to the Town Committee, Chuhar Jamali over the Security for due fulfillment of the contract and do hereby bind himself, his heirs, successors legal representative and assignee to pay to the Town Committee, Chuhar Jamali penalty through forfeiture of the said Security in case of breach of any condition of the Contract without prejudice to the right of Town Committee, Chuhar Jamali to recover the damages from the Contractor for any such breach as per condition of the contract.

Now therefore this agreement witnesses that the Town Committee, Chuhar Jamali and the Contractor shall respectively and shall well truly carry out and fulfill the contract and abide by all terms and conditions and specifications thereof.

In witness whereof the said parties have set their respective hands on this 20<sup>th</sup> of Dec 2017

Witness:

1. M. Hassan  
2. Shuhab Ahmad

Liaquat Ali  
Contractor

[Signature]  
CHAIRMAN  
TOWN COMMITTEE, CHUHAR JAMALI



[Signature]  
DEPOY KEEPS  
R.A.O Thatta

# OFFICE OF THE TOWN COMMITTEE

## CHUHAR JAMALI

NO.T.C.C.J./T.O/ 47

/ 2017

Dated: 15/12/2017

M/s. LIAQAT ALI & COMPANY,  
GOVERNMENT CONTRACTOR

### LETTER OF ACCEPTANCE / SANCTION ORDER

**Subject: CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN VARIOUS WARDS  
(PHASE-2) TOWN COMMITTEE CHUHAR JAMALI**

On behalf of the employer it is notified that following the approval of accepted of Chairman, Town Committee, Chuhar Jamali, vide Para 17 /No, your bid for the subject is hereby accepted for the sum of Rs:9,99,862/- (Rupees. NINE LAC NINETY NINE THOUSAND EIGHT HUNDRED SIXTY TWO ONLY) as approved by the competent authority Town Committee, Chuhar Jamali.

There is now binding contract between Town Committee, Chuhar Jamali and **M/s. Liaqat Ali & Company,**

In accordance with the general condition of contract, you are required to enter in to and execute a contract agreement this agreement shall be signed by employer and **M/s. Liaqat Ali & Company.**

In accordance with condition of contract as per SPPRA-2010 the 2% Bid security Rs:20,000/- and remaining 8% Security may deduct from bill.

All correspondence on onward shall be carried out through Town Officer, Town Committee, Chuhar Jamali.

  
TOWN OFFICER  
TOWN COMMITTEE, CHUHAR JAMALI

Copy to:-

- 1- Chairman, Town Committee, Chuhar Jamali.
- 2- Assistant Executive Engineer, (Town Committee, Chuhar Jamali)
- 3- Office Copy.

NAME OF WORK: - CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN VARIOUS WARDS  
(PHASE-2) TOWN COMMITTEE CHUHAR JAMALI

BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
<b>PART – A (CONSTRUCTION OF DRAIN)</b>					
1.	138.0Cft	Dismantling and removing Road Metalling...etc	Rs:605.00	%Cft	Rs:835.00
2.	9.38Cft	Dismantling of Brick work in lime or cement mortar ...etc complete	Rs:1285.63	%Cft	Rs:121.00
3.	6.25 Cft	Dismantling of CC plain 1:2:4..etc complete	Rs:3327.50	%Cft	Rs:208.00
4.	10.50Cft	Dismantling of C.C Reinforced separating Reinforcement from concrete, cleaning and straitening the same ...etc complete	Rs:5445.00	%Cft	Rs:572.00
5.	603.50Cft	Excavation in foundation of building and bridges and others structure i/c dag bellig dressing and refilling ground structure with excavated earth watering and ramming lead up to 5'ft in ordinary soil.	Rs:3176.25	%Ocft	Rs:1914.00
6.	150.60Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:17004.00
7.	964.05ft	Erection and removal of centering for RCC work ....etc complete	Rs:3127.41	%5ft	Rs:30148.00
8.	241.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:12595.00	%Cft	Rs:30354.00
9.	26.40Cft	RCC work in roof slab, beams coloums rafts, lintels and others structural member laid in situ or precast laid in position complete in all respects (b) ratio 1:2:4 90 lbs cement 2Cft sand 4cft shingle 1/8" to 1/2" gauge (G.Sch: P-No: It/No:	Rs:337.00	P.Cft	Rs:8897.0
10.	1.06Cwt	Fabrication of mild steel reinforcement for cement concrete including cutting, bending laying in position, making joints and fastening including cost of binding wire (also includes removal of rust bars ) using tor bars(G.Sch:P-No:16 It/No:8(b).	Rs:5001.70	P.Cwt	Rs:5305.00

11.	241.0Rft	Construction of standard open type drains connuttee block of C.C 1:2:4 cost of situ to the design profile i.c cost of mould as per drawing i/c supplying floating cost of cement 1/32" thick to expose surface finished smooth curing complete as per drawing design..etc complete	Rs:94.00	P.Rft	Rs:22654.00
12.	439.0Cft	Cement plaster 1:4 up to 12' height ½" thick (G.Sch: P-No:51 lt/No:11(b).	Rs:2283.93	%Sft	Rs:10018.00
				Total:-	Rs:1,28,029/-
<b>PART-B (PROVIDING AND FIXING OF PAVER BLOCK)</b>					
1.	2650.0Cft	Earth work excavation undressed lead upto a single throw of Kassi phawarah of shovel in ordinary soil ..etc	Rs:1361.25	%Ocft	Rs:3607.00
2.	2650.0Cft	Dressing and leveling of earth wok to designed section, in ordinary soil etc complete	Rs:187.55	%Ocft	Rs:497.00
3.	1325.0Cft	Supplying and filling pit sand under floor and plunging into wells...	Rs:1141.25	%Ocft	Rs:15122.
4.	875.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 l/5(f)	Rs:11288.75	%Cft	Rs:98720.00
5.	2650.0Sft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quddra / cable shape with pigmented b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:657650.00
				Total:-	Rs:7,75,596.00

Amount Total (a+b) **Rs:9,03,625/-**

10.65 % Above/Below On The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

Total (A) = a + b in words

999862 X/ine Lac X/ineety two  
Thousand Eight hundred Sixty two only

*[Signature]*  
Contractor

*[Signature]*  
Executive Engineer / Procuring Agency

Summary of Bill of Quantities

Cost of Bid

Amount 999 862

1 (A) Cost based on composite Schedule of Rate

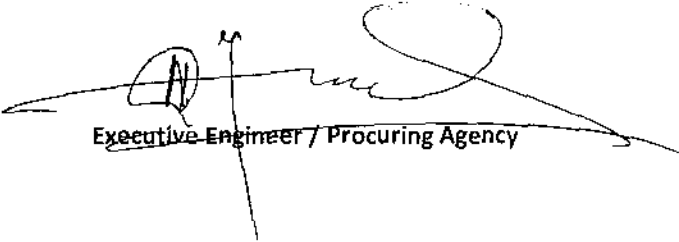
2 (B) Cost of based on Non / Offered Schedule of Rates.

TOTAL COST OF BID (C) = TOTAL (A) + Total (B)

999 862

  
Contractor

  
Executive Engineer / Procuring Agency



NAME OF WORK: - CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN VARIOUS WARDS  
(PHASE-2) TOWN COMMITTEE CHUHAR JAMALI

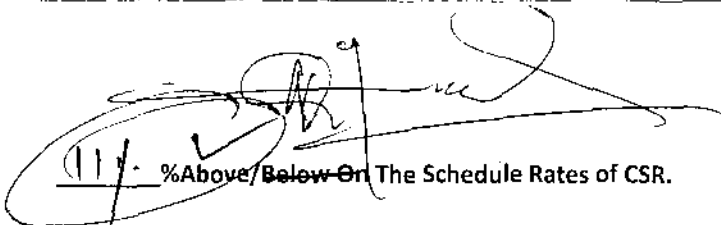
BILL OF QUANTITIES

(A) Description and rate of items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
<b>PART – A (CONSTRUCTION OF DRAIN)</b>					
1.	138.0Cft	Dismantling and removing Road Metalling...etc	Rs:605.00	%Cft	Rs:835.00
2.	9.38Cft	Dismantling of Brick work in lime or cement mortar ..etc complete	Rs:1285.63	%Cft	Rs:121.00
3.	6.25 Cft	Dismantling of CC plain 1:2:4..etc complete	Rs:3327.50	%Cft	Rs:208.00
4.	10.50Cft	Dismantling of C.C Reinforced separating Reinforcement from concrete, cleaning and straitening the same ...etc complete	Rs:5445.00	%Cft	Rs:572.00
5.	603.50Cft	Excavation in foundation of building and bridges and others structure i/c dag bellig dressing and refilling ground structure with excavated earth watering and ramming lead up to 5'ft in ordinary soil.	Rs:3176.25	%Cft	Rs:1914.00
6.	150.60Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:17004.00
7.	964.0Sft	Erection and removal of centering for RCC work ....etc complete	Rs:3127.41	%Sft	Rs:30148.00
8.	241.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:12595.00	%Cft	Rs:30354.00
9.	26.40Cft	RCC work in roof slab, beams coloums rafts, lintels and others structural member laid in situ or precast laid in position complete in all respects (b) ratio 1:2:4 90 lbs cement 2Cft sand 4cft shingle 1/8" to 1/4" gauge (G.Sch: P-No: It/No:	Rs:337.00	P.Cft	Rs:8897.0
10.	1.06Cwt	Fabrication of mild steel reinforcement for cement concrete including cutting, bending laying in position, making joints and fastening including cost of binding wire (also includes removal of rust bars ) using tor bars(G.Sch:P-No:16 It/No:8(b).	Rs:5001.70	P.Cwt	Rs:5305.00

11.	241.0Rft	Construction of standard open type drains connuttee block of C.C 1:2:4 cost of situ to the design profile i.c cost of mould as per drawing i/c supplying floating cost of cement 1/32" thick to expose surface finished smooth curing complete as per drawing design..etc complete	Rs:94.00	P.Rft	Rs:22654.00
12.	439.0Cft	Cement plaster 1:4 up to 12' height ½" thick (G.Sch: P-No:51 It/No:11(b).	Rs:2283.93	%Sft	Rs:10018.00
				Total:-	Rs:1,28,029/-
<b>PART-B (PROVIDING AND FIXING OF PAVER BLOCK)</b>					
1.	2650.0Cft	Earth work excavation undressed lead upto a single throw of Kassi phawarah of shovel in ordinary soil ..etc	Rs:1361.25	%Ocft	Rs:3607.00
2.	2650.0Cft	Dressing and leveling of earth wok to designed section, in ordinary soil etc complete	Rs:187.55	%Ocft	Rs:497.00
3.	1325.0Cft	Supplying and filling pit sand under floor and plunging into wells...	Rs:1141.25	%Ocft	Rs:15122.
4.	875.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:98720.00
5.	2650.0Sft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quddra / cable shape with pigmented b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:657650.00
				Total:-	Rs:7,75,596.00

Amount Total (a+b) Rs:9,03,625/-

 %Above/Below On The Schedule Rates of CSR.

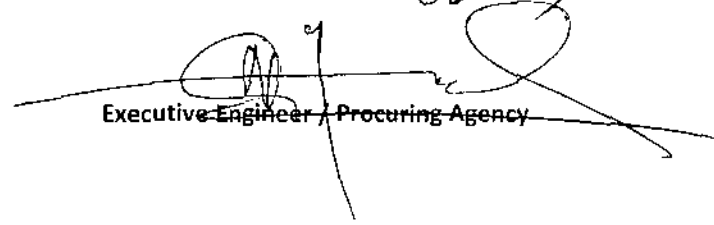
Amount to be Added/Deducted on the basis of premium quoted Total (b)

Total (A) = a + b in words

1003024

Ten Lac three thousand twenty four

  
Contractor

  
Executive Engineer / Procuring Agency

Summary of Bill of Quantities

Cost of Bid

Amount 100,302.4

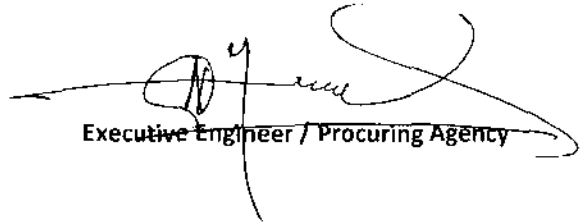
1 (A) Cost based on composite Schedule of Rate \_\_\_\_\_

2 (B) Cost of based on Non / Offered Schedule of Rates. \_\_\_\_\_

TOTAL COST OF BID (C) = TOTAL (A) + Total (B)

100,302.4

  
Contractor

  
Executive Engineer / Procuring Agency

NAME OF WORK: - CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN VARIOUS WARDS  
(PHASE-2) TOWN COMMITTEE CHUHAR JAMALI

BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
<b>PART – A (CONSTRUCTION OF DRAIN)</b>					
1.	138.0Cft	Dismantling and removing Road Metalling...etc	Rs:605.00	%Cft	Rs:835.00
2.	9.38Cft	Dismantling of Brick work in lime or cement mortar ..etc complete	Rs:1285.63	%Cft	Rs:121.00
3.	6.25 Cft	Dismantling of CC plain 1:2:4..etc complete	Rs:3327.50	%Cft	Rs:208.00
4.	10.50Cft	Dismantling of C.C Reinforced separating Reinforcement from concrete, cleaning and straitening the same ...etc complete	Rs:5445.00	%Cft	Rs:572.00
5.	603.50Cft	Excavation in foundation of building and bridges and others structure i/c dag bellig dressing and refilling ground structure with excavated earth watering and ramming lead up to 5'ft in ordinary soil.	Rs:3176.25	%Cft	Rs:1914.00
6.	150.60Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:17004.00
7.	964.05ft	Erection and removal of centering for RCC work ....etc complete	Rs:3127.41	%Sft	Rs:30148.00
8.	241.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:12595.00	%Cft	Rs:30354.00
9.	26.40Cft	RCC work in roof slab, beams coloums rafts, lintels and others structural member laid in situ or precast laid in position complete in all respects (b) ratio 1:2:4 90 lbs cement 2Cft sand 4cft shingle 1/8" to 1/2" gauge (G.Sch: P-No: It/No:	Rs:337.00	P.Cft	Rs:8897.0
10.	1.06Cwt	Fabrication of mild steel reinforcement for cement concrete including cutting, bending laying in position, making joints and fastening including cost of binding wire (also includes removal of rust bars ) using tor bars(G.Sch:P-No:16 It/No:8(b).	Rs:5001.70	P.Cwt	Rs:5305.00

11.	241.0Rft	Construction of standard open type drains connuttee block of C.C 1:2:4 cost of situ to the design profile i.c cost of mould as per drawing i/c supplying floating cost of cement 1/32" thick to expose surface finished smooth curing complete as per drawing design..etc complete	Rs:94.00	P.Rft	Rs:22654.00
12.	439.0Cft	Cement plaster 1:4 up to 12' height ½" thick (G.Sch: P-No:51 It/No:11(b).	Rs:2283.93	%Sft	Rs:10018.00
				Total:-	Rs:1,28,029/-
<b>PART-B (PROVIDING AND FIXING OF PAVER BLOCK)</b>					
1.	2650.0Cft	Earth work excavation undressed lead upto a single throw of Kassi phawarah of shovel in ordinary soil ..etc	Rs:1361.25	%Ocft	Rs:3607.00
2.	2650.0Cft	Dressing and leveling of earth wok to designed section, in ordinary soil etc complete	Rs:187.55	%Ocft	Rs:497.00
3.	1325.0Cft	Supplying and filling pit sand under floor and plunging into wells...	Rs:1141.25	%Ocft	Rs:15122.
4.	875.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 1/5(f)	Rs:11288.75	%Cft	Rs:98720.00
5.	2650.0Sft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quddra / cable shape with pigmented b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:657650.00
				Total:-	Rs:7,75,596.00

Amount Total (a+b) Rs:9,03,625/-

*(Signature)*  
 12% %Above/Below On The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

Total (A) = a + b in words

1012061 Ten Lac twelve thousand Sixty One Only-

*(Signature)*  
 Contractor

*(Signature)*  
 Executive Engineer / Procuring Agency

Summary of Bill of Quantities

Cost of Bid

Amount 1012061

1 (A) Cost based on composite Schedule of Rate

\_\_\_\_\_

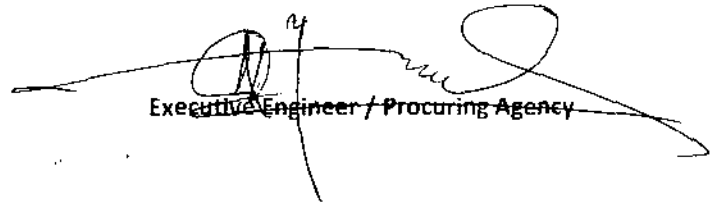
2 (B) Cost of based on Non / Offered Schedule of Rates.

\_\_\_\_\_

TOTAL COST OF BID (C) = TOTAL (A) + Total (B)

1012061

  
Contractor

  
Executive Engineer / Procuring Agency

**SINDH PUBLIC PROCUREMENT REGULATORY AUTHORITY**  
**CONTRACT EVALUATION FORM**

**TO BE FILLED IN BY ALL PROCURING AGENCIES FOR PUBLIC CONTRACTORS OF WORKS, SERVICES & GOODS.**

1). NAME OF THE ORGANIZATION / DEPTT. Town Committee, Chuhar Jamali, Sujawal

2). PROVINCIAL / LOCAL GOVT. / OTHER LOCAL GOVERNMENT

3). TITLE OF CONTRACT: "CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN VARIOUS WARDS (PHASE-3) TOWN COMMITTEE CHUHAR JAMALI"

4) TENDER NUMBER: as above

5). BRIEF DESCRIPTION OF CONTRACT: CC Paver Block & CC Drain

6). FORUM THAT APPROVED THE SCHEME Town Committee, Chuhar Jamali

7). TENDER ESTIMATED VALUE Rs. 10,00,000/=

8). ENGINEER'S ESTIMATE PC -Cost Rs: 100000/-

(FOR CIVIL WORK ONLY)

9). ESTIMATED COMPLETION PERIOD (AS PER CONTRACT) (0 1) MONTH

10). TENDER OPENED ON DATE AND TIME 02-11-2017 AT 02:00 PM.

11). NUMBER OF TENDER DOCUMENTS SOLD 03  
(Attach list of buyers).

12). NUMBER OF BIDS RECEIVED 03

13). NUMBERS OF BIDDERS PRESENT AT THE TIME OF OPEINING OF BIDS 03

14). BID EVALUATION REPORT YES  
(Enclose a copy)

15). NAME AND ADDRESS OF THE SUCCESSFUL BIDDER. M/S Abdul Hakeem Chandio

16). CONTRACT AWARD PRICE SANCTION RUPEES Rs: 999262/-

17). RANKING OF SUCCESSFUL BIDDER IN EVALUATION REPORT 1<sup>st</sup> Lowest M/S Abdul Hakeem Chandio  
(I.E. 1ST 2ND 3RD EVALUATION BID). 2<sup>nd</sup> LOWEST M/S Muhammad Juman Mandhrio  
3<sup>rd</sup> LOWEST M/S Muntaz Hussain Soomro

18). METHOD OF PROCUREMENT USED: - (TICK ONE)

A).  SINGLE STAGE-ONE ENVELOPE PROCEDURE

B).  SINGLE STAGE-TWO ENVELOPE PROCEDURE

C).  TWO STAGE BIDDING PROCEDURE

MUMTAZ HUSSAIN SOOMRO  
ABDUL HAKEEM CHANDIO  
ENGINEER  
TOWN COMMITTEE  
CHUHAR JAMALI

D). TWO STAGE-TWO ENVELOPE BIDDING PROCEDURE \_\_\_\_\_

PLEASE SPECIFY IF ANY OTHER METHOD OF PROCUREMENT WAS ADOPTED i.e. EMERGENCY, DIRECT CONTRACTING ETC. WITH BRIEF REASONS.

19). PROVIDING AUTHORITY FOR AWARD OF CONTRACT CHAIRMAN TC, CHUHAR JAMALI

20). WHETHER THE PROCUREMENT WAS INCLUDED IN ANNUAL PROCUREMENT PLAN

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

21). ADVERTISEMENT:

i) SPPRA Website  
(if yes give date & SPPRA Identification No.

YES	<a href="http://www.pprasindhgov.pk">www.pprasindhgov.pk</a> SPPRA Tender SR No. 34792 Dt: 02-11-2017		
-----	--	--	--

ii) Newspapers  
(if yes give names of newspapers & dates)

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

22). NATURE OF CONTRACT

DOMESTIC/ LOCAL	<input checked="" type="checkbox"/>	LOCAL	INT	
-----------------	-------------------------------------	-------	-----	--

23). WHETHER QUALIFICATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?

(if yes, enclose copy).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

24). WHETHER BID EVALUATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?

(if, yes enclose a copy).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

25). WHETHER APPROVAL OF COMPETENT AUTHORITY WAS OBTAINED FOR USING A METHOD OTHER THAN OPEN COMPETITIVE BIDDING?

YES		NO	N/A
-----	--	----	-----

26). WAS BID SECURITY OBTAINED FROM ALL THE BIDDERS?

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

27). WHETHER THE SUCCESSFUL BID WAS LOWEST EVALUATED BID / BEST EVALUATED BID (In case of Consultancies).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

28). WHETHER THE SUCCESSFUL BIDDER WAS TECHNICALLY COMPLAINT?

YES		NO	N/A
-----	--	----	-----

29). WHETHER NAMES OF THE BIDDERS AND THEIR QUOTED PRICES WERE READ OUT AT THE TIME OF OPENING OF BIDS?

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

30). WHETHER EVALUATION REPORT GIVEN TO BIDDERS BEFORE THE AWARD OF CONTRACT?

(Attach a copy of the bid evaluation report).



31). ANY COMPLAINTS RECEIVED  
(if yes, result thereof).

YES	<input checked="" type="checkbox"/>	NO	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

YES	<input type="checkbox"/>	NO	<input type="checkbox"/>	N/A	<input type="checkbox"/>
-----	--------------------------	----	--------------------------	-----	--------------------------

32). ANY DEVIATION FROM SPECIFICATIONS GIVEN IN THE TENDER  
NOTICE / DOCUMENTS ( if yes, given details).

YES	<input type="checkbox"/>	NO	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

33). WAS THE EXTENSION MADE IN RESPONSE TIME?  
(if yes, given reasons)

YES	<input type="checkbox"/>	NO	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

34). DEVIATION FROM QUALIFICATION CRITERIA  
(if yes, detailed reasons).

YES	<input type="checkbox"/>	NO	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

35). WAS IT ASSURED BY THE PROCURING AGENCY THAT THE SELECTED  
FIRM IS NOT BLACK LISTED?

YES	<input type="checkbox"/>	NO	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

36). WAS A VISIT MADE BY ANY OFFICER / OFFICIAL OF THE PROCURING  
AGENCY TO THE SUPPLIER'S PREMISES IN CONNECTION WITH THE PROCUREMENT?  
IF SO, DETAILS TO BE ASCERTAINED REGARDING FINANCING OF VISIT, IF ABROAD:  
(if yes, enclose a copy)

YES	<input type="checkbox"/>	NO	<input type="checkbox"/>	N/A	<input type="checkbox"/>
-----	--------------------------	----	--------------------------	-----	--------------------------

37). WERE PROPER SAFEGUARDS PROVIDED ON MOBILIZATION ADVANCE PAYMENT IN THE  
CONTRACT ( BANK GUARANTEE ETC)?

YES	<input type="checkbox"/>	NO	<input type="checkbox"/>	N/A	<input type="checkbox"/>
-----	--------------------------	----	--------------------------	-----	--------------------------

38). SPECIAL CONDITION, IF ANY  
(if yes, give Brief Description)

YES	<input type="checkbox"/>	NO	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

  
Signature & Official Stamp of  
Authorized Officer  
CHUHAR JAMALI

FOR OFFICE USE ONLY

**SPPRA, Block No. 8, Sindh Secretariat No. 4-A, Court Road, Karachi**  
Tel: 021-9205356, 021-9205369 & Fax No. 021-9206291.

# OFFICE OF THE TOWN COMMITTEE

## CHUHAR JAMALI

NO.T.C.C.J./T.O/ 48

/ 2017

Dated: 15/12/2017

*Muhammad Hussain Saemro*

M/s. LIAQAT ALI & COMPANY,  
GOVERNMENT CONTRACTOR

### LETTER OF ACCEPTANCE / SANCTION ORDER

**Subject: CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN VARIOUS WARDS  
(PHASE-3) TOWN COMMITTEE CHUHAR JAMALI**

On behalf of the employer it is notified that following the approval of accepted of Chairman, Town Committee, Chuhar Jamali, vide Para 18 /No, your bid for the subject is hereby accepted for the sum of Rs:9,99,862/- (Rupees. NINE LAC NINETY NINE THOUSAND EIGHT HUNDRED SIXTY TWO ONLY) as approved by the competent authority Town Committee, Chuhar Jamali.

There is now binding contract between Town Committee, Chuhar Jamali and **M/s. Liaqat Ali & Company,**

In accordance with the general condition of contract, you are required to enter in to and execute a contract agreement this agreement shall be signed by employer and **M/s. Liaqat Ali & Company.**

In accordance with condition of contract as per SPPRA-2010 the 2% Bid security Rs:20,000/- and remaining 8% Security may deduct from bill.

All correspondence on onward shall be carried out through Town Officer, Town Committee, Chuhar Jamali.

*[Signature]*  
TOWN OFFICER

TOWN COMMITTEE, CHUHAR JAMALI

Copy to:-

- 1- Chairman, Town Committee, Chuhar Jamali.
- 2- Assistant Executive Engineer, (Town Committee, Chuhar Jamali)
- 3- Office Copy.

# TOWN COMMITTEE CHUHAR JAMALI

## AGREEMENT

Subject: CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN VARIOUS WARDS (PHASE-3) TOWN COMMITTEE CHUHAR JAMALI

Cost Rs.9,99,862/-

Completion Time (03 Months) penalty \_\_\_\_\_

The Agreement is made on this 20th Dec day of 2017 at Thatta, between the Town Committee, Chuhar Jamali herein after called the Chuhar Jamali, Sujawal (Which expressi shall mean and include his successors) on the one part and M/s. MUMTAZ HUSSAIN SOOMRO have G office at \_\_\_\_\_ through their proprietor SOOMRO hereinafter call the "Contractor" (Which expression shall mean and include his successors, administrat and assignees) on the other part.

Whereas the Town Committee, Chuhar Jamali, has accepted the tender of the contract for construction and completion of the work namely CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN VARIOUS WARDS (PHASE-3) TOWN COMMITTEE CHUHAR JAMALI a cost of Rs.9,99,862/- within a period of (03 Month) and penalty Rs. \_\_\_\_\_ according to the specificati and general conditions of the contract signed by the Contractor after having made himself b acquainted with their meaning.

And whereas the Contractor has already furnished with the Town Committee, Chuh. Jamali the 2% bid amount of Rs.20,000/- (Rupees Twenty Thousand Only) on account of Bid Performance security for the said contract.

The following documents after incorporating addenda, except those parts relating to instructions bidders shall be deemed to form and be read and construed as part of this Agreement, viz:

- a) The Contract Agreement;
- b) The Letter of Acceptance;
- c) The Completed form of Bid;
- d) The Standard and special Terms & Conditions of Contract - Part;
- e) The priced Bill of Quantities

In consideration of the payments to be made by the Town Committee, Chuhar Jamali to the Contractor as hereinafter mentioned, the contractor hereby covenants with the Town Committee Chuhar Jamali to execute and complete the works and remedy defects therein in conformity and in respects with the provisions of the contract.

The Town Committee, Chuhar Jamali hereby covenants to pay the contractor, in consideration of the execution and completion of the works as per provisions of contract, the contract Price or such other sum as may become payable under the provisions of the contract at the time and in the manner prescribed by the contractor.

The contractor has given a lien to the Town Committee, Chuhar Jamali over the Security for due fulfillment of the contract and do hereby bind himself, his heirs, successors legal representative and assignee to pay to the Town Committee, Chuhar Jamali penalty through forfeiture of the said Security in case of breach of any condition of the Contract without prejudice to the right of Town Committee, Chuhar Jamali to recover the damages from the Contractor for any such breach as per condition of the contract.

Now therefore this agreement witnesses that the Town Committee, Chuhar Jamali and the Contractor shall respectively and shall well truly carry out and fulfill the contract and abide by all terms and conditions and specifications thereof.

In witness whereof the said parties have set their respective hands on this 20th Dec 2017

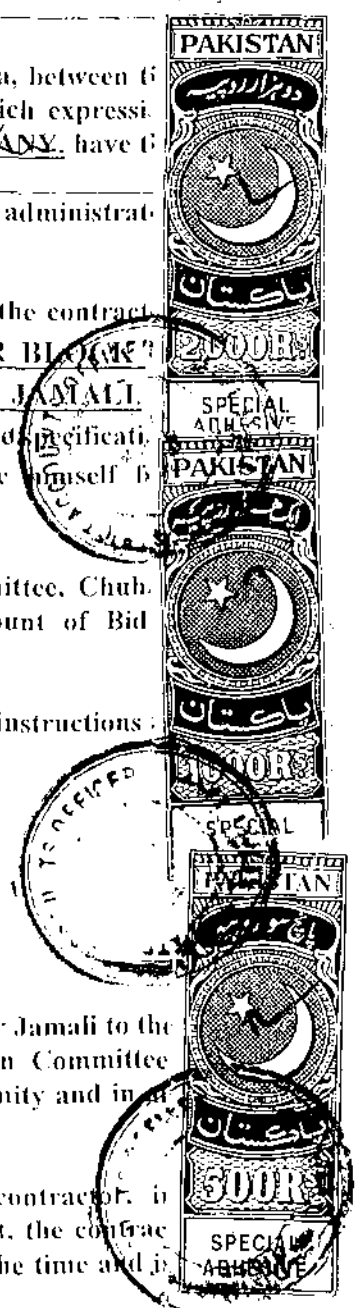
Witness:

1. Riaz Ali Khan  
 2. Roshid Hussain

M/s MUMTAZ HUSSAIN SOOMRO  
Contractor

**M/s MUMTAZ HUSSAIN SOOMRO**  
Government & Private Contractor

Chairman  
TOWN COMMITTEE, CHUHAR JAMALI



*[Handwritten Signature]*  
**NOT KEPT**  
**D.A.O Thatta,**

NAME OF WORK: - CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN VARIOUS WARDS  
(PHASE-3) TOWN COMMITTEE CHUHAR JAMALI

BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
<b>PART – A (CONSTRUCTION OF DRAIN)</b>					
1.	138.0Cft	Dismantling and removing Road Metalling...etc	Rs:605.00	%Cft	Rs:835.00
2.	9.38Cft	Dismantling of Brick work in lime or cement mortar ..etc complete	Rs:1285.63	%Cft	Rs:121.00
3.	6.25 Cft	Dismantling of CC plain 1:2:4..etc complete	Rs:3327.50	%Cft	Rs:208.00
4.	10.50Cft	Dismantling of C.C Reinforced separating Reinforcement from concrete, cleaning and straitening the same ...etc complete	Rs:5445.00	%Cft	Rs:572.00
5.	603.50Cft	Excavation in foundation of building and bridges and others structure i/c dag bellig dressing and refilling ground structure with excavated earth watering and ramming lead up to 5'ft in ordinary soil.	Rs:3176.25	%Ocft	Rs:1914.00
6.	150.60Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:17004.00
7.	964.05ft	Erection and removal of centering for RCC work ....etc complete	Rs:3127.41	%5ft	Rs:30148.00
8.	241.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:12595.00	%Cft	Rs:30354.00
9.	26.40Cft	RCC work in roof slab, beams coloums rafts, lintels and others structural member laid in situ or precast laid in position complete in all respects (b) ratio 1:2:4 90 lbs cement 2Cft sand 4cft shingle. 1/8" to ¼" gauge (G.Sch; P-No: It/No:	Rs:337.00	P.Cft	Rs:8897.0
10.	1.06Cwt	Fabrication of mild steel reinforcement for cement concrete including cutting, bending laying in position, making joints and fastening including cost of binding wire (also includes removal of rust bars ) using tor bars(G.Sch:P-No:16 It/No:8(b).	Rs:5001.70	P.Cwt	Rs:5305.00

11.	241.0Rft	Construction of standard open type drains connuttee block of C.C 1:2:4 cost of situ to the design profile i.c cost of mould as per drawing i/c supplying floating cost of cement 1/32" thick to expose surface finished smooth curing complete as per drawing design..etc complete	Rs:94.00	P.Rft	Rs:22654.00
12.	439.0Cft	Cement plaster 1:4 up to 12' height 3/8" thick (G.Sch: P-No:51 lt/No:11(b).	Rs:2283.93	%Sft	Rs:10018.00
				Total:-	Rs:1,28,029/-
<b>PART-B (PROVIDING AND FIXING OF PAVER BLOCK)</b>					
1.	2650.0Cft	Earth work excavation undressed lead upto a single throw of Kassi phawarah of shovel in ordinary soil ..etc	Rs:1361.25	%Ocft	Rs:3607.00
2.	2650.0Cft	Dressing and leveling of earth wok to designed section, in ordinary soil etc complete	Rs:187.55	%Ocft	Rs:497.00
3.	1325.0Cft	Supplying and filling pit sand under floor and plunging into wells...	Rs:1141.25	%Ocft	Rs:15122.
4.	875.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 l/5(f)	Rs:11288.75	%Cft	Rs:98720.00
5.	2650.0Sft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quddra / cable shape with pigmented b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:657650.00
				Total:-	Rs:7,75,596.00

Amount Total (a+b) Rs:9,03,625/-

*10.65%*  
 %Above/Below On The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

Total (A) = a + b in words

*999862*  
 Nine Lac Ninety Nine Thousand Eight Hundred Sixty Two

Contractor  
*MR. Joomo*

*[Signature]*  
 Executive Engineer / Procuring Agency

Summary of Bill of Quantities

Cost of Bid

Amount 999862

1 (A) Cost based on composite Schedule of Rate

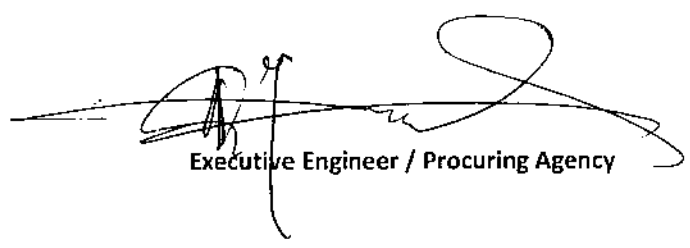
2 (B) Cost of based on Non / Offered Schedule of Rates.

TOTAL COST OF BID (C) = TOTAL (A) + Total (B)

999862

*WR  
Yomro*  
Contractor

  
Executive Engineer / Procuring Agency

NAME OF WORK: - **CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN VARIOUS WARDS  
(PHASE-3) TOWN COMMITTEE CHUHAR JAMALI**

**BILL OF QUANTITIES**

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
<b>PART – A (CONSTRUCTION OF DRAIN)</b>					
1.	138.0Cft	Dismantling and removing Road Metalling...etc	Rs:605.00	%Cft	Rs:835.00
2.	9.38Cft	Dismantling of Brick work in lime or cement mortar ..etc complete	Rs:1285.63	%Cft	Rs:121.00
3.	6.25 Cft	Dismantling of CC plain 1:2:4..etc complete	Rs:3327.50	%Cft	Rs:208.00
4.	10.50Cft	Dismantling of C.C Reinforced separating Reinforcement from concrete, cleaning and straitening the same ...etc complete	Rs:5445.00	%Cft	Rs:572.00
5.	603.50Cft	Excavation in foundation of building and bridges and others structure i/c dag bellig dressing and refilling ground structure with excavated earth watering and ramming lead up to 5'ft in ordinary soil.	Rs:3176.25	%Ocft	Rs:1914.00
6.	150.60Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:17004.00
7.	964.0Sft	Erection and removal of centering for RCC work ....etc complete	Rs:3127.41	%Sft	Rs:30148.00
8.	241.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:12595.00	%Cft	Rs:30354.00
9.	26.40Cft	RCC work in roof slab, beams coloums rafts, lintels and others structural member laid in situ or precast laid in position complete in all respects (b) ratio 1:2:4 90 lbs cement 2Cft sand 4cft shingle 1/8" to 1/4" gauge (G.Sch: P-No: It/No:	Rs:337.00	P.Cft	Rs:8897.0
10.	1.06Cwt	Fabrication of mild steel reinforcement for cement concrete including cutting, bending laying in position, making joints and fastening including cost of binding wire (also includes removal of rust bars ) using tor bars(G.Sch:P-No:16 It/No:8(b).	Rs:5001.70	P.Cwt	Rs:5305.00

11.	241.0Rft	Construction of standard open type drains connuttee block of C.C 1:2:4 cost of situ to the design profile i.c cost of mould as per drawing i/c supplying floating cost of cement 1/32" thick to expose surface finished smooth curing complete as per drawing design..etc complete	Rs:94.00	P.Rft	Rs:22654.00
12.	439.0Cft	Cement plaster 1:4 up to 12' height ½" thick (G.Sch: P-No:51 It/No:11(b).	Rs:2283.93	%Sft	Rs:10018.00
				Total:-	Rs:1,28,029/-
<b>PART-B (PROVIDING AND FIXING OF PAVER BLOCK)</b>					
1.	2650.0Cft	Earth work excavation undressed lead upto a single throw of Kassi phawarah of shovel in ordinary soil ..etc	Rs:1361.25	%Ocft	Rs:3607.00
2.	2650.0Cft	Dressing and leveling of earth wok to designed section, in ordinary soil etc complete	Rs:187.55	%Ocft	Rs:497.00
3.	1325.0Cft	Supplying and filling pit sand under floor and plunging into wells...	Rs:1141.25	%Ocft	Rs:15122.
4.	875.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:98720.00
5.	2650.0Sft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quddra / cable shape with pigmented b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:657650.00
				Total:-	Rs:7,75,596.00

Amount Total (a+b) Rs:9,03,625/-

%Above/Below On The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

Total (A) = a + b in words

1003024 Ten lac three thousand

Twenty four

*Jagan*  
Contractor

Executive Engineer / Procuring Agency



Summary of Bill of Quantities

Cost of Bid

Amount 1003024

1 (A) Cost based on composite Schedule of Rate

\_\_\_\_\_

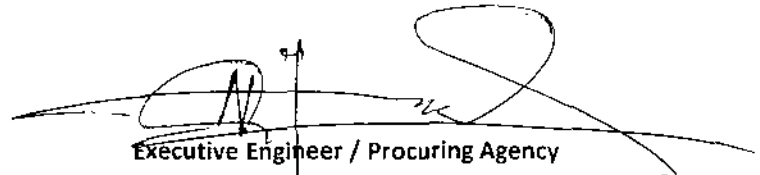
2 (B) Cost of based on Non / Offered Schedule of Rates.

\_\_\_\_\_

TOTAL COST OF BID (C) = TOTAL (A) + Total (B)

1003024

  
Contractor

  
Executive Engineer / Procuring Agency

NAME OF WORK: -

**CONSTRUCTION OF PAVER BLOCK & C.C.DRAIN IN VARIOUS WARDS  
(PHASE-3) TOWN COMMITTEE CHUHAR JAMALI**

**BILL OF QUANTITIES**

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
<b>PART – A (CONSTRUCTION OF DRAIN)</b>					
1.	138.0Cft	Dismantling and removing Road Metalling...etc	Rs:605.00	%Cft	Rs:835.00
2.	9.38Cft	Dismantling of Brick work in lime or cement mortar ..etc complete	Rs:1285.63	%Cft	Rs:121.00
3.	6.25 Cft	Dismantling of CC plain 1:2:4..etc complete	Rs:3327.50	%Cft	Rs:208.00
4.	10.50Cft	Dismantling of C.C Reinforced separating Reinforcement from concrete, cleaning and straitening the same ...etc complete	Rs:5445.00	%Cft	Rs:572.00
5.	603.50Cft	Excavation in foundation of building and bridges and others structure i/c dag bellig dressing and refilling ground structure with excavated earth watering and ramming lead up to 5'ft in ordinary soil.	Rs:3176.25	%Ocft	Rs:1914.00
6.	150.60Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:17004.00
7.	964.0Sft	Erection and removal of centering for RCC work ....etc complete	Rs:3127.41	%Sft	Rs:30148.00
8.	241.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:12595.00	%Cft	Rs:30354.00
9.	26.40Cft	RCC work in roof slab, beams coloums rafts, lintels and others structural member laid in situ or precast laid in position complete in all respects (b) ratio 1:2:4 90 lbs cement 2Cft sand 4cft shingle 1/8" to 1/4" gauge (G.Sch: P-No: It/No:	Rs:337.00	P.Cft	Rs:8897.0
10.	1.06Cwt	Fabrication of mild steel reinforcement for cement concrete including cutting, bending laying in position, making joints and fastening including cost of binding wire (also includes removal of rust bars ) using tor bars(G.Sch:P-No:16 It/No:8(b).	Rs:5001.70	P.Cwt	Rs:5305.00

11.	241.0Rft	Construction of standard open type drains connuttee block of C.C 1:2:4 cost of situ to the design profile i.c cost of mould as per drawing i/c supplying floating cost of cement 1/32" thick to expose surface finished smooth curing complete as per drawing design..etc complete	Rs:94.00	P.Rft	Rs:22654.00
12.	439.0Cft	Cement plaster 1:4 up to 12' height 1/2" thick (G.Sch: P-No:51 It/No:11(b).	Rs:2283.93	%Sft	Rs:10018.00
				Total:-	Rs:1,28,029/-
<b>PART-B (PROVIDING AND FIXING OF PAVER BLOCK)</b>					
1.	2650.0Cft	Earth work excavation undressed lead upto a single throw of Kassi phawarah of shovel in ordinary soil ..etc	Rs:1361.25	%Ocft	Rs:3607.00
2.	2650.0Cft	Dressing and leveling of earth wok to designed section, in ordinary soil etc complete	Rs:187.55	%Ocft	Rs:497.00
3.	1325.0Cft	Supplying and filling pit sand under floor and plunging into wells...	Rs:1141.25	%Ocft	Rs:15122.
4.	875.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:98720.00
5.	2650.0Sft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quddra / cable shape with pigmented b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:657650.00
				Total:-	Rs:7,75,596.00

Amount Total (a+b) Rs:9,03,625/-

*12/1*  
%Above/Below On The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

Total (A) = a + b in words

*1012061*  
*Ten Lactive/ve Thousand Sixty one)*

*[Signature]*  
Contractor

*[Signature]*  
Executive Engineer / Procuring Agency

Summary of Bill of Quantities

Cost of Bid

Amount 10,120,61

1 (A) Cost based on composite Schedule of Rate


        

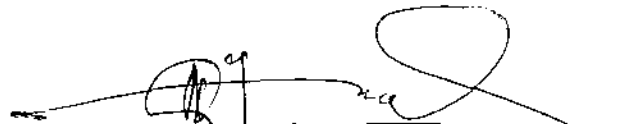
2 (B) Cost of based on Non / Offered Schedule of Rates.

TOTAL COST OF BID (C) = TOTAL (A) + Total (B)

10,120,61

  
Contractor

  
Executive Engineer / Procuring Agency

**SINDH PUBLIC PROCUREMENT REGULATORY AUTHORITY**  
**CONTRACT EVALUATION FORM**

**TO BE FILLED IN BY ALL PROCURING AGENCIES FOR PUBLIC**  
**CONTRACTORS OF WORKS, SERVICES & GOODS.**

- 1). NAME OF THE ORGANIZATION / DEPTT. Town Committee, Chuhar Jamali, Sujawal
- 2). PROVINCIAL / LOCAL GOVT. / OTHER LOCAL GOVERNMENT
- 3). TITLE OF CONTRACT: "CONSTRUCTION OF PAVER BLOCK FROM RAJA MEDICAL STORE TO FISH MARKET TOWN COMMITTEE CHUHAR JAMALI"
- 4) TENDER NUMBER: as above
- 5). BRIEF DESCRIPTION OF CONTRACT: CC Paver Block
- 6). FORUM THAT APPROVED THE SCHEME Town Committee, Chuhar Jamali
- 7). TENDER ESTIMATED VALUE Rs. 10,00,000/=
- 8). ENGINEER'S ESTIMATE PC -Cost Rs: 1000000/-  
(FOR CIVIL WORK ONLY)
- 9). ESTIMATED COMPLETION PERIOD (AS PER CONTRACT) (0 1) MONTH
- 10). TENDER OPENED ON DATE AND TIME 02-11-2017 AT 02:00 PM.
- 11). NUMBER OF TENDER DOCUMENTS SOLD (Attach list of buyers). 03
- 12). NUMBER OF BIDS RECEIVED 03
- 13). NUMBERS OF BIDDERS PRESENT AT THE TIME OF OPEINING OF BIDS 03
- 14). BID EVALUATION REPORT (Enclose a copy) YES
- 15). NAME AND ADDRESS OF THE SUCCESSFUL BIDDER. M/S Mumtaz Hussain Soomro
- 16). CONTRACT AWARD PRICE SANCTION RUPEES Rs: 999950 /-
- 17). RANKING OF SUCCESSFUL BIDDER IN EVALUATION REPORT (I.E. 1ST 2ND 3RD EVALUATION BID). 1<sup>st</sup> Lowest M/S Mumtaz Hussain Soomro  
2<sup>nd</sup> LOWEST M/S Abdul Hakeem Chandio  
3<sup>rd</sup> LOWEST M/S Liaqat Ali & Company
- 18). METHOD OF PROCUREMENT USED: - (TICK ONE)
- A). SINGLE STAGE-ONE ENVELOPE PROCEDURE \_\_\_\_\_ ✓ \_\_\_\_\_
- B). SINGLE STAGE-TWO ENVELOPE PROCEDURE \_\_\_\_\_
- C). TWO STAGE BIDDING PROCEDURE \_\_\_\_\_

D). TWO STAGE-TWO ENVELOPE BIDDING PROCEDURE

PLEASE SPECIFY IF ANY OTHER METHOD OF PROCUREMENT WAS ADOPTED i.e. EMERGENCY, DIRECT CONTRACTING ETC. WITH BRIEF REASONS.

19). PROVIDING AUTHORITY FOR AWARD OF CONTRACT CHAIRMAN TC, CHUHAR JAMALI

20). WHETHER THE PROCUREMENT WAS INCLUDED IN ANNUAL PROCUREMENT PLAN

YES	<input checked="" type="checkbox"/>	NO	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

21). ADVERTISEMENT:

i) SPPRA Website  
(if yes give date & SPPRA Identification No.

YES	<a href="http://www.pprasindhgov.pk">www.pprasindhgov.pk</a> SPPRA Tender SR No. 34792 Dt: 02-11-2017		
-----	--	--	--

ii) Newspapers  
(if yes give names of newspapers & dates)

YES	<input checked="" type="checkbox"/>	NO	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

22). NATURE OF CONTRACT

DOMESTIC/ LOCAL	<input checked="" type="checkbox"/> LOCAL	INT	<input type="checkbox"/>
-----------------	---	-----	--------------------------

23). WHETHER QUALIFICATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?

(If yes, enclose copy).

YES	<input checked="" type="checkbox"/>	NO	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

24). WHETHER BID EVALUATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?

(if, yes enclose a copy).

YES	<input checked="" type="checkbox"/>	NO	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

25). WHETHER APPROVAL OF COMPETENT AUTHORITY WAS OBTAINED FOR USING A METHOD OTHER THAN OPEN COMPETITIVE BIDDING?

YES	<input type="checkbox"/>	NO	N/A
-----	--------------------------	----	-----

26). WAS BID SECURITY OBTAINED FROM ALL THE BIDDERS?

YES	<input checked="" type="checkbox"/>	NO	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

27). WHETHER THE SUCCESSFUL BID WAS LOWEST EVALUATED BID / BEST EVALUATED BID (In case of Consultancies).

YES	<input checked="" type="checkbox"/>	NO	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

28). WHETHER THE SUCCESSFUL BIDDER WAS TECHNICALLY COMPLAINT?

YES	<input type="checkbox"/>	NO	N/A
-----	--------------------------	----	-----

29). WHETHER NAMES OF THE BIDDERS AND THEIR QUOTED PRICES WERE READ OUT AT THE TIME OF OPENING OF BIDS?

YES	<input checked="" type="checkbox"/>	NO	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

30). WHETHER EVALUATION REPORT GIVEN TO BIDDERS BEFORE THE AWARD OF CONTRACT?

(Attach a copy of the bid evaluation report).

31). ANY COMPLAINTS RECEIVED  
(if yes, result thereof).

YES	<input checked="" type="checkbox"/>	NO	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

YES	<input type="checkbox"/>	NO	<input type="checkbox"/>	N/A	<input type="checkbox"/>
-----	--------------------------	----	--------------------------	-----	--------------------------

32). ANY DEVIATION FROM SPECIFICATIONS GIVEN IN THE TENDER  
NOTICE / DOCUMENTS ( if yes, given details).

YES	<input type="checkbox"/>	NO	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

33). WAS THE EXTENSION MADE IN RESPONSE TIME?  
(if yes, given reasons)

YES	<input type="checkbox"/>	NO	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

34). DEVIATION FROM QUALIFICATION CRITERIA  
(if yes, detailed reasons).

YES	<input type="checkbox"/>	NO	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

35). WAS IT ASSURED BY THE PROCURING AGENCY THAT THE SELECTED  
FIRM IS NOT BLACK LISTED?

YES	<input type="checkbox"/>	NO	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

36). WAS A VISIT MADE BY ANY OFFICER / OFFICIAL OF THE PROCURING  
AGENCY TO THE SUPPLIER'S PREMISES IN CONNECTION WITH THE PROCUREMENT?  
IF SO, DETAILS TO BE ASCERTAINED REGARDING FINANCING OF VISIT, IF ABROAD:  
(if yes, enclose a copy)

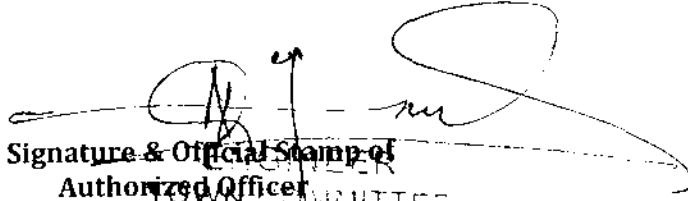
YES	<input type="checkbox"/>	NO	<input type="checkbox"/>	N/A	<input type="checkbox"/>
-----	--------------------------	----	--------------------------	-----	--------------------------

37). WERE PROPER SAFEGUARDS PROVIDED ON MOBILIZATION ADVANCE PAYMENT IN THE  
CONTRACT ( BANK GUARANTEE ETC)?

YES	<input type="checkbox"/>	NO	<input type="checkbox"/>	N/A	<input type="checkbox"/>
-----	--------------------------	----	--------------------------	-----	--------------------------

38). SPECIAL CONDITION, IF ANY  
(if yes, give Brief Description)

YES	<input type="checkbox"/>	NO	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

  
Signature & Official Stamp of  
Authorized Officer  
TOWN COMMITTEE  
CHUHAR JAWALI

FOR OFFICE USE ONLY

**SPPRA, Block No. 8, Sindh Secretariat No. 4-A, Court Road, Karachi**  
Tel: 021-9205356, 021-9205369 & Fax No. 021-9206291.

# OFFICE OF THE TOWN COMMITTEE

## CHUHAR JAMALI

NO.T.C.C.J./T.O/ 49

/2017

Dated:

15/12/2017

M/s. MUMTAZ HUSSAIN SOOMRO,  
GOVERNMENT CONTRACTOR

### LETTER OF ACCEPTANCE / SANCTION ORDER

**Subject: CONSTRUCTION OF PAVER BLOCK FROM RAJA MEDICAL STORE TO FISH MARKET TOWN COMMITTEE CHUHAR JAMALI**

On behalf of the employer it is notified that following the approval of accepted of Chairman, Town Committee, Chuhar Jamali, vide Para 19 /No, your bid for the subject is hereby accepted for the sum of Rs:9,99,950/- (**Rupees. NINE LAC NINETY NINE THOUSAND NINE HUNDRED FIFTY ONLY**) as approved by the competent authority Town Committee, Chuhar Jamali.

There is now binding contract between Town Committee, Chuhar Jamali and M/s. Mumtaz Hussain Soomro,

In accordance with the general condition of contract, you are required to enter in to and execute a contract agreement this agreement shall be signed by employer and M/s. Mumtaz Hussain Soomro.

In accordance with condition of contract as per SPPRA-2010 the 2% Bid security Rs:20,000/- and remaining 8% Security may deduct from bill.

All correspondence on onward shall be carried out through Town Officer, Town Committee, Chuhar Jamali.

  
TOWN OFFICER

TOWN COMMITTEE, CHUHAR JAMALI

Copy to:-

- 1- Chairman, Town Committee, Chuhar Jamali.
- 2- Assistant Executive Engineer, (Town Committee, Chuhar Jamali)
- 3- Office Copy.



# TOWN COMMITTEE CHUHAR JAMALI

## AGREEMENT

Subject: - CONSTRUCTION OF PAVER BLOCK FROM RAJA MEDICAL STORE TO FISH MARKET TOWN COMMITTEE CHUHAR JAMALI

Cost Rs.9,99,950/-

Completion Time (03 Months) penalty \_\_\_\_\_

The Agreement is made on this 20th Dec day of 2017 at Thatta, between the Town Committee, Chuhar Jamali herein after called the Chuhar Jamali, Sujawal (Which expression shall mean and include his successors) on the one part and M/s. MUMTAZ HUSSAIN SOOMRO, have the office at \_\_\_\_\_ through their proprietor \_\_\_\_\_ hereinafter call the "Contractor" (Which expression shall mean and include his successors, administrators and assignees) on the other part.

Whereas the Town Committee, Chuhar Jamali, has accepted the tender of the contractor for construction and completion of the work namely CONSTRUCTION OF PAVER BLOCK FROM RAJA MEDICAL STORE TO FISH MARKET TOWN COMMITTEE CHUHAR JAMALI at a cost of Rs.9,99,950/- within a period of (03 Month) and penalty Rs. \_\_\_\_\_ according to the specification and general conditions of the contract signed by the Contractor after having made himself full acquainted with their meaning.

And whereas the Contractor has already furnished with the Town Committee, Chuhar Jamali the 2% bid amount of Rs.20,000/- (Rupees Twenty Thousand Only) on account of bid Performance security for the said contract.

The following documents after incorporating addenda, except those parts relating to instructions to bidders shall be deemed to form and be read and construed as part of this Agreement, viz:

- a) The Contract Agreement;
- b) The Letter of Acceptance;
- c) The Completed form of Bid;
- d) The Standard and special Terms & Conditions of Contract – Part;
- e) The priced Bill of Quantities

In consideration of the payments to be made by the Town Committee, Chuhar Jamali to the Contractor as hereinafter mentioned, the contractor hereby covenants with the Town Committee, Chuhar Jamali to execute and complete the works and remedy defects therein In conformity and in all respects with the provisions of the contract.

The Town Committee, Chuhar Jamali hereby covenants to pay the contractor, in consideration of the execution and completion of the works as per provisions of contract, the contract Price or such other sum as may become payable under the provisions of the contract at the time and in the manner prescribed by the contractor.

The contractor has given a lien to the Town Committee, Chuhar Jamali over the Security for due fulfillment of the contract and do hereby bind himself, his heirs, successors legal representative and assignee to pay to the Town Committee, Chuhar Jamali penalty through forfeiture of the said Security in case of breach of any condition of the Contract without prejudice to the right of Town Committee, Chuhar Jamali to recover the damages from the Contractor for any such breach as per condition of the contract.

Now therefore this agreement witnesses that the Town Committee, Chuhar Jamali and the Contractor shall respectively and shall well truly carry out and fulfill the contract and abide by all terms and conditions and specifications thereof.

In witness whereof the said parties have set their respective hands on this 20th of Dec 2017

Witness:

1. Rizq Ali Khan
2. Roshid Hussain

M/s MUMTAZ HUSSAIN SOOMRO  
Government & Private Contractor

CHAIRMAN  
TOWN COMMITTEE, CHUHAR JAMALI



*Handwritten signature*  
**NOT RECORDED**  
Thatta

NAME OF WORK: - CONSTRUCTION OF PAVER BLOCK FROM RAJA MEDICAL STORE TO FISH MARKET TOWN COMMITTEE CHUHAR JAMALI

BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
1.	3146.0Cft	Earth work excavation undressed lead upto a single throw of Kassi phawarah of shovel in ordinary soil ..etc	Rs:1361.25	%Ocft	Rs:4282.00
2.	3146.0Cft	Dressing and leveling of earth wok to designed section, in ordinary soil etc complete	Rs:187.55	%Ocft	Rs:590.00
3.	1573.0Cft	Supplying and filling pit sand under floor and plunging into wells...	Rs:1141.25	%Ocft	Rs:17952.00
4.	1038.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:117197.00
5.	3146.0Sft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quddra / cable shape with pigmented b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:780743.00

Amount Total (a+b) Rs:9,20,764/-

Amount to be Added/Deducted on the basis of premium quoted Total (b)

8.66 % Above/Below On The Schedule Rates of CSR.

Total (A) = a + b in words

999950  
Nine Lac Ninety Nine thousand  
Nine Hundred Fifty Only

Executive Engineer / Procuring Agency

Contractor



NAME OF WORK: - CONSTRUCTION OF PAVER BLOCK FROM RAJA MEDICAL STORE TO FISH MARKET TOWN COMMITTEE CHUHAR JAMALI

BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
1.	3146.0Cft	Earth work excavation undressed lead upto a single throw of Kassi phawarah of shovel in ordinary soil ..etc	Rs:1361.25	%Ocft	Rs:4282.00
2.	3146.0Cft	Dressing and leveling of earth wok to designed section, in ordinary soil etc complete	Rs:187.55	%Ocft	Rs:590.00
3.	1573.0Cft	Supplying and filling pit sand under floor and plunging into wells...	Rs:1141.25	%Ocft	Rs:17952.00
4.	1038.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 l/5(f)	Rs:11288.75	%Cft	Rs:117197.00
5.	3146.0Sft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quddra / cable shape with pigmented b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:780743.00

Amount Total (a+b) Rs:9,20,764/-

9.50 % Above/Below On The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

1008238

Total (A) = a + b in words

Ten Lac Eight thousand two hundred thirty eight only)

*Alhacen*  
Contractor

*[Signature]*  
Executive Engineer / Procuring Agency

Summary of Bill of Quantities

Cost of Bid

Amount 100 8238

1 (A) Cost based on composite Schedule of Rate

\_\_\_\_\_

2 (B) Cost of based on Non / Offered Schedule of Rates.

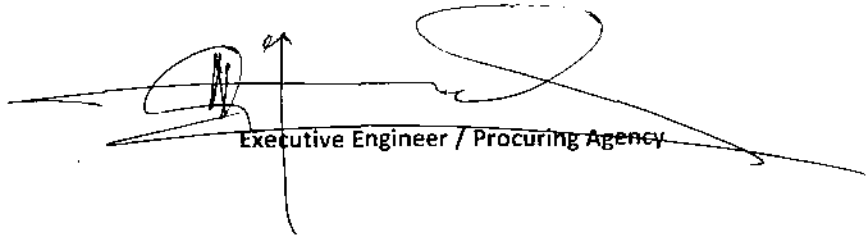
\_\_\_\_\_

TOTAL COST OF BID (C) = TOTAL (A) + Total (B)

100 8238

*Alhadeen*

Contractor

  
Executive Engineer / Procuring Agency

NAME OF WORK: - CONSTRUCTION OF PAVER BLOCK FROM RAJA MEDICAL STORE TO FISH MARKET TOWN COMMITTEE CHUHAR JAMALI

BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
1.	3146.0Cft	Earth work excavation undressed lead upto a single throw of Kassi phawarah of shovel in ordinary soil ..etc	Rs:1361.25	%Ocft	Rs:4282.00
2.	3146.0Cft	Dressing and leveling of earth wok to designed section, in ordinary soil etc complete	Rs:187.55	%Ocft	Rs:590.00
3.	1573.0Cft	Supplying and filling pit sand under floor and plunging into wells...	Rs:1141.25	%Ocft	Rs:17952.00
4.	1038.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:117197.00
5.	3146.0Sft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quddra / cable shape with pigmented b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:780743.00

Amount Total (a+b) Rs:9,20,764/-

*10/* %Above/Below On The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

Total (A) = a + b in words

1012841/2

Ten Lax Twelve thousand Eight hundred forty one Only

*[Signature]*  
Contractor

*[Signature]*  
Executive Engineer / Procuring Agency

Summary of Bill of Quantities

Cost of Bid

Amount 1012841

1 (A) Cost based on composite Schedule of Rate

\_\_\_\_\_

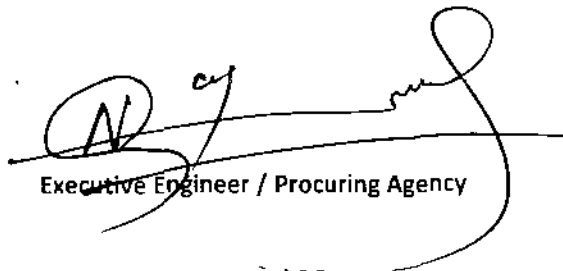
2 (B) Cost of based on Non / Offered Schedule of Rates.

\_\_\_\_\_

TOTAL COST OF BID (C) = TOTAL (A) + Total (B)

1012841

  
Contractor

  
Executive Engineer / Procuring Agency

**SINDH PUBLIC PROCUREMENT REGULATORY AUTHORITY**  
**CONTRACT EVALUATION FORM**

**TO BE FILLED IN BY ALL PROCURING AGENCIES FOR PUBLIC**  
**CONTRACTORS OF WORKS, SERVICES & GOODS.**

- 1). NAME OF THE ORGANIZATION / DEPTT. Town Committee, Chuhar Jamali, Sujawal
- 2). PROVINCIAL / LOCAL GOVT. / OTHER LOCAL GOVERNMENT
- 3). TITLE OF CONTRACT: "CONSTRUCTION OF PAVER BLOCK FROM ILYAS KACHI SHOP TO HYDRI CHOWK TOWN COMMITTEE CHUHAR JAMALI"
- 4) TENDER NUMBER: as above
- 5). BRIEF DESCRIPTION OF CONTRACT: CC Paver Block
- 6). FORUM THAT APPROVED THE SCHEME Town Committee, Chuhar Jamali
- 7). TENDER ESTIMATED VALUE Rs. 10,00,000/=
- 8). ENGINEER'S ESTIMATE PC -Cost Rs: 1000000/-
- (FOR CIVIL WORK ONLY)
- 9). ESTIMATED COMPLETION PERIOD (AS PER CONTRACT) (0 1) MONTH
- 10). TENDER OPENED ON DATE AND TIME 02-11-2017 AT 02:00 PM.
- 11). NUMBER OF TENDER DOCUMENTS SOLD (Attach list of buyers). 03
- 12). NUMBER OF BIDS RECEIVED 03
- 13). NUMBERS OF BIDDERS PRESENT AT THE TIME OF OPEINING OF BIDS 03
- 14). BID EVALUATION REPORT (Enclose a copy) YES
- 15). NAME AND ADDRESS OF THE SUCCESSFUL BIDDER. M/S Mumtaz Hussain Soomro
- 16). CONTRACT AWARD PRICE SANCTION RUPEES Rs: 999950/-
- 17). RANKING OF SUCCESSFUL BIDDER IN EVALUATION REPORT (I.E. 1ST 2ND 3RD EVALUATION BID). 1<sup>st</sup> Lowest M/S Mumtaz Hussain Soomro  
2<sup>nd</sup> LOWEST M/S Abdul Hakeem Chandio  
3<sup>rd</sup> LOWEST M/S Liaqat Ali & Company
- 18). METHOD OF PROCUREMENT USED: - (TICK ONE)
- A). SINGLE STAGE-ONE ENVELOPE PROCEDURE \_\_\_\_\_ ✓ \_\_\_\_\_
- B). SINGLE STAGE-TWO ENVELOPE PROCEDURE \_\_\_\_\_
- C). TWO STAGE BIDDING PROCEDURE \_\_\_\_\_



D). TWO STAGE-TWO ENVELOPE BIDDING PROCEDURE

PLEASE SPECIFY IF ANY OTHER METHOD OF PROCUREMENT WAS ADOPTED i.e. EMERGENCY, DIRECT CONTRACTING ETC. WITH BRIEF REASONS.

19). PROVIDING AUTHORITY FOR AWARD OF CONTRACT CHAIRMAN TC, CHUHAR JAMALI

20). WHETHER THE PROCUREMENT WAS INCLUDED IN ANNUAL PROCUREMENT PLAN

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

21). ADVERTISEMENT:

i) SPPRA Website  
(if yes give date & SPPRA Identification No.

YES	<a href="http://www.pprasindh.gov.pk">www.pprasindh.gov.pk</a> SPPRA Tender SR No. 34792 Dt: 02-11-2017
-----	--

ii) Newspapers  
(if yes give names of newspapers & dates)

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

22). NATURE OF CONTRACT

DOMESTIC/ LOCAL	<input checked="" type="checkbox"/>	LOCAL	INT
-----------------	-------------------------------------	-------	-----

23). WHETHER QUALIFICATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?

(If yes, enclose copy).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

24). WHETHER BID EVALUATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?

(if, yes enclose a copy).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

25). WHETHER APPROVAL OF COMPETENT AUTHORITY WAS OBTAINED FOR USING A METHOD OTHER THAN OPEN COMPETITIVE BIDDING?

YES		NO	N/A
-----	--	----	-----

26). WAS BID SECURITY OBTAINED FROM ALL THE BIDDERS?

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

27). WHETHER THE SUCCESSFUL BID WAS LOWEST EVALUATED BID / BEST EVALUATED BID (In case of Consultancies).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

28). WHETHER THE SUCCESSFUL BIDDER WAS TECHNICALLY COMPLAINT?

YES		NO	N/A
-----	--	----	-----

29). WHETHER NAMES OF THE BIDDERS AND THEIR QUOTED PRICES WERE READ OUT AT THE TIME OF OPENING OF BIDS?

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

30). WHETHER EVALUATION REPORT GIVEN TO BIDDERS BEFORE THE AWARD OF CONTRACT?

(Attach a copy of the bid evaluation report).

31). ANY COMPLAINTS RECEIVED  
(if yes, result thereof).

YES	<input checked="" type="checkbox"/>	NO	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

YES	<input type="checkbox"/>	NO	<input type="checkbox"/>	N/A	<input type="checkbox"/>
-----	--------------------------	----	--------------------------	-----	--------------------------

32). ANY DEVIATION FROM SPECIFICATIONS GIVEN IN THE TENDER  
NOTICE / DOCUMENTS ( if yes, given details).

YES	<input type="checkbox"/>	NO	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

33). WAS THE EXTENSION MADE IN RESPONSE TIME?  
(if yes, given reasons)

YES	<input type="checkbox"/>	NO	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

34). DEVIATION FROM QUALIFICATION CRITERIA  
(if yes, detailed reasons).

YES	<input type="checkbox"/>	NO	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

35). WAS IT ASSURED BY THE PROCURING AGENCY THAT THE SELECTED  
FIRM IS NOT BLACK LISTED?

YES	<input type="checkbox"/>	NO	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

36). WAS A VISIT MADE BY ANY OFFICER / OFFICIAL OF THE PROCURING  
AGENCY TO THE SUPPLIER'S PREMISES IN CONNECTION WITH THE PROCUREMENT?  
IF SO, DETAILS TO BE ASCERTAINED REGARDING FINANCING OF VISIT, IF ABROAD:  
(if yes, enclose a copy)

YES	<input type="checkbox"/>	NO	<input type="checkbox"/>	N/A	<input type="checkbox"/>
-----	--------------------------	----	--------------------------	-----	--------------------------

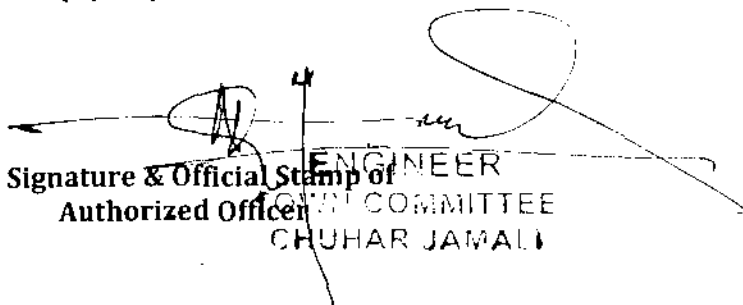
37). WERE PROPER SAFEGUARDS PROVIDED ON MOBILIZATION ADVANCE PAYMENT IN THE  
CONTRACT ( BANK GUARANTEE ETC)?

YES	<input type="checkbox"/>	NO	<input type="checkbox"/>	N/A	<input type="checkbox"/>
-----	--------------------------	----	--------------------------	-----	--------------------------

38). SPECIAL CONDITION, IF ANY  
(if yes, give Brief Description)

YES	<input type="checkbox"/>	NO	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

Signature & Official Stamp of  
Authorized Officer



ENGINEER  
COMMITTEE  
CHUHAR JAMALI

FOR OFFICE USE ONLY

**SPPRA, Block No. 8, Sindh Secretariat No. 4-A, Court Road, Karachi**  
Tel: 021-9205356, 021-9205369 & Fax No. 021-9206291.

# OFFICE OF THE TOWN COMMITTEE

## CHUHAR JAMALI

✓ NO.T.C.C.J./T.O/ SO

/ 2017

Dated: 15/12/2017

M/s. MUMTAZ HUSSAIN SOOMRO,  
GOVERNMENT CONTRACTOR

### LETTER OF ACCEPTANCE / SANCTION ORDER

**Subject: CONSTRUCTION OF PAVER BLOCK FROM ILYAS KACHI SHOP TO HYDRI  
CHOWK TOWN COMMITTEE CHUHAR JAMALI**


On behalf of the employer it is notified that following the approval of accepted of Chairman, Town Committee, Chuhar Jamali, vide Para 20 /No, your bid for the subject is hereby accepted for the sum of Rs:9,99,950/- (Rupees. NINE LAC NINETY NINE THOUSAND NINE HUNDRED FIFTY ONLY) as approved by the competent authority Town Committee, Chuhar Jamali.

There is now binding contract between Town Committee, Chuhar Jamali and **M/s. Mumtaz Hussain Soomro,**

In accordance with the general condition of contract, you are required to enter in to and execute a contract agreement this agreement shall be signed by employer and **M/s. Mumtaz Hussain Soomro.**

In accordance with condition of contract as per SPPRA-2010 the 2% Bid security Rs:20,000/- and remaining 8% Security may deduct from bill.

All correspondence on onward shall be carried out through Town Officer, Town Committee, Chuhar Jamali.

  
**TOWN OFFICER**  
**TOWN COMMITTEE, CHUHAR JAMALI**

Copy to:-

- 1- Chairman, Town Committee, Chuhar Jamali.
- 2- Assistant Executive Engineer, (Town Committee, Chuhar Jamali)
- 3- Office Copy.

# TOWN COMMITTEE CHUHAR JAMALI

## AGREEMENT

Subject: - CONSTRUCTION OF PAVER BLOCK FROM ILYAS KACHI SHOP TO HYDRI CHOWK TOWN COMMITTEE CHUHAR JAMALI

Cost Rs.9,99,950/-

Completion Time (03 Months) penalty \_\_\_\_\_

The Agreement is made on this 20th Dec day of 2017 at Thatta, between the Town Committee, Chuhar Jamali herein after called the Chuhar Jamali, Sujawal (Which expression shall mean and include his successors) on the one part and M/s. MUMTAZ HUSSAIN SOOMRO having the office at TC Chuhar Jamali through their proprietor \_\_\_\_\_ hereinafter call the "Contractor" (Which expression shall mean and include his successors, administrators and assignees) on the other part.

Whereas the Town Committee, Chuhar Jamali, has accepted the tender of the Contractor for construction and completion of the work namely CONSTRUCTION OF PAVER BLOCK FROM ILYAS KACHI SHOP TO HYDRI CHOWK TOWN COMMITTEE CHUHAR JAMALI at a cost of Rs.9,99,950/- within a period of (03 Month) and penalty Rs. \_\_\_\_\_ according to the specification and general conditions of the contract signed by the Contractor after having made himself full acquainted with their meaning.

And whereas the Contractor has already furnished with the Town Committee, Chuhar Jamali the 2% bid amount of Rs.20,000/- (Rupees Twenty Thousand Only) on account of 100% Performance security for the said contract.

The following documents after incorporating addenda, except those parts relating to instructions to bidders shall be deemed to form and be read and construed as part of this Agreement, viz:

- a) The Contract Agreement;
- b) The Letter of Acceptance;
- c) The Completed form of Bid;
- d) The Standard and special Terms & Conditions of Contract – Part;
- e) The priced Bill of Quantities

In consideration of the payments to be made by the Town Committee, Chuhar Jamali to the Contractor as hereinafter mentioned, the contractor hereby covenants with the Town Committee Chuhar Jamali to execute and complete the works and remedy defects therein in conformity and in all respects with the provisions of the contract.

The Town Committee, Chuhar Jamali hereby covenants to pay the contractor, in consideration of the execution and completion of the works as per provisions of contract, the contract Price or such other sum as may become payable under the provisions of the contract at the time and in the manner prescribed by the contractor.

The contractor has given a lien to the Town Committee, Chuhar Jamali over the Security for due fulfilment of the contract and do hereby bind himself, his heirs, successors legal representatives and assignee to pay to the Town Committee, Chuhar Jamali penalty through forfeiture of the Security in case of breach of any condition of the Contract without prejudice to the right of Town Committee, Chuhar Jamali to recover the damages from the Contractor for any such breach as per condition of the contract.

Now therefore this agreement witnesses that the Town Committee, Chuhar Jamali and the Contractor shall respectively and shall well truly carry out and fulfill the contract and abide by all terms and conditions and specifications thereof.

In witness whereof the said parties have set their respective hands on this 20th of Dec 2017

Witness:

1. Rizq Ali Meemon

2. Rasheed Hussain

M/s MUMTAZ HUSSAIN SOOMRO  
Contractor

CHAIRMAN  
TOWN COMMITTEE, CHUHAR JAMALI

**M/s MUMTAZ HUSSAIN SOOMRO**  
Government & Private Contractor



NAME OF WORK: - CONSTRUCTION OF PAVER BLOCK FROM ILYAS KACHI SHOP TO HYDRI CHOWK TOWN COMMITTEE CHUHAR JAMALI

BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
1.	3146.0Cft	Earth work excavation undressed lead upto a single throw of Kassi phawarah of shovel in ordinary soil ..etc	Rs:1361.25	%Ocft	Rs:4282.00
2.	3146.0Cft	Dressing and leveling of earth wok to designed section, in ordinary soil etc complete	Rs:187.55	%Ocft	Rs:590.00
3.	1573.0Cft	Supplying and filling pit sand under floor and plunging into wells...	Rs:1141.25	%Ocft	Rs:17952.00
4.	1038.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 1/5(f))	Rs:11288.75	%Cft	Rs:117197.00
5.	3146.0Sft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quddra / cable shape with pigmented b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:780743.00

Amount Total (a+b) Rs:9,20,764/-

8.60% Above/Below On The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

Total (A) = a + b in words

999950 -  
Nine Lac Fifty Nine Thousand Nine hundred

Contractor

Executive Engineer / Procuring Agency

Summary of Bill of Quantities

Cost of Bid

Amount

999950 -

1 (A) Cost based on composite Schedule of Rate

—

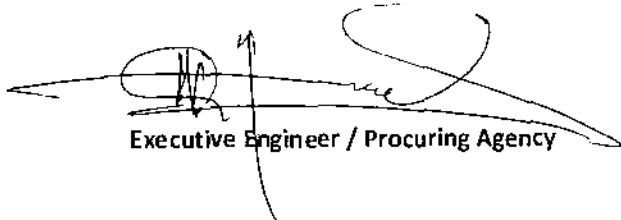
2 (B) Cost of based on Non / Offered Schedule of Rates.

—

TOTAL COST OF BID (C) = TOTAL (A) + Total (B)

999950 -

  
Contractor

  
Executive Engineer / Procuring Agency

NAME OF WORK: - CONSTRUCTION OF PAVER BLOCK FROM ILYAS KACHI SHOP TO HYDRI CHOWK TOWN COMMITTEE CHUHAR JAMALI

BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
1.	3146.0Cft	Earth work excavation undressed lead upto a single throw of Kassi phawarah of shovel in ordinary soil ..etc	Rs:1361.25	%Ocft	Rs:4282.00
2.	3146.0Cft	Dressing and leveling of earth wok to designed section, in ordinary soil etc complete	Rs:187.55	%Ocft	Rs:590.00
3.	1573.0Cft	Supplying and filling pit sand under floor and plunging into wells...	Rs:1141.25	%Ocft	Rs:17952.00
4.	1038.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 1/5(f))	Rs:11288.75	%Cft	Rs:117197.00
5.	3146.0Sft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quddra / cable shape with pigmented b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:780743.00

Amount Total (a+b) Rs:9,20,764/-

*9.50%*  
%Above/Below On The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

*1008238-*

Total (A) = a + b in words

*Ten Lakh Eight thousand two hundred*

*thirty eight) only*

Contractor

*Abdulkarim*

*[Signature]*  
Executive Engineer / Procuring Agency

Summary of Bill of Quantities

Cost of Bid

Amount 1008238 -

1 (A) Cost based on composite Schedule of Rate

\_\_\_\_\_

2 (B) Cost of based on Non / Offered Schedule of Rates.

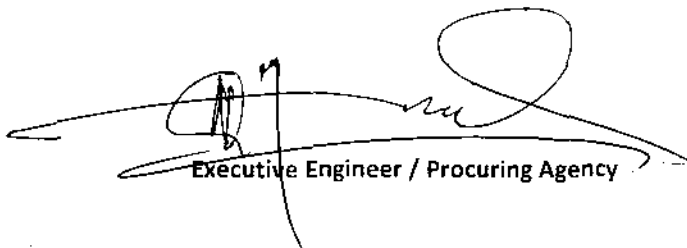
\_\_\_\_\_

TOTAL COST OF BID (C) = TOTAL (A) + Total (B)

1008238 -

*Ahmed*

Contractor

 A large, stylized handwritten signature in black ink, consisting of several loops and a long horizontal stroke.

Executive Engineer / Procuring Agency



NAME OF WORK: - CONSTRUCTION OF PAVER BLOCK FROM ILYAS KACHI SHOP TO HYDRI CHOWK TOWN COMMITTEE CHUHAR JAMALI

BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
1.	3146.0Cft	Earth work excavation undressed lead upto a single throw of Kassi phawarah of shovel in ordinary soil ..etc	Rs:1361.25	%Ocft	Rs:4282.00
2.	3146.0Cft	Dressing and leveling of earth wok to designed section, in ordinary soil etc complete	Rs:187.55	%Ocft	Rs:590.00
3.	1573.0Cft	Supplying and filling pit sand under floor and plunging into wells...	Rs:1141.25	%Ocft	Rs:17952.00
4.	1038.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:117197.00
5.	3146.0Sft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quddra / cable shape with pigmented b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:780743.00

Amount Total (a+b) Rs:9,20,764/-

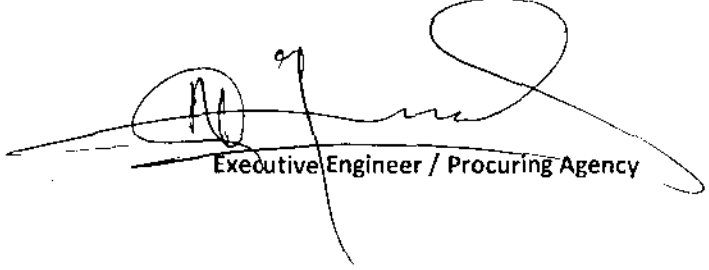
10% %Above/Below On The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

1012841 - Ten Lactwelve Thousand eight hundred eighty one

Total (A) = a + b in words

  
Contractor

  
Executive Engineer / Procuring Agency



**SINDH PUBLIC PROCUREMENT REGULATORY AUTHORITY**  
**CONTRACT EVALUATION FORM**

**TO BE FILLED IN BY ALL PROCURING AGENCIES FOR PUBLIC CONTRACTORS OF WORKS, SERVICES & GOODS.**

- 1). NAME OF THE ORGANIZATION / DEPTT. Town Committee, Chuhar Jamali, Sujawal
- 2). PROVINCIAL / LOCAL GOVT. / OTHER LOCAL GOVERNMENT
- 3). TITLE OF CONTRACT: "CONSTRUCTION OF PAVER BLOCK FROM HYDRI CHOWK TO SOOMAR KACHI HOTEL TOWN COMMITTEE CHUHAR JAMALI"
- 4) TENDER NUMBER: as above
- 5). BRIEF DESCRIPTION OF CONTRACT: CC Paver Block
- 6). FORUM THAT APPROVED THE SCHEME Town Committee, Chuhar Jamali
- 7). TENDER ESTIMATED VALUE Rs. 10,00,000/=
- 8). ENGINEER'S ESTIMATE PC -Cost Rs: 1000000/-  
(FOR CIVIL WORK ONLY)
- 9). ESTIMATED COMPLETION PERIOD (AS PER CONTRACT) (0 1) MONTH
- 10). TENDER OPENED ON DATE AND TIME 02-11-2017 AT 02:00 PM.
- 11). NUMBER OF TENDER DOCUMENTS SOLD 03  
(Attach list of buyers).
- 12). NUMBER OF BIDS RECEIVED 03
- 13). NUMBERS OF BIDDERS PRESENT AT THE TIME OF OPEINING OF BIDS 03
- 14). BID EVALUATION REPORT YES  
(Enclose a copy)
- 15). NAME AND ADDRESS OF THE SUCCESSFUL BIDDER. M/S Mumtaz Hussain Soomro
- 16). CONTRACT AWARD PRICE SANCTION RUPEES Rs: 999950/-  
Liagat Ali & Co.
- 17). RANKING OF SUCCESSFUL BIDDER IN EVALUATION REPORT 1<sup>st</sup> Lowest M/S Mumtaz Hussain Soomro  
2<sup>nd</sup> LOWEST M/S Abdul Hakeem Chandio  
3<sup>rd</sup> LOWEST M/S Liagat Ali & Company  
Mumtaz Hussain Soomro
- 18). METHOD OF PROCUREMENT USED: - (TICK ONE)
- A).  SINGLE STAGE-ONE ENVELOPE PROCEDURE
- B).  SINGLE STAGE-TWO ENVELOPE PROCEDURE
- C).  TWO STAGE BIDDING PROCEDURE

Liagat Ali & Co.  
Mumtaz Hussain Soomro  
ENGINEER  
TOWN COMMITTEE  
CHUHAR JAMALI

D). TWO STAGE-TWO ENVELOPE BIDDING PROCEDURE

PLEASE SPECIFY IF ANY OTHER METHOD OF PROCUREMENT WAS ADOPTED i.e. EMERGENCY, DIRECT CONTRACTING ETC. WITH BRIEF REASONS.

19). PROVIDING AUTHORITY FOR AWARD OF CONTRACT CHAIRMAN TC. CHUHAR [AMAL]

20). WHETHER THE PROCUREMENT WAS INCLUDED IN ANNUAL PROCUREMENT PLAN

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

21). ADVERTISEMENT:

i) SPPRA Website  
(if yes give date & SPPRA Identification No.)

YES	<a href="http://www.pprasindhgov.pk">www.pprasindhgov.pk</a> SPPRA Tender SR No. 34792 Dt: 02-11-2017
-----	--

ii) Newspapers  
(if yes give names of newspapers & dates)

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

22). NATURE OF CONTRACT

DOMESTIC/ LOCAL	<input checked="" type="checkbox"/> LOCAL	INT	
-----------------	---	-----	--

23). WHETHER QUALIFICATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?

(If yes, enclose copy).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

24). WHETHER BID EVALUATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?

(if, yes enclose a copy).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

25). WHETHER APPROVAL OF COMPETENT AUTHORITY WAS OBTAINED FOR USING A METHOD OTHER THAN OPEN COMPETITIVE BIDDING?

YES		NO	N/A
-----	--	----	-----

26). WAS BID SECURITY OBTAINED FROM ALL THE BIDDERS?

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

27). WHETHER THE SUCCESSFUL BID WAS LOWEST EVALUATED BID / BEST EVALUATED BID (In case of Consultancies).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

28). WHETHER THE SUCCESSFUL BIDDER WAS TECHNICALLY COMPLAINT?

YES		NO	N/A
-----	--	----	-----

29). WHETHER NAMES OF THE BIDDERS AND THEIR QUOTED PRICES WERE READ OUT AT THE TIME OF OPENING OF BIDS?

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

30). WHETHER EVALUATION REPORT GIVEN TO BIDDERS BEFORE THE AWARD OF CONTRACT?

(Attach a copy of the bid evaluation report).

31). ANY COMPLAINTS RECEIVED  
(if yes, result thereof).

YES	<input checked="" type="checkbox"/>	NO
-----	-------------------------------------	----

32). ANY DEVIATION FROM SPECIFICATIONS GIVEN IN THE TENDER  
NOTICE / DOCUMENTS ( if yes, given details).

YES	<input type="checkbox"/>	NO	N/A
-----	--------------------------	----	-----

33). WAS THE EXTENSION MADE IN RESPONSE TIME?  
(if yes, given reasons)

YES	<input type="checkbox"/>	NO	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

34). DEVIATION FROM QUALIFICATION CRITERIA  
(if yes, detailed reasons).

YES	<input type="checkbox"/>	NO	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

34). DEVIATION FROM QUALIFICATION CRITERIA  
(if yes, detailed reasons).

YES	<input type="checkbox"/>	NO	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

35). WAS IT ASSURED BY THE PROCURING AGENCY THAT THE SELECTED  
FIRM IS NOT BLACK LISTED?

YES	<input type="checkbox"/>	NO	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

36). WAS A VISIT MADE BY ANY OFFICER / OFFICIAL OF THE PROCURING  
AGENCY TO THE SUPPLIER'S PREMISES IN CONNECTION WITH THE PROCUREMENT?  
IF SO, DETAILS TO BE ASCERTAINED REGARDING FINANCING OF VISIT, IF ABROAD:  
(if yes, enclose a copy)

YES	<input type="checkbox"/>	NO	N/A
-----	--------------------------	----	-----

37). WERE PROPER SAFEGUARDS PROVIDED ON MOBILIZATION ADVANCE PAYMENT IN THE  
CONTRACT ( BANK GUARANTEE ETC)?

YES	<input type="checkbox"/>	NO	N/A
-----	--------------------------	----	-----

38). SPECIAL CONDITION, IF ANY  
(if yes, give Brief Description)

YES	<input type="checkbox"/>	NO	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

Signature & Official Stamp of  
Authorized Officer

ENGINEER  
TENDER COMMITTEE  
CHUHAK TAMALI

FOR OFFICE USE ONLY

**SPPRA, Block No. 8, Sindh Secretariat No. 4-A, Court Road, Karachi**

**Tel: 021-9205356, 021-9205369 & Fax No. 021-9206291.**

# OFFICE OF THE TOWN COMMITTEE

## CHUHAR JAMALI

NO.T.C.C.J./T.O/ 51

/2017

Dated: 15/12/2017

*M/s. Mumtaz Hussain Soomro*

M/s. MUMTAZ HUSSAIN SOOMRO,  
GOVERNMENT CONTRACTOR

### LETTER OF ACCEPTANCE / SANCTION ORDER

**Subject: CONSTRUCTION OF PAVER BLOCK FROM HYDRI CHOWK TO SOOMAR KACHI  
HOTEL TOWN COMMITTEE CHUHAR JAMALI**

On behalf of the employer it is notified that following the approval of accepted of Chairman, Town Committee, Chuhar Jamali, vide Para 21/No, your bid for the subject is hereby accepted for the sum of Rs:9,99,950/- (Rupees. NINE LAC NINETY NINE THOUSAND NINE HUNDRED FIFTY ONLY) as approved by the competent authority Town Committee, Chuhar Jamali.

There is now binding contract between Town Committee, Chuhar Jamali and M/s. Mumtaz Hussain Soomro,

In accordance with the general condition of contract, you are required to enter in to and execute a contract agreement this agreement shall be signed by employer and M/s. Mumtaz Hussain Soomro.

In accordance with condition of contract as per SPPRA-2010 the 2% Bid security Rs:20,000/- and remaining 8% Security may deduct from bill.

All correspondence on onward shall be carried out though Town Officer, Town Committee, Chuhar Jamali.

*[Signature]*  
TOWN OFFICER

TOWN COMMITTEE, CHUHAR JAMALI

Copy to:-

- 1- Chairman, Town Committee, Chuhar Jamali.
- 2- Assistant Executive Engineer, (Town Committee, Chuhar Jamali)
- 3- Office Copy.

# TOWN COMMITTEE CHUHAR JAMALI

## AGREEMENT

Subject: - CONSTRUCTION OF PAVER BLOCK FROM HYDRI CHOWK TO SOOMAR KACHI HOTEL TOWN COMMITTEE CHUHAR JAMALI

Cost Rs.9,99,950/-

Completion Time (03 Months) penalty \_\_\_\_\_

The Agreement is made on this 20th Dec day of 2017 at Thatta, between the Town Committee, Chuhar Jamali herein after called the Chuhar Jamali, Sujawal (Which expression shall mean and include his successors) on the one part and M/s. MOHAMMAD HUSSAIN SOOMRA, have the office at Chairman TC Chuhar Jamali through their proprietor \_\_\_\_\_ hereinafter call the "Contractor" (Which expression shall mean and include his successors, administrator and assignees) on the other part.

Whereas the Town Committee, Chuhar Jamali, has accepted the tender of the contractor for construction and completion of the work namely CONSTRUCTION OF PAVER BLOCK FROM HYDRI CHOWK TO SOOMAR KACHI HOTEL TOWN COMMITTEE CHUHAR JAMALI at a cost of Rs.9,99,950/- within a period of (03 Month) and penalty Rs. \_\_\_\_\_ according to the specification and general conditions of the contract signed by the Contractor after having made himself full acquainted with their meaning.

And whereas the Contractor has already furnished with the Town Committee, Chuhar Jamali the 2% bid amount of Rs.20,000/- (Rupees Twenty Thousand Only) on account of Bid Performance security for the said contract.

The following documents after incorporating addenda, except those parts relating to instructions bidders shall be deemed to form and be read and construed as part of this Agreement, viz:

- a) The Contract Agreement;
- b) The Letter of Acceptance;
- c) The Completed form of Bid;
- d) The Standard and special Terms & Conditions of Contract – Part;
- e) The priced Bill of Quantities

In consideration of the payments to be made by the Town Committee, Chuhar Jamali to the Contractor as hereinafter mentioned, the contractor hereby covenants with the Town Committee, Chuhar Jamali to execute and complete the works and remedy defects therein In conformity and in all respects with the provisions of the contract.

The Town Committee, Chuhar Jamali hereby covenants to pay the contractor, in consideration of the execution and completion of the works as per provisions of contract, the contract Price or such other sum as may become payable under the provisions of the contract at the time and in the manner prescribed by the contractor.

The contractor has given a lien to the Town Committee, Chuhar Jamali over the Security for due fulfillment of the contract and do hereby bind himself, his heirs, successors legal representative and assignee to pay to the Town Committee, Chuhar Jamali penalty through forfeiture of the said Security in case of breach of any condition of the Contract without prejudice to the right of Town Committee, Chuhar Jamali to recover the damages from the Contractor for any such breach as per condition of the contract.

Now therefore this agreement witnesses that the Town Committee, Chuhar Jamali and the Contractor shall respectively and shall well truly carry out and fulfill the contract and abide by all terms and conditions and specifications thereof.

In witness whereof the said parties have set their respective hands on this 20th of Dec 2017

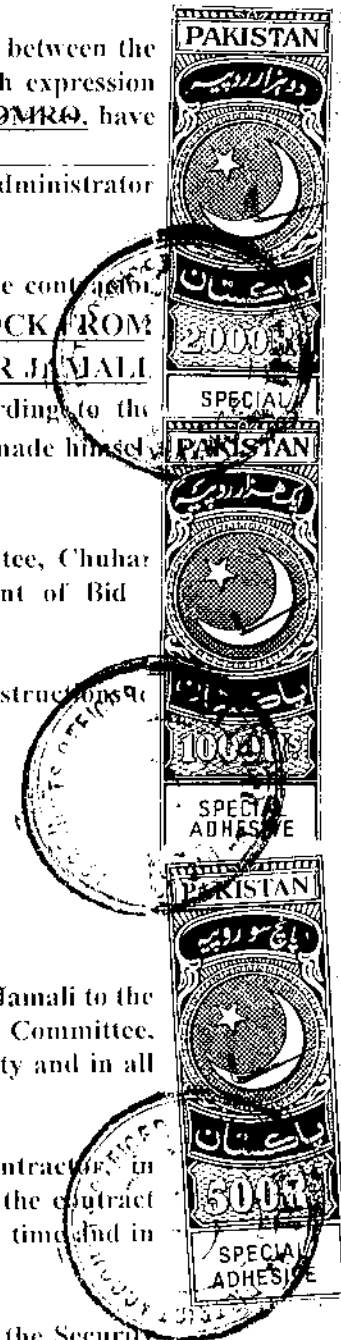
Witness:

1. M. Hassan

M. Hassan  
Contractor

2. Shahida Mustafa

[Signature]  
CHAIRMAN  
TOWN COMMITTEE, CHUHAR JAMALI



**DEPOT KEEPER**  
S.A.O Thatta

NAME OF WORK: - CONSTRUCTION OF PAVER BLOCK FROM HYDRI CHOWK TO SOOMAR KACHI HOTEL TOWN COMMITTEE CHUHAR JAMALI

BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
1.	3146.0Cft	Earth work excavation undressed lead upto a single throw of Kassi phawarah of shovel in ordinary soil ..etc	Rs:1361.25	%Ocft	Rs:4282.00
2.	3146.0Cft	Dressing and leveling of earth wok to designed section, in ordinary soil etc complete	Rs:187.55	%Ocft	Rs:590.00
3.	1573.0Cft	Supplying and filling pit sand under floor and plunging into wells...	Rs:1141.25	%Ocft	Rs:17952.00
4.	1038.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:117197.00
5.	3146.0Sft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quddra / cable shape with pigmented b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:780743.00

Amount Total (a+b) Rs:9,20,764/-

8.60 %Above/Below On The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

999950  
Total (A) = a + b in words Nine Lac Ninety Nine thousand Nine Hundred fifty only

*Signature*  
Contractor

*Signature*  
Executive Engineer / Procuring Agency



Summary of Bill of Quantities

Cost of Bid

Amount 999950

1 (A) Cost based on composite Schedule of Rate

\_\_\_\_\_

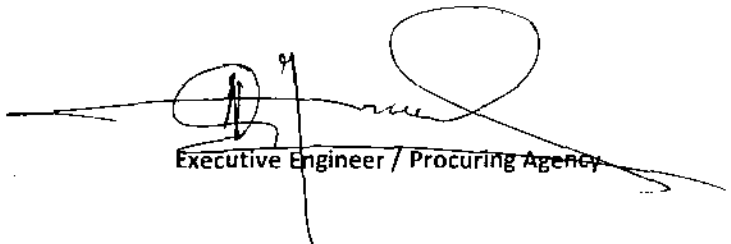
2 (B) Cost of based on Non / Offered Schedule of Rates.

\_\_\_\_\_

TOTAL COST OF BID (C) = TOTAL (A) + Total (B)

999950

*Ligat Ali*  
Contractor

  
Executive Engineer / Procuring Agency

NAME OF WORK: - CONSTRUCTION OF PAVER BLOCK FROM HYDRI CHOWK TO SOOMAR KACHI HOTEL TOWN COMMITTEE CHUHAR JAMALI

BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
1.	3146.0Cft	Earth work excavation undressed lead upto a single throw of Kassi phawarah of shovel in ordinary soil ..etc	Rs:1361.25	%Ocft	Rs:4282.00
2.	3146.0Cft	Dressing and leveling of earth wok to designed section, in ordinary soil etc complete	Rs:187.55	%Ocft	Rs:590.00
3.	1573.0Cft	Supplying and filling pit sand under floor and plunging into wells...	Rs:1141.25	%Ocft	Rs:17952.00
4.	1038.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 l/5(f)	Rs:11288.75	%Cft	Rs:117197.00
5.	3146.0Sft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quddra / cable shape with pigmented b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:780743.00

Amount Total (a+b) Rs:9,20,764/-

9.50% Above/Below On The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

1008238  
Total (A) = a + b in words

Ten Lac Eight thousand two hundred thirty eight only

Atskeen  
Contractor

Executive Engineer / Procuring Agency

Summary of Bill of Quantities

Cost of Bid

Amount 1008238

1 (A) Cost based on composite Schedule of Rate

\_\_\_\_\_

2 (B) Cost of based on Non / Offered Schedule of Rates.

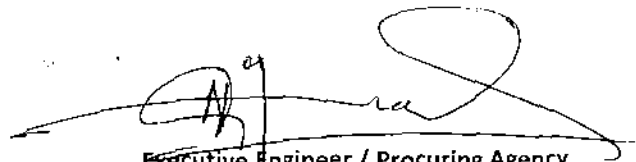
\_\_\_\_\_

TOTAL COST OF BID (C) = TOTAL (A) + Total (B)

1008238

*Al-Been*

Contractor

  
Executive Engineer / Procuring Agency

NAME OF WORK: - CONSTRUCTION OF PAVER BLOCK FROM HYDRI CHOWK TO SOOMAR KACHI HOTEL TOWN COMMITTEE CHUHAR JAMALI

BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate-	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
1.	3146.0Cft	Earth work excavation undressed lead upto a single throw of Kassi phawarah of shovel in ordinary soil ..etc	Rs:1361.25	%Ocft	Rs:4282.00
2.	3146.0Cft	Dressing and leveling of earth wok to designed section, in ordinary soil etc complete	Rs:187.55	%Ocft	Rs:590.00
3.	1573.0Cft	Supplying and filling pit sand under floor and plunging into wells...	Rs:1141.25	%Ocft	Rs:17952.00
4.	1038.0Cft	P/L cement concrete plain i/c placing compacting finishing and curing complete (including screening and washing at stone aggregate without. 1:2:4 etc...complete.(G.Sch.P/15 I/5(f)	Rs:11288.75	%Cft	Rs:117197.00
5.	3146.0Sft	Providing and fixing cement paving blocks flooring having size (197x97x80) mm of city quddra / cable shape with pigmented b/u 5000 PSI 8500 PSI i/c filling the grant with hill sand and laying with specified manner pattern ..etc complete	Rs:248.17	P.Sft	Rs:780743.00

Amount Total (a+b) Rs:9,20,764/-

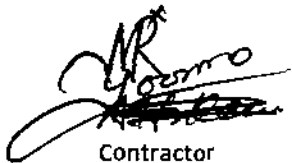
*10%* %Above/Below On The Schedule Rates of CSR.

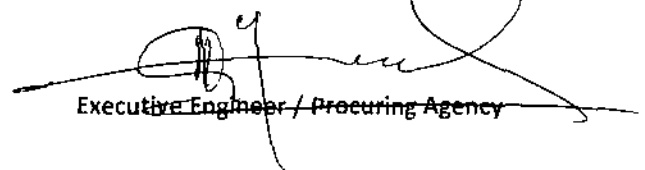
Amount to be Added/Deducted on the basis of premium quoted Total (b)

Total (A) = a + b in words

1012841

Ten Lac twelve thousand eight hundred forty one

  
Contractor

  
Executive Engineer / Procuring Agency

Summary of Bill of Quantities

Cost of Bid

Amount 1012841

1 (A) Cost based on composite Schedule of Rate

\_\_\_\_\_

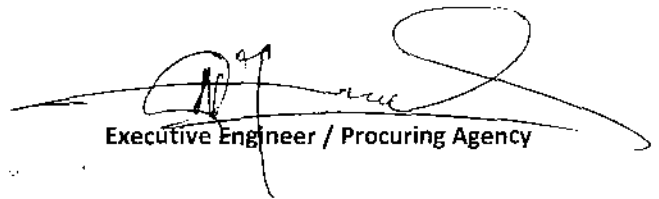
2 (B) Cost of based on Non / Offered Schedule of Rates.

\_\_\_\_\_

TOTAL COST OF BID (C) = TOTAL (A) + Total (B)

1012841

  
Contractor

  
Executive Engineer / Procuring Agency

**SINDH PUBLIC PROCUREMENT REGULATORY AUTHORITY**  
**CONTRACT EVALUATION FORM**

**TO BE FILLED IN BY ALL PROCURING AGENCIES FOR PUBLIC CONTRACTORS OF WORKS, SERVICES & GOODS.**

- 1). NAME OF THE ORGANIZATION / DEPTT. Town Committee, Chuhar Jamali, Sujawal
- 2). PROVINCIAL / LOCAL GOVT. / OTHER LOCAL GOVERNMENT
- 3). TITLE OF CONTRACT: "CONSTRUCTION OF RCC DRAIN FROM RAJA MEDICAL STORE TO ALLAH DINO MEMON SHOP TOWN COMMITTEE CHUHAR JAMALI"
- 4) TENDER NUMBER: as above
- 5). BRIEF DESCRIPTION OF CONTRACT: CC Drain
- 6). FORUM THAT APPROVED THE SCHEME Town Committee, Chuhar Jamali
- 7). TENDER ESTIMATED VALUE Rs. 10,00,000/=
- 8). ENGINEER'S ESTIMATE PC -Cost Rs: 1000000/-  
(FOR CIVIL WORK ONLY)
- 9). ESTIMATED COMPLETION PERIOD (AS PER CONTRACT) (0 1) MONTH
- 10). TENDER OPENED ON DATE AND TIME 02-11-2017 AT 02:00 PM.
- 11). NUMBER OF TENDER DOCUMENTS SOLD (Attach list of buyers). 03
- 12). NUMBER OF BIDS RECEIVED 03
- 13). NUMBERS OF BIDDERS PRESENT AT THE TIME OF OPEINING OF BIDS 03
- 14). BID EVALUATION REPORT (Enclose a copy) YES
- 15). NAME AND ADDRESS OF THE SUCCESSFUL BIDDER. M/S Liaqat Ali & Company
- 16). CONTRACT AWARD PRICE SANCTION RUPEES Rs: 998754/-  
Abdul Keem Chandio
- 17). RANKING OF SUCCESSFUL BIDDER IN EVALUATION REPORT (I.E. 1ST 2ND 3RD EVALUATION BID).  
1<sup>st</sup> Lowest M/S Liaqat Ali & Company  
2<sup>nd</sup> LOWEST M/S Mumtaz Hussain Soomro  
3<sup>rd</sup> LOWEST M/S Abdul Hakeem Chandio  
Liaqat Ali & Co. 4 mg
- 18). METHOD OF PROCUREMENT USED: - (TICK ONE)
- A).  SINGLE STAGE-ONE ENVELOPE PROCEDURE
- B).  SINGLE STAGE-TWO ENVELOPE PROCEDURE
- C).  TWO STAGE BIDDING PROCEDURE
- ENGINEER  
TOWN COMMITTEE  
CHUHAR JAMALI

D). TWO STAGE-TWO ENVELOPE BIDDING PROCEDURE

PLEASE SPECIFY IF ANY OTHER METHOD OF PROCUREMENT WAS ADOPTED i.e. EMERGENCY, DIRECT CONTRACTING ETC. WITH BRIEF REASONS.

19). PROVIDING AUTHORITY FOR AWARD OF CONTRACT CHAIRMAN TC, CHUHAR JAMALI

20). WHETHER THE PROCUREMENT WAS INCLUDED IN ANNUAL PROCUREMENT PLAN

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

21). ADVERTISEMENT:

i) SPPRA Website  
(if yes give date & SPPRA Identification No.

YES	<a href="http://www.pprasinhd.gov.pk">www.pprasinhd.gov.pk</a> SPPRA Tender SR No. 34792 Dt: 02-11-2017
-----	--

ii) Newspapers  
(if yes give names of newspapers & dates)

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

22). NATURE OF CONTRACT

DOMESTIC/ LOCAL	<input checked="" type="checkbox"/>	LOCAL	INT
-----------------	-------------------------------------	-------	-----

23). WHETHER QUALIFICATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?

(If yes, enclose copy).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

24). WHETHER BID EVALUATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?

(if, yes enclose a copy).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

25). WHETHER APPROVAL OF COMPETENT AUTHORITY WAS OBTAINED FOR USING A METHOD OTHER THAN OPEN COMPETITIVE BIDDING?

YES		NO	N/A
-----	--	----	-----

26). WAS BID SECURITY OBTAINED FROM ALL THE BIDDERS?

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

27). WHETHER THE SUCCESSFUL BID WAS LOWEST EVALUATED BID / BEST EVALUATED BID (In case of Consultancies).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

28). WHETHER THE SUCCESSFUL BIDDER WAS TECHNICALLY COMPLAINT?

YES		NO	N/A
-----	--	----	-----

29). WHETHER NAMES OF THE BIDDERS AND THEIR QUOTED PRICES WERE READ OUT AT THE TIME OF OPENING OF BIDS?

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

30). WHETHER EVALUATION REPORT GIVEN TO BIDDERS BEFORE THE AWARD OF CONTRACT?

(Attach a copy of the bid evaluation report).

31). ANY COMPLAINTS RECEIVED  
(if yes, result thereof).

YES	<input checked="" type="checkbox"/>	NO	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

32). ANY DEVIATION FROM SPECIFICATIONS GIVEN IN THE TENDER  
NOTICE / DOCUMENTS ( if yes, given details).

YES	<input type="checkbox"/>	NO	<input type="checkbox"/>	N/A	<input type="checkbox"/>
-----	--------------------------	----	--------------------------	-----	--------------------------

33). WAS THE EXTENSION MADE IN RESPONSE TIME?  
(if yes, given reasons)

YES	<input type="checkbox"/>	NO	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

34). DEVIATION FROM QUALIFICATION CRITERIA  
(if yes, detailed reasons).

YES	<input type="checkbox"/>	NO	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

34). DEVIATION FROM QUALIFICATION CRITERIA  
(if yes, detailed reasons).

YES	<input type="checkbox"/>	NO	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

35). WAS IT ASSURED BY THE PROCURING AGENCY THAT THE SELECTED  
FIRM IS NOT BLACK LISTED?

YES	<input type="checkbox"/>	NO	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

36). WAS A VISIT MADE BY ANY OFFICER / OFFICIAL OF THE PROCURING  
AGENCY TO THE SUPPLIER'S PREMISES IN CONNECTION WITH THE PROCUREMENT?  
IF SO, DETAILS TO BE ASCERTAINED REGARDING FINANCING OF VISIT, IF ABROAD:  
(if yes, enclose a copy)

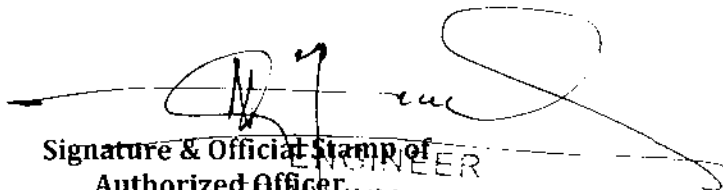
YES	<input type="checkbox"/>	NO	<input type="checkbox"/>	N/A	<input type="checkbox"/>
-----	--------------------------	----	--------------------------	-----	--------------------------

37). WERE PROPER SAFEGUARDS PROVIDED ON MOBILIZATION ADVANCE PAYMENT IN THE  
CONTRACT ( BANK GUARANTEE ETC)?

YES	<input type="checkbox"/>	NO	<input type="checkbox"/>	N/A	<input type="checkbox"/>
-----	--------------------------	----	--------------------------	-----	--------------------------

38). SPECIAL CONDITION, IF ANY  
(if yes, give Brief Description)

YES	<input type="checkbox"/>	NO	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

  
Signature & Official Stamp of  
Authorized Officer  
ENGINEER  
TOWN COMMITTEE  
CHUNAR JAMALI

FOR OFFICE USE ONLY

**SPPRA, Block No. 8, Sindh Secretariat No. 4-A, Court Road, Karachi**  
Tel: 021-9205356, 021-9205369 & Fax No. 021-9206291.



# **OFFICE OF THE TOWN COMMITTEE**

## **CHUHAR JAMALI**

NO.T.C.C.J./T.O/ 52

/ 2017

Dated: 15/12/2017

M/S. ABDUL HAKEEM CHANDIO,  
GOVERNMENT CONTRACTOR

### **LETTER OF ACCEPTANCE / SANCTION ORDER**

**Subject: CONSTRUCTION OF RCC DRAIN FROM RAJA MEDICAL STORE TO ALLAH DINO  
MEMON SHOP TOWN COMMITTEE CHUHAR JAMALI**

On behalf of the employer it is notified that following the approval of accepted of Chairman, Town Committee, Chuhar Jamali, vide Para 22/No, your bid for the subject is hereby accepted for the sum of Rs:9,98,754/- (**Rupees. NINE LAC NINETY EIGHT THOUSAND SEVEN HUNDRED FIFTY FOUR ONLY**) as approved by the competent authority Town Committee, Chuhar Jamali.

There is now binding contract between Town Committee, Chuhar Jamali and M/s. M/s. Abdul Hakeem Chandio,

In accordance with the general condition of contract, you are required to enter in to and execute a contract agreement this agreement shall be signed by employer and M/s. M/s. Abdul Hakeem Chandio.

In accordance with condition of contract as per SPPRA-2010 the 2% Bid security Rs:20,000/- and remaining 8% Security may deduct from bill.

All correspondence on onward shall be carried out through Town Officer, Town Committee, Chuhar Jamali.

  
**TOWN OFFICER**  
**TOWN COMMITTEE, CHUHAR JAMALI**

Copy to:-

- 1- Chairman, Town Committee, Chuhar Jamali.
- 2- Assistant Executive Engineer, (Town Committee, Chuhar Jamali)
- 3- Office Copy.

**TOWN COMMITTEE CHUHAR JAMALI****AGREEMENT**

Subject: - CONSTRUCTION OF RCC DRAIN FROM RAJA MEDICAL STORE TO ALLAH DINO MEMON SHOP TOWN COMMITTEE CHUHAR JAMALI

Cost Rs.9,98,754/-

Completion Time (03 Months)

penalty

The Agreement is made on this 20th Dec day of 2017 at Thatta, between the Town Committee, Chuhar Jamali herein after called the Chuhar Jamali, Sujawal (Which expression shall mean and include his successors) on the one part and M/s. ABDUL HAKEEM CHANDIO (Which expression shall mean and include his successors, administrative and assignees) on the other part through their proprietor

Whereas the Town Committee, Chuhar Jamali, has accepted the tender of the contractor for construction and completion of the work namely CONSTRUCTION OF RCC DRAIN FROM RAJA MEDICAL STORE TO ALLAH DINO MEMON SHOP TOWN COMMITTEE CHUHAR JAMALI, at a cost of Rs.9,98,754/- within a period of (03 Months) and penalty Rs. \_\_\_\_\_ according to the specification and general conditions of the contract signed by the Contractor after having made himself full acquainted with their meaning.

And whereas the Contractor has already furnished with the Town Committee, Chuhar Jamali the 2% bid amount of Rs.20,000/- (Rupees Twenty Thousand Only) on account of Bid Performance security for the said contract.

The following documents after incorporating addenda, except those parts relating to instructions to bidders shall be deemed to form and be read and construed as part of this Agreement, viz:

- a) The Contract Agreement;
- b) The Letter of Acceptance;
- c) The Completed form of Bid;
- d) The Standard and special Terms & Conditions of Contract – Part;
- e) The priced Bill of Quantities

In consideration of the payments to be made by the Town Committee, Chuhar Jamali to the Contractor as hereinafter mentioned, the contractor hereby covenants with the Town Committee, Chuhar Jamali to execute and complete the works and remedy defects therein in conformity and in all respects with the provisions of the contract.

The Town Committee, Chuhar Jamali hereby covenants to pay the contractor in consideration of the execution and completion of the works as per provisions of contract, the Price or such other sum as may become payable under the provisions of the contract at the time and in the manner prescribed by the contractor.

The contractor has given a lien to the Town Committee, Chuhar Jamali over the Security for due fulfillment of the contract and do hereby bind himself, his heirs, successors legal representative and assignee to pay to the Town Committee, Chuhar Jamali penalty through forfeiture of the said Security in case of breach of any condition of the Contract without prejudice to the right of Town Committee, Chuhar Jamali to recover the damages from the Contractor for any such breach as per condition of the contract.

Now therefore this agreement witnesses that the Town Committee, Chuhar Jamali and the Contractor shall respectively and shall well truly carry out and fulfill the contract and abide by all terms and conditions and specifications thereof.

In witness whereof the said parties have set their respective hands on this 20th of Dec 2017

Witness:

1. Sing Abdul Qader

Abdullah  
Contractor

2. Shahid Hussain

Chairman  
TOWN COMMITTEE, CHUHAR JAMALI



NAME OF WORK: - CONSTRUCTION OF RCC DRAIN FROM RAJA MEDICAL STORE TO ALLAH DINO MEMON SHOP TOWN COMMITTEE CHUHAR JAMALI

BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
1.	3659.25Cft	Excavation in foundation of building and bridges and others structure i/c dag bellig dressing and refilling ground structure with excavated earth watering and ramming lead up to 5'ft in ordinary soil.	Rs:3176.25	%OCft	Rs:11622.00
2.	609.87Cft	P/ L C.C. 1:4:8 stone or brick ballast 1-1/2" to 2" gauge. (C.S.P.17.lt.4(A).	Rs:9416.28	%Cft	Rs:57428.00
3.	1359.15Cft	RCC work in roof slab, beams coloums rafts, lintels and others structural member laid in situ or precast laid in position complete in all respects (b) ratio 1:2:4 90 lbs cement 2Cft sand 4cft shingle 1/8" to 1/4" gauge (G.Sch: P-No: It/No: ( ).	Rs:337.00	P.Cft	Rs:458033.00
4.	60.68Cwt	Fabrication of mild steel reinforcement for cement concrete including cutting, bending laying in position, making joints and fastening including cost of binding wire (also includes removal of rust bars ) using tor bars(G.Sch:P-No:16 lt/No:8(b).	Rs:5001.70	P.Cwt	Rs:303485.00
5.	1742.83Sft	Cement Plaster (1:4) upto 20' height 1/2" thick (GSC1-ii(b)/P/52)	Rs:2283.93	%Sft	Rs:39805.00

Amount Total (a+b) Rs:8,70,374/-

14.75% Above/Below On The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

Total (A) = a + b in words

Five Lac Eighty eight Thousand Seven hundred fifty four

Allah Koen  
Contractor

Executive Engineer / Procuring Agency

Summary of Bill of Quantities

Cost of Bid

Amount 998754

1 (A) Cost based on composite Schedule of Rate

2 (B) Cost of based on Non / Offered Schedule of Rates.

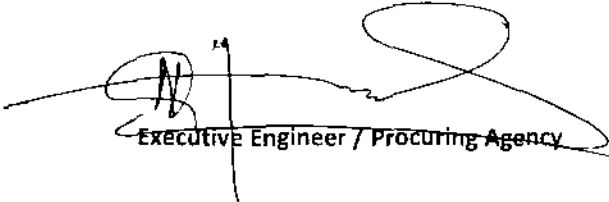
                    

TOTAL COST OF BID (C) = TOTAL (A) + Total (B)

998754 -

*AHsKeen*

Contractor

  
Executive Engineer / Procuring Agency

NAME OF WORK: - CONSTRUCTION OF RCC DRAIN FROM RAJA MEDICAL STORE TO ALLAH DINO MEMON SHOP TOWN COMMITTEE CHUHAR JAMALI

BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
1.	3659.25Cft	Excavation in foundation of building and bridges and others structure i/c dag bellig dressing and refilling ground structure with excavated earth watering and ramming lead up to 5'ft in ordinary soil.	Rs:3176.25	%OCft	Rs:11622.00
2.	609.87Cft	P/ L C.C. 1:4:8 stone or brick ballast 1-1/2" to 2" guage. (C.S.P.17.It.4(A).	Rs:9416.28	%Cft	Rs:57428.00
3.	1359.15Cft	RCC work in roof slab, beams coloums rafts, lintels and others structural member laid in situ or precast laid in position complete in all respects (b) ratio 1:2:4 90 lbs cement 2Cft sand 4cft shingle 1/8" to 3/4" gauge (G.Sch: P-No: It/No: ( ).	Rs:337.00	P.Cft	Rs:458033.00
4.	60.68Cwt	Fabrication of mild steel reinforcement for cement concrete including cutting, bending laying in position, making joints and fastening including cost of binding wire (also includes removal of rust bars ) using tor bars(G.Sch:P-No:16 It/No:8(b).	Rs:5001.70	P.Cwt	Rs:303485.00
5.	1742.835ft	Cement Plaster (1:4) upto 20' height 1/2" thick (GSC1-ii(b)/P/52)	Rs:2283.93	%Sft	Rs:39805.00

Amount Total (a+b) Rs:8,70,374/-

15% %Above/Below On The Schedule Rates of CSR.

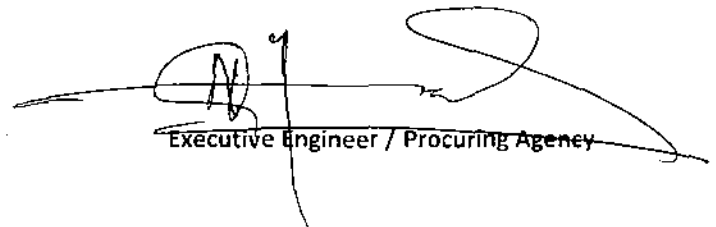
Amount to be Added/Deducted on the basis of premium quoted Total (b)

1800930

Total (A) = a + b in words

Ten Lacs Nine thousand thirty only

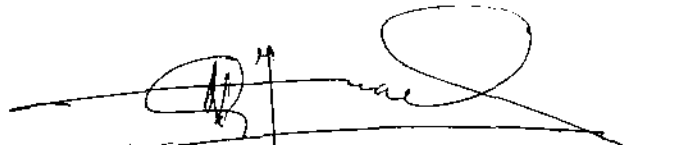
  
Contractor

  
Executive Engineer / Procuring Agency

### Summary of Bill of Quantities

Cost of Bid	Amount <u>1000930</u>
1 (A) Cost based on composite Schedule of Rate	<hr/>
2 (B) Cost of based on Non / Offered Schedule of Rates.	<hr/>
TOTAL COST OF BID (C) = TOTAL (A) + Total (B)	<u>1000930</u>

  
Contractor

  
Executive Engineer / Procuring Agency

NAME OF WORK:- CONSTRUCTION OF RCC DRAIN FROM RAJA MEDICAL STORE TO ALLAH DINO MEMON SHOP TOWN COMMITTEE CHUHAR JAMALI

BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
1.	3659.25Cft	Excavation in foundation of building and bridges and others structure i/c dag bellig dressing and refilling ground structure with excavated earth watering and ramming lead up to 5'ft in ordinary soil.	Rs:3176.25	%OCft	Rs:11622.00
2.	609.87Cft	P/ L C.C. 1:4:8 stone or brick ballast 1-1/2" to 2" guage. (C.S.P.17.It.4(A).	Rs:9416.28	%Cft	Rs:57428.00
3.	1359.15Cft	RCC work in roof slab, beams coloums rafts, lintels and others structural member laid in situ or precast laid in position complete in all respects (b) ratio 1:2:4 90 lbs cement 2Cft sand 4cft shingle 1/8" to 1/4" gauge (G.Sch: P-No: It/No: ( ).	Rs:337.00	P.Cft	Rs:458033.00
4.	60.68Cwt	Fabrication of mild steel reinforcement for cement concrete including cutting, bending laying in position, making joints and fastening including cost of binding wire (also includes removal of rust bars ) using tor bars(G.Sch:P-No:16 It/No:8(b).	Rs:5001.70	P.Cwt	Rs:303485.00
5.	1742.83Sft	Cement Plaster (1:4) upto 20' height 1/2" thick (GSC1-ii(b)/P/52)	Rs:2283.93	%Sft	Rs:39805.00

Amount Total (a+b) Rs:8,70,374/-

16% %Above/Below On The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

Total (A) = a + b in words

~~10000~~ 1009634

Ten Lax Nine thousand Six hundred thirty four

*Signature*  
Contractor

*Signature*  
Executive Engineer / Procuring Agency

Summary of Bill of Quantities

Cost of Bid

Amount 1009634

1 (A) Cost based on composite Schedule of Rate

\_\_\_\_\_

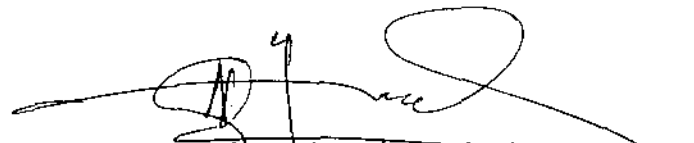
2 (B) Cost of based on Non / Offered Schedule of Rates.

\_\_\_\_\_

TOTAL COST OF BID (C) = TOTAL (A) + Total (B)

1009634

  
Contractor

  
Executive Engineer / Procuring Agency



**SINDH PUBLIC PROCUREMENT REGULATORY AUTHORITY**  
**CONTRACT EVALUATION FORM**

**TO BE FILLED IN BY ALL PROCURING AGENCIES FOR PUBLIC CONTRACTORS OF WORKS, SERVICES & GOODS.**

- 1). NAME OF THE ORGANIZATION / DEPTT. Town Committee, Chuhar Jamali, Sujawal
- 2). PROVINCIAL / LOCAL GOVT. / OTHER LOCAL GOVERNMENT
- 3). TITLE OF CONTRACT: "CONSTRUCTION OF RCC DRAIN FROM ALLAH DINO MEMON SHOP TO ILYAS KACHI SHOP TOWN COMMITTEE CHUHAR JAMALI"
- 4) TENDER NUMBER: as above
- 5). BRIEF DESCRIPTION OF CONTRACT: CC Drain
- 6). FORUM THAT APPROVED THE SCHEME Town Committee, Chuhar Jamali
- 7). TENDER ESTIMATED VALUE Rs. 10,00,000/=
- 8). ENGINEER'S ESTIMATE PC -Cost Rs: 1000000/-  
(FOR CIVIL WORK ONLY)
- 9). ESTIMATED COMPLETION PERIOD (AS PER CONTRACT) (0 1) MONTH
- 10). TENDER OPENED ON DATE AND TIME 02-11-2017 AT 02:00 PM.
- 11). NUMBER OF TENDER DOCUMENTS SOLD 03  
(Attach list of buyers).
- 12). NUMBER OF BIDS RECEIVED 03
- 13). NUMBERS OF BIDDERS PRESENT AT THE TIME OF OPEINING OF BIDS 03
- 14). BID EVALUATION REPORT YES  
(Enclose a copy)
- 15). NAME AND ADDRESS OF THE SUCCESSFUL BIDDER. M/S Abdul Hakeem Chandio
- 16). CONTRACT AWARD PRICE SANCTION RUPEES Rs: 998754/-
- 17). RANKING OF SUCCESSFUL BIDDER IN EVALUATION REPORT 1<sup>st</sup> Lowest M/S Abdul Hakeem Chandio  
(I.E. 1ST 2ND 3RD EVALUATION BID). 2<sup>nd</sup> LOWEST M/S Mumtaz Hussain Soomro  
3<sup>rd</sup> LOWEST M/S Liaqat Ali & Company
- 18). METHOD OF PROCUREMENT USED: - (TICK ONE)
- A). SINGLE STAGE-ONE ENVELOPE PROCEDURE \_\_\_\_\_ ✓ \_\_\_\_\_
- B). SINGLE STAGE-TWO ENVELOPE PROCEDURE \_\_\_\_\_
- C). TWO STAGE BIDDING PROCEDURE \_\_\_\_\_

D). TWO STAGE-TWO ENVELOPE BIDDING PROCEDURE \_\_\_\_\_

PLEASE SPECIFY IF ANY OTHER METHOD OF PROCUREMENT WAS ADOPTED i.e. EMERGENCY, DIRECT CONTRACTING ETC. WITH BRIEF REASONS.

19). PROVIDING AUTHORITY FOR AWARD OF CONTRACT CHAIRMAN TC, CHUHAR JAMALI

20). WHETHER THE PROCUREMENT WAS INCLUDED IN ANNUAL PROCUREMENT PLAN

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

21). ADVERTISEMENT:

i) SPPRA Website  
(if yes give date & SPPRA Identification No.

YES	<a href="http://www.pprasindh.gov.pk">www.pprasindh.gov.pk</a> SPPRA Tender SR No. 34792 Dt: 02-11-2017
-----	--

ii) Newspapers  
(if yes give names of newspapers & dates)

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

22). NATURE OF CONTRACT

DOMESTIC/ LOCAL	<input checked="" type="checkbox"/>	LOCAL	INT
-----------------	-------------------------------------	-------	-----

23). WHETHER QUALIFICATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?

(If yes, enclose copy).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

24). WHETHER BID EVALUATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?

(if, yes enclose a copy).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

25). WHETHER APPROVAL OF COMPETENT AUTHORITY WAS OBTAINED FOR USING A METHOD OTHER THAN OPEN COMPETITIVE BIDDING?

YES		NO	N/A
-----	--	----	-----

26). WAS BID SECURITY OBTAINED FROM ALL THE BIDDERS?

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

27). WHETHER THE SUCCESSFUL BID WAS LOWEST EVALUATED BID / BEST EVALUATED BID (In case of Consultancies).

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

28). WHETHER THE SUCCESSFUL BIDDER WAS TECHNICALLY COMPLAINT?

YES		NO	N/A
-----	--	----	-----

29). WHETHER NAMES OF THE BIDDERS AND THEIR QUOTED PRICES WERE READ OUT AT THE TIME OF OPENING OF BIDS?

YES	<input checked="" type="checkbox"/>	NO	
-----	-------------------------------------	----	--

30). WHETHER EVALUATION REPORT GIVEN TO BIDDERS BEFORE THE AWARD OF CONTRACT?

(Attach a copy of the bid evaluation report).

31). ANY COMPLAINTS RECEIVED  
(if yes, result thereof).

YES	<input checked="" type="checkbox"/>	NO	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

32). ANY DEVIATION FROM SPECIFICATIONS GIVEN IN THE TENDER  
NOTICE / DOCUMENTS ( if yes, given details).

YES	<input type="checkbox"/>	NO	<input type="checkbox"/>	N/A	<input type="checkbox"/>
-----	--------------------------	----	--------------------------	-----	--------------------------

33). WAS THE EXTENSION MADE IN RESPONSE TIME?  
(if yes, given reasons)

YES	<input type="checkbox"/>	NO	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

34). DEVIATION FROM QUALIFICATION CRITERIA  
(if yes, detailed reasons).

YES	<input type="checkbox"/>	NO	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

35). WAS IT ASSURED BY THE PROCURING AGENCY THAT THE SELECTED  
FIRM IS NOT BLACK LISTED?

YES	<input type="checkbox"/>	NO	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

36). WAS A VISIT MADE BY ANY OFFICER / OFFICIAL OF THE PROCURING  
AGENCY TO THE SUPPLIER'S PREMISES IN CONNECTION WITH THE PROCUREMENT?  
IF SO, DETAILS TO BE ASCERTAINED REGARDING FINANCING OF VISIT, IF ABROAD:  
(if yes, enclose a copy)

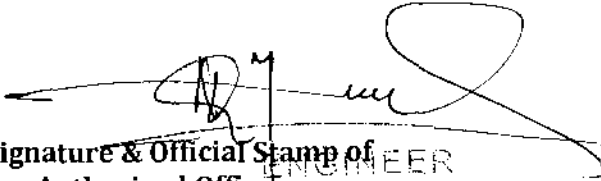
YES	<input type="checkbox"/>	NO	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

37). WERE PROPER SAFEGUARDS PROVIDED ON MOBILIZATION ADVANCE PAYMENT IN THE  
CONTRACT ( BANK GUARANTEE ETC)?

YES	<input type="checkbox"/>	NO	<input type="checkbox"/>	N/A	<input type="checkbox"/>
-----	--------------------------	----	--------------------------	-----	--------------------------

38). SPECIAL CONDITION, IF ANY  
(if yes, give Brief Description)

YES	<input type="checkbox"/>	NO	<input type="checkbox"/>	N/A	<input type="checkbox"/>
-----	--------------------------	----	--------------------------	-----	--------------------------

  
Signature & Official Stamp of  
Authorized Officer  
ENGINEER  
TOWN COMMITTEE  
CHAHAR JAMALI

YES	<input type="checkbox"/>	NO	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

FOR OFFICE USE ONLY

**SPPRA, Block No. 8, Sindh Secretariat No. 4-A, Court Road, Karachi**  
Tel: 021-9205356, 021-9205369 & Fax No. 021-9206291.

# OFFICE OF THE TOWN COMMITTEE

## CHUHAR JAMALI

NO.T.C.C.J./T.O/ S3

/ 2017

Dated:

15/12/2017

M/S. ABDUL HAKEEM CHANDIO,  
GOVERNMENT CONTRACTOR

### LETTER OF ACCEPTANCE / SANCTION ORDER

**Subject: CONSTRUCTION OF RCC DRAIN FROM ALLAH DINO MEMON SHOP TO ILYAS  
KACHI SHOP TOWN COMMITTEE CHUHAR JAMALI**


On behalf of the employer it is notified that following the approval of accepted of Chairman, Town Committee, Chuhar Jamali, vide Para 23 /No, your bid for the subject is hereby accepted for the sum of Rs:9,98,754/- (**Rupees. NINE LAC NINETY EIGHT THOUSAND SEVEN HUNDRED FIFTY FOUR ONLY**) as approved by the competent authority Town Committee, Chuhar Jamali.

There is now binding contract between Town Committee, Chuhar Jamali and **M/s. M/s. Abdul Hakeem Chandio,**

In accordance with the general condition of contract, you are required to enter in to and execute a contract agreement this agreement shall be signed by employer and **M/s. M/s. Abdul Hakeem Chandio.**

In accordance with condition of contract as per SPPRA-2010 the 2% Bid security Rs:20,000/- and remaining 8% Security may deduct from bill.

All correspondence on onward shall be carried out through Town Officer, Town Committee, Chuhar Jamali.

  
TOWN OFFICER

TOWN COMMITTEE, CHUHAR JAMALI

Copy to:-

- 1- Chairman, Town Committee, Chuhar Jamali.
- 2- Assistant Executive Engineer, (Town Committee, Chuhar Jamali)
- 3- Office Copy.

# TOWN COMMITTEE CHUHAR JAMALI

## AGREEMENT

Subject: - CONSTRUCTION OF RCC DRAIN FROM ALLAH DINO MEMON SHOP TO ILYAS KACHI SHOP TOWN COMMITTEE CHUHAR JAMALI

Cost Rs.9,98,754/-

Completion Time (03 Months) penalty \_\_\_\_\_

The Agreement is made on this 20th day of Dec 2017 at Thatta, betw \_\_\_\_\_ the Town Committee, Chuhar Jamali herein after called the Chuhar Jamali, Sujawal (Which expression shall mean and include his successors) on the one part and M/s. ABDUL HAKEEM CHANDIO have their office at \_\_\_\_\_ through their proprietor \_\_\_\_\_ hereinafter call the "Contractor" (Which expression shall mean and include his successors, administrators and assignees) on the other part.

Whereas the Town Committee, Chuhar Jamali, has accepted the tender of the contractor for construction and completion of the work namely CONSTRUCTION OF RCC DRAIN FROM ALLAH DINO MEMON SHOP TO ILYAS KACHI SHOP TOWN COMMITTEE CHUHAR JAMALI, at a cost of Rs.9,98,754/- within a period of (03 Month) and penalty Rs. \_\_\_\_\_ according to the specification and general conditions of the contract signed by the Contractor after having himself full acquainted with their meaning.

And whereas the Contractor has already furnished with the Town Committee, Chuhar Jamali the 2% bid amount of Rs.20,000/- (Rupees Twenty Thousand Only) on account of Bid Performance security for the said contract.

The following documents after incorporating addenda, except those parts relating to instructions to bidders shall be deemed to form and be read and construed as part of this Agreement, viz:

- a) The Contract Agreement;
- b) The Letter of Acceptance;
- c) The Completed form of Bid;
- d) The Standard and special Terms & Conditions of Contract - Part;
- e) The priced Bill of Quantities

In consideration of the payments to be made by the Town Committee, Chuhar Jamali to the Contractor as hereinafter mentioned, the contractor hereby covenants with the Town Committee, Chuhar Jamali to execute and complete the works and remedy defects therein In conformity and in all respects with the provisions of the contract.

The Town Committee, Chuhar Jamali hereby covenants to pay the contractor, in consideration of the execution and completion of the works as per provisions of contract, the contract Price or such other sum as may become payable under the provisions of the contract at the time and in the manner prescribed by the contractor.

The contractor has given a lien to the Town Committee, Chuhar Jamali over the Security for due fulfillment of the contract and do hereby bind himself, his heirs, successors legal representative and assignee to pay to the Town Committee, Chuhar Jamali penalty through forfeiture of the said Security in case of breach of any condition of the Contract without prejudice to the right of Town Committee, Chuhar Jamali to recover the damages from the Contractor for any such breach as per condition of the contract.

Now therefore this agreement witnesses that the Town Committee, Chuhar Jamali and the Contractor shall respectively and shall well truly carry out and fulfill the contract and abide by all terms and conditions and specifications thereof.

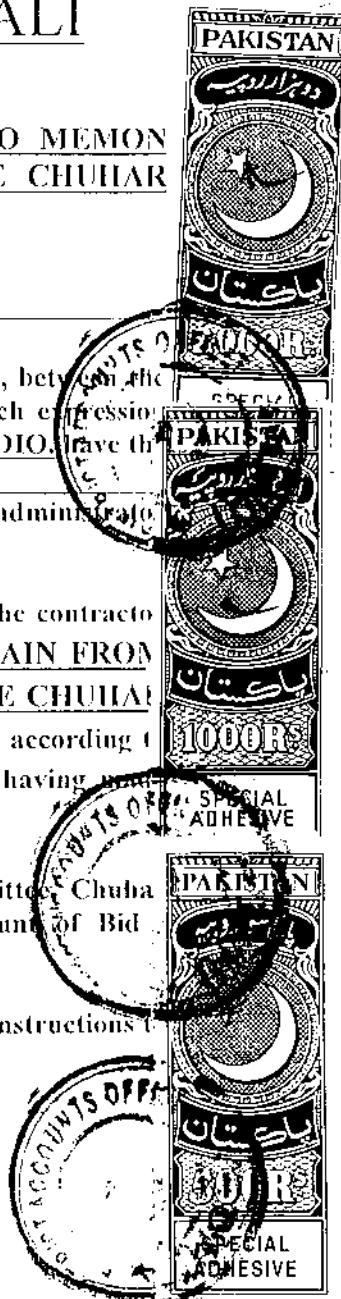
In witness whereof the said parties have set their respective hands on this 20th of Dec 2017

Witness:

1. Abdul Hakeem Chandio Contractor

2. Ghulam Mustafa Chandio

[Signature]  
CHAIRMAN  
TOWN COMMITTEE, CHUHAR JAMALI



[Signature]  
DEPUTY KEEPER  
D.A.O THATA


NAME OF WORK: - CONSTRUCTION OF RCC DRAIN FROM ALLAH DINO MEMON SHOP TO ILYAS KACHI SHOP TOWN COMMITTEE CHUHAR JAMALI

BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
1.	3659.25Cft	Excavation in foundation of building and bridges and others structure i/c dag bellig dressing and refilling ground structure with excavated earth watering and ramming lead up to 5'ft in ordinary soil.	Rs:3176.25	%OCft	Rs:11622.00
2.	609.87Cft	P/ L C.C. 1:4:8 stone or brick ballast 1-1/2" to 2" guage. (C.S.P.17.It.4(A).	Rs:9416.28	%Cft	Rs:57428.00
3.	1359.15Cft	RCC work in roof slab, beams coloums rafts, lintels and others structural member laid in situ or precast laid in position complete in all respects (b) ratio 1:2:4 90 lbs cement 2Cft sand 4cft shingle 1/8" to 1/2" gauge (G.Sch: P-No: It/No: ( ).	Rs:337.00	P.Cft	Rs:458033.00
4.	60.68Cwt	Fabrication of mild steel reinforcement for cement concrete including cutting, bending laying in position, making joints and fastening including cost of binding wire (also includes removal of rust bars ) using tor bars(G.Sch:P-No:16 It/No:8(b).	Rs:5001.70	P.Cwt	Rs:303485.00
5.	1742.83Sft	Cement Plaster (1:4) upto 20' height 1/2" thick (GSC1-ii(b)/P/52)	Rs:2283.93	%Sft	Rs:39805.00

Amount Total (a+b) Rs:8,70,374/-

  
14.75 % Above/Below On The Schedule Rates of CSR.

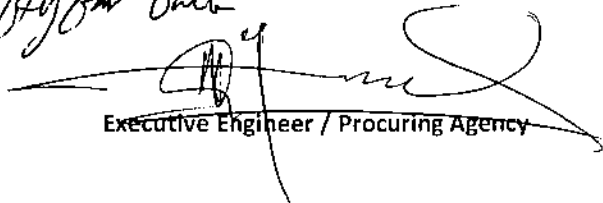
Amount to be Added/Deducted on the basis of premium quoted Total (b)

998754

Total (A) = a + b in words

Nine Lac Ninety Eighty  
Thousand Seven hundred  
fifty four only

  
Contractor

  
Executive Engineer / Procuring Agency

Summary of Bill of Quantities

Cost of Bid

Amount 998754

1 (A) Cost based on composite Schedule of Rate

2 (B) Cost of based on Non / Offered Schedule of Rates.

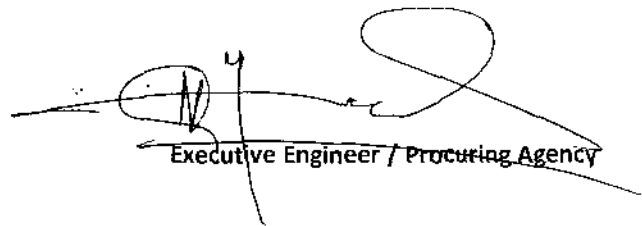
                        

TOTAL COST OF BID (C) = TOTAL (A) + Total (B)

998754

*A. Hellea*

Contractor

  
Executive Engineer / Procuring Agency

NAME OF WORK: - CONSTRUCTION OF RCC DRAIN FROM ALLAH DINO MEMON SHOP TO ILYAS KACHI SHOP TOWN COMMITTEE CHUHAR JAMALI

BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
1.	3659.25Cft	Excavation in foundation of building and bridges and others structure i/c dag bellig dressing and refilling ground structure with excavated earth watering and ramming lead up to 5'ft in ordinary soil.	Rs:3176.25	%OCft	Rs:11622.00
2.	609.87Cft	P/ L C.C. 1:4:8 stone or brick ballast 1-1/2" to 2" guage. (C.S.P.17.It.4(A).	Rs:9416.28	%Cft	Rs:57428.00
3.	1359.15Cft	RCC work in roof slab, beams coloums rafts, lintels and others structural member laid in situ or precast laid in position complete in all respects (b) ratio 1:2:4 90 lbs cement 2Cft sand 4cft shingle 1/8" to 1/4" gauge (G.Sch: P-No: It/No: ( ).	Rs:337.00	P.Cft	Rs:458033.00
4.	60.68Cwt	Fabrication of mild steel reinforcement for cement concrete including cutting, bending laying in position, making joints and fastening including cost of binding wire (also includes removal of rust bars ) using tor bars(G.Sch:P-No:16 It/No:8(b).	Rs:5001.70	P.Cwt	Rs:303485.00
5.	1742.835ft	Cement Plaster (1:4) upto 20' height 1/2" thick (GSC1-ii(b)/P/52)	Rs:2283.93	%Sft	Rs:39805.00

Amount Total (a+b) Rs:8,70,374/-

Amount to be Added/Deducted on the basis of premium quoted Total (b)

15% ~~%Above/Below~~ On The Schedule Rates of CSR.

Total (A) = a + b in words

1000920

Ten Lacs Nine Hundred thirty only

Executive Engineer / Procuring Agency

Contractor



# Summary of Bill of Quantities

Cost of Bid

Amount 1000930

1 (A) Cost based on composite Schedule of Rate

\_\_\_\_\_

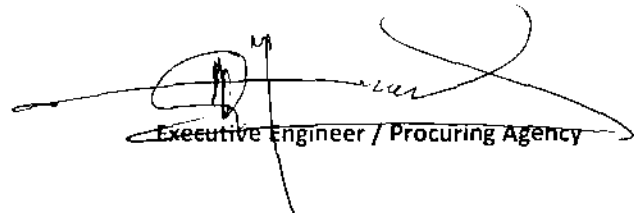
2 (B) Cost of based on Non / Offered Schedule of Rates.

\_\_\_\_\_

TOTAL COST OF BID (C) = TOTAL (A) + Total (B)

1000930

  
Contractor

  
Executive Engineer / Procuring Agency

NAME OF WORK: - CONSTRUCTION OF RCC DRAIN FROM ALLAH DINO MEMON SHOP TO ILYAS KACHI SHOP TOWN COMMITTEE CHUHAR JAMALI

BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
1.	3659.25Cft	Excavation in foundation of building and bridges and others structure i/c dag bellig dressing and refilling ground structure with excavated earth watering and ramming lead up to 5'ft in ordinary soil.	Rs:3176.25	%OCft	Rs:11622.00
2.	609.87Cft	P/ L C.C. 1:4:8 stone or brick ballast 1-1/2" to 2" gauge. (C.S.P.17.It.4(A).	Rs:9416.28	%Cft	Rs:57428.00
3.	1359.15Cft	RCC work in roof slab, beams coloums rafts, lintels and others structural member laid in situ or precast laid in position complete in all respects (b) ratio 1:2:4 90 lbs cement 2Cft sand 4cft shingle 1/8" to 1/2" gauge (G.Sch: P-No: It/No: ( ).	Rs:337.00	P.Cft	Rs:458033.00
4.	60.68Cwt	Fabrication of mild steel reinforcement for cement concrete including cutting, bending laying in position, making joints and fastening including cost of binding wire (also includes removal of rust bars ) using tor bars(G.Sch:P-No:16 It/No:8(b).	Rs:5001.70	P.Cwt	Rs:303485.00
5.	1742.835ft	Cement Plaster (1:4) upto 20' height 1/2" thick (GSC1-ii(b)/P/52)	Rs:2283.93	%Sft	Rs:39805.00

Amount Total (a+b) Rs:8,70,374/-

16% %Above/Below On The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

Total (A) = a + b in words

1009634

Ten Lac Nine thousand Six hundred thirty four only

*Signature*  
Contractor

*Signature*  
Executive Engineer / Procuring Agency



**SINDH PUBLIC PROCUREMENT REGULATORY AUTHORITY**  
**CONTRACT EVALUATION FORM**

**TO BE FILLED IN BY ALL PROCURING AGENCIES FOR PUBLIC CONTRACTORS OF WORKS, SERVICES & GOODS.**

- 1). NAME OF THE ORGANIZATION / DEPTT. Town Committee, Chuhar Jamali, Sujawal
- 2). PROVINCIAL / LOCAL GOVT. / OTHER LOCAL GOVERNMENT
- 3). TITLE OF CONTRACT: "REPAIR AND EXTENSION OF WATER SUPPLY SCHEME POTHA TOWN COMMITTEE CHUHAR JAMALI"
- 4) TENDER NUMBER: as above
- 5). BRIEF DESCRIPTION OF CONTRACT: Water Supply Scheme
- 6). FORUM THAT APPROVED THE SCHEME Town Committee, Chuhar Jamali
- 7). TENDER ESTIMATED VALUE Rs. 8,00,000/=
- 8). ENGINEER'S ESTIMATE PC -Cost Rs: 800000/-
- (FOR CIVIL WORK ONLY)
- 9). ESTIMATED COMPLETION PERIOD (AS PER CONTRACT) (0 1) MONTH
- 10). TENDER OPENED ON DATE AND TIME 02-11-2017 AT 02:00 PM.
- 11). NUMBER OF TENDER DOCUMENTS SOLD 03  
(Attach list of buyers).
- 12). NUMBER OF BIDS RECEIVED 03
- 13). NUMBERS OF BIDDERS PRESENT AT THE TIME OF OPEINING OF BIDS 03
- 14). BID EVALUATION REPORT YES  
(Enclose a copy)
- 15). NAME AND ADDRESS OF THE SUCCESSFUL BIDDER. M/S Abdul Sattar Kehar
- 16). CONTRACT AWARD PRICE SANCTION RUPEES Rs: 799295/-
- 17). RANKING OF SUCCESSFUL BIDDER IN EVALUATION REPORT 1<sup>st</sup> Lowest M/S Abdul Sattar Kehar  
(I.E. 1ST 2ND 3RD EVALUATION BID). 2<sup>nd</sup> LOWEST M/S Muhammad Juman Mandhrio  
3<sup>rd</sup> LOWEST M/S Mumtaz Hussain Soomro
- 18). METHOD OF PROCUREMENT USED: - (TICK ONE)
- A). SINGLE STAGE-ONE ENVELOPE PROCEDURE \_\_\_\_\_ ✓ \_\_\_\_\_
- B). SINGLE STAGE-TWO ENVELOPE PROCEDURE \_\_\_\_\_
- C). TWO STAGE BIDDING PROCEDURE \_\_\_\_\_

D). TWO STAGE-TWO ENVELOPE BIDDING PROCEDURE

PLEASE SPECIFY IF ANY OTHER METHOD OF PROCUREMENT WAS ADOPTED i.e. EMERGENCY, DIRECT CONTRACTING ETC. WITH BRIEF REASONS.

19). PROVIDING AUTHORITY FOR AWARD OF CONTRACT CHAIRMAN TC, CHUHAR JAMALI

20). WHETHER THE PROCUREMENT WAS INCLUDED IN ANNUAL PROCUREMENT PLAN

YES	<input checked="" type="checkbox"/>	NO	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

21). ADVERTISEMENT:

i) SPPRA Website  
(if yes give date & SPPRA Identification No.

YES	<a href="http://www.pprasindhgov.pk">www.pprasindhgov.pk</a> SPPRA Tender SR No. 34792 Dt: 02-11-2017
-----	--

ii) Newspapers  
(if yes give names of newspapers & dates)

YES	<input checked="" type="checkbox"/>	NO	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

22). NATURE OF CONTRACT

<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
DOMESTIC/ LOCAL	LOCAL	INT

23). WHETHER QUALIFICATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?

(if yes, enclose copy).

YES	<input checked="" type="checkbox"/>	NO	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

24). WHETHER BID EVALUATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?

(if, yes enclose a copy).

YES	<input checked="" type="checkbox"/>	NO	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

25). WHETHER APPROVAL OF COMPETENT AUTHORITY WAS OBTAINED FOR USING A METHOD OTHER THAN OPEN COMPETITIVE BIDDING?

YES	<input type="checkbox"/>	NO	N/A
-----	--------------------------	----	-----

26). WAS BID SECURITY OBTAINED FROM ALL THE BIDDERS?

YES	<input checked="" type="checkbox"/>	NO	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

27). WHETHER THE SUCCESSFUL BID WAS LOWEST EVALUATED BID / BEST EVALUATED BID (In case of Consultancies).

YES	<input checked="" type="checkbox"/>	NO	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

28). WHETHER THE SUCCESSFUL BIDDER WAS TECHNICALLY COMPLAINT?

YES	<input type="checkbox"/>	NO	N/A
-----	--------------------------	----	-----

29). WHETHER NAMES OF THE BIDDERS AND THEIR QUOTED PRICES WERE READ OUT AT THE TIME OF OPENING OF BIDS?

YES	<input checked="" type="checkbox"/>	NO	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

30). WHETHER EVALUATION REPORT GIVEN TO BIDDERS BEFORE THE AWARD OF CONTRACT?

(Attach a copy of the bid evaluation report).

31). ANY COMPLAINTS RECEIVED  
(if yes, result thereof).

YES	<input checked="" type="checkbox"/>	NO	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

YES	<input type="checkbox"/>	NO	<input type="checkbox"/>	N/A	<input type="checkbox"/>
-----	--------------------------	----	--------------------------	-----	--------------------------

32). ANY DEVIATION FROM SPECIFICATIONS GIVEN IN THE TENDER  
NOTICE / DOCUMENTS ( if yes, given details).

YES	<input type="checkbox"/>	NO	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

33). WAS THE EXTENSION MADE IN RESPONSE TIME?  
(if yes, given reasons)

YES	<input type="checkbox"/>	NO	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

34). DEVIATION FROM QUALIFICATION CRITERIA  
(if yes, detailed reasons).

YES	<input type="checkbox"/>	NO	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

35). WAS IT ASSURED BY THE PROCURING AGENCY THAT THE SELECTED  
FIRM IS NOT BLACK LISTED?

YES	<input type="checkbox"/>	NO	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

36). WAS A VISIT MADE BY ANY OFFICER / OFFICIAL OF THE PROCURING  
AGENCY TO THE SUPPLIER'S PREMISES IN CONNECTION WITH THE PROCUREMENT?  
IF SO, DETAILS TO BE ASCERTAINED REGARDING FINANCING OF VISIT, IF ABROAD:  
(if yes, enclose a copy)

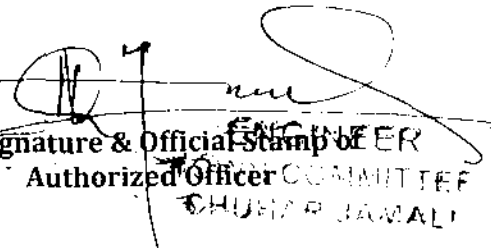
YES	<input type="checkbox"/>	NO	<input type="checkbox"/>	N/A	<input type="checkbox"/>
-----	--------------------------	----	--------------------------	-----	--------------------------

37). WERE PROPER SAFEGUARDS PROVIDED ON MOBILIZATION ADVANCE PAYMENT IN THE  
CONTRACT ( BANK GUARANTEE ETC)?

YES	<input type="checkbox"/>	NO	<input type="checkbox"/>	N/A	<input type="checkbox"/>
-----	--------------------------	----	--------------------------	-----	--------------------------

38). SPECIAL CONDITION, IF ANY  
(if yes, give Brief Description)

YES	<input type="checkbox"/>	NO	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

  
Signature & Official Stamp of  
Authorized Officer  
ENGINEER  
TECHNICAL COMMITTEE  
CHUHAR JAMALI

FOR OFFICE USE ONLY

**SPPRA, Block No. 8, Sindh Secretariat No. 4-A, Court Road, Karachi**  
Tel: 021-9205356, 021-9205369 & Fax No. 021-9206291.

# OFFICE OF THE TOWN COMMITTEE

## CHUHAR JAMALI

NO.T.C.C.J./T.O/ 54

/2017

Dated: 15/12/2017 -

M/s. ABDUL SATTAR KEHAR,  
GOVERNMENT CONTRACTOR

### LETTER OF ACCEPTANCE / SANCTION ORDER

**Subject:** REPAIR AND EXTENSION OF WATER SUPPLY SCHEME POTHAN TOWN  
COMMITTEE CHUHAR JAMALI

On behalf of the employer it is notified that following the approval of accepted of Chairman, Town Committee, Chuhar Jamali, vide Para 24 /No, your bid for the subject is hereby accepted for the sum of Rs:7,99,295/- (Rupees. SEVEN LAC NINETY NINE THOUSAND TWO HUNDRED NINETY FIVE ONLY) as approved by the competent authority Town Committee, Chuhar Jamali.

There is now binding contract between Town Committee, Chuhar Jamali and M/s. **Abdul Sattar Kehar**,

In accordance with the general condition of contract, you are required to enter in to and execute a contract agreement this agreement shall be signed by employer and M/s. **Abdul Sattar Kehar**.

In accordance with condition of contract as per SPPRA-2010 the 2% Bid security Rs:16,000/- and remaining 8% Security may deduct from bill.

All correspondence on onward shall be carried out through Town Officer, Town Committee, Chuhar Jamali.



TOWN OFFICER

TOWN COMMITTEE, CHUHAR JAMALI

**Copy to:-**

- 1- Chairman, Town Committee, Chuhar Jamali.
- 2- Assistant Executive Engineer, (Town Committee, Chuhar Jamali)
- 3- Office Copy.

# TOWN COMMITTEE CHUHAR JAMALI

## AGREEMENT

Subject: - REPAIR AND EXTENSION OF WATER SUPPLY SCHEME POTHIA TOWN COMMITTEE CHUHAR JAMALI

Cost Rs.7,99,295/-

Completion Time (03 Months)

penalty \_\_\_\_\_

The Agreement is made on this 20th Dec day of 2017 at Thatt Town Committee, Chuhar Jamali herein after called the Chuhar Jamali, Sujawal (Which shall mean and include his successors) on the one part and M/s. ABDUL SATTAR KEI office at Chowman TC Chuhar Jamali through their proprietor hereinafter call the "Contractor" (Which expression shall mean and include his successors and assignees) on the other part.

Whereas the Town Committee, Chuhar Jamali, has accepted the tender of for construction and completion of the work namely REPAIR AND EXTENSION SUPPLY SCHEME POTHIA TOWN COMMITTEE CHUHAR JAMALI at a cost of Rs.7,99,295/- within a period of (03 Month) and penalty Rs. \_\_\_\_\_ according to the specification and general conditions of the contract signed by the Contractor after having made himself full acquainted with their meaning.

And whereas the Contractor has already furnished with the Town Committee, Chuhar Jamali the 2% bid amount of Rs.16,000/- (Rupees Sixteen Thousand Only) on account of Bid / Performance security for the said contract.

The following documents after incorporating addenda, except those parts relating to instructions to bidders shall be deemed to form and be read and construed as part of this Agreement, viz:

- a) The Contract Agreement;
- b) The Letter of Acceptance;
- c) The Completed form of Bid;
- d) The Standard and special Terms & Conditions of Contract – Part;
- e) The priced Bill of Quantities

In consideration of the payments to be made by the Town Committee, Chuhar Jamali to the Contractor as hereinafter mentioned, the contractor hereby covenants with the Town Committee, Chuhar Jamali to execute and complete the works and remedy defects therein In conformity and in all respects with the provisions of the contract.

The Town Committee, Chuhar Jamali hereby covenants to pay the contractor, in consideration of the execution and completion of the works as per provisions of contract, the contract Price or such other sum as may become payable under the provisions of the contract at the time and in the manner prescribed by the contractor.

The contractor has given a lien to the Town Committee, Chuhar Jamali over the Security for due fulfillment of the contract and do hereby bind himself, his heirs, successors legal representative and assignee to pay to the Town Committee, Chuhar Jamali penalty through forfeiture of the said Security in case of breach of any condition of the Contract without prejudice to the right of Town Committee, Chuhar Jamali to recover the damages from the Contractor for any such breach as per condition of the contract.

Now therefore this agreement witnesses that the Town Committee, Chuhar Jamali and the Contractor shall respectively and shall well truly carry out and fulfill the contract and abide by all terms and conditions and specifications thereof.

In witness whereof the said parties have set their respective hands on this 20th Dec of Dec 2017

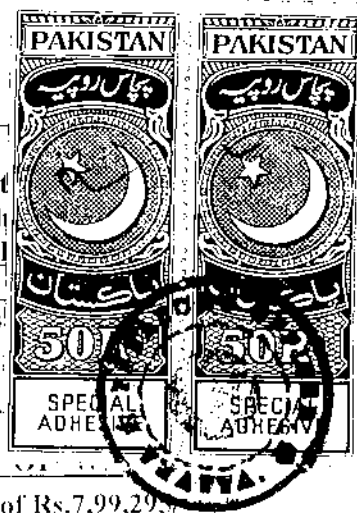
Witness:

1. Signature  
41407-2335479.7

2. Signature  
41407-612-584-3

Signature  
CONTRACTOR  
M/S. ABDUL SATTAR KEI  
Govt. Contract.

Signature  
CHAIRMAN  
TOWN COMMITTEE, CHUHAR JAMALI





NAME OF WORK: - REPAIR AND EXTENSION OF WATER SUPPLY SCHEME POTHATOWN  
COMMITTEE CHUHAR JAMALI

BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
1.	18917.50Cft	Excavation for pipe line in trenches and pits in all kind of soil of murum i/c trimming and dressing side to true alignment and shape leveling of beds of trenches to correct level and grade cutting joint holes and disposal of surplus earth with in one chain as directed by Engineer incharge providing fence guards light flags and temporary crossing for non-vehicular traffic where ever required lift up to 5ft and lead upto one chain. 3" Dia	Rs.4650.00	%0Cft	Rs:87966.00
2.	2162.0Rft	Providing, laying & fixing in trench i/c fitting, jointing & testing etc complete in all respect the high Density polyethylene pipes (HDDE-100) for W/S conforming ISO 4427 / DIN 8071/8075 B.S 3580 & PSI 3051.(PN.12.50)(P.25&27 I/1) 3" Dia	Rs:213.00	P.Rft	Rs:460506.00
3.	17025.75Cft	Refilling the excavated stuff in trenches 6" thick layers i/c watering, ramming to full compaction etc...complete	Rs.2760.00	%0Cft	Rs:46991.00
4.	02 Nos 03 Nos 03 Nos 11 Nos	Providing and fitting of P.E fittings etc complete/ Elbow 90 Degree 3" Dia Elbow 45 Degree 3" Dia Cross Tee Equal 90x90x90 But Fusion Joint 3" Dia	Rs:1676 Rs:1341 Rs:2218 Rs:600	Each Each Each Each	Rs:3352.00 Rs:4023.00 Rs:6654.00 Rs:6600.00
5.	07 Nos	Construction small wheel valve chamber clear inside size 18"x18"x18" with walls of 9" thick of B.B in cement mortar 1:3 over 4" thick cement concrete 1:3:6 cement plastered ½" thick 1:3 inside i/c supplying and fixing C.I light weight manhole cover with frame and locking arrangement of 18" x 18" clear opening etc complete.(P.H.Sch. P/53 I/9)	Rs.4103.00	Each	Rs:28721.00
6.	03 Nos	Providing & fixing full way gun metal valve with wheel, threaded or flanged ends with rubber washer standard pattern(C.Sch. Page No.15, Item No.6(b) 3" Dia	Rs.1940.84	Each	Rs:5822.00

7.	04 Nos	Providing and fixing Air Valve Double action etc complete 3" Dia	Rs.4000.00	Each	Rs:16000.00
----	--------	---	------------	------	-------------

Amount Total ( ) **Rs:6,66,635/-**

*1990*  
%Above/Below On The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

*799295-*

Total (A) = a + b in words

*Seven Lac Ninety Nine Thousand  
Two hundred Ninety Five*

*Asstt. Engr.*  
Contractor

*[Signature]*  
Executive Engineer / Procuring Agency

Summary of Bill of Quantities

Cost of Bid

Amount 79995-

1 (A) Cost based on composite Schedule of Rate

      -      

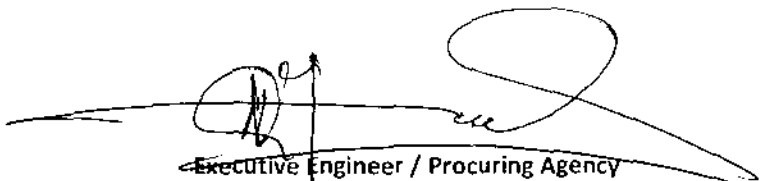
2 (B) Cost of based on Non / Offered Schedule of Rates.

      -      

TOTAL COST OF BID (C) = TOTAL (A) + Total (B)

799295

  
Contractor

  
Executive Engineer / Procuring Agency

NAME OF WORK: - REPAIR AND EXTENSION OF WATER SUPPLY SCHEME POTHATOWN  
COMMITTEE CHUHAR JAMALI

BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
1.	18917.50Cft	Excavation for pipe line in trenches and pits in all kind of soil of murum i/c trimming and dressing side to true alignment and shape leveling of beds of trenches to correct level and grade cutting joint holes and disposal of surplus earth with in one chain as directed by Engineer incharge providing fence guards light flags and temporary crossing for non-vehicular traffic where ever required lift up to 5ft and lead upto one chain. 3" Dia	Rs.4650.00	%0Cft	Rs:87966.00
2.	2162.0Rft	Providing, laying & fixing in trench i/c fitting, jointing & testing etc complete in all respect the high Density polyethylene pipes (HDDE-100) for W/S conforming ISO 4427 / DIN 8071/8075 B.S 3580 & PSI 3051.(PN.12.50)(P.25&27 I/1) 3"Dia	Rs:213.00	P.Rft	Rs:460506.00
3.	17025.75Cft	Refilling the excavated stuff in trenches 6" thick layers i/c watering, ramming to full compaction etc...complete	Rs.2760.00	%0Cft	Rs:46991.00
4.	02 Nos 03 Nos 03 Nos 11 Nos	Providing and fitting of P.E fittings etc complete/  Elbow 90 Degree 3"Dia Elbow 45 Degree 3"Dia Cross Tee Equal 90x90x90 But Fusion Joint 3"Dia	Rs:1676 Rs:1341 Rs:2218 Rs:600	Each Each Each Each	Rs:3352.00 Rs:4023.00 Rs:6654.00 Rs:6600.00
5.	07 Nos	Construction small wheel valve chamber clear inside size 18"x18"x18" with walls of 9"thick of B.B in cement mortar 1:3 over 4" thick cement concrete 1:3:6 cement plastered ½" thick 1:3 inside i/c supplying and fixing C.I light weight manhole cover with frame and locking arrangement of 18" x 18" clear opening etc complete.(P.H.Sch. P/53 I/9)	Rs.4103.00	Each	Rs:28721.00
6.	03 Nos	Providing & fixing full way gun metal valve with wheel, threaded or flanged ends with rubber washer standard pattern(C.Sch. Page No.15, Item No.6(b) 3"Dia	Rs.1940.84	Each	Rs:5822.00

7.	04 Nos	Providing and fixing Air Valve Double action etc complete 3" Dia	Rs.4000.00	Each	Rs:16000.00
----	--------	---	------------	------	-------------

Amount Total ( ) **Rs:6,66,635/-**

*[Handwritten signature]*  
*[Handwritten signature]*  
 (20.50) % Above/Below On The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

Total (A) = a + b in words

**Rs 803995/-** Eight Lacs Three thousand two hundred and Ninety nine (803995) only

*Juan*  
Contractor

*[Handwritten signature]*  
Executive Engineer / Procuring Agency



NAME OF WORK: - REPAIR AND EXTENSION OF WATER SUPPLY SCHEME POTHA TOWN  
COMMITTEE CHUHAR JAMALI

BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
1.	18917.50Cft	Excavation for pipe line in trenches and pits in all kind of soil of murum i/c trimming and dressing side to true alignment and shape leveling of beds of trenches to correct level and grade cutting joint holes and disposal of surplus earth with in one chain as directed by Engineer incharge providing fence guards light flags and temporary crossing for non-vehicular traffic where ever required lift up to 5ft and lead upto one chain. 3" Dia	Rs.4650.00	%0Cft	Rs:87966.00
2.	2162.0Rft	Providing, laying & fixing in trench i/c fitting, jointing & testing etc complete in all respect the high Density polyethylene pipes (HDDE-100) for W/S conforming ISO 4427 / DIN 8071/8075 B.S 3580 & PSI 3051.(PN.12.50)(P.25&27 I/1) 3"Dia	Rs:213.00	P.Rft	Rs:460506.00
3.	17025.75Cft	Refilling the excavated stuff in trenches 6" thick layers i/c watering, ramming to full compaction etc...complete	Rs.2760.00	%0Cft	Rs:46991.00
4.	02 Nos 03 Nos 03 Nos 11 Nos	Providing and fitting of P.E fittings etc complete/  Elbow 90 Degree 3"Dia Elbow 45 Degree 3"Dia Cross Tee Equal 90x90x90 But Fusion Joint 3"Dia	Rs:1676 Rs:1341 Rs:2218 Rs:600	Each Each Each Each	Rs:3352.00 Rs:4023.00 Rs:6654.00 Rs:6600.00
5.	07 Nos	Construction small wheel valve chamber clear inside size 18"x18"x18" with walls of 9"thick of B.B in cement mortar 1:3 over 4" thick cement concrete 1:3:6 cement plastered ½" thick 1:3 inside i/c supplying and fixing C.I light weight manhole cover with frame and locking arrangement of 18" x 18" clear opening etc complete.(P.H.Sch. P/53 I/9)	Rs.4103.00	Each	Rs:28721.00
6.	03 Nos	Providing & fixing full way gun metal valve with wheel, threaded or flanged ends with rubber washer standard pattern(C.Sch. Page No.15, Item No.6(b) 3"Dia	Rs.1940.84	Each	Rs:5822.00

04 Nos	1 fixing Air Valve Double action etc complete 3" Dia	Rs.4000.00	Each	Rs:16000.00
--------	--	------------	------	-------------

Amount Total ( ) Rs:6,66,635/-

~~0.75~~ % Above/Below On The Schedule Rates of CSR.

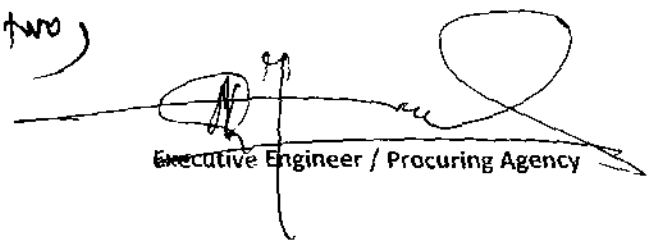
Amount to be Added/Deducted on the basis of premium quoted Total (b)

804962

Total (A) = a + b in words

Eight lac Four thousand  
Nine hundred sixty two

  
Contractor

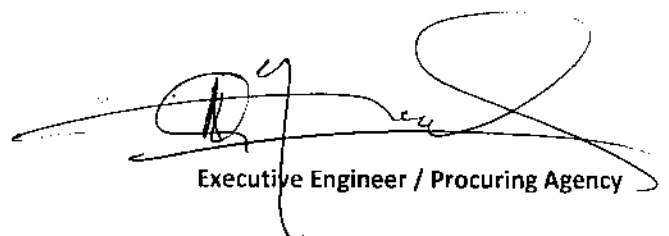
  
Executive Engineer / Procuring Agency



# Summary of Bill of Quantities

Cost of Bid	Amount <u>804962</u>
1 (A) Cost based on composite Schedule of Rate	<u>                    </u>
2 (B) Cost of based on Non / Offered Schedule of Rates.	<u>                    </u>
TOTAL COST OF BID (C) = TOTAL (A) + Total (B)	<u>804962</u>

  
Contractor

  
Executive Engineer / Procuring Agency