



**OFFICE OF THE  
SENIOR SUPERINTENDENT OF POLICE  
JAMSHORO**

NO. 2722-24 /2017.

Dated. 14-12-2017

To,

**M/s MOHAMMAD ALI DEPAER**  
b/Office Shop No.1, Tanveer Lodgement Near Burhani  
Nagar Sajadabad Hyderabad.  
Cell No. 0306-3067867

Subject: **LETTER FOR ACCEPTANCE FOR AWARD OF CONTRACT FOR  
REPAIR/RENOVATION WORK OF DIGP CAMP OFFICE HYDERABAD  
F.Y 2017-2018.**

It is to inform you that bid offered by you for repair & renovation work of DIGP Camp Office Hyderabad dated 15.11.2017; have been approved/accepted being lowest by the Procurement Committee. The contract Value/Bid Value of **Rs.87,93,369/-** (Rupees eight million seven hundred ninety three thousand three hundred sixty nine only) is given by your firm.

2/- You are therefore requested to sign contract agreement, performance security on the stamp paper of appropriate value with the undersigned within 4 days on or before without fail. After execution of Contract Agreement/Performance Security, the work order will be issued accordingly.

**SENIOR SUPERINTENDENT OF POLICE  
- JAMSHORO**

& Chairman Procurement Committee

Copy to the following for information & n/action.

1. The IGP Sindh Karachi.
2. The DIGP Hyderabad Range
3. The Executive Engineer, Provincial Buildings Hyderabad.
4. The Assistant Engineer, Provincial Buildings Div (EL) Hyderabad.
5. The Manager, SPPRA, Barrack No. 8, Court Road Karachi w/r to publish on website.
6. Order File



OFFICE OF THE  
SENIOR SUPERINTENDENT OF POLICE  
JAMSHORO

NO. 2737-40/2017

Dated. 18.12.2017

To,

**M/s MOHAMMAD ALI DEPAER**  
b/Office Shop No.1, Tanveer Lodgement Near Burhani  
Nagar Sajadabad Hyderabad.  
Cell No. 0306-3067867

**WORK ORDER**

Subject:- **REPAIR & RENOVATION WORK OF DIGP CAMP OFFICE HYDERABAD  
F.Y 2017-2018.**

Your offer dated 15.11.2017 for the above subject work:

- |                                  |   |                       |
|----------------------------------|---|-----------------------|
| 1. PART "A" Civil Work           | = | Rs.57,16,861/         |
| 2. Non Schedule Items Civil Work | = | <b>Rs.21,14,811/-</b> |
| 3. PART "B" W/S & S/F            | = | AT PAR                |
| 4. PART "C" Electrification Work | = | AT PAR                |
| 5. E.I Work Non Schedule Items   | = | <b>Rs.300,087/-</b>   |

Total amounting **Rs.87,93,369/-** being the lowest is hereby accepted.

2/- You should therefore please start the work within 7 days from the date of issue of this "work order" under the supervision of Assistant Engineer, Provincial Building (**Buildings Div (EL) Hyderabad**). The work should be completed within 03 months as according with Bidding Documents of SPPRA Rules 2010 (amended 2016) & strictly to the standard P.W.D's specifications.

3/- It should be noted that any typographical mistake or error in schedule-B will be read strictly as per schedule of rates in force and that any change in schedule B/Estimate of made by Superintending Engineer/Executive Engineer or Assistant Executive Engineer in the government interest during the execution of work will be acceptable to you unconditionally.

- You should also nominate your agent/supervisor to whom instructions at site.
- If you are a body corporate or partnership you should submit necessary of attorney in favour of someone which is to receive cheque/material. A true copy of partnership deed or memo of term and articles of association should also please be supplied to this office.
- Work should be carried out as per allocation of funds Rs.4.00 million.**

SENIOR SUPERINTENDENT OF POLICE  
JAMSHORO

& Chairman Procurement Committee

*Copy to the following for information & n/action.*

- The IGP Sindh Karachi.
- The DIGP Hyderabad Range
- The Executive Engineer, Provincial Buildings Hyderabad
- Assistant Engineer, Provincial Buildings Div (EL) Hyderabad. He should report the date of start of work as soon as. It is started and ensure that no excess over estimate or deviation from it may be allowed. In case of extreme need prior approval from the competent authority.
- The Manager, SPPRA, Barrack No. 8, Court Road Karachi w/r to publish on website Sr.No.29921.
- Order File.

# SINDH PUBLIC PROCUREMENT REGULATORY AUTHORITY

## **CONTRACT EVALUATION FORM**

### **TO BE FILLED IN BY ALL PROCURING AGENCIES FOR PUBLIC CONTRACTS OF WORKS, SERVICES & GOODS**

- 1) NAME OF THE ORGANIZATION / DEPTT. OFFICE OF THE SENIOR SUPERINTENDENT OF POLICE JAMSHORO & CHAIRMAN PC DIGP CAMP OFFICE HYD
- 2) PROVINCIAL / LOCAL GOVT./ OTHER PROVINCIAL GOVT. (SINDH POLICE)
- 3) TITLE OF CONTRACT Repair&Renovation of DIGP Camp Office
- 4) TENDER NUMBER NIT: Nationl, Sukar, Awami Awaz & Express S.N. 34912
- 5) BRIEF DESCRIPTION OF CONTRACT Repair/Renovation work of DIGP Camp Office
- 6) FORUM THAT APPROVED THE SCHEME IGP SINDH KARACHI
- 7) TENDER ESTIMATED VALUE 8.938 million
- 8) ENGINEER'S ESTIMATE 8.938 million  
(For civil works only)
- 9) ESTIMATED COMPLETION PERIOD (AS PER CONTRACT) 90 DAYS on or before
- 10) TENDER OPENED ON (DATE & TIME) 15.11.2017: Time 3.00 PM
- 11) NUMBER OF TENDER DOCUMENTS SOLD 03  
(Attach list of buyers)
- 12) NUMBER OF BIDS RECEIVED 03
- 13) NUMBER OF BIDDERS PRESENT AT THE TIME OF OPENING OF BIDS 03
- 14) BID EVALUATION REPORT Yes  
(Enclose a copy)
- 15) NAME AND ADDRESS OF THE SUCCESSFUL BIDDER M/s Mohammad Ali Dejar
- 16) CONTRACT AWARD PRICE Rs.87,93,369/-
- 17) RANKING OF SUCCESSFUL BIDDER IN EVALUATION REPORT  
(i.e. 1<sup>st</sup>, 2<sup>nd</sup>, 3<sup>rd</sup> EVALUATION BID).  
M/s Mohammad Ali Dejar  
M/s Malwa Enterprises  
M/s Wania Enterprises
- 18) METHOD OF PROCUREMENT USED : - (Tick one)
- a) SINGLE STAGE – ONE ENVELOPE PROCEDURE YES Domestic  Domestic/ Local
- b) SINGLE STAGE – TWO ENVELOPE PROCEDURE
- c) TWO STAGE BIDDING PROCEDURE
- d) TWO STAGE – TWO ENVELOPE BIDDING PROCEDURE

PLEASE SPECIFY IF ANY OTHER METHOD OF PROCUREMENT WAS ADOPTED i.e. EMERGENCY, DIRECT CONTRACTING ETC. WITH BRIEF REASONS:

19) APPROVING AUTHORITY FOR AWARD OF CONTRACT \_\_\_\_\_

20) WHETHER THE PROCUREMENT WAS INCLUDED IN ANNUAL PROCUREMENT PLAN?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

21) ADVERTISEMENT :

i) SPPRA Website  
(If yes, give date and SPPRA Identification No.)

Yes	Sr. No. 34912
No	

ii) News Papers  
(If yes, give names of newspapers and dates)

Yes	Daily Nation, Sukar, Express (26.10.2017)
No	

22) NATURE OF CONTRACT

Domestic/ Local	<input checked="" type="checkbox"/>	Int.	<input type="checkbox"/>
--------------------	-------------------------------------	------	--------------------------

23) WHETHER QUALIFICATION CRITERIA  
WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?  
(If yes, enclose a copy)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

24) WHETHER BID EVALUATION CRITERIA  
WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?  
(If yes, enclose a copy)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

25) WHETHER APPROVAL OF COMPETENT AUTHORITY WAS OBTAINED FOR USING A  
METHOD OTHER THAN OPEN COMPETITIVE BIDDING?

Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

26) WAS BID SECURITY OBTAINED FROM ALL THE BIDDERS?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

27) WHETHER THE SUCCESSFUL BID WAS LOWEST EVALUATED  
BID / BEST EVALUATED BID (in case of Consultancies)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

28) WHETHER THE SUCCESSFUL BIDDER WAS TECHNICALLY  
COMPLIANT?

Yes	<input type="checkbox"/>	No	<input type="checkbox"/>
-----	--------------------------	----	--------------------------

29) WHETHER NAMES OF THE BIDDERS AND THEIR QUOTED PRICES WERE READ OUT AT  
THE TIME OF OPENING OF BIDS?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

30) WHETHER EVALUATION REPORT GIVEN TO BIDDERS BEFORE THE AWARD OF  
CONTRACT?  
(Attach copy of the bid evaluation report)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

31) ANY COMPLAINTS RECEIVED  
(If yes, result thereof)

Yes	
No	NO complain Recived

32) ANY DEVIATION FROM SPECIFICATIONS GIVEN IN THE TENDER NOTICE / DOCUMENTS  
(If yes, give details)

Yes	
No	No

33) WAS THE EXTENSION MADE IN RESPONSE TIME?  
(If yes, give reasons)

Yes	
No	No

34) DEVIATION FROM QUALIFICATION CRITERIA  
(If yes, give detailed reasons.)

Yes	
No	

35) WAS IT ASSURED BY THE PROCURING AGENCY THAT THE SELECTED FIRM IS NOT  
BLACK LISTED?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

36) WAS A VISIT MADE BY ANY OFFICER/OFFICIAL OF THE PROCURING AGENCY TO THE  
SUPPLIER'S PREMISES IN CONNECTION WITH THE PROCUREMENT? IF SO, DETAILS TO  
BE ASCERTAINED REGARDING FINANCING OF VISIT, IF ABROAD:  
(If yes, enclose a copy)

Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

37) WERE PROPER SAFEGUARDS PROVIDED ON MOBILIZATION ADVANCE PAYMENT IN  
THE CONTRACT (BANK GUARANTEE ETC.)?

Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

38) SPECIAL CONDITIONS, IF ANY  
(If yes, give Brief Description)


Yes	
No	No



Signature & Official Stamp of  
Authorized Officer SSP JAMSHORO

**FOR OFFICE USE ONLY**

**SPPRA, Block. No.8, Sindh Secretariat No.4-A, Court Road, Karachi**  
Tele: 021-9205356; 021-9205369 & Fax: 021-9206291

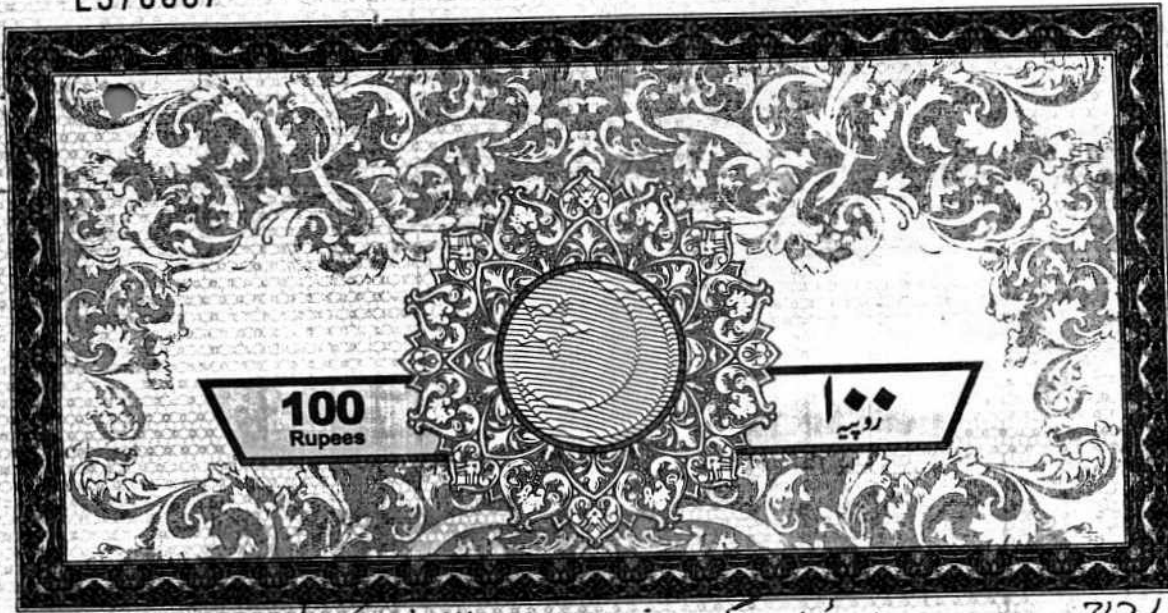

محمد علی ڈبیر کو روٹینٹ لیسر لیسٹر 321 c

MOHAMMAD HUSSAN MEMON  
Government Vendor  
Licence No. 1000  
Session Court

**CONTRACT/AGREEMENT**

THIS AGREEMENT made the 15<sup>th</sup> day of December 2017 between SENIOR SUPERINTENDENT OF POLICE JAMSHORO & CHAIRMAN PROCUREMENT COMMITTEE FOR REPAIR OF DIGP CAMP OFFICE HYDERABAD; (hereinafter called "successor, legal representative of the Procuring agency) of the one part and M/s MOHAMMAD ALI DEPAER b/Office Shop No.1, Tanveer Lodgement Near Burhani, Nagar Sajadabad Hyderabad. (hereinafter called "the contractor") of the other part:

WHEREAS the Procuring agency invited bids through news paper NIT Published in news paper and SPPRA Serial No.34912. for repair/ renovation of DIGP Camp Office Hyderabad and has been accepted a bid of contractor/firm in the sum of Rs.87,93,369/- (Rupees eight million seven hundred ninety three thousand three hundred sixty nine only)

**NOW THIS AGREEMENT WITNESSETH AS FOLLOWS:**

1. In this Agreement words and expressions shall have the same meanings as are respectively assigned to them in the Conditions of Contract referred to.
2. The following documents shall be deemed to form and be read and construed as part of this Agreement, viz.:
  - (a) Bid Form and the Price Schedule submitted by the Bidder;
  - (b) Schedule of Requirements;
  - (c) General Conditions of Contract;
  - (d) Special Conditions of Contract; and
  - (e) Procuring agency's Notification of Award.
3. In consideration of the payments to be made by the Procuring agency to the firm as hereinafter mentioned, the Supplier hereby covenants with the Procuring agency to provide the goods and services and to remedy defects therein in conformity in all respects with the provisions of the Contract
4. The Procuring agency hereby covenants to pay the Contractor/firm/supplier in consideration of the provision of repair of DIGP Camp office Hyderabad and services and the remedying of defects therein, the Contract Price or such other sum as may become payable under the provisions of the contract at the times and in the manner prescribed by the contract.

IN WITNESS whereof the parties hereto have caused this Agreement to be executed in accordance with their respective laws the day and year first above written.

Superintendent of Police Stamp  
Procurement Committee


M/S MOHAMMAD ALI DEPAER  
Govt. Contractor & General Order Supplier

**WITNESSES.**

1. Syed Ali Raza  
CNIC No. 45302-0978269

2. Shahzad Raza  
CNIC No. 41306-2126357-7



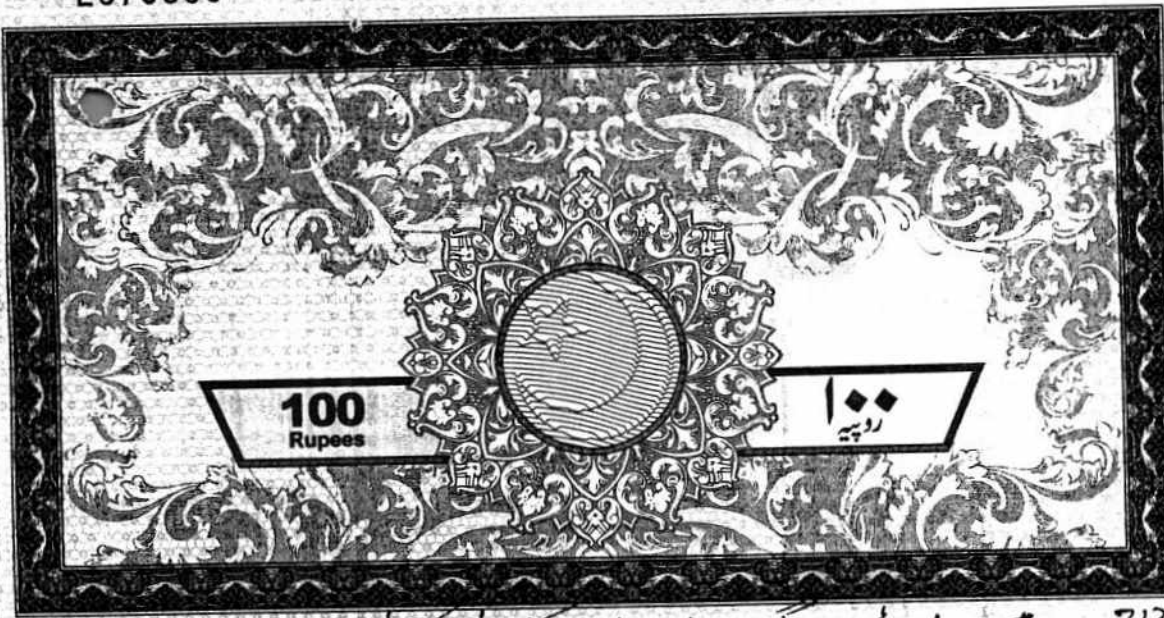

محمد علی ڈیپار گورنمنٹ کنٹریکٹرز

ZEEHAN HASSAN MEMON  
Government Stamp Vendor  
15 DEC 2017  
Licence No: 15 OFF No: 21  
Session Court Compound

### Performance Security Form

Senior Superintendent of Police  
Jamshoro

WHEREAS M/s **Mohammad Ali Depar** (hereinafter called "the Contractor") has undertaken, in pursuance of Contract No. NIT and SPPRA Serial No.34912 for repair of DIGP Camp Office Hyderabad (hereinafter called "the Contract").

AND WHEREAS it has been stipulated by you in the said Contract that the Contractor shall furnish you with a Performance Security for the contract value awarded to our firm of Rs.87,93,369/-.

AND WHEREAS we have agreed to give the Performance guarantee:

THEREFORE WE hereby affirm that I on behalf of my firm **M/s MOHAMMAD ALI DEPAR** responsible for the items which will be provided by me for the above awarded work. My security amount of 1% of bid security is adjusted in Security Deposit as performance security and separate deposit 5% Security amount from bills for maintenance period upto 6 months or June 2018 and will be kept for at the time of delivery of maintenance period.

*[Signature]*  
Superintendent of Police  
S. Jamshoro  
with stamp

*[Signature]*  
M/S MOHAMMAD ALI DEPAR

**M. ALI DEPAR**  
Govt Contractor &  
General Order Supplier



**SENIOR SUPERINTENDENT OF POLICE  
JAMSHORO & CHAIRMAN**

*Procurement Committee*  
**DIGP CAMP OFFICE HYDERABAD**

**@**

**DIGP OFFICE HYDERABAD RANGE**

1<sup>st</sup> Floor Shahbaz Building Hyderabad, Tel No. 022-9200093

## **BIDDING DOCUMENT**

**REPAIR/RENOVATION WORK OF DIGP**

**CAMP OFFICE HYDERABAD RANGE**

**(F.Y 2017-2018)**

issued to

**M/s** Muhammad Ali Deepu  
Govt Contractors



RENOVATION OF DIG HOUSE HYDERABAD.

Schedule-B

Name of Item.	Quantity	Rate	Unit	Amount.
<b>PART "A" CIVIL WORK.</b>				
Reinforced Cement Concrete Work including All Labour & Material Except the Cost of Steel Reinforcement & its labour for Bending & Binding which will be paid Separately. This Rate also includes All Kinds of Forms Moulds: Lifting,uttering, Curing, Rendering & Finishing the Exposed surface (Including Screening & Washing of Shingle) (a) RCC Work in Roof, Slab, Beams, Columns, Rafts, Lintels & other Structural Members Laid in Situ or Precast Laid in position Complete in All Respects (I) Ratio (1:2:4) 90 Lbs. cement 2 Cft, Sand 4 Cft, Shingle 1/8" to 1/4" Gauge (S.I. No:- 6 (a) (I) / P-17).	2547 Cft.	337.00	Cft.	858,339
		Rs. Three Hundred Thirty Seven.		
Fabrication of Tor Bar Steel Reinforcement for Cement concrete including Cutting, Bending, Laying in Position, tying Joints & Fastenings including Cost of Binding Wire which includes Removal of Rust from Bars (S.I. No:- 8 (b) / P-17).	230.38 Cwt.	5001.70	P. Cwt.	1,152,292
		Rs. Five Thousand One Point Seventy Paise.		
Plastering (b) Ordinary Distemper, Oil Bound Distemper or similar on Walls (S.I. No:- 54 (b) / P-13).	4811 Sft.	226.88	% Sft.	10,915
		Rs. Two Hundred Twenty Six Point Eighty Eight Paise.		
Plastering with Cement or Lime Plaster (S.I. No:- 53 / P-13).	4811 Sft.	121.00	% Sft.	5,821
		Rs. One Hundred Twenty One.		
Plaster 1:6 Upto 20' Feet Height (a) 1/2" Thick (S.I. No:- 13 (b) / P-52).	11530 Sft.	2206.60	% Sft.	254,421
		Rs. Two Thousand Two Hundred Six Point Sixty Paise.		
Plaster 1:4 Upto 20' Feet Height (a) 3/8" Thick (S.I. No:- 11 (a) / P-52).	11530 Sft.	2197.52	% Sft.	253,374
		Rs. Two Thousand One Hundred Ninety Seven Point Fifty Two Paise.		
Grinding the Surface & Painting with Matt Finish including Grinding the Surface with Bathy (Silicon Carbide Rubbing Stone) Filling the Voids with Zink / Chalk / Plaster of Paris & then Applying First Coat Premix, Making the Surface Smooth & then Painting 3 Coats with Matt Finish of Red Lead etc Complete (New Surface) (b) 2nd & subsequent Coats (a + b) (Three Coats) (S.I. No:- 36 (b) / P-108).	11530 Sft.	3444.38	% Sft.	397,137
		Rs. Three Thousand Four Hundred Forty Four Point Thirty Eight Paise.		
Grinding the Surface & Painting with Weather Coat including Grinding the Surface with Rubbing Brick / Sand & then Filling the Voids with Chalk / Plaster of Paris & then painting with Weather Coat of Approved Make (b) 2nd & subsequent Coat (Three Coats) (a + b) (S.I. No:- 38 (a + b) / P-108).	3732 Sft.	2567.95	% Sft.	95,836
		Rs. Two Thousand Five Hundred Sixty Seven Point Ninety Five Paise.		
Fixing & Fixing in Position Aluminium Channels for Hinged Doors or Alcops Made with 5 MM Thick Glass Glazing (Belgium) & Alpha (Japan) Locks & Handles, Stoppers etc (b) Deluxe Model (Bronze) (S.I. No:- 83 (b) / P-108).	369 Sft.	1507.66	P. Sft.	556,327
		Rs. One Thousand Five Hundred Seven Point Sixty Six Paise.		
Supply & Fixing in Position Deodar Wood Wrought Joinery in Doors & Windows etc Fixed in Position including Chowkats Holders, Iron Tower Bolts, Chocks Cleats, Handles & Hooks, etc Deodar Panelled or Panelled & Fully Glazed (b) 1-3/4" Thick (Only Shutter) (S.I. No:- 58 (b) / P-58).	352 Sft.	902.93	P. Sft.	317,831
		Rs. Nine Hundred Two Point Ninety Three Paise.		

Name of Item.	Quantity	Rate	Unit	Amount.
Providing & Fixing G.I. Frames / Chokhats of Size 7" x 2" or 4-1/2" x 3" for Windows Using 20 Gauge G.I. Sheet including Welded Hinges & Fixing @ Site with Necessary Hold Fast, Filling with Cement Sand Slurry of Ratio 1:6 & Repairing the Jambs. The Cost also includes All Carriage, Tools & Plants Used in Making & Fixing (S.I. No:- 29 / P-33).	201 Rft.	228.90	P. Rft.	46,009
				Rs. Two Hundred Twenty Eight Point Ninety Paise.
Waffle Brick Work other than Building including Striking of joints Upto 20' Feet Height in (l) (e) Cement Sand Mortar 1:6 (S.I. No:- 7 (l) (e) / P-22).	1703 Cft.	12346.65	% Cft.	210,263
				Rs. Twelve Thousand Three Hundred Forty Six Point Sixty Five Paise.
Cement Concrete Brick or Stone Ballast 1 1/2" to 2" Gauge Ratio 1:4:8 (S.I. No:- 4 (b) / P-15).	1062 Cft.	9416.28	% Cft.	100,001
				Rs. Nine Thousand Four Hundred Sixteen Point
Providing & Fixing Cement Paving Blocks Flooring having size of 197 x 97 x 60 (MM) of City / Qudra / Cobble Shape with Natural Colours, having Strength between 5000 PSI to 5000 PSI including Filling the Joints with Hill Sand & Laying Specified Manner / Pattern & Design etc. Complete (S.I. No:- 71 / P-49).	800 Sft.	199.77	P. Sft.	159,816
				Rs. One Hundred Ninety Nine Point Seventy Seven Paise.
Removal of Cement Concrete Reinforced Separating Slab for Cement from Concrete Cleaning & Straightening (Same (S.I. No:- 20 / P-10).	894 Cft.	5445.00	% Cft.	48,678
				Rs. Five Thousand Four Hundred Forty Five.
Removing door with chowket. (S.I. No:- 33-a / P-13).	6 Nos	142.18	P. Nos	853
				Rs. One Hundred Forty Two Rupees and Eighteen Paise.
Removing Window and sky light with chowkets. (S.I. No:- 33-b / P-13).	2 Nos	102.85	P. Nos	206
				Rs. One Hundred Two Rupees and Eighty Five Paise.
Plain l/c placing compacting finishing & curing concrete (l/c screening washing of stone aggregate without curing ratio 1:2:4 (SINO.5 (c) / P-15).	1062 Cft	14429.25	% Cft	153,239
				Rs. Fourteen Thousand Four Hundred Twenty Nine Rupees and Twenty Five Paise.
7" thick topping c.c. 1:2:4 including surface finishing dividing into panels.(SINO.16(c) P-47)	3720 Sft	3275.50	% Sft	121,849
				Rs. Thirty Two Hundred Seventy Five Rupees and Fifty Paise.
Level of cement concrete 12" x 8" x 1" of approved shape laid flat in 1:2 grey cement mortar over a bed of 1" thick grey cement mortar 1:2. (S.I. No:- 39 P-38).	230 Sft.	8977.90	% Sft.	20,649
				Rs. Eight Thousand Nine Hundred Seventy Seven Rupees and Ninety Paise.
Painting and fixing deodar wooden wardrobe including with back shelves, shutters drawers and brass fittings such as handles locking arrangement, hanger rod and mirror measuring 2' x 1' Complete as per design. (S.I. No:- 24 P-61).	180 Sft.	2364.63	P.Sft	425,633
				Rs. Two Thousand Three Hundred Sixty Four Rupees and Sixty Three Paise.

Total Rs: 5,189,489

149798

Add 13% on this - 2

Add 10% above - 2

5389287  
1413749

3775740  
377574

4153314  
5329287

9497604

1989175

Name of Item.	Quantity	Rate	Unit	Amount.
<b>NON-SCHEDULE ITEM.</b>				
Providing and Fixing Ceramix Hard Floor tiles with wood texture over wall facing or floor (Size 6" x 24" x 1/2" ir above) jointed in white cement and laid over bed of 3/4" thick grey cement sand motar 1:3 washing / filling of joints with white cement etc complete in all respect.	2665 Sft	355.96	P.Sft	948633
Providing and Fixing of Granite Marble 3/4" thick size (12"x48") redish / blackish over a bed of 3/4" cement mortar ratio 1:3 i/c rubbing and polishing of the joints etc complete in all respect also i/c chemical polish.	36 Sft	1759	P.Sft	63324
Supplying & Fixing Imported Wall Paper Fixed with adhesive solution over base of matt finish putti etc complete in all respects (First Quality)	830 Sft	309	P.Sft	256470
Supplying & Fixing of Decorative False Ceiling made of imported Gypsum Sheet 12mm Thick Fixed with M.S Suspension & Decorative Glass. (First Glass).	1089 Sft	380	P.Sft	413820
Providing & Fixing English Commode Seat i/c Glazed Flushing Cistern, Nyloon Tube etc Complete. (Porta Royal Classic Model 1st Quality or Equavalent).	5 Nos	28309	Each	141545
Providing and Fixing Wash Basin 24"x18" i/c Padestal, C.P Waste, Syphon System, P.V.C, Waste Pipe, Bolt Kit, Floor Connection etc Complete Porta Royal Classic Model 1st Quality or Equavalent).	5 Nos	25000	Each	125000
Indian W.C. (Porta).	5 Nos	8404	Each	42020
Providing & Fixing Bath Shower Set (Wall Mounted) i/c chromonic Shower C.P Rods etc completed.(MASTER / NEX OR EQUVALENT).	5 Nos	24799	Each	12995

Total Rs. = 2114811 =

	Quantity	Rate	Unit	Amount.
<b>PART "B" W/S &amp; S/F.</b>				
P/F 6"x2" or 6"x3" C.I floor trap of the approved self cleaning design with a C.I screwed down gritting with or without a vent arm complete with and i/c making req: No. of holes in walls plinth & floor for pipe connection and making good in C.C 1:2:4. (SI No:20 P-6)	12 Nos:	2042.43	Each	24509
		(Rs: Two Thoud: Forty Two & Ps: Forty Three) Only		
P/F in position nyloon connections complete with 1/2" dia brass stop cock with pair of brass nuts and lining joints to nyloon connection. (SI No:23 P-6)	35 Nos:	447.15	Each	15650
		(Rs: Four Hund: Fourty Seven & Ps: Fifteen) Only		
P/F 4" dia C.I soil & vent pipe i/c cutting & fitting & extra painting to match the colour of the building. (SI No:1 P-9)	35 Rft	333.29	P.Rft	11665
		(Rs: Three Hund: Thirty Three & Ps: Twenty Nine) Only		
P/F M.S clamps of the approved design to 4" dia C.I pipe sockets i/c the cost of cutting & making good to wall or M.S bolts & nuts, 4" into wall i/c pipe distance pieces extra painting to match the colour of the building. (SI No:2 P-9)	30 Nos:	72.16	Each	2165
		(Rs: Seventy Two & Ps: Sixteen) Only		
P/F 4"x4" dia C.I branch of the required degree with access bars, rubber washer 3/8" thick & bolts & nuts & extra painting to match the colour of the building. (SI No:4 P-9)	15 Nos:	702.00	Each	10530
		(Rs: Seventy Two ) Only		
P/F 24"x18" lav: basin in white glazed earthen ware complete with & including the cost of W.I. Or C.I. Contilever brackets 6 inches built into walls painted white in two coats after a primary coat of red lead paint a pair of 1/2" dia chrome plated pillar taps, 1-1/2" dia rubber plug and chrome plated brass chain 1-1/4" dia malleable iron or brass traps malleable iron or brass union and making requisite No. of holes in walls, plinth and floor for pipe connection and making good in c.c. 1:2:4 ( foreign or local) (SINO. 13 P-4)	5 Nos.	6237.00	Each	31,185
		(Rs: Six Thousand two Hundred Thirty Seven Paisa) Only		
Extra labour for providing and fixing of earthen ware pedestal white or coloured glazed (Standard Pattern) No. 11 P-3)	5 Nos.	2533.47	Each	12,667
		(Rs: Twenty Five Hundred Thirty Three Rupees and Fourty Seven Paisa ) Only		
steel sink stainless local make complete with cast iron rough iron bracksts 6" built in wall 1-1/2" rubber plug chrome brass chain 1-1/2" C.P brass waste with 1-1/2" PVC waste pipe and making requisite nof holes in wall and plinth floor for pipe connection and making good in c.c. 1:2:4 (b) steel sink stainless sized 36"x18" local make (Standard pattern) S.I.No.19-b P-5	2 Each	5162.30	Each	10,325
		(Rs: Five Thousand One Hundred Sixty Two Rupees and Thirty Paisa ) Only		
Supply & fixing chrome plated brass towel rail complete with brackets fixing on wooden cleats with 1" long c.p brass bolts (a) 3/4" dia round or square (Standard Pattern)(II) (SINO. 14 P-7)	5 Nos:	1082.95	Each	5415
		(Rs: One Thousand Eighty Two Rupees and Ninety Five Paisa ) Only		
Supply & fixing 15" x 12" bavelled edge mirror of belgium complete with 1/8" thick hard board and c.p screws wooden pleat. (a) Standard Pattern.(S.I.No.4 P-7)	5 Nos:	1161.60	Each	5808
		(Rs: Elven Hundred Sixty One Rupees and Sixty Paisa ) Only		
Supply concealed stop cock of superior quality with lead 1/2" dia (SINO.14(b) P-15)	15 Each	889.46	Each	13,342
		(Rs: Eight Hundred Eighty Nine Rupees and Fourty Six Paisa ) Only		
Supply long bib- cock of superir quality with c.p head (SINO.13 P-19)	15 Each	1,109.46	Each	16,642
		(Rs: Elven Hundred Nine Rupees and Fourty Six Paisa ) Only		

NAME OF ITEM.	Quantity	Rate	Unit	Amount.
Supplying & Fixing jet shower with rod of superior quality single c.p head 1/2" dia (S.I.No.15 P-19)	10 Each	1142.24	Each	11,422
		(Rs: Eleven Hundred Forty Two Rupees and Twenty Four Paisa ) Only		
Providing F.C. pressure pipe with collar (Dedex or equivalent) i/c digging the trench to required depth and fixing in position and jointing with rubber rings including testing to water pressure head of 200 feet.(b) 4" dia F.C. pressure pipe. (S.I.No.3 P-25)	320 Rft	188.44	P.Rft	60301
		(Rs: One Hundred Eighty Eight Rupees and Forty Four Paisa) Only		
Constructing manhole for the required dia of circular sewer and 7'-9" depth with walls of B.B in cement mortar 1:3 cement plastered 1:3, 1/2" thick, inside of walls and 1" (25 mm) thick over benching and channel i/c fixing C.I manhole cover with frame of clear opening 2' x 2' (610x610 mm)	10 Nos	2524.25	P.Nos	25243
		(Rs: Twenty Five Hundred Twenty Four Rupees and Twenty Five Paisa ) Only		
Providing, Laying uPVC Pressure Pipes of Class 'C' (equivalent make) fixing in trench i/c cutting, fitting and jointing with 'Z' joint with one rubber ring i/c testing with water to a head 91.5meter or 300 ft. 100 mm (4" dia)(S.I.No.1 P-22)	280 Rft	174.00	P.Rft	48720
		(Rs: One Hundred Seventy Four Rupees ) Only		
		<b>Total Rs.</b>		<b>305,589</b>



Name of Item.	Quantity	Rate	Unit	Amount.
<b>Part-C Schedule Item (E.I Work)</b>				
1 Wiring for light or fan point with 3/029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required.(S.I.No.1234 P-15)	60 Nos	1,130.00	Each	67,800 <b>(Rs: Eleven Hundred Thirty Rupees Only)</b>
2 Wiring for pug point with 3/029 PVC insulated wire in 20mm (3/4") channel patti on surface as required (S.I. No. 126/P-15)	21 Nos	985.00	Each	20,685 <b>(Rs: Nine Hundred Eighty Five Rupees Only)</b>
3 Wiring for Call bell point with 3/029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required (S.I. No. 128/P-15)	3 Nos	1,764.00	Each	5,292 <b>(Rs: Seventeen Hundred Sixty Four Rupees Only)</b>
P/L (Main or Sub Main) PVC insulated with size 2-7/029 copper conductor in (3/4") dia PVC conduit recessed in the wall or column as required(SI No.10 P-2).	300 MTR	222.00	P.MTR	66,600 <b>(Rs: Two Hundred Twenty Two Rupees Only)</b>
P/L (Main or Sub Main) PVC insulated with size 2-7/044 copper conductor in (3/4") dia PVC conduit recessed in the wall or column as required (SI No. 12 P-2).	250 MTR	341.00	P.MTR	85,250 <b>(Rs: Three Hundred Forty One Rupees Only)</b>
P/L (Main or Sub Main) PVC insulated with size 2-7/064 copper conductor in (3/4") dia PVC conduit recessed in the wall or column as required (SI No. 14 P-2).	100 MTR	641.00	P.MTR	64,100 <b>(Rs: Six Hundred Forty One Rupees Only)</b>
P/F B.C Bakelite angular type bittern holder (S.I.No.1 P-14)	9 Nos	69.00	Each	621 <b>(Rs: Sixty Nine Rupees Only)</b>
P/F Circuit breaker 15, 20, 30, 40, 50, 60, 75 & 100amp TP (XS-100NS) on a prepared board as required. (Si-204, P-31)	13 Nos	2,456.00	Each	31,928 <b>(Rs: Twenty Four Hundred Fifty Six Rupees Only)</b>
Providing & Fixing 6,10,15,20,30,40,50 & 63 amp SP(TB-5S) on prepared board as required.(S.I.No.204 P-31)	4 Nos	916.00	Each	3,664 <b>(Rs: Nine Hundred Sixteen Rupees Only)</b>
Providing & fixing circuit breaker 15,20,30,40,50,60,75 & 100amp TP (XS-100NS) on prepared board as required.(S.I.No.207 P-31).	1 Nos	9,261.00	Each	9,261 <b>(Rs: Nine Thousand Two Hundred Sixty One Rupees Only)</b>
P/F Bakelite ceiling rose with two terminals (S.I.No. 228 P-33)	10 Nos	72.00	Each	720 <b>(Rs: Seventy Two Rupees Only)</b>
<b>Total Amount Part-C</b>				<b>355,921</b>

No.	Name of Item.	Quantity	Rate	Unit	Amount.
-----	---------------	----------	------	------	---------

**PART - B NON - SCHEDULE ITEMS**

1	P/F A.C or D.C electric bell 200/250 volts 70mm (2.3/4") imported	3	Nos	280	Each	840
2	P/F 10amp[ Polycarbonate flame retardant bell push with fancy base plate fixed in dia fabricated power coated metal board recessed in wall or column i/c connection.	3	Nos.	593	Each	1779
	P/F Mild steel bar fan clamp 15.8mm (5/8") dia suitable for RCC roof	6	Nos.	321	Each	1926
	S/F Distribution panel board of 3/8" thick sheeting double shutter to accommodate circuit breaker i/c painting with enameled paint	7	Sft	2408	P.Sft	16856
	P/F 1-40 watt tube light complete with 40 watt 4'-0 long rod, choke, starter and pase putty with Philips components i/c necessary electric connection and fixing on wall or ceiling etc. complete (Philips)	4	Sft	1236	P.Sft	4944
	P/F Energy saver (18 to 24 watts) superior quality i/c fixing on existing holder etc complete.	10	Nos	445	Each	4450
	P/F Hard drawn bare copper wire No.16 SWG as earth continuity conductor with any given mains or sub main in all system of wiring i/c metallic electrical accessories (1st class quality)	150	Rft	23	P.Rft	3450
	P/installing 140 CM (56") sweep ceiling fan with blade canopy standard length of down rod i/c connection with 14.0076" flexible wire complete as required with dimmer (millat,pak,asia, youns , climax,oyal)	6	Nos.	5900	Each	35400
	P/F 10amp polycarbonate flame retardant one way witch with fancy base plate fixed on die fabricated powder coated metallic board recessed in wall or column i/c connection as required (#31/2/3A Clipsal	4	Nos.	1770	Each	7080
	One Switch plate	4	Nos	410	Each	1640
	Five switch plate	2	Nos	1280	Each	2560
	Six switch plate	7	Nos	1532	Each	10724
	P/LED light 18/20 watt complete i/c cutting in false ceiling fixing of light with necessary connection i/c wiring as philips / orient etc as required.	40	Nos	4152	Each	166080
	P/ 10 amps polycarbonate flame retardant 2-pin socket unit (universal) with fancy base plate fixed on die fabricated powder coated metallic board recessed in wall or column i/c connection as required (4U Clipsal make)	4	Nos	1803	Each	7212

Name of Item.	Quantity	Rate	Unit	Amount.
---------------	----------	------	------	---------

P/F Earth Set With 2'x2' 1/4" copper plate buried in the ground at a depth of 10 feet or less (with slat and charcoal or earth chemical power) etc. making the pit 10 feet deep by excavation off all type of soil i/c fixing of 8-SWG copper wire in 3/4" G.I conduit complete in all respect as required.

1 Nos 12360 Each 12360

Exhaust fan 280mm (12") Sweep butterfly shutter or exhaust fan complete as required this rate also i/c in fitting of wall & beam upto required site fixing exhaust fan with connection & finishing the hole with cement etc complete in all respects (is class quality)

3 Nos 3114 Each 9342

Fancy capsule light complete with metallic body, glass shade, holder etc complete.

4 Nos 3361 Each 13444

Total Part "B"	=300087=
----------------	----------

Name of Item.	Quantity	Rate	Unit	Amount.
---------------	----------	------	------	---------

**(GENERAL-ABSTRACT)**

RT "A" CIVIL WORK.		Rs: 5,189,489		5716861
NON-SCHEDULE ITEM.		Rs:		238 2114811
RT "B" W/S & S/F.		Rs: 305,589		
RT "C" E.I WORK.		Rs: 355,921		
RT "C" E.I WORK. (NON-SCHEDULE ITEM).		Rs: 300087		

Total Rs. 8793369/-

Says Rs. 8793369/-

**TERMS & CONDITIONS**


A premium shall be allowed on item based on Market rates sanction by competent authority outside the schedule of rates enforced.

Nothing shall be paid for cartage of any material what so ever brought at the sight of including the material cartage from Govt: store.


Material was use in the name of work of the finish redact can be got tested from any approved Laboratory as per directed by the Executive Engineer, In charge or his representative all expenses in condition with such testing shall be born by the contractor solely without any re-embossment or claim against the Govt: on this account.


  
**CONTRACTOR**

  
**Superintendent of Police**  
 Allahyar / Member

  
**Executive Engineer**  
 Provincial Buildings Hyd/Member

  
**Senior Superintendent of Police**  
 Matiari/Member

  
**Assistant Engineer**  
 Provincial Buildings (EL) Hyd/Member

  
**Senior Superintendent of Police**  
 Jamshoro & Chairman Procurement Committee



**SENIOR SUPERINTENDENT OF POLICE  
JAMSHORO & CHAIRMAN**

*Procurement Committee*  
**DIGP CAMP OFFICE HYDERABAD**

**@**

**DIGP OFFICE HYDERABAD RANGE**

**1<sup>st</sup> Floor Shahbaz Building Hyderabad, Tel No. 022-9200093**

**BIDDING DOCUMENT**

**REPAIR/RENOVATION WORK OF DIGP**

**CAMP OFFICE HYDERABAD RANGE**

**(F.Y 2017-2018)**

issued to

**M/s**

*Wania Enterprise*



**REPAIR & RENOVATION OF DIG HOUSE HYDERABAD.**

**Schedule-B**

Name of Item.	Quantity	Rate	Unit	Amount.
<b>PART "A" CIVIL WORK.</b>				
Reinforced Cement Concrete Work including All Labour & Material Except the Cost of Steel Reinforcement & its Labour for Bending & Binding which will be paid Separately. This Rate also includes All Kinds of Forms Moulds: Lifting Shuttering, Curing, Rendering & Finishing the Exposed Surface (Including Screening & Washing of Shingle) (a) R.C Work in Roof, Slab, Beams, Columns, Rafts, Lintels & Other Structural Members Laid in Situ or Precast Laid in Position Complete in All Respects (I) Ratio (1:2:4) 90 Lbs. Cement 2 Cft, Sand 4 Cft, Shingle 1/8" to 1/4" Gauge (S.I. No:- 6 (a) (I) / P-17).	2547 Cft.	337.00	Cft.	858,339
				Rs. Three Hundred Thirty Seven.
Fabrication of Tor Bar Steel Reinforcement for Cement Concrete including Cutting, Bending, Laying in Position, Making Joints & Fastenings including Cost of Binding Wire (Also includes Removal of Rust from Bars) (S.I. No:- 8 (b) / P-17).	230.38 Cwt.	5001.70	P. Cwt.	1,152,292
				Rs. Five Thousand One Point Seventy Paiza.
3 Scraping (b) Ordinary Distemper, Oil Bound Distemper or Paint on Walls (S.I. No:- 54 (b) / P-13).	4811 Sft.	226.88	% Sft.	10,915
				Rs. Two Hundred Twenty Six Point Eighty Eight Paiza.
4 Removing Cement or Lime Plaster (S.I. No:- 53 / P-13).	4811 Sft.	121.00	% Sft.	5,821
				Rs. One Hundred Twenty One.
5 Cement Plaster 1:6 Upto 20' Feet Height (a) 1/2" Thick (S.I. No:- 13 (b) / P-52).	11530 Sft.	2206.60	% Sft.	254,421
				Rs. Two Thousand Two Hundred Six Point Sixty Paiza.
6 Cement Plaster 1:4 Upto 20' Feet Height (a) 3/8" Thick (S.I. No:- 11 (a) / P-52).	11530 Sft.	2197.52	% Sft.	253,374
				Rs. Two Thousand One Hundred Ninety Seven Point Fifty Two Paiza.
7 Preparing the Surface & Painting with Matt Finish including Rubbing the Surface with Bathy (Silicon Carbide Rubbing Brick) Filling the Voids with Zink / Chalk / Plaster of Paris Mixture, Applying First Coat Premix, Making the Surface Smooth & then Painting 3 Coats with Matt Finish of Approved Make etc Complete (New Surface) (b) 2nd & Subsequent Coats (a + b) (Three Coats) (S.I. No:- 36 (b) / P-55).	11530 Sft.	3444.38	% Sft.	397,137
				Rs. Three Thousand Four Hundred Forty Four Point Thirty Eight Paiza.
8 Preparing the Surface & Painting with Weather Coat including Rubbing the Surface with Rubbing Brick / Sand Paper, Filling the Voids with Chalk / Plaster of Paris & then Painting with Weather Coat of Approved Makee (b) 2nd & Subsequent Coat (Three Coats) (a + b) (S.I. No:- 38 (a + b) / P-56).	3732 Sft.	2567.95	% Sft.	95,836
				Rs. Two Thousand Five Hundred Sixty Seven Point Ninety Five Paiza.
9 Supplying & Fixing in Position Aluminium Channels Framing for Hinged Doors or Alcop Made with 5 MM Thick Tinted Glass Glazing (Belgium) & Alpha (Japan) Locks including Handles, Stoppers etc (b) Deluxe Model (Bronze) (S.I. No:- 83 (b) / P-108).	369 Sft.	1507.66	P. Sft.	556,327
				Rs. One Thousand Five Hundred Seven Point Sixty Six Paiza.
10 First Class Deodar Wood Wrought Joinery in Doors & Windows etc Fixed in Position including Chowkats Hold Fast Hinges, Iron Tower Bolts, Chocks Cleats, Handles & Cords with Hooks, etc Deodar Panelled or Panelled & Glazed or Fully Glazed (b) 1-3/4" Thick (Only Shutter) (S.I. No:- 7 (b) / P-58).	352 Sft.	902.93	P. Sft.	317,831
				Rs. Nine Hundred Two Point Ninety Three Paiza.

Name of Item.	Quantity	Rate	Unit	Amount.
2 Providing & Fixing G.I. Frames / Chokhats of Size 7" x 2" or 4-1/2" x 3" for Windows Using 20 Gauge G.I. Sheet including Welded Hinges & Fixing @ Site with Necessary Hold Fast, Filling with Cement Sand Slurry of Ratio 1:6 & Repairing the Jambs. The Cost also includes All Carriage, Tools & Plants Used in Making & Fixing (S.I. No:- 29 / P-93).	201 Rft.	228.90	P. Rft.	46,009
				Rs. Two Hundred Twenty Eight Point Ninety Paise.
3 Pacca Brick Work other than Building including Striking of Joints Upto 20' Feet Height in (l) (e) Cement Sand Mortar 1:6 (S.I. No:- 7 (l) (e) / P-22).	1703 Cft.	12346.65	% Cft.	210,263
				Rs. Twelve Thousand Three Hundred Forty Six Point Sixty Five Paise.
4 Cement Concrete Brick or Stone Ballast 1 1/2" to 2" Gauge (b) Ratio 1:4:8 (S.I. No:- 4 (b) / P-15).	1062 Cft.	9416.28	% Cft.	100,001
				Rs. Nine Thousand Four Hundred Sixteen Point
5 Providing & Fixing Cement Paving Blocks Flooring having Size of 197 x 97 x 60 (MM) of City / Quddra / Cobble Shape with Natural Colours, having Strength between 5000 PSI to 8500 PSI including Filling the Joints with Hill Sand & Laying in Specified Manner / Pattern & Design etc, Complete (S.I. No:- 71 / P-49).	800 Sft.	199.77	P. Sft.	159,816
				Rs. One Hundred Ninety Nine Point Seventy Seven Paise.
6 Dismantling Cement Concrete Reinforced Separating Reinfor Cement from Concrete Cleaning & Straightening the Same (S.I. No:- 20 / P-10).	894 Cft.	5445.00	% Cft.	48,678
				Rs. Five Thousand Four Hundred Forty Five.
7 (a) Removing door with chowket. (S.I. No:- 33-a / P-13).	6 Nos	142.18	P.Nos	853
				Rs. One Hundred Forty Two Rupees and Eighteen Paise.
8 (b) Removing Window and sky light with chowkets.. (S.I. No:- 33-b / P-13).	2 Nos	102.85	P.Nos	206
				Rs. One Hundred Two Rupees and Eighty Five Paise.
9 C.C.plain l/c placing compacting finishing & curring complete (l/c screening washing of stone aggregate without shuttering ratio 1:2:4 (SINO.5( c )P-15).	1062 Cft	14429.25	% Cft	153,239
				Rs. Fourteen Thousand Four Hundred Twenty Nine Rupees and Twenty Five Paise.
10 P/L 2" thick topping c.c. 1:2:4 including surface finishing and dividing into panels.(SINO.16(c) P-47)	3720 Sft	3275.50	% Sft	121,849
				Rs. Thirty Two Hundred Seventy Five Rupees and Fifty Paise.
11 Khapriel of cement concrete 12" x 8" x 1" of approved design/shape laid flat in 1:2 grey cement mortar over a bed of 3/4" thick grey cement mortar 1:2. (S.I. No:- 39 P-38).	230 Sft.	8977.90	% Sft.	20,649
				Rs. Eight Thousand Nine Hundred Seventy Seven Rupees and Ninety Paise.
12 Providing and fixing deodar wooden wardrobe including boxing with back shelves , shutters drawers and brass fittings such as handles locking arrangement, hanger rod shoe rod and mirror measuring 2' x 1' Complete as per approved design. (S.I. No:- 24 P-61).	180 Sft.	2364.63	P.Sft	425,633
				Rs. Two Thousand Three Hundred Sixty Four Rupees and Sixty Three Paise.

Total Rs: 5,189,489

Above 15%

778,423

Total Rs

5,967,912

S. No.	Name of Item.	Quantity	Rate	Unit	Amount.
2	<b>NON-SCHEDULE ITEM.</b>				
1	Providing and Fixing Ceramix Hard Floor tiles with wood texture over wall facing or floor (Size 6" x 24" x 1/2" ir above) jointed in white cement and laid over bed of 3/4" thick grey cement sand motar 1:3 washing / filling of joints with white cement etc complete in all respect.	2665 Sft	355	P.Sft	946,075
2	Providing and Fixing of Granite Marble 3/4" thick size (12"x48") redish / blackish over a bed of 3/4" cement mortar ratio 1:3 i/c rubbing and polishing of the joints etc complete in all respect also i/c chemical polish.	36 Sft	1785	P.Sft	64,260.
3	Supplying & Fixing Imported Wall Paper Fixed with adhesive solution over base of matt finish putti etc complete in all respects (First Quality)	830 Sft	305	P.Sft	253,150.
4	Supplying & Fixing of Decorative False Ceiling made of imported Gypsum Sheet 12mm Thick Fixed with M.S Suspension & Decorative Glass. (First Glass).	1089 Sft	390	P.Sft	424,710.
5	Providing & Fixing English Commode Seat i/c Glazed Flushing Cistern, Nyloon Tube etc Complete. (Porta Royal Classic Model 1st Quality or Equivalent).	5 Nos	28,500	Each	142,500.
6	Providing and Fixing Wash Basin 24"x18" i/c Padestal, C.P Waste, Syphon System, P.V.C, Waste Pipe, Bolt Kit, Nyloon Connection etc Complete (Porta Royal Classic Model 1st Quality or Equivalent).	5 Nos	32,000.	Each	160,000.
7	P/F Indian W.C. (Porta).	5 Nos	8000	Each	40,000.
8	Providing & Fixing Bath Shower Set (Wall Mounted) i/c Telephonic Shower C.P Rods etc completed.(MASTER / SONEX OR EQUIVALENT).	5 Nos	24,500	Each	122,500.

Total Rs. 2,153,195

Sr. No.	Name of Item.	Quantity	Rate	Unit	Amount.
3	<b>PART "B" W/S &amp; S/F.</b>				
1	P/F 6"x2" or 6"x3" C.I floor trap of the approved self cleaning design with a C.I screwed down gritting with or without a vent arm complete with and i/c making req: No; of holes in walls plinth & floor for pipe connection and making good in C.C 1:2:4. (SI No:20 P-6)	12 Nos:	2042.43	Each	24509 (Rs: Two Thoud: Fourty Two & Ps: Fourty Three) Only
2	P/F in position nyloon connections complete with 1/2" dia brass stop cock with pair of brass nuts and lining joints to nyloon connection. (SI No:23 P-6)	35 Nos:	447.15	Each	15650 (Rs: Four Hund: Fourty Seven & Ps: Fifteen) Only
3	P/F 4" dia C.I soil & vent pipe i/c cutting & fitting & extra painting to match the colour of the building. (SI No:1 P-9)	35 Rft	333.29	P.Rft	11665 (Rs: Three Hund: Thirty Three & Ps: Twenty Nine) Only
4	P/F M.S clamps of the approved design to 4" dia C.I pipe sockets i/c the cost of cutting & making good to wall or M.S bolts & nuts, 4" into wall i/c pipe distance pieces extra painting to match the colour of the building. (SI No:2 P-9)	30 Nos:	72.16	Each	2165 (Rs: Seventy Two & Ps: Sixteen) Only
5	P/F 4"x4" dia C.I branch of the required degree with access doors, rubber washer 3/8" thick & bolts & nuts & extra painting to match the colour of the building. (SI No:4 P-9)	15 Nos:	702.00	Each	10530 (Rs: Seventy Two ) Only
6	P/F 24"x18" lav: basin in white glazed earthen ware complete with & including the cost of W.I. Or C.I. Contilever brackets 6 inches built into walls painted white in two coats after a primary coat of red lead paint a pair of 1/2" dia chrome plated pillar taps, 1-1/2" dia rubber plug and chrome plated brass chain 1-1/4" dia malleable iron or c.p.brass traps malleable iron or brass union and making requisite No. of holes in walls, plinth and floor for pipe connection and making good in c.c. 1:2:4 ( foreign or ... ) (SINO. 10 P-4)	5 Nos.	6237.00	Each	31,185 (Rs: Six Thousand two Hundred Thirty Seven Paise) Only
7	Add extra labour for providing and fixing of earthen ware pedestal white or coloured glazed (Standard Pattern) (S.I.No. 11 P-3)	5 Nos.	2533.47	Each	12,667 (Rs: Twenty Five Hundred Thirty Three Rupees and Fourty Seven Paise ) Only
8	P/F steel sink stainless local make complete with cast iron or wrough iron bracksts 6" built in wall 1-1/2" rubber plug chorme brass chain 1-1/2" C.P brass waste with 1-1/2" plate PVC waste pipe and making requisite nof holes in walls and plinth floor for pipe connection and making good in c.c 1:2:4 (b) steel sink stainless sized 36"x18" local making (Standard pattern) S.I.No.19-b P-5	2 Each	5162.30	Each	10,325 (Rs: Five Thousand One Hundred Sixty Two Rupees and Thirty Paise ) Only
9	Providing & fixing chrome plated brass towel rail complete with brackets fixing on wooden cleats with 1" long c.p brass screws.(a) 3/4" dia round or square (Standard Pattern)(II) Towel rail 20" long (S.I.No. 4 P-7)	5 Nos:	1082.95	Each	5415 (Rs: One Thousand Eighty Two Rupees and Ninety Five Paise ) Only
10	Providing & fixing 15" x 12" bavelled edge mirror of belgium glass complete with 1/8" thick hard board and c.p screws fixed to wooden pleat.(a) Standard Pattern.(S.I.No.4 P-7)	5 Nos:	1161.60	Each	5808 (Rs: Elven Hundred Sixty One Rupees and Sixty Paise ) Only
11	S/Fixing concealed stop cock of superior quality with Crystal head 1/2" dia (SINO.14(b) P-15)	15 Each	889.46	Each	13,342 (Rs: Eight Hundred Elghty Nine Rupees and Fourty Six Paise ) Only
12	(a) S/Fixing long bib- cock of superir quality with c.p head 1/2" dia. (SINO.13 P-19)	15 Each	1109.46	Each	16,642 (Rs: Elven Hundred Nine Rupees and Fourty Six Paise ) Only

Sr. No.	Name of Item.	Quantity	Rate	Unit	Amount.
13	Supplying & Fixing jet shower with rod of superior quality single c.p head 1/2" dia (S.I.No.15 P-19)	10 Each	1142.24	Each	11,422
					(Rs: Eleven Hundred Forty Two Rupees and Twenty Four Paisa ) Only
14	Providing F.C. pressure pipe with collar (Dedex or equivalent) i/c digging the trench to required depth and fixing in position and jointing with rubber rings including testing to water pressure head of 200 feet.(b) 4" dia F.C. pressure pipe. (S.I.No.3 P-25)	320 Rft	188.44	P.Rft	60301
					(Rs: One Hundred Eighty Eight Rupees and Forty Four Paisa) Only
15	Constructing manhole for the required dia of circular sewer and 7'-9" depth with walls of B.B in cement mortar 1:3 cement plastered 1:3, 1/2" thick, inside of walls and 1" (25 mm) thick over benching and channel i/c fixing C.I manhole cover with frame of clear opening 2' x 2' (610x610 mm)	10 Nos	2524.25	P.Nos	25243
					(Rs: Twenty Five Hundred Twenty Four Rupees and Twenty Five Paisa ) Only
16	Providing, Laying uPVC Pressure Pipes of Class 'C' (equivalent make) fixing in trench i/c cutting, fitting and jointing with 'Z' joint with one rubber ring i/c testing with water to a head 91.5meter or 300 ft. 100 mm (4" dia)(S.I.No.1 P-22)	280 Rft	174.00	P.Rft	48720
					(Rs: One Hundred Seventy Four Rupees ) Only

H Pgw

Total Rs. 305,589



S. No.	Name of Item.	Quantity	Rate	Unit	Amount.
<b>Part-C Schedule Item (E.I Work)</b>					
1	Wiring for light or fan point with 3/029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required.(S.I.No.1234 P-15)	60 Nos	1,130.00	Each	67,800 <b>(Rs: Eleven Hundred Thirty Rupees Only)</b>
2	Wiring for pug point with 3/029 PVC insulated wire in 20mm (3/4") channel patti on surface as required (S.I. No. 126/P-15)	21 Nos	985.00	Each	20,685 <b>(Rs: Nine Hundred Eighty Five Rupees Only)</b>
3	Wiring for Call bell point with 3/029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required (S.I. No. 128/P-15)	3 Nos	1,764.00	Each	5,292 <b>(Rs: Seventeen Hundred Sixty Four Rupees Only)</b>
4	P/L (Main or Sub Main) PVC insulated with size 2-7/029 copper conductor in (3/4") dia PVC conduit recessed in the wall or column as required(SI No.10 P-2).	300 MTR	222.00	P.MTR	66,600 <b>(Rs: Two Hundred Twenty Two Rupees Only)</b>
5	P/L (Main or Sub Main) PVC insulated with size 2-7/044 copper conductor in (3/4") dia PVC conduit recessed in the wall or column as required (SI No. 12 P-2).	250 MTR	341.00	P.MTR	85,250 <b>(Rs: Three Hundred Forty One Rupees Only)</b>
6	P/L (Main or Sub Main) PVC insulated with size 2-7/064 copper conductor in (3/4") dia PVC conduit recessed in the wall or column as required (SI No. 14 P-2).	100 MTR	641.00	P.MTR	64,100 <b>(Rs: Six Hundred Forty One Rupees Only)</b>
7	P/F B.C Bakelite angular type bittern holder (S.I.No.1 P-14)	9 Nos	69.00	Each	621 <b>(Rs: Sixty Nine Rupees Only)</b>
8	P/F Circuit breaker 15, 20, 30, 40, 50, 60, 75 & 100amp TP (XS-100NS) on a prepared board as required. (Si-204, P-31)	13 Nos	2,456.00	Each	31,928 <b>(Rs: Twenty Four Hundred Fifty Six Rupees Only)</b>
9	Providing & Fixing 6,10,15,20,30,40,50 & 63 amp SP(TB-5S) on prepared board as required.(S.I.No.204 P-31)	4 Nos	916.00	Each	3,664 <b>(Rs: Nine Hundred Sixteen Rupees Only)</b>
10	Providing & fixing circuit breaker 15,20,30,40,50,60,75 & 100amp TP (XS-100NS) on prepared board as required.(S.I.No.207 P-31).	1 Nos	9,261.00	Each	9,261 <b>(Rs: Nine Thousand Two Hundred Sixty One Rupees Only)</b>
11	P/F Bakelite ceiling rose with two terminals (S.I.No. 228 P-33)	10 Nos	72.00	Each	720 <b>(Rs: Seventy Two Rupees Only)</b>
<b>Total Amount Part-C</b>					<b>355,921</b>

At 12/

Sr. No.	Name of Item.	Quantity	Rate	Unit	Amount.
<b>PART - B NON - SCHEDULE ITEMS</b>					
1	P/F A.C or D.C electric bell 200/250 volts 70mm (2.3/4") imported	3 Nos	740	Each	2,220.
2	P/F 10amp[ Polycarbonate flame retardant bell push with fancy base plate fixed in dia fabricated power coated metal board recessed in wall or column i/c connection.	3 Nos.	510	Each	1,530
3	P/F Mild steel bar fan clamp 15.8mm (5/8") dia suitable for RCC roof	6 Nos.	315	Each	1,890.
4	S/F Distribution panel board of 3/8" thick sheeting double shutter to accommodate circuit breaker i/c painting with enameled paint	7 Sft	2400	P.Sft	16,800.
5	P/F 1-40 watt tube light complete with 40 watt 4'-0 long rod, choke, starter and pase putty with Philips components i/c necessary electric connection and fixing on wall or ceiling etc. complete (Philips)	4 Sft	1,300	P.Sft	5,200.
6	P/F Energy saver (18 to 24 watts) superior quality i/c fixing on existing holder etc complete.	10 Nos	400	Each	4,000.
7	P/F Hard drawn bare copper wire No.16 SWG as earth continuity conductor with any given mains or sub main in all system of wiring i/c metallic electrical accessories (1st class quality)	150 Rft	20	P.Rft	3,000.
8	P/installing 140 CM (56") sweep ceiling fan with blade canopy standard length of down rod i/c connection with 14.0076" flexible wire complete as required with dimmer (millat,pak,asia, youns , climax, royal)	6 Nos.	6000	Each	36,000.
9	P/F 10amp polycarbonate flame retardant one way switch with fancy base plate fixed on die fabricated powder coated metallic board recessed in wall or column i/c connection as required (#31/2/3A Clipsal	4 Nos.	2000	Each	8,000.
	(i) One Switch plate	4 Nos	410	Each	1,640.
	(ii) Five switch plate	2 Nos	1350	Each	2,700.
	(iii) Six switch plate	7 Nos	1600	Each	11,200.
10	P/F LED light 18/20 watt complete i/c cutting in false ceiling fixing of light with necessary connection i/c testing as philips / orient etc as required.	40 Nos	4200	Each	168,000.
11	P/F 10 amps polycarbonate flame retardant 2-pin switch socket unit (universal) with fancy base plate fixed on die fabricated powder coated metallic board recessed in wall or column i/c connection as required (E-14U Clipsal make)	4 Nos	740.	Each	2,960

No.	Name of Item.	Quantity	Rate	Unit	Amount.
12	P/F Earth Set With 2'x2' 1/4" copper plate buried in the ground at a depth of 10 feet or les ( with slat and charcoal or earth chemical power) etc. making the pit 10 feet deep by excavation off all type of soil i/c fixing of 8-SWG copper wire in 3/4" G.I conduit complete in all respect as required.	1	Nos 12,400.	Each	12,000.
13	P/F Exhaust fan 280mm (12") Sweep butterfly shutter for exhaust fan complete as required this rte also i/c in cutting of wall & beam upto required site fixing exhaust fan with connection & finishing the hole with cement etc complete in all respects (is class quality)	3	Nos 3,000	Each	9,000.
14	P/F fancy capsule light complete with metallic body, glass shade, holder etc complete.	4	Nos 3,300.	Each	13,200.
<b>Total Part "B"</b>					<b>360,240</b>

Sr. No.	Name of Item.	Quantity	Rate	Unit	Amount.
---------	---------------	----------	------	------	---------

**(GENERAL - ABSTRACT)**

1	PART "A" CIVIL WORK.		Rs: 5,189,489		59,67,912
2	NON-SCHEDULE ITEM.		Rs: 2,53,195		
3	PART "B" W/S & S/F.		Rs: 305,589		
4	PART "C" E.I WORK.		Rs: 355,921		
5	PART "C" E.I WORK. (NON-SCHEDULE ITEM).		Rs: 300,240		

Total Rs. 9,082,857

Says Rs. 9,083,000

**TERMS & CONDITIONS**

\* Non premium shall be allowed on item based on Market rates sanction by competent authority outside the schedule of rates enforced.

\* Nothing shall be paid for cartage of any material what so ever brought at the sight of work including the material cartage from Govt: store.

\* The material was use in the name of work of the finish redact can be got tasted from any approved Laboratory as per directed by the Executive Engineer, In charge or his representative all expenses in condition with such testing shall be born by the contractor exclusively without any re-embossment or claim against the Govt: on this account.

**CONTRACTOR**  
**WANIA ENTERPRISES**

**Senior Superintendent of Police**  
Tando Allahyar / Member

**Executive Engineer**  
Provincial Building Hyd/Member

**Senior Superintendent of Police**  
Matiari/Member

**Assistant Engineer**  
Provincial Buildings (EL) Hyd/Member

**Senior Superintendent of Police**  
Jamshoro & Chairman Procurement Committee



**SENIOR SUPERINTENDENT OF POLICE  
JAMSHORO & CHAIRMAN**

*Procurement Committee*  
**DIGP CAMP OFFICE HYDERABAD**

**@**

**DIGP OFFICE HYDERABAD RANGE**

1<sup>st</sup> Floor Shahbaz Building Hyderabad, Tel No. 022-9200093

## **BIDDING DOCUMENT**

**REPAIR/RENOVATION WORK OF DIGP**

**CAMP OFFICE HYDERABAD RANGE**

**(F.Y 2017-2018)**

issued to

**M/s**

Malwa Enterprises Hyd

**Schedule-B**

Sr. No.	Name of Item.	Quantity	Rate	Unit	Amount.
<b>1</b>	<b>PART "A" CIVIL WORK.</b>				
1	Reinforced Cement Concrete Work including All Labour & Material Except the Cost of Steel Reinforcement & its Labour for Bending & Binding which will be paid Separately. This Rate also includes All Kinds of Forms Moulds: Lifting Shuttering, Curing, Rendering & Finishing the Exposed Surface (Including Screening & Washing of Shingle) (a) R.C Work in Roof, Slab, Beams, Columns, Rafts, Lintels & Other Structural Members Laid in Situ or Precast Laid in Position Complete in All Respects (I) Ratio (1:2:4) 90 Lbs; Cement 2 Cft, Sand 4 Cft, Shingle 1/8" to 1/4" Gauge (S.I. No:- 6 (a) (I) / P-17).	2547 Cft.	337.00	Cft.	858,339
					Rs. Three Hundred Thirty Seven.
2	Fabrication of Tor Bar Steel Reinforcement for Cement Concrete including Cutting, Bending, Laying in Position, Making Joints & Fastenings including Cost of Binding Wire (Also includes Removal of Rust from Bars) (S.I. No:- 8 (b) / P-17).	230.38 Cwt.	5001.70	P. Cwt.	1,152,292
					Rs. Five Thousand One Point Seventy Paise.
3	Scraping (b) Ordinary Distemper, Oil Bound Distemper or Paint on Walls (S.I. No:- 54 (b) / P-13).	4811 Sft.	226.88	% Sft.	10,915
					Rs. Two Hundred Twenty Six Point Eighty Eight Paise.
4	Removing Cement or Lime Plaster (S.I. No:- 53 / P-13).	4811 Sft.	121.00	% Sft.	5,821
					Rs. One Hundred Twenty One.
5	Cement Plaster 1:6 Upto 20' Feet Height (a) 1/2" Thick (S.I. No:- 13 (b) / P-52).	11530 Sft.	2206.60	% Sft.	254,421
					Rs. Two Thousand Two Hundred Six Point Sixty Paise.
6	Cement Plaster 1:4 Upto 20' Feet Height (a) 3/8" Thick (S.I. No:- 11 (a) / P-52).	11530 Sft.	2197.52	% Sft.	253,374
					Rs. Two Thousand One Hundred Ninety Seven Point Fifty Two Paise.
7	Preparing the Surface & Painting with Matt Finish including Rubbing the Surface with Bathy (Silicon Carbide Rubbing Brick) Filling the Voids with Zink / Chalk / Plaster of Paris Mixture, Applying First Coat Premix, Making the Surface Smooth & then Painting 3 Coats with Matt Finish of Approved Make etc Complete (New Surface) (b) 2nd & Subsequent Coats (a + b) (Three Coats) (S.I. No:- 36 (b) / P-55).	11530 Sft.	3444.38	% Sft.	397,137
					Rs. Three Thousand Four Hundred Forty Four Point Thirty Eight Paise.
8	Preparing the Surface & Painting with Weather Coat including Rubbing the Surface with Rubbing Brick / Sand Paper, Filling the Voids with Chalk / Plaster of Paris & then Painting with Weather Coat of Approved Makee (b) 2nd & Subsequent Coat (Three Coats) (a + b) (S.I. No:- 38 (a + b) / P-56).	3732 Sft.	2567.95	% Sft.	95,836
					Rs. Two Thousand Five Hundred Sixty Seven Point Ninety Five Paise.
9	Supplying & Fixing in Position Aluminium Channels Framing for Hinged Doors or Alcop Made with 5 MM Thick Tinted Glass Glazing (Belgium) & Alpha (Japan) Locks including Handles, Stoppers etc (b) Deluxe Model (Bronze) (S.I. No:- 83 (b) / P-108).	369 Sft.	1507.66	P. Sft.	556,327
					Rs. One Thousand Five Hundred Seven Point Sixty Six Paise.
10	Fist Class Deodar Wood Wrought Joinery in Doors & Windows etc Fixed in Position including Chowkats Hold Fast Hinges, Iron Tower Bolts, Chocks Cleats, Handles & Cords with Hooks, etc Deodar Panelled or Panelled & Glazed or Fully Glazed (b) 1-3/4" Thick (Only Shutter) (S.I. No:- 7 (b) / P-58).	352 Sft.	902.93	P. Sft.	317,831
					Rs. Nine Hundred Two Point Ninety Three Paise.



No.	Name of Item.	Quantity	Rate	Unit	Amount.
11	Providing & Fixing G.I. Frames / Chokhats of Size 7" x 2" or 4-1/2" x 3" for Windows Using 20 Gauge G.I. Sheet including Welded Hinges & Fixing @ Site with Necessary Hold Fast, Filling with Cement Sand Slurry of Ratio 1:6 & Repairing the Jambs. The Cost also includes All Carriage, Tools & Plants Used in Making & Fixing (S.I. No:- 29 / P-93).	201 Rft.	228.90	P. Rft.	46,009
					Rs. Two Hundred Twenty Eight Point Ninety Paise.
12	Pacca Brick Work other than Building including Striking of Joints Upto 20' Feet Height in (l) (e) Cement Sand Mortar 1:6 (S.I. No:- 7 (l) (e) / P-22).	1703 Cft.	12346.65	% Cft.	210,263
					Rs. Twelve Thousand Three Hundred Forty Six Point Sixty Five Paise.
13	Cement Concrete Brick or Stone Ballast 1 1/2" to 2" Gauge (b) Ratio 1:4:8 (S.I. No:- 4 (b) / P-15).	1062 Cft.	9416.28	% Cft.	100,001
					Rs. Nine Thousand Four Hundred Sixteen Point Six Paise.
14	Providing & Fixing Cement Paving Blocks Flooring having Size of 197 x 97 x 60 (MM) of City / Qudra / Cobble Shape with Natural Colours, having Strength between 5000 PSI to 8500 PSI including Filling the Joints with Hill Sand & Laying in Specified Manner / Pattern & Design etc. Complete (S.I. No:- 71 / P-49).	800 Sft.	199.77	P. Sft.	159,816
					Rs. One Hundred Ninety Nine Point Seventy Seven Paise.
15	Dismantling Cement Concrete Reinforced Separating Reinfor Cement from Concrete Cleaning & Straightening the Same (S.I. No:- 20 / P-10).	894 Cft.	5445.00	% Cft.	48,678
					Rs. Five Thousand Four Hundred Forty Five Paise.
16	(a) Removing door with chowket. (S.I. No:- 33-a / P-13).	6 Nos	142.18	P.Nos	853
					Rs. One Hundred Forty Two Rupees and Eighteen Paise.
17	(b) Removing Window and sky light with chowkets.. (S.I. No:- 33-b / P-13).	2 Nos	102.85	P.Nos	206
					Rs. One Hundred Two Rupees and Eighty Five Paise.
17	C.C.plain l/c placing compacting finishing & curring complete (l/c screening washing of stone aggregate without shuttering ratio 1:2:4 (SINO.5 (c) )P-15).	1062 Cft	14429.25	% Cft	153,239
					Rs. Fourteen Thousand Four Hundred Twenty Nine Rupees and Twenty Five Paise.
19	P/L 2" thick topping c.c. 1:2:4 including surface finishing and dividing into panels.(SINO.16(c) P-47)	3720 Sft	3275.50	% Sft	121,849
					Rs. Thirty Two Hundred Seventy Five Rupees and Fifty Paise.
20	Khapriel of cement concrete 12" x 8" x 1" of approved design/shape laid flat in 1:2 grey cement mortar over a bed of 3/4" thick grey cement mortar 1:2. (S.I. No:- 39 P-38).	230 Sft.	8977.90	% Sft.	20,649
					Rs. Eight Thousand Nine Hundred Seventy Seven Rupees and Ninety Paise.
21	Providing and fixing deodar wooden wardrobe including boxing with back shelves , shutters drawers and brass fittings such as handles locking arrangement, hanger rod shoe rod and mirror measuring 2' x 1' Complete as per approved design. (S.I. No:- 24 P-61).	180 Sft.	2364.63	P.Sft	425,633
					Rs. Two Thousand Three Hundred Sixty Four Rupees and Sixty Three Paise.

Total Rs: 5,189,489

195889 ✓

538537

51413719

5782540 / 3971629  
= 397162 ✓

107. Ad abh  
Abhshila

436879  
5189489  
195889  
975465

Total under Cost

No.	NAME OF ITEM.	Quantity	Rate	Unit	Amount.
<b>2. NON-SCHEDULE ITEM.</b>					
1	Providing and Fixing Ceramix Hard Floor tiles with wood texture over wall facing or floor (Size 6" x 24" x 1/2" ir above) jointed in white cement and laid over bed of 3/4" thick grey cement sand motar 1:3 washing / filling of joints with white cement etc complete in all respect.	2665 Sft	374	P.Sft	996710
2	Providing and Fixing of Granite Marble 3/4" thick size (12"x48") redish / blackish over a bed of 3/4" cement mortor ratio 1:3 i/c rubbing and polishing of the joints etc complete in all respect also i/c chemical polish.	36 Sft	1855	P.Sft	66780
3	Supplying & Fixing Imported Wall Paper Fixed with adhesive solution over base of matt finish putti etc complete in all respects (First Quality)	830 Sft	325	P.Sft	269750
4	Supplying & Fixing of Decorative False Ceiling made of imported Gypsum Sheet 12mm Thick Fixed with M.S Suspension & Decorative Glass. (First Glass).	1089 Sft	400	P.Sft	435600
5	Providing & Fixing English Commode Seat i/c Glazed Flushing Cistern, Nyloon Tube etc Complete. (Porta Royal Classic Model 1st Quality or Equivalent).	5 Nos	29865	Each	149325
6	Providing and Fixing Wash Basin 24"x18" i/c Padestal, C.P Waste, Syphon System, P.V.C, Waste Pipe, Bolt Kit, Nyloon Connection etc Complete (Porta Royal Classic Model 1st Quality or Equivalent).	5 Nos	26375	Each	131875
7	P/F Indian W.C. (Porta).	5 Nos	8866	Each	44330
8	Providing & Fixing Bath Shower Set (Wall Mounted) i/c Telephonic Shower C.P Rods etc completed.(MASTER / SONEX OR EQUVALENT).	5 Nos	26162	Each	130810

Total Rs. 2225180

No.	Name of Item.	Quantity	Rate	Unit	Amount.
<b>3- PART "B" W/S &amp; S/F.</b>					
1	P/F 6"x2" or 6"x3" C.I floor trap of the approved self cleaning design with a C.I screwed down gritting with or without a vent arm complete with and i/c making req: No; of holes in walls plinth & floor for pipe connection and making good in C.C 1:2:4. (SI No:20 P-6)	12 Nos:	2042.43	Each	24509
					(Rs: Two Thoud: Forty Two & Ps: Forty Three) Only
2	P/F in position nyloon connections complete with 1/2" dia brass stop cock with pair of brass nuts and lining joints to nyloon connection. (SI No:23 P-6)	35 Nos:	447.15	Each	15650
					(Rs: Four Hund: Forty Seven & Ps: Fifteen) Only
3	P/F 4" dia C.I soil & vent pipe i/c cutting & fitting & extra painting to match the colour of the building. (SI No:1 P-9)	35 Rft	333.29	P.Rft	11665
					(Rs: Three Hund: Thirty Three & Ps: Twenty Nine) Only
4	P/F M.S clamps of the approved design to 4" dia C.I pipe sockets i/c the cost of cutting & making good to wall or M.S bolts & nuts, 4" into wall i/c pipe distance pieces extra painting to match the colour of the building. (SI No:2 P-9)	30 Nos:	72.16	Each	2165
					(Rs: Seventy Two & Ps: Sixteen) Only
5	P/F 4"x4" dia C.I branch of the required degree with access doors, rubber washer 3/8" thick & bolts & nuts & extra painting to match the colour of the building. (SI No:4 P-9)	15 Nos:	702.00	Each	10530
					(Rs: Seventy Two ) Only
6	P/F 24"x18" lav: basin in white glazed earthen ware complete with & including the cost of W.I. Or C.I. Contilever brackets 6 inches built into walls painted white in two coats after a primary coat of red lead paint a pair of 1/2" dia chrome plated pillar taps, 1-1/2" dia rubber plug and chrome plated brass chain 1-1/4" dia malleable iron or c.p.brass traps malleable iron or brass union and making requisite No. of holes in walls, plinth and floor for pipe connection and making good in c.c. 1:2:4 ( foreign or	5 Nos.	6237.00	Each	31,185
					(Rs: Six Thousand two Hundred Thirty Seven Paise) Only
7	Add extra labour for providing and fixing of earthen ware pedestal white or coloured glazed (Standard Pattern) (S.I.No. 11 P-3)	5 Nos.	2533.47	Each	12,667
					(Rs: Twenty Five Hundred Thirty Three Rupees and Fourty Seven Paise ) Only
8	P/F steel sink stainless local make complete with cast iron or wrought iron bracksts 6" built in wall 1-1/2" rubber plug chrome brass chain 1-1/2" C.P brass waste with 1-1/2" plate PVC waste pipe and making requisite nof holes in walls and plinth floor for pipe connection and making good in c.c 1:2:4 (b) steel sink stainless sized 36"x18" local making (Standard pattern) S.I.No.19-b P-5	2 Each	5162.30	Each	10,325
					(Rs: Five Thousand One Hundred Sixty Two Rupees and Thirty Paise ) Only
9	Providing & fixing chrome plated brass towel rail complete with brackets fixing on wooden cleats with 1" long c.p brass screws.(a) 3/4" dia round or square (Standard Pattern)(II) Towel rail 30" long (S.I.No.1 P-7)	5 Nos:	1082.95	Each	5415
					(Rs: One Thousand Eighty Two Rupees and Ninety Five Paise ) Only
10	Providing & fixing 15" x 12" bavelled edge mirror of belgium glass complete with 1/8" thick hard board and c.p screws fixed to wooden pleat.(a) Standard Pattern.(S.I.No.4 P-7)	5 Nos:	1161.60	Each	5808
					(Rs: Elven Hundred Sixty One Rupees and Sixty Paise ) Only
11	S/Fixing concealed stop cock of superior quality with Crystal head 1/2" dia (SINO.14(b) P-15)	15 Each	889.46	Each	13,342
					(Rs: Eight Hundred Eighty Nine Rupees and Fourty Six Paise ) Only
12	(a) S/Fixing long bib- cock of superir quality with c.p head 1/2" dia. (SINO.13 P-19)	15 Each	1109.46	Each	16,642
					(Rs: Elven Hundred Nine Rupees and Fourty Six Paise ) Only

No.	name of item.	Quantity	Rate	Unit	Amount.
13	Supplying & Fixing jet shower with rod of superior quality single c.p head 1/2" dia (S.I.No.15 P-19)	10 Each	1142.24	Each	11,422
					(Rs: Eleven Hundred Forty Two Rupees and Twenty Four Paise ) Only
14	Providing F.C. pressure pipe with collar (Dedex or equivalent) i/c digging the trench to required depth and fixing in position and jointing with rubber rings including testing to water pressure head of 200 feet.(b) 4" dia F.C. pressure pipe. (S.I.No.3 P-25)	320 Rft	188.44	P.Rft	60301
					(Rs: One Hundred Eighty Eight Rupees and Forty Four Paise ) Only
15	Constructing manhole for the required dia of circular sewer and 7'-9" depth with walls of B.B in cement mortar 1:3 cement plastered 1:3, 1/2" thick, inside of walls and 1" (25 mm) thick over benching and channel i/c fixing C.I manhole cover with frame of clear opening 2' x 2' (610x610 mm)	10 Nos	2524.25	P.Nos	25243
					(Rs: Twenty Five Hundred Twenty Four Rupees and Twenty Five Paise ) Only
16	Providing, Laying uPVC Pressure Pipes of Class 'C' (equivalent make) fixing in trench i/c cutting, fitting and jointing with 'Z' joint with one rubber ring i/c testing with water to a head 91.5meter or 300 ft. 100 mm (4" dia)(S.I.No.1 P-22)	280 Rft	174.00	P.Rft	48720
					(Rs: One Hundred Seventy Four Rupees ) Only

**Total Rs. 305,589**

NO.		Quantity	Rate	Unit	Amount.
<b>Part-C Schedule Item (E.I Work)</b>					
1	Wiring for light or fan point with 3/029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required.(S.I.No.1234 P-15)	60 Nos	1,130.00	Each	67,800 <b>(Rs: Eleven Hundred Thirty Rupees Only)</b>
2	Wiring for pug point with 3/029 PVC insulated wire in 20mm (3/4") channel patti on surface as required (S.I. No. 126/P-15)	21 Nos	985.00	Each	20,685 <b>(Rs: Nine Hundred Eighty Five Rupees Only)</b>
3	Wiring for Call bell point with 3/029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required (S.I. No. 128/P-15)	3 Nos	1,764.00	Each	5,292 <b>(Rs: Seventeen Hundred Sixty Four Rupees Only)</b>
4	P/L (Main or Sub Main) PVC insulated with size 2-7/029 copper conductor in (3/4") dia PVC conduit recessed in the wall or column as required(SI No.10 P-2).	300 MTR	222.00	P.MTR	66,600 <b>(Rs: Two Hundred Twenty Two Rupees Only)</b>
5	P/L (Main or Sub Main) PVC insulated with size 2-7/044 copper conductor in (3/4") dia PVC conduit recessed in the wall or column as required (SI No. 12 P-2).	250 MTR	341.00	P.MTR	85,250 <b>(Rs: Three Hundred Forty One Rupees Only)</b>
6	P/L (Main or Sub Main) PVC insulated with size 2-7/064 copper conductor in (3/4") dia PVC conduit recessed in the wall or column as required (SI No. 14 P-2).	100 MTR	641.00	P.MTR	64,100 <b>(Rs: Six Hundred Forty One Rupees Only)</b>
7	P/F B.C Bakelite angular type bittern holder (S.I.No.1 P-14)	9 Nos	69.00	Each	621 <b>(Rs: Sixty Nine Rupees Only)</b>
8	P/F Circuit breaker 15, 20, 30, 40, 50, 60, 75 & 100amp TP (XS-100NS) on a prepared board as required. (Si-204, P-31)	13 Nos	2,456.00	Each	31,928 <b>(Rs: Twenty Four Hundred Fifty Six Rupees Only)</b>
9	Providing & Fixing 6,10,15,20,30,40,50 & 63 amp SP(TB-5S) on prepared board as required.(S.I.No.204 P-31)	4 Nos	916.00	Each	3,664 <b>(Rs: Nine Hundred Sixteen Rupees Only)</b>
10	Providing & fixing circuit breaker 15,20,30,40,50,60,75 & 100amp TP (XS-100NS) on prepared board as required.(S.I.No.207 P-31).	1 Nos	9,261.00	Each	9,261 <b>(Rs: Nine Thousand Two Hundred Sixty One Rupees Only)</b>
11	P/F Bakelite ceiling rose with two terminals (S.I.No. 228 P-33)	10 Nos	72.00	Each	720 <b>(Rs: Seventy Two Rupees Only)</b>
<b>Total Amount Part-C</b>					<b>355,921</b>

No.	Quantity	Rate	Unit	Amount.
<b>PART - B NON - SCHEDULE ITEMS</b>				
1	3 Nos	295	Each	885
2	3 Nos.	625	Each	1875
3	6 Nos.	338	Each	2028
4	7 Sft	2540	P.Sft	17780
5	4 Sft	1303	P.Sft	5212
6	10 Nos	469	Each	4690
7	150 Rft	24.26	P.Rft	3639
8	6 Nos.	6224	Each	37344
9	4 Nos.	1867	Each	7468
	(i) One Switch plate	432	Each	1728
	(ii) Five switch plate	1350	Each	2700
	(iii) Six switch plate	1616	Each	11312
10	40 Nos	4380	Each	175200
11	4 Nos	1902	Each	7608



No.	Name of Item.	Quantity	Rate	Unit	Amount.
12	P/F Earth Set With 2'x2" 1/4" copper plate buried in the ground at a depth of 10 feet or les ( with slat and charcoal or earth chemical power) etc. making the pit 10 feet deep by excavation off all type of soil i/c fixing of 8-SWG copper wire in 3/4" G.I conduit complete in all respect as required.	1	Nos 13039	Each	13039
13	P/F Exhaust fan 280mm (12") Sweep butterfly shutter for exhaust fan complete as required this rte also i/c in cutting of wall & beam upto required site fixing exhaust fan with connection & finishing the hole with cement etc complete in all respects (is class quality)	3	Nos 3285	Each	9855
14	P/F fancy capsule light complete with metallic body, glass shade, holder etc complete.	4	Nos 3545	Each	14180

Total Part "B"	₹316543 =
----------------	-----------

Sr. No.	Name of Item.	Quantity	Rate	Unit	Amount.
---------	---------------	----------	------	------	---------

**(GENERAL-ABSTRACT)**

1	PART "A" CIVIL WORK.	Rs:	5,189,489		
2	NON-SCHEDULE ITEM.	Rs:	2225180		
3	PART "B" W/S & S/F.	Rs:	305,589		
4	PART "C" E.I WORK.	Rs:	355,921		
5	PART "C" E.I WORK. (NON-SCHEDULE ITEM).	Rs:	316543		

Total Rs. 129573788985773

Says Rs. 8985773

add 17% Above 9754165  
58254

*Abidshah*

**TERMS & CONDITIONS**

- \* Non premium shall be allowed on item based on Market rates sanction by competent authority outside the schedule of rates enforced.
- \* Nothing shall be paid for cartage of any material what so ever brought at the sight of work including the material cartage from Govt: store.
- \* The material was use in the name of work of the finish redact can be got tasted from any approved Laboratory as per directed by the Executive Engineer, In charge or his representative all expenses in condition with such testing shall be born by the contractor exclusively without any re-embossment or claim against the Govt: on this account.

*Abidshah*  
**CONTRACTOR**

*[Signature]*  
**Senior Superintendent of Police**  
Tando Allahyar / Member

*[Signature]*  
**Senior Superintendent of Police**  
Matiari/Member

*[Signature]*  
**Executive Engineer**  
Provincial Building Hyd/Member

*[Signature]*  
**Assistant Engineer**  
Provincial Buildings (EL) Hyd/Member

**Senior Superintendent of Police**  
Jamshoro & Chairman Procurement Committee



**SENIOR SUPERINTENDENT OF POLICE  
JAMSHORO & CHAIRMAN**

*Procurement Committee*  
**DIGP CAMP OFFICE HYDERABAD**

**@**

**DIGP OFFICE HYDERABAD RANGE**

1<sup>st</sup> Floor Shahbaz Building Hyderabad, Tel No. 022-9200093

## **BIDDING DOCUMENT**

**REPAIR/RENOVATION WORK OF DIGP**

**CAMP OFFICE HYDERABAD RANGE**

**(F.Y 2017-2018)**

issued to

M/s VERIZONE ENTERPRISE.

**Schedule-B**

Sr. No.	Name of Item.	Quantity	Rate	Unit	Amount.
<b>1</b>	<b>PART "A" CIVIL WORK.</b>				
1	Reinforced Cement Concrete Work including All Labour & Material Except the Cost of Steel Reinforcement & its Labour for Bending & Binding which will be paid Separately. This Rate also includes All Kinds of Forms Moulds: Lifting Shuttering, Curing, Rendering & Finishing the Exposed Surface (Including Screening & Washing of Shingle) (a) R.C Work in Roof, Slab, Beams, Columns, Rafts, Lintels & Other Structural Members Laid in Situ or Precast Laid in Position Complete in All Respects (l) Ratio (1:2:4) 90 Lbs, Cement 2 Cft, Sand 4 Cft, Shingle 1/8" to 1/4" Gauge (S.I. No:- 6 (a) (l) / P-17).	2547 Cft.	337.00	Cft.	858,339
					Rs. Three Hundred Thirty Seven.
2	Fabrication of Tor Bar Steel Reinforcement for Cement Concrete including Cutting, Bending, Laying in Position, Making Joints & Fastenings including Cost of Binding Wire (Also includes Removal of Rust from Bars) (S.I. No:- 8 (b) / P-17).	230.38 Cwt.	5001.70	P. Cwt.	1,152,292
					Rs. Five Thousand One Point Seventy Paiza.
3	Scraping (b) Ordinary Distemper, Oil Bound Distemper or Paint on Walls (S.I. No:- 54 (b) / P-13).	4811 Sft.	226.88	% Sft.	10,915
					Rs. Two Hundred Twenty Six Point Eighty Eight Paiza.
4	Removing Cement or Lime Plaster (S.I. No:- 53 / P-13).	4811 Sft.	121.00	% Sft.	5,821
					Rs. One Hundred Twenty One.
5	Cement Plaster 1:6 Upto 20' Feet Height (a) 1/2" Thick (S.I. No:- 13 (b) / P-52).	11530 Sft.	2206.60	% Sft.	254,421
					Rs. Two Thousand Two Hundred Six Point Sixty Paiza.
6	Cement Plaster 1:4 Upto 20' Feet Height (a) 3/8" Thick (S.I. No:- 11 (a) / P-52).	11530 Sft.	2197.52	% Sft.	253,374
					Rs. Two Thousand One Hundred Ninety Seven Point Fifty Two Paiza.
7	Preparing the Surface & Painting with Matt Finish including Rubbing the Surface with Bathy (Silicon Carbide Rubbing Brick) Filling the Voids with Zink / Chalk / Plaster of Paris Mixture, Applying First Coat Premix, Making the Surface Smooth & then Painting 3 Coats with Matt Finish of Approved Make etc Complete (New Surface) (b) 2nd & Subsequent Coats (a + b) (Three Coats) (S.I. No:- 36 (b) / P-55).	11530 Sft.	3444.38	% Sft.	397,137
					Rs. Three Thousand Four Hundred Forty Four Point Thirty Eight Paiza.
8	Preparing the Surface & Painting with Weather Coat including Rubbing the Surface with Rubbing Brick / Sand Paper, Filling the Voids with Chalk / Plaster of Paris & then Painting with Weather Coat of Approved Makee (b) 2nd & Subsequent Coat (Three Coats) (a + b) (S.I. No:- 38 (a + b) / P-56).	3732 Sft.	2567.95	% Sft.	95,836
					Rs. Two Thousand Five Hundred Sixty Seven Point Ninety Five Paiza.
9	Supplying & Fixing in Position Aluminium Channels Framing for Hinged Doors or Alcop Made with 5 MM Thick Tinted Glass Glazing (Belgium) & Alpha (Japan) Locks including Handles, Stoppers etc (b) Deluxe Model (Bronze) (S.I. No:- 83 (b) / P-108).	369 Sft.	1507.66	P. Sft.	556,327
					Rs. One Thousand Five Hundred Seven Point Sixty Six Paiza.
10	Fist Class Deodar Wood Wrought Joinery in Doors & Windows etc Fixed in Position including Chowkats Hold Fast Hinges, Iron Tower Bolts, Chocks Cleats, Handles & Cords with Hooks, etc Deodar Panelled or Panelled & Glazed or Fully Glazed (b) 1-3/4" Thick (Only Shutter) (S.I. No:- 7 (b) / P-58).	352 Sft.	902.93	P. Sft.	317,831
					Rs. Nine Hundred Two Point Ninety Three Paiza.

11	Providing & Fixing G.I. Frames / Chokhats of Size 7" x 2" or 4-1/2" x 3" for Windows Using 20 Gauge G.I. Sheet including Welded Hinges & Fixing @ Site with Necessary Hold Fast, Filling with Cement Sand Slurry of Ratio 1:6 & Repairing the Jambs. The Cost also includes All Carriage, Tools & Plants Used in Making & Fixing (S.I. No:- 29 / P-93).	201 Ktl.	220.90	P. Ktl.	40,000
		Rs. Two Hundred Twenty Eight Point Ninety		Paisa.	
12	Pacca Brick Work other than Building including Striking of Joints Upto 20' Feet Height in (l) (e) Cement Sand Mortar 1:6 (S.I. No:- 7 (l) (e) / P-22).	1703 Cft.	12346.65	% Cft.	210,263
		Rs. Twelve Thousand Three Hundred Forty Six		Point Sixty Five Paisa.	
13	Cement Concrete Brick or Stone Ballast 1 1/2" to 2" Gauge (b) Ratio 1:4:8 (S.I. No:- 4 (b) / P-15).	1062 Cft.	9416.28	% Cft.	100,001
		Rs. Nine Thousand Four Hundred Sixteen Point		Twenty Eight Paisa.	
14	Providing & Fixing Cement Paving Blocks Flooring having Size of 197 x 97 x 60 (MM) of City / Quddra / Cobble Shape with Natural Colours, having Strength between 5000 PSI to 8500 PSI including Filling the Joints with Hill Sand & Laying in Specified Manner / Pattern & Design etc, Complete (S.I. No:- 71 / P-49).	800 Sft.	199.77	P. Sft.	159,816
		Rs. One Hundred Ninety Nine Point Seventy		Seven Paisa.	
15	Dismantling Cement Concrete Reinforced Separating Reinfor Cement from Concrete Cleaning & Straightening the Same (S.I. No:- 20 / P-10).	894 Cft.	5445.00	% Cft.	48,678
		Rs. Five Thousand Four Hundred Forty Five.			
16	(a) Removing door with chowket. (S.I. No:- 33-a / P-13).	6 Nos	142.18	P.Nos	853
		Rs. One Hundred Forty Two Rupees and		Eighteen Paisa.	
17	(b) Removing Window and sky light with chowkets.. (S.I. No:- 33-b / P-13).	2 Nos	102.85	P.Nos	206
		Rs. One Hundred Two Rupees and Eighty Five		Paisa.	
17	C.C.plain l/c placing compacting finishing & curring complete (l/c screening washing of stone aggregate without shuttering ratio 1:2:4 (SINO.5(c) )P-15).	1062 Cft	14429.25	% Cft	153,239
		Rs. Fourteen Thousand Four Hundred Twenty		Nine Rupees and Twenty Five Paisa.	
19	P/L 2" thick topping c.c. 1:2:4 including surface finishing and dividing into panels.(SINO.16(c) P-47)	3720 Sft	3275.50	% Sft	121,849
		Rs. Thirty Two Hundred Seventy Five Rupees		and Fifty Paisa.	
20	Khapriel of cement concrete 12" x 8" x 1" of approved design/shape laid flat in 1:2 grey cement mortar over a bed of 3/4" thick grey cement mortar 1:2. (S.I. No:- 39 P-38).	230 Sft.	8977.90	% Sft.	20,649
		Rs. Eight Thousand Nine Hundred Seventy		Seven Rupees and Ninety Paisa.	
21	Providing and fixing deodar wooden wardrobe including boxing with back shelves , shutters drawers and brass fittings such as handles locking arrangement, hanger rod shoe rod and mirror measuring 2' x 1' Complete as per approved design. (S.I. No:- 24 P-61).	180 Sft.	2364.63	P.Sft	425,633
		Rs. Two Thousand Three Hundred Sixty Four		Rupees and Sixty Three Paisa.	

Total Rs: 5,189,489

18% ABOVE

+ 934,168

Total

6,123,597

No.	NAME OF ITEM.	QUANTITY	RATE	UNIT	AMOUNT.
2	<b><u>NON-SCHEDULE ITEM.</u></b>				
1	Providing and Fixing Ceramix Hard Floor tiles with wood texture over wall facing or floor (Size 6" x 24" x 1/2" or above) jointed in white cement and laid over bed of 3/4" thick grey cement sand mortar 1:3 washing / filling of joints with white cement etc complete in all respect.	2665 Sft	400.	P.Sft	1066000.
2	Providing and Fixing of Granite Marble 3/4" thick size (12"x48") redish / blackish over a bed of 3/4" cement mortar ratio 1:3 i/c rubbing and polishing of the joints etc complete in all respect also i/c chemical polish.	36 Sft	1800.	P.Sft	64800.
3	Supplying & Fixing Imported Wall Paper Fixed with adhesive solution over base of matt finish putti etc complete in all respects (First Quality)	830 Sft	300	P.Sft	249000
4	Supplying & Fixing of Decorative False Ceiling made of imported Gypsum Sheet 12mm Thick Fixed with M.S Suspension & Decorative Glass. (First Glass).	1089 Sft	400	P.Sft	435600.
5	Providing & Fixing English Commode Seat i/c Glazed Flushing Cistern, Nyloon Tube etc Complete. (Porta Royal Classic Model 1st Quality or Equivalent).	5 Nos	28500	Each	142500.
6	Providing and Fixing Wash Basin 24"x18" i/c Pedestal, C.P Waste, Syphon System, P.V.C, Waste Pipe, Bolt Kit, Nyloon Connection etc Complete (Porta Royal Classic Model 1st Quality or Equivalent).	5 Nos	32000	Each	165000.
7	P/F Indian W.C. (Porta).	5 Nos	8200	Each	41000.
8	Providing & Fixing Bath Shower Set (Wall Mounted) i/c Telephonic Shower C.P Rods etc completed.(MASTER / SONEX OR EQUIVALENT).	5 Nos	24800.	Each	124000.

Total Rs. 2287800.



Sr. No.	Name of Item.	Quantity	Rate	Unit	Value
3	<b>PART "B" W/S &amp; S/F.</b>				
1	P/F 6"x2" or 6"x3" C.I floor trap of the approved self cleaning design with a C.I screwed down gritting with or without a vent arm complete with and i/c making req: No; of holes in walls plinth & floor for pipe connection and making good in C.C 1:2:4. (SI No:20 P-6)	12 Nos:	2042.43	Each	24509
			(Rs: Two Thoud: Fourty Two & Ps: Fourty Three) Only		
2	P/F in position nyloon connections complete with 1/2" dia brass stop cock with pair of brass nuts and lining joints to nyloon connection. (SI No:23 P-6)	35 Nos:	447.15	Each	15650
			(Rs: Four Hund: Fourty Seven & Ps: Fifteen) Only		
3	P/F 4" dia C.I soil & vent pipe i/c cutting & fitting & extra painting to match the colour of the building. (SI No:1 P-9)	35 Rft	333.29	P.Rft	11665
			(Rs: Three Hund: Thirty Three & Ps: Twenty Nine) Only		
4	P/F M.S clamps of the approved design to 4" dia C.I pipe sockets i/c the cost of cutting & making good to wall or M.S bolts & nuts, 4" into wall i/c pipe distance pieces extra painting to match the colour of the building. (SI No:2 P-9)	30 Nos:	72.16	Each	2165
			(Rs: Seventy Two & Ps: Sixteen) Only		
5	P/F 4"x4" dia C.I branch of the required degree with access doors, rubber washer 3/8" thick & bolts & nuts & extra painting to match the colour of the building. (SI No:4 P-9)	15 Nos:	702.00	Each	10530
			(Rs: Seventy Two ) Only		
6	P/F 24"x18" lav: basin in white glazed earthen ware complete with & including the cost of W.I. Or C.I. Contilever brackets 6 inches built into walls painted white in two coats after a primary coat of red lead paint a pair of 1/2" dia chrome plated pillar taps, 1-1/2" dia rubber plug and chrome plated brass chain 1-1/4" dia malleable iron or c.p.brass traps malleable iron or brass union and making requisite No. of holes in walls, plinth and floor for pipe connection and making good in c.c. 1:2:4 ( foreign or	5 Nos.	6237.00	Each	31,185
			(Rs: Six Thousand two Hundred Thirty Seven Paisa) Only		
7	Add extra labour for providing and fixing of earthen ware pedestal white or coloured glazed (Standard Pattern) (S.I.No. 11 P-3)	5 Nos.	2533.47	Each	12,667
			(Rs: Twenty Five Hundred Thirty Three Rupees and Fourty Seven Paisa ) Only		
8	P/F steel sink stainless local make complete with cast iron or wrough iron bracksts 6" built in wall 1-1/2" rubber plug chorme brass chain 1-1/2" C.P brass waste with 1-1/2" plate PVC waste pipe and making requisite nof holes in walls and plinth floor for pipe connection and making good in c.c 1:2:4 (b) steel sink stainless sized 36"x18" local making (Standard pattern) S.I.No.19-b P-5	2 Each	5162.30	Each	10,325
			(Rs: Five Thousand One Hundred Sixty Two Rupees and Thirty Paisa ) Only		
9	Providing & fixing chrome plated brass towel rail complete with brackets fixing on wooden cleats with 1" long c.p brass screws.(a) 3/4" dia round or square (Standard Pattern)(II) Towel rail 20" long (S.I.No.1 P-7)	5 Nos:	1082.95	Each	5415
			(Rs: One Thousand Eighty Two Rupees and Ninety Five Paisa ) Only		
10	Providing & fixing 15" x 12" bavelled edge mirror of belgium glass complete with 1/8" thick hard board and c.p screws fixed to wooden pleat.(a) Standard Pattern.(S.I.No.4 P-7)	5 Nos:	1161.60	Each	5808
			(Rs: Elven Hundred Sixty One Rupees and Sixty Paisa ) Only		
11	S/Fixing concealed stop cock of superior quality with Crystal head 1/2" dia (SINO.14(b) P-15)	15 Each	889.46	Each	13,342
			(Rs: Eight Hundred Eighty Nine Rupees and Fourty Six Paisa ) Only		
12	(a) S/Fixing long bib- cock of superir quality with c.p head 1/2" dia. (SINO.13 P-19)	15 Each	1109.46	Each	16,642
			(Rs: Elven Hundred Nine Rupees and Fourty Six Paisa ) Only		

No.	DESCRIPTION OF WORK	QTY	UNIT	AMOUNT	UNIT	AMOUNT
13	Supplying & Fixing jet shower with rod of superior quality single c.p head 1/2" dia (S.I.No.15 P-19)	10	Each	1142.24	Each	11,422
				(Rs: Eleven Hundred Forty Two Rupees and Twenty Four Paise ) Only		
14	Providing F.C. pressure pipe with collar (Dedex or equivalent) i/c digging the trench to required depth and fixing in position and jointing with rubber rings including testing to water pressure head of 200 feet.(b) 4" dia F.C. pressure pipe. (S.I.No.3 P-25)	320	Rft	188.44	P.Rft	60301
				(Rs: One Hundred Eighty Eight Rupees and Forty Four Paise) Only		
15	Constructing manhole for the required dia of circular sewer and 7'-9" depth with walls of B.B in cement mortar 1:3 cement plastered 1:3, 1/2" thick, inside of walls and 1" (25 mm) thick over benching and channel i/c fixing C.I manhole cover with frame of clear opening 2' x 2' (610x610 mm)	10	Nos	2524.25	P.Nos	25243
				(Rs: Twenty Five Hundred Twenty Four Rupees and Twenty Five Paise ) Only		
16	Providing, Laying uPVC Pressure Pipes of Class 'C' (equivalent make) fixing in trench i/c cutting, fitting and jointing with 'Z' joint with one rubber ring i/c testing with water to a head 91.5meter or 300 ft. 100 mm (4" dia)(S.I.No.1 P-22)	280	Rft	174.00	P.Rft	48720
				(Rs: One Hundred Seventy Four Rupees ) Only		

*At Rgn*

**Total Rs. 305,589**

No.	Name of Item.	Quantity	Rate	Unit	Amount.
<b>Part-C Schedule Item (E.I Work)</b>					
1	Wiring for light or fan point with 3/029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required.(S.I.No.1234 P-15)	60 Nos	1,130.00	Each	67,800 <b>(Rs: Eleven Hundred Thirty Rupees Only)</b>
2	Wiring for pug point with 3/029 PVC insulated wire in 20mm (3/4") channel pattl on surface as required (S.I. No. 126/P-15)	21 Nos	985.00	Each	20,685 <b>(Rs: Nine Hundred Eighty Five Rupees Only)</b>
3	Wiring for Call bell point with 3/029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required (S.I. No. 128/P-15)	3 Nos	1,764.00	Each	5,292 <b>(Rs: Seventeen Hundred Sixty Four Rupees Only)</b>
4	P/L (Main or Sub Main) PVC insulated with size 2-7/029 copper conductor in (3/4") dia PVC conduit recessed in the wall or column as required(SI No.10 P-2).	300 MTR	222.00	P.MTR	66,600 <b>(Rs: Two Hundred Twenty Two Rupees Only)</b>
5	P/L (Main or Sub Main) PVC insulated with size 2-7/044 copper conductor in (3/4") dia PVC conduit recessed in the wall or column as required (SI No. 12 P-2).	250 MTR	341.00	P.MTR	85,250 <b>(Rs: Three Hundred Forty One Rupees Only)</b>
6	P/L (Main or Sub Main) PVC insulated with size 2-7/064 copper conductor in (3/4") dia PVC conduit recessed in the wall or column as required (SI No. 14 P-2).	100 MTR	641.00	P.MTR	64,100 <b>(Rs: Six Hundred Forty One Rupees Only)</b>
7	P/F B.C Bakelite angular type bittern holder (S.I.No.1 P-14)	9 Nos	69.00	Each	621 <b>(Rs: Sixty Nine Rupees Only)</b>
8	P/F Circuit breaker 15, 20, 30, 40, 50, 60, 75 & 100amp TP (XS-100NS) on a prepared board as required. (SI-204, P-31)	13 Nos	2,456.00	Each	31,928 <b>(Rs: Twenty Four Hundred Fifty Six Rupees Only)</b>
9	Providing & Fixing 6,10,15,20,30,40,50 & 63 amp SP(TB-5S) on prepared board as required.(S.I.No.204 P-31)	4 Nos	916.00	Each	3,664 <b>(Rs: Nine Hundred Sixteen Rupees Only)</b>
10	Providing & fixing circuit breaker 15,20,30,40,50,60,75 & 100amp TP (XS-100NS) on prepared board as required.(S.I.No.207 P-31).	1 Nos	9,261.00	Each	9,261 <b>(Rs: Nine Thousand Two Hundred Sixty One Rupees Only)</b>
11	P/F Bakelite ceiling rose with two terminals (S.I.No. 228 P-33)	10 Nos	72.00	Each	720 <b>(Rs: Seventy Two Rupees Only)</b>
<b>Total Amount Part-C</b>					<b>355,921</b>

*At Pgw*

**PART - B NON - SCHEDULE ITEMS**

1	P/F A.C or D.C electric bell 200/250 volts 70mm (2.3/4") imported	3	Nos	750.	Each	2250.
2	P/F 10amp Polycarbonate flame retardant bell push with fancy base plate fixed in dia fabricated power coated metal board recessed in wall or column i/c connection.	3	Nos.	520	Each	1560.
3	P/F Mild steel bar fan clamp 15.8mm (5/8") dia suitable for RCC roof	6	Nos.	305	Each	1830.
4	S/F Distribution panel board of 3/8" thick sheeting double shutter to accommodate circuit breaker i/c painting with enameled paint	7	Sft	2300	P.Sft	16100.
5	P/F 1-40 watt tube light complete with 40 watt 4'-0 long rod, choke, starter and pase putty with Philips components i/c necessary electric connection and fixing on wall or ceiling etc. complete (Philips)	4	Sft	1400.	P.Sft	5600.
6	P/F Energy saver (18 to 24 watts) superior quality i/c fixing on existing holder etc complete.	10	Nos	560	Each	5600.
7	P/F Hard drawn bare copper wire No.16 SWG as earth continuity conductor with any given mains or sub main in all system of wiring i/c metallic electrical accessories (1st class quality)	150	Rft	28	P.Rft	4200.
8	P/installing 140 CM (56") sweep ceiling fan with blade canopy standard length of down rod i/c connection with 14.0076" flexible wire complete as required with dimmer (millat,pak,asia, youns , climax, royal)	6	Nos.	6300.	Each	37800.
9	P/F 10amp polycarbonate flame retardant one way switch with fancy base plate fixed on die fabricated powder coated metallic board recessed in wall or column i/c connection as required (#31/2/3A Clipsal	4	Nos.	1900.	Each	7600.
	(i) One Switch plate	4	Nos	408	Each	1632.
	(ii) Five switch plate	2	Nos	1400	Each	2800.
	(iii) Six switch plate	7	Nos	1800	Each	12600.
10	P/F LED light 18/20 watt complete i/c cutting in false ceiling fixing of light with necessary connection i/c testing as philips / orient etc as required.	40	Nos	4400	Each	176000.
11	P/F 10 amps polycarbonate flame retardant 2-pin switch socket unit (universal) with fancy base plate fixed on die fabricated powder coated metallic board recessed in wall or column i/c connection as required (E-14U Clipsal make)	4	Nos	760	Each	3040.

No.	name of item.	Quantity	Rate	Unit	Amount.
12	P/F Earth Set With 2'x2' 1/4" copper plate buried in the ground at a depth of 10 feet or les ( with slat and charcoal or earth chemical power) etc. making the pit 10 feet deep by excavation off all type of soil i/c fixing of 8-SWG copper wire in 3/4" G.I conduit complete in all respect as required.	1	Nos 11000	Each	11000.
13	P/F Exhaust fan 280mm (12") Sweep butterfly shutter for exhaust fan complete as required this rte also i/c in cutting of wall & beam upto required site fixing exhaust fan with connection & finishing the hole with cement etc complete in all respects (is class quality)	3	Nos 3300	Each	9900.
14	P/F fancy capsule light complete with metallic body, glass shade, holder etc complete.	4	Nos 3400	Each	13600.
Total Part "B"					312500.

No. |

(GENERAL-ABSTRACT)

1 PART "A" CIVIL WORK.	Rs: 6123597 <del>5169489</del>
2 NON-SCHEDULE ITEM.	Rs: 2287960
3 PART "B" W/S & S/F.	Rs: 305,589
4 PART "C" E.I WORK.	Rs: 355,921
5 PART "C" E.I WORK. (NON-SCHEDULE ITEM).	Rs: 312512.

Total Rs. 93,85,519

Says Rs. 93,86,000.

**TERMS & CONDITIONS**

- \* Non premium shall be allowed on item based on Market rates sanction by competent authority outside the schedule of rates enforced.
- \* Nothing shall be paid for cartage of any material what so ever brought at the sight of work including the material cartage from Govt: store.
- \* The material was use in the name of work of the finish redact can be got tasted from any approved Laboratory as per directed by the Executive Engineer, In charge or his representative all expenses in condition with such testing shall be born by the contractor exclusively without any re-embossment or claim against the Govt: on this account.

**VERIZON Enterprises**

*Sajid*  
CONTRACTOR  
VERIZON  
Enterprises

*[Signature]*  
**Senior Superintendent of Police**  
Tando Allahyar / Member

*[Signature]*  
**Senior Superintendent of Police**  
Matiari/Member

*[Signature]*  
**Executive Engineer**  
Provincial Building Hyd/Member

*[Signature]*  
**Assistant Engineer**  
Provincial Buildings (EL) Hyd/Member

*[Signature]*  
**Senior Superintendent of Police**  
Jamshoro & Chairman Procurement Committee





**SENIOR SUPERINTENDENT OF POLICE  
JAMSHORO & CHAIRMAN**

*Procurement Committee*  
**DIGP CAMP OFFICE HYDERABAD**

**@**

**DIGP OFFICE HYDERABAD RANGE**

1<sup>st</sup> Floor Shahbaz Building Hyderabad, Tel No. 022-9200093

## **BIDDING DOCUMENT**

**REPAIR/RENOVATION WORK OF DIGP**

**CAMP OFFICE HYDERABAD RANGE**

**(F.Y 2017-2018)**

issued to

**M/s** AL-ASR C.

**Schedule-B**

Sr. No.	Name of Item.	Quantity	Rate	Unit	Amount.
<b>1 PART "A" CIVIL WORK.</b>					
1	Reinforced Cement Concrete Work including All Labour & Material Except the Cost of Steel Reinforcement & its Labour for Bending & Binding which will be paid Separately. This Rate also includes All Kinds of Forms Moulds: Lifting Shuttering, Curing, Rendering & Finishing the Exposed Surface (Including Screening & Washing of Shingle) (a) R.C Work in Roof, Slab, Beams, Columns, Rafts, Lintels & Other Structural Members Laid in Situ or Precast Laid in Position Complete in All Respects (l) Ratio (1:2:4) 90 Lbs. Cement 2 Cft, Sand 4 Cft, Shingle 1/8" to 1/4" Gauge (S.I. No:- 6 (a) (l) / P-17).	2547 Cft.	337.00	Cft.	858,339 Rs. Three Hundred Thirty Seven.
2	Fabrication of Tor Bar Steel Reinforcement for Cement Concrete including Cutting, Bending, Laying in Position, Making Joints & Fastenings including Cost of Binding Wire (Also includes Removal of Rust from Bars) (S.I. No:- 8 (b) / P-17).	230.38 Cwt.	5001.70	P. Cwt.	1,152,292 Rs. Five Thousand One Point Seventy Paise.
3	Scraping (b) Ordinary Distemper, Oil Bound Distemper or Paint on Walls (S.I. No:- 54 (b) / P-13).	4811 Sft.	226.88	% Sft.	10,915 Rs. Two Hundred Twenty Six Point Eighty Eight Paise.
4	Removing Cement or Lime Plaster (S.I. No:- 53 / P-13).	4811 Sft.	121.00	% Sft.	5,821 Rs. One Hundred Twenty One.
5	Cement Plaster 1:6 Upto 20' Feet Height (a) 1/2" Thick (S.I. No:- 13 (b) / P-52).	11530 Sft.	2206.60	% Sft.	254,421 Rs. Two Thousand Two Hundred Six Point Sixty Paise.
6	Cement Plaster 1:4 Upto 20' Feet Height (a) 3/8" Thick (S.I. No:- 11 (a) / P-52).	11530 Sft.	2197.52	% Sft.	253,374 Rs. Two Thousand One Hundred Ninety Seven Point Fifty Two Paise.
7	Preparing the Surface & Painting with Matt Finish including Rubbing the Surface with Bathy (Silicon Carbide Rubbing Brick) Filling the Voids with Zink / Chalk / Plaster of Paris Mixture, Applying First Coat Premix, Making the Surface Smooth & then Painting 3 Coats with Matt Finish of Approved Make etc Complete (New Surface) (b) 2nd & Subsequent Coats (a + b) (Three Coats) (S.I. No:- 36 (b) / P-55).	11530 Sft.	3444.38	% Sft.	397,137 Rs. Three Thousand Four Hundred Forty Four Point Thirty Eight Paise.
8	Preparing the Surface & Painting with Weather Coat including Rubbing the Surface with Rubbing Brick / Sand Paper, Filling the Voids with Chalk / Plaster of Paris & then Painting with Weather Coat of Approved Makee (b) 2nd & Subsequent Coat (Three Coats) (a + b) (S.I. No:- 38 (a + b) / P-56).	3732 Sft.	2567.95	% Sft.	95,836 Rs. Two Thousand Five Hundred Sixty Seven Point Ninety Five Paise.
9	Supplying & Fixing in Position Aluminium Channels Framing for Hinged Doors or Alcop Made with 5 MM Thick Tinted Glass Glazing (Belgium) & Alpha (Japan) Locks including Handles, Stoppers etc (b) Deluxe Model (Bronze) (S.I. No:- 83 (b) / P-108).	369 Sft.	1507.66	P. Sft.	556,327 Rs. One Thousand Five Hundred Seven Point Sixty Six Paise.
10	Fist Class Deodar Wood Wrought Joinery in Doors & Windows etc Fixed in Position including Chowkats Hold Fast Hinges, Iron Tower Bolts, Chocks Cleats, Handles & Cords with Hooks, etc Deodar Panelled or Panelled & Glazed or Fully Glazed (b) 1-3/4" Thick (Only Shutter) (S.I. No:- 7 (b) / P-58).	352 Sft.	902.93	P. Sft.	317,831 Rs. Nine Hundred Two Point Ninety Three Paise.

No.	NAME OF WORK				
11	Providing & Fixing G.I. Frames / Chokhats of Size 7" x 2" or 4-1/2" x 3" for Windows Using 20 Gauge G.I. Sheet including Welded Hinges & Fixing @ Site with Necessary Hold Fast, Filling with Cement Sand Slurry of Ratio 1:6 & Repairing the Jambs. The Cost also includes All Carriage, Tools & Plants Used in Making & Fixing (S.I. No:- 29 / P-93).	201 Rft.	228.90	P. Rft.	46,009
				Rs. Two Hundred Twenty Eight Point Ninety Paise.	
12	Pacca Brick Work other than Building including Striking of Joints Upto 20' Feet Height in (I) (e) Cement Sand Mortar 1:6 (S.I. No:- 7 (I) (e) / P-22).	1703 Cft.	12346.65	% Cft.	210,263
				Rs. Twelve Thousand Three Hundred Forty Six Point Sixty Five Paise.	
13	Cement Concrete Brick or Stone Ballast 1 1/2" to 2" Gauge (b) Ratio 1:4:8 (S.I. No:- 4 (b) / P-15).	1062 Cft.	9416.28	% Cft.	100,001
				Rs. Nine Thousand Four Hundred Sixteen Point Sixty Paise.	
14	Providing & Fixing Cement Paving Blocks Flooring having Size of 197 x 97 x 60 (MM) of City / Quddra / Cobble Shape with Natural Colours, having Strength between 5000 PSI to 8500 PSI including Filling the Joints with Hill Sand & Laying in Specified Manner / Pattern & Design etc, Complete (S.I. No:- 71 / P-49).	800 Sft.	199.77	P. Sft.	159,816
				Rs. One Hundred Ninety Nine Point Seventy Seven Paise.	
15	Dismantling Cement Concrete Reinforced Separating Reinfor Cement from Concrete Cleaning & Straightening the Same (S.I. No:- 20 / P-10).	894 Cft.	5445.00	% Cft.	48,678
				Rs. Five Thousand Four Hundred Forty Five.	
16	(a) Removing door with chowket. (S.I. No:- 33-a / P-13).	6 Nos	142.18	P.Nos	853
				Rs. One Hundred Forty Two Rupees and Eighteen Paise.	
17	(b) Removing Window and sky light with chowkets.. (S.I. No:- 33-b / P-13).	2 Nos	102.85	P.Nos	206
				Rs. One Hundred Two Rupees and Eighty Five Paise.	
17	C.C.plain l/c placing compacting finishing & curing complete (l/c screening washing of stone aggregate without shuttering ratio 1:2:4 (SINO.5 (c) P-15).	1062 Cft	14429.25	% Cft	153,239
				Rs. Fourteen Thousand Four Hundred Twenty Nine Rupees and Twenty Five Paise.	
19	P/L 2" thick topping c.c. 1:2:4 including surface finishing and dividing into panels.(SINO.16(c) P-47)	3720 Sft	3275.50	% Sft	121,849
				Rs. Thirty Two Hundred Seventy Five Rupees and Fifty Paise.	
20	Khapriel of cement concrete 12" x 8" x 1" of approved design/shape laid flat in 1:2 grey cement mortar over a bed of 3/4" thick grey cement mortar 1:2. (S.I. No:- 39 P-38).	230 Sft.	8977.90	% Sft.	20,649
				Rs. Eight Thousand Nine Hundred Seventy Seven Rupees and Ninety Paise.	
21	Providing and fixing deodar wooden wardrobe including boxing with back shelves , shutters drawers and brass fittings such as handles locking arrangement, hanger rod shoe rod and mirror measuring 2' x 1' Complete as per approved design. (S.I. No:- 24 P-61).	180 Sft.	2364.63	P.Sft	425,633
				Rs. Two Thousand Three Hundred Sixty Four Rupees and Sixty Three Paise.	

Total Rs: 5,189,489

Add 15% abason Jan 179745  
 Add 10% abason 28/11/14 11,14 395548  
5764782  
 18

No.

**2 NON-SCHEDULE ITEM.**

1	Providing and Fixing Ceramix Hard Floor tiles with wood texture over wall facing or floor (Size 6" x 24" x 1/2" ir above) jointed in white cement and laid over bed of 3/4" thick grey cement sand motar 1:3 washing / filling of joints with white cement etc complete in all respect.	2665 Sft	420	P.Sft	1135290
2	Providing and Fixing of Granite Marble 3/4" thick size (12"x48") redish / blackish over a bed of 3/4" cement mortar ratio 1:3 i/c rubbing and polishing of the joints etc complete in all respect also i/c chemical polish.	36 Sft	1882	P.Sft	67752
3	Supplying & Fixing Imported Wall Paper Fixed with adhesive solution over base of matt finish putti etc complete in all respects (First Quality)	830 Sft	330	P.Sft	273900
4	Supplying & Fixing of Decorative False Ceiling made of imported Gypsum Sheet 12mm Thick Fixed with M.S Suspension & Decorative Glass. (First Glass).	1089 Sft	406	P.Sft	442134
5	Providing & Fixing English Commode Seat i/c Glazed Flushing Cistern, Nyloon Tube etc Complete. (Porta Royal Classic Model 1st Quality or Equavalent).	5 Nos	30290	Each	151450
6	Providing and Fixing Wash Basin 24"x18" i/c Padestal, C.P Waste, Syphon System, P.V.C, Waste Pipe, Bolt Kit, Nyloon Connection etc Complete (Porta Royal Classic Model 1st Quality or Equavalent).	5 Nos	26750	Each	133750
7	P/F Indian W.C. (Porta).	5 Nos	8992	Each	44960
8	Providing & Fixing Bath Shower Set (Wall Mounted) i/c Telephonic Shower C.P Rods etc completed.(MASTER / SONEX OR EQUVALENT).	5 Nos	26534	Each	132670

**Total Rs. 2381906**

Sr. No.	Name of Item.	Quantity	Rate	Unit	Amount
3	<b>PART "B" W/S &amp; S/F.</b>				
1	P/F 6"x2" or 6"x3" C.I floor trap of the approved self cleaning design with a C.I screwed down gritting with or without a vent arm complete with and i/c making req: No; of holes in walls plinth & floor for pipe connection and making good in C.C 1:2:4. (SI No:20 P-6)	12 Nos:	2042.43	Each	24509
			(Rs: Two Thoud: Forty Two & Ps: Fourty Three) Only		
2	P/F in position nyloon connections complete with 1/2" dia brass stop cock with pair of brass nuts and lining joints to nyloon connection. (SI No:23 P-6)	35 Nos:	447.15	Each	15650
			(Rs: Four Hund: Forty Seven & Ps: Fifteen) Only		
3	P/F 4" dia C.I soil & vent pipe i/c cutting & fitting & extra painting to match the colour of the building. (SI No:1 P-9)	35 Rft	333.29	P.Rft	11665
			(Rs: Three Hund: Thirty Three & Ps: Twenty Nine) Only		
4	P/F M.S clamps of the approved design to 4" dia C.I pipe sockets i/c the cost of cutting & making good to wall or M.S bolts & nuts, 4" into wall i/c pipe distance pieces extra painting to match the colour of the building. (SI No:2 P-9)	30 Nos:	72.16	Each	2165
			(Rs: Seventy Two & Ps: Sixteen) Only		
5	P/F 4"x4" dia C.I branch of the required degree with access doors, rubber washer 3/8" thick & bolts & nuts & extra painting to match the colour of the building. (SI No:4 P-9)	15 Nos:	702.00	Each	10530
			(Rs: Seventy Two ) Only		
6	P/F 24"x18" lav: basin in white glazed earthen ware complete with & including the cost of W.I. Or C.I. Contilever brackets 6 inches built into walls painted white in two coats after a primary coat of red lead paint a pair of 1/2" dia chrome plated pillar taps, 1-1/2" dia rubber plug and chrome plated brass chain 1-1/4" dia malleable iron or c.p.brass traps malleable iron or brass union and making requisite No. of holes in walls, plinth and floor for pipe connection and making good in c.c. 1:2:4 ( foreign or	5 Nos.	6237.00	Each	31,185
			(Rs: Six Thousand two Hundred Thirty Seven Paise) Only		
7	Add extra labour for providing and fixing of earthen ware padestal white or coloured glazed (Standard Pattern) (S.I.No. 11 P-3)	5 Nos.	2533.47	Each	12,667
			(Rs: Twenty Five Hundred Thirty Three Rupees and Fourty Seven Paise ) Only		
8	P/F steel sink stainless local make complete with cast iron or wrough iron bracksts 6" built in wall 1-1/2" rubber plug chorme brass chain 1-1/2" C.P brass waste with 1-1/2" plate PVC waste pipe and making requisite nof holes in walls and plinth floor for pipe connection and making good in c.c 1:2:4 (b) steel sink stainless sized 36"x18" local making (Standard pattern) S.I.No.19-b P-5	2 Each	5162.30	Each	10,325
			(Rs: Five Thousand One Hundred Sixty Two Rupees and Thirty Paise ) Only		
9	Providing & fixing chrome plated brass towel rail complete with brackets fixing on wooden cleats with 1" long c.p brass screws.(a) 3/4" dia round or square (Standard Pattern)(II) Towel rail 36" long (S.I.No. 1 P-7)	5 Nos:	1082.95	Each	5415
			(Rs: One Thousand Eighty Two Rupees and Ninety Five Paise ) Only		
10	Providing & fixing 15" x 12" bavelled edge mirror of belgium glass complete with 1/8" thick hard board and c.p screws fixed to wooden pleat.(a) Standard Pattern.(S.I.No.4 P-7)	5 Nos:	1161.60	Each	5808
			(Rs: Elven Hundred Sixty One Rupees and Sixty Paise ) Only		
11	S/Fixing concealed stop cock of superior quality with Crystal head 1/2" dia (SINO.14(b) P-15)	15 Each	889.46	Each	13,342
			(Rs: Eight Hundred Eighty Nine Rupees and Fourty Six Paise ) Only		
12	(a) S/Fixing long bib- cock of superir quality with c.p head 1/2" dia. (SINO.13 P-19)	15 Each	1109.46	Each	16,642
			(Rs: Elven Hundred Nine Rupees and Fourty Six Paise ) Only		

Sr. No.	Name of Item.	Quantity	Rate	Unit	Amount.
13	Supplying & Fixing jet shower with rod of superior quality single c.p head 1/2" dia (S.I.No.15 P-19)	10 Each	1142.24	Each	11,422
					(Rs: Eleven Hundred Forty Two Rupees and Twenty Four Paisa ) Only
14	Providing F.C. pressure pipe with collar (Dedex or equivalent) i/c digging the trench to required depth and fixing in position and jointing with rubber rings including testing to water pressure head of 200 feet.(b) 4" dia F.C. pressure pipe. (S.I.No.3 P-25)	320 Rft	188.44	P.Rft	60301
					(Rs: One Hundred Eighty Eight Rupees and Forty Four Paisa ) Only
15	Constructing manhole for the required dia of circular sewer and 7'-9" depth with walls of B.B in cement mortar 1:3 cement plastered 1:3, 1/2" thick, inside of walls and 1" (25 mm) thick over benching and channel i/c fixing C.I manhole cover with frame of clear opening 2' x 2' (610x610 mm)	10 Nos	2524.25	P.Nos	25243
					(Rs: Twenty Five Hundred Twenty Four Rupees and Twenty Five Paisa ) Only
16	Providing, Laying uPVC Pressure Pipes of Class 'C' (equivalent make) fixing in trench i/c cutting, fitting and jointing with 'Z' joint with one rubber ring i/c testing with water to a head 91.5meter/ or 300 ft. 100 mm (4" dia)(S.I.No.1 P-22)	280 Rft	174.00	P.Rft	48720
					(Rs: One Hundred Seventy Four Rupees ) Only

**Total Rs. 305,589**



Sr. No.	Name of Item.				
<b>Part-C Schedule Item (E.I Work)</b>					
1	Wiring for light or fan point with 3/0.29 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required.(S.I.No.1234 P-15)	60	Nos	1,130.00	Each 67,800
					<b>(Rs: Eleven Hundred Thirty Rupees Only)</b>
2	Wiring for pug point with 3/0.29 PVC insulated wire in 20mm (3/4") channel patti on surface as required (S.I. No. 126/P-15)	21	Nos	985.00	Each 20,685
					<b>(Rs: Nine Hundred Eighty Five Rupees Only)</b>
3	Wiring for Call bell point with 3/0.29 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required (S.I. No. 128/P-15)	3	Nos	1,764.00	Each 5,292
					<b>(Rs: Seventeen Hundred Sixty Four Rupees Only)</b>
4	P/L (Main or Sub Main) PVC insulated with size 2-7/0.29 copper conductor in (3/4") dia PVC conduit recessed in the wall or column as required(SI No.10 P-2).	300	MTR	222.00	P.MTR 66,600
					<b>(Rs: Two Hundred Twenty Two Rupees Only)</b>
5	P/L (Main or Sub Main) PVC insulated with size 2-7/0.44 copper conductor in (3/4") dia PVC conduit recessed in the wall or column as required (SI No. 12 P-2).	250	MTR	341.00	P.MTR 85,250
					<b>(Rs: Three Hundred Forty One Rupees Only)</b>
6	P/L (Main or Sub Main) PVC insulated with size 2-7/0.64 copper conductor in (3/4") dia PVC conduit recessed in the wall or column as required (SI No. 14 P-2).	100	MTR	641.00	P.MTR 64,100
					<b>(Rs: Six Hundred Forty One Rupees Only)</b>
7	P/F B.C Bakelite angular type bittern holder (S.I.No.1 P-14)	9	Nos	69.00	Each 621
					<b>(Rs: Sixty Nine Rupees Only)</b>
8	P/F Circuit breaker 15, 20, 30, 40, 50, 60, 75 & 100amp TP (XS-100NS) on a prepared board as required. (Si-204, P-31)	13	Nos	2,456.00	Each 31,928
					<b>(Rs: Twenty Four Hundred Fifty Six Rupees Only)</b>
9	Providing & Fixing 6,10,15,20,30,40,50 & 63 amp SP(TB-5S) on prepared board as required.(S.I.No.204 P-31)	4	Nos	916.00	Each 3,664
					<b>(Rs: Nine Hundred Sixteen Rupees Only)</b>
10	Providing & fixing circuit breaker 15,20,30,40,50,60,75 & 100amp TP (XS-100NS) on prepared board as required.(S.I.No.207 P-31).	1	Nos	9,261.00	Each 9,261
					<b>(Rs: Nine Thousand Two Hundred Sixty One Rupees Only)</b>
11	P/F Bakelite ceiling rose with two terminals (S.I.No. 228 P-33)	10	Nos	72.00	Each 720
					<b>(Rs: Seventy Two Rupees Only)</b>
					<b>Total Amount Part-C <u>355,921</u></b>

Sr. No.	Name of Item.	Quantity	* Rate	Unit	Amount.
<b>PART - B NON - SCHEDULE ITEMS</b>					
1	P/F A.C or D.C electric bell 200/250 volts 70mm (2.3/4") imported	3 Nos	310	Each	930
2	P/F 10amp[ Polycarbonate flame retardant bell push with fancy base plate fixed in dia fabricated power coated metal board recessed in wall or column i/c connection.	3 Nos.	658	Each	1974
3	P/F Mild steel bar fan clamp 15.8mm (5/8") dia suitable for RCC roof	6 Nos.	356	Each	2136
4	S/F Distribution panel board of 3/8" thick sheeting double shutter to accommodate circuit breaker i/c painting with enameled paint	7 Sft	2672	P.Sft	18704
5	P/F 1-40 watt tube light complete with 40 watt 4'-0 long rod, choke, starter and pase putty with Philips components i/c necessary electric connection and fixing on wall or ceiling etc. complete (Philips)	4 Sft	1371	P.Sft	5484
6	P/F Energy saver (18 to 24 watts) superior quality i/c fixing on existing holder etc complete.	10 Nos	493	Each	4930
7	P/F Hard drawn bare copper wire No.16 SWG as earth continuity conductor with any given mains or sub main in all system of wiring i/c metallic electrical accessories (1st class quality)	150 Rft	25.53	P.Rft	3829
8	P/installing 140 CM (56") sweep ceiling fan with blade canopy standard length of down rod i/c connection with 14.0076" flexible wire complete as required with dimmer (millat,pak,asia, youns , climax, royal)	6 Nos.	6549	Each	39294
9	P/F 10amp polycarbonate flame retardant one way switch with fancy base plate fixed on die fabricated powder coated metallic board recessed in wall or column i/c connection as required (#31/2/3A Clipsal	4 Nos.	1964	Each	7858
	(i) One Switch plate	4 Nos	455	Each	1820
	(ii) Five switch plate	2 Nos	1420	Each	2841
	(iii) Six switch plate	7 Nos	1700	Each	11900
10	P/F LED light 18/20 watt complete i/c cutting in false ceiling fixing of light with necessary connection i/c testing as philips / orient etc as required.	40 Nos	4608	Each	184348
11	P/F 10 amps polycarbonate flame retardant 2-pin switch socket unit (universal) with fancy base plate fixed on die fabricated powder coated metallic board recessed in wall or column i/c connection as required (E-14U Clipsal make)	4 Nos	2001	Each	8004

Sr. No.	Name of Item.	Quantity	Rate	Unit	Amount.
---------	---------------	----------	------	------	---------

12 P/F Earth Set With 2'x2' 1/4" copper plate buried in the ground at a depth of 10 feet or les ( with slat and charcoal or earth chemical power) etc. making the pit 10 feet deep by excavation off all type of soil i/c fixing of 8-SWG copper wire in 3/4" G.I conduit complete in all respect as required.

1 Nos 13719 Each 13719

13 P/F Exhaust fan 280mm (12") Sweep butterfly shutter for exhaust fan complete as required this rte also i/c in cutting of wall & beam upto required site fixing exhaust fan with connection & finishing the hole with cement etc complete in all respects (is class quality)

3 Nos 3456 Each 10368

14 P/F fancy capsule light complete with metallic body, glass shade, holder etc complete.

4 Nos 3730 Each 14922

Total Part "B"	= 333061 =
----------------	------------

Sr. No.	Name of Item.	Quantity	Rate	Unit	Amount.
---------	---------------	----------	------	------	---------

**(GENERAL-ABSTRACT)**

1	PART "A" CIVIL WORK.	Rs:	5,189,489		
2	NON-SCHEDULE ITEM.	Rs:	2381906		
3	PART "B" W/S & S/F.	Rs:	305,589		
4	PART "C" E.I WORK.	Rs:	355,921		
5	PART "C" E.I WORK. (NON-SCHEDULE ITEM).	Rs:	333061		

5764782

Total Rs. 914159

Says Rs. 914159


**TERMS & CONDITIONS**

- \* Non premium shall be allowed on item based on Market rates sanction by competent authority outside the schedule of rates enforced.
- \* Nothing shall be paid for cartage of any material what so ever brought at the sight of work including the material cartage from Govt: store.
- \* The material was use in the name of work of the finish redact can be got tasted from any approved Laboratory as per directed by the Executive Engineer, In charge or his representative all expenses in condition with such testing shall be born by the contractor exclusively without any re-embossment or claim against the Govt: on this account.

  
**CONTRACTOR**

  
**Senior Superintendent of Police**  
Tando Allahyar / Member

  
**Senior Superintendent of Police**  
Matiari/Member

  
**Executive Engineer**  
Provincial Building Hyd/Member

  
**Assistant Engineer**  
Provincial Buildings (EL) Hyd/Member

  
**Senior Superintendent of Police**  
Jamshoro & Chairman Procurement Committee