

SINDH PUBLIC PROCUREMENT REGULATORY AUTHORITY

CONTRACT EVALUATION FORM

TO BE FILLED IN BY ALL PROCURING AGENCIES FOR PUBLIC CONTRACTS OF WORKS, SERVICES & GOODS

- 1) NAME OF THE ORGANIZATION / DEPTT. Karachi Water and Sewerage Board
- 2) PROVINCIAL / LOCAL GOVT./ OTHER Local Government
REPLACEMENT OF 15"DIA & 12"DIA
UNSERVICABLE/DAMAGED SEWERS AT BAB-E-
KHYBER TO E-MARKET BY PASS SYSTEM UC-7,
FOR THE IMPROVEMENT OF SEWERAGE
SYSTEM IN JAMSHED TOWN (SEWERAGE)-I.
- 3) TITLE OF CONTRACT
- 4) TENDER NUMBER S.No.35323
- 5) BRIEF DESCRIPTION OF CONTRACT For improvement of sewerage system.
- 6) FORUM THAT APPROVED THE SCHEME Managing Director, KW&SB
- 7) TENDER ESTIMATED VALUE Less than 1.00 Million
- 8) ENGINEER'S ESTIMATE Rs.8,97,137/=
(For civil works only)
- 9) ESTIMATED COMPLETION PERIOD (AS PER CONTRACT) 25 Days
- 10) TENDER OPENED ON (DATE & TIME) 12-12-2017 at 02.30 P.M.
- 11) NUMBER OF TENDER DOCUMENTS SOLD 03 Nos.
(Attach list of buyers)
- 12) NUMBER OF BIDS RECEIVED 03 Nos.
- 13) NUMBER OF BIDDERS PRESENT AT THE TIME OF OPENING OF BIDS 03 Nos.
- 14) BID EVALUATION REPORT Already sent to authority web site
(Enclose a copy)
- 15) NAME AND ADDRESS OF THE SUCCESSFUL BIDDER M/s.M.A. Khan Group of Construction,
House No.A-1176, Nawab Colony, UC-2, Baldia Town,
Karachi.
- 16) CONTRACT AWARD PRICE Rs.8,97,025/=
- 17) RANKING OF SUCCESSFUL BIDDER IN EVALUATION REPORT
(i.e. 1st, 2nd, 3rd EVALUATION BID). 1st Lowest
- 18) METHOD OF PROCUREMENT USED : - (Tick one)
- | | |
|--|--|
| a) SINGLE STAGE –ONE ENVELOPE PROCEDURE _____ | <input type="checkbox"/> Domestic/ Local |
| b) SINGLE STAGE –TWO ENVELOPE PROCEDURE _____ | <input checked="" type="checkbox"/> NIL |
| c) TWO STAGE BIDDING PROCEDURE _____ | <input type="checkbox"/> NIL |
| d) TWO STAGE –TWO ENVELOPE BIDDING PROCEDURE _____ | <input type="checkbox"/> NIL |

19) APPROVING AUTHORITY FOR AWARD OF CONTRACT Managing Director, KW&SB

20) WHETHER THE PROCUREMENT WAS INCLUDED IN ANNUAL PROCUREMENT PLAN?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

21) ADVERTISEMENT :

i) SPPRA Website
(If yes, give date and SPPRA Identification No.)

Yes	12-12-17 S.No. 35323
No	

ii) News Papers
(If yes, give names of newspapers and dates)

Yes	
No	

22) NATURE OF CONTRACT

Domestic/ Local	<input checked="" type="checkbox"/>	Int.	<input type="checkbox"/>
--------------------	-------------------------------------	------	--------------------------

23) WHETHER QUALIFICATION CRITERIA
WAS INCLUDED IN BIDDING/TENDER DOCUMENTS?
(If yes, enclose a copy)

Yes	<input checked="" type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	-------------------------------------	----	-------------------------------------

24) WHETHER BID EVALUATION CRITERIA
WAS INCLUDED IN BIDDING/TENDER DOCUMENTS?
(If yes, enclose a copy)

Yes	<input checked="" type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	-------------------------------------	----	-------------------------------------

25) WHETHER APPROVAL OF COMPETENT AUTHORITY WAS OBTAINED
METHOD OTHER THAN OPEN COMPETITIVE BIDDING?

Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

26) WAS BID SECURITY OBTAINED FROM ALL THE BIDDERS?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

27) WHETHER THE SUCCESSFUL BID WAS LOWEST EVALUATED
BID / BEST EVALUATED BID (in case of Consultancies)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

28) WHETHER THE SUCCESSFUL BIDDER WAS TECHNICALLY
COMPLIANT?

Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

29) WHETHER NAMES OF THE BIDDERS AND THEIR QUOTED PRICES WERE READ OUT AT
THE TIME OF OPENING OF BIDS?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

30) WHETHER EVALUATION REPORT GIVEN TO BIDDERS BEFORE THE AWARD OF CONTRACT?
(Attach copy of the bid evaluation report)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

31) ANY COMPLAINTS RECEIVED
(If yes, result thereof)

Yes	
No	✓

32) ANY DEVIATION FROM SPECIFICATIONS GIVEN IN THE TENDER NOTICE / DOCUMENTS
(If yes, give details)

Yes	
No	✓

33) WAS THE EXTENSION MADE IN RESPONSE TIME?
(If yes, give reasons)

Yes	
No	✓

34) DEVIATION FROM QUALIFICATION CRITERIA
(If yes, give detailed reasons.)

Yes	
No	✓

35) WAS IT ASSURED BY THE PROCURING AGENCY THAT THE SELECTED FIRM IS NOT
BLACK LISTED

Yes	✓	No	
-----	---	----	--

36) WAS A VISIT MADE BY ANY OFFICER/OFFICIAL OF THE PROCURING AGENCY TO THE
SUPPLIER'S PREMISES IN CONNECTION WITH THE PROCUREMENT? IF SO, DETAILS TO
BE ASCERTAINED REGARDING FINANCING OF VISIT, IF PROVIDED:
(If yes, enclose a copy)

Yes		No	✓
-----	--	----	---

37) WERE PROPER SAFEGUARDS PROVIDED ON MOBILIZATION ADVANCE PAYMENT IN
THE CONTRACT (BANK GUARANTEE ETC.)?

Yes		No	✓
-----	--	----	---

SPPRA
38) SPECIAL CONDITIONS, IF ANY
(If yes, give Brief Description)

Yes	
No	✓

Signature & Official Stamp of
Authorized Officer


IMRAN
ENGINEER (SEWAGE)
JAMSHED TOWN, KW&S

FOR OFFICE USE ONLY

KARACHI WATER AND SEWERAGE BOARD
OFFICE OF THE EXECUTIVE ENGINEER (SEW)-I (JAMSHED TOWN)
BLOCK-B, KMC MARKET, SINDHI MUSLIM SOCIETY

NO.EE/SEW-I/JT/KW&SB/2018/44

DATED :15-02-2018

M/s.M.A. Khan Group of Construction,
House No.A-1176,
Nawab Colony, UC-2, Baldia Town,
KARACHI.

WORK ORDER / L.O.C

SUBJECT :- REPLACEMENT OF 15"DIA & 12"DIA UNSERVICABLE/DAMAGED SEWERS AT BAB-E-KHYBER TO E-MARKET BY PASS SYSTEM UC-7, FOR THE IMPROVEMENT OF SEWERAGE SYSTEM IN JAMSHED TOWN (SEWERAGE)-I.

Your Tenders dated 12-12-2017, has been approved by the competent authority, KW&SB, for amounting to Rs.8,97,025/= (Rupees eight lacs ninety seven thousand twenty five only). You are therefore, requested to start the above mentioned works as per design and specification.


The each work is to be completed with 25 days, failing which penalty of Rs.1,000/= per day will be imposed / recovered as per terms and conditions of the contract.

You are further requested to contact the Sub-Engineer Jamshed Town (Sew), KW&SB, in connection with commencement of supervision for necessary instructions of the works.


EXECUTIVE ENGINEER (SEW)-I
JAMSHED TOWN, KW&SB

Copy to :-

1. The Superintending Engineer, District East-A, KW&SB.
2. Budget Office, KW&SB.
3. Asstt. Director (LFA), KW&SB.
4. Office Copy.

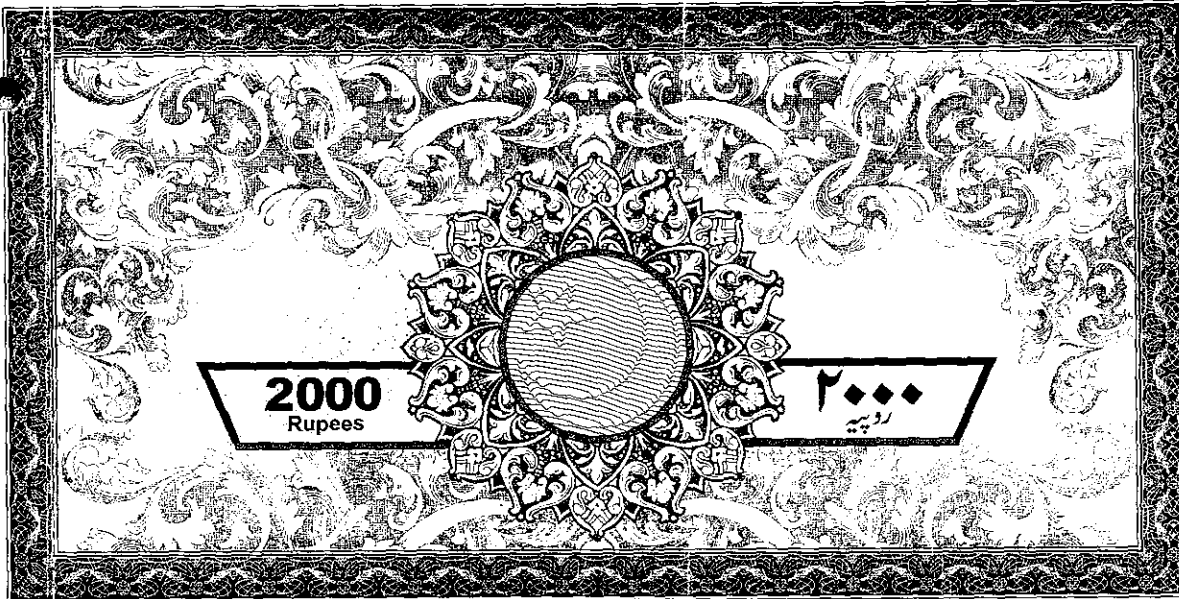

ZCESHAN STAMP VENDOR CONTRACT AGREEMENT

Licence No. 144, Shop No.A-6, Block-17, Ruh Heights

Phase-I, Gulistan-e-Johar, Karachi

09 FEB 2018

An agreement made this 09 day of February 2018, in the

Year of 2018 between the Karachi Water &

Sewerage Board of the City of the Karachi, as conferred the powers of Chief

Engineer (W&SB) delegated to Deputy Managing Director (T/S),

KW&SB communicated vide **O/O NO.KW&SB/DMD/HRD&A/1141 dated:**

09 FEBRUARY 2018 hereinafter, called the Board (which expression shall

include their successors) of the one part and as first Party **M/S. M.A. KHAN**

GROUP OF CONSTRUCTION having their office at **House No.1176,**

Nawab Colony, Baldia Town, Karachi, Represented by the **MR. NOORAN**

SHAH, hereinafter called the "Contractor" (which expression shall wherever

the context so admit or required be deemed to include their Executors.

Administrators. Successors and permitted Assignees) on other part as second

party.

WHEREAS the Employer is desirous to execute the work "**REPLACEMENT**

OF 15" DIA & 12" DIA UNSERVICEABLE / DAMAGED SEWERS

AT BAB-E-KHYBER TO E-MARKET BY PASS SYSTEM UC-7 FOR

THE IMPROVEMENT OF SEWERAGE SYSTEM IN JAMSHED TOWN

(SEW-I)." KW&SB'S OWN FUNDED PROGRAMME, for RS.8,97,025/=

(RUPEES EIGHT LACS NINETY SEVEN THOUSAND AND TWENTY FIVE

ONLY), for the construction and completion of such WORKS and the

remedying of an defects therein. The tender called upon through

Authority's Website of SPPRA Rule-2010 under Serial NO.35323.

AND WHEREAS THE CONTRACTOR has already deposited 2% Pay Order for

amounting to **Rs.20,000/=,** vide Pay Order No.**18440177** dated :

13-12-2017, issued from **Habib Bank Limited, Hassan Square Branch**

Karachi remaining 8% for amounting to **Rs.69,703/=** will be deducted of

10% Performance Security as Security Deposit from his bill, he same


will be kept with the EMPLOYER till the maintenance period of the work for

the due fulfillment of the CONTRACTOR. Further 1% Water Charges will also

be deducted from his bill as per Standard Operating Procedure (SOP).

[Handwritten signature]

[Handwritten signature]

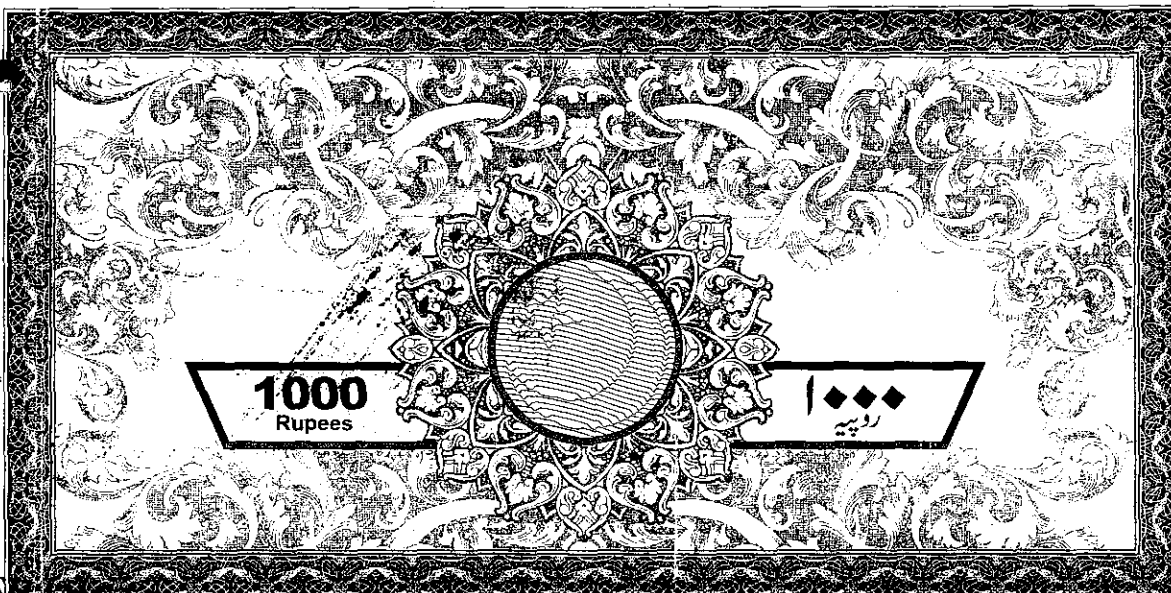

ZEES SYSTEMS STAMP VENDOR

Licence No. 144, Shop No.A-6, Block-17 Ruffi Heights
Phase-I, Gulistan-e-Johanna, Karachi

Now this Agreement is dated **08-FEB-2018** follows: **(RUPEES ONE THOUSAND ONLY)**


Serial No: **42004** Date: _____
Issued to With A Press _____
Received With Address: _____
Purpose: _____
Also for: _____
Stamp Vendor's Signature: _____
For use Bank Guarantee will be for the vendor and not for the Any Other Documents

Terms and conditions of this Agreement words and expression shall have the same meanings as those respectively assigned to them in the conditions of Contract hereinafter

- 4. The following documents which for the purpose of identification have been signed by **MR. NOORAN SHAH** on behalf of the contractor and by **DY. MANAGING DIRECTOR(T/S), KW&SB**, on behalf the EMPLOYER all of which shall be deemed to form and be read and construed as part of this Agreement.
 - a). This Form of Agreement.
 - b). Employer letter of Acceptance No.DMD/TS/SE/DE-A/W&S/KW&SB/2018/37 dated: **15-02-2018**.
 - c). The Tender.
 - d). The conditions of the Particular Application - Part-II-A & II-B.
 - e). The General Conditions - Part-I.
 - f). The Drawings.
 - g). The specifications and
 - h). The Priced Bill of Quantities.
 - i). Time period is 90 Days.

3. In consideration of the payments to be made by the EMPLOYER to the CONTRACTOR has hereinafter mentioned, the CONTRACTOR hereby covenants with the EMPLOYER to execute and complete the WORK and to remedy any defects therein and maintaining the same in conformity in all respects with the provisions of the CONTRACT.

5. THE EMPLOYER hereby covenants to pay to the CONTRACT in the manner prescribed by the CONTRACT.

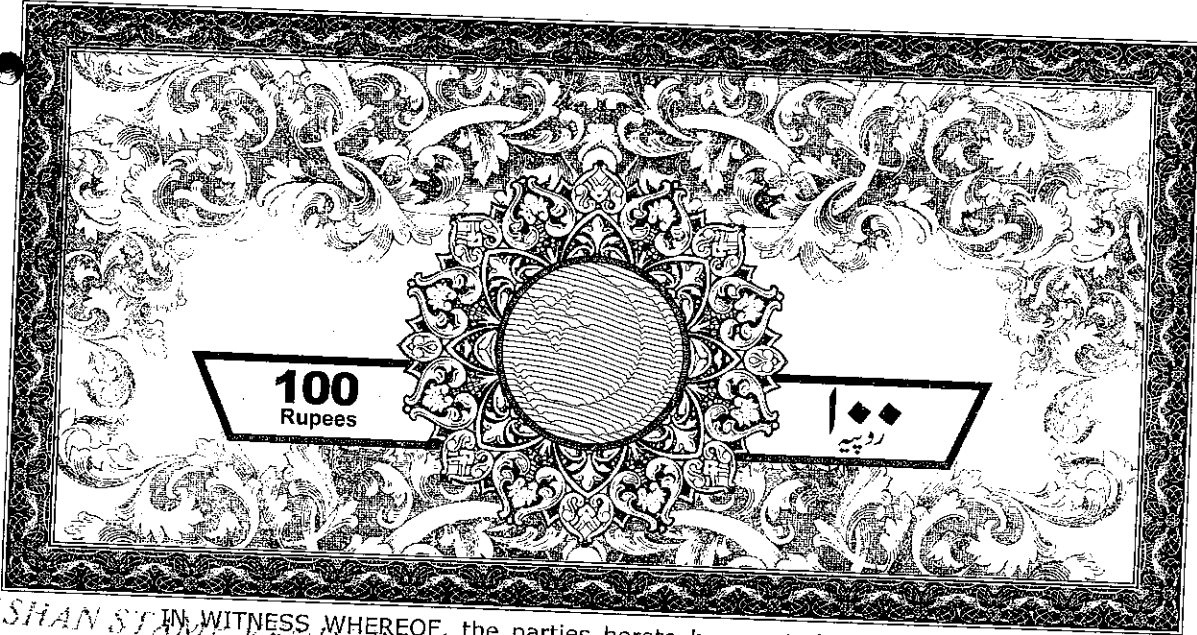

ZEEZHAN ST IN WITNESS WHEREOF, the parties hereto have set their respective hands and seats the day and year first above written 08 FEB 2018

Signed, Sealed and Delivered by the.
Advocate K.A.A. 4459
For and on behalf of
EMPLOYER

RECEIVED

For and on behalf of
CONTRACTOR

[Signature]
DEPUTY MANAGING DIRECTOR (T/S)
K.W.&S.B.

[Signature]
NOORAN SHAH
MANAGING PARTNER
M/S. M.A.KHAN GROUP OF
CONSTRUCTION.

WITNESS OF EMPLOYER

WITNESS OF CONTRACTOR

[Signature]
SUPERINTENDING ENGINEER
DISTRICT EAST-A, KW&SB.

[Signature]
B. K. Belder


[Signature]
EXECUTIVE ENGINEER (SEW-I)
JAMSHED TOWN, DISTRICT EAST-A
K.W.&S.B.

[Signature]
Gul Muhammad Khan & Brothers

M956462.

315017

POSTAGE WILL BE PAID BY ADDRESSEE

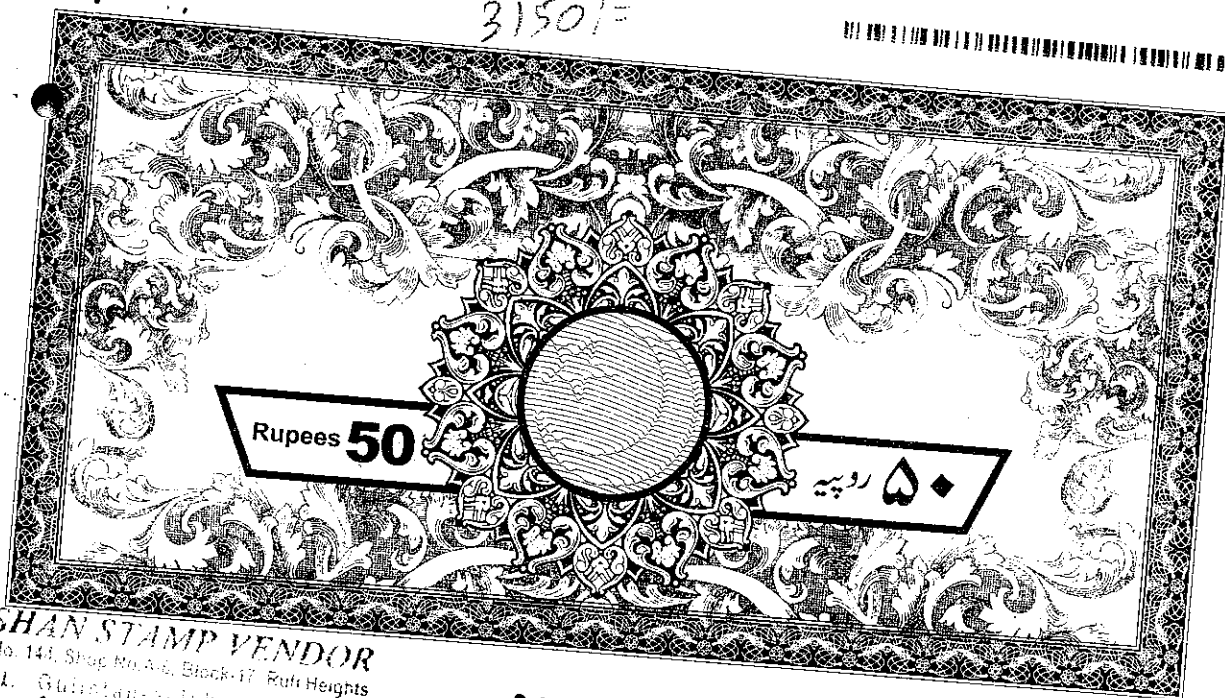

ZEE SHAN STAMP VENDOR
 Licence No. 141, Shop No. 44, Block-17, Ruff Heights
 Phase-I, Gulistan-e-Johar, Karachi

05 FEB 2018

40425

UTILIZED FOR THE WORK OF **₹89,72,500 ONLY**

TANA SIDDIQUI
 ADVOCATE
 26/12/17

**REPLACEMENT OF 15" DIA & 12" DIA
 UNSERVICEABLE / DAMAGED SEWERS AT BAB-
 E-KHYBER TO E-MARKET BY PASS SYSTEM UC-7
 FOR THE IMPROVEMENT OF SEWERAGE SYSTEM
 IN JAMSHED TOWN (SEW-I).**

FOR AMOUNTING TO RS.8,97,025/=
**(RUPEES EIGHT LACS NINETY SEVEN THOUSAND AND
 TWENTY FIVE ONLY)**

M/S. M.A.KHAN GROUP OF CONSTRUCTIONS.

OFFICE OF THE EXECUTIVE ENGINEER (SEWERAGE)-I, (JAMSHED TOWN).
BLOCK-B, KMC MARKET, SINDHI MUSLIM SOCIETY

SUBJECT :- REPLACEMENT OF 15" DIA & 12" DIA UNSERVICABLE/DAMAGED SEWERS AT BAB-E-KHYBER TO E-MARKET BY PASS SYSTEM UC-7, FOR THE IMPROVEMENT OF SEWERAGE SYSTEM IN JAMSHED TOWN (SEWERAGE)-I.

SL. NO.	DESCRIPTION	QTY.	RATE		PER UNIT / ITEM	AMOUNT IN RUPEES
			Rupees in Figures.	Rupees in Words		
1	Dismantling and removing road metalling.	2171.5 Cft	(600/-)	Six hundred	₹/Cft	13029/-
2	Excavation for pipe line in trenches, and pits in all kind of soils of murum i/c trimming and dressing sides to true alignment and shape leveling of beds of trenches to correct level and grade, cutting joint holes and disposal of surplus earth within a one chain as directed by Engineer Incharge. Providing fence guards, lights, flags and temporary crossings for non-vehicular traffic where ever required lift upto 5 ft. (1.52m) and lead upto one chain (30.5m).					
	i. Lift 0'-5'	8936 Cft	(4700/-)	Four thousand seven hundred.	₹/Cft	41979/-
	ii. Lift 5'-8'	6702 Cft	(5200/-)	Five thousand two hundred	₹/Cft	34850/-
	iii. Lift 8'-11'	644 Cft	(5800/-)	Five thousand eight hundred	₹/Cft	3735/-
3	Providing M/H 4ft inside with CI frame (15 kg) and 5 feet clear depth 1:2:4 cast in situ in 9 inch thick wall 1:4:8 cement concrete in 6ft dia and 6" inch thick in foundation 1:2:4 c.c in benching, 1/2" thick cement plastering with 1:3 cement mortar on inside wall and surface of channel/benching i/c making required Nos of main and branch channels, 3/4" dia bar footrest at 12" C/C i/c cost of excavation of all kinds of soil, backfilling and disposal of excavated stuff etc complete, as per design and instruction of the Engineer Incharge.	06 Nos.	(14500/-)	Fourteen thousand five hundred.	Each	87000/-
(j)	Add/deduct per ft depth.	(+) 17.5 Ft.	(2500/-)	Two thousand five hundred	₹/Ft	43750/-

(Cont....on page No.2)

SUBJECT :- REPLACEMENT OF 15"DIA & 12"DIA UNSERVICABLE/DAMAGED SEWERS AT BAB E-KHYBER TO E-MARKET BY PASS SYSTEM UC-7, FOR THE IMPROVEMENT OF SEWERAGE SYSTEM IN JAMSHED TOWN (SEWERAGE)-I.

SL. NO.	DESCRIPTION	QTY.	RATE		PER UNIT / ITEM	AMOUNT IN RUPEES
			Rupees in Figures.	Rupees in Words		
4	Full hire charges of the pumping set per day i/c of wages of driver and Assistant fuel or electric energy plate forms required for placing pumps etc at lower depth with suction and delivery pipe for pumping out water found at various depth from trenches i/c the cost of erection and dismantling after completion of the job. Hire charges of pumping set upto 10 HP pumping out water from 10 ft deep trench.	35 Days	1500/-	One thousand five hundred	P/Day	52500/-
5	Providing, laying RCC pipes with (Rubber Ring Joint and fitting in trench i/c cutting, fitting and jointing with rubber ring i/c testing with water to specified pressure.					
	i. 15" dia	184 Rft	440/-	Four hundred forty	P/Rft	80960/-
	ii. 12" dia	530 Rft	367/-	Three hundred sixty seven	P/Rft	194510/-
6	Manufacturing and supplying of 21 inch diameter RCC Manhole Covers cast in 1:2:4 cement concrete ratio 3" inch deep at centre rain-forced with 1/2" dia M.S. tor bars with 4" c/c welded to a 3/16" thick 2" wide M.S. Plat and two hook of 3/8" dia tor bars including compacting, curing and transportation within 10 miles etc.					
	21" dia.	20 Nos.	930/-	Nine hundred thirty	Each	18600/-
7	Making connection with the existing manhole i/c the cost of cutting hole in wall, making them good in C.C 1:2:4 and making required channel etc complete.					
		10 Nos.	180/-	One hundred eighty	Each	1800/-

(Cont....on page No.3)

SUBJECT :- REPLACEMENT OF 15"DIA & 12"DIA UNSERVICABLE/DAMAGED SEWERS AT BAB-E-KHYBER TO E-MARKET BY PASS SYSTEM UC-7, FOR THE IMPROVEMENT OF SEWERAGE SYSTEM IN JAMSHED TOWN (SEWERAGE)-I.

SL. NO.	DESCRIPTION	QTY.	RATE		PER UNIT / ITEM	AMOUNT IN RUPEES
			Rupees in Figures.	Rupees in Words		
8	Manufacturing & supplying of RCC ring slab 21"dia (inside) and 36"dia outside 7.5 width and 6"thick i/c 3/8"dia tor steel bars two concentric rings with 3/8" dia 8 Nos cross linked bars welded and two sunk type hooks, casted in 1:1 1/2:3 concrete with embedded 15 Kg C.I frame in perfect position i/c transportation charges for an average lead of 20KM per trip from casting yard to town offices (A minimum of 25 slabs per trip will be transported).	20 Nos.	1900/-	One thousand nine hundred	Each	38000/-
	Shifting to the site and fixing 36" dia ring slab in perfect position on damaged manhole i/c cutting of the position of damaged manhole in proper shape laying in layer of C.M in 2" thickness and disposal of the debris.	20 Nos.	560/-	Five hundred sixty	Each	11200/-
	Cement concrete plain including placing compacting, fitting finishing and curing. complete (including screening and washing at stone aggregate without shuttering. Ratio 1:2:4	410.91 Cft	14000/-	Fourteen thousand	%Cft	57527/-
	Providing and fixing C.I.Frame including cost of material etc.	100 Kgs.	70/-	Seventy	P/Kg	7000/-
	Hire charges of steel shuttering both side for the construction of main hole (circular) at side i/c its erection in proper position and removal after concrete etc complete.	45 Ft.	99/-	Ninety nine	P/Ft	4455/-
	Sand Haro or any other source Sand of the same modulus of the Fineness (Hill Sand).	644 Cft	2425/-	Two thousand four hundred and twenty five	%Cft	15617/-
	Refilling the excavated stuff in trenches 6" thick layer i/c watering ramming to full compaction etc. complete.	14662.31 Cft	2760/-	Two thousand seven hundred sixty	%Cft	40468/-
	Carriage of 100 Cft 5 Tons of all materials like stone aggregate, spawal, coal, lime, surkhi etc: B.G. Rail fastening points and crossing bridge, Girders, Pipes, Sheets Rail, M.S. Bars etc: or 1000 Nos: bricks, 10"x6"x2" or 150 Cft or timber or 100 Maunds of fuel wood by trucks or any other means owned by the contractos. Into 5 Mile.	1619.69 Cft	730/-	Seven hundred Thirty	%Cft	11824/-

SUBJECT :- REPLACEMENT OF 15"DIA & 12"DIA UNSERVICABLE/DAMAGED SEWERS AT BAB-E-KHYBER TO E-MARKET BY PASS SYSTEM UC-7, FOR THE IMPROVEMENT OF SEWERAGE SYSTEM IN JAMSHED TOWN (SEWERAGE)-I.

SL. NO.	DESCRIPTION	QTY.	RATE		PER UNIT / ITEM	AMOUNT IN RUPEES
			Rupees in Figures.	Rupees in Words		
16	Cleaning inside sewerage lines completely restoring original silt free space / diameter of pipe lines by labour and equipment (Mechanically / Electrically driven). Including accessories like pulley's Steel rope, buckets and draggers sizing from 6" to 18" dia Their "to and fro" pulling action (No of passes shall be as many as required) would be undertaken in two phases (Firs:Phase entire length from downstream to upstream) bringing down peak hours sewerage to flow inside pipe line (as free flow) and in second phase from upstream to downstream of entire length ensuring no site is observed in buckets (6" dia to 18"dia) except only sewage water and finally passing a steel ball of dia 12" lesser than the diameter of pipe but not exceeding 48" dia ball even for larger dia pipe to ensure perfect cleaning. The job includes all the hire/cost of equipment and accessories of above winching machine devices along with / Engines with winching drum set having, steel rope pulley mounted over it, steel bucket from 6" dia to 18" dia hooks and other protections likes safety barriers, traffic sings, traffic cones ensuring no damage to pipe line along with ensuring safety to labour and other public property / lives and removal of silts / solid during desilting and clearance of site etc complete as per full satisfaction of site Engineer.	600 Ft. 1000 Ft	97/- 80/-	Ninety Seven Eighty	P/Ft P/Ft	58200/- 80000/-
TOTAL RS: 897025/-						

EXECUTIVE ENGINEER (SEW)-I
JAMSHED TOWN, KW&SB.

92/10

(Rupees Eight lac Ninety

We hereby quoted bid amount of Rs (897025/-) = (Rupees Eight lac Ninety
Seven thousand Twenty five only.

Note :- All existing SPPRA Rule will be abide by A Group of Construction

Signature of Contractor M. A. Ehem Project at

Address Hawas colony U. CNO 36 B T-2