



**OFFICE OF THE EXECUTIVE ENGINEER
DRAINAGE DIVISION, BADIN**

E-mail : drainagedivisionbadin@gmail.com

Off: No. 022-2622576

No. TC/ G-55/DD/ 277

of 2018

Badin, Dated: 09 / 03 / 2018

LETTER OF AWARD

To,

**M/s A.H Builders & Construction Company,
House No. B-15 Al-Rehman Cottages
Bypass Road Hyderabad**

Subject:-

**CONSTRUCTION OF SAMRADEE LINK DRAIN FROM RD. 0.0 TO
20.00 OUTFALLING IN 1-R OF MATLI BRANCH DRAIN AT RD. 35.0
AND ITS ALLIED STRUCTURES**

Your bid cost being a lowest has been accepted for the subjected contract of **Rs. 57,198,624/- (Pakistani Rupees Fifty Seven Million One Hundred Ninety Eight Thousand Six Hundred & Twenty Four only)** by the competent authority i.e. Chief Engineer Irrigation Development Region-II Hyderabad vide letter No. CEI/DEV-II/WB/ 138, Dated: 30.01.2018.

You are therefore, requested to start the work and complete it within (03) Years strictly as per directions and accordance with the specification as well as terms and condition.

In case of failure to complete the work within stipulated time, penalty shall be imposed @ 0.01% per day and the maximum limit as 10% of contract cost. In case you failed to commence the work within 07 days after the receipt of work order, action under the relevant clause of contract agreement will be initiate against you.


(Javed Hakeem Memon)
Executive Engineer
Drainage Division
Badin

Copy forwarded to the:-

- 1) The Secretary Irrigation Department GoS, Karachi.
- 2) The Chief Engineer, Irrigation Development Region-II Hyderabad.
- 3) The Project Director, LBOD Project, Hyderabad.
- 4) The Assistant Executive Engineer, Drainage Sub-Division, Tando Muhammad Khan for the progress report of the work should be report regularly.


(Javed Hakeem Memon)
Executive Engineer
Drainage Division
Badin

BID EVALUATION REPORT

1	Name of Procuring Agency	Executive Engineer Drainage Division Badin
2	Tender Reference No.	No. TC/G-148/DD/ 1234, Dated: 20-12-2017.
3	Name of Work	CONSTRUCTION OF SAMRADEE LINK DRAIN FROM RD. 0.0 TO 20.00 OUTFALLING IN 1-R OF MATLI BRANCH DRAIN AT RD. 35.0 AND ITS ALLIED STRUCTURES.
	Method of Procurement	Singe Stage - One Envelope Procedure
5	Tender Published	Hoisted through website of SPPRA vide S. No. 35765, Dated: 20.12.2017, published in the Newspapers "Daily SOBH, dated: 23.12.2017, Daily Awami Awaz, Dated: 24.12.2017, Daily The Express Tribune, Dated: 24.12.2017, The Daily KAWISH, dated: 25.12.2017, the Corrigendum for extend the date of submission and opening vide this office letter No. TC/G-148/DD/44, Dated: 10.01.2018.
6	Total Bid Documents Sold	45 Nos.
7	Total Bid Received / Responsive	03 Nos.
8	Technical Bid Opening Date	25.01.2018 at 2:00 PM
9	No. of Bid Technically Qualified	03 Nos.
10	Bid (s) Rejected	NIL
11	Financial Bid Opening date	25.01.2018 at 2:00 PM

12 EVALUATION

S. No.	Name of Firm or Bidder	Cost offered by the Bidders	Ranking in Terms of cost	Comparison with estimated cost without W.C & M.E	Reasons for acceptance / rejection	Remarks
1	2	3	4	5	6	7
1	M/s A.H Builders	57,198,624	1st.	14.85% above	1st. Lowest Reasonable	Lowest accepted
2	M/s Bashir Ahmed Shaikh	57,199,196	2nd	14.86% above	2nd Lowest	
3	M/s Nooruddin S. Shaikh	57,722,118	3rd.	15.90% above	3rd Lowest	



CHAIRMAN


(MANSOOR AHMED MEMON)


PROJECT DIRECTOR


LEFT BANK OUTFALL DRAIN PROJECT

HYDERABAD


MEMBER / SECRETARY
(JAVED HAKEEM MEMON)
EXECUTIVE ENGINEER
DRAINAGE DIVISION, BADIN


MEMBER
(TUFAIL AHMED ABRO)
REGIONAL MONITORING OFFICER
Monitoring Cell & P&D Department


MEMBER
(SHOIAB AHMED SUGRIO)
EXECUTIVE ENGINEER
DRAINAGE DIVISION, MIRPURKHAS


MEMBER
(ABDUL ALEEM MEMON)
EXECUTIVE ENGINEER
BUILDING DIVISION, JAMSHORO


Approved


Issued to Mr. A. H. Builders &
Contracting Company vide DR No-100
dated: 05-02-2018

Government of Sindh

Executive Engineer
Drainage Division
Badin.



IRRIGATION DEPARTMENT

Construction of Samradee Link Drain from RD. 0.0
to RD. 20.0 Outfalling in IR of Matli Branch Drain
at RD. 35.0

PACKAGE NO. 01

SUMMARY OF BID PRICE

CONSTRUCTION OF SAMRADEE LINK DRAIN FROM RD. 0.0 TO 20.0 OUTFALLING IN 1R OF MATLI BRANCH DRAIN AT RD. 35.0.

CONTRACT NAME

Bill Nr.	Description	Amount
1	Earth Work	9,274,554/=
2	a) CONSTRUCTION OF (10 NO.) R.C.C PIPE INLET ALONG SAMRADEE LINK DRAIN FROM RD. 0.0 TO 20.0	4,597,669/=
	b) CONSTRUCTION OF (04 NO.) VILLAGE ROAD BRIDGES ALONG SAMRADEE LINK DRAIN FROM RD. 0.0 TO 20.0	10,554,203/=
	c) CONSTRUCTION OF (12 NO.) WATER COURSE CROSSING ALONG SAMRADEE LINK DRAIN FROM RD. 0.0 TO 20.0	20,049,632/=
	d) CONSTRUCTION OF OUTFALL STRUCTURE ALONG MATLI BRANCH DRAIN AT RD. 35.0.	2,638,557/=
	e) CONSTRUCTION OF WATER COURSE CROSSING OVER SHADI BAHADUR BRANCH DRAIN AT RD. 10.0	1,988,647/=
	f) CONSTRUCTION OF BOX CULVERT ALONG PHULLELI GUNI OUTFALL DRAIN AT RD. 82 NIP SIDE	18,20,978 1/2
	g) CONSTRUCTION OF WATER COURSE CROSSING OVER 1R OF TANDO MUHAMMAD KHAN BRANCH DRAIN AT RD. 26.0	1988,647 1/2
	h) CONSTRUCTION OF (05 NO.) R.C.C PIPE INLET ALONG WESTRN MIR MAIN DRAIN (WHERE NECESSARY)	2,327,691 1/2
	i) CONSTRUCTION OF WATER COURSE CROSSING OVER MORHADI DRAIN AT RD. 7.0.	1,958,052 1/2
	Total Bid Price (the amount to entered in paragraph 1 to 2 of the form of bid in words	57,198,624 1/2

Signature:

Company Name:

A. H. Builders
& Construction Co.

PACKAGE NO. 01

SUMMARY OF BID PRICE

CONTRACT NAME

CONSTRUCTION OF SAMRADEE LINK DRAIN FROM RD. 0.0 TO 20.0 OUTFALLING IN 1R OF MATLI BRANCH DRAIN AT RD. 35.0.

Bill Nr.	Description	Amount
1	Earth Work	9,274,554/=
2	a) CONSTRUCTION OF (10 NO.) R.C.C PIPE INLET ALONG SAMRADEE LINK DRAIN FROM RD. 0.0 TO 20.0	4,592,669/=
	b) CONSTRUCTION OF (04 NO.) VILLAGE ROAD BRIDGES ALONG SAMRADEE LINK DRAIN FROM RD. 0.0 TO 20.0	10,554,203/=
	c) CONSTRUCTION OF (12 NO.) WATER COURSE CROSSING ALONG SAMRADEE LINK DRAIN FROM RD. 0.0 TO 20.0	20,049,632/=
	d) CONSTRUCTION OF OUTFALL STRUCTURE ALONG MATLI BRANCH DRAIN AT RD. 35.0.	2,638,551/=
	e) CONSTRUCTION OF WATER COURSE CROSSING OVER SHADI BAHADUR BRANCH DRAIN AT RD. 10.0	1,988,647/=
	f) CONSTRUCTION OF BOX CULVERT ALONG PHULLELI GUNI OUTFALL DRAIN AT RD. 82 NIP SIDE	1820,978/=
	g) CONSTRUCTION OF WATER COURSE CROSSING OVER 1R OF TANDO MUHAMMAD KHAN BRANCH DRAIN AT RD. 26.0	1988,647/=
	h) CONSTRUCTION OF (05 NO.) R.C.C PIPE INLET ALONG WESTERN MIR MAIN DRAIN (WHERE NECESSARY)	2,327,691/=
	i) CONSTRUCTION OF WATER COURSE CROSSING OVER MORHADI DRAIN AT RD. 7.0.	1,958,052/=
	Total Bid Price (the amount to entered in paragraph 1 to 2 of the form of bid in words	57,198,624/=

Signature:

Company Name:

A H Builders
& Construction Co.

SCHEDULE OF PRICE

Name of Work:- CONSTRUCTION OF SAMRADEE LINK DRAIN FROM RD. 0.0 TO 20.0.

Item Nr.	Description	Unit	Specifications Chapter Nr.	Quantity	Rate (Rs.)		Amount (Rs.)
					Figure	Words	
1	Jungle clearance and removing within 100' light.	100 Sft		666667.00	0.095	Nil Rupees Nine Rupee.	63,529.20
2	Earth work excavation in Irrigation channels drain etc dressed to designed section grades and profiles excavated material disposed off and dressed within 50' lead in ordinary soil.	P/Cft		1752410.00	3.049	Three Rupees Four Rupee.	5343448.57
3	Borrow pit excavation undressed lead up to 100' ordinary.	P/Cft		319113.00	2.655	Two Rupees Sixty Six Rupee.	87,409.44
4	Carriage of Sweet Earth Lead 3 - miles	P/Cft		319113.00	7.301	Seven Rupees Three Rupee.	2329705.57
5	Earth work compaction (Soft ordinary or hard soil) laying earth in 6" layer leveling watering for compaction etc complete.	P/Cft		2071523.00	0.331	Nil Rupees Three Rupee.	686,461.29
Total Bid Price (the amount to entered in paragraph 1 of the form of Bid) in words							9,274,554/-

Nil Million Rupee Seven hundred and four thousand five hundred and fifty four Rupees only.

Signature:
Company Name:

A.H. Builders
& Construction Co.

& CONSTRUCTION CO.

SCHEDULE OF PRICE

Name of Work:- CONSTRUCTION OF SAMRADEE LINK DRAIN FROM RD. 0.0 TO 20.0.

Bill No. 1: Earth Work

Item Nr.	Description	Unit	Specification Chapter Nr.	Quantity	Rate (Rs.)		Amount (Rs.)
					Figure	Words	
1	Jungle clearance and removing within 100' light.	100 Sft		666667.00	0.095	Nil Rates Nine Days.	63,529.20
2	Earth work excavation in Irrigation channels drain etc dressed to designed section grades and profiles excavated material disposed off and dressed within 50' lead in ordinary soil.	P/Cft		1752410.00	3.049	Three Rates four Rates.	5343448.57
3	Borrow pit excavation undressed lead up to 100' ordinary.	P/Cft		319113.00	2.668	Two Rates Six Rates.	857,409.44
4	Carriage of Sweet Earth Lead 3 - miles	P/Cft		319113.00	7.301	Seven Rates Three Rates.	2329205.52
5	Earth work compaction (Soft ordinary or hard soil) laying earth in 6" layer leveling watering for compaction etc complete.	P/Cft		2071523.00	0.331	Nil Rates Three Rates.	686,461.29
Total Bid Price (the amount to entered in paragraph 1 of the form of Bid) in words							9,894,554/-
Nine Million Four hundred Seven thousand Five hundred Sixty four Rupees only.							

Signature:
Company Name:

A.H. Builders
& Construction Co.

& CONSTRUCTION CO:

SCHEDULE OF PRICE

Name of Work:- CONSTRUCTION OF (10 NO.) R.C.C PIPE INLET ALONG SAMRADEE LINK DRAIN FROM RD. 0.0 TO 20.0

Bill No. 2) (A) Structures

Item Nr.	Description	Unit	Specifications Chapter Nr.	Quantity	Rate (Rs.)		Amount (Rs.)
					Figure	Words	
1	Excavation in foundation of building bridges and other structures with excavated earth watering and ramming lead one chain and lift upto 5' in ordinary soil.	P/Cft		3,246.00	4.12	Four Rupees Twelve Paise	13,403.14
2	Cement concrete plain including placing compacting finishing and curing complete including screening and washing of stone aggregate without shuttering ratio 1:3:6.	P/Cft		908.00	163.73	one hundred sixty three Rupees Seventy three Paise.	148,671.38
3	Pacca Brick work in foundation and plinth cement sand mortar Ratio 1:5	P/Cft		855.00	153.23	one hundred fifty eight Rupees Twenty three Paise.	135,337.13
4	Pacca brick other than bldg: including striking of joints upto 20 ft height in cement sand mortar ratio 1:5.	P/Cft		417.00	163.46	one hundred sixty three Rupees Forty six Paise	68,165.71
5	Providing & laying and jointing RCC pipes ASTM C-96-62 T/C-76-70 Class-II WALL.B and fixing in trench i.e cutting fitting and jointing with rubber ring i/c testing with water to specified pressure. 24" dia	P/Rft		32.00	499.56	Four hundred Eighty seven Rupees fifty six Paise	15,600.00
6	Cement Plaster 1:3 up to 20 ft. height 3/4" thick.	P/Sft		926.00	36.33	Thirty six Rupees thirty three Paise.	33,649.82

A.H. Builders

7	Borrow pit excavation undressed lead upto 100 ft. In ordinary soil	P/Cft	15,000.00	2.753	Two Bypass Savaly five Pairs	41,291.25
8	Dressing & leveling of earth work to design section etc complete.(b) Ordinary Soil	P/Cft	15,000.00	0.243	Ripon Nil Tumbly four Pairs.	3,648.45
Total Bid Price of 1 No. Pipe Inlet						459766.88
Total Bid Price of 10 No. Pipe Inlets (the amount to entered in paragraph 1 of the form of Bid) In words						4597667

**A.H. Builders
& Construction Co.**

Signature:
Company Name:

SCHEDULE OF PRICE

Name of Work:- CONSTRUCTION OF (04 NO.) VILLAGE ROAD BRIDGES ALONG SAMRADEE LINK DRAIN
FROM RD. 0.0 TO 20.0

Bill No. 2) (B) Structures

Item Nr.	Description	Unit	Specifications Chapter Nr.	Quantity	Rate (Rs.)		Amount (Rs.)
					Figure	Words	
1	Excavation in foundation of building bridges and other structures with excavated earth watering and ramming lead one chain and lift upto 5' in ordinary soil.	P/Cft		40486.00	4.12	four Rupees Twelve Paise	167,171.75/-
2	Cement concrete plain including placing compacting finishing and curing complete including screening and washing of stone aggregate without shuttering ratio 1:3:6.	P/Cft		2686.00	163.73	one hundred sixty three Rupees Seventy Three Paise	439,792.24
3	Cement Concrete Plain including placing compacting finishing curing up to 20 ft height in sand cement concrete Ratio 1:2:4	P/Cft		213.75	187.58	one hundred eighty seven Rupees fifty eight Paise.	40,095.28
4	Pacca Brick work in foundation and plinth cement sand mortar Ratio 1:5	P/Cft		2471.00	158.23	one hundred fifty eight Rupees Twenty eight Paise.	391,132.22
5	Pacca brick other than bldg: including striking of joints upto 20 ft height in cement sand mortar ratio 1:5.	P/Cft		5117.00	163.46	one hundred sixty three Rupees forty six Paise.	836,460.33

[Handwritten Signature]

6	Reinforced cement concrete work including all labour and material except the cost of steel reinforcement and its labour for bending and binding which will be paid separately. This rate also includes all kinds of forms, moulds, lifting, shuttering, curring, rendering and finishing the exposed surface (including screening and washing of shingle). (a) R.C.C work in roof slabs beams columns, rafts, lintels and other structural members laid in situ or precast laid in position complete in all respects (i) Ratio (1:2:4) 90 lbs cement 2 Cft Sand, 4 Cft Shingle 1/8" to 1/4" gauge.	P/Cft		495.00	433.16	Four hundred Thirty Eight Eight Rupees Ten Paise.	216,859.50
7	Fabrication of mild steel reinforcement for cement concrete including cutting, bending, laying in position making joints and fastening including cost of binding wire (also includes removal of rust from bars)	P/Cwt		23.51	6,266.26	Five Thousand Two hundred Twenty Six Rupees Twenty Six Only.	166,118.55
8	Borrow pit excavation undressed lead upto 100 ft.	P/Cft		28000.00	2.75	Two Rupees Seven and five Paise	77,077.00
9	Dressing & leveling of earth work to design section etc complete. (b) Ordinary Soil	P/Cft		28000.00	0.24	Twenty four Paise.	6,816.06
10	Cement Plaster 1:3 up to 12 ft height 3/4" thick.	P/Cft		1506.00	36.33	Thirty Six Rupees Thirty Three Paise.	54,726.38
11	Erection and Removal of centering of RCC or plain cement concrete work of deodar wood (2nd class (a) (i) Horizontal Floor.	P/Sft		668.00	105.51	one hundred Rupees only.	66,807.14

12	Full Hire charges of Pumping set per day including of the wages of driver and assistant fuel or electric energy required plate form with suction and delivery pipe for pumping out water from trench i/c the cost of erection and dismantling of acopements after completion of job.	P/Day		90.00	1950.00	one thousand nine hundred fifty Rupees only.	175,500.00
Total Bid Price of 1 No. Village Road Bridge 2638550/-							
Total Bid Price of 04 No. Village Road Bridge (the amount to entered in paragraph 1 of the form of Bid) In words 10554203/-							

Signature:
Company Name:

A.H. Builders
Construction Co.

SCHEDULE OF PRICE

Name of Work:- CONSTRUCTION OF (12 NO.) WATER COURSE CROSSING ALONG SAMRADEE
LINK DRAIN FROM RD. 0.0 TO 20.0

Bill No. 2) (C) Structures

Item Nr.	Description	Unit	Specifications Chapter Nr.	Quantity	Rate (Rs.)		Amount (Rs.)
					Figure	Words	
1	Excavation in foundation of building bridges and other structures with excavated earth watering and ramming lead one chain and lift upto 5' in ordinary soil.	P/Cft		17432.00	4.129	four Pappes on Twelve Pappes.	71,978.91
2	Cement concrete plain including placing compacting finishing and curing complete including screening and washing of stone aggregate without shuttering ratio 1:3:6.	P/Cft		1015.00	163.73	one hundred Sixty three Pappes Seventy three Pappes.	166,191.03
3	Cement Concrete Plain including placing compacting finishing curing up to 20 ft height in sand cement concrete Ratio 1:2:4	P/Cft		246.00	187.58	one hundred Eighty seven Pappes fifty Eight Pappes.	46,144.74
4	Pacca Brick work in foundation and plinth cement sand mortar Ratio 1:5	P/Cft		2706.00	158.28	one hundred fifty Eight Pappes Twenty Eight Pappes.	428,330.14
5	Pacca brick other than bldg: including striking of joints upto 20 ft height in cement sand mortar ratio 1:5.	P/Cft		1769.00	163.46	one hundred Sixty three Pappes Twenty five Pappes.	289,173.02



A.H. Builders

6	Reinforced cement concrete work including all labour and material except the cost of steel reinforcement and its labour for bending and binding which will be paid separately. This rate also includes all kinds of forms, moulds, lifting, shuttering, curring, rendering and finishing the exposed surface (including screening and washing of shingle). (a) R.C.C work in roof slabs beams columns, rafts, lintels and other structural members laid in situ or precast laid in position complete in all respects (i) Ratio (1:2:4) 90 lbs cement 2 Cft Sand, 4 Cft Shingle 1/8" to 1/4" gauge.	P/Cft		510.00	438.16	Four hundred Thirty Eight Rupees Ten Paise.	223,431.60
7	Fabrication of mild steel reinforcement for cement concrete including cutting, bending, laying in position making joints and fastening including cost of binding wire (also includes removal of rust from bars)	P/Cwt		27.32	6,266.26	Six Thousand Two hundred Sixty Six Rupees Twenty Six Paise.	166,118.55
8	Borrow pit excavation undressed lead upto 100 ft.	P/Cft		12000.00	2.75	Two Rupees Seventy Five Paise.	77,077.00
9	Dressing & leveling of earth work to design section etc complete. (b) Ordinary Soil	P/Cft		12000.00	6.24	Rupees Nil Twenty Four Paise.	6,816.44
10	Cement Plaster 1:3 up to 12 ft height 3/4" thick.	P/Cft		2086.00	36.33	Twenty Six Rupees Thirty Three Paise.	54,726.38
11	Erection and Removal of centering of RCC or plain cement concrete work of deodar wood (2nd class (a) (i) Horizontal Floor.	P/Sft		456.00	100.61	One hundred Rupees Only.	66,869.14


A. H. Builders

12	Full hire charges of Pumping set per day including of the wages of driver and assistant fuel or electric energy required plate form with suction and delivery pipe for pumping out water from trench i/c the cost of erection and dismantling of acopements after completion of job.	P/Day	60.00	1950.0	one Thru hole handout fitting Pass.	175500.00
Total Bid Price of 1 No. Water Course Crossing						
Total Bid Price of 12 No. Water Course Crossing (the amount to entered in paragraph 1 of the form of Bid) in words						
						1670802/-
						20047632/-

Signature:

Company Name:

**A. H. Builders
& Construction Co.**

SCHEDULE OF PRICE

Name of Work:- CONSTRUCTION OF OUTFALL STRUCTURE ALONG MATLI BRANCH DRAIN
AT RD. 35.0.

Bill No. 2 (D) Structures

Item Nr.	Description	Unit	Specifications Chapter Nr.	Quantity	Rate (Rs.)		Amount (Rs.)
					Figure	Words	
1	Excavation in foundation of building bridges and other structures with excavated earth watering and ramming lead one chain and lift upto 5' in ordinary soil.	P/Cft		40486.00	4.12	Four Rupees Twelve Paisa	167,171.75
2	Cement concrete plain including placing compacting finishing and curing complete including screening and washing of stone aggregate without shuttering ratio 1:3:6.	P/Cft		2686.00	163.73	one hundred sixty Three Rupees seventy Three Paisa.	439,772.21
3	Cement Concrete Plain including placing compacting finishing curing up to 20 ft height in sand cement concrete Ratio 1:2:4	P/Cft		214.00	187.53	one hundred eighty seven Rupees forty eight Paisa.	40,095.28
4	Pacca Brick work in foundation and plinth cement sand mortar Ratio 1:5	P/Cft		2471.00	158.28	one hundred fifty eight Rupees twenty eight Paisa.	391,132.22
5	Pacca brick other than bldg: including striking of joints upto 20 ft height in cement sand mortar ratio 1:5.	P/Cft		5117.00	163.467	one hundred sixty three Rupees forty six Paisa.	836,460.33

A.H. Builders
& Construction Co.

6	Reinforced cement concrete work including all labour and material except the cost of steel reinforcement and its labour for bending and binding which will be paid separately. This rate also includes all kinds of forms, moulds, lifting, shuttering, curring, rendering and finishing the exposed surface (including screening and washing of shingle). (a) R.C.C work in roof slabs beams columns, rafts, lintels and other structural members laid in situ or precast laid in position complete in all respects (i) Ratio (1:2:4) 90 lbs cement 2 Cft Sand, 4 Cft Shingle 1/8" to 1/4" gauge.	P/Cft		495.00	438.10	Two hundred thirty eight Pipers Total Paise	216,859.50
7	Fabrication of mild steel reinforcement for cement concrete including cutting, bending, laying in position making joints and fastening including cost of binding wire (also includes removal of rust from bars)	P/Cwt		26.51	6266.26	One thousand Two hundred thirty eight Pipers Total Paise.	166,118.55
8	Borrow pit excavation undressed lead upto 100 ft.	P/Cft		28000.00	2.75	Two Pipers Sewerly Five Paise.	77,077.50
9	Dressing & leveling of earth work to design section etc complete. (b) Ordinary Soil	P/Cft		28000.00	0.24	Zero. Twenty four Paise	6816.44
10	Cement Plaster 1:2 up to 20 gt height 1/2" thick.	P/Sft		1506.00	36.33	Twenty eight Pipers Total Three Paise.	54,726.33
11	Erection and Removal of centering of RCC or plain cement concrete work of deodar wood (2nd class (a) (i) Horizontal Floor.	P/Sft		668.00	100.01	One hundred Pipers Three one Paise	66,807.14
12	Full Hire charges of Pumping set per day including of the wages of driver and assistant fuel or electric energy required plate form with suction and delivery pipe for pumping out water from trench i/c the cost of erection and dismantling of acopements after completion of job.	P/day		90.00	143.00	One thousand nine hundred fifty Pipers.	175,566.00

2638551/-

Total Bid Price of 1 No. UNDER PASS ACQUEDUCTS

Total Bid Price of 0 No. UNDER PASS ACQUEDUCTS (the amount to entered in paragraph 1 of the form of Bid) In words

Signature:
Company Name:


A. H. Builders
Construction Co.

SCHEDULE OF PRICE

Name of Work:- CONSTRUCTION OF WATER COURSE CROSSING OVER SHADI BAHADUR
BRANCH DRAIN AT RD. 10.0

Bill No. 2 (E) Structures

Item Nr.	Description	Unit	Specifications Chapter Nr.	Quantity	Rate (Rs.)		Amount (Rs.)
					Figure	Words	
1	Excavation in foundation of Bldg: bridges & other structures including dag belling dressing refilling around structures with excavated earth watering and ramming lead e 5 ft in ordinary soil	P/Cft		21607.00	3.14	Three Rupees Fourteen Paise.	67,975.62
2	Cement Concrete plain including placing compacting finishing and curing complete incl: screening and washing of stone agg: without shuttering ratio 1:3:6.	P/Cft		3051.00	163.73	one hundred Sixty Three Rupees Seventy Three Paise.	499,555.49
3	Pacca Brick work: in foundation and plinth cement sand mortar Ratio 1:5	P/Cft		1838.00	158.28	one hundred Fifty Eight Rupees Twenty Eight Paise.	290,935.26
4	Pacca brick other than bldg: including striking of joints upto 20 ft height in cement sand mortar ratio 1:5.	P/Cft		3120.00	163.46	one hundred Sixty Three Rupees Forty Six Paise.	510,016.85
5	Cement Concrete plain including placing compacting finishing and curing complete incl: screening and washing of stone agg: without shuttering ratio 1:2:4.	P/Cft		206.00	187.53	one hundred Eighty Seven Rupees Fifty Eight Paise.	38,641.53
6	Supplying & fabrication of M/steel reinforcement for C.C incl: cutting bending laying in position making joints and fastening incl: cost of binding wires and removal of rust from Bars.	P/Cwt		30.27	6266.26	Six Thousand Two hundred Sixty Six Rupees, Twenty Six Paise.	189,679.69

Builders

Construction Co:

7	<p>RCc work incl: all labour and material except the cost of steel reinf. and its labour for bending and binding which will be paid separately. This rate also includes all kinds of forms moulds lifting shuttering curing rendering and finishing the exposed surface incl: screening and washing of shingle. (a) RCC work in roof slabs beams, columns rafts lintels and other structural members laid in situ or precast laid in position complete in all respect ratio 1:2:4.</p>	P/Cft	565.00	438.10	<p>Four hundred Thirty Eight Six Wc Pipes Ten Four.</p>	247,526.50
8	<p>Full hire charges of pumping sets per day inclusive of the wages of driver and assistants, fuel or electric energy, platform required for placing pumps etc. at lower depth with suction and deliver pipes for pumping out water found at various depth for trenches including the cost of erection and dismantling after completion of job. Hire Charges of Pumping Sets of upto pumping out water from 10 ft deep trench</p>	P/Day	60.00	1950.00	<p>One thousand nine hundred Fifty Pipes only.</p>	117,000.00
9	<p>Cement Plaster 1:2 upto 12 ft height ¾" thick</p>	P/Sft	1163.00	39.73	<p>Thirty nine Pipes Sandy Three Pipes.</p>	6476.98
10	<p>Erection & removal of centering for R.C.C or plain C.C works of deodar wood (2nd class) Vertical</p>	P/Sft	229.00	91.00	<p>ninety one Pipes only</p>	20,839.00
Total Bid Price of 1 No. Water Course Crossing						1988647/-

Signature:
Company Name:

A. H. Builders
Construction Co.

SCHEDULE OF PRICE

Name of Work:- CONSTRUCTION OF BOX CULVERT ALONG PHULLELI GUNI OUTFALL DRAIN AT RD. 82 NIP SIDE

Bill No. 2 (F) Structures

Item Nr.	Description	Unit	Specifications Chapter Nr.	Quantity	Rate (Rs.)		Amount (Rs.)
					Figure	Words	
1	Excavation in foundation of building bridges and other structures with excavated earth watering and ramming lead one chain and lift upto 5' in ordinary soil.	P/Cft		20732.00	3.14	Three Pipes Foster Paisa	65,223.46
2	Filling, watering and ramming earth under floors with new earth (Excavated from outside) lead upto one chain and lift upto 5 feet	P/Cft		1044.00	4.71	Four Pipes Sewley one Paisa.	4928.41
3	Stone Filling dry hand pack as filling behind retaining walls or in pitching and apron.	P/Cft		696.00	34.89	Three Pipes Foster Nine Paisa	24,293.56
4	Cement concrete plain including placing compacting finishing and curing complete including screening and washing of stone aggregate without shuttering ratio 1:3:6.	P/Cft		509.00	163.73	One Water Three Pipes Sewley Three Paisa.	83,402.52


A.H. Builders
 & Construction Co.

5	Reinforced cement concrete work including all labour and material except the cost of steel reinforcement and its labour for bending and binding which will be paid separately. This rate also includes all kinds of forms, moulds, lifting, shuttering, curring, rendering and finishing the exposed surface (including screening and washing of shingle). (a) R.C.C work in roof slabs beams columns, rafts, lintels and other structural members laid in situ or precast laid in position complete in all respects (i) Ratio (1:2:4) 90 lbs cement 2 Cft Sand, 4 Cft Skingle 1/8" to 1/4" gauge.	P/Cft			1627.00	438.16	Four hundred Twenty Eight Ropes Ten Pairs	247526.50
6	Fabrication of mild steel reinforcement for cement concrete including cutting, bending, laying in position making joints and finishing including cost of binding wire (also includes removal of rust from bars)	P/Cwt			94.42	6266.26	8 in Thermal Two headed Sixty Six Ropes Ten Pairs	591685.33
7	Borrow pit excavation undressed lead upto 100 ft.	P/Cft			100000.00	2.75	Two Ropes Sixty five Pairs	275275.0
8	Dressing & leveling of earth work to design section etc complete. (b) Ordinary Soil	P/Cft.			100000.00	6.24	Zero Build Ten Pairs	24381.50
9	Full Hire charges of Pumping set per day including of the wages of driver and assistant fuel or electric energy required plate form with suction and delivery pipe for pumping out water from trench i/c the cost of erection and dismantling of accopements after completion of job.	P/ days			20.00	1950.0	one Ropes thirty five Pairs	39000.0
Total Bid Price of 1 No. Water Course Crossing								1820978/-

Signature:
Company Name:


A.H. Builders

SCHEDULE OF PRICE

Name of Work:- CONSTRUCTION OF WATER COURSE CROSSING OVER 1R OF TANDO MUHAMMAD KHAN
BRANCH DRAIN AT RD. 26.0

Bill No. 2) (G) Structures

Item No.	Description	Unit	Specifications Chapter No.	Quantity	Rate (Rs.)		Amount (Rs.)
					Figure	Words	
1	Excavation in foundation of Bldg; bridges & other structures including dag belling dressing refilling around structures with excavated earth watering and ramming lead e 5 ft in ordinary; soil	P/Cft		21607.00	3.14	Three Rupees Fourteen Paise.	67,975.62
2	Cement Concrete plain including placing compacting finishing and curing complete incl: screening and washing of stone agg: without shuttering ratio 1:3:6.	P/Cft		3051.00	163.73	one hundred sixty Three Rupees Seventy Three Paise	499,555.49
3	Pacca Brick work in foundation and plinth cement sand mortar Ratio 1:5	P/Cft		1838.00	158.28	one hundred fifty eight Rupees Twenty eight Paise.	290,935.26
4	Pacca brick other than bldg: including striking of joints upto 20 ft height in cement sand mortar ratio 1:5.	P/Cft		3120.00	163.46	one hundred sixty three Rupees forty six Paise.	510,016.85
5	Cement Concrete plain including placing compacting finishing and curing complete incl: screening and washing of stone agg: without shuttering ratio 1:2:4.	P/Cft		206.00	187.58	one hundred eighty seven Rupees fifty eight Paise.	38,641.53
6	Supplying & fabrication of M/steel reinforcement for C.C incl: cutting bending laying in position making joints and fastening incl: cost of binding wires and removal of rust from Bars.	P/Cwt		30.27	6266.26	Six Thousand Two hundred Sixty Six Rupees Twenty Six Paise.	189,679.69

A.H. Builders
& Construction Co.

7	RCC work incl: all labour and material except the cost of steel reinf: and its labour for bending and binding which will be paid separately. This rate also includes all kinds of forms moulds lifting shuttering curing rendering and finishing the exposed surface incl: screening and washing of shingle. (a) RCC work in roof slabs beams, columns rafts lintels and other structural members laid in situ or precast laid in position complete in all respect ratio 1:2:4.	P/Cft		565.00	438.16	Four hundred Thirty Eight Ropes Tied Pairs.	247,526.50
8	Full hire charges of pumping sets per day inclusive of the wages of driver and assistants, fuel or electric energy, platform required for placing pumps etc. at lower depth with suction and deliver pipes for pumping out water found at various depth for trenches including the cost of erection and dismantling after completion of job. Hire Charges of Pumping Sets of upto pumping out water from 10 ft deep trench	P/Day		60.00	1950.00	One Thousand One Hundred Fifty Ropes only.	117000.00
9	Cement Plaster 1:2 upto 12 ft height ¾" thick	P/Sft		1163.00	39.73	Thirty nine Ropes each by Three Pairs.	6476.98
10	Erection & removal of centering for R.C.C or plain C.C works of deodar wood (2nd class) Vertical	P/Sft		229.00	91.00	ninety one Ropes only.	20899.00
Total Bid Price of 1 No. Water Course Crossing							1988697/-

Signature:
Company Name:


A.H. Builders & Construction Co.

SCHEDULE OF PRICE

Name of Work:- CONSTRUCTION OF (05 NO.) R.C.C PIPE INLET ALONG WESTERN MIR MAIN DRAIN
(WHERE NECESSARY)

Bill No. 2) (H) Structures

Item Nr.	Description	Unit	Specifications Chapter Nr.	Quantity	Rate (Rs.)		Amount (Rs.)
					Figure	Words	
1	Excavation in foundation of building bridges and other structures with excavated earth watering and ramming lead one chain and lift upto 5' in ordinary soil.	P/Cft		3,246.00	4.002	Four Rupees Nil Paise.	12,996.74/-
2	Cement concrete plain including placing compacting finishing and curing complete including screening and washing of stone aggregate without shuttering ratio 1:3:6.	P/Cft		908.00	158.697	one hundred fifty eight Rupees Sixty nine Paise.	144,096.88/-
3	Pacca Brick work in foundation and plinth cement sand mortar Ratio 1:5	P/Cft		855.00	153.419	one hundred fifty three Rupees forty one Paise.	131,172.91
4	Pacca brick other than bldg: including striking of joints upto 20 ft height in cement sand mortar ratio 1:5.	P/Cft		417.00	158.437	one hundred fifty eight Rupees forty three Paise.	66,068.31
5	Providing & laying and jointing RCC pipes ASTM C-96-62 T/C-76-70 Class-II WALL B and fixing in trench i.e cutting fitting and jointing with rubber ring i/c testing with water to specified pressure. 24" dia	P/Rft		32.00	1094.940	Rupees one thousand ninety four Rupees ninety four Paise.	35,038.08
6	Cement Plaster 1:3 up to 20 ft. height 3/4" thick.	P/Sft		926.00	35.221	Thirty five Rupees Twenty two Paise.	32,614.44

7	Borrow pit excavation undressed lead upto 100 ft. In ordinary soil	P/Cft	15,000.00	2.668	Two Ruyess Sixty Six Pipes.	46,020.75
8	Dressing & leveling of earth work to design section etc complete. (b) Ordinary Soil	P/Cft	15,000.00	0.236	Nil Ruyess, Turned by M. R. R. Pipes.	3536.19
Total Bid Price of 1 No. Pipe Inlet						
Total Bid Price of 05 No. Pipe Inlets (the amount to entered in paragraph 1 of the form of Bid) In words						
Two Million Two hundred Seven thousand Six hundred ninety one Pipes only.						

[Handwritten Signature]

Signature:
Company Name:

**A.H. Builders
& Construction Co.**

SCHEDULE OF PRICE

Name of Work:- **CONSTRUCTION OF WATER COURSE CROSSING OVER MORHADI DRAIN AT RD. 7.0.**

Bill No. 2 (I) Structures

Item Nr.	Description	Unit	Specifications Chapter Nr.	Quantity	Rate (Rs.)		Amount (Rs.)
					Figure	Words	
1	Excavation in foundation of Bldg: bridges & other structures including dag belling dressing refilling around structures with excavated earth watering and ramming lead e 5 ft in ordinary: soil	P/Cft		21607.00	3.098	Three Rupees Nall Paise.	66,929.84
2	Cement Concrete plain including placing compacting finishing and curing complete incl: screening and washing of stone agg: without shuttering ratio 1:3:6.	P/Cft		3051.00	161.216	one hundred Sixty one Rupees Twenty one Paise.	491,870.02
3	Pacca Brick work in foundation and plinth cement sand mortar Ratio 1:5	P/Cft		1838.00	155.834	one hundred fifty five Rupees Eighty three Paise.	286,457.33
4	Pacca brick other than bldg: including striking of joints upto 20 ft height in cement sand mortar ratio 1:5.	P/Cft		3120.00	160.952	one hundred Sixty Rupees ninety five Paise.	502,170.44
5	Cement Concrete plain including placing compacting finishing and curing complete incl: screening and washing of stone agg: without shuttering ratio 1:2:4.	P/Cft		206.00	184.694	one hundred Eighty four Rupees Sixty nine Paise.	38,047.05
	Supplying & fabrication of M/steel reinforcement for C. C. incl: cutting bending					Six Thousand one hundred	

7	RCC work incl: all labour and material except the cost of steel reinf: and its labour for bending and binding which will be paid separately. This rate also includes all kinds of forms moulds lifting shuttering curing rendering and finishing the exposed surface incl: screening and washing of shingle.(a) RCC work in roof slabs beams, columns rafts lintels and other structural members laid in situ or precast laid in position complete in all respect ratio 1:2:4.	P/Cft	565.00	431.360	Four hundred Thirty one Rupees Thirty Six Paise.	243,718.40/-
8	Full hire charges of pumping sets per day inclusive of the wages of driver and assistants, fuel or electric energy, platform required for placing pumps etc. at lower depth with suction and deliver pipes for pumping out water found at various depth for trenches including the cost of erection and dismantling after completion of job. Hire Charges of Pumping Sets of upto pumping out water from 10 ft deep trench	P/Day	60.00	1920.00	one Thousand nine hundred Twenty Rupees Nil Paise.	15,200.00/-
9	Cement Plaster 1:2 upto 12 ft height 3/4" thick	P/Sft	1163.00	39.125	Thirty nine Rupees Twelve Paise.	6377.33/2
10	Erection & removal of centering for R.C.C or plain C.C works of deodar wood (2nd class) Vertical	P/Sft	229.00	87.600	Eighty seven Rupees Sixty Paise.	20,518.40/2
Total Bid Price of 1 No. Water Course Crossing <i>One Million nine hundred Fifty Eight Thousand Fifty Two Rupees only.</i>						1958052/-

Signature:
Company Name:

A.H. Builders
& Construction Co.

Issued to M/s. Bashir Ahmed Contractor
vide DR No-06, dated 01-01-2018

[Signature]
Executive Engineer
Drainage Division
Badin.

Government of Sindh



IRRIGATION DEPARTMENT

**Construction of Samralee Link Drain from RD. 0.0
to RD. 20.0 Outfalling in 1R of Matli Branch Drain
at RD. 35.0**

PACKAGE NO. 01

SUMMARY OF BID PRICE

CONSTRUCTION OF SAMRADEE LINK DRAIN FROM RD. 0.0 TO 20.0 OUTFALLING IN 1R OF MATLI BRANCH DRAIN AT RD. 35.0.

CONTRACT NAME

Bill Nr.	Description	Amount
1	Earth Work	10,512,924-00
2	a) CONSTRUCTION OF (10 NO.) R.C.C PIPE INLET ALONG SAMRADEE LINK DRAIN FROM RD. 0.0 TO 20.0	4825329-00
	b) CONSTRUCTION OF (04 NO.) VILLAGE ROAD BRIDGES ALONG SAMRADEE LINK DRAIN FROM RD. 0.0 TO 20.0	10981904-00
	c) CONSTRUCTION OF (12 NO.) WATER COURSE CROSSING ALONG SAMRADEE LINK DRAIN FROM RD. 0.0 TO 20.0	19467634-00
	d) CONSTRUCTION OF OUTFALL STRUCTURE ALONG MATLI BRANCH DRAIN AT RD. 35.0.	2747194-00
	e) CONSTRUCTION OF WATER COURSE CROSSING OVER SHADI BAHADUR BRANCH DRAIN AT RD. 10.0	2333049-00
	f) CONSTRUCTION OF BOX CULVERT ALONG PHULLELI GUNI OUTFALL DRAIN AT RD. 82 NIP SIDE	1861693-00
	g) CONSTRUCTION OF WATER COURSE CROSSING OVER 1R OF TANDO MUHAMMAD KHAN BRANCH DRAIN AT RD. 26.0	2060187-00
	h) CONSTRUCTION OF (05 NO.) R.C.C PIPE INLET ALONG WESTRN MIR MAIN DRAIN (WHERE NECESSARY)	2409285-00
	i) CONSTRUCTION OF WATER COURSE CROSSING OVER MORHADI DRAIN AT RD. 7.0.	2075740-00
	Total Bid Price (the amount to entered in paragraph 1 to 2 of the form of bid in words <i>Fifty nine million two hundred seventy four thousand nine hundred thirty nine rupees only</i>)	59274939-00


Executive Engineer
Drainage Division
Badin

Signature: 
Company Name: **MS BACHIR AHMED**
CONTRACTOR

SCHEDULE OF PRICE

Name of Work:- CONSTRUCTION OF SAMRADEE LINK DRAIN FROM RD. 0.0 TO 20.0.

Bill No. 1: Earth Work

Item Nr.	Description	Unit	Specification Chapter Nr.	Quantity	Rate (Rs.)		Amount (Rs.)
					Figure	Words	
1	Jungle clearance and removing within 100' light.	100 Sft		666667.00	8.70	Eight Rupees Seventy Paise	58000.03
2	Earth work excavation in Irrigation channels drain etc dressed to designed section grades and profiles excavated material disposed off and dressed within 50' lead in ordinary soil.	P/Cft		1752410.00	4.12	Four Rupees Twelve Paise	7219928-
3	Borrow pit excavation undressed lead up to 100' ordinary.	P/Cft		319113.00	2.40	Two Rupees forty Paise all up	765871.20
4	Carriage of Sweet Earth Lead 3 - miles	P/Cft		319113.00	5.79	Five Rupees seventy Nine Paise	1847664.27
5	Earth work compaction (Soft ordinary or hard soil) laying earth in 6" layer leveling watering for compaction etc complete.	P/Cft		2071523.00	0.30	Thirty Paise	621456.90
<p>Total Bid Price (the amount to entered in paragraph 1 of the form of Bid) In words <i>One crore five two five thousand nine hundred twenty one and forty paise 10512821.40</i></p>							


 Executive Engineer
 Drainage Division
 Badin

Signature:
 Company Name:


M/S BASHIR AHMED
 CONTRACTOR


SCHEDULE OF PRICE

Name of Work:- CONSTRUCTION OF (10 NO.) R.C.C PIPE INLET ALONG SAMRADEE LINK DRAIN FROM

RD. 0.0 TO 20.0

Bill No. 2) (A) Structures

Item Nr.	Description	Unit	Specifications Chapter Nr.	Quantity	Rate (Rs.)		Amount (Rs.)
					Figure	Words	
1	Excavation in foundation of building bridges and other structures with excavated earth watering and ramming lead one chain and lift upto 5' in ordinary soil.	P/Cft		3,246.00	3.65	Three Rupas and sixty five paisa	11847.90
2	Cement concrete plain including placing compacting finishing and curing complete including screening and washing of stone aggregate without shuttering ratio 1:3:6.	P/Cft		908.00	162.00	One hundred sixty two only	147096.00
3	Pacca Brick work in foundation and plinth cement sand mortar Ratio 1:5	P/Cft		855.00	157.00	One hundred fifty seven only	134235.00
4	Pacca brick other than bldg: including striking of joints upto 20 ft height in cement sand mortar ratio 1:5.	P/Cft		417.00	162.00	One hundred sixty two only	67554.00
5	Providing & laying and jointing RCC pipes ASTM C-96-62 T/C-76-70 Class-II WALL B and fixing in trench i.e cutting fitting and jointing with rubber ring i/c testing with water to specified pressure. 24" dia	P/Rft		32.00	1000.00	One Thousand only	32000.00
6	Cement Plaster 1:3 up to 20 ft. height 3/4" thick.	P/Sft		926.00	50.00	fifty only	46300.00


 Executive Engineer
 Drainage Division
 Bada

MTS DASHIRAHMED
 CONTRACTOR

7	Borrow pit excavation undressed lead upto 100 ft. In ordinary soil	P/Cft	15,000.00	2.65	Two Paces and sixty five Paise	39750-
8	Dressing & leveling of earth work to design section etc complete. (b) Ordinary Soil	P/Cft	15,000.00	0.25	Twenty five Paise	3750-
Total Bid Price of 1 No. Pipe Inlet						482532.90
Total Bid Price of 10 No. Pipe Inlets (the amount to entered in paragraph 1 of the form of Bid) In words						4825328.00
<i>Forty eight Lacs twenty five thousand three hundred twenty nine only.</i>						

Badin

[Signature]
 Executive Engineer
 Drainage Division
 Badin

Signature:
 Company Name:

SCHEDULE OF PRICE

Name of Work:- **CONSTRUCTION OF (04 NO.) VILLAGE ROAD BRIDGES ALONG SAMRADEE LINK DRAIN**
FROM RD. 0.0 TO 20.0

Bill No. 2) (B) Structures

Item Nr.	Description	Unit	Specifications Chapter Nr.	Quantity	Rate (Rs.)		Amount (Rs.)
					Figure	Words	
1	Excavation in foundation of building bridges and other structures with excavated earth watering and ramming lead one chain and lift upto 5' in ordinary soil.	P/Cft		40486.00	3.65	Three Rupees & sixty five Paise	147773-90
2	Cement concrete plain including placing compacting finishing and curing complete including screening and washing of stone aggregate without shuttering ratio 1:3:6.	P/Cft		2686.00	175.00	One hundred seventy five dy	470050-00
3	Cement Concrete Plain including placing compacting finishing curing up to 20 ft height in sand cement concrete Ratio 1:2:4	P/Cft		213.75	200.00	Two hundred only	42750-00
4	Pacca Brick work in foundation and plinth cement sand mortar Ratio 1:5	P/Cft		2471.00	174.50	One hundred seventy four and fifty Paise	431188.50
5	Pacca brick other than bldg: including stricking of joints upto 20 ft height in cement sand mortar ratio 1:5.	P/Cft		5117.00	176.00	One hundred seventy six only	905892.00

[Signature]
 Executive Engineer
 Drainage Division
 Badli

M/S BASHIR AHMED
 CONTRACTOR

6	Reinforced cement concrete work including all labour and material except the cost of steel reinforcement and its labour for bending and binding which will be paid separately. This rate also includes all kinds of forms, moulds, lifting, shuttering, curing, rendering and finishing the exposed surface (including screening and washing of shingle). (a) R.C.C work in roof slabs beams columns, rafts, lintels and other structural members laid in situ or precast laid in position complete in all respects (i) Ratio (1:2:4) 90 lbs cement 2 Cft Sand, 4 Cft Shingle 1/8" to 1/4" gauge.	P/Cft	495.00	420	Four hundred twenty only	257900000
7	Fabrication of mild steel reinforcement for cement concrete including cutting, bending, laying in position making joints and fastening including cost of binding wire (also includes removal of rust from bars)	P/Cwt	26.51	5570	Five thousand five hundred seventy only	14766070
8	Borrow pit excavation undressed lead upto 100 ft.	P/Cft	28000.00	260	Two hundred sixty	72800000
9	Dressing & leveling of earth work to design section etc complete. (b) Ordinary Soil	P/Cft	28000.00	0.25	Twenty five Paisa only	7000000
10	Cement Plaster 1:3 up to 12 ft height 3/4" thick.	P/Cft	1506.00	65	Sixty five only	9780000
11	Erection and Removal of centering of RCC or plain cement concrete work of deodar wood (2nd class (a) (i) Horizontal Floor.	P/Sft	668.00	90	Ninety five only	60120000

(Signature)

(Signature)

M/S BASHIR AHMED
CONTRACTOR

12	Full Hire charges of Pumping set per day including of the wages of driver and assistant fuel or electric energy required plate form with suction and delivery pipe for pumping out water from trench i/c the cost of erection and dismantling of acopements after completion of job.	P/Day		90.00 (75)	one thousand seven hundred seventy five	159750.00
Total Bid Price of 1 No. Village Road Bridge 2745476.10						
Total Bid Price of 04 No. Village Road Bridge (the amount to entered in paragraph 1 of the form of Bid) In words One Crore nine Lacs eighty one thousand nine hundred and four only and forty Paise 10981904.40						

[Signature]
 Executive Engineer
 District Division
 Bapat

Signature: *[Signature]*
 Company Name: **M/S BASHIR AHMED CONTRACTOR**

SCHEDULE OF PRICE

Name of Work:- CONSTRUCTION OF (12 NO.) WATER COURSE CROSSING ALONG SAMRADEE
LINK DRAIN FROM RD. 0.0 TO 20.0

Bill No. 2) (C) Structures

Item Nr.	Description	Unit	Specifications Chapter Nr.	Quantity	Rate (Rs.)		Amount (Rs.)
					Figure	Words	
1	Excavation in foundation of building bridges and other structures with excavated earth watering and ramming lead one chain and lift upto 5' in ordinary soil.	P/Cft		17432.00	3.65	Three Rupees sixty five Paise	63626.50
2	Cement concrete plain including placing compacting finishing and curing complete including screening and washing of stone aggregate without shuttering ratio 1:3:6.	P/Cft		1015.00	161.00	One hundred sixty one only	163415.00
3	Cement Concrete Plain including placing compacting finishing curing up to 20 ft height in sand cement concrete Ratio 1:2:4	P/Cft		246.00	183.00	One hundred eighty three only	45018.00
4	Pacca Brick work in foundation and plinth cement sand mortar Ratio 1:5	P/Cft		2706.00	156.00	One hundred rool fifty six only	422136.00
5	Pacca brick other than bldg: including stricking of joints upto 20 ft height in cement sand mortar ratio 1:5.	P/Cft		1769.00	162.50	One hundred sixty two and fifty Paise	287462.50


 Executive Engineer
 Drainage Division



M/S BASIR AHMED
 CONTRACTOR

6	Reinforced cement concrete work including all labour and material except the cost of steel reinforcement and its labour for bending and binding which will be paid separately. This rate also includes all kinds of forms, moulds, lifting, shuttering, curring, rendering and finishing the exposed surface (including screening and washing of shingle). (a) R.C.C work in roof slabs beams columns, rafts, lintels and other structural members laid in situ or precast laid in position complete in all respects (i) Ratio (1:2:4) 90 lbs cement 2 Cft Sand, 4 Cft Shingle 1/8" to 1/4" gauge.	P/Cft	510.00	410-	Four hundred ten only	209100-
7	Fabrication of mild steel reinforcement for cement concrete including cutting, bending, laying in position making joints and fastening including cost of binding wire (also includes removal of rust from bars)	P/Cwt	27.32	5555-	Five thousand five hundred fifty five only	151762-60
8	Borrow pit excavation undressed lead upto 100 ft.	P/Cft	12000.00	2060	Two Rupees sixty paise only	31200-
9	Dressing & leveling of earth work to design section etc complete. (b) Ordinary Soil	P/Cft	12000.00	0.25	Twenty five Paise only	3000-
10	Cement Plaster 1:3 up to 12 ft height 3/4" thick.	P/Cft	2086.00	47-00	forty seven only	98002-
11	Erection and Removal of centering of RCC or plain cement concrete work of deodar wood (2nd class (a) (i) Horizontal Floor.	P/Sft	456.00	90-00	Ninety only	41040-

50/10/11

[Signature]
 Executive Engineer
 Drainage Division
 Baidia

M/S BASHIR AHMED
 CONTRACTOR

12	Full Hire charges of Pumping set per day including of the wages of driver and assistant fuel or electric energy required plate form with suction and delivery pipe for pumping out water from trench i/c the cost of erection and dismantling of acopements after completion of job.	P/Day	60.00	1775-	one thousand seven hundred seventy five only	106500-
Total Bid Price of 1 No. Water Course Crossing 162230290						
Total Bid Price of 12 No. Water Course Crossing (the amount to entered in paragraph 1 of the form of Bid) In words One Crore twenty four Lacs sixty seven Thousand six hundred Thirty four and 19467634-80 eighty paise.						

Signature: *Syed*
 Company Name: **MR. SAIR AHMED CONTRACTOR**

[Signature]
 Executive Engineer
 Drainage Division
 Bhubin

SCHEDULE OF PRICE

Name of Work:- CONSTRUCTION OF OUTFALL STRUCTURE ALONG MATLI BRANCH DRAIN
AT RD. 35.0.

Bill No. 2) (D) Structures


Item Nr.	Description	Unit	Specifications Chapter Nr.	Quantity	Rate (Rs.)		Amount (Rs.)
					Figure	Words	
1	Excavation in foundation of building bridges and other structures with excavated earth watering and ramming lead one chain and lift upto 5' in ordinary soil.	P/Cft		40486.00	3.65	Three Rupees and sixty five Paise	147773.90
2	Cement concrete plain including placing compacting finishing and curing complete including screening and washing of stone aggregate without shuttering ratio 1:3:6.	P/Cft		2686.00	1.80	One hundred eighty only	48348-
3	Cement Concrete Plain including placing compacting finishing curing up to 20 ft height in sand cement concrete Ratio 1:2:4	P/Cft		214.00	200-	Two hundred only	4280-
4	Pacca Brick work in foundation and plinth cement sand mortar Ratio 1:5	P/Cft		2471.00	171-	One hundred seventy one only	422541-
5	Pacca brick other than bldg: including striking of joints upto 20 ft height in cement sand mortar ratio 1:5.	P/Cft		5117.00	176-	One hundred seventy six only	905592-


 Executive Engineer
 Drainage Division
 Badin


M/S BASHIR AHMED
 CONTRACTOR

34

6	Reinforced cement concrete work including all labour and material except the cost of steel reinforcement and its labour for bending and binding which will be paid separately. This rate also includes all kinds of forms, moulds, lifting, shuttering, curring, rendering and finishing the exposed surface (including screening and washing of shingle). (a) R.C.C work in roof slabs beams columns, rafts, lintels and other structural members laid in situ or precast laid in position complete in all respects (i) Ratio (1:2:4) 90 lbs cement 2 Cft Sand, 4 Cft Shingle 1/8" to 1/4" gauge.	P/Cft	495.00	495.00	495.00	Four hundred twenty five only	210375
7	Fabrication of mild steel reinforcement for cement concrete including cutting, bending, laying in position making joints and fastening including cost of binding wire (also includes removal of rust from bars)	P/Cwt	26.51	5580	26.51	Five thousand five hundred and eighty only	147925.80
8	Borrow pit excavation undressed lead upto 100 ft.	P/Cft	28000.00	2.60	28000.00	Two Rupees Sixty Paise	7280.00
9	Dressing & leveling of earth work to design section etc complete. (b) Ordinary Soil	P/Cft	28000.00	0.25	28000.00	Twenty five Paise	7000.00
10	Cement Plaster 1:2 up to 20 gt height 1/2" thick.	P/Sft	1506.00	62	1506.00	Sixty two only	95372.00
11	Erection and Removal of centering of RCC or plain cement concrete work of deodar wood (2nd class (a) (i) Horizontal Floor.	P/Sft	668.00	88	668.00	Eighty eight only	58784.00
12	Full Hire charges of Pumping set per day including of the wages of driver and assistant fuel or electric energy required plate form with suction and delivery pipe for pumping out water from trench i/c the cost of erection and dismantling of acopements after completion of job.	P/day	90.00	1775	90.00	One Thousand seven hundred and seventy five only	159750.00


 Executive Engineer
 Drainage Division

Total Bid Price of 1 No. UNDER PASS ACQUEDUCTS

Total Bid Price of 05 No. UNDER PASS ACQUEDUCTS (the amount to entered in paragraph 1 of the form of Bid) In words

27/7/193-70

Bashir

Signature:
Company Name:

**M/S BASHIR AHMED
CONTRACTOR**

[Signature]
~~Executive Engineer
CANTONMENT DIVISION
BAGHA~~

SCHEDULE OF PRICE

Name of Work:- CONSTRUCTION OF WATER COURSE CROSSING OVER SHADI BAHADUR
BRANCH DRAIN AT RD. 10.0

Bill No. 2) (E) Structures

Item Nr.	Description	Unit	Specifications Chapter Nr.	Quantity	Rate (Rs.)		Amount (Rs.)
					Figure	Words	
1	Excavation in foundation of Bldg: bridges & other structures including dag belling dressing refilling around structures with excavated earth watering and ramming lead e 5 ft in ordinary soil	P/Cft		21607.00	21.80	Two Rupees eighty Paise only	60498-60
2	Cement Concrete plain including placing compacting finishing and curing complete incl: screening and washing of stone agg: without shuttering ratio 1:3:6.	P/Cft		3051.00	194-	One hundred ninety four only	591854-
3	Pacca Brick work in foundation and plinth cement sand mortar Ratio 1:5	P/Cft		1838.00	196-	One hundred ninety six only	360248-
4	Pacca brick other than bldg: including striking of joints upto 20 ft height in cement sand mortar ratio 1:5.	P/Cft		3120.00	200-	Two hundred	624000-
5	Cement Concrete plain including placing compacting finishing and curing complete incl: screening and washing of stone agg: without shuttering ratio 1:2:4.	P/Cft		206.00	220-	Two hundred twenty only	45320-
6	Supplying & fabrication of M/steel reinforcement for C.C incl: cutting bending laying in position making joints and fastening incl: cost of binding wires and removal of rust from Bars.	P/Cwt		30.27	5700-	Five Thousand seven hundred only	172529

[Signature]
 Executive Engineer
 Drainage Division
 Dadin

[Signature]
M/S BASHIR AHMED
 CONTRACTOR

7	RCC work incl: all labour and material except the cost of steel reinf: and its labour for bending and binding which will be paid separately. This rate also includes all kinds of forms moulds lifting shuttering curing rendering and finishing the exposed surface incl: screening and washing of shingle. (a) RCC work in roof slabs beams, columns rafts lintels and other structural members laid in situ or precast laid in position complete in all respect ratio 1:2:4.	P/Cft	565.00	440 -	Four hundred forty only	228600 -
8	Full hire charges of pumping sets per day inclusive of the wages of driver and assistants, fuel or electric energy, platform required for placing pumps etc. at lower depth with suction and deliver pipes for pumping out water found at various depth for trenches including the cost of erection and dismantling after completion of job. Hire Charges of Pumping Sets of upto pumping out water from 10 ft deep trench	P/Day	60.00	1775 -	One Thousand seven hundred seventy five only	106500 -
9	Cement Plaster 1:2 upto 12 ft height 3/4" thick	P/Sft	1163.00	90 -	ninety only	104670 -
10	Erection & removal of centering for R.C.C or plain C.C works of deodar wood (2nd class) Vertical	P/Sft	229.00	82 -	Eighty two only	18778 -
Total Bid Price of 1 No. Water Course Crossing						2333048-60


 Executive Engineer
 Drainage Division
 Badin

Signature:

Company Name:

Bashir


M/S BASHIR AHMED
CONTRACTOR

SCHEDULE OF PRICE

Name of Work:- CONSTRUCTION OF BOX CULVERT ALONG PHULLELI GUNI OUTFALL DRAIN AT RD. 82 NIP SIDE

Bill No. 2) (F) Structures

Item Nr.	Description	Unit	Specifications Chapter Nr.	Quantity	Rate (Rs.)		Amount (Rs.)
					Figure	Words	
1	Excavation in foundation of building bridges and other structures with excavated earth watering and ramming lead one chain and lift upto 5' in ordinary soil.	P/Cft		20732.00	3, 65	Three Rupees sixty five Paisa	75671.80
2	Filling, watering and ramming earth under floors with new earth (Excavated from outside) lead upto one chain and lift upto 5 feet	P/Cft		1044.00	4.25	four Rupees twenty five Paisa	4437-
3	Stone Filling dry hand pack as filling behind retaining walls or in pitching and apron.	P/Cft		696.00	101-15	one hundred one and fifteen Paisa	70400-
4	Cement concrete plain including placing compacting finishing and curing complete including screening and washing of stone aggregate without shuttering ratio 1:3:6.	P/Cft		509.00	225--	two hundred twenty five only	114525


 Examining Engineer
 Drainage Division
 Beaula

MUSHAHIR AHMED
 CONTRACTOR

5	Reinforced cement concrete work including all labour and material except the cost of steel reinforcement and its labour for bending and binding which will be paid separately. This rate also includes all kinds of forms, moulds, lifting, shuttering, curring, rendering and finishing the exposed surface (including screening and washing of shingle). (a) R.C.C work in roof slabs beams columns, rafts, lintels and other structural members laid in situ or precast laid in position complete in all respects (f) Ratio (1:2:4) 90 lbs cement 2 Cft Sand, 4 Cft Shingle 1/8" to 1/4" gauge.	P/Cft	1627.00	MS	Four hundred fifty nine only	746793
6	Fabrication of mild steel reinforcement for cement concrete including cutting, bending, laying in position making joints and fastening including cost of binding wire (also includes removal of rust from bars)	P/Cwt	94.42	5606.50	Five thousand eight hundred and eight only	52836573
7	Borrow pit excavation undressed lead upto 100 ft.	P/Cft	100000.00	2.00	Two thousand six hundred and twenty five only	260000
8	Dressing & leveling of earth work to design section etc complete. (b) Ordinary Soil	P/Cft	100000.00	0.25	One thousand seven hundred and seventy five only	35500
9	Full Hire charges of Pumping set per day including of the wages of driver and assistant fuel or electric energy required plate form with suction and delivery pipe for pumping out water from trench i/c the cost of erection and dismantling of accopments after completion of job.	P/ days	20.00	1775		

Total Bid Price of 1 No. Water Course Crossing

1861692.53

Executive Engineer
Drainage Division
Badin

Signature:
Company Name:

S. Bashir Ahmed
MS BASHIR AHMED
CONTRACTOR

SCHEDULE OF PRICE

Name of Work:- CONSTRUCTION OF WATER COURSE CROSSING OVER 1R OF TANDO MUHAMMAD KHAN BRANCH DRAIN AT RD. 26.0

Bill No. 2) (G) Structures

Item Nr.	Description	Unit	Specifications Chapter Nr.	Quantity	Rate (Rs.)		Amount (Rs.)
					Figure	Words	
1	Excavation in foundation of Bldg: bridges & other structures including dag belling dressing refilling around structures with excavated earth watering and ramming lead e 5 ft in ordinary: soil	P/Cft		21607.00	2.80	Two Rupees eighty paise	60489.60
2	Cement Concrete plain including placing compacting finishing and curing complete incl: screening and washing of stone agg: without shuttering ratio 1:3:6.	P/Cft		3051.00	17-	One hundred seventy only	518670-
3	Pacca Brick work in foundation and plinth cement sand mortar Ratio 1:5	P/Cft		1838.00	165-	One hundred sixty five	303270-
4	Pacca brick other than bldg: including striking of joints upto 20 ft height in cement sand mortar ratio 1:5.	P/Cft		3120.00	170-	One hundred seventy only	530400-
5	Cement Concrete plain including placing compacting finishing and curing complete incl: screening and washing of stone agg: without shuttering ratio 1:2:4.	P/Cft		206.00	190-	One hundred ninety only	39140-
6	Supplying & fabrication of M/steel reinforcement for C.C incl: cutting bending laying in position making joints and fastening incl: cost of binding wires and removal of rust from Bars.	P/Cwt		30.27	5600-	five thousand six hundred only	169512-

[Signature]
 Executive Engineer
 Division
 Road

[Signature]
M/S BASHIR AHMED
 CONTRACTOR

7	RCC work incl: all labour and material except the cost of steel reinforcement and its labour for bending and binding which will be paid separately. This rate also includes all kinds of forms moulds lifting shuttering curing rendering and finishing the exposed surface incl: screening and washing of shingle. (a) RCC work in roof slabs beams, columns rafts lintels and other structural members laid in situ or precast laid in position complete in all respect ratio 1:2:4.	P/Cft	565.00	MS	Four hundred Twenty only	240250-	
8	Full hire charges of pumping sets per day inclusive of the wages of driver and assistants, fuel or electric energy, platform required for placing pumps etc. at lower depth with suction and deliver pipes for pumping out water found at various depth for trenches including the cost of erection and dismantling after completion of job. Hire Charges of Pumping Sets of upto pumping out water from 10 ft deep trench	P/Day	60.00	1775-	One Thousand Seven hundred Seventy five only	106500-	
9	Cement Plaster 1:2 upto 12 ft height 3/4" thick	P/Sft	1163.00	60-	Sixty only	69750-	
10	Erection & removal of centering for R.C.C or plain C.C works of deodar wood (2nd class) Vertical	P/Sft	229.00	88-	Eighty five	19465-	
Total Bid Price of 1 No. Water Course Crossing							7060186-60

[Signature]
 Executive Engineer
 Drainage Division
 Badin

[Signature]
 M/S BASHIR AHMED
 CONTRACTOR

Signature:
 Company Name:

SCHEDULE OF PRICE

Name of Work:- CONSTRUCTION OF (05 NO.) R.C.C PIPE INLET ALONG WESTERN MIR MAIN DRAIN
 (WHERE NECESSARY)

Bill No. 2) (H) Structures

Item Nr.	Description	Unit	Specifications Chapter Nr.	Quantity	Rate (Rs.)		Amount (Rs.)
					Figure	Words	
1	Excavation in foundation of building bridges and other structures with excavated earth watering and ramming lead one chain and lift upto 5' in ordinary soil.	P/Cft		3,246.00	3.65	Three Rupees sixty five paise	11247-80
2	Cement concrete plain including placing compacting finishing and curing complete including screening and washing of stone aggregate without shuttering ratio 1:3:6.	P/Cft		908.00	163-	One hundred sixty three only	148004-
3	Pacca Brick work in foundation and plinth cement sand mortar Ratio 1:5	P/Cft		855.00	157-	One hundred fifty seven	134235-
4	Pacca brick other than bldg: including striking of joints upto 20 ft height in cement sand mortar ratio 1:5.	P/Cft		417.00	160-	One hundred sixty only	66720-
5	Providing & laying and jointing RCC pipes ASTM C-96-62 T/C-76-70 Class-II WALL B and fixing in trench i.e cutting fitting and jointing with rubber ring i/c testing with water to specified pressure. 24" dia	P/Rft		32.00	1000-	One Thousand	32000-
6	Cement Plaster 1:3 up to 20 ft. height 3/4" thick.	P/Sft		926.00	50-	fifty only	46300-

[Signature]
 Executive Engineer
 Drainage Division
 Badin

M/S BASHIR AHMED
 CONTRACTOR

7	Borrow pit excavation undressed lead upto 100 ft. In ordinary soil	P/Cft	15,000.00	2.60	Two Hundred Sixty Paise	380000
8	Dressing & leveling of earth work to design section etc complete.(b) Ordinary Soil	P/Cft	15,000.00	0.25	Twenty five Paise	375000
Total Bid Price of 1 No. Pipe Inlet						487856.00
Total Bid Price of 05 No. Pipe Inlets (the amount to entered in paragraph 1 of the form of Bid) In words						
Twenty five Lacs nine thousand two hundred eighty four and fifty paise						2409284.50

[Signature]
 Executive Engineer
 Technical Division
 B&M

[Signature]

**M/S BASHIR AHMED
 CONTRACTOR**

Signature:
 Company Name:

SCHEDULE OF PRICE

Name of Work:- CONSTRUCTION OF WATER COURSE CROSSING OVER MORHADI DRAIN AT RD. 7.0.

Bill No. 2 (I) Structures


Item Nr.	Description	Unit	Specifications Chapter Nr.	Quantity	Rate (Rs.)		Amount (Rs.)
					Figure	Words	
1	Excavation in foundation of Bldg: bridges & other structures including dag belling dressing refilling around structures with excavated earth watering and ramming lead e 5 ft in ordinary: soil	P/Cft		21607.00	2078	Two Sweepers and seventy eight paise	60067.46
2	Cement Concrete plain including placing compacting finishing and curing complete incl: screening and washing of stone agg: without shuttering ratio 1:3:6.	P/Cft		3051.00	1825	One hundred red eighty two sweepers and fifty paise	556807.50
3	Pacca Brick work in foundation and plinth cement sand mortar Ratio 1:5	P/Cft		1838.00	16225	One hundred sixty two Sweepers and twenty five paise	298215.50
4	Pacca brick other than bldg: including striking of joints upto 20 ft height in cement sand mortar ratio 1:5.	P/Cft		3120.00	16535	One hundred sixty five Sweepers and thirty five paise	515882.00
5	Cement Concrete plain including placing compacting finishing and curing complete incl: screening and washing of stone agg: without shuttering ratio 1:2:4.	P/Cft		206.00	19425	One hundred thirty eight Sweepers and twenty five paise	40015.50
6	Supplying & fabrication of M/steel reinforcement for C.C incl: cutting bending laying in position making joints and fastening incl: cost of binding wires and removal of rust from Bars.	P/Cwt		30.27	6850-	Six Thousand eight hundred fifty only	207349.50

~~Executive Engineer
Drainage Division
Badin~~

Badin

**M/S DASHI AHMED
CONTRACTOR**

7	RCC work incl: all labour and material except the cost of steel reinf: and its labour for bending and binding which will be paid separately. This rate also includes all kinds of forms moulds lifting shuttering curing rendering and finishing the exposed surface incl: screening and washing of shingle. (a) RCC work in roof slabs beams, columns rafts lintels and other structural members laid in situ or precast laid in position complete in all respect ratio 1:2:4.	P/Cft	565.00	435.20	Four hundred Twenty five sheets and Twenty seven	245888-	
8	Full hire charges of pumping sets per day inclusive of the wages of driver and assistants, fuel or electric energy, platform required for placing pumps etc. at lower depth with suction and deliver pipes for pumping out water found at various depth for trenches including the cost of erection and dismantling after completion of job. Hire Charges of Pumping Sets of upto pumping out water from 10 ft deep trench	P/Day	60.00	1650-	One thousand six hundred and fifty Sumpas	99000-	
9	Cement Plaster 1:2 upto 12 ft height 3/4" thick	P/Sft	1163.00	30.25	Twenty Sumpas and Twenty five pairs	35180.75	
10	Erection & removal of centering for R.C.C or plain C.C works of deodar wood (2nd class) Vertical	P/Sft	229.00	78.65	Seventy five Sumpas and Sixty five pairs	17325.85	
Total Bid Price of 1 No. Water Course Crossing							2075740.00
Seventy Lacs Seventy five Thousand seven hundred and forty only							


 Executive Engineer
 Drainage Division
 Badin

Signature: M/S. BASHIR AHMED
 Company Name: CONTRACTOR

↓ Issued to Mr. Moamuddin S
Shahid Ude DR No-36 dt. 09.01.2018

Government of Sindh

Executive Engineer
Drainage Division
Radin.



IRRIGATION DEPARTMENT

**Construction of Samralee Link Drain from RD. 0.0
to RD. 20.0 Outfalling in 1R of Matli Branch Drain
at RD. 35.0**


PACKAGE NO. 01

SUMMARY OF BID PRICE

CONSTRUCTION OF SAMRADEE LINK DRAIN FROM RD. 0.0 TO 20.0 OUTFALLING IN 1R OF MATLI BRANCH DRAIN AT RD. 35.0.

CONTRACT NAME

Bill Nr.	Description	Amount
1	Earth Work	9,589,351.00
2	a) CONSTRUCTION OF (10 NO.) R.C.C PIPE INLET ALONG SAMRADEE LINK DRAIN FROM RD. 0.0 TO 20.0	4,613,138.00
	b) CONSTRUCTION OF (04 NO.) VILLAGE ROAD BRIDGES ALONG SAMRADEE LINK DRAIN FROM RD. 0.0 TO 20.0	10,755,147.00
	c) CONSTRUCTION OF (12 NO.) WATER COURSE CROSSING ALONG SAMRADEE LINK DRAIN FROM RD. 0.0 TO 20.0	19,412,193.00
	d) CONSTRUCTION OF OUTFALL STRUCTURE ALONG MATLI BRANCH DRAIN AT RD. 35.0.	2,737,292.00
	e) CONSTRUCTION OF WATER COURSE CROSSING OVER SHADI BAHADUR BRANCH DRAIN AT RD. 10.0	2,193,464.00
	f) CONSTRUCTION OF BOX CULVERT ALONG PHULLELI GUNI OUTFALL DRAIN AT RD. 82 NIP SIDE	1,862,602.00
	g) CONSTRUCTION OF WATER COURSE CROSSING OVER 1R OF TANDO MUHAMMAD KHAN BRANCH DRAIN AT RD. 26.0	2,078,764.00
	h) CONSTRUCTION OF (05 NO.) R.C.C PIPE INLET ALONG WESTRN MIR MAIN DRAIN (WHERE NECESSARY)	2,401,861.00
	i) CONSTRUCTION OF WATER COURSE CROSSING OVER MORHADI DRAIN AT RD. 7.0.	2,078,306.00
	Total Bid Price (the amount to entered in paragraph 1 to 2 of the form of bid in words	57,722,118.00

Signature: 

Company Name: 

Executive Engineer
Drainage Division
Badrin

SCHEDULE OF PRICE

Name of Work:- CONSTRUCTION OF SAMRADEE LINK DRAIN FROM RD. 0.0 TO 20.0.

Bill No. 1: Earth Work


Item Nr.	Description	Unit	Specifications Chapter Nr.	Quantity	Rate (Rs.)		Amount (Rs.)
					Figure	Words	
1	Jungle clearance and removing within 100' light.	100 Sft		666667.00	7.55		50,333,336
2	Earth work excavation in Irrigation channels drain etc dressed to designed section grades and profiles excavated material disposed off and dressed within 50' lead in ordinary soil.	P/ Cft		1752410.00	3.50		6,133,435.00
3	Borrow pit excavation undressed lead up to 100' ordinary.	P/ Cft		319113.00	2.55		813,738.15
4	Carriage of Sweet Earth Lead 3 - miles	P/ Cft		319113.00	5.85		1,866,811.05
5	Earth work compaction (Soft ordinary or hard soil) laying earth in 6" layer leveling watering for compaction etc complete.	P/ Cft		2071523.00	0.35		725,033.05
Total Bid Price (the amount to entered in paragraph 1 of the form of Bid) In words							9,589,350.61
							Say Rs: 9,589,351.00


 Executive Engineer
 Drainage Division
 Badin

Signature:
 Company Name:


 M/s.

7	Borrow pit excavation undressed lead upto 100 ft. In ordinary soil	P/Cft	15,000.00	2.50	37,500.00
8	Dressing & leveling of earth work to design section etc complete. (b) Ordinary Soil	P/Cft	15,000.00	0.25	3,750.00
Total Bid Price of 1 No. Pipe Inlet					461,313.80
Total Bid Price of 10 No. Pipe Inlets (the amount to entered in paragraph 1 of the form of Bid) In words					4,613,138.00


 Executive Engineer
 Drainage Division
 Badin

Signature: 
 Company Name: Ms. Noor
 CONTRACTOR

SCHEDULE OF PRICE

Name of Work: CONSTRUCTION OF (04 NO.) VILLAGE ROAD BRIDGES ALONG SAMRADEE LINK DRAIN
FROM RD. 0.0 TO 20.0

Bill No. 2) (B) Structures

Item Nr.	Description	Unit	Specifications Chapter Nr.	Quantity	Rate (Rs.)		Amount (Rs.)
					Figure	Words	
1	Excavation in foundation of building bridges and other structures with excavated earth watering and ramming lead one chain and lift upto 5' in ordinary soil.	P/Cft		40486.00	3.65		147,773.90
2	Cement concrete plain including placing compacting finishing and curing complete including screening and washing of stone aggregate without shuttering ratio 1:3:6.	P/Cft		2686.00	181.36		487,132.96
3	Cement Concrete Plain including placing compacting finishing curing up to 20 ft height in sand cement concrete Ratio 1:2:4	P/Cft		213.75	200.50		42,856.88
4	Pacca Brick work in foundation and plinth cement sand mortar Ratio 1:5	P/Cft		2471.00	176.50		436,131.50
5	Pacca brick other than bldg: including striking of joints upto 20 ft height in cement sand mortar ratio 1:5.	P/Cft		5117.00	180.25		922,339.25

Executive Engineer
 Drainage Division
 Badin



M/S No. 100/2022

6	Reinforced cement concrete work including all labour and material except the cost of steel reinforcement and its labour for bending and binding which will be paid separately. This rate also includes all kinds of forms, moulds, lifting, shuttering, curring, rendering and finishing the exposed surface (including screening and washing of shingle). (a) R.C.C work in roof stabs beams columns, rafts, lintels and other structural members laid in situ or precast laid in position complete in all respects (i) Ratio (1:2:4) 90 lbs cement 2 Cft Sand, 4 Cft Shingle 1/8" to 1/4" guage.	P/Cft		495.00	436.00	215,820.00
7	Fabrication of mild steel reinforcement for cement concrete including cutting, bending, laying in position making joints and fastening including cost of binding wire (also includes removal of rust from bars)	P/Cwt		26.51	6520.00	172,845.20
8	Borrow pit excavation undressed lead upto 100 ft.	P/Cft		28000.00	2.50	70,000.00
9	Dressing & leveling of earth work to design section etc complete. (b) Ordinary Soil	P/Cft		28000.00	0.25	7000.00
10	Cement Plaster 1:3 up to 12 ft height 3/4" thick.	P/Cft		1506.00	0.33	496.98
11	Erection and Removal of centering of RCC or plain cement concrete work of deodar wood (2nd class (a) (i) Horizontal Floor.	P/Sft		668.00	76.93	51,390.11


 Executive Engineer
 Drainage Division
 Badin




 Ms. N. C. ...

12	Full Hire charges of Pumping set per day including of the wages of driver and assistant fuel or electric energy required plate form with suction and delivery pipe for pumping out water from trench. <u>lic</u> the cost of erection and dismantling of acopements after completion of job.	P/ Day	90.00	1500.00	135,000.00
Total Bid Price of 1 No. Village Road Bridge					
2,688,786.77					
Total Bid Price of 04 No. Village Road Bridge (the amount to entered in paragraph 1 of the form of Bid) In words					
10,755,147.00					


 Executive Engineer
 Drainage Division
 Badin

Signature: 
 Company Name: M/s M/s [unclear] [unclear]

SCHEDULE OF PRICE

Name of Work: CONSTRUCTION OF (12 NO.) WATER COURSE CROSSING ALONG SAMRADEE
LINK DRAIN FROM RD. 0.0 TO 20.0

Bill No. 2) (C) Structures

Item Nr.	Description	Unit	Specifications Chapter Nr.	Quantity	Rate (Rs.)		Amount (Rs.)
					Figure	Words	
1	Excavation in foundation of building bridges and other structures with excavated earth watering and ramming lead one chain and lift upto 5' in ordinary soil.	P/Cft		17432.00	3.65		63,626.80
2	Cement concrete plain including placing compacting finishing and curing complete including screening and washing of stone aggregate without shuttering ratio 1:3:6.	P/Cft		1015.00	176.60		179,249.00
3	Cement Concrete Plain including placing compacting finishing curing up to 20 ft height in sand cement concrete Ratio 1:2:4	P/Cft		246.00	185.60		45,657.60
4	Pacca Brick work in foundation and plinth cement sand mortar Ratio 1:5	P/Cft		2706.00	176.50		477,609.00
5	Pacca brick other than bldg: including striking of joints upto 20 ft height in cement sand mortar ratio 1:5.	P/Cft		1769.00	175.90		311,167.10

(Signature)
 Executive Engineer
 Drainage Division
 Badin

(Signature)
 M. Noor
 Controller

6	Reinforced cement concrete work including all labour and material except the cost of steel reinforcement and its labour for bending and binding which will be paid separately. This rate also includes all kinds of forms, moulds, lifting, shuttering, curring, rendering and finishing the exposed surface (including screening and washing of shingle). (a) R.C.C work in roof stabs beams columns, rafts, lintels and other structural members laid in situ or precast laid in position complete in all respects (i) Ratio (1:2:4) 90 lbs cement 2 Cft Sand, 4 Cft Shingle 1/8" to 1/4" gauge.	P/Cft	510.00	419.60	213,996.00
7	Fabrication of mild steel reinforcement for cement concrete including cutting, bending, laying in position making joints and fastening including cost of binding wire (also includes removal of rust from bars)	P/Cwt	27.32	6135.00	167,608.20
8	Borrow pit excavation undressed lead upto 100 ft.	P/Cft	12000.00	2.50	30,000.00
9	Dressing & leveling of earth work to design section etc complete. (b) Ordinary Soil	P/Cft	12000.00	0.25	3000.00
10	Cement Plaster 1:3 up to 12 ft height 3/4" thick.	P/Cft	2086.00	0.33	688.38
11	Erection and Removal of centering of RCC or plain cement concrete work of deodar wood (2nd class (a) (i) Horizontal Floor.	P/Sft	456.00	76.93	35,080.67


 EXECUTIVE ENGINEER
 DRAWING DIVISION
 Badih


 MIS

12	Full Hire charges of Pumping set per day including of the wages of driver and assistant fuel or electric energy required plate form with suction and delivery pipe for pumping out water from trench i/c the cost of erection and dismantling of accopements after completion of job.	P/ Day	60.00	1500.00	90,000.00
Total Bid Price of 1 No. Water Course Crossing					
Total Bid Price of 12 No. Water Course Crossing (the amount to entered in paragraph 1 of the form of Bid) In words 1,67,682.75					
19,412,193.00					

[Signature]
 EXECUTIVE DIVISION
 Eadin

[Signature]

Signature: *[Signature]*
 Company Name: **M/S HONORABLE CONTRACTORS**

SCHEDULE OF PRICE

Name of Work: CONSTRUCTION OF OUTFALL STRUCTURE ALONG MATLI BRANCH DRAIN
AT RD. 35.0.

Bill No. 2) (D) Structures


Item Nr.	Description	Unit	Specifications Chapter Nr.	Quantity	Rate (Rs.)		Amount (Rs.)
					Figure	Words	
1	Excavation in foundation of building bridges and other structures with excavated earth watering and ramming lead one chain and lift upto 5' in ordinary soil.	P/Cft		40486.00	3.65		147,773.90
2	Cement concrete plain including placing compacting finishing and curing complete including screening and washing of stone aggregate without shuttering ratio 1:3:6.	P/Cft		2686.00	181.36		487,152.96
3	Cement Concrete Plain including placing compacting finishing curing up to 20 ft height in sand cement concrete Ratio 1:2:4	P/Cft		214.00	200.50		42,907.00
4	Pacca Brick work in foundation and plinth cement sand mortar Ratio 1:5	P/Cft		2471.00	182.65		451,328.15
5	Pacca brick other than bldg: including striking of joints upto 20 ft height in cement sand mortar ratio 1:5.	P/Cft		5117.00	180.25		922,339.25

(Signature)

Executive Engineer
 Drainage Division
 Bahir

(Signature)

Chief Contractor



6	Reinforced cement concrete work including all labour and material except the cost of steel reinforcement and its labour for bending and binding which will be paid separately. This rate also includes all kinds of forms, moulds, lifting, shuttering, curring, rendering and finishing the exposed surface (including screening and washing of shingle). (a) R.C.C work in roof slabs beams columns, rafts, lintels and other structural members laid in situ or precast laid in position complete in all respects (i) Ratio (1:2:4) 90 lbs cement 2 Cft Sand, 4 Cft Shingle 1/8" to 1/4" gauge.	P/Cft	495.00	445.80	220,671.00
7	Fabrication of mild steel reinforcement for cement concrete including cutting, bending, laying in position making joints and fastening including cost of binding wire (also includes removal of rust from bars)	P/Cwt	26.51	6520.00	172,845.20
8	Borrow pit excavation undressed lead upto 100 ft.	P/Cft	28000.00	2.50	70,000.00
9	Dressing & leveling of earth work to design section etc complete. (b) Ordinary Soil	P/Cft	28000.00	0.25	7000.00
10	Cement Plaster 1:2 up to 20 gt height 1/2" thick.	P/Sft	1506.00	0.33	496.98
11	Erection and Removal of centering of RCC or plain cement concrete work of deodar wood (2nd class (a) (i) Horizontal Floor.	P/Sft	668.00	88.47	59,097.96
12	Full Hire charges of Pumping set per day including of the wages of driver and assistant fuel or electric energy required plate form with suction and delivery pipe for pumping out water from trench i/c the cost of erection and dismantling of accopements after completion of job.	P/day	90.00	1730.00	155,700.00


 Executive Engineer
 District Engineer

Total Bid Price of 1 No. UNDER PASS ACQUEDUCTS

2,737,292.40

Total Bid Price of 0 No. UNDER PASS ACQUEDUCTS (the amount to entered in paragraph 1 of the form of Bid) in words

2,737,292.00


~~Executive Engineer
Drainage Division
Bachin~~

Signature:
Company Name:



SCHEDULE OF PRICE

Name of Work: CONSTRUCTION OF WATER COURSE CROSSING OVER SHADI BAHADUR
BRANCH DRAIN AT RD. 10.0

Bill No. 2) (E) Structures

Item Nr.	Description	Unit	Specifications Chapter Nr.	Quantity	Rate (Rs.)		Amount (Rs.)
					Figure	Words	
1	Excavation in foundation of Bldg: bridges & other structures including dag belling dressing refilling around structures with excavated earth watering and ramming lead e 5 ft in ordinary: soil	P/Cft		21607.00	2.78		60,067.46
2	Cement Concrete plain including placing compacting finishing and curing complete incl: screening and washing of stone agg: without shuttering ratio 1:3:6.	P/Cft		3051.00	195.50		596,470.50
3	Pacca Brick work in foundation and plinth cement sand mortar Ratio 1:5	P/Cft		1838.00	165.50		304,189.00
4	Pacca brick other than bldg: including striking of joints upto 20 ft height in cement sand mortar ratio 1:5.	P/Cft		3120.00	175.35		547,092.00
5	Cement Concrete plain including placing compacting finishing and curing complete incl: screening and washing of stone agg: without shuttering ratio 1:2:4.	P/Cft		206.00	220.20		45,361.20
6	Supplying & fabrication of M/steel reinforcement for C.C incl: cutting bending laying in position making joints and fastening incl: cost of binding wires and removal of rust from Bars.	P/Cwt		30.27	7020.50		212,510.54

[Handwritten signature]

[Handwritten signature]
 15/08/2018

7	RCC work incl: all labour and material except the cost of steel reinf: and its labour for bending and binding which will be paid separately. This rate also includes all kinds of forms moulds lifting shuttering curing rendering and finishing the exposed surface incl: screening and washing of shingle. (a) RCC work in roof slabs beams, columns rafts lintels and other structural members laid in situ or precast laid in position complete in all respect ratio 1:2:4.	P/Cft	565.00	465.25	262,866.25
8	Full hire charges of pumping sets per day inclusive of the wages of driver and assistants, fuel or electric energy, platform required for placing pumps etc. at lower depth with suction and deliver pipes for pumping out water found at various depth for trenches including the cost of erection and dismantling after completion of job. Hire Charges of Pumping Sets of upto pumping out water from 10 ft deep trench	P/Day	60.00	1725.00	103,500.00
9	Cement Plaster 1:2 upto 12 ft height 3/4" thick	P/Sft	1163.00	36.95	42,972.85
10	Erection & removal of centering for R.C.C or plain C.C works of deodar wood (2nd class) Vertical	P/Sft	229.00	80.50	18,434.50
Total Bid Price of 1 No. Water Course Crossing					2,193,464.30

Say Rs: 2,193,464.00



Signature:
Company Name:




SCHEDULE OF PRICE

Name of Work: CONSTRUCTION OF BOX CULVERT ALONG PHULLELI GUNI OUTFALL DRAIN AT RD. 82 NIP SIDE


Bill No. 2) (F) Structures

Item Nr.	Description	Unit	Specifications Chapter Nr.	Quantity	Rate (Rs.)		Amount (Rs.)
					Figure	Words	
1	Excavation in foundation of building bridges and other structures with excavated earth watering and ramming lead one chain and lift upto 5' in ordinary soil.	P/Cft		20732.00	3.65		75,671.80
2	Filling, watering and ramming earth under floors with new earth (Excavated from outside) lead upto one chain and lift upto 5 feet	P/Cft		1044.00	4.15		4332.60
3	Stone Filling dry hand pack as filling behind retaining walls or in pitching and apron.	P/Cft		696.00	29.20		20,323.20
4	Cement concrete plain including placing compacting finishing and curing complete including screening and washing of stone aggregate without shuttering ratio 1:3:6.	P/Cft		509.00	162.50		82,712.50



11/11/11

5	Reinforced cement concrete work including all labour and material except the cost of steel reinforcement and its labour for bending and binding which will be paid separately. This rate also includes all kinds of forms, moulds, lifting, shuttering, curring, rendering and finishing the exposed surface (including screening and washing of shingle). (a) R.C.C work in roof slabs beams columns, rafts, lintels and other structural members laid in situ or precast laid in position complete in all respects (i) Ratio (1:2:4) 90 lbs cement 2 Cft Sand, 4 Cft Shingle 1/8" to 1/4" gauge.	P/Cft	1627.00	455.65	741342.55
6	Fabrication of mild steel reinforcement for cement concrete including cutting, bending, laying in position making joints and fastening including cost of binding wire (also includes removal of rust from bars)	P/Cwt	94.42	6950.00	656,219.00
7	Borrow pit excavation undressed lead upto 100 ft.	P/Cft	100000.00	2.25	225,000.00
8	Dressing & leveling of earth work to design section etc complete. (b) Ordinary Soil	P/Cft	100000.00	0.25	25,000.00
9	Full Hire charges of Pumping set per day including of the wages of driver and assistant fuel or electric energy required plate form with suction and delivery pipe for pumping out water from trench i/c the cost of erection and dismantling of acopements after completion of job.	P/ days	20.00	1600.00	32,000.00
Total Bid Price of 1 No. Water Course Crossing					1,868,608.00



Signature:
Company Name:

MS B...



SCHEDULE OF PRICE

Name of Work:- CONSTRUCTION OF WATER COURSE CROSSING OVER 1R OF TANDO MUHAMMAD KHAN
BRANCH DRAIN AT RD. 26.0

Bill No. 2) (G) Structures

Item Nr.	Description	Unit	Specifications Chapter Nr.	Quantity	Rate (Rs.)		Amount (Rs.)
					Figure	Words	
1	Excavation in foundation of Bldg: bridges & other structures including dag belling dressing refilling around structures with excavated earth watering and ramming lead e 5 ft in ordinary: soil	P/Cft		21607.00	2.85		61,579.95
2	Cement Concrete plain including placing compacting finishing and curing complete incl: screening and washing of stone agg: without shuttering ratio 1:3:6.	P/Cft		3051.00	182.65		557,265.15
3	Pacca Brick work in foundation and plinth cement sand mortar Ratio 1:5	P/Cft		1838.00	162.25		298,215.50
4	Pacca brick other than bldg: including striking of joints upto 20 ft height in cement sand mortar ratio 1:5.	P/Cft		3120.00	165.35		515,892.00
5	Cement Concrete plain including placing compacting finishing and curing complete incl: screening and washing of stone agg: without shuttering ratio 1:2:4.	P/Cft		206.00	194.25		40,015.50
6	Supplying & fabrication of M/steel reinforcement for C.C incl: cutting bending laying in position making joints and fastening incl: cost of binding wires and removal of rust from Bars.	P/Cwt		30.27	6850.00		207,349.50

M/S

7	RCC work incl: all labour and material except the cost of steel reinf. and its labour for bending and binding which will be paid separately. This rate also includes all kinds of forms moulds lifting shuttering-curing rendering and finishing the exposed surface incl: screening and washing of shingle.(a) RCC work in roof slabs beams, columns rafts lintels and other structural members laid in situ or precast laid in position complete in all respect ratio 1:2:4.	P/Cft	565.00	435.20	245,888.00
8	Full hire charges of pumping sets per day inclusive of the wages of driver and assistants, fuel or electric energy, platform required for placing pumps etc. at lower depth with suction and deliver pipes for pumping out water found at various depth for trenches including the cost of erection and dismantling after completion of job. Hire Charges of Pumping Sets of upto pumping out water from 10 ft deep trench	P/Day	60.00	1650.00	99,000.00
9	Cement Plaster 1:2 upto 12 ft height 3/4" thick	P/Sft	1163.00	30.25	35,180.75
10	Erection & removal of centering for R.C.C or plain C.C works of deodar wood (2nd class) Vertical	P/Sft	229.00	80.25	18,377.25
Total Bid Price of 1 No. Water Course Crossing					2,078,763.60

[Handwritten Signature]

Say Rs: 2,078,764.00

Signature:
Company Name:

[Faint Stamp]

SCHEDULE OF PRICE

Name of Work: CONSTRUCTION OF (05 NO.) R.C.C PIPE INLET ALONG WESTERN MIR MAIN DRAIN
 (WHERE NECESSARY)


Bill No. 2 (H) Structures

Item Nr.	Description	Unit	Specifications Chapter Nr.	Quantity	Rate (Rs.)		Amount (Rs.)
					Figure	Words	
1	Excavation in foundation of building bridges and other structures with excavated earth watering and ramming lead one chain and lift upto 5' in ordinary soil.	P/Cft		3,246.00	3.65		11,854.39
2	Cement concrete plain including placing compacting finishing and curing complete including screening and washing of stone aggregate without shuttering ratio 1:3:6.	P/Cft		908.00	178.20		161,805.60
3	Pacca Brick work in foundation and plinth cement sand mortar Ratio 1:5	P/Cft		855.00	165.25		141,288.75
4	Pacca brick other than bldg: including striking of joints upto 20 ft height in cement sand mortar ratio 1:5.	P/Cft		417.00	176.20		73,475.40
5	Providing & laying and jointing RCC pipes ASTM C-96-62 T/C-76-70 Class-II WALL B and fixing in trench i.e cutting fitting and jointing with rubber ring i/c testing with water to specified pressure. 24" dia	P/Rft		32.00	465.88		14,908.16
6	Cement Plaster 1:3 up to 20 ft. height 3/4" thick.	P/Sft		926.00	38.65		35,789.90

[Handwritten Signature]

[Handwritten Text]

7	Borrow pit excavation undressed lead upto 100 ft. In ordinary soil	P/Cft	15,000.00	2.50		37,500.00
8	Dressing & leveling of earth work to design section etc complete. (b) Ordinary Soil	P/Cft	15,000.00	0.25		3,750.00
Total Bid Price of 1 No. Pipe Inlet						480,372.20
Total Bid Price of 05 No. Pipe Inlets (the amount to entered in paragraph 1 of the form of Bid) In words						2,401,861.00



Signature:
Company Name:




SCHEDULE OF PRICE

Name of Work: CONSTRUCTION OF WATER COURSE CROSSING OVER MORHADI DRAIN AT RD. 7.0.

Bill No. 2) (I) Structures

Item Nr.	Description	Unit	Specifications Chapter Nr.	Quantity	Rate (Rs.)		Amount (Rs.)
					Figure	Words	
1	Excavation in foundation of Bldg: bridges & other structures including dag belling dressing refilling around structures with excavated earth watering and ramming lead e 5 ft in ordinary: soil	P/Cft		21607.00	2.85		61,579.95
2	Cement Concrete plain including placing compacting finishing and curing complete incl: screening and washing of stone agg: without shuttering ratio 1:3:6.	P/Cft		3051.00	182.50		556,807.50
3	Pacca Brick work in foundation and plinth cement sand mortar Ratio 1:5	P/Cft		1838.00	162.25		298,215.50
4	Pacca brick other than bldg: including striking of joints upto 20 ft height in cement sand mortar ratio 1:5.	P/Cft		3120.00	165.35		515,892.00
5	Cement Concrete plain including placing compacting finishing and curing complete incl: screening and washing of stone agg: without shuttering ratio 1:2:4.	P/Cft		206.00	194.25		40,015.50
6	Supplying & fabrication of M/steel reinforcement for C.C incl: cutting bending laying in position making joints and fastening incl: cost of binding wires and removal of rust from Bars.	P/Cwt		30.27	6850.00		207,349.50

M/S N. S. ...
N

7	RCC work incl: all labour and material except the cost of steel reinf: and its labour for bending and binding which will be paid separately. This rate also includes all kinds of forms, moulds lifting shuttering curing rendering and finishing the exposed surface incl: screening and washing of shingle. (a) RCC work in roof slabs beams, columns rafts lintels and other structural members laid in situ or precast laid in position complete in all respect ratio 1:2:4.	P/Cft	565.00	435.20	245,888.00
8	Full hire charges of pumping sets per day inclusive of the wages of driver and assistants, fuel or electric energy, platform required for placing pumps etc. at lower depth with suction and deliver pipes for pumping out water found at various depth for trenches including the cost of erection and dismantling after completion of job. Hire Charges of Pumping Sets of upto pumping out water from 10 ft deep trench	P/Day	60.00	160.00	99,000.00
9	Cement Plaster 1:2 upto 12 ft height 3/4" thick	P/Sft	1163.00	30.25	35,180.75
10	Erection & removal of centering for R.C.C or plain C.C works of deodar wood (2nd class) Vertical	P/Sft	229.00	80.25	18,377.25
Total Bid Price of 1 No. Water Course Crossing					2,078,305.95

Say Rs: 2,078,306.00



Signature:

Company Name:

M/S. ...

SINDH PUBLIC PROCUREMENT REGULATORY AUTHORITY

CONTRACT EVALUATION FORM

TO BE FILLED IN BY ALL PROCURING AGENCIES FOR PUBLIC CONTRACTS OF WORKS, SERVICES & GOODS

- DRAINAGE DIVISION BADIN, IRRIGATION DEPARTMENT
- 1) NAME OF THE ORGANIZATION / DEPTT. _____
- 2) PROVINCIAL / LOCAL GOVT./ OTHER _____ PROVINCIAL
- 3) TITLE OF CONTRACT Construction of Sangrodee Link Drain from RD.D. 0 to 20.00
cutfalling in R of M to Branch Drain of RD 38-05
- 4) TENDER NUMBER _____ No. TC/G-148/DD/44, Dated: 10.01.2018.
- 5) BRIEF DESCRIPTION OF CONTRACT _____ EARTH WORK, STRUCTURE WORK
- 6) FORUM THAT APPROVED THE SCHEME _____ ADP NO. 1080
- 7) TENDER ESTIMATED VALUE _____ 57,198,624/-
- 8) ENGINEER'S ESTIMATE _____ 49,802,125/-
(For civil works only)
- 9) ESTIMATED COMPLETION PERIOD (AS PER CONTRACT) _____ 3 YEARS
- 10) TENDER OPENED ON (DATE & TIME) _____ 25.01.2018
- 11) NUMBER OF TENDER DOCUMENTS SOLD _____ 45 NOS.
(Attach list of buyers)
- 12) NUMBER OF BIDS RECEIVED _____ 03 NOS.
- 13) NUMBER OF BIDDERS PRESENT AT THE TIME OF OPENING OF BIDS _____ 45 NOS.
- 14) BID EVALUATION REPORT _____ ATTACHED
(Enclose a copy)
- 15) NAME AND ADDRESS OF THE SUCCESSFUL BIDDER _____ M/s A.H Builders
- 16) CONTRACT AWARD PRICE _____ 57,198,624/-
- 17) RANKING OF SUCCESSFUL BIDDER IN EVALUATION REPORT _____ M/s A.H Builders
(i.e. 1st, 2nd, 3rd EVALUATION BID). _____ M/s Bashir Ahmed Shaikh
_____ M/s Nooruddin S. Shaikh
- 18) METHOD OF PROCUREMENT USED : - (Tick one)
- a) SINGLE STAGE – ONE ENVELOPE PROCEDURE Yes Domestic/ Local
- b) SINGLE STAGE – TWO ENVELOPE PROCEDURE
- c) TWO STAGE BIDDING PROCEDURE
- d) TWO STAGE – TWO ENVELOPE BIDDING PROCEDURE

PLEASE SPECIFY IF ANY OTHER METHOD OF PROCUREMENT WAS ADOPTED i.e. EMERGENCY, DIRECT CONTRACTING ETC. WITH BRIEF REASONS:

19) APPROVING AUTHORITY FOR AWARD OF CONTRACT _____

20) WHETHER THE PROCUREMENT WAS INCLUDED IN ANNUAL PROCUREMENT PLAN?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

21) ADVERTISEMENT :

i) SPPRA Website
(If yes, give date and SPPRA Identification No.)

Yes	S. No. 35765 Dated: 20.12.2017
No	

ii) News Papers
(If yes, give names of newspapers and dates)

Yes	Daily SOBH, dt: 23.12.2017, Daily Awami Awaz, Dt: 24.12.2017, The Express Tribun
No	Dt: 24.12.2017, The KAWISH, dt: 25.12.17

22) NATURE OF CONTRACT

Domestic/ Local	<input checked="" type="checkbox"/>	Int.	<input type="checkbox"/>
--------------------	-------------------------------------	------	--------------------------

23) WHETHER QUALIFICATION CRITERIA
WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?
(If yes, enclose a copy)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

24) WHETHER BID EVALUATION CRITERIA
WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?
(If yes, enclose a copy)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

25) WHETHER APPROVAL OF COMPETENT AUTHORITY WAS OBTAINED FOR USING A
METHOD OTHER THAN OPEN COMPETITIVE BIDDING?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

26) WAS BID SECURITY OBTAINED FROM ALL THE BIDDERS?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

27) WHETHER THE SUCCESSFUL BID WAS LOWEST EVALUATED
BID / BEST EVALUATED BID (in case of Consultancies)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

28) WHETHER THE SUCCESSFUL BIDDER WAS TECHNICALLY
COMPLIANT?

Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

29) WHETHER NAMES OF THE BIDDERS AND THEIR QUOTED PRICES WERE READ OUT AT
THE TIME OF OPENING OF BIDS?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

30) WHETHER EVALUATION REPORT GIVEN TO BIDDERS BEFORE THE AWARD OF
CONTRACT?

(Attach copy of the bid evaluation report)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

31) ANY COMPLAINTS RECEIVED
(If yes, result thereof)

Yes	
No	NO

32) ANY DEVIATION FROM SPECIFICATIONS GIVEN IN THE TENDER NOTICE / DOCUMENTS
(If yes, give details)

Yes	
No	NO

33) WAS THE EXTENSION MADE IN RESPONSE TIME?
(If yes, give reasons)

Yes	
No	NO

34) DEVIATION FROM QUALIFICATION CRITERIA
(If yes, give detailed reasons.)

Yes	
No	NO

35) WAS IT ASSURED BY THE PROCURING AGENCY THAT THE SELECTED FIRM IS NOT
BLACK LISTED?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

36) WAS A VISIT MADE BY ANY OFFICER/OFFICIAL OF THE PROCURING AGENCY TO THE
SUPPLIER'S PREMISES IN CONNECTION WITH THE PROCUREMENT? IF SO, DETAILS TO
BE ASCERTAINED REGARDING FINANCING OF VISIT, IF ABROAD:
(If yes, enclose a copy)

Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------


37) WERE PROPER SAFEGUARDS PROVIDED ON MOBILIZATION ADVANCE PAYMENT IN
THE CONTRACT (BANK GUARANTEE ETC.)?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

38) SPECIAL CONDITIONS, IF ANY
(If yes, give Brief Description)

Yes	
No	NO

Signature & Official Stamp of
Authorized Officer


Executive Engineer
Drainage Division
Badin.


FOR OFFICE USE ONLY

SPPRA, Block. No.8, Sindh Secretariat No.4-A, Court Road, Karachi
Tele: 021-9205356; 021-9205369 & Fax: 021-9206291

Print

Save

Reset

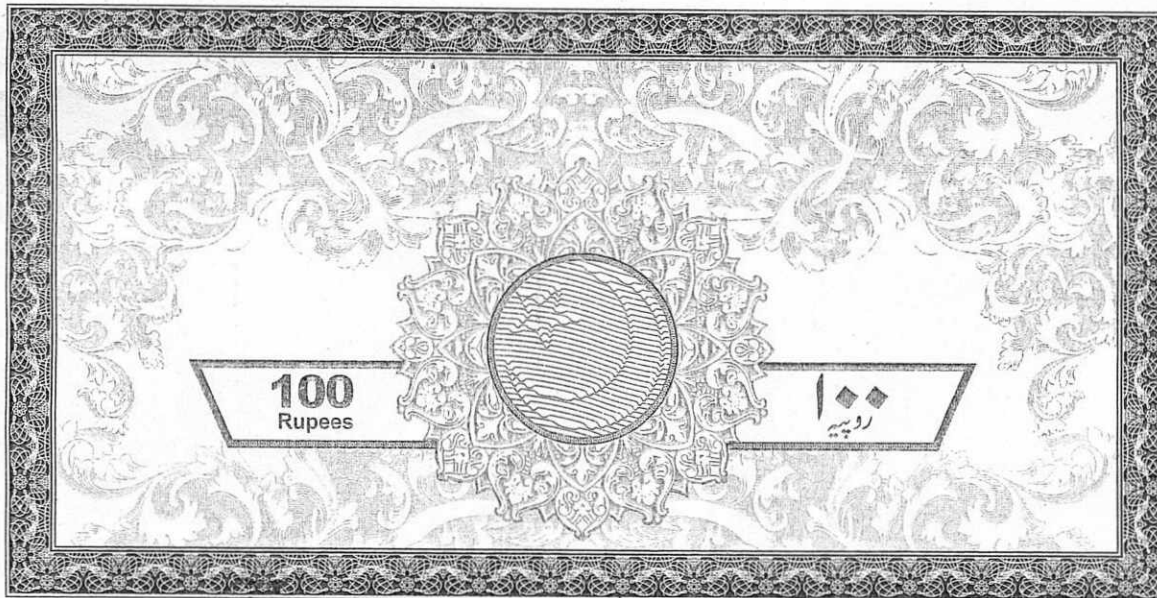

M/s A.H Builders

Rs: 57,99,000/-

3385
07/03/2018


CONTRACT AGREEMENT

THIS CONTRACT AGREEMENT (hereinafter called the "Agreement") made on the 7th. March, 2018 between Executive Engineer Drainage Division Badin, Project Director, LBOD Project, Hyderabad (hereinafter called the "Employer") of the one part and **M/s A.H Builders & Construction Company**, House No. B-15 Al-Rehman Cottages Bypass Road Hyderabad, (hereinafter called the "Contractor") of the other part.

WHEREAS the Employer is desirous that certain Works, viz "CONSTRUCTION OF SAMRADEE LINK DRAIN FROM RD. 0.0 TO 20.00 OUTFALLING IN 1-R OF MATLI BRANCH DRAIN AT RD. 35.0 AND ITS ALLIED STRUCTURES" should be executed by the Contractor and has accepted a Bid by the Contractor for the execution and completion of such works and the remedying of any defects therein.

NOW this Agreement witnessed as follows:

1. In this Agreement words and expressions shall have the same meanings as are respectively assigned to them in the Conditions of the Contract hereinafter referred to.
2. The following documents after incorporating addenda, if any except those parts relating to Instructions to Bidders, shall be deemed to form and be read and construed as part of this Agreement, viz:
 - (a) The letter of Acceptance;
 - (b) The form of Bid along with Schedules;
 - (c) Conditions of Contract & Contract Data;
 - (d) The Schedule of Prices (duly filed in);
 - (e) The specifications;
 - (f) The Drawings; and
 - (g) Performance Security / Bank Guarantee (To be furnished as per letter of Acceptance)
3. In consideration of the payments to be made by the Employer to the Contractor as hereinafter mentioned, the Contractor hereby covenant with the Employer to execute and complete the works and remedy defects therein in conformity and in all respects within the provisions of the Contract.


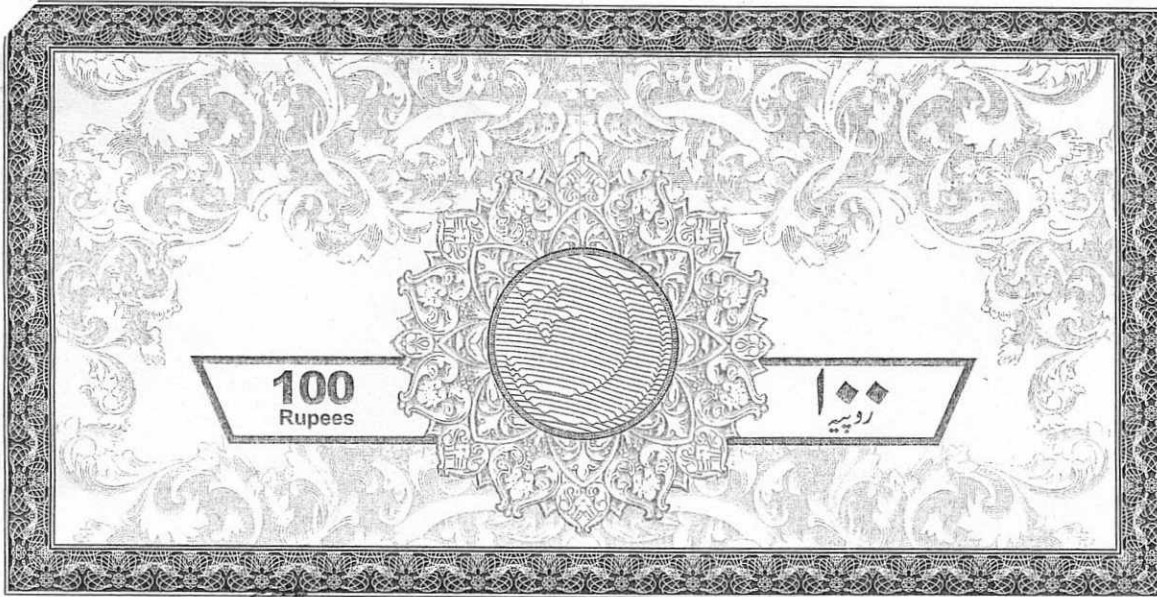




M/s A. H Builders

3385
07/03/2018

4. The Employer hereby covenants to pay the Contractor, in consideration of the execution and completion of the works as per provisions of the Contract, the Contract Price or such other sum as may become payable under the provisions of the Contract at the times and in the manner prescribed by the Contract.

IN WITNESS WHEREOF the parties hereto have caused this Agreement to be executed on the day month and year first before written in accordance with their respective laws.


Signature of the Contractor

(Seal)


Signature of Employer

(Seal)

Signed, Sealed and Delivered in the Presence of:

Witness:

(Name, Title and Address)

Witness:

(Name, Title and Address)



No. A.D(Assest)/SPPRA/35765/17
GOVERNMENT OF SINDH 2167
SINDH PUBLIC PROCUREMENT REGULATORY
AUTHORITY

Karachi, dated the 29th March, 2018

The Executive Engineer,
Drainage Division,
BADIN.

Subject: NIT: NO.TC/G-148/DD/1234/2017/Dated 20.12.2017 (Sr. # 35765).

The undersigned is directed to refer to the contract documents received vide letter dated 15-03-2018 on the subject Notice Inviting Tender and to convey that :-

- i. Procuring Agency is required to furnish reply of para ii & ii of this authority's letter dated 02-01-2018.
- ii. Procuring Agency has not affixed Adhesive stamps shall be at ratio 0.35% of the total amount of bid offered by bidder as per Government of Pakistan Rule.
- iii. Procuring Agency has not mentioned compete address of successful bidder in Contract Evaluation Form at Sr.No. 15, which is required.

2. In view of above, the Procuring Agency is advised to furnish above mentioned documents at the earliest. It may be noted that the compliance of SPP Rules 2010(amended 2017) is the sole responsibility of Procuring Agency in letter and spirit.

3. It may be further noted that 'SPPRA has developed and launched new website 'Procurement Performance Management System (PPMS)' <https://ppms.pprasindh.gov.pk/>. All Procuring Agencies are advised to use this website for uploading their NIT, BER and contract documents by themselves. For any query please contact at 021-99205356-99203287.


ASSISTANT DIRECTOR (ASSESSMENT)

Copy forwarded for information to:-

- ✓ The Secretary to Government of Sindh, Irrigation Department, Karachi.
- ✓ The Staff Officer to Managing Director, SPPRA, Karachi.
- ✓ Master file.



**OFFICE OF THE EXECUTIVE ENGINEER
DRAINAGE DIVISION, BADIN**

E-mail : drainagedivisionbadin@gmail.com

Off: No. 022-2622576

No. TC/ G-148/DD/495 of 2018 Badin, Dated: 13 / 04 / 2018

To,

The Assistant Director (Assessment)
Sindh Public Procurement Regulatory Authority
Government of Sindh, Karachi.

SUBJECT:- NIT NO. TC/G-148/DD/1234 / 2017/ DATED: 20.12.2017 (SR. # 35765).

Reference:- No. A.D (Assest)/SPPRA/ 35765/17/ 2167, Dated: 29.03.2018.

The replies to observation / infirmities are as under:-

S. #	Observation	Replies
1.	The reply of paras ii & iii of this authority's letter dated: 02.01.2018 is still awaited.	The reply of paras is attached herewith.
2.	P.A has not affixed Adhesive Stamps shall be at ratio 0.35% of the total amount of estimated cost offered by bidders as per Stamps rule of Government of Pakistan.	The Adhesive Stamps at Ratio 0.35% are affixed in contract agreement; the photo copy is attached herewith.
3.	P.A has also not mentioned completed address of successful bidder in Contract Evaluation Form at Sr. No. 15.	The addressed of successful bidder in Contract Evaluation Form at Sr. No. 15 is mentioned, the photo copy of same is attached herewith.

In view of above observation / replies, the office of undersigned will try best to comply SPP Rule 2010 (amended 2017).


EXECUTIVE ENGINEER
DRAINAGE DIVISION
BADIN

SPPRA INWARD DIARY
NO : 4571
DATED: 20/04/18







M/s A.H Builders

CONTRACT AGREEMENT

Rs: 57,99,000/-

3385
07/03/2018

THIS CONTRACT AGREEMENT (hereinafter called the "Agreement") made on the 7th. March, 2018 between Executive Engineer Drainage Division Badin, Project Director, LBOD Project, Hyderabad (hereinafter called the "Employer") of the one part and **M/s A.H Builders & Construction Company**, House No. B-15 Al-Rehman Cottages Bypass Road Hyderabad, (hereinafter called the "Contractor") of the other part.


WHEREAS the Employer is desirous that certain Works, viz "CONSTRUCTION OF SAMRADEE LINK DRAIN FROM RD. 0.0 TO 20.00 OUTFALLING IN 1-R OF MATLI BRANCH DRAIN AT RD. 35.0 AND ITS ALLIED STRUCTURES" should be executed by the Contractor and has accepted a Bid by the Contractor for the execution and completion of such works and the remedying of any defects therein.

NOW this Agreement witnessed as follows:

1. In this Agreement words and expressions shall have the same meanings as are respectively assigned to them in the Conditions of the Contract hereinafter referred to.
2. The following documents after incorporating addenda, if any except those parts relating to Instructions to Bidders, shall be deemed to form and be read and construed as part of this Agreement, viz:
 - (a) The letter of Acceptance;
 - (b) The form of Bid along with Schedules;
 - (c) Conditions of Contract & Contract Data;
 - (d) The Schedule of Prices (duly filed in);
 - (e) The specifications;
 - (f) The Drawings; and
 - (g) Performance Security / Bank Guarantee (To be furnished as per letter of Acceptance)
3. In consideration of the payments to be made by the Employer to the Contractor as hereinafter mentioned, the Contractor hereby covenant with the Employer to execute and complete the works and remedy defects therein in conformity and in all respects within the provisions of the Contract.



Assistant Accountant
District Accounts Office Hyderabad

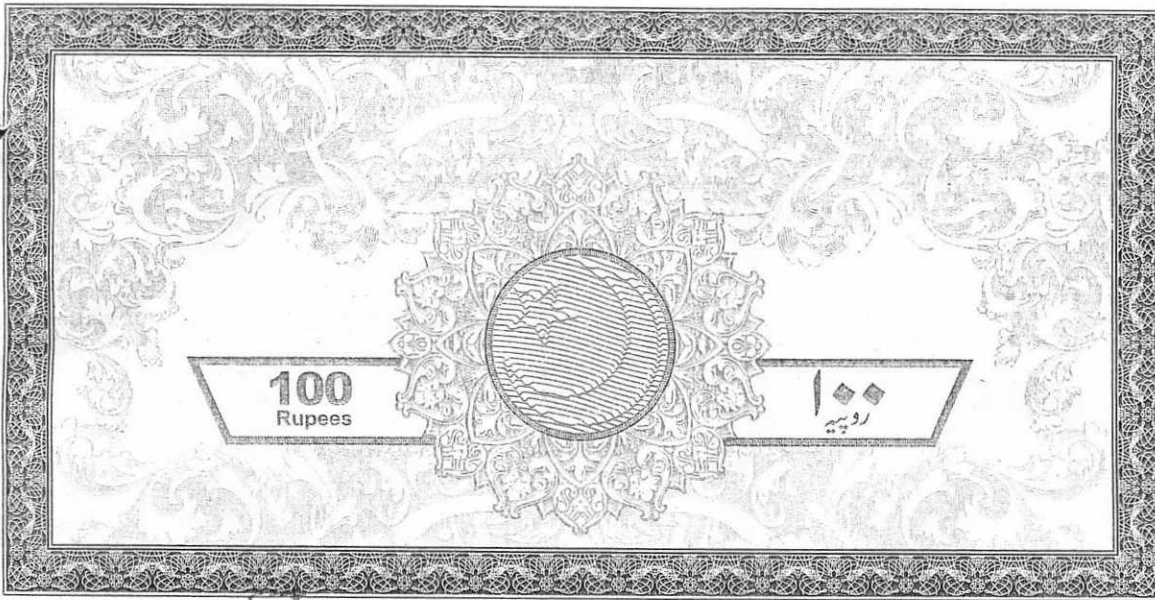



M/S A.H Builders

3385
07/07/2018


4. The Employer hereby covenants to pay the Contractor, in consideration of the execution and completion of the works as per provisions of the Contract, the Contract Price or such other sum as may become payable under the provisions of the Contract at the times and in the manner prescribed by the Contract.

IN WITNESS WHEREOF the parties hereto have caused this Agreement to be executed on the day, month and year first before written in accordance with their respective laws.



Signature of the Contractor


(Seal)



Signature of Employer


(Seal)

Signed, Sealed and Delivered in the Presence of:

Witness:

(Name, Title and Address)

Witness:

(Name, Title and Address)

SINDH PUBLIC PROCUREMENT REGULATORY AUTHORITY

CONTRACT EVALUATION FORM

TO BE FILLED IN BY ALL PROCURING AGENCIES FOR PUBLIC CONTRACTS OF WORKS, SERVICES & GOODS

- DRAINAGE DIVISION BADIN, IRRIGATION DEPARTMENT
- 1) NAME OF THE ORGANIZATION / DEPTT. _____
 - 2) PROVINCIAL / LOCAL GOVT./ OTHER PROVINCIAL
 - 3) TITLE OF CONTRACT CONSTRUCTION OF SAMRADEE LINK DRAIN from 120.0 to 20
 - 4) TENDER NUMBER No. TC/G-148/DD/44, Dated: 10.01.2018.
 - 5) BRIEF DESCRIPTION OF CONTRACT EARTH WORK, STRUCTURE WORK
 - 6) FORUM THAT APPROVED THE SCHEME ADP NO. 1080
 - 7) TENDER ESTIMATED VALUE 57,198,624/-
 - 8) ENGINEER'S ESTIMATE 49,802,125/-
(For civil works only)
 - 9) ESTIMATED COMPLETION PERIOD (AS PER CONTRACT) 3 YEARS
 - 10) TENDER OPENED ON (DATE & TIME) 25.01.2018
 - 11) NUMBER OF TENDER DOCUMENTS SOLD 45 NOS.
(Attach list of buyers)
 - 12) NUMBER OF BIDS RECEIVED 03 NOS.
 - 13) NUMBER OF BIDDERS PRESENT AT THE TIME OF OPENING OF BIDS 45 NOS.
 - 14) BID EVALUATION REPORT ATTACHED
(Enclose a copy)
 - 15) NAME AND ADDRESS OF THE SUCCESSFUL BIDDER M/s A.H Builders & Construction Company
House No B-15, M-Railway, Gurgaon B-15
 - 16) CONTRACT AWARD PRICE 57,198,624/-
 - 17) RANKING OF SUCCESSFUL BIDDER IN EVALUATION REPORT
(i.e. 1st, 2nd, 3rd EVALUATION BID).
M/s A.H Builders
M/s Bashir Ahmed Shaikh
M/s Nooruddin S. Shaikh
 - 18) METHOD OF PROCUREMENT USED : - (Tick one)
 - a) SINGLE STAGE – ONE ENVELOPE PROCEDURE Yes Domestic/ Local
 - b) SINGLE STAGE – TWO ENVELOPE PROCEDURE
 - c) TWO STAGE BIDDING PROCEDURE
 - d) TWO STAGE – TWO ENVELOPE BIDDING PROCEDURE

PLEASE SPECIFY IF ANY OTHER METHOD OF PROCUREMENT WAS ADOPTED i.e. EMERGENCY, DIRECT CONTRACTING ETC. WITH BRIEF REASONS:

[Handwritten signature]
Drainage Division
Badin

19) APPROVING AUTHORITY FOR AWARD OF CONTRACT _____

20) WHETHER THE PROCUREMENT WAS INCLUDED IN ANNUAL PROCUREMENT PLAN?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

21) ADVERTISEMENT :

i) SPPRA Website
(If yes, give date and SPPRA Identification No.)

Yes	S. No. 35765 Dated: 20.12.2017
No	

ii) News Papers
(If yes, give names of newspapers and dates)

Yes	Daily SOBH, dt: 23.12.2017, Daily Awami Awaz, Dt: 24.12.2017, The Express Tribun
No	Dt: 24.12.2017, The KAWISH, dt: 25.12.17

22) NATURE OF CONTRACT

Domestic/ Local	<input checked="" type="checkbox"/>	Int.	<input type="checkbox"/>
--------------------	-------------------------------------	------	--------------------------

23) WHETHER QUALIFICATION CRITERIA
WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?
(If yes, enclose a copy)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

24) WHETHER BID EVALUATION CRITERIA
WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?
(If yes, enclose a copy)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

25) WHETHER APPROVAL OF COMPETENT AUTHORITY WAS OBTAINED FOR USING A
METHOD OTHER THAN OPEN COMPETITIVE BIDDING?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

26) WAS BID SECURITY OBTAINED FROM ALL THE BIDDERS?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

27) WHETHER THE SUCCESSFUL BID WAS LOWEST EVALUATED
BID / BEST EVALUATED BID (in case of Consultancies)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

28) WHETHER THE SUCCESSFUL BIDDER WAS TECHNICALLY
COMPLIANT?

Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

29) WHETHER NAMES OF THE BIDDERS AND THEIR QUOTED PRICES WERE READ OUT AT
THE TIME OF OPENING OF BIDS?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

30) WHETHER EVALUATION REPORT GIVEN TO BIDDERS BEFORE THE AWARD OF
CONTRACT?

(Attach copy of the bid evaluation report)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

31) ANY COMPLAINTS RECEIVED
(If yes, result thereof)

Yes	
No	NO

32) ANY DEVIATION FROM SPECIFICATIONS GIVEN IN THE TENDER NOTICE / DOCUMENTS
(If yes, give details)

Yes	
No	NO

33) WAS THE EXTENSION MADE IN RESPONSE TIME?
(If yes, give reasons)

Yes	
No	NO

34) DEVIATION FROM QUALIFICATION CRITERIA
(If yes, give detailed reasons.)

Yes	
No	NO

35) WAS IT ASSURED BY THE PROCURING AGENCY THAT THE SELECTED FIRM IS NOT BLACK LISTED?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

36) WAS A VISIT MADE BY ANY OFFICER/OFFICIAL OF THE PROCURING AGENCY TO THE SUPPLIER'S PREMISES IN CONNECTION WITH THE PROCUREMENT? IF SO, DETAILS TO BE ASCERTAINED REGARDING FINANCING OF VISIT, IF ABROAD:
(If yes, enclose a copy)

Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------


37) WERE PROPER SAFEGUARDS PROVIDED ON MOBILIZATION ADVANCE PAYMENT IN THE CONTRACT (BANK GUARANTEE ETC.)?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

38) SPECIAL CONDITIONS, IF ANY
(If yes, give Brief Description)

Yes	
No	NO

Signature & Official Stamp of
Authorized Officer


JAVED HAKEEM MEMON

FOR OFFICE USE ONLY

Drainage Division
Dtdh

SPPRA, Block. No.8, Sindh Secretariat No.4-A, Court Road, Karachi

Tele: 021-9205356; 021-9205369 & Fax: 021-9206291

Print

Save

Reset



**OFFICE OF THE EXECUTIVE ENGINEER
DRAINAGE DIVISION, BADIN**

E-mail : drainagedivisionbadin@gmail.com

Off: No. 022-9210347

No. TC/ G-148/DD/ 496 of 2018 Badin, Dated: 13 / 04 / 2018

To,

The Assistant Director (Assessment)
Sindh Public Procurement Regulatory Authority
Government of Sindh, Karachi.

SUBJECT:- NIT NO. TC/G-148/DD/1234/2017, Dated: 20.12.2017 (Sr. # 35765).

Reference:- No. A.D (Assest)/SPPRA/ 35765/17/ 3020, Dated: 02.01.2018.

The replies to observation / infirmities are as under:-

S. No.	Observation	Replies
1.	Procuring Agency is required to furnish Newspaper clippings of NIT published leading widely circulated in English, Urdu & Sindh Languages as per Rule-17(1) & (2) of SPP Rules, 2010 (Amended – 2017).	Attached
2.	APP shows different in NIT with condition of payment that delay may not be charged with interest but P.A was not varied its procurement Schedule / completion schedule which cover the risk of other party. In case of non-release of funds what will be the fate of the contractor?	Funds will be released in due course of time. The APP is attached herewith.
3.	Percentage of performance security is not mentioned in bidding documents as per Rule-39 of SPP Rules, 2010.	5% percent of performance Security is mentioned in bidding documents issued to Bidders.

In view of above observation / replies, the office of undersigned will try best to comply SPP Rule 2010 (amended 2017).


EXECUTIVE ENGINEER
DRAINAGE DIVISION
BADIN

2.	Annual M/R of roads including lean of debris/earth falling on katcha road in Cantt. Area	20,000	4,00,000/-	2,000/-
3.	Annual M/R of drains including manholes	10,000	2,00,000/-	2,000/-
4.	Annual M/R of water supply lines	05,000	1,00,000/-	2,000/-
5.	Misc Public Improvement/beautification works including street lights	10,000	2,00,000/-	2,000/-

- The tender form can be obtained from this office on any working day during office hours on payment (non-refundable) as mentioned above on or before 10-01-2018. No tender form will be issued on the date of closing of tender.
- The rates shall be quoted as above/below the MES Schedule of Rates 2014 (amended from time to time) on percentage basis.
- The serial No. & description of work should be clearly written on it and along with copy of valid Registration with PEC.
- Earnest money at the rate of 2% of the estimated cost, in the shape of call deposit of the schedule bank in the name of Cantt. Executive Officer, Korangi Creek Cantt. should be remitted along with application.
- The person with successful Tenders shall have to execute Contractor agreement within 07 days of issuance of the letter of acceptance.
- Conditional/telegraphic fax tender and tenders without Call Deposit will not be entertained.
- In case of non acceptance/rejection of Tenders on the above scheduled dates, the schedule for re-tendering will be next working day on 08-01-2018.
- The Cantonment Board Korangi Creek shall not supply any kind of material and machinery to the contractors.
- Any other information can be had from Engineering Branch of CBKC office on any working day during office hours.
- Up to date Income Tax Certificate & PEC Certificate is mandatory for the issuance of tender form.
- The undersigned reserves all rights to reject any one or even all tenders subject to solid reason as envisaged as per PPRR Rule No. 33 (1).
- This advertisement is also available on PPRR website at www.ppra.org.pk.

Cantonment Executive Officer
Korangi Creek

PA: 021-35090001 Fax: 021-35090718

600/-	5000/-	12	Months
6000/-	50000/-	12	Months
60000/-	500000/-	12	Months

her information and bid-
ed.

he bid documents w.e.f

ided from SPPRA website.
15/01/2018 up to 1.30 P.M.
presence of procurement
representatives whosever

ary, the date of open-
ing, as per given
e bids are un-responded/
date of issue will be com-
1.30 P.M.
31/01/2018 up to 1.30 P.M.
respectively.

is as under.
of same nature (PHED re-
ove, executed during last
if satisfactory completion
a from employer.
last three years, requires to

copy of Letter of Award /
ove,
quired for PHED related
roof of its ownership.
ment (NTN copy, Sindh
as) and copy of CNIC.
firm is not involved in any
wined or made unneces-
in the Government De-

along with tender fee as
se of bidding documents.
mitted in the shape of Call
at the time of submission
resigned

orth along with last three
Days
or black-listed previ-
ants/ particulars/ informa-

ding Council. In respective
x year 2017, with field of

stained.
bility reserves the right to
n of SPPRA Rules.

! Engineer
ngg. Division 1
kano

INSINDB
GE TO 8 3 9 8

**OFFICE OF THE EXECUTIVE
ENGINEER DRAINAGE DIVISION,
BADIN**

E-mail: drainagedivisionbadin@gmail.com Off.No.022-2622576
No.TC/G-148/DD/1534 of 2017 Badin Dated:20-12-2017

NOTICE INVITING TENDER

- The Executive Engineer Drainage Division Badin has received funds from the Provincial Government towards the cost of Construction of Samralee Link Drain from RD. 0.0 to RD. 20.0 and it is intended that part of the proceeds of the funds will be applied to eligible payments under the contract for the Construction of Samralee Link Drain from RD. 0.0 to RD. 20.0 (ADP NO. 1060) for the following works.

S. No.	Name of Work	Approximate Estimate cost	Earnest Money Rs. @ 5%	Tender Fee	Period
1.	Construction of Samralee Link Drain from RD. 0.0 to RD. 20.0 outfalling in IR of Malhi Branch Drain at RD. 35.0.				
i.	Construction of Samralee Link Drain RD. 0.0 to 20.0				
ii.	Construction of 10 No. RCC Pipe Inlets				
iii.	Construction of 04 No. Village Road Bridges				
iv.	Construction of 12 No. Water Course Crossing				
v.	Construction of Outfall Structure	49,802,125/-	2,496,106/-	2,000/-	3 Year
vi.	Construction of Water Course Crossing along Shadi Bahadur Branch Drain				
vii.	Construction of Box Culvert along Phulleli Guni Outfall Drain				
viii.	Construction of Water Course Crossing along Tando Muhammad Branch Drain				
ix.	Construction of 05 No. R.C.C Pipe Inlets				
x.	Construction of Water Course Crossing along Morhadi Drain				

Bidding is open to all interested bidders.

- Procuring agency invites sealed bids from interested firms or persons licensed by the Pakistan Engineering Council (PEC) in the category C5 or above for the works and registered with Federal Board of Revenue & Sindh Board of Revenue.
- The method of procurement is single stage, one envelope.
- Bidders are required to submit the following documents with bids.
 - Company Profile.
 - List of similar type of works in hand during last five years
 - Machinery and equipment owned by the firms/ contractors required for the said work.
 - Auditors report for last five (05) years.
 - Turn over for the last 05 years limit upto Rs. 20.00 Million.
 - Financial credit line certificate from recognized bank to meet out this said work.
 - Income Tax Returns for the last 05 years.
 - Affidavit of no litigation with Irrigation department.
 - Affidavit of not black listed in any Government Department.
 - List of Works in same geographical area specially in coastal area.
- Bidders may obtain the bidding documents (BD) from the Office of the procuring agency, up to 09-01-2018 at 4:00 P.M. at the office of the Executive Engineer Drainage Division Badin, Camp office Kotri Barrage Officers Colony, Hyderabad.
- A complete set of BD may be purchased by an interested bidder on submission of a written application to the above office and upon payment of a non-refundable fee of Rs. 2000/-
- All bids must be accompanied by a bid security in 5% in the shape of Call Deposit should be attached with bids at the time of submission in favour of Executive Engineer Drainage Division Camp office Kotri Barrage Officers Colony, Hyderabad on or before 1.00 P.M. on 10-01-2018. Bids will be opened at 2.00 P.M. on the same day, in the presence of bidder's representatives who choose to attend at the same address. Pay order will not be accepted.
- The payment will be made on availability of funds. In case of delay payment no interest / markup will be made to the contractor / firm.
- Procuring agency reserves right to annul the bidding process and reject all bids or proposals, as per SPP Rules 2010.
- If any holiday declared by the Government or the undersigned is out of head quarter, the bids will be opened on next working day.

Executive Engineer
Drainage Division
Badin

INF-KRY.No.5527/17



FOR THE BETTERMENT OF EDUCATION IN SINDH
SMS 12MI + YOUR MESSAGE TO 8 3 9 8

The Express Tribune 24-12-2017



آفيسن آف دي ايگزيڪيوٽو انجنيئر
 ٽي. ايم. خان ڊرينيڇ ڊويزن ٽي. ايم. خان
 02-9341732 No. TC/G/55/1032 of 2017 Date: 12-12-2017

واڪي گھرانو لاءِ نوٽيس

هيٺ ڄاڻايل ڪمن واسطي واسطيدار ڪمپنيگري پر پاڪستان جنئريٽو ڪارپوريشن وٽ اينسٽ ٽيل خواهشمند ڪانٽريڪٽرن/فرمن/ڪمپنين ان سنڌ پبلڪ ٽرانسپورٽ ڪارپوريشن جي نئين ڪم لاءِ اسٽينڊرڊ ڪنٽراڪٽ (SBDs) تي مهينو واڪ گھرانو ٿا.

ڪم جو تفصيل	ڪم جو ڪوٽ	سولائيٽي رقم 2% (ملين روپيا)	ٽينڊر في جو مقرر	ٽينڊر جو مقرر
1. شاخ سب ڊويزن ۽ ان جي لاڳاپيل اسٽريڪٽر جي تعمير ۽ مقرر ڪم.	28.576 لاکھ (ملين روپيا)	0.572	2000	2 سال
2. 2 عدد پمپ هائوس جي تعمير ۽ شاخ سب ڊويزن لڳ سنڀالڻ ايڪسپريز سولر سسٽم سنڀالڻ جي فراھمي، لڳائڻ/تعمير.	35.454 لاکھ (ملين روپيا)	0.709	2000	2 سال
3. ٽي. ايم. خان ڊويزن ڊويزن جي آفيس بلاڪ جي ريسٽوريشن، پروڪيورمينٽ جو طريقو؛ سنگل اسٽيج سنگل اينويٽي واڪ/ٽينڊر ڪاغذ؛	6.675 لاکھ (ملين روپيا)	0.134	2000	2 سال

واڪ ڪاغذ جا اسٽينڊرڊ فارم اشاعت جي تاريخ کان 09-01-2018 منجهند 1:30 وڳي تائين هر هڪ ڪم لاءِ 2000 روپين جي ادائگي (ناقابل واپسي) ڪرڻ تي جاري ڪيا ويندا. ٽينڊر/اسٽينڊرڊ واڪ ڪاغذ پڻ ويب سائٽ: www.pprasinhd.gov.pk تان ڏانهن لاء ڪري ۽ پروگرام مطابق ٽينڊر في (جيشن مٿي ڄاڻايل آهي) ناقابل واپسي) ادا ڪرڻ تي ايگزيڪيوٽو انجنيئر تي. ايم. خان ڊويزن ڊويزن جي آفيس واقع پيراج ڪالوني، ٽينڊر منجھل لڳان کي موڪلي سگھجن ٿا.

آخري تاريخ 10-01-2018 منجهند 1:30 وڳي تائين هوندي. ڪورنگ: ساڳي تاريخ يعني: 10-01-2017 تي منجهند 2:30 وڳي ڪورنگ ٿيندي. واقع پيراج ڪالوني ٽينڊر محمد خان ٽي. ايم. خان جي صورت ۾ واڪ ڏيڻ جي تاريخ تي ساڳي وقت ۽ تان خريد ڪيا/ڪورنگ ٿيندا. واڪ ڪاغذن سان هر هڪ ڪم جي عيوض ڏيکاريل ڪال ڊيپازٽ/واڪ سيڪيورٽي شامل هئڻ گھرجي. مشروط واڪ تي غور نه ڪيو ويندو. پروڪيورنگ ايگزينسٽو، واڪ ڏيڻ مان ڪنهن جي پاران به گذارش ڪرڻ تي اهڙي واڪ ڏيڻ کي واڪ عمل جي منسوخ جي سبب بابت پڌاڻي ٿيندي پر ڄاڻايل آهي ته موجوده ڪم تي سمورا ٽيڪس لازمي شامل ڪيل هجن. واڪ ڏيڻ واسطيدار صوبائي ۽ وفاقي ٽيڪس اختيارين وٽ لازمي طرح رجسٽرڊ ٿيل هجن.

ايگزيڪيوٽو انجنيئر
 ٽي. ايم. خان ڊرينيڇ ڊويزن
 ايت تي. ايم. خان
 INF/KRY.No:5271/

SAVING TO CORRUPTION
 ٽي. ايم. خان ڊرينيڇ ڊويزن
 8 3 9 8

سنڌ اسٽينڊرڊ ڪنٽراڪٽنگ ڪمپني پرائيويٽ ليڊيمٽيڊ
 10. عدو رڪن پائيل انٽيلجنس جي تعمير
 11. عدو رڪن پائيل انٽيلجنس جي تعمير
 12. عدو واٽر ڪورس ڪراسنگ جي تعمير
 13. آڏوٽ فال اسٽريڪچر جي تعمير
 14. شادي بهادر پراڻج ورن لڳولڳ واٽر ڪورس ڪراسنگ جي تعمير
 15. قبايلي گمي آڏوٽ فال ورن لڳولڳ پاڪس ڪلورٽ جي تعمير
 16. ٽنڊو محمد پراڻج ورن لڳولڳ واٽر ڪورس ڪراسنگ جي تعمير
 17. عدو رڪن پائيل انٽيلجنس جي تعمير
 18. سموراهي ورن لڳولڳ واٽر ڪورس ڪراسنگ جي تعمير

نيلاسي موني خواهشمند آڇ ڏيڻ لاءِ ڪيل آهي.
 02. پروڪيورنگ ايگزينسٽو خواهشمند فرم يا فردن جيڪي پاڪستان انجنيئرنگ ڪانٽرول (PEC) پاران ڪمپنيگري C-5 يا وڌيڪ ڪم جي لاءِ لائيسنس پائيل ۽ فيڊرل پورٽ آف وريٽو ۽ سنڌ پورٽ آف وريٽو سان رجسٽرڊ هجن، کي مهينو آڇن جي دعوت ڏني ٿي.
 03. پروڪيورمينٽ جو طريقو سنگل اسٽيج وٽ انويٽي آهي.
 04. آڇ ڏيڻ آڇن سان گڏ هيٺ ڄاڻايل دستاويز جمع ڪرائيندا.
 1. ڪمپني پروفائيل
 2. گزريل پنج سالن جي دوران موجود ساڳي نوعيت جي ڪم جي فهرست
 3. ڄاڻايل ڪم جي لاءِ گزريل مشنري ۽ انڪورپوريشن نمونو ڏيکارڻ پاران ملڪي هيٺ هجڻ
 4. گزريل پنج سالن جي لاءِ ڊيٽرڊ رپورٽ
 5. 20.00 ملين تائين جي صلاح جي گزريل پنج سالن لاءِ ٽرن اوور
 6. جن ڄاڻايل ڪم تي پورو اهڙو ساک واري بينڪ مان فنانشل ڪريٽ لائين سرٽيفڪيٽ
 7. گزريل پنج سالن جي لاءِ انڪورپوريشن رپورٽ
 8. حلف نامو ته آهستي ڪم سان ڪنهن قانوني ڪارروائي ۾ ملوث نه آهي.
 9. ڪنهن سرڪاري کاتي ۾ بليڪ لسٽ نه هجڻ جو حلف نامو
 10. ساڳي جاگرافيائي علائقي خاص ڪري سامونڊي پٽي واري علائقي ۾ ڪم جي فهرست
 05. آڇ ڏيڻ پروڪيورنگ ايگزينسٽو جي آفيس مان نيلار دستاويز (BD) 09-01-2018 شام 04:00 وڳي تائين ايگزيڪيوٽو انجنيئر ڊويزن ڊويزن ٻنهن جي آفيس واقع ڪمپن آفيس ڪورنگ پيراج آفيسز ڪالوني، جيترا آباد مان حاصل ڪري سگھجن ٿا.
 06. BD جو مڪمل سيٽ 2000 روپيا تائين واپسي تي جي ادائگي عيوض مشن آفيس کي لکت درخواست جمع ڪرائڻ تي خواهشمند آڇ ڏيڻ پاران خريد ڪري سگھجن ٿا.
 07. سموريون آڇون 10-01-2018 تي منجهند 01:00 وڳي يا ان کان پهرين جمع ڪرايون وينديون آهن سان گڏ لازمي ايگزيڪيوٽو انجنيئر ڊويزن ڊويزن ٻنهن ڪمپن آفيس ڪورنگ پيراج آفيسز ڪالوني، جيترا آباد جي حق ۾ جمع ڪرائڻ جي وقت آڇن سان گڏ ڪال ڊيپازٽ جي صورت ۾ 5% ۾ پڊ سيڪيورٽي لازمي شامل هجڻ گھرجي. آڇون ساڳي ايلريس تي موجود رهڻ جي لاءِ ڄاڻايل آڇ ڏيڻ جي نمائندن جي آڏو ساڳي ڏينهن تي منجهند 02:00 وڳي ڪورنگ وينديون. ٻي آڇ قبول نه ڪيا ويندا.
 08. ادائگي ڏيڻ جي مستجابي تي ڪمپني وٽي. ادائگي ۾ تاخير ٿيڻ جي صورت ۾ ٽيڪنڊار فرم کي ڪو مارڪ اينٽريٽس ادا نه ڪيو ويندو.
 09. پروڪيورنگ ايگزينسٽو SPP رولز 2010 تحت، موني آڇن يا تجويزن کي رد نه ٿيندا. عمل کي منسوخ ڪرڻ جو حق محفوظ رکي ٿي.
 10. جيڪڏهن سرڪار پاران ڪنهن عام موڪل جو اعلان ٿيو ويندو يا هيٺ دستخط ڪندڙ حيد ڪوارٽر مان ٻاهر هوندي ته آڇون اڳئين ڪم ڪار واري ڏينهن تي ڪورنگ وينديون.

مخط
 ايگزيڪيوٽو انجنيئر
 ڊرينيڇ ڊويزن بلدين
 INF/KRY.No:5271/

- ايس مان 2000 روپيا هر حاصل ڪري سگھجن ٿا
www.pprasinhd.gov.pk
 سرڪاري، ادائگي خطي سگھڻ
 هيٺ صحيح ڪندڙ پاران ٽينڊر/ لکت درخواست جي اماڻڻ تي اخبار تائين جاري ڪيا ويندا. ٽينڊر واڪ ڏيڻ وريٽو ٽيڪس ڪارپوريشن مان ملي، سي وڳي تائين واپس وصول ڪيا ويندا ۽ فرمن/ٽيڪنڊارن يا سندن مجاز نمائندن سپرنٽينڊنگ انجنيئر سال ڊويزن آرگنائيزيشن صحيح ڪندڙ ٽوڙي ٽينڊرنگ/پروڪيورنگ هيٺ ڪارروا ڪان باهر هئڻ جي صورت ۾، وصول ڪيا ۽ ڪورنگ ٿيندا.
 واڪ/ٽينڊر کي موت نه ملڻ جي صورت ۾ ڪيا/ڪورنگ ٿيندا.
 2018-01-12 کان 2018-01-25 (اي) اجراءِ جي تاريخ
 ٽينڊر ڪورنگ واري تاريخ تي سرڪار پاران ڪم ڪار نه ٿيڻ جي ڪري ورنڊو سرڪار ۽ ڪورنگ لاءِ ساڳي وقت تي تصور ڪيو ويندو ٽينڊر ڪورنگ لاءِ 5% واڪ سڀا ايگزيڪيوٽو انجنيئر سال ڊويزن ڊويزن ڊويزن ڪيا ويندا.
 ٽيڪنڊارن کي سندن مڪمل ۽ دست موڙ ڄاڻايل ڪورنگ ۽ اڪيڊمي اڪرن ۽ انڪن پر انٽرو/شرطي ٽينڊر قبول نه ڪيا ويندا.
 جيڪڏهن ڪو ڪورنگ ڪاغذ ملڻ ٿيندو معارضتي جي منسوخ/رد ڪيا ويندا.
 شرطي ٽينڊر غور حاصل نه ڪندا ۽ پڻ نيشن ٿيندا.
 نان شيڊيبل آئٽمز تي ڪنهن به پرسي جي پاڪستان انجنيئرنگ ڪانٽرول جي آرڊر ۽ اڪون پر ڪنهن به بندي وڏي غلطي کي مزيج ڪانٽرول/پلان ۽ وضاحتون هيٺ صحيح ڪندا ڏينهن تي آفيس وقت دوران ٽي سگھجن ٿا معارضتي مشورتي پي ڊيليز ڊي اسيسٽنٽ سان استعمال ڪيو ويندو.
 پروڪيورنگ ايگزينسٽو ڪنهن واڪ ڏيڻ جو لاءِ اهڙن واڪ ڏيڻ کي سبب کان آگاهه ڪرڻ گھرجي نه آهي.
 ورڪ آرڊر سمورين قانونن ۽ ايس پي آر ڪيو ويندو.
 مجاز اختياري ايس پي آر واري 2010 حق محفوظ رکي ٿي.
 اهليت معيار
 a. پاڪستان انجنيئرنگ ڪانٽرول (PEC) تائين تجديد ٿيل رجسٽريشن.
 b. انڪورپوريشن ۽ سائيز ٽيڪس لاءِ واڪ
 c. واڪ ڏيڻ ساڳو ڪم (ڊويزن) ۾ هجي ۽ واسطيدار (اختياري وٽن) ٿي پوندي.
 d. واڪ ڏيڻ ڪورنگ 3 سالن جي ماليت ۽ گزريل 3 سالن لاءِ انڪورپوريشن پڻ
 e. حلفنامو ٽيڪس ڪورنگ کاتي سان ڪار ما

ايگزيٽو
 انف/ڪري.نو:5279/2017
 CORRUPTION
 ٽي. ايم. خان ڊرينيڇ ڊويزن
 8 3 9 8

25-12-2017

ANNUAL PROCUREMENT PLAN FOR 2017-18

NAME OF THE PROCURING AGENCY:

**IRRIGATION DEPARTMENT, GOVERNMENT OF SINDH
EXECUTIVE ENGINEER DRAINAGE DIVISION, BADIN**

Name of ADP Scheme:-

ADP NO. 1080 NAMEDLY "Construction of Samraadee Link Drain from RD. 0.0 to RD. 20.0 outfalling in 1R of Matli Branch Drain at RD. 35.0."

S.#	Name of Procurement (Description)	Estimated Cost	PC-I Cost	Procurement Method	Source of funds (ADP / Non ADP)	Tentative date of Procurement Notice Publication	Tentative Date of Award of Contract	Tentative date of completion	Allocatior
1.	Construction of Samraadee Link Drain from RD. 0.0 to RD. 20.0 out falling in 1R of Matli Branch Drain at RD. 35.0.	49,802,125/-	54.217 Million	Single Stage One Envelope Procedure	ADP	22 th December 2017	25 th January, 2018	30.06.2020	25.00 Million

(JAVED HAKEEM MEMON)
EXECUTIVE ENGINEER
DRAINAGE DIVISION
BADIN