



# KARACHI WATER & SEWERAGE BOARD

OFFICE OF THE CHIEF ENGINEER (IP&D)

## BID EVALUATION REPORT


1	Name of Procuring Agency:	KARACHI WATER & SEWERAGE BOARD
2	Tender Reference No:	KWSB/DPR/2016/06 published in daily "Regional Times" "Express" dt: 17-02-16 and daily "Awami Awaz: dt: 18-02-16. SPPRA Serial No.26689 I.D #
3	Tender Description/Name of Work/Item:	<b>PROVIDING &amp; LAYING 08" DIA, 6" DIA UPVC WATER LINE &amp; CONSTRUCTION OF B/M CHAMBER FOR IMPROVEMENT OF WATER SUPPLY IN GULSHAN-E-SHAMIM AND ADJOINING AREAS OF BLOCK-08, GULBERG TOWN</b>
4	Method of Procurement:	<u>Single Stage (One Envelop)</u>
5	Tender Published:	<u>Press publication / SPPRA Web Site</u>
6	Total Bid Documents Sold:	<u>3 Nos</u>
7	Total Bid Received:	<u>3 Nos</u>
8	Technical Bid Opening Date (if applicable):	<u>N/A</u>
9	No. of Bid Technically Qualified (if applicable)	<u>N/A</u>
10	Bid (s) Rejected:	<u>02 Nos</u>
11	Financial Bid Opening Date:	15-03-2016

### 12 BID EVALUATION REPORT


S#	Name of Firm / Bidder	COST OFFERED BY THE BIDDER	RANKING IN TERMS OF COST	COMPARISON WITH ESTIMATED COST	REASON FOR ACCEPTANCE / REJECTION	REMARKS
1	M/s.Tooba Enterprises	Rs.39,90,978/-	1 <sup>st</sup> Lowest	@0.033% Below	Pay Order and other required documents are available. P.O # 14049020 dt: 15-03-2016 Rs.80,000/- from HBL New Town Branch Karachi	Substantially Responsive
2	M/s.Shah Faisal & Brothers	Rs.40,08,303/-	-	@0.401% Above	Less amount Pay Order attached required documents are not available. P.O # 14774117 dt: 15-03-2016 Rs.80,000/- from HBL Iqbal Library Branch Karachi	Un Responsive
3	M/s.N.A.F Enterprises	Rs.40,39,736/-	-	@1.188% Above	Pay Order and required documents are not available.	Un Responsive

The all concerned bidders are being informed accordingly.

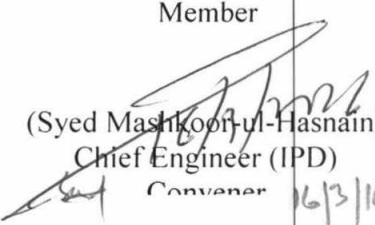
The E.E Concerned for compliance of Rule-45 of SPPRA 2010 **M/s.Tooba Enterprises** declared as the lowest responsive bidder by the Committee and recommended for sanction from Competent Authority.

  
(Arshad Ali)  
D.A.O (District Central)  
Member / Secretary

  
(Saif-ul-Haque)  
Additional Director Internal  
Audit – KMC Member

  
(Maqsood Ahmed Shaikh)  
Superintending Engineer (KMC)  
Member

  
(Syed Muhammad Jamil Akhter)  
Chief Engineer (W&S)  
Member

  
(Syed Mashkoor-ul-Hasnain)  
Chief Engineer (IPD)  
Convener

16/3/16

NIT No. SPPRA Serial No.26689

Method of Procurement: Single Stage Single Envelope.

Name of Work: PROVIDING & LAYING 08" DIA, 6" DIA UPVC WATER LINE & CONSTRUCTION OF B/M CHAMBER FOR IMPROVEMENT OF WATER SUPPLY IN GULSHAN-E-SHAMIM AND ADJOINING AREAS OF BLOCK-08, GULBERG TOWN

MINUTES OF BID OPENING MEETING.


A meeting of the procurement committee of this department was held on 15-03-2016 for opening the bids received in respect of subject NIT till deadlines of submission. The meeting was attended by all / following members of the procurement committee and the representative of bidders. **(Attendance sheet is enclosed).**

2. Three bidders submitted their bids till the deadline of submission.
  - i. M/s. Tooba Enterprises
  - ii. M/s. Shah Faisal & Brothers
  - iii. M/s. N.A.F Enterprises
3. The bids were opened at 2:30 P.M in the presence of the above mentioned participants and the rates quoted by bidders were read aloud and encircled by Chairman of the Procurement Committee.


S. No	Name of Firm	Quoted Price	Amount of Bid Security	Pay Order No. / Date
01	M/s.Tooba Enterprises	Rs.39,90,978/-	Rs.80,000/-	P.O # 14049020 dt: 15-03-2016 from HBL New Town Branch Karachi
02	M/s.Shah Faisal & Brothers	Rs.40,08,302/-	Rs.80,000/-	Less amount P.O Attached. P.O # 14774117 dt: 15-03-2016 from HBL Iqbal Library Branch Karachi
03	M/s.N.A.F Enterprises	Rs.40,39,736/-	-	Pay Order not attached.


4. The bids do not contain any over-writing or cutting.
5. The committee shall examine all the bids as per the qualification / eligibility criteria provided in the bidding document and verify the documents and bid security submitted by the bidders (if required).

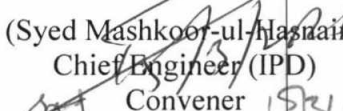
The meeting ended with the vote of thanks to and from the chair.

  
(Arshad Ali)  
D.A.O (District Central)  
Member / Secretary

  
(Saif-ul-Haque)  
Additional Director Internal  
Audit – KMC Member

  
(Maqsood Ahmed Shaikh)  
Superintending Engineer (KMC)  
Member

  
(Syed Muhammad Jamil Akhter)  
Chief Engineer (W&S)  
Member

  
(Syed Mashkoor-ul-Hasnain)  
Chief Engineer (IPD)  
Convener 15/3/16

NIT No. SPPRA Serial No.26689

Method and procedure of procurement: Open Competitive Bidding (National/ International Competitive Bidding) (Single Stage-One Envelope)


Description of work: PROVIDING & LAYING 08" DIA, 6" DIA UPVC WATER LINE & CONSTRUCTION OF B/M CHAMBER FOR IMPROVEMENT OF WATER SUPPLY IN GULSHAN-E-SHAMIM AND ADJOINING AREAS OF BLOCK-08, GULBERG TOWN

Date of Opening: 15-03-2016


**BIDDERS' ELIGIBILITY/ QUALIFICATION REPORT**


Eligibility/ Qualification Criteria:

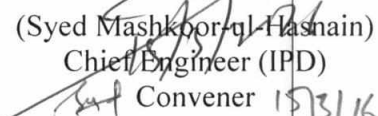
S. No.	Eligibility / Qualification Criteria	Bidders' Name		
		M/s.Tooba Enterprises	M/s.Shah Faisal & Bros.	M/s.N.A.F Enterprises
1.	Registration with PEC (if applicable)	N/A	N/A	N/A
2.	NTN	Yes	No	No
3.	Sales Tax Registration (FBR)	N/A	N/A	N/A
4.	Registration with Sindh Revenue Board (SRB)	Yes	No	No
	<b>Qualification Criteria:</b>			
5.	Minimum three years' experience of relevant field.	Yes	No	No
6.	Turnover of at least last three years	Yes	No	No
7.	Required Bid Security is attached.	Yes	Yes	No
8.	Bid is signed, named and stamped by the authorized person of the firm along with Authorization letter.	Yes	Yes	Yes
9.	Any other factor deemed to be relevant by the procuring agency subject to provision of Rule-44	N/A	N/A	N/A
10.	Qualified/ disqualified	Qualified	Disqualified	Disqualified

  
(Arshad Ali)  
D.A.O (District Central)  
Member / Secretary

  
(Saif-ul-Haque)  
Additional Director Internal  
Audit – KMC Member

  
(Maqsood Ahmed Shaikh)  
Superintending Engineer (KMC)  
Member

  
(Syed Muhammad Jamil Akhter)  
Chief Engineer (W&S)  
Member

  
(Syed Mashkoor-ul-Hasnain)  
Chief Engineer (IPD)  
Convener 15/3/16

**COMPARATIVE STATEMENT**

**Name of Work: PROVIDING & LAYING 08" DIA, 6" DIA UPVC WATER LINE & CONSTRUCTION OF B/M CHAMBER FOR IMPROVEMENT OF WATER SUPPLY IN GULSHAN-E-SHAMIM AND ADJOINING AREAS OF BLOCK-08, GULBERG TOWN**

Item No	Description of Work	Estimated Cost			M/s. Tooba Enterprises		M/s. Shah Faisal & Brothers			
		Quantity	Rate	Per	Amount	Rate	Amount	Rate	Amount	
1	Dismantling & removing road metalling.	3750.00	Cft	605.00	%Cft	22,687.50	605	22,687.50	607	22,762.50
2	Excavation for pipe line in trenches in pits in Wet Silt Clay or mud i/c trimming and dressing sides to true alignment and shape leveling of beds of trenches to correct level and grade cutting joints holes and disposal of surplus earth within one chain as directed by Engineer Incharge. Providing fence, lights, flags and temporary crossing for non-vehicular traffic wherever required lift upto 5 ft (1.52 m) and lead upto one chain (30.5m). i. Lift 0' - 5' ii. Lift 5' - 8' iii. Lift 8' - 11' iv. Lift 11' - 14' v. Lift 14' - 17'	88220.00	Cft	5400.00	%0Cft	476,388.00	5,400	476,388.00	5,500	485,210.00
		5363.00	Cft	5950.00	%60Cft	31,909.85	5,950	31,909.85	5,950	31,909.85
		243.00	Cft	6500.00	%60Cft	1,579.50	6,500	1,579.50	6,500	1,579.50
		107.14	Cft	7050.00	%60Cft	755.34	7,050	755.34	7,050	755.34
		76.18	Cft	7600.00	%60Cft	578.97	7,600	578.97	7,600	578.97
3	Full hire charges of pumping set p/day inclusive wages of driver & assistant fuel or electric energy plate forms required for placing pumps etc at lower depth with suction and delivery pipes for pumping out water found at various depth from trenches i/c cost of erection and dismantling after completion of the job. i) Hire charges of pumping set of upto 10 H.P pumping out water from 15ft deep trench).	55.00	Days	1500.00	P/Day	82,500.00	1,500	82,500.00	1,550	85,250.00
4	Providing Laying UPVC pipes of class-C fixing in trench i/c cutting fitting and jointing with solvent cement i/c testing with water to a head of 91.5 meter or 300ft. i. For Class-C 8" dia ii. For Class-C 6" dia	2000.00	Rft	569.00	P/Rft	1,138,000.00	569	1,138,000.00	569	1,138,000.00
		3000.00	Rft	370.00	P/Rft	1,110,000.00	370	1,110,000.00	370	1,110,000.00
5	Providing / Laying UPVC pipes of class-B fixing in trench i/c cutting fitting and jointing with solvent cement i/c testing with water to a head of 61 meter or 200ft. 6" dia	2000.00	Rft	259.00	P/Rft	518,000.00	259	518,000.00	260	520,000.00

*Qummar*  
16/13

*SP*  
*TV*

*SP*

16/13/16

**Name of Work: PROVIDING & LAYING 08" DIA, 6" DIA UPVC WATER LINE & CONSTRUCTION OF B/M CHAMBER FOR IMPROVEMENT OF WATER SUPPLY IN GULSHAN-E-SHAMIM AND ADJOINING AREAS OF BLOCK-08, GULBERG TOWN**

Item No	Description of Work	Estimated Cost			M/s. Toobha Enterprises		M/s. Shah Faisal & Brothers			
		Quantity	Rate	Per	Amount	Rate	Amount	Rate	Amount	
6	P/F M.S split collar tee for PRCC pipe of different dia sizes having with as mentioned against each item to suit. The size of connection fabricated with 3/8" thick M.S plate excluding the cost of neck, it includes the cost of 3/4" M.S square bard on both ends, 4 Nos 3/4" thick M.S flanges with a total weight as mentioned against each item it includes the cost of nuts & bolt, rubber packing, labour and sealing materials and all the tools and plants. 46"x48" dia (3'-6") Weight=447.47 Kg	1.00	No	75746.00	Each	75,746.00	75,500	75,500.00	75,746	75,746.00
7	P/F 0-9" long 3/8" thick M.S "Neck" to existing M.S pipe or to a split collar tee. It included the cost of fabrication and welding to the split collar <b>weight = 15.575 Kg 8" dia</b>	1.00	No	2804.00	Each	2,804.00	2,700	2,700.00	2,804	2,804.00
8	C.1 Sluice Valve heavy pattern (Test Pressure 21.0 Kg/sq.com or 300 lb/sq.inch) (Imported) 8" Dia	2.00	No	17940.00	Each	35,880.00	17,940	35,880.00	17,940	35,880.00
	6" Dia	2.00	No	9360.00	Each	18,720.00	9,360	18,720.00	9,360	18,720.00
9	Fixing of sluice valve with 2 cast iron tail pieces one end flanged & other with socket i/c the cost of nut, bolts & rubber packing, labour etc complete 8" dia	2.00	No	2790.00	Each	5,580.00	2,790	5,580.00	2,790	5,580.00
	6" Dia	2.00	No	1886.00	Each	3,772.00	1,886	3,772.00	1,886	3,772.00
10	UPVC Fitting (per each) equivalent make: i. Tee 8" Dia Class-B ii. Tee 6" dia Class-B	1.00	No	7147.00	Each	7,147.00	7,147	7,147.00	7,247	7,247.00
	Reducing Bush 8" dia Class-B	1.00	No	1446.00	Each	1,446.00	1,446	1,446.00	1,550	1,550.00
		2.00	Nos	2504.00	Each	5,008.00	2,504	5,008.00	2,504	5,008.00
11	Construction of C.C. block masonry chamber of size 4'x4'x4' inside with 24" x 24" C.I cover & frame Weight 65 kg fixed in RCC Slab 1:2:4: 6" thick with steel 1 2" dia bars 6" C/C bend up both way, 1 2" inch thick C:C: 1:3:6 block masonry 6" inch C:C 1:4:8 in foundation, 2" thick C.C 1:2:4 flooring, 1/2" thick cement plaster i/c P/F M.S footrest 5/8" bars at every 2'0" feet deep i/c curing watering excavation refilling and disposal of surplus earth complete as per R/A. 4'x4'x4'	2.00	Nos	28357.00	Each	56,714.00	28,200	56,400.00	28390.00	56,780.00

*Qumail*  
16/13

*[Signature]*

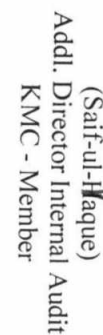
*[Signature]*

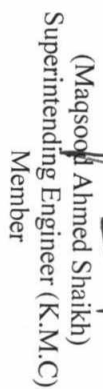
*[Signature]*  
16/13/16

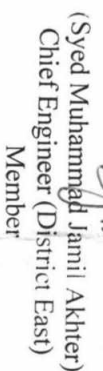
**Name of Work: PROVIDING & LAYING 08" DIA, 6" DIA UPVC WATER LINE & CONSTRUCTION OF B/M CHAMBER FOR IMPROVEMENT OF WATER SUPPLY IN GULSHAN-E-SHAMIM AND ADJOINING AREAS OF BLOCK-08, GULBERG TOWN**

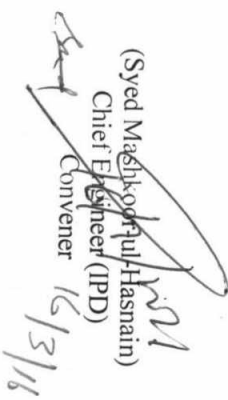
Item No	Description of Work	Estimated Cost			M/s. Tooba Enterprises		M/s. Shah Faisal & Brothers			
		Quantity	Rate	Per	Amount	Rate	Amount	Rate	Amount	
11-A	Construction of Block Masonry chamber of size 6'x6'x6' with 24"x24" C.I Cover and frame weight 65 Kg fix in RCC 1:2:4 slab 6" thick with steel 1/2" dia tor main bars @6" C/C bentup 1/4" dia 8" C.C distribution bars B/M wall set 1:6 cm 6" thick C.C 1:4:8 in foundation 2" thick CC 1:2:4 flooring 1/2" thick 1-0 to al in side wall surfaced top & bottom slab outer side wall surface 1-0 deep upto roof slab i/c M.S footrest 5/8" dia bars at every 2-0 deep i/c curing de-watering excavation refilling & disposal of surplus of earth etc complete. Chamber size 6'x6'x6'	1.00	No	55923.00	Each	55,923.00	55,823	55,823.00	56,925	56,925.00
11-B	Construction of Block Masonry chamber of size 8'x8'x8' with 24"x24" C.I Cover and frame weight 65 Kg fix in RCC 1:2:4 slab 6" thick with steel 1/2" dia tor main bars @6" C/C bentup 1/4" dia 8" C.C distribution bars B/M wall set 1:6 cm 6" thick C.C 1:4:8 in foundation 2" thick CC 1:2:4 flooring 1/2" thick 1-0 to al in side wall surfaced top & bottom slab outer side wall surface 1-0 deep upto roof slab i/c M.S footrest 5/8" dia bars at every 2-0 deep i/c curing de-watering excavation refilling & disposal of surplus of earth etc complete. Chamber size 8'x8'x8'	1.00	No	86333.00	Each	86,333.00	86,233	86,233.00	87,413	87,413.00
12	Refilling the excavated stuff in trench 6" thick layer i/c watering ramming to full compaction etc.	92330.30	Cft	2760.00	%0Cft	254,831.63	2,755	254,369.98	2,760	254,831.63
	<b>TOTAL QUOTED / CORRECTED COST</b>					<b>3,992,304</b>		<b>3,990,978</b>		<b>4,008,303</b>

  
(Saif-ul-Haque)  
Addl. Director Internal Audit  
KMC - Member

  
(Magsoof Ahmed Shaikh)  
Superintending Engineer (K.M.C)  
Member

  
(Syed Muhammad Jamil Akhter)  
Chief Engineer (District East)  
Member

  
(Syed Maslikoodul-Hasnain)  
Chief Engineer (IPD)  
Convener

  
16/3/18

