



**OFFICE OF THE
SENIOR SUPERINTENDENT OF POLICE
HYDERABAD**

NO. A/14160-64/2018.

Dated. 19-02-2018

To,

M/s MOHAMMAD ALI DEPAER
B/Office Shop No.1. Tanveer Lodgement Near Burhani
Nagar Sajadabad Hyderabad.
Cell No. 0306-3067867

Subject: **LETTER FOR ACCEPTANCE FOR AWARD OF CONTRACT FOR
MAINTENANCE/REPAIR OF REGIONAL POLICE HOSPITAL
HYDERABAD F.Y 2017-2018.**

It is to inform you that bid offered by you for maintenance & repair work of Regional Police Hospital Police Line Hyderabad (**Compound Wall, Guard Room, & External Services**) dated **24.01.2018**; have been approved/accepted being lowest by the Procurement Committee. The contract Value/Bid Value of **Rs.38,48,544/-** (Rupees three million eight hundred forty eight thousand five hundred forty four only) is given by your firm.


2/- You are therefore requested to sign contract agreement, performance security on the stamp paper of appropriate value with the undersigned within 3 days on or before without fail. After execution of Contract Agreement/Performance Security, the work order will be issued accordingly.

**SENIOR SUPERINTENDENT OF POLICE
HYDERABAD**

& Chairman Procurement Committee
Regional Police Hospital Hyd

Copy to the following for information & n/action.

1. The IGP Sindh Karachi.
2. The DIGP Hyderabad Range
3. The Executive Engineer, Provincial Buildings Hyderabad.
4. The Assistant Engineer, Provincial Buildings Div (EL) Hyderabad.
5. The Manager, SPPRA, Barrack No. 8, Court Road Karachi w/r to publish on website.
6. Order File

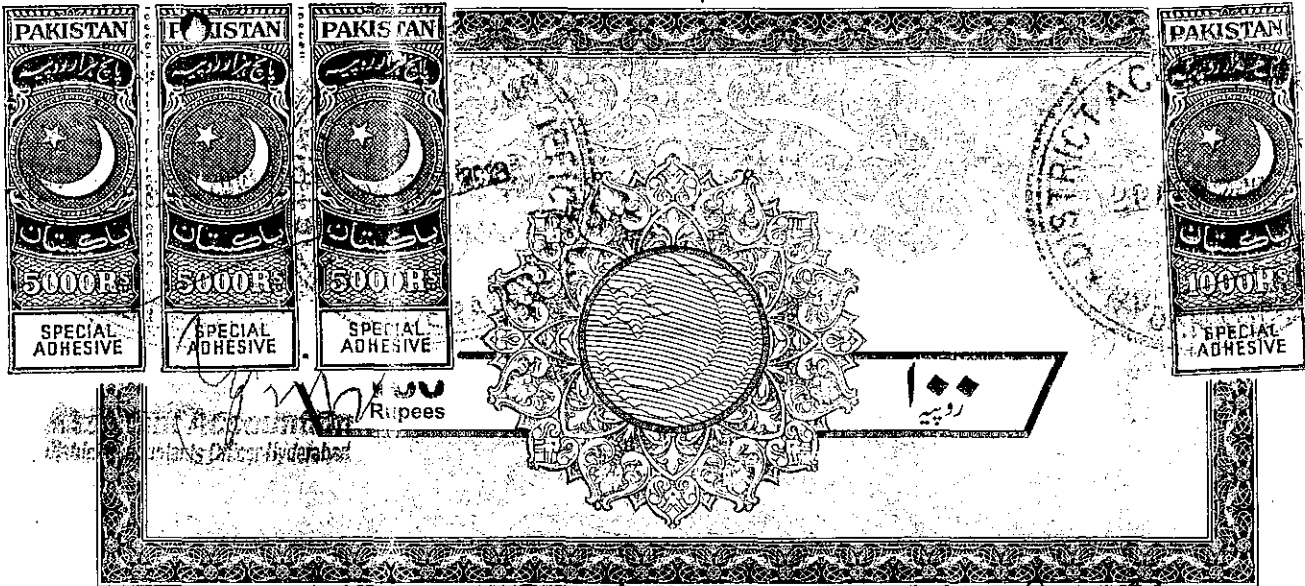

Muhammad Ali S/o Muhammad Aslam / No. 2360
20/02/2018

Witness
Govt. Stamp Vendor
Shop No. 1, Session
Nagar
Sajadabad
Hyderabad

CONTRACT/AGREEMENT

THIS AGREEMENT made the 20th day of February 2018 between SENIOR SUPERINTENDENT OF POLICE HYDERABAD & CHAIRMAN PROCUREMENT COMMITTEE FOR MAINTENANCE / REPAIR OF REGIONAL POLICE HOSPITAL HYDERABAD (COMPOUND WALL, GUARD ROOM & EXTERNAL SERVICES); (hereinafter called "successor, legal representative of the Procuring agency) of the one part and M/s MOHAMMAD ALI DEPAER, B/Office Shop No.1, Tanveer Lodgement Near Burhani, Nagar Sajadabad Hyderabad.


(hereinafter called "the contractor") of the other part:


WHEREAS the Procuring agency invited bids through news paper NIT Published in news paper and SPPRA Serial No.36059. for maintenance / repair of Regional Police Hospital Hyderabad and has been accepted a bid of contractor/firm in the sum of Rs.38,48,544/- (Rupees three million eight hundred forty eight thousand five hundred forty four only)

NOW THIS AGREEMENT WITNESSETH AS FOLLOWS:

1. In this Agreement words and expressions shall have the same meanings as are respectively assigned to them in the Conditions of Contract referred to.
2. The following documents shall be deemed to form and be read and construed as part of this Agreement, viz.:
 - (a) Bid Form and the Price Schedule submitted by the Bidder;
 - (b) Schedule of Requirements;
 - (c) General Conditions of Contract;
 - (d) Special Conditions of Contract; and
 - (e) Procuring agency's Notification of Award.
3. In consideration of the payments to be made by the Procuring agency to the firm as hereinafter mentioned, the Supplier hereby covenants with the Procuring agency to provide the goods and services and to remedy defects therein in conformity in all respects with the provisions of the Contract
4. The Procuring agency hereby covenants to pay the Contractor/firm/supplier in consideration of the provision of repair of above cited work and services and the remedying of defects therein, the Contract Price or such other sum as may become payable under the provisions of the contract at the times and in the manner prescribed by the contract.



IN WITNESS whereof the parties hereto have caused this Agreement to be executed in accordance with their respective laws the day and year first above written.


Procurement Committee
Department of Police
Hyderabad.


M/S MOHAMMAD ALI DEPAR DEPAER
Govt. Contractor &
General Order Sanction

WITNESSES:
1. Amjad Aziz Anjad
CNIC No. 41504-0462500-9

2. Amriza Khan
CNIC No. 41306-9248209-1

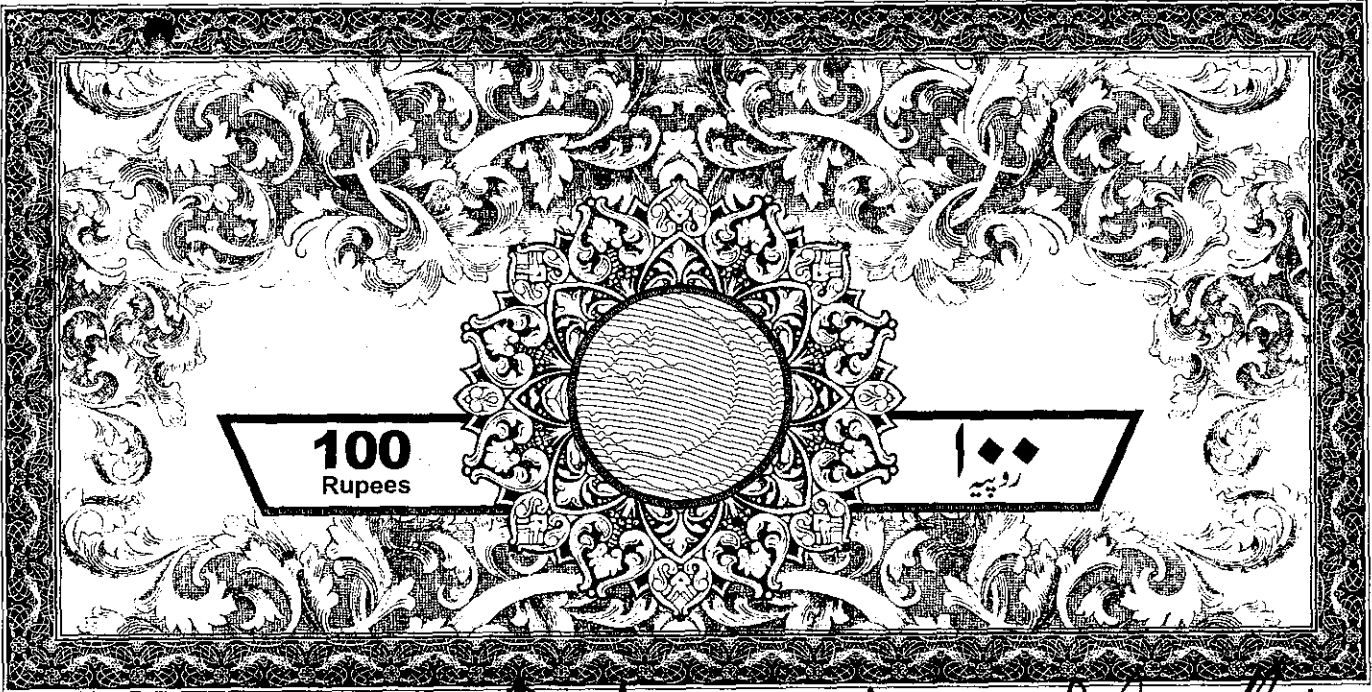

Waleed Raza Muhammed Ali S/o Muhammad Azeem No 22940
 Govt. Stamp Vendor
 Shed No. 40, Session
 Court Hyderabad
 20/02/2018

Performance Security Form

To:

The Senior Superintendent of Police
 Hyderabad

WHEREAS M/s Mohammad Ali Debar (hereinafter called "the Contractor") has undertaken, in pursuance of Contract No. NIT and SPPRA Serial No.36059 for maintenance/repair of Regional Police Hospital Police Line Hyderabad (Compound Wall, Guard Room & External Services) (hereinafter called "the Contract").

AND WHEREAS it has been stipulated by you in the said Contract that the Contractor shall furnish you with a Performance Security for the contract value awarded to our firm of Rs.38,48,544/-.

AND WHEREAS we have agreed to give the Performance guarantee:

THEREFORE WE hereby affirm that I on behalf of my firm **M/s MOHAMMAD ALI DEPAR** responsible for the items which will be provided by me for the above awarded work. My security amount of 5% of bid security is adjusted in Security Deposit and will be kept for at the time of delivery on expiry of maintenance period.

SINDH PUBLIC PROCUREMENT REGULATORY AUTHORITY

CONTRACT EVALUATION FORM

TO BE FILLED IN BY ALL PROCURING AGENCIES FOR PUBLIC CONTRACTS OF WORKS, SERVICES & GOODS

- 1) NAME OF THE ORGANIZATION / DEPTT. OFFICE OF THE SENIOR SUPERINTENDENT OF POLICE
HYDERABAD & CHAIRMAN PROC. COMMITTEE
- 2) PROVINCIAL / LOCAL GOVT./ OTHER PROVINCIAL GOVT. (SINDH POLICE)
- 3) TITLE OF CONTRACT Maintenance/Repair of RPH Hyd (Guard Room)
- 4) TENDER NUMBER NIT: Ibrat, Dawn, Express, Safer S.N. 36059
- 5) BRIEF DESCRIPTION OF CONTRACT Repair /Maint. of RPH (Guard Room, External Serv)
- 6) FORUM THAT APPROVED THE SCHEME IGP SINDH KARACHI
- 7) TENDER ESTIMATED VALUE 4.0 million
- 8) ENGINEER'S ESTIMATE 3.851 million
(For civil works only)
- 9) ESTIMATED COMPLETION PERIOD (AS PER CONTRACT) 90 DAYS on or before
- 10) TENDER OPENED ON (DATE & TIME) 24.01.2018 : Time 3.30 PM
- 11) NUMBER OF TENDER DOCUMENTS SOLD 03
(Attach list of buyers)
- 12) NUMBER OF BIDS RECEIVED 03
- 13) NUMBER OF BIDDERS PRESENT AT THE TIME OF OPENING OF BIDS 03
- 14) BID EVALUATION REPORT Yes
(Enclose a copy)
- 15) NAME AND ADDRESS OF THE SUCCESSFUL BIDDER M/s Mohammad Ali Dejar
- 16) CONTRACT AWARD PRICE Rs.38,48,544/-
- 17) RANKING OF SUCCESSFUL BIDDER IN EVALUATION REPORT
(i.e. 1st, 2nd, 3rd EVALUATION BID). M/s Mohammad Ali Dejar
M/s N.K.C Enterprises
M/s imran bashir

18) METHOD OF PROCUREMENT USED : - (Tick one)

- a) SINGLE STAGE – ONE ENVELOPE PROCEDURE YES Domestic Domestic/ Local
- b) SINGLE STAGE – TWO ENVELOPE PROCEDURE
- c) TWO STAGE BIDDING PROCEDURE
- d) TWO STAGE – TWO ENVELOPE BIDDING PROCEDURE

PLEASE SPECIFY IF ANY OTHER METHOD OF PROCUREMENT WAS ADOPTED i.e.
EMERGENCY, DIRECT CONTRACTING ETC. WITH BRIEF REASONS:

19) APPROVING AUTHORITY FOR AWARD OF CONTRACT _____

20) WHETHER THE PROCUREMENT WAS INCLUDED IN ANNUAL PROCUREMENT PLAN?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

21) ADVERTISEMENT :

i) SPPRA Website
(If yes, give date and SPPRA Identification No.)

Yes	Sr. No. 36059
No	

ii) News Papers
(If yes, give names of newspapers and dates)

Yes	Daily Ibrat, Dawn, Express Safer Sindh (06&07.01.2018)
No	

22) NATURE OF CONTRACT

Domestic Local	<input checked="" type="checkbox"/>	Int.	<input type="checkbox"/>
-------------------	-------------------------------------	------	--------------------------

23) WHETHER QUALIFICATION CRITERIA
WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?
(If yes, enclose a copy)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

24) WHETHER BID EVALUATION CRITERIA
WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?
(If yes, enclose a copy)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

25) WHETHER APPROVAL OF COMPETENT AUTHORITY WAS OBTAINED FOR USING A
METHOD OTHER THAN OPEN COMPETITIVE BIDDING?

Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

26) WAS BID SECURITY OBTAINED FROM ALL THE BIDDERS?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

27) WHETHER THE SUCCESSFUL BID WAS LOWEST EVALUATED
BID / BEST EVALUATED BID (in case of Consultancies)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

28) WHETHER THE SUCCESSFUL BIDDER WAS TECHNICALLY
COMPLIANT?

Yes	<input type="checkbox"/>	No	<input type="checkbox"/>
-----	--------------------------	----	--------------------------

29) WHETHER NAMES OF THE BIDDERS AND THEIR QUOTED PRICES WERE READ OUT AT
THE TIME OF OPENING OF BIDS?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

30) WHETHER EVALUATION REPORT GIVEN TO BIDDERS BEFORE THE AWARD OF
CONTRACT?
(Attach copy of the bid evaluation report)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

31) ANY COMPLAINTS RECEIVED
(If yes, result thereof)

Yes	
No	NO complain Recived

32) ANY DEVIATION FROM SPECIFICATIONS GIVEN IN THE TENDER NOTICE / DOCUMENTS
(If yes, give details)

Yes	
No	No

33) WAS THE EXTENSION MADE IN RESPONSE TIME?
(If yes, give reasons)

Yes	
No	No

34) DEVIATION FROM QUALIFICATION CRITERIA
(If yes, give detailed reasons.)

Yes	
No	

35) WAS IT ASSURED BY THE PROCURING AGENCY THAT THE SELECTED FIRM IS NOT
BLACK LISTED?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

36) WAS A VISIT MADE BY ANY OFFICER/OFFICIAL OF THE PROCURING AGENCY TO THE
SUPPLIER'S PREMISES IN CONNECTION WITH THE PROCUREMENT? IF SO, DETAILS TO
BE ASCERTAINED REGARDING FINANCING OF VISIT, IF ABROAD:
(If yes, enclose a copy)

Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

37) WERE PROPER SAFEGUARDS PROVIDED ON MOBILIZATION ADVANCE PAYMENT IN
THE CONTRACT (BANK GUARANTEE ETC.)?

Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

38) SPECIAL CONDITIONS, IF ANY
(If yes, give Brief Description)

Yes	
No	No

Signature & Official Stamp of
Authorized Officer

SSP HYDERABAD

Qureshi
OFFICER IN CHARGE
POLICE

FOR OFFICE USE ONLY



OFFICE OF THE
SENIOR SUPERINTENDENT OF POLICE
HYDERABAD

NO. A/14761-70 /2018

Dated. 21.02.2018

To,

M/s **MOHAMMAD ALI DEPAER**
B/Office Shop No.1, Tanveer Lodgement Near Burhani
Nagar Sajadabad Hyderabad.
Cell No. 0306-3067867

WORK ORDER

Subject:- **MAINTENANCE & REPAIR WORK OF REGIONAL POLICE HOSPITAL
POLICE LINE HYD (COMPOUND WALL, GUARD ROOM & EXTERNAL
SERVICES) F.Y 2017-2018.**

Your offer dated 24.01.2018 for the above subject work:

- | | | |
|--------------------------------------|---|---|
| 1. PART "A" Civil Work | = | Rs.270,876/ |
| 2. PART "B" Compound Wall | = | Rs.16,92,578/- 15.50% above premium on schd. Item except item No.10 |
| 3. PART "C" Internal Roads | = | Rs.576,785/- |
| 4. PART "D" External Drainage System | = | Rs.291,210/- |
| 5. PART "E" Schedule Items | = | Rs.167,136/- |
| 6. PART "F" Non Schedule Items | = | Rs.420,000/- |

Total amounting **Rs.38,48,544/-** being the lowest is hereby accepted.

2/- You should therefore please start the work within 7 days from the date of issue of this "work order" under the supervision of Assistant Engineer, Provincial Building (**Buildings Div (EL) Hyderabad**). The work should be completed within 03 months as according with Bidding Documents of SPPRA Rules 2010 (amended 2017) & strictly to the standard P.W.D's specifications.

3/- It should be noted that any typographical mistake or error in schedule-B will be read strictly as per schedule of rates in force and that any change in schedule B/Estimate of made by Superintending Engineer/Executive Engineer or Assistant Executive Engineer in the government interest during the execution of work will be acceptable to you unconditionally.

- You should also nominate your agent/supervisor to whom instructions at site.
- If you are a body corporate or partnership you should submit necessary of attorney in favour of someone which is to receive cheque/material. A true copy of partnership deed or memo of term and articles of association should also please be supplied to this office.

SENIOR SUPERINTENDENT OF POLICE
HYDERABAD

& Chairman Procurement Committee

Copy to the following for information & action.

- The IGP Sindh Karachi.
- The DIGP Hyderabad Range
- The Executive Engineer, Provincial Buildings Hyderabad
- Assistant Engineer, Provincial Buildings Div (EL) Hyderabad. He should report the date of start of work as soon as it is started and ensure that no excess over estimate or deviation from it may be allowed. In case of extreme need prior approval from the competent authority.
- The Manager, SPPRA, Barrack No. 8, Court Road Karachi w/r to publish on website Sr.No.29921.
- Order File.



**OFFICE OF THE
SENIOR SUPERINTENDENT OF POLICE
HYDERABAD**

NOA/14165-68/2018.

Dated. 19-02-2018

To,

M/s AL-ASAR

CIVIL ENGINEERING WORKS

Address: House No. 66/A, Muhammad Bux Shoro Goth,
Qasimabad Hyderabad.

Cell No. 0336-3634705

Subject: **LETTER FOR ACCEPTANCE FOR AWARD OF CONTRACT FOR
MAINTENANCE/REPAIR OF REGIONAL POLICE HOSPITAL
HYDERABAD F.Y 2017-2018.**

It is to inform you that bid offered by you for maintenance & repair work of **Regional Police Hospital Police Line Hyderabad** dated **24.01.2018**; have been approved/accepted being lowest by the Procurement Committee. The contract Value/Bid Value of **Rs.29,25,141/-** (Rupees two million nine hundred twenty five thousand one hundred forty one only) is given by your firm.


2/- You are therefore requested to sign contract agreement, performance security on the stamp paper of appropriate value with the undersigned within 3 days on or before without fail. After execution of Contract Agreement/Performance Security, the work order will be issued accordingly.

**SENIOR SUPERINTENDENT OF POLICE
HYDERABAD**

& Chairman Procurement Committee
Regional Police Hospital Hyd

Copy to the following for information & n/action.

1. The IGP Sindh Karachi.
2. The DIGP Hyderabad Range
3. The Executive Engineer, Provincial Buildings Hyderabad.
4. The Assistant Engineer, Provincial Buildings Div (EL) Hyderabad.
5. The Manager, SPPRA, Barrack No. 8, Court Road Karachi w/r to publish on website.
6. Order File

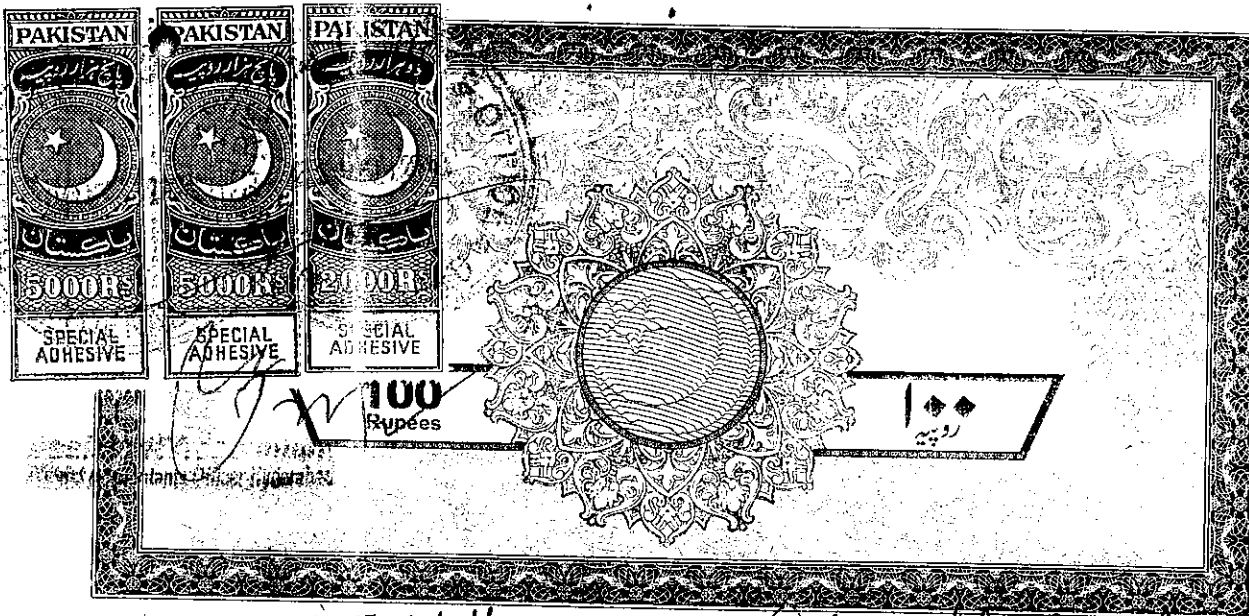

Walid Raza
Govt. Stamp Vender
Shed No. 40, Session
Court Hyderabad

Taqi Hussain S/o Qutub Uddin Deputy No. 2389
20/02/2018

CONTRACT/AGREEMENT

THIS AGREEMENT made the 20th day of February 2018 between SENIOR SUPERINTENDENT OF POLICE HYDERABAD & CHAIRMAN PROCUREMENT COMMITTEE FOR MAINTENANCE / REPAIR OF REGIONAL POLICE HOSPITAL HYDERABAD; (hereinafter called "successor, legal representative of the Procuring agency) of the one part and M/s AL-ASAR CIVIL ENGINEERING WORKS, House No.66/A1, Muhammad Bux Shoro Goth Qasimabad Hyderabad (hereinafter called "the contractor") of the other part:

WHEREAS the Procuring agency invited bids through news paper NIT Published in news paper and SPPRA Serial No.36059. for maintenance / repair of Regional Police Hospital Hyderabad and has been accepted a bid of contractor/firm in the sum of Rs.29,25,141/- (Rupees two million nine hundred twenty five thousand one hundred forty one only)

NOW THIS AGREEMENT WITNESSETH AS FOLLOWS:

1. In this Agreement words and expressions shall have the same meanings as are respectively assigned to them in the Conditions of Contract referred to.
2. The following documents shall be deemed to form and be read and construed as part of this Agreement, viz.:
 - (a) Bid Form and the Price Schedule submitted by the Bidder;
 - (b) Schedule of Requirements;
 - (c) General Conditions of Contract;
 - (d) Special Conditions of Contract; and
 - (e) Procuring agency's Notification of Award.
3. In consideration of the payments to be made by the Procuring agency to the firm as hereinafter mentioned, the Supplier hereby covenants with the Procuring agency to provide the goods and services and to remedy defects therein in conformity in all respects with the provisions of the Contract
4. The Procuring agency hereby covenants to pay the Contractor/firm/supplier in consideration of the provision of repair of above cited work and services and the remedying of defects therein, the Contract Price or such other sum as may become payable under the provisions of the contract at the times and in the manner prescribed by the contract.

IN WITNESS whereof the parties hereto have caused this Agreement to be executed in accordance with their respective laws the day and year first above written.


[Signature]
Sr. Superintendent of Police
Procurement Committee
Hyderabad.

[Signature]
AL-ASR
M/S AL-ASAR CIVIL ENGINEERING WORKS
HYDERABAD

WITNESSES
1. Amjad Ali Aujar
CNIC No. 41504-0462508-9.

2. Amrooz Khan
CNIC No. 41306-9849803-1

L338892

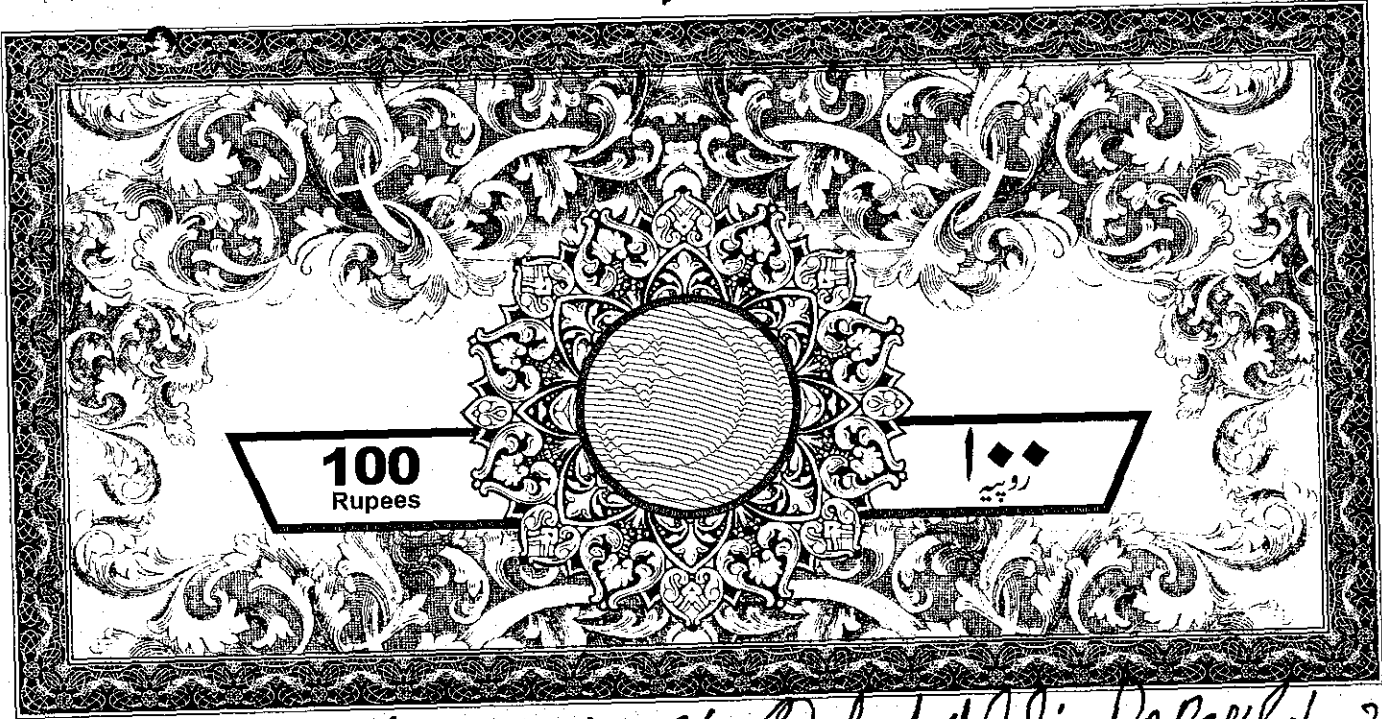

Waleed Raza
Govt. Stamp Vendor
Ses. No: 40 Session
Court Hyderabad

Tariq Hussain 40 Qutubuddin Depar/ No-22339
20/02/2018

Performance Security Form

To:

The Senior Superintendent of Police
Hyderabad

WHEREAS M/s AL-ASAR CIVIL ENGINEERING WORKS (hereinafter called "the Contractor") has undertaken, in pursuance of Contract No. NIT and SPPRA Serial No.36059 for maintenance/ repair of Regional Police Hospital Police Line Hyderabad (hereinafter called "the Contract").

AND WHEREAS it has been stipulated by you in the said Contract that the Contractor shall furnish you with a Performance Security for the contract value awarded to our firm of Rs.29,25,141/-.

AND WHEREAS we have agreed to give the Performance guarantee:

THEREFORE WE hereby affirm that I on behalf of my firm **M/s AL-ASAR ENGINEERING WORKS** responsible for the items which will be provided by me for the above awarded work. My security amount of 5% of bid security is adjusted in Security Deposit and will be kept for at the time of delivery on expiry of maintenance period.



**OFFICE OF THE
SENIOR SUPERINTENDENT OF POLICE
HYDERABAD**

NO. M/14771-74/2018

Dated. 21.02.2018

M/s AL-ASAR

CIVIL ENGINEERING WORKS

Address: House No. 66/A, Muhammad Bux Shoro Goth,
Qasimabad Hyderabad.

Cell No. 0336-3634705

WORK ORDER

Subject:- MAINTENANCE & REPAIR WORK OF REGIONAL POLICE HOSPITAL
POLICE LINE HYD (F.Y 2017-2018).

Your offer dated 24.01.2018 for the above subject work:

1. PART "A" Civil Work	=	Rs.13,28,133/- 18% above premium on schd. Item except item 14&17
2. PART "B" E.I Work Schedule Items	=	Rs.91,249/-
3. PART "C" Non Schedule Items	=	Rs.457,748/-
4. PART "D" W/S & S/F	=	Rs.376,834/-

Total amounting **Rs.29,25,141/-** being the lowest is hereby accepted.

2/- You should therefore please start the work within 7 days from the date of issue of this "work order" under the supervision of Assistant Engineer, Provincial Building (**Buildings Div (EL)** Hyderabad. The work should be completed within 03 months as according with Bidding Documents of SPPRA Rules 2010 (amended 2017) & strictly to the standard P.W.D's specifications.

3/- It should be noted that any typographical mistake or error in schedule-B will be read strictly as per schedule of rates in force and that any change in schedule B/Estimate of made by Superintending Engineer/Executive Engineer or Assistant Executive Engineer in the government interest during the execution of work will be acceptable to you unconditionally.

- e. You should also nominate your agent/supervisor to whom instructions at site.
- d. If you are a body corporate or partnership you should submit necessary of attorney in favour of someone which is to receive cheque/material. A true copy of partnership deed or memo of term and articles of association should also please be supplied to this office.


**SENIOR SUPERINTENDENT OF POLICE
HYDERABAD**
 & Chairman Procurement Committee

Copy to the following for information & n action.

1. The IGP Sindh Karachi.
2. The DIGP Hyderabad Range
3. The Executive Engineer, Provincial Buildings Hyderabad
4. Assistant Engineer, Provincial Buildings Div (EL) Hyderabad. He should report the date of start of work as soon as. It is started and ensure that no excess over estimate or deviation from it may be allowed. In case of extreme need prior approval from the competent authority.
5. The Manager, SPPRA, Barrack No. 8, Court Road Karachi w/r to publish on website Sr.No.29921.
6. Order File.

SINDH PUBLIC PROCUREMENT REGULATORY AUTHORITY

CONTRACT EVALUATION FORM

TO BE FILLED IN BY ALL PROCURING AGENCIES FOR PUBLIC CONTRACTS OF WORKS, SERVICES & GOODS

- 1) NAME OF THE ORGANIZATION / DEPTT. OFFICE OF THE SENIOR SUPERINTENDENT OF POLICE HYDERABAD & CHAIRMAN PROC. COMMITTEE
- 2) PROVINCIAL / LOCAL GOVT./ OTHER PROVINCIAL GOVT. (SINDH POLICE)
- 3) TITLE OF CONTRACT Maintenance/Repair of RPH Hyd
- 4) TENDER NUMBER NIT:Ibrat, Dawn. Express, Safer S.N. 36059
- 5) BRIEF DESCRIPTION OF CONTRACT Repair /Maint. of RPH (Guard Room, External Serv)
- 6) FORUM THAT APPROVED THE SCHEME IGP SINDH KARACHI
- 7) TENDER ESTIMATED VALUE 3.0 million
- 8) ENGINEER'S ESTIMATE (For civil works only) 2.956 million
- 9) ESTIMATED COMPLETION PERIOD (AS PER CONTRACT) 90 DAYS on or before
- 10) TENDER OPENED ON (DATE & TIME) 24.01.2018 : Time 3.30 PM
- 11) NUMBER OF TENDER DOCUMENTS SOLD 03
(Attach list of buyers)
- 12) NUMBER OF BIDS RECEIVED 03
- 13) NUMBER OF BIDDERS PRESENT AT THE TIME OF OPENING OF BIDS 03
- 14) BID EVALUATION REPORT Yes
(Enclose a copy)
- 15) NAME AND ADDRESS OF THE SUCCESSFUL BIDDER M/s AL-ASAR ENG. WORK
- 16) CONTRACT AWARD PRICE Rs.29,25,141/-
- 17) RANKING OF SUCCESSFUL BIDDER IN EVALUATION REPORT (i.e. 1st, 2nd, 3rd EVALUATION BID).
M/s AL-ASAR ENGG. WORKS
M/s sajjad serwar & brothers
M/s IMEESAM CONST. CO

18) METHOD OF PROCUREMENT USED : - (Tick one)

- a) SINGLE STAGE – ONE ENVELOPE PROCEDURE YES Domestic Domestic/ Local
- b) SINGLE STAGE – TWO ENVELOPE PROCEDURE
- c) TWO STAGE BIDDING PROCEDURE
- d) TWO STAGE – TWO ENVELOPE BIDDING PROCEDURE

PLEASE SPECIFY IF ANY OTHER METHOD OF PROCUREMENT WAS ADOPTED i.e. EMERGENCY, DIRECT CONTRACTING ETC. WITH BRIEF REASONS:

19) APPROVING AUTHORITY FOR AWARD OF CONTRACT _____

20) WHETHER THE PROCUREMENT WAS INCLUDED IN ANNUAL PROCUREMENT PLAN?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

21) ADVERTISEMENT :

i) SPPRA Website
(If yes, give date and SPPRA Identification No.)

Yes	Sr. No. 36059
No	

ii) News Papers
(If yes, give names of newspapers and dates)

Yes	Daily Ibrat, Dawn, Express Saeer Sindh (06&07.01.2018)
No	

22) NATURE OF CONTRACT

Domestic/ Local	<input checked="" type="checkbox"/>	Int.	<input type="checkbox"/>
--------------------	-------------------------------------	------	--------------------------

23) WHETHER QUALIFICATION CRITERIA
WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?
(If yes, enclose a copy)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

24) WHETHER BID EVALUATION CRITERIA
WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?
(If yes, enclose a copy)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

25) WHETHER APPROVAL OF COMPETENT AUTHORITY WAS OBTAINED FOR USING A
METHOD OTHER THAN OPEN COMPETITIVE BIDDING?

Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

26) WAS BID SECURITY OBTAINED FROM ALL THE BIDDERS?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

27) WHETHER THE SUCCESSFUL BID WAS LOWEST EVALUATED
BID / BEST EVALUATED BID (in case of Consultancies)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

28) WHETHER THE SUCCESSFUL BIDDER WAS TECHNICALLY
COMPLIANT?

Yes	<input type="checkbox"/>	No	<input type="checkbox"/>
-----	--------------------------	----	--------------------------

29) WHETHER NAMES OF THE BIDDERS AND THEIR QUOTED PRICES WERE READ OUT AT
THE TIME OF OPENING OF BIDS?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

30) WHETHER EVALUATION REPORT GIVEN TO BIDDERS BEFORE THE AWARD OF
CONTRACT?
(Attach copy of the bid evaluation report)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

31) ANY COMPLAINTS RECEIVED
(If yes, result thereof)

Yes	
No	NO complain Recived

32) ANY DEVIATION FROM SPECIFICATIONS GIVEN IN THE TENDER NOTICE / DOCUMENTS
(If yes, give details)

Yes	
No	No

33) WAS THE EXTENSION MADE IN RESPONSE TIME?
(If yes, give reasons)

Yes	
No	No

34) DEVIATION FROM QUALIFICATION CRITERIA
(If yes, give detailed reasons.)

Yes	
No	

35) WAS IT ASSURED BY THE PROCURING AGENCY THAT THE SELECTED FIRM IS NOT
BLACK LISTED?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

36) WAS A VISIT MADE BY ANY OFFICER/OFFICIAL OF THE PROCURING AGENCY TO THE
SUPPLIER'S PREMISES IN CONNECTION WITH THE PROCUREMENT? IF SO, DETAILS TO
BE ASCERTAINED REGARDING FINANCING OF VISIT, IF ABROAD:
(If yes, enclose a copy)

Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------



37) WERE PROPER SAFEGUARDS PROVIDED ON MOBILIZATION ADVANCE PAYMENT IN
THE CONTRACT (BANK GUARANTEE ETC.)?

Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

38) SPECIAL CONDITIONS, IF ANY
(If yes, give Brief Description)

Yes	
No	No

Signature & Official Stamp of
Authorized Officer SSP HYDERABAD

FOR OFFICE USE ONLY



OFFICE OF THE
SENIOR SUPERINTENDENT OF POLICE
HYDERABAD

Tel No. 022-9200539

BIDDING DOCUMENT

**MAINTENANCE/REPAIR
OF
POLICE LINE HOSPITAL HYDERABAD
(COMPOUND WALL, GUARD ROOM &
EXTERNAL SERVICES)**

issued to

M/s Muhammad Ali Depeh

Maintenance & Repair of Police Line Hospital Hyderabad (Compound wall, Guard Room & External Services)

Schedule-B

S.N.	Name of Item.	Quantity	Rate	Unit	Amount.
Part "A" Civil work					
i. Guard Room					
1	Excavation in foundation of building bricks and other structure i/c dag belling dressing refilling around the structure with excavated earth watering and ramming lead upto 5 ft. (b) In ordinary soil (SINO.18(b) P-4)	267	Cft	3176.25	%0Cft 8481 (Rs: Thirty One Hundred Seventy Six Rupees & Twenty Five Palsa Only)
2	Cement concret brick or stone ballast 1-1/2" to 2" gauge ratio 1:4:8 (SINO. 4(b) P-16)	80	Cft	9416.28	% Cft 7,533 (Rs: Nine Thousand Four Hundred Sixteen Rupees & Twenty Eight Palsa Only)
3	Pacca brick work in foundation and plinth in (e) Cement sand mortor 1:6 (SINO. 4(e) P-21)	209	Cft	11948.36	% Cft 24,972 (Rs: Eleven Thousand Nine Hundred Forty Eight Rupees and Thirty Six Palsa Only)
4	R.C.C. work including labour and material except the cost of steel reinforcement and its labour for bending and binding which will be paid sepreately. This rate also imclude all kinds of forms moulds lifting shuttering curring rendering and finishing the exposed surface (i/c screening and washing of shingle) (a) R.C. work in froo slab, beams coloumns rafts lintels and other structural members laid in situ or precast laid in position complete in all respects (i) Ratio 1:2:4 90 lbs cement 2 cft sand 4 cft shingle 1/8" to 1/4" gauge. (SINO.6 P-19)	168	Cft	337.00	P,Cft 56,616 (Rs: Three Hundred Thirty Seven Rupees Only)
5	Fabrication of mild steel reinforcement for C.C. cutting bending laying in position making joints and fastening including the cost of binding wire also including removal of rust from bars) (SINIO.7(b) P-18) Using Tor Bars.	10.08	Cwt	5001.70	P.Cwt 50,41: (Rs: Five Thousand One Rupees and Seventy Palsa Only)
6	Supplying and filling sand under floor and plugging in walls. (SINO. 29 P-25)	222	Cft	1141.25	% Cft 2,53: (Rs: Eleven Hundred Forty One Rupees and Twenty Five Palsa Only)
7	Add Extra 6 mile lead.	222	Cft	771.96	% Cft 1,71: (Rs: Seven Hundred Seventy One Rupees and Ninety Six Palsa Only)
8	C.C. brick or stone ballast 1-1/2" gague ratio 1:5:10 (S.I.No. 4(c) P-16)	29	Cft	8694.95	% Cft 2,52: (Rs: Eight Thousand Six Hundred Ninety Four Rupees an Ninety Five palsa Only)

S.N.	Name of Item.	Quantity	Rate	Unit	Amount.
9	Pacca brick work in Ground Floor in (e) Cement sand mortar 1:6 (SINO. 5(e) P-21)	262	Cft	12674.36	% Cft 33,207 (Rs: Twelve Thousand Six Hundred Seventy Four Rupees and Thirty Six Paise Only)
10	Cement plaster 1:6 upto 12' height (b) 1/2" thick. (S.I.No. 13(b) P-52)	853	Sft	2206.60	% Sft 18,822 (Rs: Twenty Two Hundred Six Rupees and Sixty Paise Only)
11	Cement plaster 1:4 upto 12' height (a) 3/8" thick. (S.I.No. 11(a) P-52)	853	Sft	2197.52	% Sft 18,745 (Rs: Twenty One Hundred Ninety Seven Rupees and Fifty Two Paise Only)
12	P/L 2" thick topping c.c. 1:2:4 including surface finishing and dividing into panels.(SINO.16(c) P-41)	200	Sft	3275.50	% Sft 6,551 (Rs: Thirty Two Hundred Seventy Five Rupees and Fifty Paise Only)
13	Providing and fixing bitumen felt paper of 60 Lbs over roof i/c cleaning of roof with wire brush an removing dust, applying bitumen coat at the rate of 34 Lbs per % sft as premix inter coats and then laying felt paper with 10% over laps, then applying and spreading hill sand at the rate of 1 cft for 100 sft. The cost also i/c necessary fire material, kerosene oil, wood etc: (S.I.No.41 /P-38)	100	Sft	54.70	P.Sft 5,470 (Rs: Fifty Four Rupees and Seventy Only)
14	M/F steel grated doors with 1/16" thick sheeting i/c angle iron frame 2"x2"x3/8" and 3/4" squars bars 4" centre to centre with locking arrangement (SINO.24 P-92)	45	Sft	726.72	P.Sft 32,702 (Rs: Seven Hundred Twenty Six Rupees and Seventy Two Paise Only)
15	White washing (c)Three coats(SINO.26 (c) P-54)	853	Sft	829.95	% Sft 7,079 (Rs: Eight Hundred Twenty Nine Rupees and Ninety Five Paise Only)
16	Prepairing Surface & Painting Guard bars Jali (S.I.No.5-d P-70).	90	Sft	1270.63	% Sft 1,144 (Rs: Twelve Hundred Seventy Rupees and Sixty Three Paise Only)
				Total	Rs. 270,876

S.No.	Name of Item.	Quantity	Rate	Unit	Amount.
Part "B" Compound wall					
1	Dementling of brick work in lime or cement mortar (SINO. 13 P-11)	807	Cft	1285.63 % Cft	10,375 (Rs: Twelve Hundred Eighty Five Rupees and Sixty Three Paise Only)
2	Excavation in foundation of building bricks and other structure i/c dag belling dressing refilling around the structure with excavated earth watering and ramming lead upto 5 ft. (b) In ordinary soil (SINO.18(b) P-4)	441	Cft	3176.25 %0Cft	1,401 (Rs: Thirty One Hundred Seventy Six Rupees & Twenty Five Paise Only)
3	Cement concret brick or stone ballast 1-1/2" to 2" gauge ratio 1:4:8 (SINO. 4(b) P-16)	74	Cft	9416.28 % Cft	6,968 (Rs: Nine Thousand Four Hundred Sixteen Rupees & Twenty Eight Paise Only)
4	Pacca brick work in foundation and plinth in (e) Cement sand mortar 1:6 (SINO. 4(e) P-21)	1105	Cft	11948.36 % Cft	132,029 (Rs: Eleven Thousand Nine Hundred Forty Eight Rupees and Thirty Six Paise Only)
5	R.C.C. work including labour and material except the cost of steel reinforcement and its labour for bending and binding which will be paid sepreately. This rate also imclude all kinds of forms moulds lifting shuttering curring rendering and finishing the exposed surface (i/c screening and washing of shingle) (a) R.C. work in froo slab, beams coloumns rafts lintels and other structural members laid in situ or precast laid in position complete in all respects (i) Ratio 1:2:4 90 lbs cement 2 cft sand 4 cft shingle 1/8" to 1/4" gauge. (SINO.6 P-19)	905	Cft	337.00 P.Cft	304,985 (Rs: Three Hundred Thirty Seven Rupees Only)
6	Fabrication of mild steel reinforcement for C.C. cutting bending laying in position making joints and fastening including the cost of binding wire also including removal of rust from bars) (SINIO.7(b) P-18) Using Tor Bars.	49.77	Cwt	5001.70 P.Cwt	248,935 (Rs: Five Thousand One Rupees and Seventy Paise Only)
7	Pacca brick work in other than building (e) Cement sand mortar 1:6 (SINO. 4(e) P-21)	2576	Cft	12346.65 % Cft	318,050 (Rs: Twelve Thousand Three Hundred Forty Six Rupees and Sixty Five Paise Only)
8	Cement plaster 1:6 upto 20' height (b) 1/2" thick. (S.I.No. 13(b) P-58)	9324	Sft	2206.60 % Sft	205,743 (Rs: Twenty Two Hundred Six Rupees and Sixty Paise Only)
9	Preparing the surface and painting with weather coat i/c rubbing the surface with rubbing brick / sand paper filling the voids with chalk/plaster of pairs and then painting with weather of approved make. (SINO.38 P-61)	9324	Sft	2567.95 % Sft	239,436 (Rs: Twenty Five Hundred and Sixty Seven Rupees and Ninety Five Paise Only)

S.N.	Name of Item.	Quantity	Rate	Unit	Amount.
10	P/F Concertina /Razon wire fencing round type 24" dia with angel iron brackets 1-1/2x1/2 size of required size bindingwith steel wire, fixing on boundry wall at specified height nuts & bolts etc: complete (R.A Sanction)	739	Rft	309	P.Rft 224656

Total Rs. 1692578

Part "C" Internal Road

1	Supplying and filling sand under floor and plugging in to walls (SI No:29 P-25)	1698	Cft.	1141.25	%Cft	19,378	(Rs: Eleven Hundred Forty One Rupees and Twenty Five Paise Only)
2	Carriage of 100 cft / 5 tons of all material like stone aggr: spawl, coal, lime, surkhi, etc B.G.rail fastening points and crossing bridges girders, pipes, sheets, rails, M.S. Bars etc or 1000 Nos. bricks 10"x5"x3" or 1000 Nos. tiles 12"x6"x2" or 150 cft of timber or 100 Maunds of fuel wood by truck or any other means owned by the contractor (SINO.1 P-1) b) Extra lead 6 Miles	1698	Cft.	771.96	%Cft	13,108	(Rs: Seven Hundred Seventy One Rupees and Ninety Six Paise Only)
3	Cement concret brick or stone ballast 1-1/2" to 2" gauge ratio 1:4:8 (SINO. 4(b) P-14)	849	Cft	9416.28	% Cft	79,944	(Rs: Nine Thousand Four Hundred Sixteen Rupees & Twenty Eight Paise Only)
4	P/F cement paving blocks flooring having size of 197x97x60(mm) of city/Quddra / cobble shape with natural colours, having strength b/w 5000 psi to 8500 psi i/c filling the joints with hill sand and laying specified manner / pattern and design etc complete (SINO.72 P-49)	1698	Each	223.97	Nos	380,306	(Rs: Two Hundred Twenty Three Rupees and Ninety Seven paise Only)
5	Providing & fixing Precast Edge Block 3750 PSI Industrial Made Size 6 inches thick x 12 inches long x 12 inches high including the cost of Cartage, excavation, form Work for haunching, 1450 PSI lean concrete, 2250 PSI concrete for haunching, 1:4 cement sand mortar. (Highway SINO. 14 P-16)	283	Rft	297.01	P.Rft	84,057	(Rs: Two Hundred Ninety Seven Rupees and One Paise Only)

Total Rs. 576,788

S.N.	Name of Item.	Quantity	Rate	Unit	Amount.
Part "D" External Drainage					
1	Excavation for pipe line entrenches, & pits in soft soil i.e. trimming & dressing sides to true alignment & shape levelling of beds of trenches to correct level & grade cutting joint holes & disposal of surplus earth within a one chain as directed by Engineer incharge providing fence guards, lights flags and temporary crossing for non vehicular traffic where ever required lift upto 5 ft:(1.52mm) & lead upto one chain (30.5mm) (S.I.No.1 P-46)P.H.	2480	Cft	3600.00	%0 Cft 8,928
					(Rs: Thirty Six Hundred Only)
2	Providing, Laying RCC pipes & Collars of Class 'B' and fixing in trench i/c cutting, fitting and jointing with maxphalt composition and cement mortar (1:1) i/c testing with water to a head of 22.5 meter or 75 ft. (PHS.I.No.2/P-16)				
	12" dia RCC pipe	350	Rft	286.00	P.Rft 100,100
					(Rs: Two Hundred Eighty Six Rupees Only)
	9" dia RCC pipe	270	Rft	163.00	P.Rft 44,010
					(Rs: One Hundred Sixty Three Rupees Only)
3	Providing, Laying uPVC Pressure Pipes of Class 'D' (equivalent make) fixing in trench i/c cutting, fitting and jointing with 'Z' joint with one rubber ring i/c testing with water to a head 122 meter or 400 ft.(PHS.No.3/P-23)				
	a) 4" dia	275	Rft	226.00	P.Rft 62,150
					(Rs: Two Hundred Twenty Six Rupees Only)
4	Refilling the excavated stuff in trenches 6" thick layer i/c watering ramming to full compaction etc complete. (S.I.No.24 P-3 5B (P.H.))	827	Cft	2760.00	%0Cft 2,28
					(Rs: Twenty Seven Hundred Sixty Rupees Only)
5	Const. of main hole for the required dia of circular sewer and 7'-6" depth with walls of B.B in cement mortar 1:3 1/2" thick inside of walls and 1" (25mm) thick over benching and channel i/c fixing C.I. manhole cover with frame of clear opening 2'x2'(610x610mm) of 4.5 cwt embedded in plain C.C.1:2:4 and two way reinforced 6" thickness i/c fixing 1"(25mm) dia M.S steps 6"(150 mm) dia M.S steps 6" (150mm) wide projecting 4" (102 mm) from the face of wall at 12" (305mm) c/c duly painted etc complete as per	5	Nos	14748.00	Each 73,74
					(Rs: Fourteen Thousand Seven Hundred Forty Eight Rupee Only)

S.N.	Name of Item.	Quantity	Rate	Unit	Amount.
	specification and drawing NO. D.P./2 of Public Health Circle Southern Zone Hyderabad (a) 4" to 9" dia 4'x3'x7'-9") (SINO.1(a)P-39)				
				Total	Rs: 291,210

Part - "E" Schedule Item

1	Providing & laying (MAIN or SUB MAIN) PVC insulated with size 2-7/036 copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No.11 P-2)	200	MTR	252.00	P.MTR	50,400	(Rs: Two Hundred Fifty Two Rupees Only)
2	P/F Circuit breaker 6,10,15,20,30,40,50, & 63 amp SP (TB-5S) on a prepared board as required. (Si-203, P-31)	12	Nos	916.00	Each	10,992	(Rs: Nine Hundred Sixteen Rupees Only)
3	P/F Circuit breaker 15, 20, 30, 40, 50, 60, 75 & 100amp TP (XS-100NS) on a prepared board as required. (Si-204, P-31)	6	Nos	2,456.00	Each	14,736	(Rs: Twenty Four Hundred and Fifty Six Rupees Only)
4	Construction of RCC foundation as per following specification & instruction of EI for 31ft/40ft long tubular pole Excavation of soft/hard soil 3'x3'x5.5' Stone soiling 3'x3'x6" making lean in the ratio of 1:4:8 Length of MS bolts 6 1/2' (3/4" dia) 4 no's & making thread on MS rod Template 16"x16"x 1/4" Rings 1/4" dia round bar 4 no's to the welded with MS rod RCC foundation ratio 1:2:4 with appropriate size 2'x2'x6.5'. (S.I.No.139 P-19)	6	Nos	15,168.0	Each	91,008	(Rs: Fifteen Thousand One Hundred Sixty Eight Rupees Only)

Total =	167,136
----------------	----------------

Part - "F" Non - Schedule Item

1	P/F Distribution panel board double shutter to accommodate for circuit breaker i/c cutting in recessed the wall and fixing DB board and finishing the same and painting with enameled paint etc required.	4	Sft	15000	P.Sft	60000
---	---	---	-----	-------	-------	-------

S.N	Name of Item.	Quantity	Rate	Unit	Amount.
2	S/F 20' M/s iron tubular pole in size (15'+5'+5'+4") (10SWG) with foundation / base plate nut and bolt with out color with street light bracket.	6	Nos 40000	Each	240000
3	S/F LED Pole / Street light (100 watt) with one year warranty Superior Quality.	12	Nos 10000	Each	120000 <i>MAI</i>
Total =					420000

General Abstract

Part "A" Civil work Guard Room. 270,876

Part "B" Compound wall 1692578
15-50% Above premium on schedule items

Part "C" Internal Road *except it No. 10* 576,785

Part "D" External Drainage 291,210

Part - "E" Schedule Item 167,136

Part - "F" Non - Schedule Item 420,000

Total Rs: 3418585

Add/Deducted *5.5%* above / Below on Schedule Item. 3203888

Add/Deducted.....% above / Below on Non-Schedule Item. 644656

Grand Total Rs: 3848544.00

TERMS & CONDITIONS.

- 1 No cartage on any item of work shall be paid.
- 2 No premium non schedule of item will be paid.
- 3 100% well graded bajri used in the RCC 1:2:4.
- 4 Arbitration clause stand from the agreement.

MAI
(CONTRACTOR)

M. A. I. D. S. P.
General Order

[Signature]
ASSISTANT ENGINEER
Provincial Buildings (E)
Hyderabad.

MEDICAL SUPERINTENDENT
REGIONAL POLICE HOSPITAL
HYDERABAD *[Signature]*

Sr. Superintendent of Police
Hyderabad.



OFFICE OF THE
SENIOR SUPERINTENDENT OF POLICE
HYDERABAD

Tel No. 022-9200539

BIDDING DOCUMENT

**MAINTENANCE/REPAIR
OF
POLICE LINE HOSPITAL HYDERABAD
(COMPOUND WALL, GUARD ROOM &
EXTERNAL SERVICES)**

issued to

M/s

Shri. S. S. Srinivasulu Reddy & Co.

Maintenance & Repair of Police Line Hospital Hyderabad (Compound wall, Guard Room & External Services)

Schedule-B

Sl. No.	Name of Item.	Quantity	Rate	Unit	Amount.
Part "A" Civil work					
i. Guard Room					
	Excavation in foundation of building bricks and other structure i/c dag belling dressing refilling around the structure with excvated earth watering and ramming lead upto 5 ft. (b) In ordinary soil (SINO.18(b) P-4)	267	Cft	3176.25	%0Cft 848 (Rs: Thirty One Hundred Seventy Six Rupees & Twenty Five Paise Only)
	Cement concret brick or stone ballast 1-1/2" to 2" gauge ratio 1:4:8 (SINO. 4(b) P-16)	80	Cft	9416.28	% Cft 7,533 (Rs: Nine Thousand Four Hundred Sixteen Rupees & Twenty Eight Paise Only)
	Pacca brick work in foundation and plinth in (e) Cement sand mortor 1:6 (SINO. 4(e) P-21)	209	Cft	11948.36	% Cft 24,972 (Rs: Eleven Thousand Nine Hundred Forty Eight Rupees and Thirty Six Paise Only)
	R.C.C. work including labour and material except the cost of steel reinforcement and its labour for bending and binding which will be paid sepreteley. This rate also imclude all kinds of forms moulds lifting shuttering curring rendering and finishing the exposed surface (i/c screening and washing of shingle) (a) R.C. work in froo slab, beams coloumns rafts lintels and other structural members laid in situ or precast laid in position complete in all respects (i) Ratio 1:2:4 90 lbs cement 2 cft sand 4 cft shingle 1/8" to 1/4" gauge. (SINO.6 P-19)	168	Cft	337.00	P.Cft 56,616 (Rs: Three Hundred Thirty Seven Rupees Only)
	Fabrication of mild steel reinforcement for C.C. cutting bending laying in position making joints and fastening including the cost of binding wire also including removal of rust from bars) (SINIO.7(b) P-18) Using Tor Bars.	10.08	Cwt	5001.70	P.Cwt 50,411 (Rs: Five Thousand One Rupees and Seventy Paise Only)
	Supplying and filling sand under floor and plugging in walls. (SINO. 29 P-25)	222	Cft	1141.25	% Cft 2,531 (Rs: Eleven Hundred Forty One Rupees and Twenty Five Paise Only)
7	Add Extra 6 mile lead.	222	Cft	771.96	% Cft 1,711 (Rs: Seven Hundred Seventy One Rupees and Ninety Six Paise Only)
8	C.C. brick or stone ballast 1-1/2" gague ratio 1:5:10 (S.I.No. 4(c) P-16)	29	Cft	8694.95	% Cft 2,521 (Rs: Eight Thousand Six Hundred Ninety Four Rupees an Ninety Five paise Only)

Name of Item.	Quantity	Rate	Unit	Amount.
9 Pacca brick work in Ground Floor in (e) Cement sand mortar 1:6 (SINO. 5(e) P-21)	262	Cft	12674.36	% Cft 33,207 (Rs: Twelve Thousand Six Hundred Seventy Four Rupees and Thirty Six Paisa Only)
0 Cement plaster 1:6 upto 12' height (b) 1/2" thick. (S.I.No. 13(b) P-52)	853	Sft	2206.60	% Sft 18,822 (Rs: Twenty Two Hundred Six Rupees and Sixty Paisa Only)
1 Cement plaster 1:4 upto 12' height (a) 3/8" thick. (S.I.No. 11(a) P-52)	853	Sft	2197.52	% Sft 18,745 (Rs: Twenty One Hundred Ninety Seven Rupees and Fifty Two Paisa Only)
2 P/L 2" thick topping c.c. 1:2:4 including surface finishing and dividing into panels.(SINO.16(c) P-41)	200	Sft	3275.50	% Sft 6,551 (Rs: Thirty Two Hundred Seventy Five Rupees and Fifty Paisa Only)
1 Providing and fixing bitumen felt paper of 60 Lbs over roof i/c cleaning of roof with wire brush an removing dust, applying bitumen coat at the rate of 34 Lbs per % sft as premix inter coats and then laying felt paper with 10% over laps, then applying and spreading hill sand at the rate of 1 cft for 100 sft. The cost also i/c necessary fire material, kerosene oil, wood etc: (S.I.No.41 /P-38)	100	Sft	54.70	P.Sft 5,470 (Rs: Fifty Four Rupees and Seventy Only)
M/F steel grated doors with 1/16" thick sheeting i/c angle iron frame 2"x2"x3/8" and 3/4" squars bars 4" centre to centre with locking arrangement (SINO.24 P-92)	45	Sft	726.72	P.Sft 32,702 (Rs: Seven Hundred Twenty Six Rupees and Seventy Two Paisa Only)
White washing (c)Three coats(SINO.26 (c) P-54)	853	Sft	829.95	% Sft 7,079 (Rs: Eight Hundred Twenty Nine Rupees and Ninety Five Paisa Only)
Prepairing Surface & Painting Guard bars Jali (S.I.No.5-d P-70).	90	Sft	1270.63	% Sft 1,144 (Rs: Twelve Hundred Seventy Rupees and Sixty Three Pais Only)
			Total	Rs. 270,876

Name of Item.	Quantity	Rate	Unit	Amount.
Part "B" Compound wall				
Dementling of brick work in lime or cement mortor (SINO. 13 P-11)	807	Cft	1285.63 % Cft	10,375 (Rs: Twelve Hundred Eighty Five Rupees and Sixty Three Paisa Only)
Excavation in foundation of building bricks and other structure i/c dag belling dressing refilling arround the structure with excvated earth watering and ramming lead upto 5 ft. (b) In ordinary soil (SINO.18(b) P-4)	441	Cft	3176.25 %0Cft	1,401 (Rs: Thirty One Hundred Seventy Six Rupees & Twenty Five Paisa Only)
Cement concreet brick or stone ballast 1-1/2" to 2" gauge ratio 1:4:8 (SINO. 4(b) P-16)	74	Cft	9416.28 % Cft	6,968 (Rs: Nine Thousand Four Hundred Sixteen Rupees & Twenty Eight Paisa Only)
Pacca brick work in foundation and plinth in (e) Cement sand mortor 1:6 (SINO. 4(e) P-21)	1105	Cft	11948.36 % Cft	132,029 (Rs: Eleven Thousand Nine Hundred Forty Eight Rupees and Thirty Six Paisa Only)
R.C.C. work including labour and material except the cost of steel reinforcdement and its labour for bending and binding which will be paid sepretely. This rate also imclude all kinds of forms moulds lifting shuttering curring rendering and finishing the exposed surface (i/c screening and washing of shingle) (a) R.C. work in froo slab, beams coloumns rafts lintels and other structural members laid in situ or precast laid in position complete in all respects (i) Ratio 1:2:4 90 lbs cement 2 cft sand 4 cft shingle 1/8" to 1/4" gauge. (SINO.6 P-19)	905	Cft	337.00 P.Cft	304,985 (Rs: Three Hundred Thirty Seven Rupees Only)
Fabrication of mild steel reinforcement for C.C. cutting bending laying in position making joints and fastening including the cost of binding wire also including removal of rust from bars) (SINIO.7(b) P-18) Using Tor Bars.	49.77	Cwt	5001.70 P.Cwt	248,935 (Rs: Five Thousand One Rupees and Seventy Paisa Only)
Pacca brick work in other than building (e) Cement sand mortor 1:6 (SINO. 4(e) P-21)	2576	Cft	12346.65 % Cft	318,050 (Rs: Twelve Thousand Three Hundred Forty Six Rupees and Sixty Five Paisa Only)
Cement plaster 1:6 upto 20' height (b) 1/2" thick. (S.I.No. 13(b) P-58)	9324	Sft	2206.60 % Sft	205,743 (Rs: Twenty Two Hundred Six Rupees and Sixty Paisa Only)
Preparing the surface and painting with weather coat i/c rubbing the surface with rubbing brick / sand paper filling the voids with chalk/plaster of pairs and then painting with weather of approved make. (SINO.38 P-61)	9324	Sft	2567.95 % Sft	239,436 (Rs: Twenty Five Hundred and Sixty Seven Rupees and Ninety Five Paisa Only)

Name of Item.	Quantity	Rate	Unit	Amount.
P/F Concertina /Razon wire fencing round type 24" dia with angel iron brackets 1-1/2x1/2 size of required size bindingwith steel wire, fixing on boundry wall at specified height nuts & bolts etc: complete (R.A Sanction)	739	Rft 310/-	P.Rft	229090/-

Total Rs. 1697012/-

Part "C" Internal Road

Supplying and filling sand under floor and plugging in to walls (SI No:29 P-25)	1698	Cft.	1141.25	%Cft	19,378	(Rs: Eleven Hundred Forty One Rupees and Twenty Five Paise Only)
Carriage of 100 cft / 5 tons of all material like stone aggr: spawl, coal, lime, surkhi, etc B.G.rail fastening points and crossing bridges girders, pipes, sheets, rails, M.S. Bars etc or 1000 Nos. bricks 10"x5"x3" or 1000 Nos. tiles 12"x6"x2" or 150 cft of timber or 100 Maunds of fuel wood by truck or any other means owned by the contractor (SINO.1 P-1) b) Extra lead 6 Miles	1698	Cft.	771.96	%Cft	13,108	(Rs: Seven Hundred Seventy One Rupees and Ninety Six Paise Only)
Cement concret brick or stone ballast 1-1/2" to 2" gauge ratio 1:4:8 (SINO. 4(b) P-14)	849	Cft	9416.28	% Cft	79,944	(Rs: Nine Thousand Four Hundred Sixteen Rupees & Twenty Eight Paise Only)
P/F cement paving blocks flooring having size of 197x97x60(mm) of city/Quddra / cobble shape with natural colours, having strength b/w 5000 psi to 8500 psi i/c filling the joints with hill sand and laying specified manner / pattern and design etc complete (SINO.72 P-49)	1698	Each	223.97	Nos	380,308	(Rs: Two Hundred Twenty Three Rupees and Ninety Seven paise Only)
Providing & fixing Precast Edge Block 3750 PSI Industrial Made Size 6 inches thick x 12 inches long x 12 inches high including the cost of Cartage, excavation, form Work for haunching, 1450 PSI lean concrete, 2250 PSI concrete for haunching, 1:4 cement sand mortar. (Highway SINO. 14 P-16)	283	Rft	297.01	P.Rft	84,057	(Rs: Two Hundred Ninety Seven Rupees and One Paise Only)

Total Rs. 576,78

Name of Item.	Quantity	Rate	Unit	Amount.
Part "D" External Drainage				
Excavation for pipe line entrenches, & pits in soft soil i.e. trimming & dressing sides to true alignment & shape levelling of beds of trenches to correct level & grade cutting joint holes & disposal of surplus earth within a one chain as directed by Engineer incharge providing fence guards, lights flags and temporary crossing for non vehicular traffic where ever required lift upto 5 ft.(1.52mm) & lead upto one chain (30.5mm) (S.I.No.1 P-46) P.H.	2480	Cft	3600.00	%0 Cft 8,928
				(Rs: Thirty Six Hundred Only)
Providing, Laying RCC pipes & Collars of Class 'B' and fixing in trench i/c cutting, fitting and jointing with maxphalt composition and cement mortar (1:1) i/c testing with water to a head of 22.5 meter or 75 ft. (PHS.I.No.2/P-16)				
12" dia RCC pipe	350	Rft	286.00	P.Rft 100,100
				(Rs: Two Hundred Eighty Six Rupees Only)
9" dia RCC pipe	270	Rft	163.00	P.Rft 44,010
				(Rs: One Hundred Sixty Three Rupees Only)
Providing, Laying uPVC Pressure Pipes of Class 'D' (equivalent make) fixing in trench i/c cutting, fitting and jointing with 'Z' joint with one rubber ring i/c testing with water to a head 122 meter or 400 ft.(PHS.No.3/P-23)				
a) 4" dia	275	Rft	226.00	P.Rft 62,150
				(Rs: Two Hundred Twenty Six Rupees Only)
Refilling the excavated stuff in trenches 6" thick layer i/c watering ramming to full compaction etc complete. (S.I.No.24 P-3 5B (P.H.))	827	Cft	2760.00	%0Cft 2,28
				(Rs: Twenty Seven Hundred Sixty Rupees Only)
Const. of main hole for the required dia of circular sewer and 7'-6" depth with walls of B.B in cement mortar 1:3 1/2" thick inside of walls and 1" (25mm) thick over benching and channel i/c fixing C.I. manhole cover with frame of clear opening 2'x2'(610x610mm) of 4.5 cwt embeded in plain C.C.1:2:4 and two way reinforced 6" thickness i/c fixing 1"(25mm) dia M.S steps 6"(150 mm) dia M.S steps 6" (150mm) wide projecting 4" (102 mm) from the face of wall at 12" (305mm) c/c duly painted etc complete as per	5	Nos	14748.00	Each 73,74
				(Rs: Fourteen Thousand Seven Hundred Forty Eight Rupee Only)

No.	Name of Item.	Quantity	Rate	Unit	Amount.
	specification and drawing No. D.P./2 of Public Health Circle Southern Zone Hyderabad (a) 4" to 9" dia 4'x3'x7'-9" (SINO.1(a)P-39)				

Total Rs: 291,210

"E" Schedule Item

Providing & laying (MAIN or SUB MAIN) PVC insulated with size 2-7/036 copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No.11 P-2)

200 MTR 252.00 P.MTR 50,400
(Rs: Two Hundred Fifty Two Rupees Only)

P/F Circuit breaker 6,10,15,20,30,40,50, & 63 amp SP (TB-5S) on a prepared board as required. (Si-203, P-31)

12 Nos 916.00 Each 10,992
(Rs: Nine Hundred Sixteen Rupees Only)

P/F Circuit breaker 15, 20, 30, 40, 50, 60, 75 & 100amp TP (XS-100NS) on a prepared board as required. (Si-204, P-31)

6 Nos 2,456.00 Each 14,736
(Rs: Twenty Four Hundred and Fifty Six Rupees Only)

Construction of RCC foundation as per following specification & instruction of EI for 31ft/40ft long tubular pole Excavation of soft/hard soil 3'x3'x5.5' Stone soiling 3'x3'x6" making lean in the ratio of 1:4:8 Length of MS bolts 6 1/2' (3/4" dia) 4 no's & making thread on MS rod Template 16"x16"x 1/4" Rings 1/4" dia round bar 4 no's to the welded with MS rod RCC foundation ratio 1:2:4 with appropriate size 2'x2'x6.5'. (S.I.No.139 P-19)

6 Nos 15,168.0 Each 91,008
(Rs: Fifteen Thousand One Hundred Sixty Eight Rupees Only)

Total =	167,136
----------------	----------------

"F" Non - Schedule Item

P/F Distribution panel board double shutter to accommodate for circuit breaker i/c cutting in recessed the wall and fixing DB board and finishing the same and painting with enameled paint etc required.

4 Sft 15500/- P.Sft 62000/-

Name of Item	Quantity	Rate	Unit	Amount
S/F 20' M/s iron tubular pole in size (15'+5"+5'+4") (10SWG) with foundation / base plate nut and bolt with out color with street light bracket.	6	Nos 39500/-	Each	297000/-
S/F LED Pole / Street light (100 watt) with one year warranty Superior Quality.	12	Nos 12000/-	Each	144000/-
Total =				503000/-

General Abstract

Part "A" Civil work Guard Room. 270,876

Part "B" Compound wall 1697012/-

19.17% Above premium on schedule items
Part "C" Internal Road *except items 10* 576,785

Part "D" External Drainage 291,210

Part - "E" Schedule Item 167,136

Part - "F" Non - Schedule Item

503000/-
Total Rs: 3506019/-

Add/Deducted 19.17 % above / Below on Schedule Item.

3304304/-

Add/Deducted% above / Below on Non-Schedule Item.

732090/-
Grand Total Rs: 4036394/-

TERMS & CONDITIONS.

No cartage on any item of work shall be paid.

No premium non schedule of item will be paid.

100% well graded bajri used in the RCC 1:2:4.

Arbitration clause stand from the agreement.

[Signature]
(CONTRACTOR)

[Large Signature]

MEDICAL SUPERINTENDENT
REGIONAL HOSPITAL
W/O.

[Signature]
PROBATIONER ENGINEER
PUBLIC WORKS (ELI)
Muzrabac.

[Signature]
Sr. Section Officer, Police
Muzrabac.



OFFICE OF THE
SENIOR SUPERINTENDENT OF POLICE
HYDERABAD

Tel No. 022-9200539

BIDDING DOCUMENT

MAINTENANCE/REPAIR
OF
POLICE LINE HOSPITAL HYDERABAD
(COMPOUND WALL, GUARD ROOM &
EXTERNAL SERVICES)

issued to

M/s NKC Enterprises

Maintenance & Repair of Police Line Hospital Hyderabad (Compound wall, Guard Room & External Services)

Schedule-B

S.N.	Name of Item.	Quantity	Rate	Unit	Amount.
Part "A" Civil work					
i. Guard Room					
1	Excavation in foundation of building bricks and other structure i/c dag belling dressing refilling around the structure with excvated earth watering and ramming lead upto 5 ft. (b) In ordinary soil (SINO.18(b) P-4)	267	Cft 3176.25	%Cft	8481 (Rs: Thirty One Hundred Seventy Six Rupees & Twenty Five Paisa Only)
2	Cement concret brick or stone ballast 1-1/2" to 2" gauge ratio 1:4:8 (SINO. 4(b) P-16)	80	Cft 9416.28	% Cft	7,533 (Rs: Nine Thousand Four Hundred Sixteen Rupees & Twenty Eight Paisa Only)
3	Pacca brick work in foundation and plinth in (e) Cement sand mortor 1:6 (SINO. 4(e) P-21)	209	Cft 11948.36	% Cft	24,972 (Rs: Eleven Thousand Nine Hundred Forty Eight Rupees and Thirty Six Paisa Only)
4	R.C.C. work including labour and material except the cost of steel reinforcement and its labour for bending and binding which will be paid sepretely. This rate also include all kinds of forms moulds lifting shuttering curring rendering and finishing the exposed surface (i/c screening and washing of shingle) (a) R.C. work in froo slab, beams coloumns rafts lintels and other structural members laid in situ or precast laid in position complete in all respects (i) Ratio 1:2:4 90 lbs cement 2 cft sand 4 cft shingle 1/8" to 1/4" gauge. (SINO.6 P-19)	168	Cft 337.00	P.Cft	56,616 (Rs: Three Hundred Thirty Seven Rupees Only)
5	Fabrication of mild steel reinforcement for C.C. cutting bending laying in position making joints and fastening including the cost of binding wire also including removal of rust from bars) (SINIO.7(b) P-18) Using Tor Bars.	10.08	Cwt 5001.70	P.Cwt	50,411 (Rs: Five Thousand One Rupees and Seventy Paisa Only)
6	Supplying and filling sand under floor and plugging in walls. (SINO. 29 P-25)	222	Cft 1141.25	% Cft	2,531 (Rs: Eleven Hundred Forty One Rupees and Twenty Five Paisa Only)
7	Add Extra 6 mile lead.	222	Cft 771.96	% Cft	1,711 (Rs: Seven Hundred Seventy One Rupees and Ninety Six Paisa Only)
8	C.C. brick or stone ballast 1-1/2" gague ratio 1:5:10 (S.I.No. 4(c) P-16)	29	Cft 8694.95	% Cft	2,521 (Rs: Eight Thousand Six Hundred Ninety Four Rupees an Ninety Five paisa Only)

S.N.	Name of Item.	Quantity	Rate	Unit	Amount.	
9	Pacca brick work in Ground Floor in (e) Cement sand mortar 1:6 (SINO. 5(e) P-21)	262	Cft	12674.36	% Cft	33,207 (Rs: Twelve Thousand Six Hundred Seventy Four Rupees and Thirty Six Paisa Only)
10	Cement plaster 1:6 upto 12' height (b) 1/2" thick. (S.I.No. 13(b) P-52)	853	Sft	2206.60	% Sft	18,822 (Rs: Twenty Two Hundred Six Rupees and Sixty Paisa Only)
11	Cement plaster 1:4 upto 12' height (a) 3/8" thick. (S.I.No. 11(a) P-52)	853	Sft	2197.52	% Sft	18,745 (Rs: Twenty One Hundred Ninety Seven Rupees and Fifty Two Paisa Only)
12	P/L 2" thick topping c.c. 1:2:4 including surface finishing and dividing into panels.(SINO.16(c) P-41)	200	Sft	3275.50	% Sft	6,551 (Rs: Thirty Two Hundred Seventy Five Rupees and Fifty Paisa Only)
13	Providing and fixing bitumen felt paper of 60 Lbs over roof i/c cleaning of roof with wire brush an removing dust, applying bitumen coat at the rate of 34 Lbs per % sft as premix inter coats and then laying felt paper with 10% over laps, then applying and spreading hill sand at the rate of 1 cft for 100 sft. The cost also i/c necessary fire material, kerosene oil, wood etc: (S.I.No.41 /P-38)	100	Sft	54.70	P.Sft	5,470 (Rs: Fifty Four Rupees and Seventy Only)
14	M/F steel grated doors with 1/16" thick sheeting i/c angle iron frame 2"x2"x3/8" and 3/4" squars bars 4" centre to centre with locking arrangement (SINO.24 P-92)	45	Sft	726.72	P.Sft	32,702 (Rs: Seven Hundred Twenty Six Rupees and Seventy Two Paisa Only)
15	White washing (c)Three coats(SINO.26 (c) P-54)	853	Sft	829.95	% Sft	7,079 (Rs: Eight Hundred Twenty Nine Rupees and Ninety Five Paisa Only)
16	Prepairing Surface & Painting Guard bars Jali (S.I.No.5-d P-70).	90	Sft	1270.63	% Sft	1,144 (Rs: Twelve Hundred Seventy Rupees and Sixty Three Pais Only)
Total					Rs.	270,876

S.N.	Name of Item.	Quantity	Rate	Unit	Amount.
Part "B" Compound wall					
1	Dementling of brick work in lime or cement mortor (SINO. 13 P-11)	807	Cft	1285.63 % Cft	10,375
(Rs: Twelve Hundred Eighty Five Rupees and Sixty Three Paise Only)					
2	Excvation in foundation of building bricks and other structure i/c dag belling dressing refilling arround the structure with excvated earth watering and ramming lead upto 5 ft. (b) In ordinary soil (SINO.18(b) P-4)	441	Cft	3176.25 %0Cft	1,401
(Rs: Thirty One Hundred Seventy Six Rupees & Twenty Five Paise Only)					
3	Cement concreet brick or stone ballast 1-1/2" to 2" gauge ratio 1:4:8 (SINO. 4(b) P-16)	74	Cft	9416.28 % Cft	6,968
(Rs: Nine Thousand Four Hundred Sixteen Rupees & Twenty Eight Paise Only)					
4	Pacca brick work in foundation and plinth in (e) Cement sand mortor 1:6 (SINO. 4(e) P-21)	1105	Cft	11948.36 % Cft	132,029
(Rs: Eleven Thousand Nine Hundred Forty Eight Rupees and Thirty Six Paise Only)					
5	R.C.C. work including labour and material except the cost of steel reinforcement and its labour for bending and binding which will be paid sepretely. This rate also imclude all kinds of forms moulds lifting shuttering curring rendering and finishing the exposed surface (i/c screening and washing of shingle) (a) R.C. work in froo slab, beams coloumns rafts lintels and other structural members laid in situ or precast laid in position complete in all respects (i) Ratio 1:2:4 90 lbs cement 2 cft sand 4 cft shingle 1/8" to 1/4" gauge. (SINO.6 P-19)	905	Cft	337.00 P.Cft	304,985
(Rs: Three Hundred Thirty Seven Rupees Only)					
6	Fabrication of mild steel reinforcement for C.C. cutting bending laying in position making joints and fastening including the cost of binding wire also including removal of rust from bars) (SINIO.7(b) P-18) Using Tor Bars.	49.77	Cwt	5001.70 P.Cwt	248,935
(Rs: Five Thousand One Rupees and Seventy Paise Only)					
7	Pacca brick work in other than building (e) Cement sand mortor 1:6 (SINO. 4(e) P-21)	2576	Cft	12346.65 % Cft	318,050
(Rs: Twelve Thousand Three Hundred Forty Six Rupees an Sixty Five Paise Only)					
8	Cement plaster 1:6 upto 20' height (b) 1/2" thick. (S.I.No. 13(b) P-58)	9324	Sft	2206.60 % Sft	205,743
(Rs: Twenty Two Hundred Six Rupees and Sixty Paise Only)					
9	Preparing the surface and painting with weather coat i/c rubbing the surface with rubbing brick / sand paper filling the voids with chalk/plaster of pairs and then painting with weather of approved make. (SINO.38 P-61)	9324	Sft	2567.95 % Sft	239,436
(Rs: Twenty Five Hundred and Sixty Seven Rupees and Ninety Five Paise Only)					

	Name of Item.	Quantity	Rate	Unit	Amount
10	P/F Concertina /Razon wire fencing round type 24" dia with angel iron brackets 1-1/2x1/2 size of required size bindingwith steel wire, fixing on boundry wall at specified height nuts & bolts etc: complete (R.A Sanction)	739	Rft	306	P.Rft 226134

Total Rs. 1694056

Part "C" Internal Road

	Supplying and filling sand under floor and plugging in to walls (SI No:29 P-25)	1698	Cft.	1141.25	%Cft	19,378
						(Rs: Eleven Hundred Forty One Rupees and Twenty Five Paise Only)
	Carriage of 100 cft / 5 tons of all material like stone agrr: spawl, coal, lime, surkhi, etc B.G.rail fastening points and crossing bridges girders, pipes, sheets, rails, M.S. Bars etc or 1000 Nos. bricks 10"x5"x3" or 1000 Nos. tiles 12"x6"x2" or 150 cft of timber or 100 Maunds of fuel wood by truck or any other means owned by the contractor (SINO.1 P-1) b) Extra lead 6 Miles	1698	Cft.	771.96	%Cft	13,108
						(Rs: Seven Hundred Seventy One Rupees and Ninety Six Paise Only)
3	Cement concret brick or stone ballast 1-1/2" to 2" gauge ratio 1:4:8 (SINO. 4 (b) P-14)	849	Cft	9416.28	% Cft	79,944
						(Rs: Nine Thousand Four Hundred Sixteen Rupees & Twenty Eight Paise Only)
4	P/F cement paving blocks flooring having size of 197x97x60(mm) of city/Quddra / cobble shape with natural colours, having strength b/w 5000 psi to 8500 psi i/c filling the joints with hill sand and laying specified manner / pattern and design etc complete (SINO.72 P-49)	1698	Each	223.97	Nos	380,304
						(Rs: Two Hundred Twenty Three Rupees and Ninety Seven paise Only)
5	Providing & fixing Precast Edge Block 3750 PSI Industrial Made Size 6 inches thick x 12 inches long x 12 inches high including the cost of Cartage, excavation, form Work for haunching, 1450 PSI lean concrete, 2250 PSI concrete for haunching, 1:4 cement sand mortar. (Highway SINO. 14 P-16)	283	Rft	297.01	P.Rft	84,057
						(Rs: Two Hundred Ninety Seven Rupees and One Paise Only)

Total Rs. 576,78

Name of item.	Quantity	Rate	Unit	Amount.
Part "D" External Drainage				
1 Excavation for pipe line entrenches, & pits in soft soil i.e. trimming & dressing sides to true alignment & shape levelling of beds of trenches to correct level & grade cutting joint holes & disposal of surplus earth within a one chain as directed by Engineer incharge providing fence guards, lights flags and temporary crossing for non vehicular traffic where ever required lift upto 5 ft:(1.52mm) & lead upto one chain (30.5mm) (S.I.No.1 P-46)P.H.	2480	Cft 3600.00	%0 Cft	8,928
				(Rs: Thirty Six Hundred Only)
Providing, Laying RCC pipes & Collars of Class 'B' and fixing in trench i/c cutting, fitting and jointing with maxphalt composition and cement mortar (1:1) i/c testing with water to a head of 22.5 meter or 75 ft. (PHS.I.No.2/P-16)				
12" dia RCC pipe	350	Rft 286.00	P.Rft	100,100
				(Rs: Two Hundred Eighty Six Rupees Only)
9" dia RCC pipe	270	Rft 163.00	P.Rft	44,010
				(Rs: One Hundred Sixty Three Rupees Only)
3 Providing, Laying uPVC Pressure Pipes of Class 'D' (equivalent make) fixing in trench i/c cutting, fitting and jointing with 'Z' joint with one rubber ring i/c testing with water to a head 122 meter or 400 ft.(PHSINO.3/P-23)				
a) 4" dia	275	Rft 226.00	P.Rft	62,150
				(Rs: Two Hundred Twenty Six Rupees Only)
4 Refilling the excavated stuff in trenches 6" thick layer i/c watering ramming to full compaction etc complete. (S.I.No.24 P-3 5B (P.H.))	827	Cft 2760.00	%0Cft	2,28
				(Rs: Twenty Seven Hundred Sixty Rupees Only)
5 Const. of main hole for the required dia of circular sewer and 7'-6" depth with walls of B.B in cement mortar 1:3 1/2" thick inside of walls and 1" (25mm) thick over benching and channel i/c fixing C.I. manhole cover with frame of clear opening 2'x2'(610x610mm) of 4.5 cwt embeded in plain C.C.1:2:4 and two way rainforced 6" thickness i/c fixing 1"(25mm) dia M.S steps6"(150 mm) dia M.S steps 6" (150mm) wide projecting 4" (102 mm) from the face of wall at 12" (305mm) c/c duly painted etc complete as per	5	Nos 14748.00	Each	73,74
				(Rs: Fourteen Thousand Seven Hundred Forty Eight Rupee Only)

S.N.	Name of item.	Quantity	Rate	Unit	Amount.
	specification and drawing No. D.P./2 of Public Health Circle Southern Zone Hyderabad (a) 4" to 9" dia 4'x3'x7'-9") (SINO.1(a)P-39)				

Total Rs: 291,210

Part - "E" Schedule Item

Providing & laying (MAIN or SUB MAIN) PVC insulated with size 2-7/036 copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No.11 P-2)

200 MTR 252.00 P.MTR 50,400
(Rs: Two Hundred Fifty Two Rupees Only)

P/F Circuit breaker 6,10,15,20,30,40,50, & 63 amp SP (TB-5S) on a prepared board as required. (Si-203, P-31)

12 Nos 916.00 Each 10,992
(Rs: Nine Hundred Sixteen Rupees Only)

P/F Circuit breaker 15, 20, 30, 40, 50, 60, 75 & 100amp TP (XS-100NS) on a prepared board as required. (Si-204, P-31)

6 Nos 2,456.00 Each 14,736
(Rs: Twenty Four Hundred and Fifty Six Rupees Only)

Construction of RCC foundation as per following specification & instruction of EI for 31ft/40ft long tubular pole Excavation of soft/hard soil 3'x3'x5.5' Stone soiling 3'x3'x6" making lean in the ratio of 1:4:8 Length of MS bolts 6 1/2' (3/4" dia) 4 no's & making thread on MS rod Template 16"x16"x 1/4" Rings 1/4" dia round bar 4 no's to the welded with MS rod RCC foundation ratio 1:2:4 with appropriate size 2'x2'x6.5'. (S.I.No.139 P-19)

6 Nos 15,168.0 Each 91,008
(Rs: Fifteen Thousand One Hundred Sixty Eight Rupees Only)

Total = 167,136

Part - "F" Non - Schedule Item

P/F Distribution panel board double shutter to accommodate for circuit breaker i/c cutting in recessed the wall and fixing DB board and finishing the same and painting with enameled paint etc required.

4 Sft 14,400 P.Sft 59,200

Sl. No.	Name of Item	Quantity	Rate	Unit	Amount
2	S/F 20' M/s iron tubular pole in size (15'+5"+5'+4") (10SWG) with foundation / base plate nut and bolt with out color with street light bracket.	6	Nos 42500	Each	255000
3	S/F LED Pole / Street light (100 watt) with one year warranty Superior Quality.	12	Nos 11200	Each	134400

Total = 448600

General Abstract

Part "A" Civil work Guard Room. 270,876

Part "B" Compound wall 1694056

18% Above premium on schedule item except its No 10

Part "C" Internal Road 576,785

Part "D" External Drainage 291,210

Part - "E" Schedule Item 167,136

Part - "F" Non - Schedule Item 448600

Total Rs: 3448663-00

Add/Deducted 18% above / Below on Schedule Item. 8273236-00

Add/Deducted.....% above / Below on Non-Schedule Item. 674734-00

Grand Total Rs: 3947970-00

TERMS & CONDITIONS.

No cartage on any item of work shall be paid.

No premium non schedule of item will be paid.

100% well graded bajri used in the RCC 1:2:4.

Arbitration clause stand from the agreement.

[Signature]
(CONTRACTOR)

[Signature]
MEDICAL SUPERINTENDENT
REGIONAL POLICE HOSPITAL
HYDERABAD

[Signature]
ASSISTANT ENGINEER
PROMOTION OFFICER (EL)
HYDERABAD.

[Signature]
Sr. Superintendent of Police
Hyderabad.



OFFICE OF THE
SENIOR SUPERINTENDENT OF POLICE
HYDERABAD

Tel No. 022-9200539

BIDDING DOCUMENT

MAINTENANCE/REPAIR
OF
POLICE HOSPITAL POLICE LINE HYDERABAD

issued to

M/s AL-ASR Civil Engineering works Hydr

M/R to Police Hospital Police Line Hyderabad.

Schedule-B

S.N.	Name of Item.	Quantity	Rate	Unit	Amount.
Part "A" Civil Work					
1	Removing door with chowkat (S.I.No.33-a P-13)	7	Cft	142.18	% Cft 995
(Rs: One Hundred Forty Two Rupees and Eighteen Paisa Only)					
2	Removing window and sky light with chowkat (S.I.No.33-b P-13)	6	Cft	102.85	% Cft 617
(Rs: One Hundred Two Rupees and Eighty Five Paisa Only)					
3	Dismantling brick work in lime or cement mortar (SINO. 13 P-11)	106	Cft	1285.63	% Cft 1,363
(Rs: Twelve Hundred Eighty Five Rupees and Sixty Three Paisa Only)					
4	Dismantling cement concret plain 1:4:8 (S.I.No.19-c P-11)	574	Cft	1663.75	% Cft 9,550
(Rs: Sixteen Hundred Sixty Three Rupees and Seventy Five Paisa Only)					
5	Removing of cement or lime plaster (SINO.53 P-13)	2550	Sft	121.00	% Sft 3,086
(Rs: One Hundred Twenty One Rupees Only)					
6	Scraping ordinary distemper oil boud distemper or paint on walls (S.I.No.54-b P-14).	3756	Sft	226.88	% Sft 8,522
(Rs: Two Hundred Twenty Six Rupees and Eighty Eight Paisa Only)					
7	P/F G.I. Frame / Chowkats of size 7"x2" or 4-1/2"x3" for Door using 20 gague G.I.sheet including welded hinges and fixing at site with necessary holds fasts filling with cement sand slurry or ratio 1:6 and repairing the jambs the cost also including all carriage tolls and plants used in making and fixing . (S.I.No. 29 P-93)	69	Rft	228.90	P.Rft 23,806
(Rs: Two Hundred Twenty Eight Rupees and Ninety Paisa Only)					
8	P/F G.I. Frame / Chowkats of size 7"x2" or 4-1/2"x3" for window using 20 gague G.I.sheet including welded hinges and fixing at site with necessary holds fasts filling with cement sand slurry or ratio 1:6 and repairing the jambs the cost also including all carriage tolls and plants used in making and fixing . (S.I.No. 28 P-93)	167	Rft	240.50	P.Rft 40,164
(Rs: Two Hudred Forty Rupees and Fifty Paisa Only)					
9	First Class deodar wood wrough joinery in Doors & Windows etc fixed in position including chowkats hold fasts hinges aldrops iron tower bolts chocks cleats handles & cords with hooks etc. Deodar panelled or panelled and glazed or fully glazed 1-3/4" thick. (S.I.No. 7(b)P-57) (Without Chowkats).	253	Sft	902.93	P.Sft 228,441
(Rs: Nine Hundred Two Rupees and Ninety Three Paisa Only)					

S.N.	Name of Item.	Quantity	Rate	Unit	Amount.
10	Cement plaster 1:6 upto 20' height (b) 1/2" thick. (S.I.No. 13(b) P-51)	2550	Sft 2206.60	% Sft	56,268 (Rs: Twenty Two Hundred Six Rupees and Sixty Paise Only)
11	Cement plaster 1:4 upto 20' height (a) 3/8" thick. (S.I.No. 11(a) P-51)	2550	Sft 2197.52	% Sft	56,037 (Rs: Twenty One Hundred Ninety Seven Rupees and Fifty Two Paise Only)
12	Supplying & fixing in position Aluminium channels framing for hinged doors or Alcop made with 5 mm thick tinted glass glazing (Belgium) and Alpha (Japan) locks I/c handles, stoppers etc. (b) Deluxe model (Bronze). (S.I.No.83-b P-107).	21	Sft 1507.66	P.Sft	31,661 (Rs: Fifteen Hundred Seven Rupees and Sixty Six Paise Only)
13	Supplying & fixing in position Aluminium channels framing for slidding windows & ventilators of Alcop made with 5 mm thick tinted glass glazing (Belgium) & Aluminium fly screen I/c handles stoppers & locking arrangement etc. complete. (b) Deluxe model (Bronze). (S.I.No.83-b P-107).	64	Sft 1647.69	P.Sft	105,452 (Rs: Sixteen Hundred Forty Seven Rupees and Sixty Nine Paise Only)
14	Providing & Fixing Printed Glazed Porceline Tile 24" X 24" finished in white cement of laid over a bed of 1/2" thick gray cement sand mortar ratio 1:3 using / filling of joints with white cement etc: complete in all respect.(R.A.A)	1042	Sft 227	P.Sft	237159
15	Providing and laying tiles glazed 6" x 6" x 1/4" on floor or wall facing in required colour and apttern of STILE specification jointed in white cement and pigment over a base of 1:2 grey cement mortar 3/4" thick including washing and filling of joints with slaurry of white cement and pigment in desired shape with finishing, clearing and cost of wax polish etc. complete including cutting tiles to proper profile. (S.I.No.60 P-53).	1670	Sft 30509.77	P.Sft	509,513 (Rs: Thirty Thousand Five Hundred Nine Rupees and Seventy Seven Paise Only)
16	S/F false ceiling of plaster of paris, in pannels i/c making frame, work of deodar wood i/c painting with soligia paint. (S.I.No.52 P-64).	636	Sft 25293.42	%Sft	160,866 (Rs: Twenty Five Thousand Two Hundred Ninety Three Rupees and Forty Two Paise Only)
17	P/F Wall Paper i/c Cost of Solution.	540	Cft 205	P.Sft	110700
18	Preparing the surface & painting with matt finish I/c rubbing the surface with Bathy (Silicon carbide rubbing brick) filling the voids with Zink / chalk/plaster of paris mixture, applying first coat	1714	Sft 3444.38	%Sft	59,037 (Rs: Thirty Four Hundred Forty Four Rupees and Thirty Eight paise Only)

S.N	Name of Item.	Quantity	Rate	Unit	Amount.
	premix making the surface smooth and then painting 3 coats with matt finish of approved make etc: complete (new surface)(S.I.No.36 P-55)				
19	Distemping (c) Three coats (SINO.24 (c) P-53)	2042	Sft 1079.65	% Sft	22,046
					(Rs: One Thousand Seventy Nine Rupees and Sixty Five Paisa Only)
20	Painting New surface and painting of door and windows any type 3 coats coat (SINO.5(c) P-77)	506	Sft 2116.41	% Sft	10,709
					(Rs: Twenty One Hundred Sixteen Rupees and Forty One Paisa Only)

Total **Rs: = 1675992 =**

Part - "B" E.I Work Schedule Item

1	Wiring for light or fan point with 3/029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required. (SI No. 124 P-15)	25	Nos 1,130.00	Each	28,250
					(Rs: Eleven Hundred Thirty Rupees Only)
2	Wiring for Call bell point with 3/029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required (S.I. No. 128/P-15)	2	Nos 1,764.00	Each	3,528
					(Rs: Seventeen Hundred Sixty Four Rupees Only)
3	Wiring for plug point with 3/029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required. (SI No. 126 P-15)	10	Nos 985.00	Each	9,850
					(Rs: Nine Hundred Eighty Five Rupees Only)
4	Providing & laying (MAIN or SUB MAIN)PVC insulated with size 2-7/044 (6mm ²) copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No.12 P-2)	40	MTR 341.00	P.MTI	13,640
					(Rs: Three Hundred Forty One Rupees Only)
5	Providing & laying (MAIN or SUB MAIN) PVC insulated with size 2-7/029 copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required (S.I.No.10 P-2)	40	MTR 222.00	P.MTI	8,880
					(Rs: Two Hundred Twenty Two Rupees Only)
6	Providing & fixing DP i/c Change Over Switch 500 Volts 100amp on a prepared board (S.I.No.197 P-30)	2	Nos 7,612.00	Each	15,224
					(Rs: Seven Thousand Six Hundred Twelve Rupees Only)
7	P/F Circuit breaker 15, 20, 30, 40, 50, 60, 75 & 100amp TP (XS-100NS) on a prepared board as required. (Si-204; P-31)	4	Nos 2,456.00	Each	9,824
					(Rs: Twenty Four Hundred Fifty Six Rupees Only)
8	Providing & fixing voltmeter size 96/96mm 500volt as required & as per instruction of EI (S.I.No.285 P-41)	1	Nos 999.00	Each	999
					(Rs: Nine Hundred Ninety Nine Rupees Only)

S.N	Name of Item.	Quantity	Rate	Unit	Amount.
9	Providing & fixing ammeters size 96/96mm Direct 15A, 30A, 50A, 60A & 100A as required & as per instruction of EI (S.I.No.284 P-41)	1	Nos 1054.00	Each	1,054

(Rs: One Thousand Fifty Four Rupees Only)

Total Rs: 91,249

Part - "B" Non - Schedule Item

1	S/F LED light 18 to 20 watt fully covered i/c cutting in false ceiling and finishing the same, fixing of light i/c necessary connection etc complete (Philips as required)	60	Nos 1960	Each	117600
2	S/F Ceiling fan 56" sweep complete with conopy, block etc superior quality.	10	Nos 9200	Each	92000
3	S/F Wall Breaket Fan 18" sweep complete with all accessories.	12	Nos 6800	Each	81600
4	S/F Mix metallic switch 2 pin socket bell pati etc as required.	60	Nos 1460	Each	87600
5	S/F Multi Purpose base heavy duty power plug 3 in socket with base as required.	5	Sft 1218	P.Sft	6090
6	P/F Energy Saver bulb superior quality for fancy room light.	18	Nos 360	Each	6480
7	S/F Mix Matlic sheet 2-8 hole.	20	Nos 920	Each	18400
8	S/F Fancy type Mix metallic sheet farne 2,4,6,8 hole with pure board as required cutting & refilling.	9	Nos 1522	Each	13698
9	S/F Panel board double shutter.	2	Sft 15700	P.Sft	31400
10	S/F Fancy Fan dimmer.	12	Nos 240	Each	2880

Total Rs: =457748=


A. S. R.
 CIVIL ENGINEERING WORKS

S.N	Name of Item.	Quantity	Rate	Unit	Amount.
Part "C" W/s & S/F.					
1	P/F Orisa type white or colour glazed earthen ware W.C. pan with cost, of low level plastic flush tank of 3' gallons capacity of approved quality I/c making req: No.of holes in walls, plinth & floor and making good in c.c. 1:2:4 (a) W.C. pan orisa type 23" with plastic tank of low down 3 gallons trap & C.I. thumble (Superior quality) (i) with 4" dia C.I. trap(S.I.No. 3(a) (ii)P-2)	5	Each 6166.60	Each	30,833 (Rs: Six Thousand Sixty Six Rupees and Sixty Paise Only)
2	P/F 24"x18" lav: basin in white glazed earthen ware complete with & including the cost of W.I. Or C.I. Contilever brackets 6 inches built into walls painted white in two coats after a primary coat of red lead paint a pair of 1/2" dia chrome plated pillar taps, 1-1/2" dia rubber plug and chrome plated brass chain 1-1/4" dia malleable iron or c.p.brass traps malleable iron or brass union and making requisite No. of holes in walls, plinth and floor for pipe connection and making good in c.c. 1:2:4 (foreign or equivalent) (SINO. 13 P-4).	5	Nos. 6237.00	Each	31,185 (Rs: Six Thousand Two Hundred Thirty Seven Rupees Only)
3	Add extra labour for providing and fixing of earthen ware pedestal white or coloured glazed (Standard Pattern) (S.I.No. 11 P-3)	5	Nos. 2533.47	Each	12,667 (Rs: Twenty Five Hundred Thirty Three Rupees and Forty Seven Paise Only)
4	Providing & fixing 24" x 18" x 8" white glazed fire clay sinks complete with & I/c the cost of C.I or W.I brackets 6 inches built into walls, 1-1/2" rubber plug & chrome plated brass chain 1-1/2" c.p brass washer 1-1/2" dia , malleable iron or c.p brass trap with malleable iron of brass unions& making requisite number of holes in walls, plinth & floor for pipe connection & making good in cement concrete 1: 2: 4. (Foreign or Equivalent).(S.I.No. 18 P-5)	1	Each 4722.30	Each	4,722 (Rs: Forty Seven Hundred Twenty Two Rupees and Thirty Paise Only)
5	P/F 6"x2" of 6"x3" C.I. Floor trap of the approved self cleaning design with a C.I. Screwed down grating with or without a vent arm complete with and including making requisite number of holes in walls plinth and floor for pipe connection 1:2:4 (S.I.No. 23 P-6)	27	Each 2024.43	Each	54,660 (Rs: Two Thousand Twenty Four Rupees Rupees and Forty Three Paise Only)
6	Providing & fixing 24" x 18" bavelled edge mirror of belgium glass complete with 1/8" thick hard board and c.p screws fixed to wooden pleat. (b) superior Quality. (S.I.No.3-b P-7)	1	Each 2376.00	Each	2,376 (Rs: Twenty Three Hundred Seventy Six Rupees Only)

S.N	Name of Item.	Quantity	Rate	Unit	Amount.
7	Providing & fixing chrome plated brass towel rail complete with brackets fixing on wooden cleats with 1" long c.p brass screws. (b) 3/4" dia round or square (Superior quality).(S.I.No.10 P-10)	2	Each 1412.95	Each	2,826 (Rs: Fourteen Hundred Twelve Rupees and Ninety Five Paise Only)
8	P/F M.S clamp of the required design to 4" dia C.I pipe socket i/c cost of nuts and making good to wall or M.S Bolt & Nuts 4" into wall i/c pipe distance piece Extra painting to match the color of Buildings (S.I.No.2 P-9)	12	Each 72.16	Each	866 (Rs: Seventy Two Rupees and Sixteen Paise Only)
9	Providing G.I. Pipes, special, and clamps etc including fixing cutting and fitting complete with and including the cost of breaking through walls and roofs making good etc painting two coats after cleaning the pipe etc with white zink paint with pigment to match the colour of the buildings and testing with water to a pressure head of 200' & handling (ii)(S.I.No.1(i)P-12)				
	(a) 1/2" dia. Pipe.	100.0	P.Rft 73.21	P.Rft	7,321 (Rs: Seventy Three Rupees and Twenty One Paise Only)
	(b) 3/4" dia. Pipe.	50.0	P.Rft 95.79	P.Rft	4,790 (Rs: Ninety Five Rupees and Seventy Nine Paise Only)
	(c) 1-1/4" dia. Pipe.	40.0	P.Rft 153.19	P.Rft	6,128 (Rs: One Hundred Fifty Three Rupees and Nineteen Paise Only)
10	Add extra labour for concealed G.I pipe & fittings i/c making recess in the wall for pipe & making good in cement mortar etc complete. S.I.No.2 P-12				
	i. (a) 1/2" dia. Pipe.	100.0	P.Rft 7.82	P.Rft	782 (Rs: Seven Rupees and Eight Two Paise Only)
11	Providing & fixing full way gun metal valves with wheels, threaded or flanged ends with rubber washing.(ii) 3/4" dia (Standard Pattern)(S.I.No.4-a P-17)	6	Each 227.92	Each	1,368 (Rs: Two Hundred Twenty Seven Rupees and Ninety Two Paise Only)
12	S/Fixing concealed stop cock of superior quality with C.P.head 1/2" dia (SINO.11(a) P-18)	9	Each 843.92	Each	7,595 (Rs: Eight Hundred Forty Three Rupees and Ninety Two Paise Only)

S.N	Name of Item.	Quantity	Rate	Unit	Amount.	
13	P/F long bib cock of crystal head with c.p.head 1/2" dia.(S.I.No.15 (b) P-17)	18	Each	1384.24	Each	24,916
						(Rs: Thirteen Hundred Eighty Four Rupees and Twenty Four Paisa Only)
14	Supplying & Fixing jet shower with rod of superior quality single c.p head 1/2" dia (S.I.No.15 P-19)	4	Each	1142.24	Each	4,569
						(Rs: Eleven Hundred Forty Two Rupees and Twenty Four Paisa Only)
15	Providing, Laying uPVC pipes of Class 'D' fixing in trench i/c cutting, fitting and jointing with solvent cement i/c teting with water to a head of 122 meter or 400 ft.(S.I.NO.6-k P-24)					
	a) 6" dia	100	Rft	483.00	P.Rft	48,300
						(Rs: Four Hundred Eighty Three Rupees Only)
	a) 4" dia	80	Rft	226.00	P.Rft	18,080
						(Rs: Two Hundred Twenty Six Rupees Only)
16	Supplying and fixing Swan type pillar cock of Superior Quality with crystal head 1/2" dia (SINO.16(b)P-19)	12	Nos.	877.80	Each	10,534
						(Rs: Eight Hundred Seventy Seven Rupees and Eighty Paisa Only)
17	P/F in position nyloon connection complete with 1/2" dia brass stop cock gtwo brass nuts and lining jointed to lead pipe with plumber wiped solder joints (1/2" inche lead pipe to be of not less than 4 lbs per lineal year) (S.I.No. 23 P-6)	10	Each	447.15	Each	4,472
						(Rs: Four Hundred Forty Seven Rupees and Fifteen Paisa Only)
18	Providing RCC pipe with collars class "B" digging the trenches to required depth & fixing in position i/c cutting fitting and joint with maxph composition and cement mortor 1:1 and testing with water pressure to a head of 4' above the top of the highest pipe and refilling with excavation staff RCC pipe Class					
	a) 6" dia RCC pipe	195	Rft	199.25	P.Rft	38,854
						(Rs: One Hundred Ninety Nine Rupees and Twenty Five Paisa Only)

S.No	Name of Item.	Quantity	Rate	Unit	Amount.
19	Construction of Manhole or inspection chamber for the required diameter of circular sewer and 7-6"(1067mm depth) with walls of B B in cement sand mortar 1:3 cement plastered 1:3 1/2" thick inside of walls and 1 (25mm) thick over benching and channel i/c fixing C.I manhole cover with frame of clear opening 1-1/2" x 1-1/2" 457 x457) embedded in plan C.C 1:2:4 and fixing 1" (25mm) dia M.S step 6" (150mm) wide projection 4" (102 mm) from the face of wall at 12" (305mm)C/C duly painted etc Complete as per Stander specification and drawing. (S.I.No 1 P No 46Ph)	4	Each 14748.00	Each	58,992

(Rs: Fourteen Thousand Seven Hundred Forty Eight Rupees Only)

Total Rs: 376,834

General Abstract

Part "A" Civil Work	<i>18% Premium Except Item No# 14817</i>	<i>1328133</i>
Part - "B" E.I Work Schedule Item		<i>91,249</i>
Part - "B" Non - Schedule Item		<i>457748</i>
Part "C" W/s & S/F.		<i>376,834</i>

Total Rs: 2253964

Add/Deducted...*18%* above / ~~Below~~ on Schedule Item.
P "A" Civil work item 14817 P "B" Non - Schedule
 Add/Deducted.....% above / Below on Non-Schedule Item.

2119534
 + *457748*
347859

Grand Total Rs: = 2925141 =

TERMS & CONDITIONS.

- 1 No cartage on any item of work shall be paid.
- 2 No premium non schedule of item will be paid.
- 3 100% well graded bajri used in the RCC 1:2:4.
- 4 Arbitration clause stand from the agreement.

[Signature]
 (CONTRACTOR)
AL-ASR
 CIVIL ENGINEERING WORKS
 HYDERABAD.

[Signature]
MEDICAL SUPERINTENDENT
REGIONAL POLICE HOSPITAL
HYDERABAD

[Signature]
AL-ASR
 CIVIL ENGINEERING WORKS
 HYDERABAD.

[Signature]
Sr. Superintendent of Police
Hyderabad.

[Signature]
ASSISTANT ENGINEER
 Provincial Buildings (EL)
 Hyderabad.



OFFICE OF THE
SENIOR SUPERINTENDENT OF POLICE
HYDERABAD

Tel No. 022-9200539

BIDDING DOCUMENT

MAINTENANCE/REPAIR
OF
POLICE HOSPITAL POLICE LINE HYDERABAD

issued to

M/s Meerham Construction Company

M/R to Police Hospital Police Line Hyderabad.

Schedule-B

S.N	Name of Item.	Quantity	Rate	Unit	Amount.
Part "A" Civil Work					
1	Removing door with chowkat (S.I.No.33-a P-13)	7	Cft	142.18	% Cft 995
					(Rs: One Hundred Forty Two Rupees and Eighteen Paise Only)
2	Removing window and sky light with chowkat (S.I.No.33-b P-13)	6	Cft	102.85	% Cft 617
					(Rs: One Hundred Two Rupees and Eighty Five Paise Only)
3	Dismantling brick work in lime or cement mortar (SINO. 13 P-11)	106	Cft	1285.63	% Cft 1,363
					(Rs: Twelve Hundred Eighty Five Rupees and Sixty Three Paise Only)
4	Dismantling cement concret plain 1:4:8 (S.I.No.19-c P-11)	574	Cft	1663.75	% Cft 9,550
					(Rs: Sixteen Hundred Sixty Three Rupees and Seventy Five Paise Only)
5	Removing of cement or lime plaster (SINO.53 P-13)	2550	Sft	121.00	% Sft 3,086
					(Rs: One Hundred Twenty One Rupees Only)
6	Scraping ordinary distemper oil boud distemper or paint on walls (S.I.No.54-b P-14).	3756	Sft	226.88	% Sft 8,522
					(Rs: Two Hundred Twenty Six Rupees and Eighty Eight Paise Only)
7	P/F G.I. Frame / Chowkats of size 7"x2" or 4-1/2"x3" for Door using 20 gague G.I.sheet including welded hinges and fixing at site with necessary holds fasts filling with cement sand slurry or ratio 1:6 and repairing the jambs the cost also including all carriage tolls and plants used in making and fixing. (S.I.No. 29 P-93)	69	Rft	228.90	P.Rft 23,806
					(Rs: Two Hundred Twenty Eight Rupees and Ninety Paise Only)
8	P/F G.I. Frame / Chowkats of size 7"x2" or 4-1/2"x3" for window using 20 gague G.I.sheet including welded hinges and fixing at site with necessary holds fasts filling with cement sand slurry or ratio 1:6 and repairing the jambs the cost also including all carriage tolls and plants used in making and fixing. (S.I.No. 28 P-93)	167	Rft	240.50	P.Rft 40,164
					(Rs: Two Hudnred Forty Rupees and Fifty Paise Only)
9	First Class deodar wood wrough joinery in Doors & Windows etc fixed in position including chowkats hold fasts hinges aldrops iron tower bolts chocks cleats handles & cords with hooks etc. Deodar panelled or panelled and glazed or fully glazed 1-3/4" thick. (S.I.No. 7(b)P-57) (Without Chowkats).	253	Sft	902.93	P.Sft 228,441
					(Rs: Nine Hundred Two Rupees and Ninety Three Paise Only)

S.N	Name of Item.	Quantity	Rate	Unit	Amount.
10	Cement plaster 1:6 upto 20' height (b) 1/2" thick. (S.I.No. 13(b) P-51)	2550	Sft 2206.60	% Sft	56,268 (Rs: Twenty Two Hundred Six Rupees and Sixty Paiza Only)
11	Cement plaster 1:4 upto 20' height (a) 3/8" thick. (S.I.No. 11(a) P-51)	2550	Sft 2197.52	% Sft	56,037 (Rs: Twenty One Hundred Ninety Seven Rupees and Fifty Two Paiza Only)
12	Supplying & fixing inposition Aluminium channels framing for hinged doors or Alcop made with 5 mm thick tinted glass glazing (Belgium) and Alpha (Japan) locks I/c handles, stoppers etc. (b) Deluxe model (Bronze). (S.I.No.83-b P-107).	21	Sft 1507.66	P.Sft	31,661 (Rs: Fifteen Hundred Seven Rupees and Sixty Six Paiza Only)
13	Supplying & fixing in position Aluminium channels framing for slidding windows & ventilators of Alcop made with 5 mm thick tinted glass glazing (Belgium) & Aluminium fly screen I/c handles stoppers & locking arrangement etc. complete. (b) Deluxe model (Bronze). (S.I.No.83-b P-107).	64	Sft 1647.69	P.Sft	105,452 (Rs: Sixteen Hundred Forty Seven Rupees and Sixty Nine Paiza Only)
14	Providing & Fixing Printed Glazed Porcelaine Tile 24" X 24" finished in white cement of laid over a bed of 1/2" thick gray cement sand mortar ratio 1:3 using / filling of joints with white cement etc: complete in all respect.(R.A.A)	1042	Sft 330	P.Sft	343860
15	Providing and laying tiles glazed 6" x 6" x 1/4" on floor or wall facing in required colour and apttern of STILE specification jointed in white cement and pigment over a base of 1:2 grey cement mortar 3/4" thick including washing and filling of joints with slaurry of white cement and pigment in desired shape with finishing, clearing and cost of wax polish etc. complete including cutting tiles to proper profile. (S.I.No.60 P-53).	1670	Sft 30509.77	P.Sft	509,513 (Rs: Thirty Thousand Five Hundred Nine Rupees and Seventy Seven Paiza Only)
16	S/F false ceiling of plaster of paris, in pannels i/c making frame, work of deodar wood i/c painting with soligia paint. (S.I.No.52 P-64).	636	Sft 25293.42	%Sft	160,866 (Rs: Twenty Five Thousand Two Hundred Ninety Three Rupees and Forty Two Paiza Only)
17	P/F Wall Paper i/c Cost of Solution.	540	Cft 195	P.Sft	105300
18	Preparing the surface & painting with matt finish I/c rubbing the surface with Bathy (Silicon carbide rubbing brick) filling the voids with Zink / chalk/plaster of paris mixture, applying first coat	1714	Sft 3444.38	%Sft	59,037 (Rs: Thirty Four Hundred Forty Four Rupees and Thirty Eight paiza Only)

S.N	Name of Item.	Quantity	Rate	Unit	Amount.
	premix making the surface smooth and then painting 3 coats with matt finish of approved make etc: complete (new surface)(S.I.No.36 P-55)				
19	Distempering (c) Three coats (SINO.24 (c) P-53)	2042	Sft 1079.65	% Sft	22,046
					(Rs: One Thousand Seventy Nine Rupees and Sixty Five Paisa Only)
20	Painting New surface and painting of door and windows any type 3 coats coat (SINO.5(c) P-77)	506	Sft 2116.41	% Sft	10,709
					(Rs: Twenty One Hundred Sixteen Rupees and Forty One Paisa Only)

Total Rs: 1777293

Part - "B" E.I Work Schedule Item

1	Wiring for light or fan point with 3/.029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required. (SI No. 124 P-15)	25	Nos 1,130.00	Each	28,250
					(Rs: Eleven Hundred Thirty Rupees Only)
2	Wiring for Call bell point with 3/.029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required (S.I. No. 128/P-15)	2	Nos 1,764.00	Each	3,528
					(Rs: Seventeen Hundred Sixty Four Rupees Only)
3	Wiring for plug point with 3/.029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required. (SI No. 126 P-15)	10	Nos 985.00	Each	9,850
					(Rs: Nine Hundred Eighty Five Rupees Only)
4	Providing & laying (MAIN or SUB MAIN)PVC insulated with size 2-7/.044 (6mm ²) copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No.12 P-2)	40	MTR 341.00	P.MTI	13,640
					(Rs: Three Hundred Forty One Rupees Only)
5	Providing & laying (MAIN or SUB MAIN) PVC insulated with size 2-7/.029 copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required (S.I.No.10 P-2)	40	MTR 222.00	P.MTI	8,880
					(Rs: Two Hundred Twenty Two Rupees Only)
6	Providing & fixing DP i/c Change Over Switch 500 Volts 100amp on a prepared board (S.I.No.197 P-30)	2	Nos 7,612.00	Each	15,224
					(Rs: Seven Thousand Six Hundred Twelve Rupees Only)
7	P/F Circuit breaker 15, 20, 30, 40, 50, 60, 75 & 100amp TP (XS-100NS) on a prepared board as required. (Si-204; P-31)	4	Nos 2,456.00	Each	9,824
					(Rs: Twenty Four Hundred Fifty Six Rupees Only)
8	Providing & fixing voltmeter size 96/96mm 500volt as required & as per instruction of EI (S.I.No.285 P-41)	1	Nos 999.00	Each	999
					(Rs: Nine Hundred Ninety Nine Rupees Only)

S.N	Name of Item.	Quantity	Rate	Unit	Amount.
9	Providing & fixing ammeters size 96/96mm Direct 15A, 30A, 50A, 60A & 100A as required & as per instruction of EI (S.I.No.284 P-41)	1	Nos 1054.00	Each	1,054
(Rs: One Thousand Fifty Four Rupees Only)					

Total Rs: 91,249

Part - "B" Non - Schedule Item

1	S/F LED light 18 to 20 watt fully covered i/c cutting in false ceiling and finishing the same, fixing of light i/c necessary connection etc complete (Phillips as required)	60	Nos 1826	Each	109560
2	S/F Ceiling fan 56" sweep complete with conopy, block etc superior quality.	10	Nos 9400	Each	94000
3	S/F Wall Breaket Fan 18" sweep complete with all accessories.	12	Nos 7400	Each	88800
4	S/F Mix metallic switch 2 pin socket bell pati etc as required.	60	Nos 880	Each	52800
5	S/F Multi Purpose base heavy duty power plug 3 in socket with base as required.	5	Sft 940	P.Sft	4700
6	P/F Energy Saver bulb superior quality for fancy room light.	18	Nos 340	Each	6120
7	S/F Mix Matlic sheet 2-8 hole.	20	Nos 1220	Each	24400
8	S/F Fancy type Mix metallic sheet farme 2,4,6,8 hole with pure board as required cutting & refilling.	9	Nos 1700	Each	15300
9	S/F Panel board double shutter.	2	Sft 11000	P.Sft	22000
10	S/F Fancy Fan dimmer.	12	Nos 140	Each	1680

Total Rs: 4119360



S.N	Name of Item.	Quantity	Rate	Unit	Amount.
Part "C" W/s & S/F.					
1	P/F Orisa type white or colour glazed earthen ware W.C. pan with cost, of low level plastic flush tank of 3' gallons capacity of approved quality I/c making req: No.of holes in walls, plinth & floor and making good in c.c. 1:2:4 (a) W.C. pan orisa type 23" with plastic tank of low down 3 gallons trap & C.I. thumble (Superior quality) (i) with 4" dia C.I. trap(S.I.No. 3(a) (ii)P-2)	5	Each	6166.60	Each 30,833
(Rs: Six Thousand Sixty Six Rupees and Sixty Paise Only)					
2	P/F 24"x18" lav: basin in white glazed earthen ware complete with & including the cost of W.I. Or C.I. Contilever brackets 6 inches built into walls painted white in two coats after a primary coat of red lead paint a pair of 1/2" dia chrome plated pillar taps, 1-1/2" dia rubber plug and chrome plated brass chain 1-1/4" dia malleable iron or c.p.brass traps malleable iron or brass union and making requisite No. of holes in walls, plinth and floor for pipe connection and making good in c.c. 1:2:4 (foreign or equivalent) (SINO. 13 P-4).	5	Nos.	6237.00	Each 31,185
(Rs: Six Thousand Two Hundred Thirty Seven Rupees Only)					
3	Add extra labour for providing and fixing of earthen ware padestal white or coloured glazed (Standard Pattern) (S.I.No. 11 P-3)	5	Nos.	2533.47	Each 12,667
(Rs: Twenty Five Hundred Thirty Three Rupees and Forty Seven Paise Only)					
4	Providing & fixing 24" x 18" x8" white glazed fire clay sinks complete with & I/c the cost of C.I or W.I brackets 6 inches built into walls, 1-1/2" rubber plug & chrome plated brass chain 1-1/2" c.p brass washer 1-1/2" dia , malleable iron or c.p brass trap with malleable iron of brass unions& making requisite number of holes in walls, plinth & floor for pipe connection & making good in cement concrete 1: 2: 4. (Foreign or Equivalent).(S.I.No. 18 P-5)	1	Each	4722.30	Each 4,722
(Rs: Forty Seven Hundred Twenty Two Rupees and Thirty Paise Only)					
5	P/F 6"x2" of 6"x3" C.I. Floor trap of the approved self cleaning design with a C.I. Screwed down grating with or without a vent arm complete with and including making requisite number of holes in walls plinth and floor for pipe connection 1:2:4 (S.I.No. 23 P-6)	27	Each	2024.43	Each 54,660
(Rs: Two Thousand Twenty Four Rupees Rupees and Forty Three Paise Only)					
6	Providing & fixing 24" x 18" bavelled edge mirror of belgium glass complete with 1/8" thick hard board and c.p screws fixed to wooden pleat. (b) superior Quality. (S.I.No.3-b P-7)	1	Each	2376.00	Each 2,376
(Rs: Twenty Three Hundred Seventy Six Rupees Only)					

S.N.	Name of Item.	Quantity	Rate	Unit	Amount.
7	Providing & fixing chrome plated brass towel rail complete with brackets fixing on wooden cleats with 1" long c.p brass screws. (b) 3/4" dia round or square (Superior quality).(S.I.No.10 P-10)	2	Each 1412.95	Each	2,826
					(Rs: Fourteen Hundred Twelve Rupees and Ninety Five Paiza Only)
8	P/F M.S clamp of the required design to 4" dia C.I pipe socket i/c cost of nuts and making good to wall or M.S Bolt & Nuts 4" into wall i/c pipe distance piece Extra painting to match the color of Buildings (S.I.No.2 P-9)	12	Each 72.16	Each	866
					(Rs: Seventy Two Rupees and Sixteen Paiza Only)
9	Providing G.I. Pipes, special, and clamps etc including fixing cutting and fitting complete with and including the cost of breaking through walls and roofs making food etc painting two coats after cleaning the pipe etc with white zink paint with pigment to match the colour of the buildings and testing with water to a pressure head of 200' & handling (ii)(S.I.No.1(i)P-12)				
	(a) 1/2" dia. Pipe.	100.0	P.Rft 73.21	P.Rft	7,321
					(Rs: Seventy Three Rupees and Twenty One Paiza Only)
	(b) 3/4" dia. Pipe.	50.0	P.Rft 95.79	P.Rft	4,790
					(Rs: Ninety Five Rupees and Seventy Nine Paiza Only)
	(c) 1-1/4" dia. Pipe.	40.0	P.Rft 153.19	P.Rft	6,128
					(Rs: One Hundred Fifty Three Rupees and Nineteen Paiza Only)
10	Add extra labour for concealed G.I pipe & fittings i/c making recess in the wall for pipe & making good in cement mortar etc complete. S.I.No.2 P-12				
	i (a) 1/2" dia. Pipe.	100.0	P.Rft 7.82	P.Rft	782
					(Rs: Seven Rupees and Eight Two Paiza Only)
11	Providing & fixing full way gun metal valves with wheels, threaded or flabged ends with rubber washing.(ii) 3/4" dia (Standard Pattern)(S.I.No.4-a P-17)	6	Each 227.92	Each	1,368
					(Rs: Two Hundred Twenty Seven Rupees and Ninety Two Paiza Only)
12	S/Fixing concealed stop cock of superior quality with C.P.head 1/2" dia (SINO.11(a) P-18)	9	Each 843.92	Each	7,595
					(Rs: Eight Hundred Forty Three Rupees and Ninety Two Paiza Only)

S.N	Name of Item	Quantity	Rate	Unit	Amount	
13	P/F long bib cock of crystal head with c.p.head 1/2" dia.(S.I.No.15 (b) P-17)	18	Each	1384.24	Each	24,916
						(Rs: Thirteen Hundred Eighty Four Rupees and Twenty Four Paisa Only)
14	Supplying & Fixing jet shower with rod of superior quality single c.p head 1/2" dia (S.I.No.15 P-19)	4	Each	1142.24	Each	4,569
						(Rs: Eleven Hundred Forty Two Rupees and Twenty Four Paisa Only)
15	Providing, Laying uPVC pipes of Class 'D' fixing in trench i/c cutting, fitting and jointing with solvent cement i/c tsting with water to a head of 122 meter or 400 ft.(S.I.NO.6-k P-24)					
	a) 6" dia	100	Rft	483.00	P.Rft	48,300
						(Rs: Four Hundred Eighty Three Rupees Only)
	a) 4" dia	80	Rft	226.00	P.Rft	18,080
						(Rs: Two Hundred Twenty Six Rupees Only)
16	Supplying and fixing Swan type pillar cock of Superior Quality with crystal head 1/2" dia (SINO.16(b)P-19)	12	Nos.	877.80	Each	10,534
						(Rs: Eight Hundred Seventy Seven Rupees and Eighty Paisa Only)
17	P/F in position nyloon connection complete with 1/2" dia brass stop cock gtwo brass nuts and lining jointed to lead pipe with plumber wiped solder joints (1/2" inche lead pipe to be of not less than 4 lbs per lineal year) (S.I.No. 23 P-6)	10	Each	447.15	Each	4,472
						(Rs: Four Hundred Forty Seven Rupees and Fifteen Paisa Only)
18	Providing RCC pipe with collars class "B" digging the trenches to required depth & fixing in position i/c cutting fitting and joint with maxph composition and cement mortor 1:1 and testing with water pressure to a head of 4' above the top of the highest pipe and refilling with excavation staff RCC pipe Class					
	a) 6" dia RCC pipe	195	Rft	199.25	P.Rft	38,854
						(Rs: One Hundred Ninety Nine Rupees and Twenty Five Paisa Only)

S.N.	Name of Item.	Quantity	Rate	Unit	Amount.
19	Construction of Manhole or inspection chamber for the required diameter of circular sewer and 7-6"(1067mm depth) with walls of B B in cement sand mortar 1:3 cement plastered 1:3 1/2" thick inside of walls and 1 (25mm) thick over benching and channel i/c fixing C.I manhole cover with frame of clear opening 1-1/2" x 1-1/2" 457 x457) embedded in plan C.C 1:2:4 and fixing 1" (25mm) dia M.S step 6" (150mm) wide projection 4" (102 mm) from the face of wall at 12" (305mm)C/C duly painted etc Complete as per Stander specification and drawing. (S.I.No 1 P No 46Ph)	4	Each 14748.00	Each	58,992

(Rs: Fourteen Thousand Seven Hundred Forty Eight Rupees Only)

Total Rs: 376,834

General Abstract

Part "A" Civil Work *24.98/premium on Schedule item = 1328133*
 Part "A" Non Schedule item No 14 & 17 = *449160*
 Part - "B" E.I Work Schedule Item **91,249**
 Part - "B" Non - Schedule Item *419360*
 Part "C" W/s & S/F. **376,834**

Total Rs: = 2664736/-

✓ *24.98* ✓
 Add/Deducted.....% above / Below on Schedule Item.

2244910.7

Add/Deducted.....% above / Below on Non-Schedule Item.

868520.00

Grand Total Rs: 3113430.7

TERMS & CONDITIONS.

- 1 No cartage on any item of work shall be paid.
- 2 No premium non schedule of item will be paid.
- 3 100% well graded bajri used in the RCC 1:2:4.
- 4 Arbitration clause stand from the agreement.

(CONTRACTOR)



MEDICAL SUPERINTENDENT
 REGIONAL HOSPITAL
 HYDERABAD

ASSISTANT ENGINEER
 Provincial Buildings (EL)
 Hyderabad.

Sr. Superintendent of Police
 Hyderabad.



OFFICE OF THE
SENIOR SUPERINTENDENT OF POLICE
HYDERABAD

Tel No. 022-9200539

BIDDING DOCUMENT

MAINTENANCE/REPAIR
OF
POLICE HOSPITAL POLICE LINE HYDERABAD

issued to

M/s Sajjad Sarwar & Brothers

M/R to Police Hospital Police Line Hyderabad.

Schedule-B

S.N	Name of Item.	Quantity	Rate	Unit	Amount.
Part "A" Civil Work					
1	Removing door with chowkat (S.I.No.33-a P-13)	7	Cft	142.18	% Cft 995
(Rs: One Hundred Forty Two Rupees and Eighteen Paise Only)					
2	Removing window and sky light with chowkat (S.I.No.33-b P-13)	6	Cft	102.85	% Cft 617
(Rs: One Hundred Two Rupees and Eighty Five Paise Only)					
3	Dismantling brick work in lime or cement mortar (SINO. 13 P-11)	106	Cft	1285.63	% Cft 1,363
(Rs: Twelve Hundred Eighty Five Rupees and Sixty Three Paise Only)					
4	Dismantling cement concret plain 1:4:8 (S.I.No.19-c P-11)	574	Cft	1663.75	% Cft 9,550
(Rs: Sixteen Hundred Sixty Three Rupees and Seventy Five Paise Only)					
5	Removing of cement or lime plaster (SINO.53 P-13)	2550	Sft	121.00	% Sft 3,086
(Rs: One Hundred Twenty One Rupees Only)					
6	Scraping ordinary distemper oil boud distemper or paint on walls (S.I.No.54-b P-14).	3756	Sft	226.88	% Sft 8,522
(Rs: Two Hundred Twenty Six Rupees and Eighty Eight Paise Only)					
7	P/F G.I. Frame / Chowkats of size 7"x2" or 4-1/2"x3" for Door using 20 gague G.I.sheet including welded hinges and fixing at site with necessary holds fasts filling with cement sand slurry or ratio 1:6 and repairing the jambs the cost also including all carriage tolls and plants used in making and fixing . (S.I.No. 29 P-93)	69	Rft	228.90	P.Rft 23,806
(Rs: Two Hundred Twenty Eight Rupees and Ninety Paise Only)					
8	P/F G.I. Frame / Chowkats of size 7"x2" or 4-1/2"x3" for window using 20 gague G.I.sheet including welded hinges and fixing at site with necessary holds fasts filling with cement sand slurry or ratio 1:6 and repairing the jambs the cost also including all carriage tolls and plants used in making and fixing . (S.I.No. 28 P-93)	167	Rft	240.50	P.Rft 40,164
(Rs: Two Hudnred Forty Rupees and Fifty Paise Only)					
9	First Class deodar wood wrough joinery in Doors & Windows etc fixed in position including chowkats hold fasts hinges aldrops iron tower bolts chocks cleats handles & cords with hooks etc. Deodar panelled or panelled and glazed or fully glazed 1-3/4" thick. (S.I.No. 7(b)P-57) (Without Chowkats).	253	Sft	902.93	P.Sft 228,441
(Rs: Nine Hundred Two Rupees and Ninety Three Paise Only)					

S.N.	Name of Item.	Quantity	Rate	Unit	Amount.
10	Cement plaster 1:6 upto 20' height (b) 1/2" thick. (S.I.No. 13(b) P-51)	2550	Sft 2206.60	% Sft	56,268 (Rs: Twenty Two Hundred Six Rupees and Sixty Paise Only)
11	Cement plaster 1:4 upto 20' height (a) 3/8" thick. (S.I.No. 11(a) P-51)	2550	Sft 2197.52	% Sft	56,037 (Rs: Twenty One Hundred Ninety Seven Rupees and Fifty Two Paise Only)
12	Supplying & fixing in position Aluminium channels framing for hinged doors or Alcop made with 5 mm thick tinted glass glazing (Belgium) and Alpha (Japan) locks I/c handles, stoppers etc. (b) Deluxe model (Bronze). (S.I.No.83-b P-107).	21	Sft 1507.66	P.Sft	31,661 (Rs: Fifteen Hundred Seven Rupees and Sixty Six Paise Only)
13	Supplying & fixing in position Aluminium channels framing for sliding windows & ventilators of Alcop made with 5 mm thick tinted glass glazing (Belgium) & Aluminium fly screen I/c handles stoppers & locking arrangement etc. complete. (b) Deluxe model (Bronze). (S.I.No.83-b P-107).	64	Sft 1647.69	P.Sft	105,452 (Rs: Sixteen Hundred Forty Seven Rupees and Sixty Nine Paise Only)
14	Providing & Fixing Printed Glazed Porcelaine Tile 24" X 24" finished in white cement of laid over a bed of 1/2" thick gray cement sand mortar ratio 1:3 using / filling of joints with white cement etc: complete in all respect.(R.A.A)	1042	Sft 310	P.Sft	323020
15	Providing and laying tiles glazed 6" x 6" x 1/4" on floor or wall facing in required colour and aptern of STILE specification jointed in white cement and pigment over a base of 1:2 grey cement mortar 3/4" thick including washing and filling of joints with slaurry of white cement and pigment in desired shape with finishing, clearing and cost of wax polish etc. complete including cutting tiles to proper profile. (S.I.No.60 P-53).	1670	Sft 30509.77	P.Sft	509,513 (Rs: Thirty Thousand Five Hundred Nine Rupees and Seventy Seven Paise Only)
16	S/F false ceiling of plaster of paris, in pannels i/c making frame, work of deodar wood i/c painting with soligia paint. (S.I.No.52 P-64).	636	Sft 25293.42	%Sft	160,866 (Rs: Twenty Five Thousand Two Hundred Ninety Three Rupees and Forty Two Paise Only)
17	P/F Wall Paper i/c Cost of Solution.	540	Cft 275	P.Sft	148500
18	Preparing the surface & painting with matt finish I/c rubbing the surface with Bathy (Silicon carbide rubbing brick) filling the voids with Zink / chalk/plaster of paris mixture, applying first coat	1714	Sft 3444.38	%Sft	59,037 (Rs: Thirty Four Hundred Forty Four Rupees and Thirty Eight paise Only)

S.N	Name of Item.	Quantity	Rate	Unit	Amount.
	premix making the surface smooth and then painting 3 coats with matt finish of approved make etc: complete (new surface)(S.I.No.36 P-55)				
19	Distempering (c) Three coats (SINO.24 (c) P-53)	2042	Sft 1079.65	% Sft	22,046
					(Rs: One Thousand Seventy Nine Rupees and Sixty Five Paise Only)
20	Painting New surface and painting of door and windows any type 3 coats coat (SINO.5(c) P-77)	506	Sft 2116.41	% Sft	10,709
					(Rs: Twenty One Hundred Sixteen Rupees and Forty One Paise Only)

Total **Rs: 1799653=**

Part - "B" E.I Work Schedule Item

1	Wiring for light or fan point with 3/.029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required. (SI No. 124 P-15)	25	Nos 1,130.00	Each	28,250
					(Rs: Eleven Hundred Thirty Rupees Only)
2	Wiring for Call bell point with 3/.029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required (S.I. No. 128/P-15)	2	Nos 1,764.00	Each	3,528
					(Rs: Seventeen Hundred Sixty Four Rupees Only)
3	Wiring for plug point with 3/.029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required. (SI No. 126 P-15)	10	Nos 985.00	Each	9,850
					(Rs: Nine Hundred Eighty Five Rupees Only)
4	Providing & laying (MAIN or SUB MAIN)PVC insulated with size 2-7/.044 (6mm ²) copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No.12 P-2)	40	MTR 341.00	P.MTI	13,640
					(Rs: Three Hundred Forty One Rupees Only)
5	Providing & laying (MAIN or SUB MAIN) PVC insulated with size 2-7/.029 copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required (S.I.No.10 P-2)	40	MTR 222.00	P.MTI	8,880
					(Rs: Two Hundred Twenty Two Rupees Only)
6	Providing & fixing DP i/c Change Over Switch 500 Volts 100amp on a prepared board (S.I.No.197 P-30)	2	Nos 7,612.00	Each	15,224
					(Rs: Seven Thousand Six Hundred Twelve Rupees Only)
7	P/F Circuit breaker 15, 20, 30, 40, 50, 60, 75 & 100amp TP (XS-100NS) on a prepared board as required. (Si-204; P-31)	4	Nos 2,456.00	Each	9,824
					(Rs: Twenty Four Hundred Fifty Six Rupees Only)
8	Providing & fixing voltmeter size 96/96mm 500volt as required & as per instruction of EI (S.I.No.285 P-41)	1	Nos 999.00	Each	999
					(Rs: Nine Hundred Ninety Nine Rupees Only)

S.N.	Name of Item.	Quantity	Rate	Unit	Amount.
9	Providing & fixing ammeters size 96/96mm Direct 15A, 30A, 50A, 60A & 100A as required & as per instruction of EI (S.I.No.284 P-41)	1	Nos 1054.00	Each	1,054

(Rs: One Thousand Fifty Four Rupees Only)

Total Rs: 91,249

Part - "B" Non - Schedule Item

1	S/F LED light 18 to 20 watt fully covered i/c cutting in false ceiling and finishing the same, fixing of light i/c necessary connection etc complete (Philips as required)	60	Nos 2212	Each	132720
2	S/F Ceiling fan 56" sweep complete with conopy, block etc superior quality.	10	Nos 900	Each	9000
3	S/F Wall Breaket Fan 18" sweep complete with all accessories.	12	Nos 7600	Each	91200
4	S/F Mix metallic switch 2 pin socket bell pati etc as required.	60	Nos 1100	Each	66000
5	S/F Multi Purpose base heavy duty power plug 3 in socket with base as required.	5	Sft 800	P.Sft	4000
6	P/F Energy Saver bulb superior quality for fancy room light.	18	Nos 290	Each	5220
7	S/F Mix Matlic sheet 2-8 hole.	20	Nos 1480	Each	29600
8	S/F Fancy type Mix metallic sheet farne 2,4,6,8 hole with pure board as required cutting & refilling.	9	Nos 1690	Each	15210
9	S/F Panel board double shutter.	2	Sft 18200	P.Sft	36400
10	S/F Fancy Fan dimmer.	12	Nos 185	Each	2220

Total Rs: (391570)

S.N	Name of Item.	Quantity	Rate	Unit	Amount.
Part "C" W/s & S/F.					
1	P/F Orisa type white or colour glazed earthen ware W.C. pan with cost, of low level plastic flush tank of 3' gallons capacity of approved quality I/c making req: No.of holes in walls, plinth & floor and making good in c.c. 1:2:4 (a) W.C. pan orisa type 23" with plastic tank of low down 3 gallons trap & C.I. thumble (Superior quality) (i) with 4" dia C.I. trap(S.I.No. 3(a) (ii)P-2)	5	Each	6166.60	Each 30,833 (Rs: Six Thousand Sixty Six Rupees and Sixty Paise Only)
2	P/F 24"x18" lav: basin in white glazed earthen ware complete with & including the cost of W.I. Or C.I. Contilever brackets 6 inches built into walls painted white in two coats after a primary coat of red lead paint a pair of 1/2" dia chrome plated pillar taps, 1-1/2" dia rubber plug and chrome plated brass chain 1-1/4" dia malleable iron or c.p.brass traps malleable iron or brass union and making requisite No. of holes in walls, plinth and floor for pipe connection and making good in c.c. 1:2:4 (foreign or equivalent) (SINO. 13 P-4).	5	Nos.	6237.00	Each 31,185 (Rs: Six Thousand Two Hundred Thirty Seven Rupees Only)
3	Add extra labour for providing and fixing of earthen ware padestal white or coloured glazed (Standard Pattern) (S.I.No. 11 P-3)	5	Nos.	2533.47	Each 12,667 (Rs: Twenty Five Hundred Thirty Three Rupees and Forty Seven Paise Only)
4	Providing & fixing 24" x 18" x8" white glazed fire clay sinks complete with & I/c the cost of C.I or W.I brackets 6 inches built into walls, 1-1/2" rubber plug & chrome plated brass chain 1-1/2" c.p brass washer 1-1/2" dia , malleable iron or c.p brass trap with malleable iron of brass unions& making requisite number of holes in walls, plinth & floor for pipe connection & making good in cement concrete 1: 2: 4. (Foreign or Equivalent).(S.I.No. 18 P-5)	1	Each	4722.30	Each 4,722 (Rs: Forty Seven Hundred Twenty Two Rupees and Thirty Paise Only)
5	P/F 6"x2" of 6"x3" C.I. Floor trap of the approved self cleaning design with a C.I. Screwed down grating with or without a vent arm complete with and including making requisite number of holes in walls plinth and floor for pipe connection 1:2:4 (S.I.No. 23 P-6)	27	Each	2024.43	Each 54,660 (Rs: Two Thousand Twenty Four Rupees Rupees and Forty Three Paise Only)
6	Providing & fixing 24" x 18" bavelled edge mirror of belgium glass complete with 1/8" thick hard board and c.p screws fixed to wooden pleat. (b) superior Quality. (S.I.No.3-b P-7)	1	Each	2376.00	Each 2,376 (Rs: Twenty Three Hundred Seventy Six Rupees Only)

S.N	Name of Item.	Quantity	Rate	Unit	Amount.
7	Providing & fixing chrome plated brass towel rail complete with brackets fixing on wooden cleats with 1" long c.p brass screws. (b) 3/4" dia round or square (Superior quality).(S.I.No.10 P-10)	2	Each	1412.95	Each 2,826
					(Rs: Fourteen Hundred Twelve Rupees and Ninety Five Paise Only)
8	P/F M.S clamp of the required design to 4" dia C.I pipe socket i/c cost of nuts and making good to wall or M.S Bolt & Nuts 4" into wall i/c pipe distance piece Extra painting to match the color of Buildings (S.I.No.2 P-9)	12	Each	72.16	Each 866
					(Rs: Seventy Two Rupees and Sixteen Paise Only)
9	Providing G.I. Pipes, special, and clamps etc including fixing cutting and fitting complete with and including the cost of breaking through walls and roofs making food etc painting two coats after cleaning the pipe etc with white zink paint with pigment to match the colour of the buildings and testing with water to a pressure head of 200' & handling (ii)(S.I.No.1(i)P-12)				
	(a) 1/2" dia. Pipe.	100.0	P.Rft	73.21	P.Rft 7,321
					(Rs: Seventy Three Rupees and Twenty One Paise Only)
	(b) 3/4" dia. Pipe.	50.0	P.Rft	95.79	P.Rft 4,790
					(Rs: Ninety Five Rupees and Seventy Nine Paise Only)
	(c) 1-1/4" dia. Pipe.	40.0	P.Rft	153.19	P.Rft 6,128
					(Rs: One Hundred Fifty Three Rupees and Nineteen Paise Only)
10	Add extra labour for concealed G.I pipe & fittings i/c making recess in the wall for pipe & making good in cement mortar etc complete. S.I.No.2 P-12				
	i (a) 1/2" dia. Pipe.	100.0	P.Rft	7.82	P.Rft 782
					(Rs: Seven Rupees and Eight Two Paise Only)
11	Providing & fixing full way gun metal valves with wheels, threaded or flanged ends with rubber washing.(ii) 3/4" dia (Standard Pattern)(S.I.No.4-a P-17)	6	Each	227.92	Each 1,368
					(Rs: Two Hundred Twenty Seven Rupees and Ninety Two Paise Only)
12	S/Fixing concealed stop cock of superior quality with C.P.head 1/2" dia (SINO.11(a) P-18)	9	Each	843.92	Each 7,595
					(Rs: Eight Hundred Forty Three Rupees and Ninety Two Paise Only)

S.N.	Name of Item.	Quantity	Rate	Unit	Amount.
13	P/F long bib cock of crystal head with c.p.head 1/2" dia.(S.I.No.15 (b) P-17)	18	Each	1384.24	Each 24,916
					(Rs: Thirteen Hundred Eighty Four Rupees and Twenty Four Paisa Only)
14	Supplying & Fixing jet shower with rod of superior quality single c.p head 1/2" dia (S.I.No.15 P-19)	4	Each	1142.24	Each 4,569
					(Rs: Eleven Hundred Forty Two Rupees and Twenty Four Paisa Only)
15	Providing, Laying uPVC pipes of Class 'D' fixing in trench i/c cutting, fitting and jointing with solvent cement i/c teting with water to a head of 122 meter or 400 ft.(S.I.NO.6-k P-24)				
	a) 6" dia	100	Rft	483.00	P.Rft 48,300
					(Rs: Four Hundred Eighty Three Rupees Only)
	a) 4" dia	80	Rft	226.00	P.Rft 18,080
					(Rs: Two Hundred Twenty Six Rupees Only)
16	Supplying and fixing Swan type pillar cock of Superior Quality with crystal head 1/2" dia (SINO.16(b)P-19)	12	Nos.	877.80	Each 10,534
					(Rs: Eight Hundred Seventy Seven Rupees and Eighty Paisa Only)
17	P/F in position nyloon connection complete with 1/2" dia brass stop cock gtwo brass nuts and lining jointed to lead pipe with plumber wiped solder joints (1/2" inche lead pipe to be of not less than 4 lbs per lineal year) (S.I.No. 23 P-6)	10	Each	447.15	Each 4,472
					(Rs: Four Hundred Forty Seven Rupees and Fifteen Paisa Only)
18	Providing RCC pipe with collars class "B" digging the trenches to required depth & fixing in position i/c cutting fitting and joint with maxph composition and cement mortar 1:1 and testing with water pressure to a head of 4' above the top of the highest pipe and refilling with excavation staff RCC pipe Class				
	a) 6" dia RCC pipe	195	Rft	199.25	P.Rft 38,854
					(Rs: One Hundred Ninety Nine Rupees and Twenty Five Paisa Only)

S.N	Name of Item.	Quantity	Rate	Unit	Amount.
19	Construction of Manhole or inspection chamber for the required diameter of circular sewer and 7-6"(1067mm depth) with walls of B B in cement sand mortar 1:3 cement plastered 1:3 1/2" thick inside of walls and 1 (25mm) thick over benching and channel i/c fixing C.I manhole cover with frame of clear opening 1-1/2" x 1-1/2" 457 x457) embedded in plan C.C 1:2:4 and fixing 1" (25mm) dia M.S step 6" (150mm) wide projection 4" (102 mm) from the face of wall at 12" (305mm)C/C duly painted etc Complete as per Stander specification and drawing. (S.I.No 1 P No 46Ph)	4	Each 14748.00	Each	58,992
					(Rs: Fourteen Thousand Seven Hundred Forty Eight Rupees Only)

Total Rs: 376,834

General Abstract

Part "A" Civil Work *21.12 / Premium on Schedule items = 1328133*
Except item 14 and 17
 Part - "B" E.I Work Schedule Item 91,249
 Part - "B" Non - Schedule Item 391570
 Part "C" W/s & S/F. 376,834

Total Rs: 2187786

Add/Deducted *21.12* % above / Below on Schedule Item. = 2175576

Add/Deducted.....% above / Below on Non-Schedule Item. = 863090

Grand Total Rs: (3038666)

TERMS & CONDITIONS.

- 1 No cartage on any item of work shall be paid.
- 2 No premium non schedule of item will be paid.
- 3 100% well graded bajri used in the RCC 1:2:4.
- 4 Arbitration clause stand from the agreement.

[Signature]
 (CONTRACTOR)

[Signature]
 MEDICAL SUPERINTENDENT
 REGIONAL POLICE HOSPITAL
 HYDERABAD

[Signature]
 ASSISTANT ENGINEER
 Provincial Buildings (E.I.)
 Hyderabad.

[Signature]
 Sr. Superintendent of Police
 Hyderabad