

N/Feroze Dt: 25/1/2011

Read:

i. This office NIT No.DO(E.W)/TC/34,
dated: 10-01-2011.ii. Publication of NIT in Daily Ibrat
dated: 23-01-2011 & Daily Sobh dated:
24-01-2011**CORRIGENDUM**

The publication of Notice Inviting Tenders in the above cited News papers which is incorrect, for which amount shown in the column of estimated cost may be read as tender fees and amount shown in the column of tender fees may be read as estimated cost.

Others terms and condition will remain same.

[Signature]
DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

Copy FWCs for favour of information to:-

01. P.S to Secretary to Government of Sindh Information Technology Department Karachi.
02. The Director of Information (Advertisement) Block No.96 Sindh Secretariat Karachi.
03. The District Coordination Officer Naushahro Feroze.
04. The Executive District Officer (Works & Services Department) Naushahro Feroze.
05. The Divisional Accounts Officer (Local).
06. The Notice Board (Local).

[Signature]
DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

OFFICE OF THE DISTRICT OFFICER (EDUCATION WORKS) WORKS
& SERVICES DEPARTMENT NAUSHAHRO FEROZE.

Tel: # 0242 - 448988

No. DO(E.W)TC/ 190
N/Feroze Dated: 20/9/2011

To,

M/S Al-Saif,
Government Contractor,
P/O Molhan.

SUBJECT: PWP-I (SPONSORED BY: SYED ZAFAR ALI SHAH, MNA, NA-212) CONSTRUCTION OF TWO ROOMED BUILDING WITH VERADHA AND C.C.TOPPING IN THE C/WALL AT GGPS DARBELLO TALUKA KANDIARO.

The rate quoted by you for the above mentioned work: @A-Rs.53.75% above (Fifty three Point Seven Five Percent above & B=19.75% above Nineteen Point Seven Five Percent above) on schedule of rates Vol-III. Part-II (General) for finished items of works enforced from 1st October 2004 entered in Schedule-B has been approved vide No. **FDO (W&S)/B.B/338, dated, 21.2.2011**

02/- You are requested to please attend this office within (07) days to complete tender documents.

03/- You are requested to please supply to this office a copy of partnership deed/registration of firms and power of Attorney in the name of any partner or employee of the firm to whom you authorized to sign the bills receive payments and instructions in respect of this work.

04/- You are requested to start the work within (07) days after issue of this work order or on the date of taking over the possession of plot/site under supervision of the Deputy District Officer, (Education Works) Kandiaro.

05/- The stipulated time for completion is (05) months.

06/- Further it should be noted that:

- The work is to be carried out as per PWD specifications.
- No cartage for any material either arranged by you or supplied by the Government will be paid separately.
- No premium will be allowed on non-scheduled items.
- Only Bholari quarry sand will be used in all items involving use of it.

The receipt of this work order by acknowledged.

D.....A
Schedule - B

dc
DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

Copy FWCs to:-

The Executive District Officer, Works & Services Department N.Feroze.
The Deputy District Officer, (Education Works) Kandiaro.
for information along with copy of Schedule-B. He is required to report the actual date of start of work to this office well in time.

dc
DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

COMPARATIVE STATEMENT

Name of Work: PWP-1 (SPONSORED BY: SYED ZAFAR ALI SHAH, MNA, NA-212) CONSTRUCTION OF TWO ROOMED BUILDING WITH VERADHA AND C.C. TOPPING IN THE CWALL AT GGPS DARBELLO TALUKA KANDIARO

Estimated Cost Rs: 1546000/-

Date of Issue: 14-02-2011

Date of opening :- 15-02-2011

N.I.T No. D.O/(E.W)/T.C/1535, Dt: 22-12-2010

Sl. No.	Amount of Sch: Items	Amount of Cartage	Add. 20% on S. Item & Cartage	Total	Permissible Limit	Name of Contractor	Rate quoted	Tender cost	Excess/Saving
A	823966	283829	164793	1272588	✓	01. M/S Al-Saif	(A) 53.75% Above (B) 19.75% Above (C) Diff. of material	1266848 47907 208920	5840 Saving X
B	40006	20% Above	8001	48007	✓	B=20.00% Above			
C	Diff. of material			208920	✓				
D	Contingency			1529515	✓				
	G.Total			16479	✓				
	Say			1545994	✓				
				1546000	✓				

02. Mr. Abdul Chakoor Syral

(A) 54.00% Above 1268908
(B) 19.95% Above 47987
(C) Diff. of material 208920
1525815

3700
Saving

03. M/S Chuliam Mustala & Bros

(A) 54.75% Above 1275087
(B) 20.00% Above 48007
(C) Diff. of material 208920
1532014

2499
Excess

The rate quoted by M/S Al-Saif, Government Contractor @Rs.53.75% above & B=19.75% above, is the lowest hence recommended for approval.

SP-1
Divisional Engineer
Kandiaro

DISTRICT OFFICER
(EDUCATION WORKS)
MR. USHAHRO FEROZE

Executive District Officer
Works & Services Department
Naushahro Feroze

S.No. 01

Issued to Mr. Sp. AC - Saif
On charged Rs. 2000/-
Vide D.R No. 16206 DT-14/2/2011

Sp. AC
DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

OFFICE OF THE DISTRICT OFFICER (EDUCATION WORKS)
NAUSHAHRO FEROZE

Percentage rate tender and contract for works, I/W hereby tender for the execution, for the Governor of Sindh, (hereinbefore and hereinafter referred to as "Government"), of the work specified in the under written memorandum within the time specified in such memorandum at

PA = 53.75 / Above PB - 19.75 / Above percent
above/below the estimated rates interred in schedule 'B' (memorandum) showing items of work to be carried out and in accordance in all respects, with the specifications, designs, drawings and instructions in writing. Referred to in Rule-1 here of and in clause-12 of the annexed conditions, of contract and agree that when materials for the work are provided by the Government such materials and the rates to be paid for them shall be as provided in schedule (A) here to.

MEMORANDUM

(a) GENERAL DESCRIPTION:-

PWP-I (Sponsored by: Syed Zafar Ali Shah, MNA, NA-212)
Construction of Two Roomed Building with
Verandha and C.C. Topping in the C/Wall at GGPS
Darbello Taluka Kandiaro

- | | |
|--|---------------|
| b) Estimated Cost | Rs. 1600000/- |
| c) Earnest Money | Rs. 32000/- |
| d) Security Deposit (i/c earnest Money) | Rs. 80000/- |
| e) Percentage, if any, to be deducted from Bills | Rs. 144000/- |
| f) Time allowed for completion of work | (05) Months |

Sp. AC
DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

CONTRACTOR UNDERTAKING :

I/We hereby offered the above rates after taking into consideration as per B-I Agreement tender and this memorandum and shall be bound to fill up and complete the printed B-I form tender as to complete the agreement. In case of failing the department will be at liberty to take action against me/us as per clauses of the agreement in B-I agreement form which has been read and accepted by me/us.

Schedule-A: Nil.

Schedule-B: Attached herewith.

Sp. AC
CONTRACTOR

NAME OF WORK:-

CONSTRUCTION OF TWO ROOMED BUILDING WITH VERANDHA AND C.C.TOPPING IN C.WALL @ GGPS DABELLO TALUKA KANDIARO.

Sr. No.	Item of work	Unit	Rate	Qty:	Amount
01.	Excavation in foundation of building bridges and other structure including dag belling dressing refilling around the structure with excavated earth watering and ramming lead upto 5ft(b) in ordinary soil (S.I.No: 18(B) - P/05)	1889.0 P.Cft	1306/80 %sft		Rs.2469/- (Rupees One Thousand Three Hundred Six and Eight Paisa)
02.	Cement concrete Bricks or stone Ballast 1 1/2 t 2" guage ratio 1.5:10 (S.I.No: 04 - P/16)	2152.0 Cft	3213/95 %Cft		Rs.69164/- (Rupees Two Thousand Nine Hundred Thirty five and Ten Paisa)
03.	Pacca Brick work in foundation and plinth in cement sand mortor ratio 1:6 (S.I.No: 04(i) - P/25)	1815.0 Cft	3865/15 %cft		Rs.70152/- (Rupees Three Thousand Eight Hundred Sixty five and fifteen Paisa)
04.	R.C.C work i/c all labour and material except the cost of steel reinforcement and its labour for bending and binding laying in position. This rate also i/c kinds of forms mould lifting shuttering curing rending exposed surface R.C Work in roof slab beams columns rafts lintel and other structure ratio 1:2:4 (S.I.No: 6(i) - P/19)	891 P.Cft	114/-		Rs.101574/- (Rupees One Hundred Fourteen only)
05.	Fabrication of mild steel reinforcement cement for cement concrete i/c cutting bending laying imposition i/c removal rust from bars (S.I.No: 7 - P/20).	Mild Steel 39.77 P.Cwt	2651/55		Rs.105476/- (Rupees Twenty Six Hundred Fifty One and Fifty Five Paisa)
06.	Filling watering and ramming earth under floor with new surplus earth from foundation lead upto one chain and lift upto 5feet (S.I.No:21 - P/05).	1259 Cft	641/30 %0cft		Rs. 807/- (Rupees One thousand Four Hundred Eight Eight and Thirty Paisa)
07.	Filling watering and ramming earth under floor with new earth excavation from o: side lead upto one chain and lift upto 5ft (S.I.No:22 - P/05).	11128 Cft	1488/30 %0cft		Rs. 16561/- (Rupees One thousand Four Hundred Eight Eight and Thirty Paisa)
08.	Extra lead two mile .	15518 Cft	239/2 %0cft		Rs. 26618/- (Rupees One thousand Four Hundred Eight Eight and Thirty Paisa)
09.	Supply of clean screaming river pit and within 5 chain i/c removal of tip rust or earth or over burden and royalty to the Govt or cost to the private owner (S.I.No: 36 - P/07).	422 Sft	176/30 % Sft		Rs.744/- (Rupees One Hundred sixty Six and Thirty Paisa)
10.	Providing and laying single per layer of polythin sheet 0.13mm Thick for water proofing as per specification and instructions of Engineer Incharge (S.I.No: 38 - P/43).	1126 Sft	03/64 P:Sft		Rs. 4099/- (Rupees Three and Sixty four Paisa)
11.	Pacca Brick work in ground floor in cement sand mortar ratio 1:6 (S.I.No: 09(i) - P/25)	1949 Cft	4246/30 %cft		Rs.82760/- (Rupees Four Thousand Two Hundred Forty Six and Thirty Paisa)


12. Providing and fixing G.I frame/chowkat of size 7"x2" or 4 1/2 x3" for door using 20 gauge C.I sheet i/c welded hinges and fixing at site with necessary hold fasts hinges and fixing at site with necessary hold fast filling the cost also i/c all carriage of tools and plants used in making and fixing (S.I.No: 29 - P/98).
- | | | | |
|----------------|--|--------------|-------------|
| a) For Doors | 140 P.Sft | 113/37 P.Sft | Rs.15872/- |
| | (Rupees One Hundred Thirteen and Thirty Seven Paisa) | | |
| b) For Windows | 147 P.Rft | 122/17 R.Ft | Rs. 17959/- |
| | (Rupees One Hundred Twenty Two and Seventeen Paisa) | | |
13. 1st Class Deodar wood wrought joinery in doors and windows etc fixed in position i/c chowkats holds fasts hinges iron towers bolts handles and cords etc complete (S.I.No: 7 - P/65).
- | | | | | |
|--|--|--------|-------|-------------|
| | 164 Sft | 228/38 | P.Sft | Rs. 37454/- |
| | (Rupees Two Hundred Twenty Eight and Thirty Eight Paisa) | | | |
14. Pacca Brick work an other than building i/c striking of joints upto 2' ft height cement sand mortar 1:6 (S.I.No: 07 - P/25)
- | | | | | |
|--|---|--------|------|-----------|
| | 153 Cft | 4089/- | %cft | Rs.6256/- |
| | (Rupees Four Thousand Eighty Nine only) | | | |
15. Supplying and fixing in position iro/steel grill of 2"x2" size flat iron of approved design including painting threecoats etc completed weight not to be less than 3.7lbs sq foot of finishing grill (S.I.No:26 - P/97).
- | | | | | |
|--|--|--------|-------|-------------|
| | 434 Sft | 115/47 | P.Sft | Rs. 50113/- |
| | (Rupees One Hundred Fifteen and Forty Seven Paisa) | | | |
16. Preparing painting new surface gurad bars gates railing standard braccs and similar open work three coats (S.I.No: 15 - P/76)
- | | | | | |
|--|---|--------|-------|-------------|
| | 34 Sft | 384/48 | % Sft | Rs. 13072/- |
| | (Rupees Six Hundred Ninety Three and Seventy one Paisa) | | | |
17. Cement plaster 1:6 upto 20" height 1/2" thick (S.I.No: 13(b) - P/58).
- | | | | | |
|--|--|--------|-------|-------------|
| | 3339 Sft | 531/41 | % Sft | Rs. 17744/- |
| | (Rupees Five Hundred Thirty One and Forty one Paisa) | | | |
18. Cement plaster 1:4 upto 20" height 5/8" thick (S.I.No: 11(a) - P/58).
- | | | | | |
|--|--|--------|-------|-------------|
| | 3339 Sft | 536/14 | % Sft | Rs. 17902/- |
| | (Rupees Five Hundred Thirty Six and Forteen Paisa) | | | |
19. Making Notice board made with cement (S.I.No: 01 - P/100).
- | | | | | |
|--|--|-------|-------|------------|
| | 64 Sft | 28/86 | P.Sft | Rs. 1847/- |
| | (Rupees Twenty Eight and Eighty Six Paisa) | | | |
20. Cement plaster 3/4" thick upto 20' height ratio 1:4 (S.I.No: 11(c) - P/58).
- | | | | | |
|--|--|--------|-------|------------|
| | 669 Sft | 779/96 | % Sft | Rs. 5218/- |
| | (Rupees Five Hundred Thirty Six and Forteen Paisa) | | | |
21. Cement pointing structure of joints of wall ratio 1:2 (S.I.No: 19 - P/59).
- | | | | | |
|--|--|--------|-------|------------|
| | 1028 Sft | 645/37 | % Sft | Rs. 6634/- |
| | (Rupees Six Hundred Forty five and Thirty seven Paisa) | | | |
22. Providing and laying 1" thick topping cement concrete 1:2:4 including surface finishing and dividing into panels (S.I.No: 16 - P/47).
- | | | | | |
|------------------------|---|---------|------|------------|
| a) <u>2" thick</u> | 887sft | 1820/23 | %Sft | Rs.16145/- |
| | (Rupees One Thousand Eight hundred Twenty and Twenty three Paisa) | | | |
| b) <u>2" thick</u> | 3841 sft | 1396/67 | %Sft | Rs.53646/- |
| | (Rupees One three hundred Ninety Six and Sixty Seven Paisa) | | | |
| c) <u>1 1/2" thick</u> | 1425 sft | 1115/18 | %Sft | Rs.15891/- |
| | (Rupees One three hundred Ninety Six and Sixty Seven Paisa) | | | |
23. Bitumen coating to plaster or cement concrete surface (S.I.No: 09 - P/77).
- | | | | | |
|--|---|--------|-------|------------|
| | 759 Sft | 187/56 | % Sft | Rs. 1424/- |
| | (Rupees One Hundred Eighty seven and fifty six Paisa) | | | |

26. Two Coats of bitumen coating laid hot using 34 lbs for % Sft over roof and blinded with sand at one Cft % Sft (S.I.No:13 - P/41).
1325 Sft 431/21 % Sft Rs. 5714/-
(Rupees Four Hundred Thirty One and Twenty One Paisa)
24. Providing and laying HALLA or pattern tiles glazed 6"x6"x1/4" as floor or wall facing in required floor and pattern of stile specification jointed in white cement and pigment over base of 1:2 gray cement mortar 3/4" thick i/c washing and filling of joint white slurry of white cement and pigment in desired shpe with finshing cleaning and costof wax polling etc complete i/c cutting tiles to proper way (S.I.No: 61 - P/54).
21 Sft 12311/25 % Sft Rs. 2585/-
(Rupees Twelve thousand Three Hundred Eleven and Twenty Five Paisa)
25. Cement concrete plain including planning compacting finishing and curring complete i/c screening and washing of stone aggregate without (S.I.No: 05 - P/18).
14 Sft 5941/10 % Sft Rs. 832/-
(Rupees five thousand nine Hundred Forty one and Ten Paisa)
26. Laying floor of approved with glazed tile 3/4" thick in white cement 1:2 over 3/4" thick cement mortar 1:2 complete (S.I.No: 24 - P/48).
104 Sft 10416/34 % Sft Rs. 10836/-
(Rupees Ten thousand Four Hundred Sixteen and Thirty four paisa)
27. White Glazed Tile 3/4" Thick dado jointed in white cement and laid over 1:2 cement sand mortar 3/4" thick including finishing (S.I.No: - P/50).
182 Sft 10700/69 % Sft Rs. 19475/-
(Rupees Ten thousand Seven Hundred and Sixty Nine Paisa)
28. Extra labour rate for earth making cement plaster pattas/bend around straight or curved opening and around the edge of roof slabs the width not less than 6" with fine finishing as directed by Engineer Incharge (S.I.No:35 - P/61).
171 Rft 11/25 P.Rft Rs. 1924/-
(Rupees Eleven and Twenty five Paisa)
29. Extra labour rate for earth making grooves of 1x1"x4" or 3/4" x 1/2" plaster surgance ith true edges both vertically and horizontally. (S.I.No:35 - P/60).
332 Rft 03/45 P.Rft Rs. 1145/-
(Rupees Eleven and Twenty five Paisa)
30. White wash three coats (S.I.No:26 - P/59).
1198 Sft 115/18 % Sft Rs. 1381/-
(Rupees One Hundred Fifteen and Eighteen Paisa)
31. Colour wash two coats (S.I.No: 25 - P/59).
4362 Sft 103/79 % Sft Rs. 4527/-
(Rupees One Hundred Three and Seventy Nine Paisa)
32. Primary coats of chalk under distempering (S.I.No:23 - P/58).
3431 Sft 58/85 % Sft Rs. 2019/-
(Rupees Fifty Eight and Eight Five Paisa)
33. Distempering three coats (S.I.No: 24 (B)- P/60).
6423 Sft 204/22 % Sft Rs. 13117/-
(Rupees Two Hundred Sixty three and Seventy Nine Paisa)
34. Preparing painting doors and windows any type i/c three coats (S.I.No: 5 (c) - P/76).
164 Sft 693/71 % Sft Rs. 2275/-
(Rupees Six Hundred Ninety Three and Seventy one Paisa)
35. Preparing painting new surface gurad bars gates failing standard bracess and similar open work three coats (S.I.No: 15 - P/76).
50 Sft 414/61 % Sft Rs. 207/-
(Rupees Six Hundred Ninety Three and Seventy one Paisa)
36. Laying white Marble floor fine dressed in the surface without winging set in lime mortar 1.2 including rubbing and polishing of the joints (S.I.No: 28 - P/49).
08 Sft 148/06 % Sft Rs. 1184/-
(Rupees One hundred Forty Eight Six Paisa)

Total

Rs. 823966/-


CONTRACTOR


CHECKED

Draftsman

DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

PART "D" W.S.S. FITTING.

Panchajanya 7th April 1982 and also digging in C.P. PS
D. S. S. S.

S.NO:	ITEM OF WORK.	QTY	RATE	UNIT	AMOUNT
01:	Providing and fixing equating type white glazed of flushline cistern with internal fitting & flush pipe with band and making requisite number of holes in wall plinth & floor for piep connections & making good in cement concrete 1.2.4. W.C.Pan of non less than 23" clear opening between flashing rims and 03 gallons flushing tank with 4" dia C.I. Tape (S.I.NO: 01 Page NO: 01).	02Nos	2362/80	P:NO:	RS: = 4726/-
02:	Providing and fixing in position nylon connections complete with 1/2" dia brass stop cock with pair of brass nuts and lining joints to nylon connections (S.I.NO: 23 Page NO: 06).	02Nos	77/85	P:NO:	RS: = 156/-
03:	Providing and fixing 3" dia C.I. Waste & vent pipe including cutting fitting and extra painting to match the colour of the building (S.I.NO: 13 Page NO: 09).	1x6x2	1270	90/22	P:Rft RS: = 1082/-
04:	Providing and fixing 4" Dia C.I. Soil Vent Pipe i/c cutting and fitting and extra painting to match the colour of the Building (S.I.NO: 01 Page NO: 08).	2x6-	12.0	103/40	P:Rft RS: = 1241/-
05:	Providing and fixing G.I. Pipe & special etc including cutting & fitting complete with and i/c cost of cutting trench upto 2-6" feet deep refitting water ramming and disposal of surplus earth with in one chain and painting two coats of bitumen paint to piep special after cleaning and hassian cloth soaked in maxphalt composition wrapped tightly round pipes testing to a pressure head of 200 feet and handling (S.I.NO: 01 Page NO: 12)	(a) 1/2" Dia	20.0	24/30	P:Rft RS: = 486/-
		(b) 3/4" Dia	2570	33/45	P:Rft RS: = 836/-
		(c) 1" Dia.	10.0	44/205	P:Rft RS: = 445/-
06:	Providing R.C.C. Pipe with collars class "B" and digging the trenches to required depth and fixing in position including cutting fitting and jointing with maxphalt composition & cement mortar 1.2. and testing with water pressure to a head of 4 feet above the top of the highest pipe refilling with excavated staff (S.I.NO: 2 Page NO: 21).	4" Dia	4870	48/-	P:Rft RS: = 2304/-
07:	Supplying and fixing lon bib cock of superior quality with c.p. head 1/2" dia (S.I.NO: 15(a) P-15).	1x3	03Nos	211/-	P:NO: RS: = 633/-

09.	1x2	02Nos	1233/65	P:No:	RS: =1289/-
	Providing and fixing 24x18" Lavatory Basin in white glazed earthen ware complete with 1/2" dia cast of V.I. or C.I. antilever brackets which built into wall painted white in two coat after a primary coat of red lead paint a pair of 1/2" dia chrome plate pillar traps require number of holes in walls & floor for pipe connections and making good in cement concrete 1.2.4/(Standard Pattern)(S.I.NO:03 Page No:3)				
10.	1x2	02Nos	242/35	P:No:	RS: =489/-
	Providing and fixing 6x2 or 5x3" C.I. floor trap of approved self cleaning design with a C.I. screwed down gritting with or without a vent arm complete with and 1/c making require number of holes in walls plinth and floor for pipe connections & making good in c.c.1.2.4.(S.I.NO: 20 Page NO: 05)				
11.	1x1	01NO:	982/30	Each	RS: =982/-
	Providing and fixing 24x18" beveled edge mirror of belgium glass complete with 1/8" thick hard board and C.P. screws fixed to wooden plate(Superior quality) (S.I.NO:03(B)P-07)				
12.	1x2	02 Nos	98/95	Each	RS: =118/-
	Providing and fixing Full way Gun Metal Valve with wheels threaded or flanged ends with rubber washing 3/4" Light Pattern(S.I.NO: 6 (a) Page NO: 14).				
13.	1x1	01NO:	9869/80	P:No:	RS: =9870/-
	CONSTRUCTION OF Main Hole or inspection chamber for the required dia of circular other of 3-6" 1067 mm depth with wall of B.S. cement mortar 1.3. cement Plaster 1.3. 1/2" inside of wall 1" 25 mm thick over trenching & channel 1/c fixing C.I. Main Hole cover with traps of clear opening 1-1/2" x1-1/2" of 1.75 Cwt embaded in plain & C.C.1.2.4.				
14.	1x70	7070	24/70	P:Rft	RS: =5929/-
	Assembling 1-1/2" Dia Pressure Pipe.				
15.	1x70	7070	25/01	P:Rft	RS: =1751/-
	Providing and fixing 1-1/2" dia pressure pipe				
	TOTAL				RS: =40006/-
	ADD: 20% ABOVE				RS: =8001/-
	TOTAL				RS: =480007/-

[Handwritten signature]

S.No.01

Issued to Mr. Abdul Ghafoor Bital
On charged Rs. 2000/-
Vide D.R No. 16205-D-14/2/11

Abdul Ghafoor Bital
DISTRICT OFFICER (EDUCATION WORKS)
NAUSHAHRO FEROZE

OFFICE OF THE DISTRICT OFFICER (EDUCATION WORKS)
NAUSHAHRO FEROZE

Percentage rate tender and contract for works, I/W hereby tender for the execution, for the Governor of Sindh, (hereinbefore and hereinafter referred to as "Government"), of the work specified in the under written memorandum within the time specified in such memorandum at

AS per tender
A = 54.0% ab B = 19.95% above
percent above/below the estimated rates interred in Schedule 'B' (memorandum) showing items of work to be carried out and in accordance in all respects, with the specifications, designs, drawings and instructions in writing. Referred to in Rule-I here of and in clause-12 of the annexed conditions, of contract and agree that when materials for the work are provided by the Government such materials and the rates to be paid for them shall be as provided in schedule (A) here to.

MEMORANDUM

- (a) GENERAL DESCRIPTION:- PWP-I (Sponsored by: Syed Zafar Ali Shah, MNA, NA-212)
Construction of Two Roomed Building with
Verandha and C.C.Topping in the C/Wall at GGPS
Darbello Taluka Kandiaro
- b) Estimated Cost Rs. 1600000/-
c) Earnest Money Rs. 32000/-
d) Security Deposit (i/c earnest Money) Rs. 80000/-
e) Percentage, if any, to be deducted from Bills Rs. 144000/-
f) Time allowed for completion of work (05) Months

Abdul Ghafoor Bital
DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

CONTRACTOR UNDERTAKING :

I/We hereby offered the above rates after taking into consideration as per B-I Agreement tender and this memorandum and shall be bound to fill up and complete the printed B-I form tender as to complete the agreement. In case of failing the department will be at liberty to take action against me/us as per clauses of the agreement in B-I agreement form which has been read and accepted by me/us.

Schedule-A: Nil.

Schedule-B: Attached herewith.

Abdul Ghafoor Bital
CONTRACTOR

S.No. 01

Issued to Mr. M/s. Chulham Mustafa & Sons
On charged Rs. 3000/-
Vide D.R No. 16207 D-14/2/2011

Naushahro Feroze
DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

OFFICE OF THE DISTRICT OFFICER (EDUCATION WORKS)
NAUSHAHRO FEROZE

Percentage rate tender and contract for works, I/W hereby tender for the execution, for the Governor of Sindh, (hereinbefore and hereinafter referred to as "Government"), of the work specified in the under written memorandum within the time specified in such memorandum at

Part A - 54.75 percent above/below the estimated rates entered in Part B - 20.00 percent above/below the estimated rates entered in Part B (memorandum) showing items of work to be carried out and in accordance in all respects, with the specifications, designs, drawings and instructions in writing. Referred to in Rule-I here of and in clause-12 of the annexed conditions, of contract and agree that when materials for the work are provided by the Government such materials and the rates to be paid for them shall be as provided in schedule (A) here to.

MEMORANDUM

- (a) GENERAL DESCRIPTION:- PWP-I (Sponsored by: Syed Zafar Ali Shah, MNA, NA-212)
Construction of Two Roomed Building with
Verandha and C.C.Topping in the C/Wall at GGPS
Darbello Taluka Kandiaro
- b) Estimated Cost Rs. 1600000/-
- c) Earnest Money Rs. 32000/-
- d) Security Deposit (i/c earnest Money) Rs. 80000/-
- e) Percentage, if any, to be deducted from Bills Rs. 144000/-
- f) Time allowed for completion of work (05) Months

Naushahro Feroze
DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

CONTRACTOR UNDERTAKING :

I/We hereby offered the above rates after taking into consideration as per B-I Agreement tender and this memorandum and shall be bound to fill up and complete the printed B-I form tender as to complete the agreement. In case of failing the department will be at liberty to take action against me/us as per clauses of the agreement in B-I agreement form which has been read and accepted by me/us.

Schedule-A: Nil.

Schedule-B: Attached herewith.

Contractor
CONTRACTOR

OFFICE OF THE DISTRICT OFFICER (EDUCATION WORKS) WORKS
& SERVICES DEPARTMENT NAUSHAHRO FEROZE.

Tal: # 0242 - 448988

No. DO(E.W)TC/ 191
N/Feroze Dated: 22/2/11

To,

Mr. Atahar Ali Bhutto,
Government Contractor,
P/O Molhan.

SUBJECT: PWP-II (P.M.DIRECTIVES (SPONSORED BY: SYED ZAFAR ALI SHAH, MNA, NA-212, CONSTRUCTION OF TWO ROOMED PRIMARY SCHOOL BUILDING WITH C/WALL FOR EXISTING SHELTERLESS PRIMARY SCHOOL AT GPS SANWAL KHAN BHUTTO TALUKA BHIRIA.

The rate quoted by you for the above mentioned work: @A-Rs.52.00% above (Fifty Point Zero Zero Percent above & B=19.80% above Nineteen Point Eight Zero Percent above) on schedule of rates Vol-III, Part-II (General) for finished items of works enforced from 1st October 2004 entered in Schedule-B has been approved, vide NO: EDO (W&S) / B.B/ 350, dated: 22.2.2011

02/- You are requested to please attend this office within (07) days to complete tender documents.

03/- You are requested to please supply to this office a copy of partnership deed/registration of firms and power of Attorney in the name of any partner or employee of the firm to whom you authorized to sign the bills receive payments and instructions in respect of this work.

04/- You are requested to start the work within (07) days after issue of this work order or on the date of taking over the possession of plot/site under supervision of the Deputy District Officer, (Education Works) Bhiria.

05/- The stipulated time for completion is (05) months.

06/- Further it should be noted that:


- The work is to be carried out as per PWD specifications.
- No cartage for any material either arranged by you or supplied by the Government will be paid separately.
- No premium will be allowed on non-scheduled items.
- Only Bholari quarry sand will be used in all items involving use of it.


The receipt of this work order by acknowledged.

D.....A
Schedule - B

Copy FWCs to:-

- The Executive District Officer, Works & Services Department N.Feroze.
 - The Deputy District Officer, (Education Works) Bhiria .
- for information along with copy of Schedule-B. He is required to report the actual date of start of work to this office well in time.


DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE


DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

COMPARATIVE STATEMENT

Name of Work: PWP-II (P.M. DIRECTIVES) (SPONSORED BY: SYED ZAFAAR ALI SHAH, MNA, NA-212,
CONSTRUCTION OF TWO ROOMED PRIMARY SCHOOL BUILDING WITH C/WALL FOR EXISTING SHELTERLESS PRIMARY
SCHOOL AT GPS SANWAL KHAN BHUTTO TALUKA BHIRRA

A. Estimated Cost Rs: 1752000/-
Date of issue: 14-02-2011
Date of opening: - 15-02-2011

N.I.T No. D.O/(E.W)/T.C/1535, Dt: 22-12-2010

Sr. No.	Amount of Sch: Items	Amount of Cartage	Add: 20% on S. Item & Cartage	Total	Permissible Limit	Name of Contractor	Rate quoted	Tender cost	Excess/Saving
A	946324	310716	189265	1446305	A = 52.83% Above	01. Mr. Atahar Ali Bhutto	(A) 52.00% Above	1438412	8023
B	33531	20% Above	6706	40300	B = 20.00% Above		(B) 19.80% Above	40170	Saving
C	Diff: of material			255736			(C) Diff: of material	255736	
				1742341				1734318	
				9463					
				1751804					
D	Contingency			1752000					
	G: Total								
	Say								

02. Mr. Rafique Ahmed Sahito

(A) 52.80% Above 1445983 322
(B) 20.00% Above 40300 Saving
(C) Diff: of material 255736

03. Mr. Manzoor Ahmed Vistro

(A) 53.00% Above 1447876 1571
(B) 20.00% Above 40300 Excess
(C) Diff: of material 255736

1743912

The rate quoted by Mr. Atahar Ali Bhutto, Government Contractor @Rs. 52.00% above & B=19.80% above, is the lowest hence recommended for approval.

DIVISIONAL ACCOUNTS OFFICER
(EDUCATION WORKS)
MAUSHAIRO FEROUZE

DISTRICT OFFICER
(EDUCATION WORKS)
MAUSHAIRO FEROUZE

EXECUTIVE DISTRICT OFFICE
Works & Services Department
Maushairi - F-11372

S.No. 02

Issued to Mr. Alakar ab. Mulla

On charged Rs. 2000/-

Vide D.R No. 16208 DT-14/2/11

Alakar ab. Mulla
DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

OFFICE OF THE DISTRICT OFFICER (EDUCATION WORKS)
NAUSHAHRO FEROZE

Percentage rate tender and contract for works, I/W hereby tender for the execution, for the Governor of Sindh, (hereinbefore and hereinafter referred to as "Government"), of the work specified in the under written memorandum within the time specified in such memorandum at

PA = 52.07 above CB - 17.80% above percent above/below the estimated rates interred in Schedule 'B' (memorandum) showing items of work to be carried out and in accordance in all respects, with the specifications, designs, drawings and instructions in writing. Referred to in Rule-I here of and in clause-12 of the annexed conditions, of contract and agree that when materials for the work are provided by the Government such materials and the rates to be paid for them shall be as provided in schedule (A) here to.

MEMORANDUM

(a) GENERAL DESCRIPTION:-

PWP-II (P.M.DIRECTIVES (Sponsored by: Syed Zafar Ali Shah, MNA, NA-212)
Construction of Two Roomed Primary School Building with C/Wall for existing shelterless Primary School at GPS Samud Khan Mulla
Taluka Bhinga

b) Estimated Cost	Rs. 1750000/-
c) Earnest Money	Rs. 35000/-
d) Security Deposit (i/c earnest Money)	Rs. 37500/-
e) Percentage, if any, to be deducted from Bills	Rs. 157500/-
f) Time allowed for completion of work	(05) Months

Alakar ab. Mulla
DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

CONTRACTOR UNDERTAKING :

I/We hereby offered the above rates after taking into consideration as per B-I Agreement tender and this memorandum and shall be bound to fill up and complete the printed B-I form tender as to complete the agreement. In case of failing the department will be at liberty to take action against me/us as per clauses of the agreement in B-I agreement form which has been read and accepted by me/us.

Schedule-A: Nil.

Schedule-B: Attached herewith.

Alakar ab. Mulla
CONTRACTOR

NAME OF WORK:-

CONSTRUCTION OF TWO ROOMED BUILDING WITH
COMPOUND WALL IN EXISTING SHELTERLESS PRIMARY
SCHOOL AT SANWAN KHAN BHUTTO TALUKA BHIRIA,
DISTRICT NAUSHAHRO FEROZE.

Sr. No.	Item of work	Unit	Rate	Qty:	Amount
01.	Excavation in foundation of building bridges and other structure including dag belling dressing refilling around the structure with excavated earth watering and ramming lead upto 5ft(b) in ordinary soil (S.I.No: 18(B) - P/05)				
		3192.0 P.Cft	1306/80 %sft		Rs.4171/- (Rupees One Thousand Three Hundred Six and Eight Paisa)
02.	Cement concrete Bricks or stone Ballast 1 ½ t 2" guage ratio 1.5.10 (S.I.No: 04 - P/16)				
		1067.0 Cft	3213/95 %Cft		Rs.34293/- (Rupees Two Thousand Nine Hundred Thirty five and Ten Paisa)
03.	Pacca Brick work in foundation and plinth in cement sand mortor ratio 1:6 (S.I.No: 04(i) - P/25)				
		3645.0 Cft	3865/15 %cft		Rs.36045/- (Rupees Three Thousand Eight Hundred Sixty five and fifteen Paisa)
04.	R.C.C work i/c all labour and material except the cost of steel reinforcement and its labour for bending and binding laying in position. This rate also i/c kinds of forms mould lifting shuttering curing rending exposed surface R.C Work in roof slab beams columns rafts lintel and other structure ratio 1:2:4 (S.I.No: 6(i) - P/19)				
		1005 P.Cft	114/-		Rs.1144570/- (Rupees One Hundred Fourteen only)
05.	Fabrication of mild steel reinforcement cement for cement concrete i/c cutting bending laying imposition i/c removal rust from bars (S.I.No: 7 - P/20).				
	Tor Steel	35.860P.Cwt	2772/55		Rs.99477/- (Rupees Twenty Seven Hundred Seventy Two and Fifty Five Paisa)
	Mild Steel	8.98 P.Cwt	2651/55		Rs.23811/- (Rupees Twenty Seven Hundred Seventy Two and Fifty Five Paisa)
07.	Damp proof course with cement sand and shingle concrete 1:2:4 including of asphaltic mixture (S.I.No: 27 - P/23).				
		392 Sft	1834/75 % Sft		Rs.7192/- (Rupees One thousand Eight Hundred Thirty four and Seventy Five Paisa)
08.	Filling watering and ramming earth under floor with new surplus earth from foundation lead upto one chain and lift upto 5feet (S.I.No:21 - P/05).				
		2128 Cft	641/30 %0cft		Rs. 1365/- (Rupees One thousand Four Hundred Eight Eight and Thirty Paisa)
09.	Filling watering and ramming earth under floor with new earth excavation from o: side lead upto one chain and lift upto 5ft (S.I.No:22 - P/05).				
		3152 Cft	1488/30 %0cft		Rs. 4691/- (Rupees One thousand Four Hundred Eight Eight and Thirty Paisa)
10.	Cement concrete Bricks or stone Ballast 1 ½ t 2" guage ratio 1.6.12 (S.I.No: 04(b) - P/17)				
		495.0 Cft	2935/10 %Cft		Rs.14529/- (Rupees Two Thousand Nine Hundred Thirty five and Ten Paisa)
11.	Pacca Brick work in ground floor in cement sand mortar ratio 1:6 (S.I.No: 09(i) - P/25)				
		2415 Cft	4246/30 %cft		Rs.102548/- (Rupees Four Thousand Two Hundred Forty Six and Thirty Paisa)

12. Pacca Brick work an other than building i/c striking of joints upto 2' ft height cement sand mortar 1:6 (S.I.No: 07 - P/25)
638 Cft / 4089/- %cft Rs.26088/-
(Rupees Four Thousand Eighty Nine only)
13. Providing and fixing G.I frame/chowkat of siz 7"x2" or 4 1/2 x3" for door using 20 guage C.I sheet i/c welded hinges and fixing at site with necessary hold fasts hinges and fixing at site with necessary hold fast filling the cost also i/c all carriage of tools and plants used in making and fixing (S.I.No: 29 - P/98).
- a) For Doors 67 P.Sft / 113/37 P.Sft Rs. 7596/-
(Rupees One Hundred Thirteen and Thirty Seven Paisa)
- b) For Windows 136 P.Rft / 122/17 R.Ft Rs.6615/-
(Rupees One Hundred Twenty Two and Seventeen Paisa)
14. Supplying and fixing in position iro/steel grill of 2"x2" size flat iron of approved design including painting threecoats etc completed weight not to be less than 3.7lbs sq foot of finishing grill (S.I.No:26 - P/97).
495 Sft / 115/47 P.Sft Rs. 57158/-
(Rupees One Hundred Fifteen and Forty Seven Paisa)
15. Preparing painting new surface gurad bars gates railing standard bracess and similar open work three coats (S.I.No: 15 - P/76).
34 Sft / 384/61 % Sft Rs. 14109/-
(Rupees Six Hundred Ninety Three and Seventy one Paisa)
15. Making and fixing steel grated doors with 1/6" sheeting i/c angle iron frame 2"x2" 3/8" and 3/4" squire bars 4" centre to with locking arrangement (S.I.No: 24- P/97).
48 Sft / 385/76 P.Sft Rs. 18516/-
(Rupees three Hundred Eight Five and Seventy Six Paisa)
16. Cement plaster 1:6 upto 20" height 1/2" thick (S.I.No: 13(b) - P/58).
6723 Sft / 531/41 % Sft Rs. 35727/-
(Rupees Five Hundred Thirty One and Forty one Paisa)
17. Cement plaster 1:4 upto 20" height 3/8" thick (S.I.No: 11(a) - P/58).
6723 Sft / 536/14 % Sft Rs. 36045/-
(Rupees Five Hundred Thirty Six and Forteen Paisa)
18. Cement plaster 3/4" thick upto 20' height ratio 1:4 (S.I.No: 11(c) - P/58).
581 Sft / 779/96 % Sft Rs. 4532/-
(Rupees Five Hundred Thirty Six and Forteen Paisa)
19. Cement pointing structure of joints of wall ratio 1:2 (S.I.No: 19 - P/59).
2886 Sft / 645/37 % Sft Rs. 18625/-
(Rupees Six Hundred Forty-five and Thirty seven Paisa)
20. Providing and laying 1" thick topping cement concrete 1:2:4 including surface finishing and dividing into panels (S.I.No: 16 - P/47).
- a) 2" thick 1689 sft / 1820/23 %Sft Rs.30744/-
(Rupees One Thousand Eight hundred Twenty and Twenty three Paisa)
- b) 1 1/2" thick 1454 sft / 1115/18 %Sft Rs.16215/-
(Rupees One three hundred Ninety Six and Sixty Seven Paisa)
21. Laying floor of approved with glazed tile 1/2" thick in white cement 1:2 over 3/4" thick cement mortar 1:2 complete (S.I.No: 24 - P/48).
64 Sft / 10416/34 % Sft Rs. 8333/-
(Rupees Ten thousand Four Hundred Sixteen and Thirty four Paisa)
22. White Glazed Tile 1/4" Thick dado jointed in white cement and laid over 1:2 cement sand mortar 3/4" thick including finishing (S.I.No: - P/50).
64 Sft / 10700/69 % Sft Rs. 6848/-
(Rupees Ten thousand Seven Hundred and Sixty Nine Paisa)
23. Making Notice board made with cement (S.I.No: 01 - P/100).
80 Sft / 28/86 P.Sft Rs. 2309/-
(Rupees Twenty Eight and Eighty Six Paisa)

24. Two Coats of bitumen coating laid hot using 34 lbs for % Sft over roof and blinded with sand at one Cft % Sft (S.I.No: 13 - P/41).
 1454 Sft ~~431/21~~ % Sft Rs. 6270/-
 (Rupees Four Hundred Thirty One and Twenty One Paisa)
25. Extra labour rate for earth making cement plaster pattas/bend around straight or curved opening and around the edge of roof slabs the width not less than 6" with fine finishing as directed by Engineer Incharge (S.I.No:35 - P/61).
 375 Rft ~~11/25~~ P.Rft Rs. 4253/-
 (Rupees Eleven and Twenty five Paisa)
26. White wash three coats (S.I.No:26 - P/59).
 768 Sft ~~115/18~~ % Sft Rs. 885/-
 (Rupees One Hundred Fifteen and Eighteen Paisa)
27. Primary coats of chalk under distempering (S.I.No:23 - P/58).
 6723 Sft ~~58/85~~ % Sft Rs. 3956/-
 (Rupees Fifty Eight and Eight Five Paisa)
28. Distempering ^{Two} three coats (S.I.No: 24 - P/17).
 6723 Sft ~~263/51~~ % Sft Rs. 17716/-
 (Rupees Two Hundred Sixty three and Fifty One Paisa)
29. Colour wash two coats (S.I.No: 25 - P/59).
 2886 Sft ~~103/79~~ % Sft Rs. 2995/-
 (Rupees One Hundred Three and Seventy Nine Paisa)
30. Preparing painting doors and windows any type i/c three coats (S.I.No: 5 (c) - P/76).
 328 Sft ~~693/71~~ % Sft Rs. 2275/-
 (Rupees Six Hundred Ninety Three and Seventy one Paisa)
31. Preparing painting new surface gurad bars gates railing standard braces and similar open work three coats (S.I.No: 15 - P/76).
 156 Sft ~~414/61~~ % Sft Rs. 647/-
 (Rupees Six Hundred Ninety Three and Seventy one Paisa)

Total

Rs. 934305/-

CONTRACTOR

CHECKED

Draftsman

DISTRICT OFFICER
 (EDUCATION WORKS)
 NAUSHAHRO FEROZE

PART "D" W.S.S. FITTING.

Contract 7 for (R) work on C.P.S.
D. 20/11/80

S.NO: ITEM OF WORK. QTY RATE UNIT AMOUNT

01⁷ Providing and fixing squatting type white glazed of flushino cistern with internal fitting & flush pipe with band and making requisite number of holes in wall plinth & floor for piep connections & making good in cement concrete 1.2.4. W.C. Pan of non less than 23" clear opening between flashing rings and 03 gallons flushing tank with 4" dia C.I. Tape (S.I.NO: 01 Page NO: 01).

02Nos 2362/80 P:INO: RS: 4726/-

02⁷ Providing and fixing in position nyloon connections complete with 1/2" dia brass stop cock with pair of brass nuts and lining joints to nyloon connections (S.I.NO: 23 Page NO: 06).

02Nos 77/85 P:INO: RS: 156/-

03⁷ Providing and fixing 3" dia C.I. Waste & vent pipe including cutting fitting and extra painting to match the colour of the building (S.I.NO: 13 Page NO: 09).

1x6x2 1250 30/22 P:Rft RS: 1082/-

04⁷ Providing and fixing 4" Dia C.I Soil Vent Pipe i/c cutting and fitting and extra painting to match the colour of the Building (S.I.NO: 01 Page NO: 08).

2x6- 1250 103/40 P:Rft RS: 1241/-

05⁷ Providing and fixing G.I. Pipe & special etc including cutting & fitting complete with and i/c cost of cutting trench upto 2-1/2" feet deep refitting water ramming and disposal of surplus earth with in one chain and painting two coats of bitumen paint to piep special after cleaning and hasian cloth soaked in maxphalt composition wrapped tightly round pipes testing to a pressure head of 200 feet and handling (S.I.NO: 01 Page NO: 12)

(a) 1/2" Dia 20.0 24/30 P:Rft RS: 486/-

(b) 3/4" Dia 25.0 33/45 P:Rft RS: 836/-

(c) 1" Dia 10.0 44/505 P:Rft RS: 445/-

06⁷ Providing R.C.C. Pipe with collars class "B" and digging the trenches to required depth and fixing in position including cutting fitting and jointing with maxphalt composition & cement mortar 1.2. and testing with water pressure to a head of 4 feet above the top of the highest pipe refilling with excavated staff (S.I.NO: 2 Page NO: 21).

4" Dia 4870 48/- P:Rft RS: 2304/-

07⁷ Supplying and fixing lon bib cock of superior quality with o.p. head 1/2" dia (S.I.NO: 15(a) P:15).

1x3 03Nos 811/- P:INO: RS: 633/-



Providing and fixing 24x18" Laboratory Basin in white glazed earthen ware complete with 1/2" dia. C.I. floor trap of approved self cleaning design with a C.I. screwed down gritting with antilever brackets 6" inch built into wall painted white in two coat after a primary coat of red lead paint a pair of 1/2" dia chrome plate pillar traps requisite number of holes in walls & floor for pipe connections and making good in cement concrete 1.2.4. (Standard Pattern) (S.I. NO: 03 Page NO: 3)

1x2 O.Nos 1233/65 P: NO: RS: 1289/-

097 Providing and fixing 6x2 or 6x3" C.I. floor trap of approved self cleaning design with a C.I. screwed down gritting with or without a vent arm complete with and 1/2" making requisite number of holes in walls plinth and floor for pipe connections & making good in c.c. 1.2.4. (S.I. NO: 20 Page NO: 05)

1x2 O.Nos 244/35 P: NO: RS: 489/-

107 Providing and fixing 24x18" beveled edge mirror of belgium glass complete with 1/8" thick hard board and C.P. screws fixed to wooden plate (Superior quality) (S.I. NO: 03(B) P-07)

O1 NO: 982/30 Each RS: 982/-

115 Providing and fixing Full way Gun Metal Valve with wheels threaded or flanged ends with rubber washing 3/4" light Pattern) S.I. NO: 6 (a) Page No: 14

1x2 82 Nos 58/95 Each RS: 118/-



127 Supplying and fixing Fibre Glass Tank of approved quality and design and wall thickness as specified i/c cost of nuts bolts and fixing in plate for of cement concrete 1.3.6. and making connections for in let & out let over flow out let flow pipe at complete 250 Gallons wall thickness 3.5 mm complete (S.I. NO: 03 (a) Page NO: 18)

1x1 O1 NO: 9869/80 P: NO: RS: 9870/-

137 CONSTRUCTION OF Main Hole or inspection chamber for the required dia of circular other of 3-6" 1067 mm depth with wall of D.B. cement mortar 1.3. cement plaster 1.3. 1/2" inside of wall 1" 25 mm thick over trenching & channel i/c fixing C.I. Main Hole cover with traps of clear opening 1' 1" x 1' 1" of 1.75 Cwt embedded in plain & C.C. 1.2.4.

O.Nos 3834/60 P: NO: RS: 7669/-

147 Assembling 1 1/2" Dia Pressure Pipe.

1x70 7070 24/70 P: R2t RS: 5929/-

157 Providing and fixing 1 1/2" dia pressure pipe

1x70 7070 25/01 P: R1t RS: 1751/-

TOTAL RS: 40006/-

ADD: 20% ADO: FE TOTAL RS: 8001/-

RS: 48007/-

S.No. 02

Issued to Mr. Azfar Ali Shah
On charged Rs. 2000/-
Vide D.R No. 16209 001-14/2/11

Azfar Ali Shah
DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

OFFICE OF THE DISTRICT OFFICER (EDUCATION WORKS)
NAUSHAHRO FEROZE

Percentage rate tender and contract for works, I/W hereby tender for the execution, for the Governor of Sindh, (hereinbefore and hereinafter referred to as "Government"), of the work specified in the under written memorandum within the time specified in such memorandum at

A = 52.80% above B = 20.00% above percent above/below the estimated rates interred in schedule 'B' (memorandum) showing items of work to be carried out and in accordance in all respects, with the specifications, designs, drawings and instructions in writing. Referred to in Rule-I here of and in clause-12 of the annexed conditions, of contract and agree that when materials for the work are provided by the Government such materials and the rates to be paid for them shall be as provided in schedule (A) here to.

MEMORANDUM

- (a) GENERAL DESCRIPTION:- PWP-II (P.M.DIRECTIVES (Sponsored by: Syed Zafar Ali Shah, MNA, NA-212) Construction of Two Roomed Primary School Building with C/Wall for existing shelterless Primary School at GPS Sanwal Khan Bhatta Taluka Bhuj
- b) Estimated Cost Rs. 1750000/-
- c) Earnest Money Rs. 35000/-
- d) Security Deposit (i/c earnest Money) Rs. 87500/-
- e) Percentage, if any, to be deducted from Bills Rs. 157500/-
- f) Time allowed for completion of work (05) Months

Azfar Ali Shah
DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

CONTRACTOR UNDERTAKING:

I/We hereby offered the above rates after taking into consideration as per B-I Agreement tender and this memorandum and shall be bound to fill up and complete the printed B-I form tender as to complete the agreement. In case of failing the department will be at liberty to take action against me/us as per clauses of the agreement in B-I agreement form which has been read and accepted by me/us.

Schedule-A: Nil.

Schedule-B: Attached herewith.

Azfar Ali Shah
CONTRACTOR

S.No. 02

Issued to Mr. Mansoor Ahmad V. Ans.

On charged Rs. 200/-

Vide D.R No. 16210 DT-14/2/11

Hearts
14/2/11
DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

OFFICE OF THE DISTRICT OFFICER (EDUCATION WORKS)
NAUSHAHRO FEROZE

Percentage rate tender and contract for works, I/W hereby tender for the execution, for the Governor of Sindh, (hereinbefore and hereinafter referred to as "Government"), of the work specified in the under written memorandum within the time specified in such memorandum at

صاف نہایت ۱۲۰٪ ۵۳٪ percent above/below the estimated rates interred in schedule B-I (memorandum) showing items of work to be carried out and in accordance 17/2/11 respects, with the specifications, designs, drawings and instructions in writing. Referred to in Rule-I here of and in clause-12 of the annexed conditions, of contract and agree that when materials for the work are provided by the Government such materials and the rates to be paid for them shall be as provided in schedule (A) here to.

MEMORANDUM

(a) GENERAL DESCRIPTION:-

PWP-II (P.M.DIRECTIVES (Sponsored by: Sved Zafar Ali Shah, MNA, NA-212)
Construction of Two Roomed Primary School Building with C/Wall for existing shelterless Primary School at 4 ps Samal Ullah Bhatta
Taluka 13/2/11

b) Estimated Cost	Rs. 1750000/-
c) Earnest Money	Rs. 35000/-
d) Security Deposit (i/c earnest Money)	Rs. 87500/-
e) Percentage, if any, to be deducted from Bills	Rs. 157500/-
f) Time allowed for completion of work	(05) Months

Hearts
DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

CONTRACTOR UNDERTAKING :

I/We hereby offered the above rates after taking into consideration as per B-I Agreement tender and this memorandum and shall be bound to fill up and complete the printed B-I form tender as to complete the agreement. In case of failing the department will be at liberty to take action against me/us as per clauses of the agreement in B-I agreement form which has been read and accepted by me/us.

Schedule-A: Nil.

Schedule-B: Attached herewith.

Contractor
CONTRACTOR



**OFFICE OF THE
DISTRICT OFFICER (EDUCATION WORKS)
NAUSHAHRO FEROZE**

Tel # 0242-448988

No.DO(E.W)/T.C/
N.Feroze Dated:

To,

Mr. Muhammad Anwar Makee,
Government Contractor,
P/O Mehrabpur.

SUBJECT: PWP-II (P.M.DIRECTIVES (SPONSORED BY SYED ZAFAR ALI SHAH, MNA, NA-212) CONSTRUCTION OF TWO ROOMED PRIMARY SCHOOL BUILDING WITH C/WALL FOR EXISTING SHELTERLESS PRIMARY SCHOOL AT GPS MAVALI KHSKHELI TALUKA MEHRABPUR.

The rate quoted by you for the above mentioned work: @A-Rs.55.10% above (Fifty Five Point One Zero Percent above & B=19.75% Above Nineteen Point Seven Five Percent above) on schedule of rates Vol-III, Part-II (General) for finished items of works enforced from 1st October 2004 entered in Schedule-B has been approved vide letter No.EDO(W&S)/B.B/741, dated 16-04-2011.

02/- You are requested to please attend this office within (07) days to complete tender documents.

03/- You are requested to please supply to this office a copy of partnership deed/registration of firms and power of Attorney in the name of any partner or employee of the firm to whom you authorized to sign the bills receive payments and instructions in respect of this work.

04/- You are requested to start the work within (07) days after issue of this work order or on the date of taking over the possession of plot/site under supervision of the Deputy District Officer, (Education Works) Mehrabpur.


05/- The stipulated time for completion is (05) months.

06/- Further it should be noted that:

- The work is to be carried out as per PWD specifications.
- No cartage for any material either arranged by you or supplied by the Government will be paid separately.
- No premium will be allowed on non-scheduled items.
- Only Bholari quarry sand will be used in all items involving use of it.


The receipt of this work order by acknowledged.

D.....A
Schedule - B


DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

Copy FWCs to:-

The Executive District Officer, Works & Services Department N.Feroze.
The Deputy District Officer, (Education Works) Mehrabpur.
for information along with copy of Schedule-B. He is required to report the actual date of start of work to this office well in time.


DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

COMPARATIVE STATEMENT

Name of Work: PWP-II (P.M. Directives (Sponsored by: Syed Zafar Ali Shah, MNA, NA-212)
Construction of Two Roomed Primary School Building with C/Wall for existing shelterless Primary
School at GPS Maazli Khaskheli Taluka Mehrabpur.

Estimated Cost Rs: 1778000/-
 of issue: 14-02-2011

Date of opening :- 15-02-2011

N.I.T No. D.O/(E/W/T.C/1535, Dt: 22-12-2010

No.	Amount of Sch: Items	Add: 20% on S.Item	Amount of Carriage	Cost of material	Total	Permissible Limit	Name of Contractor	Rate quoted	Tender cost	Excess/Saving
946324		189265	336650	255736	1727975	A= 55.57% Above	01. Mr. Muhammad Anwar Makee	(A) 55.10% Above	1467749	4541
20616		20% Above 9125		24739	9216	B= 20.00% Above		(B) 19.75% Above	24688	Saving
				6282	9216			(C)	9216	
				1768212	1768212			(D)	6282	
				9463	9463			(E) Diff: of material	255736	
				1777675	1777675				1763671	
				1778000	1778000		02. Mr. Abdul Sattar Korai	(A) 56.20% Above	1478158	5899
								(B) 19.90% Above	24719	Excess
								(C)	9216	
								(D)	6282	
								(E) Diff: of material	255736	
							03. Mr. Abdul Wahid Akhtar Datta	(A) 57.00% Above	1485729	13490
								(B) 20.00% Above	24739	Excess
								(C)	9216	
								(D)	6282	
								(E) Diff: of material	255736	
									1781702	

The rate quoted by Mr. Muhammad Anwar Makee, Government Contractor @Rs.55.10% above & B=19.75% above, is the lowest hence recommended for approval.

Executive District Offi
 Works & Services Department
 Maushahro Feroze

DIVISIONAL ACCOUNT OFFICER
 (EDUCATION WORKS)
 MAUSHAHRO FEROUZE

DISTRICT OFFICER
 (EDUCATION WORKS)
 MAUSHAHRO FEROUZE

S.No. 03

Issued to Mr. Mohammad Anwar Hobece

On charged Rs. 2000/-

Vide D.R No. 162/10-14/2/11

M. Hobece
DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

OFFICE OF THE DISTRICT OFFICER (EDUCATION WORKS)
NAUSHAHRO FEROZE

Percentage rate tender and contract for works, I/W hereby tender for the execution, for the Governor of Sindh, (hereinbefore and hereinafter referred to as "Government"), of the work specified in the under written memorandum within the time specified in such memorandum at

ھڪ ڏينھن جو بارع 25.10/21 جو ٻارو جي 19.25 percent above/below the estimated rates entered in schedule 'B' (memorandum) showing items of work to be carried out and in accordance in all respects, with the specifications, designs, drawings and instructions in writing. Referred to in Rule-I here of and in clause-12 of the annexed conditions, of contract and agree that when materials for the work are provided by the Government such materials and the rates to be paid for them shall be as provided in schedule (A) here to.

MEMORANDUM

(a) GENERAL DESCRIPTION:-

PWP-II (P.M.DIRECTIVES (Sponsored by: Syed Zafar Ali Shah, MNA, NA-212)
Construction of Two Roomed Primary School Building with C/Wall for existing shelterless Primary School at GPS Mawati Blue Abroadly
Taluka MP/PM

b) Estimated Cost	Rs. 1750000/-
c) Earnest Money	Rs. 35000/-
d) Security Deposit (i/c earnest Money)	Rs. 87500/-
e) Percentage, if any, to be deducted from Bills	Rs. 157500/-
f) Time allowed for completion of work	(05) Months

M. Hobece
DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

CONTRACTOR UNDERTAKING:

I/We hereby offered the above rates after taking into consideration as per B-I Agreement tender and this memorandum and shall be bound to fill up and complete the printed B-I form tender as to complete the agreement. In case of failing the department will be at liberty to take action against me/us as per clauses of the agreement in B-I agreement form which has been read and accepted by me/us.

Schedule-A: Nil.

Schedule-B: Attached herewith.

ھڪ ڏينھن جو

NAME OF WORK:-

CONSTRUCTION OF TWO ROOMED BUILDING WITH
COMPOUND WALL IN EXISTING SHELTERLESS PRIMARY
SCHOOL AT GPS MAVALI KHASKHELI TALUKA MEHRABPUR
DISTRICT NAUSHAHRO FEROZE.

Sr.No.	Item of work	Unit	Rate	Qty:	Amount
1.	Excavation in foundation of building bridges and other structure including dag belling dressing refilling around the structure with excavated earth watering and ramming lead upto 5ft(b) in ordinary soil (S.I.No: 18(B) - P/05)				
		3192.0 P.Cft	1306/80 %sft		Rs.4171/- (Rupees One Thousand Three Hundred Six and Eight Paisa)
2.	Cement concrete Bricks or stone Ballast 1 ½ t 2" guage ratio 1.5.10 (S.I.No: 04 - P/16)				
		1067.0 Cft	3213/95 %Cft		Rs.34293/- (Rupees Two Thousand Nine Hundred Thirty five and Ten Paisa)
	Pacca Brick work in foundation and plinth in cement sand mortar ratio 1:6 (S.I.No: 04(i) - P/25)				
		3645.0 Cft	3865/15 %cft		Rs.140884/- (Rupees Three Thousand Eight Hundred Sixty five and fifteen Paisa)
	R.C.C work i/c all labour and material except the cost of steel reinforcement and its labour for bending and binding laying in position. This rate also i/c kinds of forms mould lifting shuttering curing rendering exposed surface R.C Work in roof slab beams columns rafts lintel and other structure ratio 1:2:4 (S.I.No: 6(i) - P/19)				
		1005 P.Cft	114/-		Rs.1144570/- (Rupees One Hundred Fourteen only)
	Fabrication of mild steel reinforcement cement for cement concrete i/c cutting bending laying imposition i/c removal rust from bars (S.I.No: 7 - P/20).				
	Tor Steel	35.88P.Cwt	2772/55		Rs.99479/- (Rupees Twenty Seven Hundred Seventy Two and Fifty Five Paisa)
	Mild Steel	8.98 P.Cwt	2651/55		Rs.23811/- (Rupees Twenty Seven Hundred Seventy Two and Fifty Five Paisa)
	Damp proof course with cement sand and shingle concrete 1:2:4 including of asphaltic mixture (S.I.No: 27 - P/23).				
		392 Sft	1834/75 % Sft		Rs.7192/- (Rupees One thousand Eight Hundred Thirty four and Seventy Five Paisa)
	Filling watering and ramming earth under floor with new surplus earth from foundation lead upto one chain and lift upto 5feet (S.I.No:21 - P/05).				
		2128 Cft	641/30 %0cft		Rs. 1365/- (Rupees One thousand Four Hundred Eight Eight and Thirty Paisa)
	Filling watering and ramming earth under floor with new earth excavation from o: side lead upto one chain and lift upto 5ft (S.I.No:22 - P/05).				
		3152 Cft	1488/30 %0cft		Rs. 4691/- (Rupees One thousand Four Hundred Eight Eight and Thirty Paisa)
0.	Cement concrete Bricks or stone Ballast 1 ½ t 2" guage ratio 1.6.12 (S.I.No: 04(b) - P/17)				
		495.0 Cft	2935/10 %Cft		Rs.14529/- (Rupees Two Thousand Nine Hundred Thirty five and Ten Paisa)
	Pacca Brick work in ground floor in cement sand mortar ratio 1:6 (S.I.No: 09(i) - P/25)				
		2415. Cft	4246/30 %cft		Rs.102548/-

Pacca Brick work an other than building i/c striking of joints upto 2' ft height cement sand mortar 1:6 (S.I.No: 07 - P/25)

638 Cft 4089/- %cft Rs.26088/-
(Rupees Four Thousand Eighty Nine only)

Providing and fixing G.I frame/chowkat of siz 7"x2" or 4 1/2 x3" for door using 20 guage C.I sheet i/c welded hings and fixing at site with necessary hold fasts hings and fixing at site with necessary hold fast filling the cost also i/c all carriage of tools and plants used in making and fixing (S.I.No: 29 - P/98).

a) For Doors 67 P.Sft 113/37 P.Sft Rs. 7596/-
(Rupees One Hundred Thirteen and Thirty Seven Paisa)

b) For Windows 136 P.Rft 122/17 R.Ft Rs.6615/-
(Rupees One Hundred Twenty Two and Seventeen Paisa)

Supplying and fixing in position iro/steel grill of 2"x2" size flat iron of approved design including painting threecoats etc completed weight not to be less than 3.7lbs sq foot of finishing grill (S.I.No:26 - P/97).

495 Sft 115/47 P.Sft Rs. 57158/-
(Rupees One Hundred Fifteen and Forty Seven Paisa)

Preparing painting new surface gurad bars gates railing standard braccess and similar open work three coats (S.I.No: 15 - P/76).

384.48 Sft 414/61 % Sft Rs. 13072/-
(Rupees Six Hundred Ninety Three and Seventy one Paisa)

Making and fixing steel grated doors with 1/6" sheeting i/c angle iron frame 2"x2" 3/8" and 3/4" squire bars 4" centre to with locking arrangement (S.I.No: 24- P/97).

48 Sft 385/76 P.Sft Rs. 18516/-
(Rupees three Hundred Eight Five and Seventy Six Paisa)

Cement plaster 1:6 upto 20" height 1/2" thick (S.I.No: 13(b) - P/58).

6723 Sft 531/41 % Sft Rs. 35727/-
(Rupees Five Hundred Thirty One and Forty one Paisa)

Cement plaster 1:4 upto 20" height 3/8" thick (S.I.No: 11(a) - P/58).

6723 Sft 536/14 % Sft Rs. 36045/-
(Rupees Five Hundred Thirty Six and Forteen Paisa)

Cement plaster 3/4" thick upto 20' height ratio 1:4 (S.I.No: 11(c) - P/58).

581 Sft 779/96 % Sft Rs. 4532/-
(Rupees Five Hundred Thirty Six and Forteen Paisa)

Cement pointing structure of joints of wall ratio 1:2 (S.I.No: 19 - P/59).

2886 Sft 645/37 % Sft Rs. 18625/-
(Rupees Six Hundred Forty five and Thirty seven Paisa)

Providing and laying 1" thick topping cement concrete 1:2:4 including surface finishing and dividing into panels (S.I.No: 16 - P/47).

2" thick 1689 sft 1820/23 %Sft Rs.30744/-
(Rupees One Thousand Eight hundred Twenty and Twenty three Paisa)

1 1/2" thick 1454 sft 1115/18 %Sft Rs.16215/-
(Rupees One three hundrd Ninety Six and Sixty Seven Paisa)

Laying floor of approved with glazed tile 1/4" thick in white cement 1:2 over 3/4" thick cement mortar 1:2 complete (S.I.No: 24 - P/48).

64 Sft 10416/34 % Sft Rs. 8333/-
(Rupees Ten thousand Four Hundred Sixteen and Thirty four Paisa)

White Glazed Tile 1/4" Thick dado jointed in white cement and laid over 1:2 cement sand mortar 3/4" thick including finishing (S.I.No: -- P/50).

64 Sft 10700/69 % Sft Rs. 6848/-
(Rupees Ten thousand Seven Hundred and Sixty Nine Paisa)

Making Notice board made with cement (S.I.No: 01 - P/100).

80 Sft 28/86 P.Sft Rs. 2309/-
(Rupees Twenty Eight and Eighty Six Paisa)

Two Coats of bitumen coating laid hot using 34 lbs for % Sft over roof and blinded with sand at one Cft % Sft (S.I.No: 13 - P/41).

1454 Sft 431/21 % Sft Rs. 6270/-
(Rupees Four Hundred Thirty One and Twenty One Paisa)

Extra labour rate for earth making cement plaster pattas/bend around straight or curved opening and around the edge of roof slabs the width not less than 6" with fine finishing as directed by Engineer Incharge (S.I.No:35 - P/61).

375 Rft 11/25 P.Rft Rs. 4253/-
(Rupees Eleven and Twenty five Paisa)

White wash three coats (S.I.No:26 - P/59).

768 Sft 115/18 % Sft Rs. 885/-
(Rupees One Hundred Fifteen and Eighteen Paisa)

Primary coats of chalk under distempering (S.I.No:23 - P/58).

6723 Sft 58/85 % Sft Rs. 3956/-
(Rupees Fifty Eight and Eight Five Paisa)

Distempering three coats (S.I.No: 24 - P/17).

6723 Sft 263/51 % Sft Rs. 13730/-
(Rupees Two Hundred Sixty three and Fifty One Paisa)

Colour wash two coats (S.I.No: 25 - P/59).

2886 Sft 103/79 % Sft Rs. 2995/-
(Rupees One Hundred Three and Seventy Nine Paisa)

Preparing painting doors and windows any type i/c three coats (S.I.No: 5 (c) - P/76).

328 Sft 693/71 % Sft Rs. 2275/-
(Rupees Six Hundred Ninety Three and Seventy one Paisa)

Preparing painting new surface gurad bars gates railing standard braccs and similar open work three coats (S.I.No: 15 - P/76).

156 Sft 414/61 % Sft Rs. 647/-
(Rupees Six Hundred Ninety Three and Seventy one Paisa)

Total Rs. 946324/-

CONTRACTOR

DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

NAME OF WORK:

R. #	ITEM OF WORK	QTY	RATE	UNIT	AMOUNT
	P/F Squating type white glazed of flushine cistern with internal fitting & flush pipe with cistern with internal fitting & flush pipe with bend and making request numbers of holes in wall plinth & toller for pipe connections and making food in C.C 1,2,4.(A) W.C Pan of non less than 23" clear opening betwvn flushing guns and 03 gallons flushing tank with 4" dia C.I. tape (S.I.No: 1(a) page No:01).	2 Nos:	2362/80	Each	Rs. 4726/-
	P/F in position nylon connections complet with 1/2" dia brass stop cock with pair of brass nuts and lining joints to nylon connections (S.I.No 23- P. No. 06).	2.Nos:	77/85	Each	Rs. 156/-
	P/F 3" dia waste & vent pipe i/c cutting fitting and extra painting to match the colour of the building (S.I. No 13 P-9)	12. P: Rft	90/22.P.Rft		Rs. 1083/-
	P/F 4" dia C.I. Soil & Vent Pipe i/c cutting and fitting and extra painting to match the colour of the building (S.I.No: 1 P. No: 08).	103/4c	12 P:Rft	103/40 P.Rft	Rs. 1241/-
	P/F M.S Clamps of the approved design to 4" dia C.I. Pipe sockets i/c the cost of cutting and making good to wall or M.S bolts and nuts 4" into wall i/c pipe distapee pieces & extra painting to match the colour of the of the Building (S.I. No: 02 page No: 08)	1Nos.	56/75	Each	Rs. 227/-
	P/F 4"x4" dia C.I. Branch of the required degree with access doors rubber washer 3/8" thick bolts & nuts & extra painting to match the colour of the building (s.I.No:4 Page No: 08)	1.No.	201/40	Each	Rs. 201/-

عکمدش

1/4" x 1/2" dia C.I branch of the required degree with access doors rubber
welder 3/8" thick bolts & nuts & extra painting to match the colour of the
building (S.I.No:4: 08)

1 No. 23/80 Each Rs. 234/-

1/4" dia C.I Terminal Guard i/e extra painting to match the colour of the
building (S.I.No:11:P-09)

2 No. 115/1 Each Rs. 230/-

Providing G.I pipes specials & Clamps etc i/e fixing cutting and fitting
complete with and i/e the cost of braking through walls and roof making good
& painting two coats after cleaning the pipe etc with white zink paint with
water to a pressure head of 200 feet and handling (S.I.No:1P-11)

10.0 Rft 25/20 P:Rft Rs. 252/-
10.0 Rft 34/40 P:Rft Rs. 244/-

way gun metal valves with wheels threaded or flanged ends with
washer (S.I.No:1(a) P-14)

1/2" Dia. 1 No. 53/15 Each Rs. 53/-
3/4" Dia. 1 No. 58/95 Each Rs. 59/-

Handle Valve (Chine) (S.I.No:7 P- 14)

1 No. 102/95 Each Rs. 103/-

Long Bib Cock of superior quality with C.P head 1/2" dia (S.I.No: 15 (a)
No: 15)

2 Nos 211/- Each Rs. 422/-

Cancelled /stop cock of superior quality with C.P head 1/2" dia (S.I.No: 14
15)

2 Nos 198/65 Each Rs. 397/-

INTERNAL WATER SUPPLY

Providing G.I Piper & Special etc i/e fixing cutting and fitting complete with
the cost of cutting trench upto 2-1/2 feet deep refilling watering
and disposal of surplus earth within one chain and disposal of surplus and
painting and disposal of surplus earth within one chain and disposal of surplus and
painting two coats of bitumen paint to pipe & special after cleaning and hassian
soaked in a maxphalt composition wrapped tightly round pipes & testing
pressure head of 200 ft and handling. (S.I.No:1page No: 12).

2" Dia 10 Rft 24/30 P:Rft Rs. 243/-
1" dia 10 Rft 33/35 P:Rft Rs. 334/-
1" Dia 10 Rft 44/05 P:Rft Rs. 441/-

عالمو انور ✓

Tank of approved quality and design and wall thickness and cost of nuts and bolts and fixing in plate form of e.e 13.6. and fittings for in-let-out-let & over flow pipes etc complete.

1 No; 9869/801 each
 Total Rs. 9870/-
 Add: 20% above Rs. 20616/-
 G.Total Rs. 41237/-

ORING
 Ring 1-2" dia pressure pipe in Ordinary Soil.
 25/11 P.R.F. Rs. 1751/-

1-2" Dia pressure pipe.
 84/70 P.R.F. Total Rs. 5929/-
 20% above Rs. 7680/-
 G.Total Rs. 15367/-

Electric Items)
 Pumping set 1 H.P mono Block shingle phase 220 volts with 1-1/2" x
 delivery 90" ft head i.e making e.e 13.6 plate form of required size
 with nuts and bolts complete in all respects (S.I.No:21 Page No: 31).
 1 No. 5235/31 Each Rs. 5235/-
 Total Rs. 5235/-
 20% above Rs. 10471/-
 G.Total Rs. 6283/-
 Total (A+B+C) Rs. 40238/-
 Say Rs. 40300/-

مکھداو

CLAUSE - 51.

The contractor will not be allowed to withdraw the tender ask for the return of earnest money before the expiry for period as shown as under commencing from the date of opening of the tender and if it is withdrawn in violation of these conditions their earnest money will be when sanctioning authorities.

- | | | |
|----|----------------------------|------------|
| 1) | District Officer | One Month |
| 2) | Executive District Officer | Two Months |
| 3) | Government | Six Months |

The contractor shall make his own agreement for water for work at site and charged in this respect should be paid by the concerned authority from where he gets will be recovered over gross amount of the work.

Clause-53(a)

Clause-53(b)


Clause-54

Deodar wood obtained from water borne round not less than in girth will be used for all doors and windows leaved and other joinery work etc.

Clause-55

Work will be carried out strictly according to specification contain in Sindh Government Schedule of rates. Volume-I part-II specification effective from October 2004.


✓
CONTRACTOR


DISTRICT OFFICER
(EDUCATION WORKS)
LAUSHAHRO FEROZE

ADDITIONAL CONDITIONS

- 1/ No cartage of any material either arranged by the contractor them selves (contractor himself) or by Government (if any) shall be paid separately.
- 2/ Contractor/Contractors shall have to make his/their own arrangement for palatable water for his work at their own cost. In case he/they request for supply of water by the government, recovery on this account shall be made @ 11/2 of the gross amount of the item of work in which water is used.
- 3/ All material used shall confirm to standard specifications.
- 4/ No premium shall allowed on Non Schedule Item. Only approved Bholari Sand will be used in all items involving use of cement.
- 5/ Any typing error/mistake is subjected to in accordance with new composite schedule of rates 2004.
- 6/ Contractor shall be responsible for arranging to get martial tested at his own cost as directed by the District Officer/Deputy District Officer facing which the tests shall be recovered from their bills.
- 7/ Cement shall be mixed with mechanically operated concrete mixture with due consideration to aggregated cement and water cement ratio.
- 8/ Concrete shall be mixed, placed, vibrated and smoothes furnished in a manner as directed by the District Officer/Deputy District Officer so as to give minimum compasive strength of 3000 Lbs per squire inch.

✓
CONTRACTOR


DISTRICT OFFICER
(EDUCATION WORKS)
ANUSHAHRO FEROZE

S.No. 03

Issued to Mr. Abdul Qattar Khan
On charged Rs 2000/-
Vide D.R No. 16212. 10-14/2/11

Alhaili
DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

OFFICE OF THE DISTRICT OFFICER (EDUCATION WORKS)
NAUSHAHRO FEROZE

Percentage rate tender and contract for works, I/W hereby tender for the execution, for the Governor of Sindh, (hereinbefore and hereinafter referred to as "Government"), of the work specified in the under written memorandum within the time specified in such memorandum at

Rate A. 56.20% above rate B. 19.90% above
percent above/below the estimated rates interred in schedule 'B' (memorandum) showing items of work to be carried out and in accordance in all respects, with the specifications, designs, drawings and instructions in writing. Referred to in Rule-I here of and in clause-12 of the annexed conditions, of contract and agree that when materials for the work are provided by the Government such materials and the rates to be paid for them shall be as provided in schedule (A) here to.

MEMORANDUM

- (a) GENERAL DESCRIPTION:- PWP-II (P.M.DIRECTIVES (Sponsored by: Syed Zafar Ali Shah, MNA, NA-212) Construction of Two Roomed Primary School Building with C/Wall for existing shelterless Primary School at *GPS Marchi Sharbhatly* Taluka *of Pw*
- | | |
|--|---------------|
| b) Estimated Cost | Rs. 1750000/- |
| c) Earnest Money | Rs. 35000/- |
| d) Security Deposit (i/c earnest Money) | Rs. 87500/- |
| e) Percentage, if any, to be deducted from Bills | Rs. 157500/- |
| f) Time allowed for completion of work | (05) Months |

Alhaili
DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

CONTRACTOR UNDERTAKING :

I/We hereby offered the above rates after taking into consideration as per B-I Agreement tender and this memorandum and shall be bound to fill up and complete the printed B-I form tender as to complete the agreement. In case of failing the department will be at liberty to take action against me/us as per clauses of the agreement in B-I agreement form which has been read and accepted by me/us.

Schedule-A: Nil.

Schedule-B: Attached herewith.

Alhaili
CONTRACTOR

S.No. 03

Issued to Mr. Wazir Ahmad & Co.

On charged Rs. 2000/-

Vide D.R No. 16213 01-14/2/2011

Wazir Ahmad
DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

OFFICE OF THE DISTRICT OFFICER (EDUCATION WORKS)
NAUSHAHRO FEROZE

Percentage rate tender and contract for works, I/W hereby tender for the execution, for the Governor of Sindh, (hereinbefore and hereinafter referred to as "Government"), of the work specified in the under written memorandum ~~within the time specified in such memorandum at~~

Wazir Ahmad A = 57.0% Above B = 20.0% Above. percent above/below the estimated rates interred in schedule 'B' (memorandum) showing items of work to be carried out and in accordance in all respects, with the specifications, designs, drawings and instructions in writing. Referred to in Rule-I here of and in clause-12 of the annexed conditions, of contract and agree that when materials for the work are provided by the Government such materials and the rates to be paid for them shall be as provided in schedule (A) here-to.

MEMORANDUM

- (a) GENERAL DESCRIPTION:- PWP-II (P.M.DIRECTIVES (Sponsored by: Syed Zafar Ali Shah, MNA, NA-212)
Construction of Two Roomed Primary School Building with C/Wall for existing shelterless Primary School at GPS Nawal Khan
Taluka MPM
- b) Estimated Cost Rs. 1750000/-
- c) Earnest Money Rs. 35000/-
- d) Security Deposit (i/c earnest Money) Rs. 87500/-
- e) Percentage, if any, to be deducted from Bills Rs. 157500/-
- f) Time allowed for completion of work (05) Months

Wazir Ahmad
DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

CONTRACTOR UNDERTAKING :

I/We hereby offered the above rates after taking into consideration as per B-I Agreement tender and this memorandum and shall be bound to fill up and complete the printed B-I form, tender as to complete the agreement. In case of failing the department will be at liberty to take action against me/us as per clauses of the agreement in B-I agreement form which has been read and accepted by me/us.

Schedule-A: Nil.

Schedule-B: Attached herewith.

Wazir Ahmad
CONTRACTOR

OFFICE OF THE DISTRICT OFFICER (EDUCATION WORKS) WORKS
& SERVICES DEPARTMENT NAUSHAHRO FEROZE.

Tal: # 0242 - 448988

No. DO(E.W)TC/ 601
N/Feroze Dated: 20/4/2011

To,
Mr. Khuda Bux Rajper,
Government Contractor,
P/O Bhiria.

SUBJECT: MPA'S PRIORITY PROGRAMME SPONSORED BY: DR. ABDUL
SATTAR RAJPER, MPA CONSTRUCTION OF ONE CLASS
ROOM & C/WALL IN DISTRICT NAUSHAHRO FEROZE AT
GGPS KHUDA BUX BURIRO (CIVIL WORK) TALUKA BHIRIA.

The rate quoted by you for the above mentioned work: @A-Rs.52.15%
above (Fifty Two Point One Five Percent above & B=19.50% above Nineteen
Point Eight Zero Percent above) on schedule of rates Vol-III. Part-II (General) for
finished items of works enforced from 1st October 2004 entered in Schedule-B has
been approved.

02/- You are requested to please attend this office within (07) days to
complete tender documents.

03/- You are requested to please supply to this office a copy of partnership
deed/registration of firms and power of Attorney in the name of any partner or
employee of the firm to whom you authorized to sign the bills receive payments
and instructions in respect of this work.

04/- You are requested to start the work within (07) days after issue of this
work order or on the date of taking over the possession of plot/site under
supervision of the Deputy District Officer, (Education Works) Bhiria.

05/- The stipulated time for completion is (04) months.

06/- Further it should be noted that:

- a) The work is to be carried out as per PWD specifications.
- b) No cartage for any material either arranged by you or supplied by the
Government will be paid separately.
- c) No premium will be allowed on non-scheduled items.
- d) Only Bholari quarry sand will be used in all items involving use of it.

The receipt of this work order by acknowledged.

D.....A
Schedule - B

[Signature]
DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

Copy FWCs to:-

- The Executive District Officer, Works & Services Department N.Feroze.
- The Deputy District Officer, (Education Works) Bhiria .
for information along with copy of Schedule-B. He is required to report
the actual date of start of work to this office well in time.

[Signature]
DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

COMPARATIVE STATEMENT

Estimated Cost Rs:-1153000/-
 Issue: 14-02-2011

Date of opening :- 15-02-2011

Name of Work: MPA's Priority Programme Sponsored by: Dr. Abdul Sattar Rajper, MPA
Construction of One Class Room & C/Wall in District Naushahro Feroze
at GGPS Khuda Bux Burro (Civil work) Taluka Birria.

N.I.T No. D.O/(E/W)/I.C/1535, Dt-22-12-2010

Amount of Sch: Items	Amount of Cartage	Add: 20% on S. Item & Cartage	Total	Permissible Limit	Name of Contractor	Rate quoted	Tender cost	Excess/Saving
615322	169732	157011	942065		01. Mr. Khuda Bux Rajper	(A) 52.15% Above	936212	5957
20532	20% Above	4107	24639	B=20.00% Above		(B) 19.50% Above	24535	Saving
			163292			(C) Diff. of material	163292	
Contingency			1129996					
G.Total			22600					
Say			1152596					
			1153000					

02. Mr. Malak Sagar Ahmed


(A) 53.95% Above	947288	5223
(B) 20.00% Above	24639	Excess
(C) Diff. of material	163292	
	1135219	

03. Mr. Abdul Chaqor Rajper

(A) 54.00% Above	947596	5520
(B) 19.95% Above	24628	Excess
(C) Diff. of material	163292	
	1135516	

The rate quoted by Mr. Khuda Bux Rajper, Government Contractor
 @Rs. 52.15% above & B=19.50% above, is the lowest hence approved.


 Naushahro Feroze
 District Officer
 (Education Works)
 Naushahro Feroze


 Naushahro Feroze
 District Officer
 (Education Works)
 Naushahro Feroze

S.No. 04

Issued to Mr. Abdul Sattar Rajper
On charged Rs. 1500/-
Vide D.R No. 1624 07-14/2/2011

Heav
DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

OFFICE OF THE DISTRICT OFFICER (EDUCATION WORKS)
NAUSHAHRO FEROZE

Percentage rate tender and contract for works, I/W hereby tender for the execution, for the Governor of Sindh, (hereinbefore and hereinafter referred to as "Government"), of the work specified in the under written memorandum within the time specified in such memorandum. at

PA = 52.15% - 86 - PB 19.50% 83 percent above/below the estimated rates interred in schedule 'B' (memorandum) showing items of work to be carried out and in accordance in all respects, with the specifications, designs, drawings and instructions in writing. Referred to in Rule-I here of and in clause-12 of the annexed conditions, of contract and agree that when materials for the work are provided by the Government such materials and the rates to be paid for them shall be as provided in schedule (A) here to.

MEMORANDUM

(a) GENERAL DESCRIPTION:-

MPA'S PRIORITY PROGRAMME

(Sponsored by Dr. Abdul Sattar Rajper, MPA)

Construction of One Class Room & C/Wall in District

Naushahro Feroze at 44PS Abdul Sattar Rajper

Taluka Bhivya with work

b) Estimated Cost	Rs. 1200000/-
c) Earnest Money	Rs. 24000/-
d) Security Deposit (i/c earnest Money)	Rs. 60000/-
e) Percentage, if any, to be deducted from Bills	Rs. 108000/-
f) Time allowed for completion of work	(04) Months

Heav
DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

CONTRACTOR UNDERTAKING :

I/We hereby offered the above rates after taking into consideration as per B-I Agreement tender and this memorandum and shall be bound to fill up and complete the printed B-I form tender as to complete the agreement. In case of failing the department will be at liberty to take action against me/us as per clauses of the agreement in B-I agreement form which has been read and accepted by me/us.

Schedule-A: Nil.

Schedule-B: Attached herewith.

Heav
CONTRACTOR

NAME OF WORK:-

CONSTRUCTION OF ONE CLASS ROOM & COMPOUND WALL
IN DISTRICT NAUSHAHRO FEROZE AT
R.P.S. Khoda Bux Buvio Taluka Bhalera

Sr. No.	Item of work	Unit	Rate	Qty:	Amount
01.	Excavation in foundation of building bridges and other structure including dag belling dressing refilling around the structure with excavated earth watering and ramming lead upto 5ft(b) in ordinary soil (S.I.No: 18(B) - P/05)	2254.0 P.Cft	1306/80 %sft		Rs.2946/- (Rupees One Thousand Three Hundred Six and Eight Paisa)
02.	Cement concrete Bricks or stone Ballast 1 1/2 t 2" guage ratio 1.5.10 (S.I.No: 04 - P/16)	719.0 Cft	3213/95 %Cft		Rs.23108/- (Rupees Two Thousand Nine Hundred Thirty five and Ten Paisa)
03.	Pacca Brick work in foundation and plinth in cement sand mortar ratio 1:6 (S.I.No: 04(i) - P/25)	2383.0 Cft	3865/15 %cft		Rs.92107/- (Rupees Three Thousand Eight Hundred Sixty five and fifteen Paisa)
04.	R.C.C work i/c all labour and material except the cost of steel reinforcement and its labour for bending and binding laying in position. This rate also i/c kinds of forms mould lifting shuttering curing rending exposed surface R.C Work in roof slab beams columns rafts lintel and other structure ratio 1:2:4 (S.I.No: 6(i) - P/19)	969.0 P.Cft	114/-		Rs.110466/- (Rupees One Hundred Fourteen only)
05.	Fabrication of mild steel reinforcement cement for cement concrete i/c cutting bending laying imposition i/c removal rust from bars (S.I.No: 7 - P/20). Tor Steel	43.26 P.Cwt	2772/55		Rs.119941/- (Rupees Twenty Seven Hundred Seventy Two and Fifty Five Paisa)
06.	Filling watering and ramming earth under floor with new surplus earth from foundation lead upto one chain and lift upto 5feet (S.I.No:21 - P/05).	1503 Cft	641/30 %0cft		Rs. 963/- (Rupees One thousand Four Hundred Eight Eight and Thirty Paisa)
07.	Filling watering and ramming earth under floor with new earth excavation from o: side lead upto one chain and lift upto 5ft (S.I.No:22 - P/05).	1575 Cft	1488/30 %0cft		Rs. 2344/- (Rupees One thousand Four Hundred Eight Eight and Thirty Paisa)
08.	Damp proof course with cement sandand shingle concrete 1:2:4 including of asphaltic mixture (S.I.No: 27 - P/23).	450 Sft	1834/75 % Sft		Rs. 8256/- (Rupees One thousand Eight Hundred Thirty four and Seventy Five Paisa)
09.	Cement concrete Bricks or stone Ballast 1 1/2 t 2" guage ratio 1.6.12 (S.I.No: 04(b) - P/17)	230.0 Cft	2935/10 %Cft		Rs.6751/- (Rupees Two Thousand Nine Hundred Thirty five and Ten Paisa)
10.	Pacca Brick work in ground floor in cement sand mortar ratio 1:6 (S.I.No: 09(i) - P/25)	1311 Cft	4246/30 %cft		Rs.55669/- (Rupees Four Thousand Two Hundred Forty Six and Thirty Paisa)


Agar


11. Pacca Brick work an other than building i/c striking of joints upto 2' ft height cement sand mortar 1:6 (S.I.No: 07 - P/25)
851 Cft 4089/- %cft Rs.34797/-
(Rupees Four Thousand Eighty Nine only)
12. Providing and fixing G.I frame/chowkat of siz 7"x2" or 4 1/2 x3" for door using 20 guage C.I sheet i/c welded hings and fixing at site with necessary hold fasts hings and fixing at site with necessary hold fast filling the cost also i/c all carriage of tools and plants used in making and fixing (S.I.No: 29 - P/98).
- a) For Windows 76 P.Rft 122/17 R.Ft Rs. 9285/-
(Rupees One Hundred Twenty Two and Seventeen Paisa)
- b) For Doors 35 P.Sft 113/37 P.Sft Rs. 3961/-
(Rupees One Hundred Thirteen and Thirty Seven Paisa)
13. Supplying and fixing in position iro/steel grill of 2"x2" size flat iron of approved design including painting threecoats etc completed weight not to be less than 3.7lbs sq foot of finishing grill (S.I.No:26 - P/97).
53 Sft 115/47 P.Sft Rs. 6120/-
(Rupees One Hundred Fifteen and Forty Seven Paisa)
14. 1st Class Deodar wood wrought joinery in doors and windows etc fixed in position i/c chowkats holds fasts hings iron towers bolts handles and cords etc complete (S.I.No: 7 - P/65).
81 Sft 228/38 P.Sft Rs.18499/-
(Rupees Two Hundred Twenty Eight and Thirty Eight Paisa)
15. Cement plaster 1:6 upto 20" height 1/2" thick (S.I.No: 13(b) - P/58).
4462 Sft 531/41 % Sft Rs. 23712/-
(Rupees Five Hundred Thirty One and Forty one Paisa)
16. Cement plaster 1:4 upto 20" height 3/8" thick (S.I.No: 11(a) - P/58).
4030 Sft 536/14 % Sft Rs. 23751/-
(Rupees Five Hundred Thirty Six and Forteen Paisa)
17. Making and fixing steel grated doors with 1/6" sheeting i/c angle iron frame 2"x2" 3/8" and 3/4" squire bars 4" centre to with locking arrangement (S.I.No: 24- P/97).
48 Sft 385/76 P.Sft Rs. 18516/-
(Rupees three Hundred Eight Five and Seventy Six Paisa)
18. Making Notice board made with cement (S.I.No: 01 - P/100).
32 Sft 28/86 P.Sft Rs. 924/-
(Rupees Twenty Eight and Eighty Six Paisa)
19. Cement pointing structure of joints of wall ratio 1:2 (S.I.No: 19 - P/59).
1370 Sft 645/37 % Sft Rs. 8842/-
(Rupees Six Hundred Forty five and Thirty seven Paisa)
20. Cement plaster 3/4" thick upto 20' height ratio 1:4 (S.I.No: 11(c) - P/58).
72 Sft 779/96 % Sft Rs. 562/-
(Rupees Five Hundred Thirty Six and Fourteen Paisa)
21. Cement pointing structure of joints of wall ratio 1:2 (S.I.No: 19 - P/59).
4168 Sft 645/37 % Sft Rs. 26899/-
(Rupees Six Hundred Forty five and Thirty seven Paisa)
22. Providing and laying 1" thick topping cement concrete 1:2:4 including surface finishing and dividing into panels (S.I.No: 16 - P/47).
- a) 2" thick 4658 sft 1820/23 %Sft Rs.8464/-
(Rupees One Thousand Eight hundred Twenty and Twenty three Paisa)
- b) 2" thick 300 sft 1396/67 %Sft Rs.4190/-
(Rupees One three hundred Ninety Six and Sixty Seven Paisa)
- c) 1 1/2" thick 742 sft 1115/18 %Sft Rs.8275/-
(Rupees One three hundred Ninety Six and Sixty Seven Paisa)

23. Two Coats of bitumen coating laid hot using 34 lbs for % Sft over roof and blinded with sand at one Cft % Sft .
814 Sft 431/21 % Sft Rs. 3610/-
(Rupees Four Hundred Thirty One and Twenty One Paisa)
24. Extra labour rate for earth making cement plaster pattas/bend around straight or curved opening and around the edge of roof slabs the width not less than 6" with fine finishing as directed by Engineer Incharge (S.I.No:35 - P/61).
643 Rft 11/25 P.Rft Rs. 7234/-
(Rupees Eleven and Twenty five Paisa)
25. White wash three coats (S.I.No:26 - P/59).
718 Sft 115/18 % Sft Rs. 8270/-
(Rupees One Hundred Fifteen and Eighteen Paisa)
26. Primary coats of chalk under distempering (S.I.No:23 - P/58).
1691 Sft 58/85 % Sft Rs.995/-
(Rupees Fifty Eight and Eight Five Paisa)
27. Preparing painting doors and windows any type i/c three coats (S.I.No: 5 (c) - P/76).
1691 Sft 693/71 % Sft Rs. 4456/-
(Rupees Six Hundred Ninety Three and Seventy one Paisa)
28. White wash two coats (S.I.No:26 (b)- P/60).
6486 Sft 89/74 % Sft Rs. 1860/-
(Rupees Eighty Nine and seventy Four Paisa)
29. Preparing painting new surface gurad bars gates railing standard braccs and similar open work three coats (S.I.No: 15 - P/76).
96 Sft 414/61 % Sft Rs. 398/-
(Rupees Six Hundred Ninety Three and Seventy one Paisa)

Total

Rs. 643049/-


CONTRACTOR


DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

CLAUSE - 51.

The contractor will not be allowed to withdraw the tender ask for the return of earnest money before the expiry for period as shown as under commencing from the date of opening of the tender and if it is withdrawn in violation of these conditions their earnest money will be when sanctioning authorities.

- | | | |
|----|----------------------------|------------|
| 1) | District Officer | One Month |
| 2) | Executive District Officer | Two Months |
| 3) | Government | Six Months |

The contractor shall make his own agreement for water for work at site and charged in this respect should be paid by the concerned authority from where he gets will be recovered over gross amount of the work.

Clause-53(a)


Clause-53(b)


Clause-54

Deodar wood obtained from water borne round not less than in girth will be used for all doors and windows leaved and other joinery work etc.

Clause-55

Work will be carried out strictly according to specification contain in Sindh Government Schedule of rates. Volume-I part-II specification effective from October 2004.


CONTRACTOR


DISTRICT OFFICER
(EDUCATION WORKS)
KASHAHRO FEROZE

ADDITIONAL CONDITIONS

- 1/ No cartage of any material either arranged by the contractor them selves (contractor himself) or by Government (if any) shall be paid separately.
- 2/ Contractor/Contractors shall have to make his/their own arrangement for palatable water for his work at their own cost. In case he/they request for supply of water by the government, recovery on this account shall be made @ 11/2 of the gross amount of the item of work in which water is used.
- 3/ All material used shall confirm to standard specifications.
- 4/ No premium shall allowed on Non Schedule Item. Only approved Bholari Sand will be used in all items involving use of cement.
- 5/ Any typing error/mistake is subjected to in accordance with new composite schedule of rates 2004.
- 6/ Contractor shall be responsible for arranging to get martial tested at his own cost as directed by the District Officer/Deputy District Officer facing which the tests shall be recovered from their bills.
- 7/ Cement shall be mixed with mechanically operated concrete mixture with due consideration to aggregated cement and water cement ratio.
- 8/ Concrete shall be mixed, placed, vibrated and smoothes furnished in a manner as directed by the District Officer/Deputy District Officer so as to give minimum compasive strength of 3000 Lbs per squire inch.

ksu
CONTRACTOR

Naresh
DISTRICT OFFICER
(EDUCATION WORKS)
NAESHAHRO FEROZE

S.No. 04

Issued to Mr. Malik Sajjad Ali
On charged Rs. 1500/-
Vide D.R No. 162/6 D-14/2/2011

Malik
DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

OFFICE OF THE DISTRICT OFFICER (EDUCATION WORKS)
NAUSHAHRO FEROZE

Percentage rate tender and contract for works, I/W hereby tender for the execution, for the Governor of Sindh, (hereinbefore and hereinafter referred to as "Government"), of the work specified in the under written memorandum within the time specified in such memorandum at

Sajjad A-53.95% above PB-20.00% above percent above/below the estimated rates interred in schedule 'B' (memorandum) showing items of work to be carried out and in accordance in all respects, with the specifications, designs, drawings and instructions in writing. Referred to in Rule-I here of and in clause-12 of the annexed conditions of contract and agree that when materials for the work are provided by the Government such materials and the rates to be paid for them shall be as provided in schedule (A) here to.

MEMORANDUM

- (a) GENERAL DESCRIPTION:- MPA'S PRIORITY PROGRAMME
(Sponsored by Dr.Abdul Sattar Rajper, MPA)
Construction of One Class Room & C/Wall in District
Naushahro Feroze at 4-GPs (Under Barrio)
Taluka (Civil Works)
- b) Estimated Cost Rs. 1200000/-
c) Earnest Money Rs. 24000/-
d) Security Deposit (i/c earnest Money) Rs. 60000/-
e) Percentage, if any, to be deducted from Bills Rs. 108000/-
f) Time allowed for completion of work (04) Months

Malik
DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

CONTRACTOR UNDERTAKING :

I/We hereby offered the above rates after taking into consideration as per B-I Agreement tender and this memorandum and shall be bound to fill up and complete the printed B-I form tender as to complete the agreement. In case of failing the department will be at liberty to take action against me/us as per clauses of the agreement in B-I agreement form which has been read and accepted by me/us.

Schedule-A: Nil.

Schedule-B: Attached herewith.

Sajjad
CONTRACTOR

S.No. 04

Issued to Mr. Abdul Ghafar Nijmi
On charged Rs. 1500/-
Vide D.R No. 1625 DT-14/3/2011

Heav
DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

OFFICE OF THE DISTRICT OFFICER (EDUCATION WORKS)
NAUSHAHRO FEROZE

Percentage rate tender and contract for works, I/W hereby tender for the execution, for the Governor of Sindh, (hereinbefore and hereinafter referred to as "Government"), of the work specified in the under written memorandum within the time specified in such memorandum at

Part A - 54.0% & Part B - 18.95% Agn. percent above/below the estimated rates interred in schedule 'B' (memorandum) showing items of work to be carried out and in accordance in all respects, with the specifications, designs, drawings and instructions in writing. Referred to in Rule-I here of and in clause-12 of the annexed conditions, of contract and agree that when materials for the work are provided by the Government such materials and the rates to be paid for them shall be as provided in schedule (A) here to.

MEMORANDUM

(a) GENERAL DESCRIPTION:-

MPA'S PRIORITY PROGRAMME
(Sponsored by Dr. Abdul Sattar Rajper, MPA)
Construction of One Class Room & C/Wall in District
Naushahro Feroze at 99PS Baluch Para Bawira
Taluka Bawira

b) Estimated Cost	Rs. 1200000/-
c) Earnest Money	Rs. 24000/-
d) Security Deposit (i/c earnest Money)	Rs. 60000/-
e) Percentage, if any, to be deducted from Bills	Rs. 108000/-
f) Time allowed for completion of work	(04) Months

Heav
DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

CONTRACTOR UNDERTAKING :

I/We hereby offered the above rates after taking into consideration as per B-I Agreement tender and this memorandum and shall be bound to fill up and complete the printed B-I form tender as to complete the agreement. In case of failing the department will be at liberty to take action against me/us as per clauses of the agreement in B-I agreement form which has been read and accepted by me/us.

Schedule-A: Nil.

Schedule-B: Attached herewith.

CONTRACTOR

OFFICE OF THE DISTRICT OFFICER (EDUCATION WORKS) WORKS
& SERVICES DEPARTMENT NAUSHAHRO FEROZE.

Tal: # 0242 - 448988

No. DO(E.W)TC/186
N/Feroze Dated: 21/2/2011

To,

Mr. Muhammad Anwar Makee,
Government Contractor,
P/O Behlani.

SUBJECT: MPA'S PRIORITY PROGRAMME (SPONSORED BY DR. ABDUL SATTAR RAJPER, MPA) CONSTRUCTION OF ONE CLASS ROOM & C/WALL IN DISTRICT NAUSHAHRO FEROZE AT GGPS MUKHTIARABAD TALUKA MEHRABPUR (CIVIL WORK)

The rate quoted by you for the above mentioned work: @A-Rs.55.10% above (Fifty Five Point One Zero Percent above & B=19.80% above Nineteen Point Eight Zero Percent above) on schedule of rates Vol-III. Part-II (General) for finished items of works enforced from 1st October 2004 entered in Schedule-B has been approved.

02/- You are requested to please attend this office within (07) days to complete tender documents.

03/- You are requested to please supply to this office a copy of partnership deed/registration of firms and power of Attorney in the name of any partner or employee of the firm to whom you authorized to sign the bills receive payments and instructions in respect of this work.

04/- You are requested to start the work within (07) days after issue of this work order or on the date of taking over the possession of plot/site under supervision of the Deputy District Officer, (Education Works) Mehrabpur.

05/- The stipulated time for completion is (04) months.

06/- Further it should be noted that:

- The work is to be carried out as per PWD specifications.
- No cartage for any material either arranged by you or supplied by the Government will be paid separately.
- No premium will be allowed on non-scheduled items.
- Only Bholari quarry sand will be used in all items involving use of it.

The receipt of this work order by acknowledged.

D.....A
Schedule - B

ole
DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

Copy FWCs to:-

- The Executive District Officer, Works & Services Department N.Feroze.
 - The Deputy District Officer, (Education Works) Mehrabpur.
- for information along with copy of Schedule-B. He is required to report the actual date of start of work to this office well in time.

ole
DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

COMPARATIVE STATEMENT

Name of Work: MPA'S PRIORITY PROGRAMME (SPONSORED BY DR. ABDUL SATTAR RAJPER, MPA)
CONSTRUCTION OF ONE CLASS ROOM & C/WALL IN DISTRICT NAUSHAHRO FEROZE AT G.P.S
MUKHTIARABAD TALUKA MEHRABPUR (CIVIL WORK)

Cost Rs: 1160000/-

Date: 14-02-2011

Date of opening :- 15-02-2011

N.I.T No. D/O(E/W)/T.C/1535, Dt: 22-12-2010

Item	Amount of Cartage	Cost of material	Total	Permissible Limit	Name of Contractor	Rate quoted	Tender cost	Excess/Saving
615322	123064	163292	1122482	A= 55.88% Above	01. Mr. Muhammad Anwar Makee	(A) 55.10% Above	954364	4868
20532	20% Above	4107	24639	B=20.00% Above		(B) 19.80% Above	24597	Saving
			1147121			(C) Diff. of material	163292	
Contingency			12306				1142253	
G.Total			1159427					
Say			1160000					


02. M/S JM Contractor & Co


(A) 55.90% Above 959287 76
 (B) 19.90% Above 24618 Excess
 (C) Diff. of material 163292
 1147197

03. M/S Al-Qurban

(A) 56.70% Above 964210 5020
 (B) 20.00% Above 24639 Excess
 (E) Diff. of material 163292
 1152141

The rate quoted by Mr. Muhammad Anwar Makee, Government Contractor
 @Rs.55.10% above & B=19.80% above, is the lowest hence approved.


 DIVISIONAL ACCOUNT OFFICER
 (EDUCATION WORKS)
 NAUSHAHRO FEROZE


 DISTRICT OFFICER
 (EDUCATION WORKS)
 NAUSHAHRO FEROZE

COMPARATIVE STATEMENT

TENDER NO. (05)

(i) Date of issue: 14-02-2011

(ii) Date of opening: 15-02-2011

Name of Work:


MPA'S PRIORITY PROGRAMME (SPONSORED BY DR. ABDUL SATTAR RAJPER, MPA) CONSTRUCTION OF ONE CLASS ROOM & C/WALL IN DISTRICT NAUSHAHRO FEROZE AT GGPS MUKHTIARABAD TALUKA MEHRABPUR (CIVIL WORK)


Estimated Cost: Rs. 1160000/-

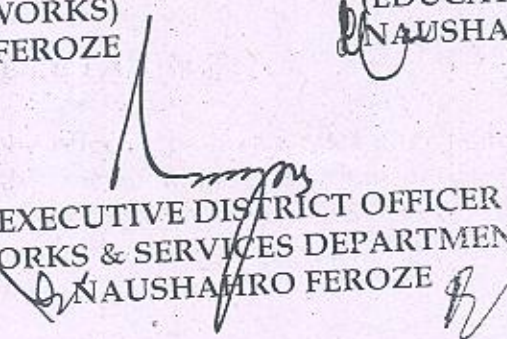
Publicity invited vide this office Notice Invited Tender No.D.O(E.W)/TC/1535, Dated: 22-12-2010

Sr. No.	Name of Contractors	Quoted Amount	Remarks
1	2	3	4
01	Mr. Muhammad Anwar Makee	A=55.10% Above B=19.80% Above	1 st Lowest
02	M/S J.M Contractor & Co.	A=55.90% Above B=19.90% Above	2 nd Lowest
03	M/S Al-Qurban	A=56.70% Above B=20.00% Above	3 rd Lowest

The Tender opened in the presence of the


DIVISIONAL ACCOUNTS OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE


DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE


EXECUTIVE DISTRICT OFFICER
WORKS & SERVICES DEPARTMENT
NAUSHAHRO FEROZE

S.No. 05

Issued to Mr. Mohamud Anwar Mabeau

On charged Rs. 1500/-

Vide D.R No. 16371 D-14/272011

M. A. W.
DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

OFFICE OF THE DISTRICT OFFICER (EDUCATION WORKS)
NAUSHAHRO FEROZE

Percentage rate tender and contract for works, I/W hereby tender for the execution, for the Governor of Sindh, (hereinbefore and hereinafter referred to as "Government"), of the work specified in the under written memorandum within the time specified in such memorandum at

پارے دی 55.10% اور پارے سی 19.80% اور 55.10% percent above/below the estimated rates interred in schedule 'B' (memorandum) showing items of work to be carried out and in accordance for all respects, with the specifications, designs, drawings and instructions in writing. Referred to in Rule-I here of and in clause-12 of the annexed conditions, of contract and agree that when materials for the work are provided by the Government such materials and the rates to be paid for them shall be as provided in schedule (A) here to.

MEMORANDUM

(a) GENERAL DESCRIPTION:-

MPA'S PRIORITY PROGRAMME
(Sponsored by Dr. Abdul Sattar Rajper, MPA)
Construction of One Class Room & C/Wall in District
Naushahro Feroze at GPS Mulehryer abud.
Taluka Mahvalyn.

- | | |
|--|---------------|
| b) Estimated Cost | Rs. 1200000/- |
| c) Earnest Money | Rs. 24000/- |
| d) Security Deposit (i/c earnest Money) | Rs. 60000/- |
| e) Percentage, if any, to be deducted from Bills | Rs. 108000/- |
| f) Time allowed for completion of work | (04) Months |

M. A. W.
DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

CONTRACTOR UNDERTAKING :

I/We hereby offered the above rates after taking into consideration as per B-I Agreement tender and this memorandum and shall be bound to fill up and complete the printed B-I form tender as to complete the agreement. In case of failing the department will be at liberty to take action against me/us as per clauses of the agreement in B-I agreement form which has been read and accepted by me/us.

Schedule-A: Nil.

Schedule-B: Attached herewith.

محمد انور
CONTRACTOR

NAME OF WORK:-

CONSTRUCTION OF SHELTERLESS PRIMARY SCHOOL BUILDING (ONE ROOMED) DISTRICT (MPA;S PRIORITY PROGRAMME) AT GPS MUKHTIARABAD (CIVIL WORK) TALUKA MEHRABPUR.

Sr.No.	Item of work	Unit	Rate	Qty:	Amount
01.	Excavation in foundation of building bridges and other structure including dag belling dressing refilling around the structure with excavated earth watering and ramming lead upto 5ft(b) in ordinary soil (S.I.No: 18(B) - P/05)				
		2254.0 P.Cft	1306/80 %sft		Rs.2946/- (Rupees One Thousand Three Hundred Six and Eight Paisa)
02.	Cement concrete Bricks or stone Ballast 1 ½ t 2" guage ratio 1.5.10 (S.I.No: 04 - P/16)				
		719.0 Cft	3213/95 %Cft		Rs.23108/- (Rupees Two Thousand Nine Hundred Thirty five and Ten Paisa)
03.	Pacca Brick work in foundation and plinth in cement sand mortar ratio 1:6 (S.I.No: 04(i) - P/25)				
		2383.0 Cft	3865/15 %cft		Rs.92107/- (Rupees Three Thousand Eight Hundred Sixty five and fifteen Paisa)
04.	R.C.C work i/c all labour and material except the cost of steel reinforcement and its labour for bending and binding laying in position. This rate also i/c kinds of forms mould lifting shuttering curing rending exposed surface R.C Work in roof slab beams columns rafts lintel and other structure ratio 1:2:4 (S.I.No: 6(i) - P/19)				
		683.0 P.Cft	114/-		Rs.7786/- (Rupees One Hundred Fourteen only)
05.	Fabrication of mild steel reinforcement cement for cement concrete i/c cutting bending laying imposition i/c removal rust from bars (S.I.No: 7 - P/20). Tor Steel				
		30.49 P.Cwt	2772/55		Rs.84435/- (Rupees Twenty Seven Hundred Seventy Two and Fifty Five Paisa)
06.	Filling watering and ramming earth under floor with new surplus earth from foundation lead upto one chain and lift upto 5feet (S.I.No:21 - P/05).				
		1503 Cft	641/30 %0cft		Rs. 963/- (Rupees One thousand Four Hundred Eight Eight and Thirty Paisa)
07.	Filling watering and ramming earth under floor with new earth excavation from o: side lead upto one chain and lift upto 5ft (S.I.No:22 - P/05).				
		1575 Cft	1488/30 %0cft		Rs. 2344/- (Rupees One thousand Four Hundred Eight Eight and Thirty Paisa)
08.	Damp proof course with cement sandand shingle concrete 1:2:4 including of asphaltic mixture (S.I.No: 27 - P/23).				
		450 Sft	1834/75 % Sft		Rs. 8256/- (Rupees One thousand Eight Hundred Thirty four and Seventy Five Paisa)
09.	Cement concrete Bricks or stone Ballast 1 ½ t 2" guage ratio 1.6.12 (S.I.No: 04(b) - P/17)				
		230.0 Cft	2935/10 %Cft		Rs.6751/- (Rupees Two Thousand Nine Hundred Thirty five and Ten Paisa)
10.	Pacca Brick work in ground floor in cement sand mortar ratio 1:6 (S.I.No: 09(i) - P/25)				
		1311 Cft	4246/30 %cft		Rs.55669/- (Rupees Four Thousand Two Hundred Forty Six and Thirty Paisa)
11.	Pacca Brick work an other than building i/c striking of joints upto 2' ft height cement sand mortar 1:6 (S.I.No: 07 - P/25)				
		853 Cft	4089/- %cft		Rs.34879/- (Rupees Four Thousand Eighty Nine only)

12. Providing and fixing G.I frame/chowkat of size 7"x2" or 4 1/2"x3" for door using 20 gauge C.I sheet i/c welded hinges and fixing at site with necessary hold fasts hinges and fixing at site with necessary hold fast filling the cost also i/c all carriage of tools and plants used in making and fixing (S.I.No: 29 - P/98).
- | | | | |
|----------------|--|--------------|------------|
| a) For Windows | 76 P.Rft | 122/17 R.Ft | Rs. 9285/- |
| | (Rupees One Hundred Twenty Two and Seventeen Paisa) | | |
| b) For Doors | 35 P.Sft | 113/37 P.Sft | Rs. 3961/- |
| | (Rupees One Hundred Thirteen and Thirty Seven Paisa) | | |
13. Supplying and fixing in position iron/steel grill of 2"x2" size flat iron of approved design including painting threecoats etc completed weight not to be less than 3.7lbs sq foot of finishing grill (S.I.No:26 - P/97).
- | | | | | |
|--|--|--------|-------|------------|
| | 53 Sft | 115/47 | P.Sft | Rs. 6120/- |
| | (Rupees One Hundred Fifteen and Forty Seven Paisa) | | | |
14. 1st Class Deodar wood wrought joinery in doors and windows etc fixed in position i/c chowkats holds fasts hinges iron towers bolts handles and cords etc complete (S.I.No: 7 - P/65).
- | | | | | |
|--|--|--------|-------|-------------|
| | 81 Sft | 228/38 | P.Sft | Rs. 18499/- |
| | (Rupees Two Hundred Twenty Eight and Thirty Eight Paisa) | | | |
15. Cement plaster 1:6 upto 20" height 1/2" thick (S.I.No: 13(b) - P/58).
- | | | | | |
|--|--|--------|-------|-------------|
| | 4462 Sft | 531/41 | % Sft | Rs. 23712/- |
| | (Rupees Five Hundred Thirty One and Forty one Paisa) | | | |
15. Providing and laying HALLA or pattern tiles glazed 6"x6"x1/4" as floor or wall facing in required floor and pattern of stile specification jointed in white cement and pigment over base of 1:2 gray cement mortar 3/4" thick i/c washing and filling of joint white slurry of white cement and pigment in desired shape with finishing cleaning and cost of wax polling etc complete i/c cutting tiles to proper way (S.I.No: 61 - P/54).
- | | | | | |
|--|--|----------|-------|------------|
| | 278 Sft | 17091/69 | % Sft | Rs.47515/- |
| | (Rupees Thirty Eight Hundred Thirteen and Ninety Five Paisa) | | | |
17. Cement plaster 1:4 upto 20" height 3/8" thick (S.I.No: 11(a) - P/58).
- | | | | | |
|--|--|--------|-------|-------------|
| | 4030 Sft | 536/14 | % Sft | Rs. 23751/- |
| | (Rupees Five Hundred Thirty Six and Forteen Paisa) | | | |
18. Making and fixing steel grated doors with 1/6" sheeting i/c angle iron frame 2"x2" 3/8" and 3/4" square bars 4" centre to with locking arrangement (S.I.No: 24- P/97).
- | | | | | |
|--|---|--------|-------|-------------|
| | 48 Sft | 385/76 | P.Sft | Rs. 18516/- |
| | (Rupees three Hundred Eight Five and Seventy Six Paisa) | | | |
19. Making Notice board made with cement (S.I.No: 01 - P/100).
- | | | | | |
|--|--|-------|-------|-----------|
| | 32 Sft | 28/86 | P.Sft | Rs. 924/- |
| | (Rupees Twenty Eight and Eighty Six Paisa) | | | |
20. Cement plaster 3/4" thick upto 20' height ratio 1:4 (S.I.No: 11(c) - P/58).
- | | | | | |
|--|--|--------|-------|-----------|
| | 72 Sft | 779/96 | % Sft | Rs. 562/- |
| | (Rupees Five Hundred Thirty Six and Forteen Paisa) | | | |
21. Cement pointing structure of joints of wall ratio 1:2 (S.I.No: 19 - P/59).
- | | | | | |
|--|--|--------|-------|-------------|
| | 416 Sft | 645/37 | % Sft | Rs. 26899/- |
| | (Rupees Six Hundred Forty five and Thirty seven Paisa) | | | |
22. Providing and laying 1" thick topping cement concrete 1:2:4 including surface finishing and dividing into panels (S.I.No: 16 - P/47).
- | | | | | |
|------------------------|---|---------|------|-----------|
| a) <u>2" thick</u> | 465 sft | 1820/23 | %Sft | Rs.8464/- |
| | (Rupees One Thousand Eight hundred Twenty and Twenty three Paisa) | | | |
| b) <u>2" thick</u> | 300 sft | 1396/67 | %Sft | Rs.4190/- |
| | (Rupees One three hundred Ninety Six and Sixty Seven Paisa) | | | |
| c) <u>1 1/2" thick</u> | 742 sft | 1115/18 | %Sft | Rs.8275/- |
| | (Rupees One three hundred Ninety Six and Sixty Seven Paisa) | | | |

23. Two Coats of bitumen coating laid hot using 34 lbs for % Sft over roof and blinded with sand at one Cft % Sft.
814 Sft 431/21 % Sft Rs. 3510/-
(Rupees Four Hundred Thirty One and Twenty One Paisa)
24. Laying floor of approved with glazed tile 1/4" thick in white cement 1:2 over 3/4" thick cement mortar 1:2 complete (S.I.No: 24 - P/48).
58 Sft 10416/34 % Sft Rs. 6041/-
(Rupees Ten thousand Four Hundred Sixteen and Thirty four paisa)
25. Extra labour rate for earth making cement plaster pattas/bend around straight or curved opening and around the edge of roof slabs the width not less than 6" with fine finishing as directed by Engineer Incharge (S.I.No:35 - P/61).
643 Rft 11/25 P.Rft Rs. 7234/-
(Rupees Eleven and Twenty five Paisa)
26. White wash three coats (S.I.No:26 - P/59).
718 Sft 115/18 % Sft Rs. 8270/-
(Rupees One Hundred Fifteen and Eighteen Paisa)
27. Colour wash two coats (S.I.No: 25 - P/59).
1748 Sft 103/79 % Sft Rs. 1814/-
(Rupees One Hundred Three and Seventy Nine Paisa)
28. Primary coats of chalk under distempering (S.I.No:23 - P/58).
1691 Sft 58/85 % Sft Rs.995/-
(Rupees Fifty Eight and Eight Five Paisa)
29. Distempering three coats (S.I.No: 24 (B)- P/60).
1691 Sft 204/22 % Sft Rs. 3453/-
(Rupees Two Hundred Sixty three and Seventy Nine Paisa)
30. White wash two coats (S.I.No:26 (b)- P/60).
190 Sft 89/74 % Sft Rs. 1860/-
(Rupees Eighty Nine and seventy Four Paisa)
31. Preparing surface and painting to doors and windows type i/c edges 3 coats new surface (S.I.No: 05(c) - P/76).
190 Sft 978/95 % Sft Rs. 1860/-
(Rupees Nine Hundred Seventy Eight and Ninety Five Paisa)
32. Preparing painting new surface gurd bars gates railing standard braces and similar open work three coats (S.I.No: 15 - P/76).
96 Sft 414/61 % Sft Rs. 398/-
(Rupees Six Hundred Ninety Three and Seventy one Paisa)

Total

Rs. 615322/-

صکھر انز
CONTRACTOR

Heer
DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

Part No

W.S. & S. PILLAI & CO

01. P.F. squatting type white glazed earthen ware W.C Pan with i.c the coat of flushing cistern with internal fitting and flush pipe with and making requisite number of holes in walls plinth and floor for pipe connection and making good in cement concrete 1:2:4 with 4" dia earthen ware trap and plastic thumble (S.I.NO: 1 P-1).

each 1No 2362/80 each Rs. 2363/-

02. P.F 6"x2" or 6"x3" G.I floor trap of the approved self cleaning design with a G.I screwed down gritting with or without a vent arm complete with and W.C making requisite numbers of holes in walls plinth and floor for pipe connection (S.I.NO: 20 P-5).

each 2Nos 224/- each Rs. 289/-

03. P.F in position long bib cock (S.I.NO: 3 P-13).

each 2Nos 211/- each Rs. 422/-

04. P.F in position long stop cock (S.I.NO: 3 P-13).

each 2Nos 211/- each Rs. 422/-

05. P.F G.I pipes special & clamps etc i.c fixing outthru and fitting complete with and i.c the cost of breaking thru walls and roof making good etc painting two coats after clean the pipe etc with white zinc paint with pigment to match the colour of the building and testing with water to a pressure h of 200 feet and handling (S.I.NO: 1 P-11).

P. Rft (i) 20 ft 1/2" dia 25/20 P. Rft Rs. 500/-
P. Rft (ii) 30 ft 3/4" " 34/40 P. Rft Rs. 1032/-
P. Rft (iii) 10" 1" " 46/57 P. Rft Rs. 465/-

06. P.F RCO pipes with collar class "B" and digging the trenches to required depth and fixing in position i.c cutting fitting and jointing with maphalt composition & cement mort 1:1 and testing with water pressure to a head of 4 feet above top of the highest pipe and refilling with excavated stuff (S.I.NO: 2 P-21).

P. Rft 6" dia 12 ft 72/40 P. Rft Rs. 869/-

07. Providing asbestos pipe with collar (padax equivalent) i.c digging the trenches to required depth and fixing to pos and jointing with rubber rings i.c testing to water pressure of 220 feet (S.I.NO: 1 P-21).

P. Rft 20 ft 72/75 P. Rft Rs. 1255/-

PART "C"

01. Boring and fixing 1 1/2" dia pressure pipe
P. Rft 70 ft 84/70 P. Rft Rs. 1751/-

02. Assembling 1 1/2" dia pressure pipe
P. Rft 70 ft 84/70 P. Rft Rs. 5929/-

PART "D"

01. P.F water pumping set 1H.P Mono Block shingle phase 200 with 1 1/2" suction and delivery 40" ft head i.c mal etc 1, 3, 6 platform of required also and fixing with nuts etc complete in all respects (S.I.NO: 21 P-31).

each 1No 5235/31 each Rs. 5235/-

20532/-

Handwritten signature or mark in the bottom left corner.

CLAUSE - 51.

The contractor will not be allowed to withdraw the tender ask for the return of earnest money before the expiry for period as shown as under commencing from the date of opening of the tender and if it is withdrawn in violation of these conditions their earnest money will be when sanctioning authorities.

- | | | |
|----|----------------------------|------------|
| 1) | District Officer | One Month |
| 2) | Executive District Officer | Two Months |
| 3) | Government | Six Months |

The contractor shall make his own agreement for water for work at site and charged in this respect should be paid by the concerned authority from where he gets will be recovered over gross amount of the work.

Clause-53(a)

Clause-53(b)


Clause-54

Deodar wood obtained from water borne round not less than in girth will be used for all doors and windows leaved and other joinery work etc.

Clause-55

Work will be carried out strictly according to specification contain in Sindh Government Schedule of rates. Volume-I part-II specification effective from October 2004.


صاحب کار
CONTRACTOR


DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

ADDITIONAL CONDITIONS

- 1/ No cartage of any material either arranged by the contractor them selves (contractor himself) or by Government (if any) shall be paid separately.
- 2/ Contractor/Contractors shall have to make his/their own arrangement for palatable water for his work at their own cost. In case he/they request for supply of water by the government, recovery on this account shall be made @ 11/2 of the gross amount of the item of work in which water is used.
- 3/ All material used shall confirm to standard specifications.
- 4/ No premium shall allowed on Non Schedule Item. Only approved Bholari Sand will be used in all items involving use of cement.
- 5/ Any typing error/mistake is subjected to in accordance with new composite schedule of rates 2004.
- 6/ Contractor shall be responsible for arranging to get martial tested at his own cost as directed by the District Officer/Deputy District Officer facing which the tests shall be recovered from their bills.
- 7/ Cement shall be mixed with mechanically operated concrete mixture with due consideration to aggregated cement and water cement ratio.
- 8/ Concrete shall be mixed, placed, vibrated and smoothes furnished in a manner as directed by the District Officer/Deputy District Officer so as to give minimum compasive strength of 3000 Lbs per squire inch.

✓ حکمرانو
CONTRACTOR


DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

S.No. 05

Issued to Mr. op. J.M. Coomali Co.

On charged Rs. 1500/-

Vide D.R No. 16217 M-14/2/2011

H. H. H.
DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

OFFICE OF THE DISTRICT OFFICER (EDUCATION WORKS)
NAUSHAHRO FEROZE

Percentage rate tender and contract for works, I/W hereby tender for the execution, for the Governor of Sindh, (hereinbefore and hereinafter referred to as "Government"), of the work specified in the under written memorandum within the time specified in such memorandum at

55.90% AS PART 3 - 19.90% AS PER percent
above/below the estimated rates interred in schedule (memorandum) showing items of work to be carried out in accordance in all respects, with the specifications, designs, drawings and instructions in writing. Referred to in Rule-I here of and in clause-12 of the annexed conditions, of contract and agree that when materials for the work are provided by the Government such materials and the rates to be paid for them shall be as provided in schedule (A) here to.

MEMORANDUM

(a) GENERAL DESCRIPTION:-

MPA'S PRIORITY PROGRAMME

(Sponsored by Dr. Abdul Sattar Rajper, MPA)

Construction of One Class Room & C/Wall in District

Naushahro Feroze at 4-4 PS Duhulab w. chud.

Taluka Shahpur

b) Estimated Cost	Rs. 1200000/-
c) Earnest Money	Rs. 24000/-
d) Security Deposit (i/c earnest Money)	Rs. 60000/-
e) Percentage, if any, to be deducted from Bills	Rs. 108000/-
f) Time allowed for completion of work	(04) Months

H. H. H.
DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

CONTRACTOR UNDERTAKING :

I/We hereby offered the above rates after taking into consideration as per B-I Agreement tender and this memorandum and shall be bound to fill up and complete the printed B-I form tender as to complete the agreement. In case of failing the department will be at liberty to take action against me/us as per clauses of the agreement in B-I agreement form which has been read and accepted by me/us.

Schedule-A: Nil.

Schedule-B: Attached herewith.

CONTRACTOR

S.No. 05

Issued to Mr. Mr. AL-Qurban
On charged Rs. 1500/-
Vide D.R No. 16218 10-14/1/2011

Al-Qurban
DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

OFFICE OF THE DISTRICT OFFICER (EDUCATION WORKS)
NAUSHAHRO FEROZE

Percentage rate tender and contract for works, I/W hereby tender for the execution, for the Governor of Sindh, (hereinbefore and hereinafter referred to as "Government"), of the work specified in the under written memorandum within the time specified in such memorandum at

Rate A - 56.70% above PB - 20.9% above percent above/below the estimated rates entered in schedule 'B' (memorandum) showing items of work to be ~~carried out~~ highest rate rejected and in accordance in all respects, with the specifications, designs, drawings and instructions in writing. Referred to in Rule-I here of and in clause-12 of the annexed conditions, of contract and agree that when materials for the work are provided by the Government such materials and the rates to be paid for them shall be as provided in schedule (A) here to.

MEMORANDUM

(a) GENERAL DESCRIPTION:-

MPA'S PRIORITY PROGRAMME
(Sponsored by Dr. Abdul Sattar Rajper, MPA)
Construction of One Class Room & C/Wall in District
Naushahro Feroze at 44 PS Mulshahabad
Taluka Mulshahabad Civil works

- | | |
|--|---------------|
| b) Estimated Cost | Rs. 1200000/- |
| c) Earnest Money | Rs. 24000/- |
| d) Security Deposit (i/c earnest Money) | Rs. 60000/- |
| e) Percentage, if any, to be deducted from Bills | Rs. 108000/- |
| f) Time allowed for completion of work | (04) Months |

Al-Qurban
DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

CONTRACTOR UNDERTAKING :

I/We hereby offered the above rates after taking into consideration as per B-I Agreement tender and this memorandum and shall be bound to fill up and complete the printed B-I form tender as to complete the agreement. In case of failing the department will be at liberty to take action against me/us as per clauses of the agreement in B-I agreement form which has been read and accepted by me/us.

Schedule-A: Nil.

Schedule-B: Attached herewith.

Al-Qurban
CONTRACTOR

OFFICE OF THE DISTRICT OFFICER (EDUCATION WORKS) WORKS
& SERVICES DEPARTMENT NAUSHAHRO FEROZE.

Tal: # 0242 - 448988

No. DO(E.W)TC/188
N/Feroze Dated: 21/2/2011

To,

Mr. Khair Muhammad Rajper,
Government Contractor,
P/O Bhiria:

SUBJECT: MPA'S PRIORITY PROGRAMME SPONSORED BY: DR. ABDUL SATTAR RAJPER, MPA CONSTRUCTION OF C/WALL & MAINTENANCE/REPAIR OF SCHOOL BUILDING AT GPS JAAT KHAN RAJPER TALUKA BHIRIA (CIVIL WORK).

The rate quoted by you for the above mentioned work: @A-Rs.54.90% above (Fifty Four Point Nine Zero Percent above & B=19.80% above Nineteen Point Eight Zero percent above) on schedule of rates Vol-III. Part-II (General) for finished items of works enforced from 1st October 2004 entered in Schedule-B has been approved.

02/- You are requested to please attend this office within (07) days to complete tender documents.

03/- You are requested to please supply to this office a copy of partnership deed/registration of firms and power of Attorney in the name of any partner or employee of the firm to whom you authorized to sign the bills receive payments and instructions in respect of this work.

04/- You are requested to start the work within (07) days after issue of this work order or on the date of taking over the possession of plot/site under supervision of the Deputy District Officer, (Education Works) Bhiria.

05/- The stipulated time for completion is (03) months.

06/- Further it should be noted that:


- The work is to be carried out as per PWD specifications.
- No cartage for any material either arranged by you or supplied by the Government will be paid separately.
- No premium will be allowed on non-scheduled items.
- Only Bholari quarry sand will be used in all items involving use of it.


The receipt of this work order by acknowledged.

D.....A
Schedule - B

Copy FWCs to:-

The Executive District Officer, Works & Services Department N.Feroze.
The Deputy District Officer, (Education Works) Bhiria.
for information along with copy of Schedule-B. He is required to report the actual date of start of work to this office well in time.


DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE


DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

COMPARATIVE STATEMENT

Name of Work: MPA's Priority Programme Sponsored by: Dr. Abdul Sattar Raipor, MPA
Construction of C/Wall & Maintenance/Repair of School Building at GPS Jant Khan Raipor
Talika Bhirra (Civil work).

Estimated Cost Rs: 700300/-

Date of issue: 14-02-2011

Date of opening :- 15-02-2011

N.I.T No. D.O/(E.W)/T.C/1535, Dt: 22-12-2010

Sr. No.	Amount of Sch. Items	Amount of Cartage	Add: 20% on S.Item & Cartage	Total	Permissible Limit	Name of Contractor	Rate quoted	Tender cost	Excess/Saving
A	359353	110848	94040	564241	A= 57.01% Above	01. Mr. Khair Muhammad Raipor	(A) 54.90% Above	556638	7666
B	31612	20% Above	6322	37934	B=20.00% Above		(B) 19.80% Above	37871	Saving
C	Diff. of material			95479			(C) Diff. of material	95479	
				697654				689988	
D	Contingency			2615					
	G.Total			700269					
	Say			700300					

02. Mr. Sadaqut Ali

(A) 58.50% Above 569575 5334
 (B) 20.00% Above 37934 Excess
 (C) Diff. of material 95479
 702988

03. Mr. Faiz Muhammad Raipor

(A) 58.90% Above 571012 6740
 (B) 19.90% Above 37903 Excess
 (C) Diff. of material 95479
 704394

The rate quoted by Mr. Khair Muhammad Raipor, Government Contractor @Rs. 54.90% above & B=19.80% above, is the lowest hence approved.



District Officer
 (EDUCATION WORKS)
 NAUSI AHRO FEROZE

COMPARATIVE STATEMENT

TENDER NO. (07)

(i) Date of issue: 14-02-2011

(ii) Date of opening: 15-02-2011

Name of Work:

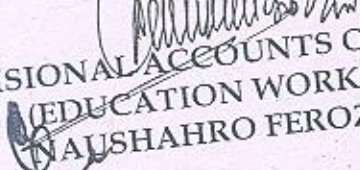
MPA'S PRIORITY PROGRAMME (SPONSORED BY DR. ABDUL SATTAR RAJPER, MPA) CONSTRUCTION OF COMPOUND WALL & MAINTANCE/REPAIR OF SCHOOL BUILDING AT GPS JAAT KHNA RAJPER TALUKA BHIRIA (CIVIL WORK)


Estimated Cost: **Rs. 700,000/-**


No.D.O(E.W)/TC/34, Dated: 10/1/2011
Publicity invited vide this office Notice Invited Tender

Sr. No.	Name of Contractors	Quoted Amount	Remarks
1	2	3	4
01	Mr. Khair Muhammad Rajper	A=54.90% Above B=19.80% Above	1 st Lowest
02	Mr. Sadaqat Ali	A=58.50% Above B=20.00% Above	2 nd Lowest
03	Mr. Faiz Muhammad Rajper	A=58.90% Above B=19.90% Above	3 rd Lowest

The Tender opened in the presence of the


DIVISIONAL ACCOUNTS OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE


DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE


EXECUTIVE DISTRICT OFFICER
WORKS & SERVICES DEPARTMENT
NAUSHAHRO FEROZE

S.No. 07

Issued to Mr. Muhammad Sajid
On charged Rs. 1000/-
Vide D.R No. 162/9 D-14/2/2011

Muhammad Sajid
DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

OFFICE OF THE DISTRICT OFFICER (EDUCATION WORKS)
NAUSHAHRO FEROZE

Percentage rate tender and contract for works, I/W hereby tender for the execution, for the Governor of Sindh, (hereinbefore and hereinafter referred to as "Government"), of the work specified in the under written memorandum within the time specified in such memorandum at

Muhammad Sajid Part A = 54.90% above P.B 19.80% above percent
above/below the estimated rates interred in schedule "B" (memorandum) showing items of work to be carried out and in accordance in all respects with the specifications, designs, drawings and instructions in writing. Referred to in Rule-1 here of and in clause-12 of the annexed conditions, of contract and agree that when materials for the work are provided by the Government such materials and the rates to be paid for them shall be as provided in schedule (A) here to.

MEMORANDUM

(a) GENERAL DESCRIPTION:-

MPA'S PRIORITY PROGRAMME
(Sponsored by Dr. Abdul Sattar Rajper, MPA)
Construction of C/Wall & M&R of School Building at
Jaat Khan Rajper (Civil work) Taluka Bhiria

b) Estimated Cost	Rs. 700000/-
c) Earnest Money	Rs. 14000/-
d) Security Deposit (i/c earnest Money)	Rs. 35000/-
e) Percentage, if any, to be deducted from Bills	Rs. 63000/-
f) Time allowed for completion of work	(03) Months

Muhammad Sajid
DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

CONTRACTOR UNDERTAKING :

I/We hereby offered the above rates after taking into consideration as per B-I Agreement tender and this memorandum and shall be bound to fill up and complete the printed B-I form tender as to complete the agreement. In case of failing the department will be at liberty to take action against me/us as per clauses of the agreement in B-I agreement form which has been read and accepted by me/us.

Schedule-A: Nil.

Schedule-B: Attached herewith.

Muhammad Sajid
CONTRACTOR

SCHEDULE "B"

Name of work:- construction of compound wall & M&R of school building at Jeat Khan Rajer (Civil) work Malak Gbiria District N. Perose.

S.NO:	ITEM OF WORK	QTY:	RATE	UNIT	AMOUNT
001 COMPOUND WALL.					
01.	Excavation in foundation of building bridges and other structures i.e dogbelling dressing refilling around the structure with excavated earth watering and ramming lead upto one chain and lift upto five feet (S.I.NO: 18 P-4).	1075	1306/80	%cft	Rs. 1405/-
02.	Cement concrete brick or stone ballast 1 1/2" to 2" gauge ratio 1:2:10 (S.I.NO: 2 P-23).	356	3213/95	%cft	Rs. 11442/-
03.	Pucca brick work in foundation and plinth in cement sand mortar ratio 1:6 (S.I.NO: 4 P-23).	1279	3865/15	%cft	Rs. 49435/-
04.	D.P.C with cement sand and shingle concrete 1:2:4 i.e two coats of asphaltic mixture 3" thick (S.I.NO: 27 P-22).	394	1834/75	%Sft	Rs. 7229/-
05.	RCC work i.e all labour and material except the cost of steel reinforcement and its labour for bending and binding which will be paid separately. This rate also i.e all kinds of forms moulds lifting shuttering curring and rendering and finishing R.C work in roofslab beams col: rafters lintels and other structural members laid in situ or precast laid in position complete in all respects 1:2:4 (S.I.NO: 6 P-17).	44	114/-	P.cft	Rs. 5016/-
06.	Fabrication of mild steel reinforcement for cement concrete i.e cutting bending laying in position making joints and fastening i.e cost of binding wire also i.e removal of rust from bare (S.I.NO: 7 P-19).	1.964	2772/55	P.cwt	Rs. 5446/-
07.	Pucca brick work other than building i.e striking of joints in cement sand mortar ratio 1:6 (S.I.NO: 7 P-25).	670	4089/-	%cft	Rs. 27396/-

O1 NO: 5235/31 P.NO: Rs. 5235/-

[Signature]
CONTRACTOR.

TOTAL Rs. 31612/-

08. cement plaster 1/2" thick upto 20' height ratio 1:6 (S.I.NO:13 P-57).

1808

531/41

%Sft

Rs.9608/-

09. cement plaster 3/8" thick upto 20' height ratio 1:4 (S.I.NO:11 P-57).

1808

Rs.536/14

%Sft

Rs.9693/-

10. cement plaster 3/4" thick upto 20' height ratio 1:4 (S.I.NO:11 P-57).

1050

Rs.779/96

%Sft

Rs.8189/-

11. cement pointing struck joints on wall 1:2 (S.I.NO:19 P-59).

1575

645/37

%Sft

Rs.10165/-

12. Making and fixing steel grated door with 1/16" thick sheeting i.o angle iron frame 2"x2"x3/8" and 3/4" sq. bars 4" centre to centre with locking arrangement (S.I.NO:24 P-97).

48

385/76

P. Sft

Rs.18916/-

13. extra labour for making cement plaster gattas/bend around straight or curved opening around the edges of roof slab width not less than 6" with fine finishing as directed by the engineer Incharge (S.I.NO:35 P-61).

350

11/25

P. Rft

Rs.3933/-

14. colour washing of two coats (S.I.NO:25 P-59).

4433

103/79

%Sft

Rs.4601/-

15. Preparing painting new surface guard bars gates iron bars grating railing i.o standres braces etc work. (S.I.NO:5 P-76).

96

414/61

%Sft

Rs.398/-

Total:-

Rs.172474/-

[Signature]
CONTRACTOR

[Signature]
DISTRICT OFFICER
EDUCATION WORKS
NAUSHAH NO. FERDZE

[Signature]
CONTRACTOR

01 NO:

5235/31

P.NO:

Rs. 5235/-

TOTAL

Rs. 31612/-

(B) MAINTENANCE AND REPAIRS

01. dismantling cement concrete reinforced separating reinforcement from concrete cleaning and straightening the same (S.I.NO: 20 P-11).

57 2613/60 %ft Rs. 1490/-

02. dismantling brick work in lime or cement mortar (S.I.NO: 13 P-11).

47 617/10 %ft Rs. 290/-

03. dismantling cement concrete plain 1:2:4 (S.I.NO: 19 P-11).

234 1597/20 %ft Rs. 3737/-

04. removing door with chowkats (S.I.NO: 32 P-13).

04 82/28 P.No Rs. 329/-

05. removing windows and sky light with chowkats (S.I.NO: 32 P-13).

06 492/90 P.No Rs. 359/-

06. removing cement or lime plaster (S.I.NO: 53 P-14).

3182 58/08 %Sft Rs. 1848/-

07. cement concrete brick or stone ballast 1 1/2" to 2" gauge ratio 1:5:10 (S.I.NO: 4 P-16).

423 3213/95 %ft Rs. 13595/-

08. Pucca brick work in foundation and plinth in cement s and mortar ratio 1:6 (S.I.NO: 5 P-25).

258 3865/15 %Sft Rs. 9972/-

09. RCC work inc all labour and material except the cost of steel reinforcement and its labour for bending and binding which will be paid separately. This rate also inc all kinds of forms moulds lifting shuttering (S.I.NO: 6 P-18).

69 114/- P.Cft Rs. 7866/-

10. fabrication of mild steel reinforcement for cement concrete i.e cutting bending laying in position making joints and fastening i.e cost of binding wire also removal of rust from bars (S.I.NO: 7 P-19).

3.08 2772/55 P.Cwt Rs. 8540/-

[Handwritten signature]

[Handwritten signature]
CONTRACTOR

01 NO: 5235/31 P.NO: Rs: 5235/-

TOTAL Rs. 31612/-

(8) 2" THICK.

77 1286/67 %Sft Rs. 1075/-

(10) 1 1/2" THICK.

1207 1115/18 %Sft Rs. 13450/-

19. ~~two~~ coat of bitumen coating laid hot using 3A1bz for %Sft over roof and blinded with sand at one cft per %Sft (S.I.NO: 13 P-42).

1400 431/21 %Sft Rs. 6036/-

20. Making Notice made with cement (S.I.NO: 1 P-100).

64 28/86 P.Sft Rs. 1847/-

21. white washing of three coats (S.I.NO: 26 P-59).

1563 115/13 %Sft Rs. 1000/-

22. primary coat of chalk under distemping (S.I.NO: 23 P-58).

343 58/85 %Sft Rs. 2142/-

23. distemping of three coats (S.I.NO: 24 P-59).

3639 263/51 %Sft Rs. 9589/-

24. preparing surpainting to doors and windows any type three coats i.e surface (S.I.NO: 5 P-76).

326 970/95 %Sft Rs. 3191/-

25. colour washing of two coats (S.I.NO: 25 P-59).

724 103/79 %Sft Rs. 751/-

Total: - Rs. 197867/-

[Signature]
CONTRACTOR

[Signature]
DISTRICT OFFICER
EDUCATION WORKS
NALSHAH RD BHOJWAR

[Signature]
CONTRACTOR

O1 NO: 5235/31 P.NO: Rs: 5235/-

TOTAL

Rs. 31612/-

con brick work in ground floor in cement sand
ratio 1:6 (S.I.NO:5 P-25).

05 4246/30 %Sft Rs.212/-

12. P.F G.I Frames/Chowkats of size 7"x2" or 4 1/2"x3"
for door using 20 gauge G.I sheet i.e welded hinges and fixing
of site with necessary hold fasts filling with cement sand
slurry of ratio 1:6 and repairing the jambs the cost of all
carriage of tools and plants used in making and fixing
(S.I.NO:28 P-98).

Door chowkats

68 113/37 P. Rft Rs.7709/-

Windows chowkats.

102 122/17 P. Rft Rs.12461/-

13. S.F in position iron/steel grill of 3/4" size flat
iron of approved design i.e painting three coats etc compl:
wt:nt to be less than 3.7lbs/sq. floor of finishing of
grill (S.I.NO:26 P-97).

61 115/47 P. SFT Rs.7044/-

14. cement plaster 1/2" thick upto 20' height 1:6
(S.I.NO:11 P-59).

144 Rs.531/41 %Sft Rs.765/-

15. cement plaster 3/8" thick upto 20' height ratio
1:4 (S.I.NO:11 P-59).

144 536/14 %Sft Rs.772/-

16. cement plaster 3/4" thick upto 20' height ratio 1:4
(S.I.NO:11 P-59).

4460 @772/86 %Sft Rs.34786/-

17. 1st class deodar wood wrought joinery in doors and
windows esp fixed in position i.e chowkats hold fasts hinges
iron tower bolts handles and cords with necessary hold fasts
(S.I.NO:7 P-64).

134 228/33 P. SFT Rs.30602/-

18. P/L 1" thick topping cement concrete 1:2 1/4 i.e surface
finishing and dividing into pannels (S.I.NO:16 P-46).

8A) 3" THICK

888 1820/23 %Sft Rs.15599/-

Chintan

[Signature]

CONTRACTOR

01 NO: 5235/31 P.NO: Rs: 5235/-

TOTAL Rs. 31612/-

WATER SUPPLY & SANITARY FITTINGS.

Eps Jant Khom Rajper Rd, Bkima

S.NO:	ITEM OF WORK.	QTY:	RATE	UNIT	AMOUNT.
1.	P/F saquating type white glazed of flushing cistern with internal fitting & flush pipe with cistern with internal fitting & flush pipe with bend and making requisite number of holes in wall plinth & floor for pipe connections and making good in C.C 1:2:4 (A) W.C pan of not less than 23" cleat opening between flushing rims and 03 gllons flushing tank with 4" dia C.I trape(S.I.NO:1-a-P/01).	02 NO:	2069/10	F.NO:	Rs: 4138/=
2.	S/F long bib cock of superior quality with C.P head 1/2" dia (S.I.NO:15-a-P/15).	04 NO:	211/=	F.NO:	844/=
3.	S/F canceled/stop cock of superior quality with C.P ead 1/2" dia.(S.I.NO:14-P/15).	02	198/65	F.NO:	397/=
4.	Providing G.I pipes & special clamps etc i/c fixing cutting and fitting complete with and i/c the cost of bracking through walls and roof making good etc painting two coats after cleaning the pipes etc with white zinks paint with water to a preasure head of 200'ft and handling.(S.I.NO:1-P/11).	40 Rft	25/20	PRFT	Rs: 1008/=
		45 Rft	34/40	PRFT	Rs: 1548/=
5.	S/F Fiber glass tank of approved quality and design and walls thinkness and specified i/c cost of nuts and bolts and fixing in plate from of CC 1:3:6 and making connections for in-lete @ over flow pipes etc complete.(S.I.NO:1-P/)250 Gallons.	01	9869/80	P.NO:	Rs: 9870/=
6.	Providing R.C.C. pipes and collars of class "A" and fitting in french i/c cutting fitting and jointing with maxphalt composition and cement mortar 1:1 i/c testing with water of a head 4.5m or 5ft.(S.I.NO: P/)	12 Rft	72/40	PRFT	Rs: 864/=
7.	Boarding and fitting of 2" dia pressure pipe in ordinary wall	10 Rft	10/01	PRFT	Rs: 100/=
8.	Assembling of 1" dia pressure pipe	10 Rft	10/01	PRFT	Rs: 100/=
9.	P/F water pumping and 1 1/2" dia black sludge pump 200v/110v with 1 1/2" suction and delivery 90"ft head i/c making CC 1:3:6 plate form of required size and fixing with nuts and bolts complete in all respect.(S.I.NO:21-P/51).	01 NO:	5235/31	P.NO:	Rs: 5235/=

[Signature]
CONTRACTOR

TOTAL Rs: 31612/=

CLAUSE - 51.

The contractor will not be allowed to withdraw the tender ask for the return of earnest money before the expiry for period as shown as under commencing from the date of opening of the tender and if it is withdrawn in violation of these conditions their earnest money will be when sanctioning authorities.

- | | | |
|----|----------------------------|------------|
| 1) | District Officer | One Month |
| 2) | Executive District Officer | Two Months |
| 3) | Government | Six Months |

The contractor shall make his own agreement for water for work at site and charged in this respect should be paid by the concerned authority from where he gets will be recovered over gross amount of the work.

Clause-53(a)


Clause-53(b)


Clause-54

Deodar wood obtained from water borne round not less than in girth will be used for all doors and windows leaved and other joinery work etc.

Clause-55

Work will be carried out strictly according to specification contain in Sindh Government Schedule of rates. Volume-I part-II specification effective from October 2004.


CONTRACTOR


DISTRICT OFFICER
(EDUCATION WORKS)
KASHAHRO FEROZE

ADDITIONAL CONDITIONS

- 1/ No cartage of any material, either arranged by the contractor them selves (contractor himself) or by Government (if any) shall be paid separately.
- 2/ Contractor/Contractors shall have to make his/their own arrangement for palatable water for his work at their own cost. In case he/they request for supply of water by the government, recovery on this account shall be made @ 11/2 of the gross amount of the item of work in which water is used.
- 3/ All material used shall confirm to standard specifications.
- 4/ No premium shall allowed on Non Schedule Item. Only approved Bholari Sand will be used in all items involving use of cement.
- 5/ Any typing error/mistake is subjected to in accordance with new composite schedule of rates 2004.
- 6/ Contractor shall be responsible for arranging to get martial tested at his own cost as directed by the District Officer/Deputy District Officer facing which the tests shall be recovered from their bills.
- 7/ Cement shall be mixed with mechanically operated concrete mixture with due consideration to aggregated cement and water cement ratio.
- 8/ Concrete shall be mixed, placed, vibrated and smoothes furnished in a manner as directed by the District Officer/Deputy District Officer so as to give minimum compasive strength of 3000 Lbs per squire inch.

[Handwritten Signature]
CONTRACTOR

[Handwritten Signature]
DISTICT OFFICER
(EDUCATION WORKS)
LAUSHAHRO FEROZE

S.No. 07.

Issued to Mr. Sadequl ch.

On charged Rs. 1000/-

Vide D.R No. 16220 D-14/2/211

F. H. W.
DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

OFFICE OF THE DISTRICT OFFICER (EDUCATION WORKS)
NAUSHAHRO FEROZE

Percentage rate tender and contract for works, I/W hereby tender for the execution, for the Governor of Sindh, (hereinbefore and hereinafter referred to as "Government"), of the work specified in the under written memorandum within the time specified in such memorandum at

PA 58.50% PB-207.1200. percent
above/below the estimated rates entered in schedule B (Memorandum) showing items of work to be carried out and in accordance in all respects, with the specifications, designs, drawings and instructions in writing. Referred to in Rule-I here of and in clause-12 of the annexed conditions, of contract and agree that when materials for the work are provided by the Government such materials and the rates to be paid for them shall be as provided in schedule (A) here to.

MEMORANDUM

(a) GENERAL DESCRIPTION:- MPA'S PRIORITY PROGRAMME
(Sponsored by Dr. Abdul Sattar Rajper, MPA)
Construction of C/Wall & M&R of School Building at
Jaat Khan Rajper (Civil work) Taluka Bhiria.

b) Estimated Cost	Rs. 700000/-
c) Earnest Money	Rs. 14000/-
d) Security Deposit (i/c earnest Money)	Rs. 35000/-
e) Percentage, if any, to be deducted from Bills	Rs. 63000/-
f) Time allowed for completion of work	(03) Months

F. H. W.
DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

CONTRACTOR UNDERTAKING :

I/We hereby offered the above rates after taking into consideration as per B-I Agreement tender and this memorandum and shall be bound to fill up and complete the printed B-I form tender as to complete the agreement. In case of failing the department will be at liberty to take action against me/us as per clauses of the agreement in B-I agreement form which has been read and accepted by me/us.

Schedule-A: Nil.

Schedule-B: Attached herewith.

Sadequl ch.
CONTRACTOR

Issued to Mr. Faiz Mohiuddin Rajper
 On charged Rs. 1000/-
 Vide D.R No. 1622 10-19/2/2011

Faiz Mohiuddin
 DISTRICT OFFICER
 (EDUCATION WORKS)
 NAUSHAHRO FEROZE

**OFFICE OF THE DISTRICT OFFICER (EDUCATION WORKS)
 NAUSHAHRO FEROZE**

Percentage rate tender and contract for works, I/W hereby tender for the execution, for the Governor of Sindh, (hereinbefore and hereinafter referred to as "Government"), of the work specified in the under written memorandum within the time specified in such memorandum at

18.90% 31.58.90/518.16 percent above/below the estimated rates entered in schedule (memorandum) showing items of work to be carried out and in accordance in all respects, with the specifications, designs, drawings and instructions in writing. Referred to in Rule-I here of and in clause-12 of the annexed conditions, of contract and agree that when materials for the work are provided by the Government such materials and the rates to be paid for them shall be as provided in schedule (A) here to.

MEMORANDUM

(a) GENERAL DESCRIPTION:-

MPA'S PRIORITY PROGRAMME
 (Sponsored by Dr. Abdul Sattar Rajper, MPA)
 Construction of C/Wall & M&R of School Building at
 Jaat Khan Rajper (Civil work) Taluka Bhiria.

b) Estimated Cost	Rs. 700000/-
c) Earnest Money	Rs. 14000/-
d) Security Deposit (i/c earnest Money)	Rs. 35000/-
e) Percentage, if any, to be deducted from Bills	Rs. 63000/-
f) Time allowed for completion of work	(03) Months

CONTRACTOR UNDERTAKING:

I/We hereby offered the above rates after taking into consideration as per B-I Agreement tender and this memorandum and shall be bound to fill up and complete the printed B-I form tender as to complete the agreement. In case of failing the department will be at liberty to take action against me/us as per clauses of the agreement in B-I agreement form which has been read and accepted by me/us.

Schedule-A: Nil.

Schedule-B: Attached herewith.

Faiz Mohiuddin
 DISTRICT OFFICER
 (EDUCATION WORKS)
 NAUSHAHRO FEROZE

Faiz Mohiuddin
 CONTRACTOR

OFFICE OF THE DISTRICT OFFICER (EDUCATION WORKS) WORKS
& SERVICES DEPARTMENT NAUSHAHRO FEROZE.

Tel: # 0242 - 448988

No. DO(EW)TC/18
N/Feroze Dated: 20/10/2004

Mr. Atta Muhammad,
Government Contractor,
P/O Naushahro Feroze.

SUBJECT: MPA's PRIORITY PROGRAMME (SPONSORED BY DR.ABDUL SATTAR RAJPER, MPA) CONSTRUCTION OF SHELTERLESS PRIMARY SCHOOL BUILDING (ONE ROOMED) IN DISTRICT NAUSHAHRO FEROZE AT GPS KHAMISO KHAN LASHARI (CIVIL WORK) TALUKA NAUSHAHRO FEROZE.

The rate quoted by you for the above mentioned work: @A-Rs.50.80% above (Fifty Point Eight Zero Percent above & B=19.80% above Nineteen Point Eight Zero Percent above) on schedule of rates Vol-II, Part-II (General) for finished items of works enforced from 1st October 2004 entered in Schedule-B has been approved.

02/- You are requested to please attend this office within (07) days to complete tender documents.

03/- You are requested to please supply to this office a copy of partnership deed/registration of firms and power of Attorney in the name of any partner or employee of the firm to whom you authorized to sign the bills receive payments and instructions in respect of this work.

04/- You are requested to start the work within (07) days after issue of this work order or on the date of taking over the possession of plot/site under supervision of the Deputy District Officer, (Education Works) Naushahro Feroze.

05/- The stipulated time for completion is (04) months.

06/- Further it should be noted that:


- The work is to be carried out as per PWD specifications.
- No cartage for any material either arranged by you or supplied by the Government will be paid separately.
- No premium will be allowed on non-scheduled items.
- Only Bholari quarry sand will be used in all items involving use of it.


The receipt of this work order by acknowledged.

D.....A
Schedule - B

Copy FWCs to:-

The Executive District Officer, Works & Services Department N.Feroze.
The Deputy District Officer, (Education Works) Naushahro Feroze.
for information along with copy of Schedule-B. He is required to report the actual date of start of work to this office well in time.


DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE


DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

COMPARATIVE STATEMENT

Name of Work: MPA's PRIORITY PROGRAMME (SPONSORED BY DR. ABDUL SATTAR RAJPER, MPA)
CONSTRUCTION OF SHELLERESS PRIMARY SCHOOL BUILDING (ONE ROOMED) IN DISTRICT NAUSHAHRO
FEROZE AT GPS KHAMISO KHAN IASHARI (CIVIL WORK) TALUKA NAUSHAHRO FEROZE.

Date of issue: 14-02-2011
 Date of opening :- 15-02-2011
 N.I.T No. D.O/(E.W)/T.C/1535, Dt: 22-12-2010

Sr. No.	Amount of Sch: Items	Amount of Cartage	Add: 20% on S.Item & Cartage	Total	Permissible Limit	Name of Contractor	Rate quoted	Tender cost	Excess/Saving
A	615322	162862	155637	933821	A= 51.96% Above	01. Mr. Alta Muhammad	(A) 50.80% Above	927906	5957
B	20532	20% Above	4107	24639	B=20.00% Above		(B) 19.80% Above	24597	Saving
C	Diff: of material			163292			(C) Diff: of material	163292	
D	Contingency			1121752					
	G.Total			15564					
	Say			1137316					
				1137000					

02. Mr. Malik Sagheer Ahmed

(A) 51.50% Above	932213	1608
(B) 20.00% Above	24639	Saving
(C) Diff: of material	163292	
	1120144	

03. M/S Muhammad Mithal Builders

(A) 52.00% Above	935289	1468
(B) 20.00% Above	24639	Excess
(C) Diff: of material	163292	
	1123220	

The rate quoted by Mr. Alta Muhammad, Government Contractor @Rs.50.80% above & B=19.80% above, is the lowest hence approved.

(Signature)
 DIVISIONAL ACCOUNTS OFFICER
 (EDUCATION WORKS)
 NAUSHAHRO FEROZE

(Signature)
 DISTRICT OFFICER
 (EDUCATION WORKS)
 NAUSHAHRO FEROZE

S.No. 08

Issued to Mr. Atta Hameed

On charged Rs. 1500/-

Vide D.R No. 16222 D-14/2/11

Atta Hameed
DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

OFFICE OF THE DISTRICT OFFICER (EDUCATION WORKS)
NAUSHAHRO FEROZE

Percentage rate tender and contract for works, I/W hereby tender for the execution, for the Governor of Sindh, (hereinbefore and hereinafter referred to as "Government"), of the work specified in the under written memorandum within the time specified in such memorandum at

PA 50.80% Above PB 19.80% Above percent above/below the estimated rates entered in schedule 'B' (memorandum) showing items of ~~work to be carried out~~ and in accordance in all respects, with the specifications, designs, drawings and instructions in writing. Referred to in Rule-I here of and in clause-12 of the annexed conditions, of contract and agree that when materials for the work are provided by the Government such materials and the rates to be paid for them shall be as provided in schedule (A) here to.

MEMORANDUM

(a) GENERAL DESCRIPTION:-

MPA'S PRIORITY PROGRAMME
(Sponsored by Dr. Abdul Sattar Rajper, MPA)
Construction of Shelterless School Building (One Roomed) in District Naushahro Feroze
at GPS Khaniki Taluka Naushahro Feroze
Civil work

b) Estimated Cost	Rs. 1200000/-
c) Earnest Money	Rs. 24000/-
d) Security Deposit (i/c earnest Money)	Rs. 60000/-
e) Percentage, if any, to be deducted from Bills	Rs. 108000/-
f) Time allowed for completion of work	(04) Months

Atta Hameed
DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

CONTRACTOR UNDERTAKING :

I/We hereby offered the above rates after taking into consideration as per B-I Agreement tender and this memorandum and shall be bound to fill up and complete the printed B-I form tender as to complete the agreement. In case of failing the department will be at liberty to take action against me/us as per clauses of the agreement in B-I agreement form which has been read and accepted by me/us.

Schedule-A: Nil.

Schedule-B: Attached herewith.

Atta Hameed

NAME OF WORK:-

CONSTRUCTION OF SHELTERLESS PRIMARY SCHOOL BUILDING (ONE ROOMED) DISTRICT (MPA;S PRIORITY PROGRAMME) AT GPS KHAMISO KHAN LASHARI (CIVIL WORK) TALUKA MEHRABPUR.

Sr.No.	Item of work	Unit	Rate	Qty:	Amount
01.	Excavation in foundation of building bridges and other structure including dag belling dressing refilling around the structure with excavated earth watering and ramming lead upto 5ft(b) in ordinary soil (S.I.No: 18(B) - P/05)				
		2254.0 P.Cft	1306/80 %sft		Rs.2946/- (Rupees One Thousand Three Hundred Six and Eight Paise)
02.	Cement concrete Bricks or stone Ballast 1 1/2 t 2" guage ratio 1.5.10 (S.I.No: 04 - P/16)				
		719.0 Cft	3213/95 %Cft		Rs.23108/- (Rupees Two Thousand Nine Hundred Thirty five and Ten Paise)
03.	Pacca Brick work in foundation and plinth in cement sand mortor ratio 1:6 (S.I.No: 04(i) - P/25)				
		2383.0 Cft	3865/15 %cft		Rs.92107/- (Rupees Three Thousand Eight Hundred Sixty five and fifteen Paise)
04.	R.C.C work i/c all labour and material except the cost of steel reinforcement and its labour for bending and binding laying in position. This rate also i/c kinds of forms mould lifting shuttering curing rending exposed surface R.C Work in roof slab beams columns rafts lintel and other structure ratio 1:2:4 (S.I.No: 6(i) - P/19)				
		683.0 P.Cft	114/-		Rs.7786/- (Rupees One Hundred Fourteen only)
05.	Fabrication of mild steel reinforcement cement for cement concrete i/c cutting bending laying imposition i/c removal rust from bars (S.I.No: 7 - P/20). Tor Steel				
		30.49 P.Cwt	2772/55		Rs.84435/- (Rupees Twenty Seven Hundred Seventy Two and Fifty Five Paise)
06.	Filling watering and ramming earth under floor with new surplus earth from foundation lead upto one chain and lift upto 5feet (S.I.No:21 - P/05).				
		1503 Cft	641/30 %0cft		Rs. 963/- (Rupees One thousand Four Hundred Eight Eight and Thirty Paise)
07.	Filling watering and ramming earth under floor with new earth excavation from o: side lead upto one chain and lift upto 5ft (S.I.No:22 - P/05).				
		1575 Cft	1488/30 %0cft		Rs. 2344/- (Rupees One thousand Four Hundred Eight Eight and Thirty Paise)
08.	Damp proof course with cement sandand shingle concrete 1:2:4 including of asphaltic mixture (S.I.No: 27 - P/23).				
		450 Sft	1834/75 % Sft		Rs. 8256/- (Rupees One thousand Eight Hundred Thirty four and Seventy Five Paise)
09.	Cement concrete Bricks or stone Ballast 1 1/2 t 2" guage ratio 1.6.12 (S.I.No: 04(b) - P/17)				
		230.0 Cft	2935/10 %Cft		Rs.6751/- (Rupees Two Thousand Nine Hundred Thirty five and Ten Paise)
10.	Pacca Brick work in ground floor in cement sand mortar ratio 1:6 (S.I.No: 09(i) - P/25)				
		1311 Cft	4246/30 %cft		Rs.55669/- (Rupees Four Thousand Two Hundred Forty Six and Thirty Paise)
11.	Pacca Brick work an other than building i/c striking of joints upto 2' ft sand mortar 1:6 (S.I.No: 07 - P/25)				

12. Providing and fixing G.I frame/chowkat of size 7"x2" or 4 1/2"x3" for door using 20 gauge C.I sheet i/c welded hinges and fixing at site with necessary hold fasts hinges and fixing at site with necessary hold fast filling the cost also i/c all carriage of tools and plants used in making and fixing (S.I.No: 29 - P/98).

a) For Windows 76 P.Rft 122/17 R.Ft Rs. 9285/-
(Rupees One Hundred Twenty Two and Seventeen Paisa) ✓
b) For Doors 35 P.Sft 113/37 P.Sft Rs. 3961/-
(Rupees One Hundred Thirteen and Thirty Seven Paisa) ✓

13. Supplying and fixing in position iron/steel grill of 2"x2" size flat iron of approved design including painting threecoats etc completed weight not to be less than 3.7lbs sq foot of finishing grill (S.I.No:26 - P/97).

53 Sft 115/47 P.Sft Rs. 6120/-
(Rupees One Hundred Fifteen and Forty Seven Paisa) ✓

14. 1st Class Deodar wood wrought joinery in doors and windows etc fixed in position i/c chowkats holds fasts hinges iron towers bolts handles and cords etc complete (S.I.No: 7 - P/65).

81 Sft 228/38 P.Sft Rs. 18499/-
(Rupees Two Hundred Twenty Eight and Thirty Eight Paisa) ✓

15. Cement plaster 1:6 upto 20" height 1/2" thick (S.I.No: 13(b) - P/58).

4462 Sft 531/41 % Sft Rs. 23712/-
(Rupees Five Hundred Thirty One and Forty one Paisa) ✓

15. Providing and laying HALLA or pattern tiles glazed 6"x6"x1/4" as floor or wall facing in required floor and pattern of stile specification jointed in white cement and pigment over base of 1:2 gray cement mortar 3/4" thick i/c washing and filling of joint white slurry of white cement and pigment in desired shape with finishing cleaning and cost of wax polling etc complete i/c cutting tiles to proper way (S.I.No: 61 - P/54).

278 Sft 17091/69 % Sft Rs.47515/-
(Rupees Thirty Eight Hundred Thirteen and Ninety Five Paisa) ✓

17. Cement plaster 1:4 upto 20" height 3/8" thick (S.I.No: 11(a) - P/58).

4030 Sft 536/14 % Sft Rs. 23751/-
(Rupees Five Hundred Thirty Six and Fourteen Paisa) ✓

18. Making and fixing steel grated doors with 1/6" sheeting i/c angle iron frame 2"x2" 3/8" and 3/4" square bars 4" centre to centre with locking arrangement (S.I.No: 24 - P/97).

48 Sft 385/76 P.Sft Rs. 18516/-
(Rupees three Hundred Eight Five and Seventy Six Paisa) ✓

19. Making Notice board made with cement (S.I.No: 01 - P/100).

32 Sft 28/86 P.Sft Rs. 924/-
(Rupees Twenty Eight and Eighty Six Paisa) ✓

20. Cement plaster 3/4" thick upto 20' height ratio 1:4 (S.I.No: 11(c) - P/58).

72 Sft 779/96 % Sft Rs. 562/-
(Rupees Five Hundred Thirty Six and Fourteen Paisa) ✓

21. Cement pointing structure of joints of wall ratio 1:2 (S.I.No: 19 - P/59).

416 Sft 645/37 % Sft Rs. 26899/-
(Rupees Six Hundred Forty five and Thirty seven Paisa) ✓

22. Providing and laying 1" thick topping cement concrete 1:2:4 including surface finishing and dividing into panels (S.I.No: 16 - P/47).

a) 2" thick 465 sft 1820/23 %Sft Rs.8464/-
(Rupees One Thousand Eight hundred Twenty and Twenty three Paisa) ✓
b) 2" thick 300 sft 1396/67 %Sft Rs.4190/-
(Rupees One three hundred Ninety Six and Sixty Seven Paisa) ✓

23. Two Coats of bitumen coating laid hot using 34 lbs for % Sft over roof and blinded with sand at one Cft % Sft . 814 Sft 431/21 % Sft Rs. 3510/-
(Rupees Four Hundred Thirty One and Twenty One Paisa) ✓
24. Laying floor of approved with glazed tile 1/4" thick in white cement 1:2 over 3/4" thick cement mortar 1:2 complete (S.I.No: 24 - P/48). 58 Sft 10416/34 % Sft Rs. 6041/-
(Rupees Ten thousand Four Hundred Sixteen and Thirty four paisa)
25. Extra labour rate for earth making cement plaster pattas/bend around straight or curved opening and around the edge of roof slabs the width not less than 6" with fine finishing as directed by Engineer Incharge (S.I.No:35 - P/61). 643 Rft 11/25 P.Rft Rs. 7234/-
(Rupees Eleven and Twenty five Paisa) ✓
26. White wash three coats (S.I.No:26 - P/59). 718 Sft 115/18 % Sft Rs. 8270/-
(Rupees One Hundred Fifteen and Eighteen Paisa) ✓
27. Colour wash two coats (S.I.No: 25 - P/59). 1748 Sft 103/79 % Sft Rs. 1814/-
(Rupees One Hundred Three and Seventy Nine Paisa)
28. Primary coats of chalk under distempering (S.I.No:23 - P/58). 1691 Sft 58/85 % Sft Rs.995/-
(Rupees Fifty Eight and Eight Five Paisa)
29. Distempering three coats (S.I.No: 24 (B)- P/60). 1691 Sft 204/22 % Sft Rs. 3453/-
(Rupees Two Hundred Sixty three and Seventy Nine Paisa) ✓
30. White wash two coats (S.I.No:26 (b)- P/60). 728 190 Sft 73/2 89/74 % Sft Rs.1860/-
(Rupees Eighty Nine and seventy Four Paisa) ✓
31. Preparing surface and painting to doors and windows type i/c edges 3 coats new surface (S.I.No: 05(c) - P/76). 190 Sft 978/95 % Sft Rs. 1860/-
(Rupees Nine Hundred Seventy Eight and Ninety Five Paisa) ✓
32. Preparing painting new surface gurad bars gates railing standard braccs and similar open work three coats (S.I.No: 15 - P/76). 96 Sft 414/61 % Sft Rs. 398/-
(Rupees Six Hundred Ninety Three and Seventy one Paisa) ✓
- Total Rs. 615322/- ✓

4-9-72
CONTRACTOR

Healw
DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

W.S & S. FITTING

Part "B"

01. P.F squatting type white glazed earthen ware W.C Pan with i.c the cost of flushing cistern with internal filter and flush pipe with and making requisite number of holes in walls plinth and floor for pipe connection and making in cement concrete 1:2:4 with 4" dia earthen ware trap and plastic thumb (S.I.NO: 1 P-1).

Each 1No 2362/80 Each Rs. 2363/-

02. P.F 6"x2" or 6"x3" C.I floor trap of the approved self cleaning design with a C.I screwed down gritting with or without a vent arm complete with and w.p making requisite numbers of holes in walls plinth and floor for pipe connection (S.I.NO: 20 P-5).

Each 2Nos 254/- Each Rs. 289/-

03. P.F in position long bib cock (S.I.NO: 3 P-13).

Each 2Nos 211/- Each Rs. 422/-

04. P.F in position long stop cock (S.I.NO: 3 P-13).

Each 2Nos 211/- Each Rs. 422/-

05. P.F G.I pipes special & clamps etc i.c fixing cutting and fitting complete with and i.c the cost of breaking the walls and roof making good etc painting two coats after the pipe etc with white zink paint with pigment to match colour of the building and testing with water to a pressure of 200 feet and handling (S.I.NO: 1 P-11).

P.Rft (i) 20 ft 1/2" dia	25/20	P.Rft	Rs. 500/-
P.Rft (ii) 30 ft 3/4" "	34/40	P.Rft	Rs. 1032/-
P.Rft (iii) 10" 1" "	46/50	P.Rft	Rs. 465/-

06. P.F RCC pipes with collar class "B" and digging the trenches to required depth and fixing in position i.c cut fitting and jointing with maphalt composition & cement m 1:1 and testing with water pressure to a head of 4 feet at top of the highest pipe and refilling with excavated stuff (S.I.NO: 2 P-21).

P.Rft 6" dia 12 ft 72/40 P.Rft Rs. 869/-

07. Providing asbestos pipe with collar (padax equivalent) i.c digging the trenches to required depth and fixing to and jointing with rubber rings i.c testing to water pressure of 220 feet (S.I.NO: 1 P-21).

P.Rft 20 ft 72/75 P.Rft Rs. 1255/-

Part "C"

01. Boring and fixing 1 1/2" dia pressure pipe P.Rft Rs. 1751/-

02. Assembling 1 1/2" dia pressure pipe P.Rft Rs. 5929/-

Part "D"

01. P.F water pumping set 1H.P Mono Block shingle phase

CLAUSE - 51.

The contractor will not be allowed to withdraw the tender ask for the return of earnest money before the expiry for period as shown as under commencing from the date of opening of the tender and if it is withdrawn in violation of these conditions their earnest money will be when sanctioning authorities.

- | | | |
|----|----------------------------|------------|
| 1) | District Officer | One Month |
| 2) | Executive District Officer | Two Months |
| 3) | Government | Six Months |

The contractor shall make his own agreement for water for work at site and charged in this respect should be paid by the concerned authority from where he gets will be recovered over gross amount of the work.

Clause-53(a)


Clause-53(b)


Clause-54

Deodar wood obtained from water borne round not less than in girth will be used for all doors and windows leaved and other joinery work etc.

Clause-55


Work will be carried out strictly according to specification contain in Sindh Government Schedule of rates. Volume-I part-II specification effective from October 2004.



CONTRACTOR


DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

ADDITIONAL CONDITIONS

- 1/ No cartage of any material either arranged by the contractor them selves (contractor himself) or by Government (if any) shall be paid separately.
- 2/ Contractor/Contractors shall have to make his/their own arrangement for palatable water for his work at their own cost. In case he/they request for supply of water by the government, recovery on this account shall be made @ 11/2 of the gross amount of the item of work in which water is used.
- 3/ All material used shall confirm to standard specifications.
- 4/ No premium shall allowed on Non Schedule Item. Only approved Bholari Sand will be used in all items involving use of cement.
- 5/ Any typing error/mistake is subjected to in accordance with new composite schedule of rates 2004.
- 6/ Contractor shall be responsible for arranging to get martial tested at his own cost as directed by the District Officer/Deputy District Officer facing which the tests shall be recovered from their bills.
- 7/ Cement shall be mixed with mechanically operated concrete mixture with due consideration to aggregated cement and water cement ratio.
- 8/ Concrete shall be mixed, placed, vibrated and smoothes furnished in a manner as directed by the District Officer/Deputy District Officer so as to give minimum compasive strength of 3000 Lbs per squire inch.


CONTRACTOR


DISTRICT OFFICER
(EDUCATION WORKS)
MUSHAHRO FEROZE

S.No. 08

Issued to Mr. Malik Sajid Ahmed

On charged Rs. 1500/-

Vide D.R No. 16246 D-14/2/2011

Healw
DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

OFFICE OF THE DISTRICT OFFICER (EDUCATION WORKS)
NAUSHAHRO FEROZE

Percentage rate tender and contract for works, I/W hereby tender for the execution, for the Governor of Sindh, (hereinbefore and hereinafter referred to as "Government"), of the work specified in the under written memorandum within the time specified in such memorandum at

Sajid for 57.5% above (3-20.0) above. percent
above/below the estimated rates entered in schedule 'B' (memorandum) showing items of work to be highest rate selected and in accordance in all respects, with the specifications, designs, drawings and instructions in the writing. Referred to in Rule-I here of and in clause-12 of the annexed conditions, of contract and agree that when materials for the work are provided by the Government such materials and the rates to be paid for them shall be as provided in schedule (A) here to.

MEMORANDUM

(a) GENERAL DESCRIPTION:-

MPA'S PRIORITY PROGRAMME

(Sponsored by Dr. Abdul Sattar Rajper, MPA)
Construction of Shelterless School Building (One Roomed) in District Naushahro Feroze at G.P.S. Khamiso Khan Taluka A. Feroze
Local Civil work

b) Estimated Cost	Rs. 1200000/-
c) Earnest Money	Rs. 24000/-
d) Security Deposit (i/c earnest Money)	Rs. 60000/-
e) Percentage, if any, to be deducted from Bills	Rs. 108000/-
f) Time allowed for completion of work	(04) Months

Healw
DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

CONTRACTOR UNDERTAKING :

I/We hereby offered the above rates after taking into consideration as per B-I Agreement tender and this memorandum and shall be bound to fill up and complete the printed B-I form tender as to complete the agreement. In case of failing the department will be at liberty to take action against me/us as per clauses of the agreement in: B-I agreement form which has been read and accepted by me/us.

Schedule-A: Nil.

Schedule-B: Attached herewith.

Sajid
CONTRACTOR

S.No. 08

Issued to Mr. M. Nadeem Nadeem

On charged Rs. 1500/-

Vide D.R No. 16223 07-14/2/2011

M. Nadeem
DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

OFFICE OF THE DISTRICT OFFICER (EDUCATION WORKS)
NAUSHAHRO FEROZE

Percentage rate tender and contract for works, I/W hereby tender for the execution, for the Governor of Sindh, (hereinbefore and hereinafter referred to as "Government"), of the work specified in the under written memorandum within the time specified in such memorandum at

M. Nadeem A-52.0% Above B-20.0% Above percent above/below the estimated rates entered in schedule B (memorandum) showing items of work to be carried out and in accordance in all respects, with the specifications, designs, drawings and instructions in writing. Referred to in Rule-I here of and in clause-12 of the annexed conditions, of contract and agree that when materials for the work are provided by the Government such materials and the rates to be paid for them shall be as provided in schedule (A) here to.

MEMORANDUM

(a) GENERAL DESCRIPTION:-

MPA'S PRIORITY PROGRAMME

(Sponsored by Dr. Abdul Sattar Rajper, MPA)
Construction of Shelterless School Building (One Roomed) in District Naushahro Feroze at Khami So Khan Taluka N. Feroze
Carpet: will work

b) Estimated Cost	Rs. 1200000/-
c) Earnest Money	Rs. 24000/-
d) Security Deposit (i/c earnest Money)	Rs. 60000/-
e) Percentage, if any, to be deducted from Bills	Rs. 108000/-
f) Time allowed for completion of work	(04) Months

M. Nadeem
DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

CONTRACTOR UNDERTAKING :

I/We hereby offered the above rates after taking into consideration as per B-I Agreement tender and this memorandum and shall be bound to fill up and complete the printed B-I form tender as to complete the agreement. In case of failing the department will be at liberty to take action against me/us as per clauses of the agreement in B-I agreement form which has been read and accepted by me/us.

Schedule-A: Nil.

Schedule-B: Attached herewith.

M. Nadeem

COMPARATIVE STATEMENT.

Tender No: (08)

Date of Issue: 14.2.2011

Date of Opening: 15.2.2011


Name of work: MPA's Priority Programme Sponsored by pr:Abdul Sattar
Rajper, Construction of Shelterless School Building
(One Roomed) in District N.Feroze at GPS Khamise Khan
Lashari Tal; N.Feroze (civil work).


Estimated Cost: RS: 1137000/=


Publicity invited vide this office Notice inviting
Tenders No: DO(E.W)/TC/ 34, dated: 10.1.2011

S.No:	Name of contractor	Premium quoted by the contractor	Remarks.
01.	Mr:Atta Muhammad	A=50.80%above ✓ B=19.80% " ✓	First Lowest
02.	Malik Sagheer Ahmed	A=51.50%above ✓ B=20.00% " ✓	Second lowest
03.	M/S Muhammad Mithal Builders.	A=52.00%above ✓ B=20.00%above ✓	Third lowest

The tenders opened in the presence of


DIVISIONAL ACCOUNTS OFFICER
(EDUCATION WORKS)
N.FEROZE


DISTRICT OFFICER
(EDUCATION WORKS)
N.FEROZE


EXECUTIVE DISTRICT OFFICER
WORKS & SERVICES DEPARTMENT
N.FEROZE.

OFFICE OF THE DISTRICT OFFICER (EDUCATION WORKS) WORKS
& SERVICES DEPARTMENT NAUSHAHRO FEROZE.

Tal: # 0242 - 448988

No. DO(E.W)TC/ 577
N/Feroze Dated: 18-9-2011

To,

Mr. Malik Sagar Ahmed,
Government Contractor,
P/O Bhiria.

SUBJECT: MPA'S PRIORITY PROGRAMME SPONSORED BY: DR. ABDUL SATTAR RAJPER, MPA CONSTRUCTION OF SHELTERLESS SCHOOL BUILDING (ONE ROOMED) IN DISTRICT NAUSHAHRO FEROZE AT GPS AZIZULLAH SADRI (CIVIL WORK) TALUKA BHIRIA.

The rate quoted by you for the above mentioned work: @A-Rs.51.40% above (Fifty One Point Four Zero Percent above & B=19.70% above Nineteen Point Seven Zero Percent above) on schedule of rates Vol-III. Part-II (General) for finished items of works enforced from 1st October 2004 entered in Schedule-B has been approved.

02/- You are requested to please attend this office within (07) days to complete tender documents.

03/- You are requested to please supply to this office a copy of partnership deed/registration of firms and power of Attorney in the name of any partner or employee of the firm to whom you authorized to sign the bills receive payments and instructions in respect of this work.

04/- You are requested to start the work within (07) days after issue of this work order or on the date of taking over the possession of plot/site under supervision of the Deputy District Officer, (Education Works) Bhiria.


05/- The stipulated time for completion is (04) months.

06/- Further it should be noted that:

- The work is to be carried out as per PWD specifications.
- No cartage for any material either arranged by you or supplied by the Government will be paid separately.
- No premium will be allowed on non-scheduled items.
- Only Bholari quarry sand will be used in all items involving use of it.


The receipt of this work order by acknowledged.

D.....A
Schedule - B


DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

Copy FWCs to:-

The Executive District Officer, Works & Services Department N.Feroze.
The Deputy District Officer, (Education Works) Bhiria .
for information along with copy of Schedule-B. He is required to report the actual date of start of work to this office well in time.


DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

COMPARATIVE STATEMENT

Red Cost Rs: 1063000/-
Issue: 14-02-2011

Date of opening :- 15-02-2011

Name of Work: MPA's Priority Programme Sponsored by: Dr. Abdul Sattar Rajper, MPA
Construction of Shelterless School Building (One Roomed) in District Naushahro Feroze
at GPS Azizullahi Sadri (Civil work) Taluka Bhiria

N.I.T No. D.O/(E/W)/T.C/1535, Dt: 22-12-2010

No.	Amount of Sch: Items	Amount of Cartage	Add: 20% on S Item & Cartage	Total	Permissible Limit	Name of Contractor	Rate quoted	Tender cost	Excess/Saving
A	566807	153954	144152	864913	A = 52.59% Above	01. Mr. Malak Sagar Ahmed	(A) 51.70% Above	859846	5129
B	20532	20% Above	4107	24639	B=20.00% Above		(B) 19.70% Above	24577	Saving
C	Diff: of material			163292			(C) Diff: of material	163292	
D	Contingency			1052844					
	G.Total			10532				1047715	
	Say			1063000					

02. Mr. Khair Muhammad


(A) 52.80% Above 866081 1157
(B) 19.95% Above 24528 Excess
(C) Diff: of material 163292

03. Mr. Niaz Hussain Abro

(A) 53.10% Above 867716 2803
(B) 20.00% Above 24639 Excess
(C) Diff: of material 163292

1055647

The rate quoted by Mr. Malak Sagar Ahmed, Government Contractor @Rs.51.70% above & B=19.70% above, is the lowest hence approved.



Naushahro Feroze
DIRECTOR OFFICER
(REPUBLICAN WORKS)
NAUSHAHRO FEROUZE

e) Percentage, if any to be paid

Ks. 600000/-

S.No. 09

Issued to Mr. Malik Sajid Ahmad
On charged Rs. 1500/-
Vide D.R No. 16216 DT-14/2/2011

Malik
DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

OFFICE OF THE DISTRICT OFFICER (EDUCATION WORKS)
NAUSHAHRO FEROZE

Percentage rate tender and contract for works, I/W hereby tender for the execution, for the Governor of Sindh, (hereinbefore and hereinafter referred to as "Government"), of the work specified in the under written memorandum within the time specified in such memorandum at

Part A - 51.70 / AB PA - 19.70 / Above percent
Above/below the estimated rates interred in schedule 'B' (memorandum) showing items of work to be carried out and in accordance in all respects, with the specifications, designs, drawings and instructions in writing. Referred to in Rule-I here of and in clause-12 of the annexed conditions, of contract and agree that when materials for the work are provided by the Government such materials and the rates to be paid for them shall be as provided in schedule (A) here to.

MEMORANDUM

(a) GENERAL DESCRIPTION:-

MPA'S PRIORITY PROGRAMME
(Sponsored by Dr. Abdul Sattar Raiper, MPA)
Construction of Shelterless School Building (One Roomed) in District Naushahro Feroze

41st Az-Zullah Sadr Taluka Bhir
Chief WWC.

- | | |
|--|---------------|
| b) Estimated Cost | Rs. 1200000/- |
| c) Earnest Money | Rs. 24000/- |
| d) Security Deposit (i/c earnest Money) | Rs. 60000/- |
| e) Percentage, if any, to be deducted from Bills | Rs. 108000/- |
| f) Time allowed for completion of work | (04) Months |

Malik
DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

CONTRACTOR UNDERTAKING :

I/We hereby offered the above rates after taking into consideration as per B-I Agreement tender and this memorandum and shall be bound to fill up and complete the printed B-I form tender as to complete the agreement. In case of failing the department will be at liberty to take action against me/us as per clauses of the agreement in B-I agreement form which has been read and accepted by me/us.

Schedule-A: Nil.

Schedule-B: Attached herewith.

Sajid
CONTRACTOR

NAME OF WORK:-

CONSTRUCTION OF SHELTERLESS SCHOOL BUILDING (ONE ROOMED) AT 2/108 Azizullah Sadr Taluka B.M.V. (Civil Work)

Sr. No.	Item of work	Unit	Rate	Qty:	Amount
01.	Excavation in foundation of building bridges and other structure including dag belling dressing refilling around the structure with excavated earth watering and ramming lead upto 5ft(b) in ordinary soil (S.I.No: 18(B) - P/05)	2254.0 P.Cft	1306/80 %sft		Rs.2946/- (Rupees One Thousand Three Hundred Six and Eight Paise)
02.	Cement concrete Bricks or stone Ballast 1 1/2 t 2" guage ratio 1.5.10 (S.I.No: 04 - P/16)	719.0 Cft	3213/95 %Cft		Rs.23108/- (Rupees Two Thousand Nine Hundred Thirty five and Ten Paise)
03.	Pacca Brick work in foundation and plinth in cement sand mortar ratio 1:6 (S.I.No: 04(i) - P/25)	2383.0 Cft	3865/15 %cft		Rs.92107/- (Rupees Three Thousand Eight Hundred Sixty five and fifteen Paise)
04.	R.C.C work i/c all labour and material except the cost of steel reinforcement and its labour for bending and binding laying in position. This rate also i/c kinds of forms mould lifting shuttering curing rendering exposed surface R.C Work in roof slab beams columns rafts lintel and other structure ratio 1:2:4 (S.I.No: 6(i) - P/19)	969.0 P.Cft	114/-		Rs.110466/- (Rupees One Hundred Fourteen only)
05.	Fabrication of mild steel reinforcement cement for cement concrete i/c cutting bending laying imposition i/c removal rust from bars (S.I.No: 7 - P/20). Tor Steel	43.26 P.Cwt	2772/55		Rs.119941/- (Rupees Twenty Seven Hundred Seventy Two and Fifty Five Paise)
06.	Filling watering and ramming earth under floor with new surplus earth from foundation lead upto one chain and lift upto 5feet (S.I.No:21 - P/05).	1503 Cft	641/30 %0cft		Rs. 963/- (Rupees One thousand Four Hundred Eight Eight and Thirty Paise)
07.	Filling watering and ramming earth under floor with new earth excavation from o: side lead upto one chain and lift upto 5ft (S.I.No:22 - P/05).	1575 Cft	1488/30 %0cft		Rs. 2344/- (Rupees One thousand Four Hundred Eight Eight and Thirty Paise)
08.	Damp proof course with cement sand and shingle concrete 1:2:4 including of asphaltic mixture (S.I.No: 27 - P/23).	450 Sft	1834/75 % Sft		Rs. 8256/- (Rupees One thousand Eight Hundred Thirty four and Seventy Five Paise)
09.	Cement concrete Bricks or stone Ballast 1 1/2 t 2" guage ratio 1.6.12 (S.I.No: 04(b) - P/17)	230.0 Cft	2935/10 %Cft		Rs.6751/- (Rupees Two Thousand Nine Hundred Thirty five and Ten Paise)
10.	Pacca Brick work in ground floor in cement sand mortar ratio 1:6 (S.I.No: 09(i) - P/25)	1311 Cft	4246/30 %cft		Rs.55669/- (Rupees Four Thousand Two Hundred Forty Six and Thirty Paise)

7.9.2022

11. Pacca Brick work an other than building i/c striking of joints upto 2' ft height cement sand mortar 1:6 (S.I.No: 07 - P/25)
851 Cft 1089/- %cft Rs.34797/-
(Rupees Four Thousand Eighty Nine only)
12. Providing and fixing G.I frame/chowkat of size 7"x2" or 4 1/2 x3" for door using 20 guage C.I sheet i/c welded hinges and fixing at site with necessary hold fasts hinges and fixing at site with necessary hold fast filling the cost also i/c all carriage of tools and plants used in making and fixing (S.I.No: 29 - P/98).
- a) For Windows 76 P.Rft 122/17 R.Ft Rs. 9285/-
(Rupees One Hundred Twenty Two and Seventeen Paisa)
- b) For Doors 35 P.Sft 113/37 P.Sft Rs. 3961/-
(Rupees One Hundred Thirteen and Thirty Seven Paisa)
13. Supplying and fixing in position iro/steel grill of 2"x2" size flat iron of approved design including painting threecoats etc completed weight not to be less than 3.7lbs sq foot of finishing grill (S.I.No:26 - P/97).
53 Sft 115/47 P.Sft Rs. 6120/-
(Rupees One Hundred Fifteen and Forty Seven Paisa)
14. 1st Class Deodar wood wrought joinery in doors and windows etc fixed in position i/c chowkats holds fasts hinges iron towers bolts handles and cords etc complete (S.I.No: 7 - P/65).
81 Sft 228/38 P.Sft Rs.18499/-
(Rupees Two Hundred Twenty Eight and Thirty Eight Paisa)
15. Cement plaster 1:6 upto 20" height 1/2" thick (S.I.No: 13(b) - P/58).
4462 Sft 531/41 % Sft Rs. 23712/-
(Rupees Five Hundred Thirty One and Forty one Paisa)
16. Cement plaster 1:4 upto 20" height 3/8" thick (S.I.No: 11(a) - P/58).
4030 Sft 536/14 % Sft Rs. 23751/-
(Rupees Five Hundred Thirty Six and Forteen Paisa)
17. Making and fixing steel grated doors with 1/6" sheeting i/c angle iron frame 2"x2" 3/8" and 3/4" squire bars 4" centre to with locking arrangement (S.I.No: 24- P/97).
48 Sft 385/76 P.Sft Rs. 18516/-
(Rupees three Hundred Eight Five and Seventy Six Paisa)
18. Making Notice board made with cement (S.I.No: 01 - P/100).
32 Sft 28/86 P.Sft Rs. 924/-
(Rupees Twenty Eight and Eighty Six Paisa)
19. Cement pointing structure of joints of wall ratio 1:2 (S.I.No: 19 - P/59).
1370 Sft 645/37 % Sft Rs. 8842/-
(Rupees Six Hundred Forty five and Thirty seven Paisa)
20. Cement plaster 3/4" thick upto 20' height ratio 1:4 (S.I.No: 11(c) - P/58).
72 Sft 779/96 % Sft Rs. 562/-
(Rupees Five Hundred Thirty Six and Fourteen Paisa)
21. Cement pointing structure of joints of wall ratio 1:2 (S.I.No: 19 - P/59).
4168 Sft 645/37 % Sft Rs. 26899/-
(Rupees Six Hundred Forty five and Thirty seven Paisa)
22. Providing and laying 1" thick topping cement concrete 1:2:4 including surface finishing and dividing into panels (S.I.No: 16 - P/47).
- a) 2" thick 4658 sft 1820/23 %Sft Rs.8464/-
(Rupees One Thousand Eight hundred Twenty and Twenty three Paisa)
- b) 2" thick 300 sft 1396/67 %Sft Rs.4190/-
(Rupees One three hundred Ninety Six and Sixty Seven Paisa)
- c) 1 1/2" thick 742 sft 1115/18 %Sft Rs.8275/-
(Rupees One three hundred Ninety Six and Sixty Seven Paisa)
- near

23. Two Coats of bitumen coating laid hot using 34 lbs for % Sft over roof and blinded with sand at one Cft % Sft.
814 Sft 131/21 % Sft Rs. 3610/-
(Rupees Four Hundred Thirty One and Twenty One Paisa)
24. Extra labour rate for earth making cement plaster pattas/bend around straight or curved opening and around the edge of roof slabs the width not less than 6" with fine finishing as directed by Engineer Incharge (S.I.No:35 - P/61).
643 Rft 11/25 P.Rft Rs. 7234/-
(Rupees Eleven and Twenty five Paisa)
25. White wash three coats (S.I.No:26 - P/59).
718 Sft 115/18 % Sft Rs. 8270/-
(Rupees One Hundred Fifteen and Eighteen Paisa)
26. Primary coats of chalk under distemping (S.I.No:23 - P/58).
1691 Sft 58/85 % Sft Rs.995/-
(Rupees Fifty Eight and Eight Five Paisa)
27. Preparing painting doors and windows any type i/c three coats (S.I.No: 5 (c) - P/76).
1691 Sft 693/71 % Sft Rs. 4456/-
(Rupees Six Hundred Ninety Three and Seventy one Paisa)
28. White wash two coats (S.I.No:26 (b)- P/60).
6486 Sft 89/74 % Sft Rs. 1860/-
(Rupees Eighty Nine and seventy Four Paisa)
29. Preparing painting new surface gurad bars gates railing standard braces and similar open work three coats (S.I.No: 15 - P/76).
96 Sft 414/61 % Sft Rs. 398/-
(Rupees Six Hundred Ninety Three and Seventy one Paisa)

Total

Rs. 643049/-

Saqeer
CONTRACTOR

H. S. W.
DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

S.No. 09

Issued to Mr. (Chen) N. de 2
On charged Rs. 1500/-
Vide D.R No. 16219 107-14/2/2011

Healib
DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

OFFICE OF THE DISTRICT OFFICER (EDUCATION WORKS)
NAUSHAHRO FEROZE

Percentage rate tender and contract for works, I/W hereby tender for the execution, for the Governor of Sindh, (hereinbefore and hereinafter referred to as "Government"), of the work specified in the under written memorandum within the time specified in such memorandum at

(Chen) N. de A = 52.80% Above PB = 19.95% Above percent above/below the estimated rates interred in schedule 'B' (memorandum) showing items of work to be carried out and in accordance in all respects, with the specifications, designs, drawings and instructions in writing. Referred to in Rule-I here of and in clause-12 of the annexed conditions, of contract and agree that when materials for the work are provided by the Government such materials and the rates to be paid for them shall be as provided in schedule (A) here to.

MEMORANDUM

(a) GENERAL DESCRIPTION:-

MPA'S PRIORITY PROGRAMME

(Sponsored by Dr. Abdul Sattar Rajper, MPA)
Construction of Shelterless School Building (One
Roomed) in District Naushahro Feroze
at G.P. Azizulah Taluka Bhinja
Sakri (Civil work)

b) Estimated Cost	Rs. 1200000/-
c) Earnest Money	Rs. 24000/-
d) Security Deposit (i/c earnest Money)	Rs. 60000/-
e) Percentage, if any, to be deducted from Bills	Rs. 103000/-
f) Time allowed for completion of work	(04) Months

Healib
DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

CONTRACTOR UNDERTAKING :

I/We hereby offered the above rates after taking into consideration as per B-I Agreement tender and this memorandum and shall be bound to fill up and complete the printed B-I form tender as to complete the agreement. In case of failing the department will be at liberty to take action against me/us as per clauses of the agreement in B-I agreement form which has been read and accepted by me/us.

Schedule-A: Nil.

Schedule-B: Attached herewith.

(Chen) N. de
CONTRACTOR

S.No. 09

Issued to Mr. Niaz Hussain Khan

On charged Rs. 1500/-

Vide D.R No. 16224 M-14/2/11

Hussain
DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

OFFICE OF THE DISTRICT OFFICER (EDUCATION WORKS)
NAUSHAHRO FEROZE

Percentage rate tender and contract for works, I/W hereby tender for the execution, for the Governor of Sindh, (hereinbefore and hereinafter referred to as "Government"), of the work specified in the under written memorandum within the time specified in such memorandum at

نیاز حسین

پارٹ ایک 53.10% اور پارٹ بی 20.7% percent above/below the estimated rates interred in schedule 'B' (memorandum) showing items of work to be carried out and in accordance in all respects, with the specifications, designs, drawings and instructions in writing. Referred to in Rule-I here of and in clause-12 of the annexed conditions, of contract and agree that when materials for the work are provided by the Government such materials and the rates to be paid for them shall be as provided in schedule (A) here to.

MEMORANDUM

(a) GENERAL DESCRIPTION:-

MPA'S PRIORITY PROGRAMME

(Sponsored by Dr. Abdul Sattar Rajper, MPA)
Construction of Shelterless School Building (One
Roomed) in District Naushahro Feroze
at GPS Azizullah Taluka Bhixya

Sadr: (Civil Works).

b) Estimated Cost	Rs. 1200000/-
c) Earnest Money	Rs. 24000/-
d) Security Deposit (i/c earnest Money)	Rs. 60000/-
e) Percentage, if any, to be deducted from Bills	Rs. 108000/-
f) Time allowed for completion of work	(04) Months

Hussain
DISTRICT OFFICER
(EDUCATION WORKS)
NAUSHAHRO FEROZE

CONTRACTOR UNDERTAKING :

I/We hereby offered the above rates after taking into consideration as per B-I Agreement tender and this memorandum and shall be bound to fill up and complete the printed B-I form tender as to complete the agreement. In case of failing the department will be at liberty to take action against me/us as per clauses of the agreement in B-I agreement form which has been read and accepted by me/us.

Schedule-A: Nil.

Schedule-B: Attached herewith.

نیاز حسین
CONTRACTOR