

SINDH PUBLIC PROCUREMENT REGULATORY AUTHORITY

CONTRACT EVALUATION FORM

TO BE FILLED IN BY ALL PROCURING AGENCIES FOR PUBLIC CONTRACTS OF ENGINEERING DEPARTMENT.

- 1). NAME OF THE ORGANIZATION / DEPTT. KARACHI METROPOLITAN CORPORATION (1)
- 2). PROVINCIAL GOVT./LOCAL GOVT./OTHER LOCAL GOVERNMENT (KMC)
- 3). TITLE OF CONTRACT Improvement & Rehabilitation of Electrical Wiring Work in 06 School (Building) Including One Model School of (Defunct)UC-1,2&3.
- 4). TENDER NUMBER SE/(CM)/ED/KMC/363/2012 dated 01-03-2012.
- 5). BRIEF DESCRIPTION OF CONTRACT Improvement & Rehabilitation of Electrical Wiring Work in 06 School (Building) Including One Model School of (Defunct)UC-1,2&3.
- 6). FORUM THAT APPROVED THE SCHEME CDGK ADMINISTRATOR, KMC
- 7). TENDER ESTIMATED VALUE Rs.3.203 Million
- 8). ENGINEER'S ESTIMATE Rs. 3.203 Million
(For Electrical Works only)
- 9). ESTIMATED COMPLETION PERIOD (AS PER CONTRACT) 02 month.
- 10). TENDER OPENED ON (DATE & TIME) 28-03-2012 & 2.30 p.m
- 11). NUMBER OF TENDER DOCUMENTS SOLD 04 Nos.
(Attach list of buyers)
- 12). NUMBER OF BIDS RECEIVED 03 Nos.
- 13). NUMBER OF BIDDERS PRESENT AT THE TIME OF OPENING OF BIDS 03 Nos.
- 14). BID EVALUATION REPORT Attached.
(Enclose a copy)
- NAME AND ADDRESS OF THE SUCCESSFUL BIDDER M/s. Shaheen Construction Company,
45-C, 27th Street, Tauheed Commercial, Phase-V, D.H.A, Karachi.
- 15). CONTRACT AWARD PRICE Rs.31,80,466/-
- 16). RANKING OF SUCCESSFUL BIDDER IN EVALUATION REPORT 1st Lowest M/s. Shaheen
Construction Company.
(i.e. 1st, 2nd, 3rd EVALUATION BID)
- 17). METHOD OF PROCUREMENT USED:- (TICK ONE)
 - a). SINGLE STAGE - ONE ENVELOPE PROCEDURE ✓
 - b). SINGLE STAGE - TWO ENVELOPE PROCEDURE X
 - c). TWO STAGE BIDDING PROCEDURE X
 - d). TWO STAGE - TWO ENVELOPE BIDDING PROCEDURE X
- 18). PLEASE SPECIFY IF ANY OTHER METHOD OF PROCUREMENT WAS ADOPTED i.e.

EMERGENCY, DIRECT CONTRACTING / NEGOTIATION ETC. WITH BRIEF REASONS:

19) APPROVING AUTHORITY FOR AWARD OF CONTRACT Administrator

20) WHETHER THE PROCUREMENT WAS INCLUDED IN ANNUAL PROCUREMENT PLAN?

Yes		No	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

21) ADVERTISEMENT:

i). SPPRA Website
 (If yes, give date and SPPRA's tender number)

Yes	ID # 7003/2012
No	

ii). News Papers
 (If yes, give names of newspapers and dates)

Yes	Business Recorder dt-03-03-12 Naway-e-Waqt & Amn dated 04-03-2012
No	

Local	<input checked="" type="checkbox"/>	Int.	
-------	-------------------------------------	------	--

22) NATURE OF CONTRACT

23) WHETHER QUALIFICATION CRITERIA
 WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?
 (If yes, enclose a copy)

Yes	<input checked="" type="checkbox"/>		No	
-----	-------------------------------------	--	----	--

24) WHETHER BID EVALUATION CRITERIA
 WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?
 (If yes, enclose a copy)

Yes	<input checked="" type="checkbox"/>	No	
-----	-------------------------------------	----	--

25) WHETHER APPROVAL OF COMPETENT AUTHORITY WAS OBTAINED FOR USING A
 METHOD OTHER THAN OPEN COMPETITIVE BIDDING?

Yes	<input checked="" type="checkbox"/>	No	
-----	-------------------------------------	----	--

26) WAS BID SECURITY OBTAINED FROM ALL THE BIDDERS?

Yes	<input checked="" type="checkbox"/>	No	
-----	-------------------------------------	----	--

27) WHETHER THE SUCCESSFUL BIDDER WAS LOWEST
 EVALUATED BID / BEST EVALUATED BID (in case of consultancies)

Yes	<input checked="" type="checkbox"/>	No	
-----	-------------------------------------	----	--

28) WHETHER THE SUCCESSFUL BIDDER WAS TECHNICALLY COMPLAINT?

Yes		No	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

29) WHETHER INTEGRITY PACT WAS SIGNED?
 (If yes, enclose a copy)

Yes	<input checked="" type="checkbox"/>	No	
-----	-------------------------------------	----	--

30) WHETHER NAMES OF THE BIDDERS AND THEIR QUOTED PRICES WERE READ OUT AT
 THE TIME OF OPENING OF BIDS?

Yes	<input checked="" type="checkbox"/>	No	
-----	-------------------------------------	----	--

31) WHETHER COPY OF EVALUATION REPORT GIVEN TO ALL BIDDERS?
 (Attach copy of the bid evaluation report)

Yes	<input checked="" type="checkbox"/>	No	
-----	-------------------------------------	----	--

32) WAS ANY NEGOTIATION DONE IN VIOLATION OF PPR / OTHER
 APPLICABLE RULES
 If yes, give reasons)

Yes	
No	<input checked="" type="checkbox"/>

33). ANY DEVIATION FROM SPECIFICATIONS GIVEN IN THE TENDER NOTICE / DOCUMENTS
(If yes, give details)

Yes	
No	✓

34). WAS THE EXTENSION MADE IN RESPONSE TIME?
(If yes, give reasons)

Yes	
No	✓

35). DEVIATION FROM QUALIFICATION CRITERIA
If yes, give details)

Yes	
No	✓

36). WAS IT ASSURED BY THE PROCURING AGENCY THAT THE SELECTED FIRM IS NOT
BLACK LISTED?

Yes	✓	No	-
-----	---	----	---

37). WAS A VISIT MADE BY ANY OFFICER / OFFICIAL OF THE PROCURING AGENCY TO THE
SUPPLIER'S PREMISES IN CONNECTION WITH THE PROCUREMENT? IF SO, DETAILS TO
BE ASCERTAINED REGARDING FINANCING OF VISIT, IF ABROAD.
(If yes, enclose a copy)

Yes		No	✓
-----	--	----	---

38). WERE PROPER SAFEGUARDS PROVIDED ON MOBILIZATION ADVANCE PAYMENT IN
THE CONTRACT (BANK GUARANTEE ETC)?

Yes	NA	No	NA
-----	----	----	----

39). SPECIAL CONDITIONS, IF ANY
(If yes, give Brief Description)

Yes		No	✓
-----	--	----	---

Signature & Official Stamp of
Authorized Officer

SPA

Superintending Engineer (CM) KMC

FOR OFFICE USE ONLY

SPPRA, Block. No.8, Sindh Secretariat No.4-A, Court Road, Karachi.
Tele: 021-9205356; 021-9205369 & Fax: 021-9206291



KARACHI METROPOLITAN CORPORATION
OFFICE OF THE SUPDT. ENGINEER(CONTRACT MANAGEMENT)
ENGINEERING DEPARTMENT

Room # C-412, 4th Floor, Civic Centre, Gulshan-e-Iqbal, Karachi.
Phone # (92-91)9230669, Fax # (92-21)9232426

NO.SE/CM/ED/KMC/867 /2013

DATED:- 09/05/2013

M/s. Shaheen Construction Company,
45-C, 27th Street, Tauheed Commercial,
Phase-V, D.H.A.
KARACHI.


(1)

ACCEPTANCE LETTER

SUBJECT:- **IMPROVEMENT & REHABILITATION OF ELECTRICAL WIRING
WORK IN 06 SCHOOL (BUILDING) INCLUDING ONE MODEL
SCHOOL OF (DEFUNCT)UC-1,2&3.**

The competent authority has been pleased to accord sanction the above mentioned work for an amount of Rs.31,80,466/= (Rupees Thirty One Lac Eighty Thousand Four Hundred & Sixty Six Only).

You are advised to furnish stamps of the value of Rs.9,541/= i.e @ of 0.3% of sanction cost for execution of contract agreement within 3 days from the receipt of this letter.


SUPERINTENDING ENGINEER(CM)
ENGINEERING DEPARTMENT, KMC.

Copy to the:

1. D.G(Tech. Services), Engg: Department, KMC.
2. Chief Engineer(CM), Engg: Department, KMC.
3. Director(Accounts), Engg: Department, KMC.



9500

Stamp Value:- Rs. 9

An AGREEMENT made this 9th day of May (2013)

between the Karachi Metropolitan Corporation of the city of Karachi by in the Christian year Two Thousand Thirteen through their Chief Engineer (CM) hereinafter called the KMC (which expression shall include their successors) of the one part and M/s. Shaheen Construction Company carrying on business under the name and style of M/s. Shaheen Construction Company, 45-C, 27th Street, Tauheed Commercial, Phase-V, D.H.A, Karachi by their Proprietor hereinafter called the Contractors (which expression shall include their successors and assignees of the said firm and heirs, executor, administrators and assignees of the said individual partners of the said firm) of the other part.

WHEREAS the KMC has accepted the Contractor's tender here unto annexed and marked 1/3 and dated 28-03-2012 for the work of "Improvement- & Rehabilitation of Electrical Wiring Work in 06 School (Building) Including One Model School of (Defunct) UC-1,2&3" sanctioned by Administrator, KMC vide para 9/n. at a cost of Rs.31,80,466/= (Rupees Thirty One Lac Eighty Thousand Four Hundred & Sixty Six Only) Time Limit 60 days, Penalty Rs.3,000/= per day according in to the specification and the general conditions of the contract here unto annexed and marked 1/3 and dated 28-03-2012 and signed by the Contractors after having made themselves fully acquainted with its meaning and where as the Contractors have already deposited with the KMC the sum of Rs.65,000/= as 2% Earnest Money for the above work as security deposit 8% to be deducted from running bills in addition to the Earnest Money Rs.65,000/= (Rupees Sixty Five Thousand Only) vide challan No. Nil dated: 09-05-2013 and have given to the KMC a lien over such sum as Security for the due fulfillment of the contract NO V THIS AGREEMENT WITNESSETH that the KMC and the Contractor shall respectively well truly carry and fulfill the contract and abide by the all terms and conditions of the aforesaid specification and tender.

The contractors do hereby bind themselves, their heirs, successors/legal representatives and assignees to pay to the KMC a sum of Rs. Equal to 10% as mentioned above by way of penalty in case of the breach of any of the terms and conditions of the contracts including those mentioned in the tender without prejudice to the right of the KMC to recover the damages for and such breach.

IN WITNESS WHEREOF the said parties have set their hands this





KARACHI METROPOLITAN CORPORATION
OFFICE OF THE SUPDT: ENGINEER(CONTRACT MANAGEMENT)
ENGINEERING DEPARTMENT

Room # C-412, 4th Floor, Civic Centre, Gulshan-e-Iqbal, Karachi.
Phone # (92-91)9230669, Fax # (92-21)9232426

DATED:- 13/05/2013

NO.SE/CM/ED/KMC/849 /2013

M/s. Shaheen Construction Company,
45-C, 27th Street, Tauheed Commercial,
Phase-V, D.H.A.
KARACHI

WORK ORDER

SUBJECT:- **IMPROVEMENT & REHABILITATION OF ELECTRICAL WIRING**
WORK IN 06 SCHOOL (BUILDING) INCLUDING ONE MODEL
SCHOOL OF (DEFUNCT)UC-1,2&3.

The competent authority has been pleased to award you a contract for above mentioned work for an amount of **Rs.31,80,466/= (Rupees Thirty One Lac Eighty Thousand Four Hundred & Sixty Six Only)**. You have accepted the contractual responsibility and have signed the contract agreement on 09-05-2013.

You are therefore, requested to start the work with as per directions and in accordance with the specification as well as terms & conditions. The completion time of 60 days as specified herein and also in the tender documents shall commence within 07 days time from the receipt of this work order.

In case of failure to complete the work within the stipulated time, penalty shall be imposed @ **Rs.3,000/=** per day. In case you fail to commence the work within seven days after the receipt of work order, action under the relevant clause of the contract agreement will be initiated against you


SUPERINTENDING ENGINEER(CM)
ENGINEERING DEPARTMENT,KMC.

Copy to the:

1. D.G.(Tech. Services), Engg: Department, KMC.
2. Chief Engineer(F&M), Engg: Department, KMC.
3. Chief Engineer(CM)Engg: Department, KMC.
4. Director(Accounts), Engg: Department, KMC.



KARACHI METROPOLITAN CORPORATION

Bank Deposit Challan

DEPARTMENT Engineering DIVISION _____ SECTION _____

BANK CODE BANK ACCOUNT NO

BRANCH CODE BANK ACCOUNT CODE DATE

The Manager
United Bank Limited
Civic Centre Branch, Karachi

BRANCH-KARACHI Please receive the amount as noted below for credit to the account of CDGK mentioned above and as specified here below

Depositor's Name & Address		Particulars		Name of Bank		Cheque Pay Order / Demand Draft		Amount	
M/s. Shaheen Construction Company.		Security Deposit for the work of Improvement & Rehabilitation of Electrical Wiring Work in 06 School Building including One Model School of (Defunct) UC-1,2 & 3.		UBL, KDA Scheme No.1		3633215 28/03/2012		Rs 65,000	
B.G. NO	Depositor Code if any	Income Code	Sub	Min	Sub	A	S	Rs	Ps
Maj	Sub	CAT	Registered No	Div	Sec	Dept	Income Code	CR	LF
								65,000	
TOTAL DR								Rs	65,000

09 MAY 2012
Bank Stamp

Rupees in Words: **Sixty Five Thousand Only**

Signature with Stamp
Accountant/Assistant Accounts Officer
Drawing & Disbursing Officer

Signature Bank Cashier

Signature of Bank Officer

CHALLAN

Corporation of Karachi
Accountant/Assistant Accounts Officer
Drawing & Disbursing Officer

CITY DISTRICT GOVERNMENT
Bank Deposit Challan

Tender No. 05/1008

SECTION 28-3-2012

DIVISION DOCC(M)

DEPARTMENT DACTS

DEPARTMENT	SECTION	DATE
BANK CODE	761708878	08/11/2012
BRANCH CODE		
BANK ACCOUNT NO		
BANK ACCOUNT CODE		

PLEASE SECURE THE AMOUNT IN ORDER WITHIN THE SPECIFIED PERIOD OF (CDDK) MENTIONED ABOVE AND AS SPECIFIED HERE BELOW.

Department Name & Address	Particulars	Cheque Pay Order Details		Amount
		Name of Bank	Date	
M.A. Khan Co. Ltd.	Tender Cost	HBL	26/11	3000/-
M.A. Khan Co. Ltd.	Supplemental Bill	HBL	26/11	3000/-
M.A. Khan Co. Ltd.	Electrical wiring work	HBL	26/11	3000/-
M.A. Khan Co. Ltd.	Work on Metal parts	HBL	26/11	3000/-
M.A. Khan Co. Ltd.	RS (Contract) works			
				12000/-

Sl. No.	Department Code		Amount	
	Div.	Sec.	Per	To
1				3000/-
2				3000/-
3				3000/-
4				3000/-
5				
6				
7				
8				
9				
10				
11				
12				
13				
14				
15				
16				
17				
18				
19				
20				
TOTAL (IN RS)				12000/-

ALLIED BANK LIMITED
 QMC CENTRE BRANCH
 APR 2012
 1140, KARACHI
 CLEARING

M. A. Khan
 M.A. Khan
 Engineer-in-Chief

CHALLAN NO	
OFFICE	

Signature Bank Officer



Tender issued to
 M/s Shahen Construction
 Against pay order No. 3336248
 Dated 6/1/12 of Rs. 3000/-
 Of CCBL Branch
 Accountant W&S
 AAO/incharge Tender Section W&S

KARACHI METROPOLITAN CORPORATION

ENGINEERING DEPARTMENT

NAME OF SCHEME:
IMPROVEMENT & REHABILITATION OF ELECTRICAL WIRING
WORK IN 06 SCHOOL (BUILDING) INCLUDED ONE MODEL
SCHOOL OF (DEFUNCT) UC-1, 2 & 3

(VOLUME-II)

Estimated Cost:-	Rs. 3.203 Million	Tender Cost:	Rs.3,000/-
Time Limit:-	60 Days	Penalty	As per Contract Data
To be Opened on:-	20-03-2012	Validity of Tender:	As per Bidding Data

[Signature]
 Executive Engineer (CM) E&M
 Engg. Department, KMC

Tender Issued:

No: KMC/CM/3336248

Dated _____

Issue to M/s _____

Pay Order No. _____

Dated _____

Bank: _____

Signature & Stamp of Issuing Authority

Tender issued to
 M/s Wahed Hussain Elufin
 Against pay order No. 3336248
 Dated 6/1/12 of Rs. 3000/-
 Of CCBL Branch
 Accountant W&S
 AAO/incharge Tender Section W&S



KARACHI METROPOLITAN CORPORATION

OFFICE OF THE EXECUTIVE ENGINEER (CM) E&M

ENGINEERING DEPARTMENT

4th Floor, Room No. C-412, Civic Centre, Gulshan-e-Iqbal, Karachi
Phone: 021-99232426 , Fax: 021-99230669

PRICE SCHEDULE

SUBJECT : IMPROVEMENT & REHABILITATION OF ELECTRICAL WIRING WORK IN 06 SCHOOL (BUILDING) INCLUDED ONE MODEL SCHOOL OF (DEFUNCT) UC-1, 2 & 3

S.#	Description.	Qty.	Unit.	Rate.	In Words	Amount.
	KMC SCHOOL NO.1 AND 2 IN U.C. NO.1 ST. F-22 TAJ MASJID ROAD AGRA TAJ COLONY LYARI KARACHI					
1	Dismantling of existing Electrical items to prepare the site for fresh work as follows:					
i)	Existing wiring with PVC pipes etc.	80	Meter	24/-	FOUR	320/-
ii)	Switch boards all size.	26	No	19/-	NINETEEN	494/-
iii)	Distribution boards.	3	No	175/-	ONE HUNDRED SEVENTY FIVE	525/-
iv)	Removing of fans with the help of ladder and skilled labour.	9	Job	100/-	ONE HUNDRED	900/-
2	Point wiring for light or fan with 2x1.5mm PVC insulated cable (AGE/Pioneer/Pakistan cable Ltd) in 3/4" dia PVC conduit/channel path on wall or column complete in all respect.	50	NO. JOB	740/-	SEVENTY FIVE	37,000/-
3	Circuit wiring from distribution board to switch board with PVC insulated wire 2x2.5mm (AGE/Pioneer/Pakistan				EIGHT	

S.#	Description.	Qty.	Unit.	Rate.	In Words	Amount.
	Cable Ltd) make in PVC conduit/channel patti on surface complete in all respect.	14	NO JOB	1900/=	one thousand nine hundred	26,600/=
4	Rewiring for light or fan point with 2x1.5mm PVC insulated copper conductor single core wire in given PVC conduit /channel patti complete in all respect.	40	NO JOB	450/=	Four hundred & fifty	18,000/=
5	Wiring for light plug point with 2x7/0.29 PVC insulated cable (AGE/Pioneer/Pakistan Cable Ltd) in 3/4" dia PVC conduit/channel patti in the wall with light plug socket 5 pin 10/15.Amps back box PVC complete as required.	6	NO JOB	1025/=	one thousand & twenty five	6,150/=
6	Wiring for power plug point with 2x7/0.44 PVC insulated (AGE/Pioneer/Pakistan Cable Ltd) in 3/4" dia PVC conduit/channel Patti with Power Plug 20Amps and back box PVC complete as required.	2	NO JOB	1750/=	one thousand seven hundred & fifty	3,500/=
7	P/F of ceiling fan of size 56" with blade, down rod 1 meter if required) include connection with 2 core 23/0.76 flexible wire, ceiling rose & dimmer etc complete in all aspect (Pak/Millat make)	20	NO JOB	4100/=	Four thousand one hundred	82,000/=
8	P/M/F of Fan hook MS make including cutting of roof and plaster if required..	6	NO JOB	230/=	Two hundred & thirty	1,380/=
9	P/F of Bracket fan Plastic Body size 18" dia Make (Pak/Millat) with round block, ceiling rose etc complete in all as respect.	2	NO JOB	3900/=	Three thousand nine hundred	7,800/=
10	P/F of Exhaust fan Plastic Body/Metal body size 12" Make (Pak/Millat) with round block, ceiling rose etc complete in all as respect.	2	NO JOB	2200/=	Two thousand two hundred	4,400/=
11	P/F of Energy Saver 30Watts with threads					

S.#	Description.	Qty.	Unit.	Rate.	In Words	Amount.
	holder, round block PVC (Philips make or Equivalent) complete in as respect.	36	NO.	370/=	Three hundred & seventy	13,320/=
12	P/F of Energy Saver 24Watts with threads holder, round block PVC (Philips make or Equivalent) complete in as respect	24	NO.	370/=	Three hundred & seventy	8,880/=
13	Wiring for call bell point with 3x1.5mm PVC insulated (AGE/Pioneer/Pakistan Cable Ltd Make) 3/4" dia PVC conduit on wall with ding dong bell complete as required.	2	NO.	1100/=	One thousand & one hundred	2,200/=
14	P/F of Fancy switches with back box as per following specification.					
	i) 4 Gang Clipsal type.	15	NO.	425/=	Four hundred & twenty five	6,375/=
	ii) 5 Gang Clipsal type.	4	NO.	550/=	Five hundred & fifty	2,200/=
	iii) 6 Gang Clipsal type.	10	NO.	575/=	Five hundred & seventy five	5,750/=
15	P. F of chennelpatti following size with all fixing accessories as required.					
	a) 3/4" dia	290	Feets	20/=	Twenty	5,800/=
	b) 1" dia	240	Feets	22/=	Twenty Two	5,280/=
16	P/F of suction pump 1 HP (Siemens / Javud / Golden) make complete in all respect, including GI pipe 1" dia (Steelex / KPM) with Union and specials as required.	1	NO.	18000/=	Eighteen thousand	18,000/=
17	P/F of Mono Block Pump 2 HP single phase (Siemens / Javud / Golden) make complete in all respect, including GI pipe 1 1/2" dia (Steelex / KPM) with Union and specials as required.	1	NO.	21,500/=	Twenty one thousand & five hundred	21,500/=
18	P. F. of Electric Water cooler (MBCO or Equivalent) 60 Galons with wooden stand C.C. base of appropriate size,					

S.#	Description.	Qty.	Unit.	Rate.	In Words	Amount.
	discharge PVC pipe 1.5" dia with specials complete as required.	1	NO JOB	54,000/=	Fifty four thousand	54,000/=
19	P/F water filter for Electric Water Cooler 60 Galons as per site requirement and instruction of Engineer Incharge.	1	NO JOB	8,000/=	Eight thousand	8,000/=
20	P/L (Main or Sub main) of PVC/PVC insulated copper conductor (AGE/Pioneer/Pakistan Cable Ltd) make of the following size for light connection at the height of as per site requirement.					
a)	Single core 10mm ² PVC/PVC	320	Meter	120/=	one hundred twenty	38,400/=
b)	Single core 6mm ² PVC/PVC	410	Meter	90/=	Ninety	36,900/=
c)	Single core 4mm ² PVC/PVC	560	Meter	58/=	Fifty eight	32,480/=
d)	Single core 2.5mm ² PVC/PVC	690	Meter	38/=	thirty eight	26,220/=
21	P/F of distribution board fabricated in MS sheet best quality gauge powder coated, wall mounted type and locking arrangement with following size Circuit Breaker including cost of connection complete in all respect make (Japan/Germany/France.) 1- 30Amps S.P. (MCB). 1-20Amps S.P (MCB). 8-10Amps S.P (MCB)					
		2	NO JOB	9,000/=	Nine thousand	18,000/=
22	Wall cutting for Posing wiring as per size site requirement complete in all respect and instruction of Engineer Incharge.	477	RITL	10/=	Ten	4,770/=

S.#	Description.	Qty.	Unit.	Rate.	In Words	Amount.
23	Remaking and finishing of walls with c.c. for mixture 1:6 ratio complete in all respect and instruction of Engineer Incharge.	478	RFT.	141/=	Fourteen	6692/=
					Sub Total:	503,456/
	KMC SCHOOL NO.3 AND 4 IN U.C. NO.1 ST. F-22 TAJ MASJID ROAD AGRA TAJ COLONY LYARI KARACHI					503836/
1	Dismantling of existing Electrical items to prepare the site for fresh work as follows:					
i)	Existing wiring with PVC pipes etc.	110	Meter	41/=	Fourteen	440/=
ii)	Switch boards all size.	38	No	191/=	Twenty	722/=
iii)	Distribution boards.	2	No	175/=	One Lable Two 5 Fu	350/=
iv)	Removing of fans with the help of ladder and skilled labour.	12	Job	100/=	One ladder	1200/=
2	Point wiring for light or fan with 2x1.5mm PVC insulated cable (AGE/Pioneer/Pakistan cable Ltd) in 3/4" dia PVC conduit/channel patti on wall or column complete in all respect.	70	NO JOB	740/=	seven ladder Eighty	51,800/=
3	Circuit wiring from distribution board to switch board with PVC insulated wire 2x2.5mm (AGE/Pioneer/Pakistan Cable Ltd) make in PVC conduit/channel patti on surface complete in all respect.	16	NO JOB	1900/=	Twenty	30,400/=
4	Rewiring for light or fan point with 2x1.5mm PVC insulated copper conductor single core wire in given PVC conduit /channel patti complete in all respect.	30	NO JOB	450/=	Four ladder Five	13,500/=
5	Wiring for light plug point with 2x7/0.29 PVC insulated cable (AGE/Pioneer/Pakistan Cable Ltd) in 3/4" dia PVC conduit/channel patti in the wall with light plug					

S.#	Description.	Qty.	Unit.	Rate.	In Words	Amount.
	socket 5 pin 10/15Amps back box PVC complete as required.	6	NO. JOB	1025/=	One Thousand & Twenty Five	6,150/=
6	Wiring for power plug point with 2x7/0.44 PVC insulated (AGE/Pioneer/Pakistan Cable Ltd) in 3/4" dia PVC conduit/channel Patti with Power Plug 20Amps and back box PVC complete as required.	4	NO. JOB	1750/=	One Thousand Seven Hundred Fifty	7,000/=
7	P/F of ceiling fan of size 56" with blade, down rod 1 meter if required) include connection with 2 core 23/0.76 flexible wire, ceiling rose & dimmer etc complete in all aspect (Pak/Millat make)	16	NO. JOB	4100/=	Four Thousand One Hundred	65,600/=
8	P/M/F of Fan hook MS make including cutting of roof and plaster if required..	6	NO. JOB	230/=	Two Hundred & Thirty	1380/=
9	P/F of Bracket fan Plastic Body size 18" dia Make (Pak/Millat) with round block, ceiling rose etc complete in all as respect.	2	NO. JOB	3900/=	Three Thousand Nine Hundred	7,800/=
10	P/F of Exhaust fan Plastic Body/Metal body size 12" Make (Pak/Millat) with round block, ceiling rose etc complete in all as respect.	2	NO. JOB	22,000/=	Twenty Two Hundred	44,000/=
11	P/F of Energy Saver 30Watts with threads holder, round block PVC (Philips make or Equivalent) complete in as respect.	50	NO. JOB	370/=	Three Hundred & Seventy	18,500/=
12	P/F of Energy Saver 24Watts with threads holder, round block PVC (Philips make or Equivalent) complete in as respect.	22	NO. JOB	370/=	Three Hundred & Seventy	8,140/=
13	Wiring for call bell point with 3x1.5mm PVC insulated cable (AGE/Pioneer/Pakistan Cable Ltd Make) 3/4" dia					

S.#	Description.	Qty.	Unit.	Rate.	In Words	Amount.
	PVC conduit on wall with ding dong bell complete as required.	2	NO JOB	1100/=	one thousand one hundred	2,200/=
14	P/F of Fancy switches with back box as per following specification:					
i)	4 Gang Clipsal type.	20	NO JOB	425/=	Four hundred Twenty five	8,500/=
ii)	5 Gang Clipsal type.	4	NO JOB	550/=	Five hundred Fifty	2,200/=
iii)	6 Gang Clipsal type.	14	NO JOB	620/=	Six hundred Twenty	8,680/=
iv)	8 Gang Clipsal type.	2	NO JOB	722/=	Seven hundred Twenty Two	1,444/=
15	P/F of chennelpatti following size with all fixing accessories as required.					
a)	3/4" dia	300	Feet	20/=	Two hundred	6,000/=
b)	1" dia.	220	Feet	22/=	Two hundred Twenty	4,840/=
16	P/F of suction pump 1 HP (Siemens/Javaid/Golden) make complete in all respect, including GI pipe 1" dia (Steelex/KPM) with Union and specials as required.	1	NO JOB	18,000/=	Eighteen Thousand	18,000/=
17	P/F of Mono Block Pump 2 HP single phase (Siemens/Javaid/Golden) make complete in all respect, including GI pipe 1-1/2" dia (Steelex/KPM) with Union and specials as required.	1	NO JOB	21,500/=	Twenty one thousand Five hundred	21,500/=
18	P/F of Electric Water cooler (MECO or Equivalent) 60 Galons with wooden stand C.C base of appropriate size, discharge PVC pipe 1.5" dia with specials complete as required.	1	NO JOB	54,000/=	Fifty four thousand	54,000/=
19	P/F water filter for Electric Water Cooler 60 Galons as per site requirement and instruction of Engineer Incharge.	1	NO JOB	8000/=	Eight thousand	8,000/=
20	P/L (Main or Sub main) of PVC/PVC insulated copper conductor (AGE/Pioneer/Pakistan Cable Ltd.) make of the following size for light connection at the height of					

S.#	Description.	Qty.	Unit.	Rate.	In Words	Amount.
	as per site requirement.					
a)	Single core 10mm ² PVC/PVC	360	Meter	120/=	one half of 240	43,200/=
b)	Single core 6mm ² PVC/PVC	480	Meter	90/=	3/4 of 120	43,200/=
c)	Single core 4mm ² PVC/PVC	600	Meter	58/=	1/2 of 116	34,800/=
d)	Single core 2.5mm ² PVC/PVC	740	Meter	38/=	1/3 of 114	28,120/=
21	P/F of distribution board fabricated in MS sheet best quality gauge powder coated, wall mounted type and locking arrangement with following size Circuit Breaker including cost of connection complete in all respect make (Japan/Germany/France.) 1- 30Amps S.P. (MCB). 1-20Amps S.P (MCB). 7-10Amps S.P. (MCB).					
		2	NO. JOB	10,000/=	Ten Thousand	20,000/=
22	Wall cutting for Posing wiring as per size site requirement complete in all respect and instruction of Engineer Incharge.	450	RFT.	10/=	Ten	4,500/=
23	Remaking and finishing of walls with c.c. for mixture 1:6 ratio complete in all respect and instruction of Engineer Incharge.	450	RFT.	14/=	Fourteen	6,300/=
Sub Total:						532,866/=
KMC SCHOOL NO.9 IN U.C. NO.2 FIDA HUSSAIN SHAIKHA ROAD, NEAR ALI HOTEL DARIYABAD LYARI KARACHI						
1	Dismantling of existing Electrical items to prepare the site for fresh work as follows:					
i)	Existing wiring with PVC pipes etc.	60	Meter	4/=	Four	240/=

S.#	Description.	Qty.	Unit.	Rate.	Ln Words	Amount.
ii)	Switch boards all size.	15	No	191/-	Number	285/-
iii)	Distribution boards.	1	No	175/-	one lot & 1/2	175/-
iv)	Removing of fans with the help of ladder and skilled labour.	5	Job	100/-	one lot	500/-
2	Point wiring for light or fan with 2x1.5mm PVC insulated cable (AGE/Pioneer/Pakistan cable Ltd) in 3/4" dia PVC conduit/channel patti on wall or column complete in all respect.	30	NO JOB	740/-	three lot & 1/2	22,200/-
3	Circuit wiring from distribution board to switch board with PVC insulated wire 2x2.5mm (AGE/Pioneer/Pakistan Cable Ltd) make in PVC conduit/channel patti on surface complete in all respect.	7	NO JOB	1900/-	Winter hand full	13,300/-
4	Rewiring for light or fan point with 2x1.5mm PVC insulated copper conductor single core wire in given PVC conduit /channel patti complete in all respect.	20	NO JOB	450/-	Fan - lot & 1/2	9,000/-
5	Wiring for light plug point with 2x7/0.29 PVC insulated cable (AGE/Pioneer/Pakistan Cable Ltd) in 3/4" dia PVC conduit/channel patti in the wall with light plug socket 5 pin 10/15Amps back box PVC complete as required.	4	NO JOB	1025/-	one third full fix	4,100/-
6	Wiring for power plug point with 2x7/0.44 PVC insulated (AGE/Pioneer/Pakistan Cable Ltd) in 3/4" dia PVC conduit/channel Patti with Power Plug 20Amps and back box PVC complete as required.	2	NO JOB	1750/-	one third three lot & 1/2	3,500/-
7	P/F of ceiling fan of size 56" with blade, down rod 1 meter if required) include connection with 2 core 23/0.76 flexible					

#	Description.	Qty.	Unit.	Rate.	In Words	Amount.
	wire, ceiling rose & dimmer etc complete in all aspect (Pak/Millat make)	8	NO. JOB	41,00/=	Four 1/2 one hook	32,800/=
8	P/M/F of Fan hook MS make including cutting of roof and plaster if required..	4	NO. JOB	230/=	Two hook the 1/2	920/=
9	P/F of Bracket fan Plastic Body size 18" dia Make (Pak/Millat) with round block, ceiling rose etc complete in all as respect.	2	NO. JOB	3900/=	Three the Nin hook	7,800/=
10	P/F of Exhaust fan Plastic Body/Metal body size 12" Make (Pak/Millat) with round block, ceiling rose etc complete in all as respect.	2	NO. JOB	22,00/=	Two the Two hook	4,400/=
11	P/F of Energy Saver 30Watts with threads holder, round block PVC (Philips make or Equivalent) complete in as respect.	20	NO. JOB	370/=	Three hook slut,	7,400/=
12	P/F of Energy Saver 24Watts with threads holder, round block PVC (Philips make or Equivalent) complete in as respect.	10	NO. JOB	370/=	Three the & slut	3,700/=
13	Wiring for call bell point with 3x1.5mm PVC insulated cable (AGE/Pioneer/Pakistan Cable Ltd Make) 3/4" dia PVC conduit on wall with ding dong bell complete as required.	2	NO. JOB	1100/=	one the hook	2,200/=
14	P/F of Fancy switches with back box as per following specification.					3400
i)	4 Gang Clipsal type.	8	NO. JOB	425/=	Four hook Two the	3,392/=
ii)	6 Gang Clipsal type.	6	NO. JOB	550/=	Five hook & the	3,300/=
15	P/F of chemelpatt following size with all fixing accessories as required.					

#	Description.	Qty.	Unit.	Rate.	In Words	Amount.
a)	3/4" dia	200	Feets	20/ft	Two hundred	4,000/-
b)	1" dia	160	Feets	22/ft =	Two hundred	3,520/-
16	P/F of suction pump 1 HP (Siemens/Javid/Golden) make complete in all respect, including GI pipe 1" dia (Steelex/KPM) with Union and specials as required.	1	NO JOB	18,000/-	Eighteen thousand	18,000/-
17	P/F of Mono Block Pump 2 HP single phase (Siemens/Javid/Golden) make complete in all respect, including GI pipe 1-1/2" dia (Steelex/KPM) with Union and specials as required.	1	NO JOB	21,500/-	Twenty one thousand Five hundred	21,500/-
18	P/F of Electric Water cooler (MECO or Equivalent) 60 Galons with wooden stand C.C. base of appropriate size, discharge PVC pipe 1 1/2" dia with specials complete as required.	1	NO JOB	54,000/-	Fifty four thousand	54,000/-
19	P/F water filter for Electric Water Cooler 60 Galons as per site requirement and instruction of Engineer Incharge	1	NO JOB	8,000/-	Eight thousand	8,000/-
20	P/L (Main or Sub main) of PVC/PVC insulated copper conductor (AGE/Pioneer/Pakistan Cable Ltd) make of the following size for light connection at the height of as per site requirement:					
a)	Single core 10mm ² PVC/PVC	200	Meter	120/ft	one hundred & twenty	24,000/-
b)	Single core 6mm ² PVC/PVC	380	Meter	90/ft	Ninety	34,200/-
c)	Single core 4mm ² PVC/PVC	490	Meter	58/ft	Fifty eight	28,420/-
d)	Single core 2.5mm ² PVC/PVC	650	Meter	38/ft	Thirty eight	24,700/-

S.#	Description.	Qty.	Unit.	Rate.	In Words	Amount.
21	P/F of distribution board fabricated in MS sheet best quality gauge powder coated, wall mounted type and locking arrangement with following size Circuit Breaker including cost of connection complete in all respect make (Japan/Germany/France.) 1- 30Amps S.P. (MCB). 1-20Amps S.P (MCB). 7-10Amps S.P (MCB).	1	NO JOB	10,000/=	Ten thousand	10,000/=
22	Wall cutting for Poing wiring as per size site requirement complete in all respect and instruction of Engineer Incharge.	350	RFT.	10/=	Ten	3,500/=
23	Remaking and finshing of walls with c.c. for mixture 1:6 ratio complete in all respect and instruction of Engineer Incharge.	350	RFT.	14/=	Fourteen	4,900/=
Sub Total:						357,952/=
						357,960/-
KMC SCHOOL NO.11 AND 12 IN U.C. NO.3 NEAR BAGHDADI POLICE STATION KARABAI KARIM JEE ROAD NAYABAD LYARI KARACHI						
1	Dismantling of existing Electrical items to prepare the site for fresh work as follows:					
i)	Existing wiring with PVC pipes etc.	80	Meter	4/=	Four	320/=
ii)	Switch boards all size.	22	No	19/=	Nineteen	418/=
iii)	Distribution boards.	1	No	175/=	one hnd. fifty five	175/=
iv)	Removing of fans with the help of ladder and skilled labour.	8	Job	100/=	one hnd. hundred	800/=
2	Point wiring for light or fan with 2x1.5mm PVC insulated					

S.#	Description.	Qty.	Unit.	Rate.	In Words	Amount.
	cable (AGE/Pioneer/Pakistan cable Ltd) in 3/4" dia PVC conduit/channel patti on wall or column complete in all respect.	40	NO JOB	740/=	See Ltr & Expts	29,600/=
3	Circuit wiring from distribution board to switch board with PVC insulated wire 2x2.5mm (AGE/Pioneer/Pakistan Cable Ltd) make in PVC conduit/channel patti on surface complete in all respect.	10	NO JOB	1900/=	one the wire ltr	19,000/=
4	Rewiring for light or fan point with 2x1.5mm PVC insulated copper conductor single core wire in given PVC conduit/channel patti complete in all respect.	25	NO JOB	450/=	From ltr & Expts	11,250/=
5	Wiring for light plug point with 2x7/0.29 PVC insulated cable (AGE/Pioneer/Pakistan Cable Ltd) in 3/4" dia PVC conduit/channel patti in the wall with light plug socket 5 pin 10/15.Amps back box PVC complete as required	4	NO JOB	1025/=	on the & Trk ltr	4100/=
6	Wiring for power plug point with 2x7/0.44 PVC insulated (AGE/Pioneer/Pakistan Cable Ltd) in 3/4" dia PVC conduit/channel Patti with Power Plug 20.Amps and back box PVC complete as required.	2	NO JOB	1750/=	one the ltr & Expts	3,500/=
7	P/F of ceiling fan of size 56" with blade, down rod 1 meter if required) include connection with 2 core 23/0.76 flexible wire, ceiling rose & dimmer etc complete in all aspect (Pak/Millar make)	8	NO JOB	4,100/=	From ltr & on ltr	32,800/=
8	P/M/F of Fan hook MS make including cutting of roof and plaster if required.	4	NO JOB	230/=	Trk ltr & Expts	920/=
9	P/F of Bracket fan Plastic Body size 18" dia Make (Pak/Millar) with round block, ceiling rose etc complete in					

S.#	Description.	Qty.	Unit.	Rate.	In Words	Amount
	all as respect.	2	NO.JOB	3900/=	Three thousand Nine hundred	7,800/=
10	P/F of Exhaust fan Plastic Body/Metal body size 12" Make (Pak/Millat) with round block, ceiling rose etc complete in all as respect.	2	NO.JOB	2200/=	Two thousand two hundred	4,400/=
11	P/F of Energy Saver 30Watts with threads holder, round block PVC (Philips make or Equivalent) complete in as respect.	32	NO.JOB	370/=	Three hundred seventy	11,840/=
12	P/F of Energy Saver 24Watts with threads holder, round block PVC (Philips make or Equivalent) complete in as respect.	12	NO.JOB	370/=	Three hundred seventy	4,440/=
13	Wiring for call bell point with 3x1.5mm PVC insulated cable (AGE/Pioneer/Pakistan Cable Ltd Make) 3/4" dia PVC conduit on wall with ding dong bell complete as required.	2	NO.JOB	1100/=	one thousand one hundred	2,200/=
14	P/F of Fancy switches with back box as per following specification. i) 4 Gang Clipsal type.	12	NO.JOB	425/=	Four hundred twenty five	5,100/=
	ii) 6 Gang Clipsal type.	8	NO.JOB	500/=	Five hundred	4,000/=
15	P/F of chennelpatti following size with all fixing accessories as required. a) 3/4" dia	280	Feets	20/=	Twenty	5,600/=
	b) 1" dia.	210	Feets	22/=	Twenty two	4,620/=
16	P/F of suction pump 1 HP (Siemens/Javid/Golden) make complete in all respect, including GI pipe 1" dia (Steelex/KPM) with Union and specials as required.	1	NO.JOB	18,000/=	Eighteen thousand	18,000/=
17	P/F of Mono Block Pump 2 HP single phase (Siemens/					

S.#	Description.	Qty.	Unit.	Rate.	In Words	Amount.
	Javaid/Golden) make complete in all respect, including GI pipe 1-1/2" dia (Steelex/KPM) with Union and specials as required.	1	NO JOB	21,500/-	Twenty one thousand five hundred	21,500/-
18	P/F of Electric Water cooler (MECO or Equivalent) 60 Galons with wooden stand C.C. base of appropriate size, discharge PVC pipe 1.5" dia with specials complete as required.	1	NO JOB	54,000/-	Fifty four thousand	54,000/-
19	P/F water filter for Electric Water Cooler 60 Galons as per site requirement and instruction of Engineer Incharge.	1	NO JOB	8,000/-	Eight thousand	8,000/-
20	P/L (Main or Sub main) of PVC/PVC insulated copper conductor (AGE/Pioneer/Pakistan Cable Ltd.) make of the following size for light connection at the height of as per site requirement.					
a)	Single core 10mm ² PVC/PVC	280	Meter	120/-	one hundred twenty	33,600/-
b)	Single core 6mm ² PVC/PVC	410	Meter	90/-	Ninety	36,900/-
c)	Single core 4mm ² PVC/PVC	530	Meter	58/-	Fifty eight	30,740/-
d)	Single core 2.5mm ² PVC/PVC	710	Meter	38/-	thirty eight	26,980/-
21	P/F of distribution board fabricated in M.S sheet best quality gauge powder coated, wall mounted type and locking arrangement with following size Circuit Breaker including cost of connection complete in all respect make (Japan/Germany/France) 1- 30 Amps S.P. (M.C.B.)					

S.#	Description.	Qty.	Unit.	Rate.	In Words	Amount.
	1-20Amps S.P (MCB).					
	10-10Amps S.P (MCB).	1	NO.JOB	13,000/=	Thirteen Thousand	13,000/=
22	Wall cutting for Poing wiring as per size site requirement complete in all respect and instruction of Engineer Incharge.	430	RFT.	10/=	Ten	4,300/=
23	Remaking and finshing of walls with c.c. for mixture 1:6 ratio complete in all respect and instruction of Engineer Incharge.	430	RFT.	14/=	Fourteen	6,020/=
				Sub Total:		405,923/=
MODEL SCHOOL NO. 1 AND 2 IN U.C. NO.1 OLD HAJI CAMP RASHID MINHAS SCHOOL SYED MEHMOOD SHAH ROAD OLD KUMHARWARA LYARI KARACHI						
1	Dismantling of existing Electrical items to prepare the-site for fresh workas follows:					
i)	Existing wiring with PVC pipes etc.	90	Meter	4/=	Four	360/=
ii)	Switch boards all size:	34	No	19/=	Nineteen	646/=
iii)	Distribution boards:	2	No	175/=	one hundred and seventy five	350/=
iv)	Removing of fans with the help of lader and skilled labour.	10	Job	100/=	one hundred	1,000/=
2	Point wiring for light or fan with 2x1.5mm PVC insulated cable (AGE/Pioneer/Pakistan cable Ltd) in 3/4" dia PVC conduit/channel pattu on wall or column complete in all respect.	90	NO.JOB	740/=	Seven hundred and forty	66,600/=
3	Circuit wiring from distribution board to switch board with PVC insulated wize 2x2.5mm (AGE/Pioneer/Pakistan Cable Ltd) make in PVC conduit/channel pattu on surface complete in all respect.	16	NO.JOB	1900/=	one thousand nine hundred	30,400/=

#	Description.	Qty.	Unit.	Rate.	In Words	Amount.
4	Rewiring for light or fan point with 2x1.5mm PVC insulated copper conductor single core wire in given PVC conduit /channel patti complete in all respect.	40	NO JOB	450/=	From hd 2 F/A	18,000/=
5	Wiring for light plug point with 2x7/0.29 PVC insulated cable (AGE/Pioneer/Pakistan Cable Ltd) in 3/4" dia PVC conduit/channel patti in the wall with light plug socket 5 pin 10/15Amps back box PVC complete as required.	25	NO JOB	1025/=	One hd 2 Two wire	25,625/=
6	Wiring for power plug point with 2x7/0.44 PVC insulated (AGE/Pioneer/Pakistan Cable Ltd) in 3/4" dia PVC conduit/channel Patti with Power Plug 20Amps and back box PVC complete as required.	8	NO JOB	1750/=	on the main hd 2 F/A	14,000/=
7	P/F of ceiling fan of size 56" with blade, down rod 1 meter if required) include connection with 2 core 23/0.76 flexible wire, ceiling rose & dimmer etc complete in all aspect (Pak/Millat make)	20	NO JOB	4100/=	From the one hd	82,000/=
8	P/M/F of Fan hook MS make including cutting of roof and plaster if required.	10	NO JOB	230/=	Two hd 2 hd	2,300/=
9	P/F of Bracket fan Plastic Body size 18" dia Make (Pak/Millat) with round block, ceiling rose etc complete in all as respect.	8	NO JOB	3900/=	Three hd 2 N hd	31,200/=
10	P/F of Exhaust fan Plastic Body/Metal body size 12" Make (Pak/Millat) with round block, ceiling rose etc complete in all as respect.	6	NO JOB	2200/=	Two hd 2 Two hd	13,200/=
11	P/F of Energy Saver 30Watts with threads holder, round block PVC (Philips make or Equivalent) complete in all as respect.					

S.#	Description.	Qty.	Unit.	Rate.	In Words	Amount.
12	P/F of Energy Saver 24Watts with threads holder, round block PVC (Phklips make or Equivalent) complete in as respect.	50	NO JOB	370/=	The 2nd	18,500/=
		20	NO JOB	370/=	The 2nd	7,400/=
13	Wiring for call bell point with 3x1.5mm PVC insulated cable (AGE/Pioneer/Pakistan Cable Ltd Make) 3/4" dia PVC conduit on wall with ding dong bell complete as required.	2	NO JOB	1100/=	2m the 1st	2,200/=
14	P/F of Fancy switches with back box as per following specification.					
i)	2 Gang (Fidayo/Clipsal/Links or Equivalent)	4	NO JOB	425/=	4x 2 Gang	1,700/=
ii)	3 Gang Clipsal type.	6	NO JOB	550/=	6x 3 Gang	3,300/=
iii)	4 Gang Clipsal type.	20	NO JOB	425/=	20x 4 Gang	8,500/=
iv)	5 Gang Clipsal type.	2	NO JOB	500/=	2x 5 Gang	1,000/=
v)	6 Gang Clipsal type.	18	NO JOB	550/=	18x 6 Gang	9,900/=
vi)	8 Gang Clipsal type.	2	NO JOB	750/=	2x 8 Gang	1,500/=
15	P/F of chennelpatti following size with all fixing accessories as required.					
a)	3/4" dia	280	Feets	20/=	Two 80	5,600/=
b)	1" dia.	220	Feets	22/=	Two 110	4,840/=
16	P/F of suction pump 1 HP (Siemens/Javaid/Golden) make complete in all respect, including GI pipe 3/4" dia (Steelex/KPM) with Union and specials as required.	1	NO JOB	18,000/=	Eight 1/2"	18,000/=
17	P/F of Mono Block Pump 2 HP single phase (Siemens/Javaid/Golden) make complete in all respect, including GI pipe 1-1/2" dia (Steelex/KPM) with Union and					

S.#	Description.	Qty.	Unit.	Rate.	In Words	Amount.
	specials as required.	1	NO JOB	22,000/=	Twenty Two Thousand	22,000/=
18	P/F of Electric Water cooler (MECO or Equivalent) 60 Galons with wooden stand C.C.base of appropriate size, discharge PVC pipe 1.5" dia with specials complete as required.	2	NO JOB	54,000/=	Fifty Four Thousand	108,000/=
19	P/F water filter for Electric Water Cooler 60 Galons as per site requirement and instruction of Engineer Incharge.	2	NO JOB	8,000/=	Eight Thousand	16,000/=
20	P/L (Main or Sub main) of PVC/PVC insulated copper conductor (AGE/Pioneer/Pakistan Cable Ltd.) make of the following size for light connection at the height of as per site requirement.					
a)	Single core 10mm ² PVC/PVC	380	Meter	120/=	one hundred	45,600/=
b)	Single core 6mm ² PVC/PVC	450	Meter	90/=	Ninety	40,500/=
c)	Single core 4mm ² PVC/PVC	520	Meter	58/=	Fifty eight	30,160/=
d)	Single core 2.5mm ² PVC/PVC	720	Meter	38/=	thirty eight	27,360/=
21	P/F of distribution board fabricated in M.S sheet best quality gauge powder coated, wall mounted type and locking arrangement with following size Circuit Breaker including cost of connection complete in all respect make (Japan/Germany/France.) 2- 30Amps S.P. (MCB). 2- 20Amps S.P (MCB). 8- 10Amps S.P (MCB).					
		2	NO JOB	13,000/=	thirteen thousand	26,000/=
22	P/F of Flood light IP 65 with Energy saver lamp					

S#	Description.	Qty.	Unit.	Rate.	In Words	Amount.
	(Philips) with internal wiring complete in all respect.	7	NO JOB	1200/-	1000/- Tubing	8,400/-
23	Wall cutting for Poing wiring as per size site requirement complete in all respect and instruction of Engineer Incharge.	350	RFT.	10/=	Ten	3,500/-
24	Remaking and finishing of walls with c.c. for mixture 1:6 ratio complete in all respect and instruction of Engineer Incharge.	350	RFT.	14/=	Fourteen	4,900/-
Sub Total						1700,541/-
MODEL SCHOOL NO.5,6,7,8 IN U.C. NO.2 JUMA BALOCH ROAD, OLD TRUCK STAND DARIYABAD MARIPUR ROAD LYARI KARACHI						
1	Dismantling of existing Electrical items to prepare the site for fresh work as follows:					
i)	Existing wiring with PVC pipes etc.	60	Meter	4/-	Four	240/-
ii)	Switch boards all size.	25	No	20/-	Twenty	500/-
iii)	Distribution boards.	3	No	200/-	Two hundred	600/-
iv)	Removing of fans with the help of ladder and skilled labour.	12	Job	100/-	One hundred	1200/-
2	Point wiring for light or fan with 2x1.5mm PVC insulated cable (AGE/Pioneer/Pakistan cable Ltd) in 3/4" dia PVC conduit/channel patti on wall or column complete in all respect.	50	NO JOB	750/-	Seven hundred	37,500/-
3	Circuit wiring from distribution board to switch board with PVC insulated wire 2x2.5mm (AGE/Pioneer/Pakistan Cable Ltd) make in PVC conduit/channel patti on surface complete in all respect.	15	NO JOB	2,000/-	Two thousand	30,000/-

S#	Description.	Qty.	Unit.	Rate.	In Words	Amount.
4	Rewiring for light or fan point with 2x1.5mm PVC insulated copper conductor single core wire in given PVC conduit /channel pattu complete in all respect.	40	NO JOB	600/-	sin hd	24,000/-
5	Wiring for light plug point with 2x7/0.29 PVC insulated cable (AGE/Pioneer/Pakistan Cable Ltd) in 3/4" dia PVC conduit/channel pattu in the wall with light plug socket 5 pin 10/15 Amps back box PVC complete as required.	25	NO JOB	1200/-	one thd Tw hd	30,000/-
6	Wiring for power plug point with 2x7/0.44 PVC insulated (AGE/Pioneer/Pakistan Cable Ltd) in 3/4" dia PVC conduit/channel Pattu with Power Plug 20 Amps and back box PVC complete as required.	8	NO JOB	2000/-	Two thd	16,000/-
7	P/F of ceiling fan of size 56" with blade, down rod 1 meter if required) include connection with 2 core 23/0.76 flexible wire, ceiling rose & dimmer etc complete in all aspect (Pak/Millat make)	20	NO JOB	4200/-	fan thd the hd	84,000/-
8	P/M/F of Fan hook MS make including cutting of roof and plaster if required.	10	NO JOB	250/-	Two hd & hd	2,500/-
9	P/F of Bracket fan Plastic Body size 18" dia Make (Pak/Millat) with round block, ceiling rose etc complete in all as respect.	8	NO JOB	4000/-	Fan thd	32,000/-
10	P/F of Exhaust fan Plastic Body/Metal body size 12" Make (Pak/Millat) with round block, ceiling rose etc complete in all as respect.	6	NO JOB	2500/-	Two thd sin hd	15,000/-
11	P/F of Energy Saver 30Watts with threads holder, round block PVC (Phelps make or Equivalent) complete in					

S.#	Description.	Qty.	Unit.	Rate.	In Words	Amount.
	as respect.					
12	P/F of Energy Saver 24Watts with threads holder, round block PVC (Philips make or Equivalent) complete in	56	NO JOB	380/-	Three hundred eight	21,280/-
	as respect.					
13	Wiring for call bell point with 3x1.5mm PVC insulated cable (AGE/Pioneer/Pakistan Cable Ltd Make) 3/4" dia PVC conduit on wall with ding dong bell complete as required.	30	NO JOB	380/-	Three hundred eight	11,400/-
14	P/F of Fancy switches with back box as per following specification.					
i)	4 Gang Clipsal type.	18	NO JOB	450/-	Four hundred fifty	8,100/-
ii)	5 Gang Clipsal type.	4	NO JOB	500/-	Five hundred	2,000/-
iii)	6 Gang Clipsal type.	18	NO JOB	600/-	Six hundred	10,800/-
iv)	8 Gang Clipsal type.	2	NO JOB	750/-	Seven hundred fifty	1,500/-
15	P/F of chennelpatti following size with all fixing accessories as required.					
a)	3/4" dia	240	Feets	22/-	Twenty two	5,280/-
b)	1" dia	200	Feets	24/-	Twenty four	4,800/-
16	P/F of suction pump 1 HP (Siemens/Javaid/Golden) make complete in all respect, including GI pipe 1" dia (Steelex/KPM) with Union and specials as required.	1	NO JOB	18,000/-	Eighteen thousand	18,000/-
17	P/F of Mono Block Pump 2 HP single phase (Siemens/Javaid/Golden) make complete in all respect, including GI pipe 1-1/2" dia (Steelex/KPM) with Union and specials as required.	1	NO JOB	24,000/-	Twenty four thousand	24,000/-
18	P/F of Electric Water cooler (MECO or Equivalent) 60 Galons with wooden stand C.C base of appropriate size, discharge PVC pipe 1.5" dia with specials complete as required.	1	NO JOB	55,000/-	Fifty five thousand	55,000/-


S.#	Description.	Qty.	Unit.	Rate.	In Words	Amount.
19	P/F water filter for Electric Water Cooler 60 Galons as per site requirement and instruction of Engineer Incharge.	1	NO JOB	18,000/-	one thd eight	18,000/-
20	P/L (Main or Sub main) of PVC/PVC insulated copper conductor (AGE/Pioneer/Pakistan Cable Ltd.) make of the following size for light connection at the height of as per site requirement.					
a)	Single core 10mm ² PVC/PVC	330	Meter	124/-	one hnd 27th in Nitya Fy smly Fmly	40,920/-
b)	Single core 6mm ² PVC/PVC	480	Meter	94/-		45,120/-
c)	Single core 4mm ² PVC/PVC	500	Meter	60/-		30,000/-
d)	Single core 2.5mm ² PVC/PVC	760	Meter	40/-		30,400/-
21	P/F of distribution board fabricated in MS sheet best quality gauge powder coated, wall mounted type and locking arrangement with following size Circuit Breaker including cost of connection complete in all respect make (Japan/Germany/France.)					
	1-60 Amps TP (MCCB)					
	2- 30Amps S.P. (MCB)					
	2-20Amps S P (MCB)					
	8-10Amps S.P. (MCB)	1	NO JOB	15,000/-	Fifteen thd	15,000/-

S.#	Description.	Qty.	Unit.	Rate.	In Words	Amount.
22	P/F of distribution board fabricated in M.S sheet best quality gauge powder coated, wall mounted type and locking arrangement with following size Circuit Breaker including cost of connection complete in all respect make (Japan/Germany/France.) 2- 30Amps S.P. (MCB). 2-20Amps S.P (MCB). 8-10Amps S.P (MCB).	1	NO JOB	22,000/-	Twenty Two Thousand	22,000/-
23	P/F of Flood light IP 65 with Energy saver lamp (Philips) with internal wiring complete in all respect.	5	NO JOB	6,000/-	Six Thousand	30,000/-
24	Wall cutting for Poing wiring as per size site requirement complete in all respect and instruction of Engineer Incharge.	400	RFT.	10/-	Ten	4,000/-
25	Remaking and finshing of walls with c.c. for mixture 1:6 ratio complete in all respect and instruction of Engineer Incharge.	400	RFT.	15/-	Fifteen	6,000/-
					Sub Total:	67,000/-
					Grand Total:	3,180,078
Amounts in Words	THREE MILLION ONE HUNDRED EIGHTY THOUSANDS & SEVENTY EIGHT ONLY					

I / We read each & every terms & conditions of Volume-I and agreed in all to be part & parcel of the agreement.

I/We quoted the price schedule and bound ourselves to comply all terms and conditions of this contract with all existing rules and regulations of KMC and I have attached an Bid Security in shape of Pay Order / Bank Guarantee Rs. 65,000/- No. 3633215

Dated 28/8/2012 issued from UBL ICDA Scharwar amounting Rs.65,000/- in favour of Karachi Metropolitan Corporation (KMC).

Checked & Verified by: 

Signature of Bidder with Name & Stamp 

1/3.

1. Tender received in Sealed/Unsealed/
Tape sealed/Gum seal cover.

2. P.O. No: (a) 34332/15..dated. 28/1/15.
for Rs..... 6.5 Lacs /% of Earnest Money
is/are attached as: attached.

3. No: correction/No: cutting/
cutting: none.

4. Rates written in words.

5. Rates quoted: Total amount quoted for Rs = 31,80,078/-
(Total amount quoted for Rs = 31,80,078/-)
T.T. Rs. ... Million .. One ... Hundred Eighty Thousand Seventy Eight (only)

D. D. W.

Aij

Dy Director (Finance)
Member Secretary
T.O.C
Engineering Dep.
KMC

Chief Engineer ()
Member
T.O.C
Engineering Dep.
KMC

Chief Engineer
Chairman
T.O.C
Engineering Dep.
KMC

SINDH PUBLIC PROCUREMENT REGULATORY AUTHORITY

CONTRACT EVALUATION FORM

TO BE FILLED IN BY ALL PROCURING AGENCIES FOR PUBLIC CONTRACTS OF ENGINEERING DEPARTMENT.

- 1). NAME OF THE ORGANIZATION / DEPTT. KARACHI METROPOLITAN CORPORATION (2)
- 2). PROVINCIAL GOVT./LOCAL GOVT./OTHER LOCAL GOVERNMENT (KMC) _____
- 3). TITLE OF CONTRACT Improvement & Rehabilitation of Electrical Wiring Work in 06 School (Building) Including One Model School of (Defunct)UC-5,6&7.
- 4). TENDER NUMBER SE/(CM)/ED/KMC/363/2012 dated 01-03-2012.
- 5). BRIEF DESCRIPTION OF CONTRACT Improvement & Rehabilitation of Electrical Wiring Work in 06 School (Building) Including One Model School of (Defunct)UC-5,6&7.
- 6). FORUM THAT APPROVED THE SCHEME CDGK ADMINISTRATOR, KMC
- 7). TENDER ESTIMATED VALUE Rs.3.259 Million
- 8). ENGINEER'S ESTIMATE Rs. 3.259 Million
(For Electrical Works only)
- 9). ESTIMATED COMPLETION PERIOD (AS PER CONTRACT) 02 month.
- 10). TENDER OPENED ON (DATE & TIME) 28-03-2012 & 2.30 p.m
- 11). NUMBER OF TENDER DOCUMENTS SOLD 04 Nos.
(Attach list of buyers)
- 12). NUMBER OF BIDS RECEIVED 04 Nos.
- 13). NUMBER OF BIDDERS PRESENT AT THE TIME OF OPENING OF BIDS 04 Nos.
- 14). BID EVALUATION REPORT Attached.
(Enclose a copy)
- NAME AND ADDRESS OF THE SUCCESSFUL BIDDER M/s. Shaheen Construction Company, 45-C, 27th Street, Tauheed Commercial, Phase-V, D.H.A, Karachi.
- 15). CONTRACT AWARD PRICE Rs.32,17,773/=
- 16). RANKING OF SUCCESSFUL BIDDER IN EVALUATION REPORT 1st Lowest M/s. Shaheen Construction Company.
(i.e. 1st, 2nd, 3rd EVALUATION BID)
- 17). METHOD OF PROCUREMENT USED:- (TICK ONE)
- a). SINGLE STAGE – ONE ENVELOPE PROCEDURE _____ ✓ _____
- b). SINGLE STAGE – TWO ENVELOPE PROCEDURE _____ X _____
- c). TWO STAGE BIDDING PROCEDURE _____ X _____
- d). TWO STAGE – TWO ENVELOPE BIDDING PROCEDURE _____ X _____
- 18). PLEASE SPECIFY IF ANY OTHER METHOD OF PROCUREMENT WAS ADOPTED i.e.

EMERGENCY, DIRECT CONTRACTING / NEGOTIATION ETC. WITH BRIEF REASONS:

19). APPROVING AUTHORITY FOR AWARD OF CONTRACT Administrator

20). WHETHER THE PROCUREMENT WAS INCLUDED IN ANNUAL PROCUREMENT PLAN?

Yes	No	<input checked="" type="checkbox"/>
-----	----	-------------------------------------

21). ADVERTISEMENT:

i). SPPRA Website
(If yes, give date and SPPRA's tender number)

Yes	ID # 7003/2012
No	

ii). News Papers
(If yes, give names of newspapers and dates)

Yes	Business Recorder dt-03-03-12 Naway-e-Waqt & Arm dated 04-03-2012
No	

22). NATURE OF CONTRACT

Local	<input checked="" type="checkbox"/>	Int.	<input type="checkbox"/>
-------	-------------------------------------	------	--------------------------

23). WHETHER QUALIFICATION CRITERIA
WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?
(If yes, enclose a copy)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

24). WHETHER BID EVALUATION CRITERIA
WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?
(If yes, enclose a copy)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

25). WHETHER APPROVAL OF COMPETENT AUTHORITY WAS OBTAINED FOR USING A
METHOD OTHER THAN OPEN COMPETITIVE BIDDING?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

26). WAS BID SECURITY OBTAINED FROM ALL THE BIDDERS?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

27). WHETHER THE SUCCESSFUL BIDDER WAS LOWEST
EVALUATED BID / BEST EVALUATED BID (in case of consultancies)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

28). WHETHER THE SUCCESSFUL BIDDER WAS TECHNICALLY COMPLAINT?

Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

29). WHETHER INTEGRITY PACT WAS SIGNED?
(If yes, enclose a copy)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

30). WHETHER NAMES OF THE BIDDERS AND THEIR QUOTED PRICES WERE READ OUT AT
THE TIME OF OPENING OF BIDS?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

31). WHETHER COPY OF EVALUATION REPORT GIVEN TO ALL BIDDERS?
(Attach copy of the bid evaluation report)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

32). WAS ANY NEGOTIATION DONE IN VIOLATION OF PPRA / OTHER
APPLICABLE RULES
(If yes, give reasons)

Yes	
No	<input checked="" type="checkbox"/>

33). ANY DEVIATION FROM SPECIFICATIONS GIVEN IN THE TENDER NOTICE / DOCUMENTS
(If yes, give details)

Yes	
No	✓

34). WAS THE EXTENSION MADE IN RESPONSE TIME?
(If yes, give reasons)

Yes	
No	✓

35). DEVIATION FROM QUALIFICATION CRITERIA
(If yes, give details)

Yes	
No	✓

36). WAS IT ASSURED BY THE PROCURING AGENCY THAT THE SELECTED FIRM IS NOT BLACK LISTED?

Yes	✓	No	-
-----	---	----	---

37). WAS A VISIT MADE BY ANY OFFICER / OFFICIAL OF THE PROCURING AGENCY TO THE SUPPLIER'S PREMISES IN CONNECTION WITH THE PROCUREMENT? IF SO, DETAILS TO BE ASCERTAINED REGARDING FINANCING OF VISIT, IF ABROAD.
(If yes, enclose a copy)

Yes		No	✓
-----	--	----	---

38). WERE PROPER SAFEGUARDS PROVIDED ON MOBILIZATION ADVANCE PAYMENT IN THE CONTRACT (BANK GUARANTEE ETC)?

Yes	NA	No	NA
-----	----	----	----

39). SPECIAL CONDITIONS, IF ANY
(If yes, give Brief Description)

Yes		No	✓
-----	--	----	---

Signature & Official Stamp of
Authorized Officer

K.R.A.
Superintending Engineer (CM) KMC

FOR OFFICE USE ONLY

SPPRA, Block. No.8, Sindh Secretariat No.4-A, Court Road, Karachi.

Tele: 021-9205356; 021-9205369 & Fax: 021-9206291



KARACHI METROPOLITAN CORPORATION
OFFICE OF THE SUPDT: ENGINEER(CONTRACT MANANGEMENT)
ENGINEERING DEPARTMENT

Room # C-412, 4th Floor, Civic Centre, Gulshan-e-Iqbal, Karachi.
Phone # (92-91)9230669, Fax # (92-21)9232426

NO.SE/CM/ED/KMC/868 /2013

DATED:- 09/05/2013


M/s. Shaheen Construction Company,
45-C, 27th Street, Tauheed Commercial,
Phase-V, D.H.A.,
KARACHI.

ACCEPTANCE LETTER

**SUBJECT:- IMPROVEMENT & REHABILITATION OF ELECTRICAL WIRING
WORK IN 06 SCHOOL (BUILDING) INCLUDING ONE MODEL
SCHOOL OF (DEFUNCT)UC-5,6&7.**

The competent authority has been pleased to accord sanction the above mentioned work for an amount of Rs.32,17,773/= (Rupees Thirty Two Lac Seventeen Thousand Seven Hundred & Seventy Three Only).

You are advised to furnish stamps of the value of Rs.9,653/= i.e @ of 0.3% of sanction cost for execution of contract agreement within 3 days from the receipt of this letter.


SUPERINTENDING ENGINEER(CM)
ENGINEERING DEPARTMENT, KMC.

Copy to the:

1. D.G(Tech. Services), Engg: Department, KMC.
2. Chief Engineer(CM), Engg: Department, KMC.
3. Director(Accounts), Engg: Department, KMC.



Stamp Value:- Rs. 9

An AGREEMENT made this 9th day of May (2013)

between the Karachi Metropolitan Corporation of the city of Karachi by in the Christian year Two Thousand Thirteen through their Chief Engineer(CM) hereinafter called the KMC (which expression shall include their successors) of the one part and M/s. Shaheen Construction Company carrying on business under the name and style of M/s.- Shaheen Construction Company, 45-C, 27th Street, Tauheed Commercial Phase-V, D.H.A, Karachi by their Proprietor hereinafter called the Contractors (which expression shall include their successors and assignees of the said firm and heirs executor, administrators and assignees of the said individual partners of the said firm) of the other part.

WHEREAS the KMC has accepted the Contractor's tender here unto annexed and marked 1/4 and dated 28-03-2012 for the work of "Improvement Rehabilitation of Electrical Wiring Work in 06 School (Building) Including One Model School of (Defunct)UC-5,6&7" sanctioned by Administrator, KMC vide para 9/n. at a cost of Rs.32,17,773/= (Rupees Thirty Two Lac Seventeen Thousand Seven Hundred & Seventy Three Only) Time Limit 90 days, Penalty Rs.3,000/= per day according in to the specification and the general conditions of the contract here unto annexed and marked 1/4 and dated 28-03-2012 and signed by the Contractors after having made themselves fully acquainted with its meaning and where as the Contractors have already deposited with the KMC the sum of Rs.72,000/= as 2% Earnest Money for the above work as security deposit 8% to be deducted from running bills in addition to the Earnest Money Rs.72,000/= (Rupees Seventy Thousand Only) vide challan No Nil dated: 10-5-2013 and have given to the KMC a lien over such sum as Security for the due fulfillment of the contract NO V THIS AGREEMENT WITNESSETH that the KMC and the Contractor shall respectively well truly carry and fulfill the contract and abide by the all terms and conditions of the aforesaid specification and tender.

The contractors do hereby bind themselves, their heirs, successors/legal representatives and assignees to pay to the KMC a sum of Rs. Equal to 10% as mentioned above by way of penalty in case of the breach of any of the terms and conditions of the contracts including those mentioned in the tender without prejudice to the right of the KMC to recover the damages for and such breach.

IN WITNESS WHEREOF the said parties have set their hands this 9th day of May


for the City of Karachi


CHIEF ENGINEER,
CONTRACT MANAGEMENT
ENGINEERING DEPARTMENT, KMC

1. M. N. B. Siddiqui K.A.F.C.S

2. M/s K.N Builder

Witness



SUPERINTENDENT
Office, City Court
Karachi
MAY 2013





KARACHI METROPOLITAN CORPORATION
OFFICE OF THE SUPDT. ENGINEER(CONTRACT MANAGEMENT)
ENGINEERING DEPARTMENT

Room # C-412, 4th Floor, Civic Centre, Gulshan-e-Iqbal, Karachi.
Phone # (92-91)9230669, Fax # (92-21)9232426

NO.SE/CM/ED/KMC/ 850 /2013

DATED:- 13/05/2013

M/s. Shaheen Construction Company,
45-C, 27th Street, Tauheed Commercial,
Phase-V, D.H.A.
KARACHI.


WORK ORDER

SUBJECT:- IMPROVEMENT & REHABILITATION OF ELECTRICAL WIRING WORK IN 06 SCHOOL (BUILDING) INCLUDING ONE MODEL SCHOOL OF (DEFUNCT) UC-5,6&7.

The competent authority has been pleased to award you a contract for above mentioned work for an amount of **Rs.32,17,773/= (Rupees Thirty Two Lac Seventeen Thousand Seven Hundred & Seventy Three Only)**. You have accepted the contractual responsibility and have signed the contract agreement on **09-05-2013**.

You are therefore, requested to start the work with as per directions and in accordance with the specification as well as terms & conditions. The completion time of **60 days** as specified herein and also in the tender documents shall commence within 07 days time from the receipt of this work order.

In case of failure to complete the work within the stipulated time, penalty shall be imposed @ **Rs.3,000/=** per day. In case you fail to commence the work within seven days after the receipt of work order, action under the relevant clause of the contract agreement will be initiated against you


SUPERINTENDING ENGINEER(CM)
ENGINEERING DEPARTMENT, KMC.

Copy to the:

1. D.G.(Tech. Services), Engg: Department, KMC.
2. Chief Engineer(E&M), Engg: Department, KMC.
3. Chief Engineer(CM) Engg: Department, KMC.
4. Director(Accounts), Engg: Department, KMC.



Tender issued to
 M/s. *Shahem Construction*
 Against pay order No. *487766*
 Dated *8/12* of *2007*
 Of *ABC* Branch
 Accountant
 Charge

KARACHI METROPOLITAN CORPORATION

ENGINEERING DEPARTMENT

NAME OF SCHEME:
IMPROVEMENT & REHABILITATION OF ELECTRICAL WIRING
WORK IN 06 SCHOOL (BUILDING) INCLUDED ONE MODEL
SCHOOL OF (DEFUNCT) UC-5, 6 & 7.

(VOLUME-II)

Estimated Cost:- Rs. 3.259 Million
 Time Limit:- 60 Days
 To be Opened on:- 20-03-2012

Tender Cost: Rs.3,000/-
 Penalty: As per Contract Data
 Validity of Tender: As per Bidding Data

[Signature]
 Executive Engineer (CM) E&M
 Engg. Department, KMC

Tender Issued:

No: KMC/GMED/4012

Issue to M/s _____

Dated _____

Pay Order No. _____

Dated _____

Bank: _____

Signature & Stamp of Issuing Authority

Tender issued to
 M/s. *Dean Muhammad*
 Against pay order No. *487766*
 Dated *8/12* of *2007*
 Of *ABC* Branch
 Accountant
 Charge
 Tender Section
 W&S



KARACHI METROPOLITAN CORPORATION

OFFICE OF THE EXECUTIVE ENGINEER (CM) E&M

ENGINEERING DEPARTMENT

4th Floor, Room No. C-412, Civic Centre, Gulshan-e-Iqbal, Karachi
 Phone: 021-99232426 Fax: 021-99230669

PRICE SCHEDULE

SUBJECT : IMPROVEMENT & REHABILITATION OF ELECTRICAL WIRING WORK IN 06 SCHOOL (BUILDING) INCLUDED ONE MODEL SCHOOL OF (DEFUNCT) UC-5. 6 & 7.

S.#	Description.	Qty.	Unit.	Rate.	In Words	Amount.
	KMC SCHOOL NO.13 AND 14 IN U.C. NO.5 BISMILLAH COLONY NEAR MIR AYOUB SCHOOL BAGHDADI, LYARI KARACHI.					
1	Dismantling of existing Electrical items to prepare the site for fresh work as follows:					
i)	Existing wiring with PVC pipes etc.	70	Meter	4/-	four	280-00 342
ii)	Switch boards all size.	18	No	19 1/2	Nineteen	566-00
iii)	Distribution boards.	2	No	175/-	one seventy five	350-00
iv)	Removing of fans with the help of ladder and skilled labour.	6	Job	150/-	one fifty	900-00
2	Point wiring for light or fan with 2x1.5mm PVC insulated cable (AGE/Pioneer/Pakistan cable Ltd) in 3/4" dia PVC conduit/channel putti on wall or column complete in all respect.	54	NO JOB	740/-	seven forty	39960-00
3	Circuit wiring from distribution board to switch board with PVC insulated wire 2x2.5mm (AGE/Pioneer/Pakistan Cable Ltd) make in PVC conduit/channel					

S.#	Description.	Qty.	Unit.	Rate.	In Words	Amount.
	partition surface complete in all respect.	10	NO JOB	1900/=	Nineteen hundred	19000-00
4	Rewiring for light or fan point with 2x1.5mm PVC insulated copper conductor single core wire in given PVC conduit / channel patti complete in all respect.	15	NO JOB	440/=	four hundred forty	6600-00
5	Wiring for light plug point with 2x7/0.29 PVC insulated cable (AGE/Pioneer/Pakistan Cable Ltd) in 3/4" dia PVC conduit/channel patti in the wall with light plug socket 5 pin 10/15Amps back box PVC complete as required.	4	NO JOB	1000/=	one thousand	4000/=
6	Wiring for power plug point with 2x7/0.44 PVC insulated (AGE/Pioneer/Pakistan Cable Ltd) in 3/4" dia PVC conduit/channel Patti with Power Plug 20Amps and back box PVC complete as required.	2	NO JOB	1750/=	seventeen hundred fifty	3500-00
7	P/F of ceiling fan of size 56" with blade, down rod 1 meter if required) include connection with 2 core 23/0.76 flexible wire, ceiling rose & dimmer etc complete in all aspect (Pak/Millat make)	12	NO JOB	4000/-	four thousand	48000-00
8	P/M/F of Fan hook MS make including cutting of roof and plaster if required.	6	NO JOB	230/=	Two hundred thirty	1380-00.
9	P/F of Bracket fan Plastic Body size 18" dia Make (Pak/Millat) with round block, ceiling rose etc complete in all as respect.	2	NO JOB	3800/=	Three thousand Eight hundred	7600-00
10	P/F of Exhaust fan Plastic Body/Metal body size 12" Make (Pak/Millat) with round block, ceiling rose etc complete in all as respect.	2	NO JOB	2000/=	Two thousand	4000/=

S.#	Description.	Qty.	Unit.	Rate.	In Words	Amount
11	P/F of Energy Saver 30Watts with threads holder, round block PVC (Philips make or Equivalent) complete in as respect.	24	NO JOB	360/-	Three Sixty	8640-/-
12	P/F of Energy Saver 24Watts with threads holder, round block PVC (Philips make or Equivalent) complete in as respect.	15	NO JOB	360/-	Three Sixty	5400-/-
13	Wiring for call bell point with 3x1.5mm PVC insulated cable (AGE/Pioneer/Pakistan Cable Ltd Make) 3/4" dia PVC conduit on wall with ding dong bell complete as required	2	NO JOB	900/-	Nine hundred	1800-/-
14	P/F of Fancy switches with back box as per following specification	10	NO JOB	425/-	four Twenty five	4250-/-
i)	4 Gang Chpsal type.	8	NO JOB	575/-	five seventy five	4600-/-
ii)	6 Gang Chpsal type.					
15	P/F of chennelpatti following size with all fixing accessories as required.	260	Feets	20/-	Twenty	5200-/-
a)	3/4" dia	220	Feets	22/-	Twenty Two	4840-/-
b)	1" dia.					
16	P/F of suction pump 1 HP (Siemens/Javid/Golden) make complete in all respect, including GI pipe 1" dia (Steelex/KPM) with Union and specials as required.	1	NO JOB	18000	Eighteen hundred	18000-/-
17	P/F of Mono Block Pump 2 HP single phase (Siemens/Javid/Golden) make complete in all respect, including GI pipe 1-1/2" dia (Steelex/KPM) with Union and specials as required.	1	NO JOB	24000	Twenty four Thousand.	24000-/-
18	P/F of Electric Water cooler (MECO or					

212422

S.#	Description.	Qty.	Unit.	Rate.	In Words	Amount.
	Equivalent) 60 Galons with wooden stand C.C base of appropriate size, discharge PVC pipe 1.5" dia with specials complete as required	1	NO JOB	58000/-	fifty Eight Thousand.	58000-00
19	P/F water filter for Electric Water Cooler 60 Galons as per site requirement and instruction of Engineer Incharge.	1	NO JOB	9000/-	Nine Thousand	9000-00
20	P/L (Main or Sub main) of PVC/PVC insulated copper conductor (AGE/Pioneer/Pakistan Cable Ltd.) make of the following size for light connection at the height of as per site requirement.					
a)	Single core 10mm ² PVC/PVC	300	Meter	125/-	One Twenty five	37500/-
b)	Single core 6mm ² PVC/PVC	430	Meter	100/-	one Thousand	43000-00
c)	Single core 4mm ² PVC/PVC	500	Meter	58/-	fifty Eight	29000/-
d)	Single core 2.5mm ² PVC/PVC	740	Meter	38/-	Thirty Eight	28120/-
21	P/F of distribution board fabricated in M.S sheet best quality gauge powder coated, wall mounted type and locking arrangement with following size Circuit Breaker including cost of connection complete in all respect make (Japan/Germany/France.) 1- 30Amps S.P. (MCB). 1-20Amps S.P (MCB) 5-10Amps S.P (MCB).					
		2	NO JOB	9000/-	Nine Thousand	18000/-
22	Wall cutting for Posing wiring as per size site requirement complete in all respect and instruction of Engineer Incharge.	400	RFT	10/-	Ten	4000/-

S.#	Description.	Qty.	Unit.	Rate.	In Words	Amount.
23	Remaking and finishing of walls with c.c for mixture 1:6 ratio complete in all respect and instruction of Engineer incharge.	400	RFT.	14	fourteen	5600-00
					Sub Total:	450860
						444862/-
	KMC SCHOOL NO.15 IN U.C. NO.6 BISMILLAH COLONY NEAR KMC HOSPITAL SLAUGHTER HOUSE, SHAH BAIG LANE LYARI.					
1	Dismentling of existing Electrical items to prepare the site for fresh work as follows:					
i)	Existing wiring with PVC pipes etc.	75	Meter	4/2	four	300-00
ii)	Switch boards all size.	16	No	190/=	one ninety	3040-00
iii)	Distribution boards.	1	No	175/=	one seventy five	175-00
iv)	Removing of fans with the help of ladder and skilled labour.	5	Job	100/=	one hundred	500-00
2	Point wiring for light or fan with 2x1.5mm PVC insulated cable (AGE/Pioneer/Pakistan cable Ltd) in 3/4" dia PVC conduit/channel patti on wall or column complete in all respect.	35	NO JOB	740/=	Seven forty	25900-00
3	Circuit wiring from distribution board to switch board with PVC insulated wire 2x2.5mm (AGE/Pioneer/Pakistan Cable Ltd) make in PVC conduit/channel patti on surface complete in all respect.	8	NO JOB	1900/=	Nineteen hundred.	15200-00
4	Rewiring for light or fan point with 2x1.5mm PVC insulated copper conductor single core wire in given PVC conduit /channel patti complete in all respect	20	NO JOB	440/=	four forty	8800-00
5	Wiring for light plug point with 2x7/0.29 PVC insulated cable (AGE/Pioneer/Pakistan Cable Ltd) in 3/4"					

S.#	Description.	Qty.	Unit.	Rate.	In Words	Amount
	dra PVC conduit/channel patri in the wall with light plug socket 5 pin 10/15 Amps back box PVC complete as required.	4	NO JOB	1100/=	Eleven hundred	4400/=
6	Wiring for power plug point with 2x 7/0-44 PVC insulated (AGE/Pioneer/Pakistan Cable Ltd) in 3/4" dia PVC conduit/channel Patri with Power Plug 20 Amps and back box PVC complete as required.	2	NO JOB	1750/=	Seventeen hundred fifty	3500/=
7	P/F of ceiling fan of size 56" with blade, down rod 1 meter if required) include connection with 2 core 23/0.76 flexible wire, ceiling rose & dimmer etc complete in all aspect (Pak/Millat make)	8	NO JOB	4000/=	four thousand	32000/=
8	P/M/F of Fan hook MS make including cutting of roof and plaster if required.	4	NO JOB	230/=	Two thirty	920/=
9	P/F of Bracket fan Plastic Body size 18" dia Make (Pak/Millat) with round block, ceiling rose etc complete in all as respect.	2	NO JOB	3800/=	Three thousand Eight hundred	7600/=
10	P/F of Exhaust fan Plastic Body/Metal body size 12" Make (Pak/Millat) with round block, ceiling rose etc complete in all as respect.	2	NO JOB	2000/=	Two thousand	4000/=
11	P/F of Energy Saver 30Watts with threads holder, round block PVC (Philips make or Equivalent) complete in as respect.	24	NO JOB	360/=	Three Sixty	8640/=
12	P/F of Energy Saver 24Watts with threads holder, round block PVC (Philips make or Equivalent) complete in as respect.	14	NO JOB	360/=	Three Sixty	5040/=
13	Wiring for call bell point with 3x1.5mm PVC insulated					


S.#	Description	Qty.	Unit.	Rate.	In Words	Amount
	cable (AGE, Pioneer Pakistan Cable Ltd Make) 3/4" dia PVC. conduit on wall with dug along ball complete as required	2	NO JOB	900/=	Nine hundred	1800/=
14	P/F of Fancy switches with lock box as per following specification					
a)	3 Gang Clipsal type	10	NO JOB	425/=	Four Twenty five	4250/=
a)	6 Gang Clipsal type	8	NO JOB	550/=	Five fifty	4400
15	P/F of chennelpatti following size with all fixing accessories as required					5400/=
a)	3/4" dia	270	Feet	20/=	Twenty	5400/=
b)	1" dia	230	Feet	22/=	Twenty Two	
16	P/F of suction pump 1 HP (Siemens/Javaid/Golden) make complete in all respect, including GI pipe 1" dia (Steelex/KPM) with Union and specials as required	1	NO JOB	18000	Eighteen thousand	18000/=
17	P/F of Mono Block Pump 2 HP single phase (Siemens/Javaid/Golden) make complete in all respect, including GI pipe 1-1/2" dia (Steelex/KPM) with Union and specials as required.	1	NO JOB	25000/=	Twenty five Thousand	25000/=
18	P/F of Electric Water cooler (MECO or Equivalent) 60 Galons with wooden stand C.C. base of appropriate size, discharge PVC pipe 1.5" dia with specials complete as required.	1	NO JOB	19000	Nineteen thousand	19000/=
19	P/F water filter for Electric Water Cooler 60 Galons as per site requirement and instruction of Engineer Incharge.	1	NO JOB	15000	Fifteen thousand	15000/=
20	P/L (Main or Sub main) of PVC / PVC insulated copper conductor (AGE/Pioneer/Pakistan Cable Ltd.) make of					

S.#	Description.	Qty.	Unit.	Rate.	In Words	Amount.
	the following size for light connection at the height of as per site requirement.					
a)	Single core 16mm ² PVC/PVC	310	Meter	120/-	one twenty	37200-
b)	Single core 6mm ² PVC/PVC	430	Meter	90/-	Nine ty	38700-
c)	Single core 4mm ² PVC/PVC	520	Meter	58/-	fifty eight	30160-
d)	Single core 2.5mm ² PVC/PVC	710	Meter	38/-	Ther ty eight	26980-
21	P/F of distribution board fabricated in MS sheet best quality gauge powder coated, wall mounted type and locking arrangement with following size Circuit Breaker including cost of connection complete in all respect make (Japan/Germany/France.) 1- 30Amps S.P. (MCB). 1- 20Amps S.P (MCB) 8-10Amps S.P (MCB).	1	NO JOB	9000/-	Nine Thourse	9000-
22	Wall cutting for Pong wiring as per size site requirement complete in all respect and instruction of Engineer Incharge.	460	RFT.	10/-	Ten	4600/-
23	Remaking and finshing of walls with c.c for mixture 1:6 ratio complete in all respect and instruction of Engineer Incharge.	460	RFT.	10/-	Ten	6440/-
Sub Total:						3,63,005/-
KMC SCHOOL NO.20 & 21 IN U.C. NO.7 JUMMA MASJID ROAD BAHAR COLONY LYARI KARACHI.						3,69,165/-



S #	Description.	Qty.	Unit.	Rate.	In Words	Amount.
7	P/F of ceiling fan of size 36" with blade, down rod 1 meter if required; include connection with 2 core 23/0 76 flexible wire, ceiling rose & dimmer etc complete in all aspect (Pak/Millar make)	32	NO JOB	4600/-	four thousand	128000/-
8	P/M/F of Fan hook MS make including cutting of roof and plaster if required.	16	NO JOB	230/-	Two Twenty	3680/-
9	P/F of Bracket fan Plastic Body size 18" dia Make (Pak/Millar) with round block, ceiling rose etc complete in all as respect.	4	NO JOB	3800/-	Three thousand eight hundred	15200/-
10	P/F of Exhaust fan Plastic Body/Metal body size 12" Make (Pak/Millar) with round block, ceiling rose etc complete in all as respect.	2	NO JOB	2100/-	Two thousand one hundred	4200/-
11	P/F of Energy Saver 30Watts with threads holder, round block PVC (Philips make or Equivalent) complete in as respect.	64	NO JOB	360/-	Three Sixty	23040/-
12	P/F of Energy Saver 24Watts with threads holder, round block PVC (Philips make or Equivalent) complete in as respect.	30	NO JOB	360/-	Three Sixty	10800/-
13	Wiring for call bell point with 3x1.5mm PVC insulated cable (AGE/Pioneer/Pakistan Cable Ltd Make) 3/4" dia PVC conduit on wall with ding dong bell complete as required.	2	NO JOB	900/-	Nine hundred	1800/-
14	P/F of Fancy switches with back box as per following specification i) 4 Gang Clipsal type.	22	NO JOB	425/-	four twenty five	9350/-

S.#	Description	Qty.	Unit.	Rate	In Words	Amount
b)	Single core 6mm ² PVC/PVC	460	Meter	90/-	ninety	41400/-
c)	Single core 4mm ² PVC/PVC	340	Meter	58/-	fifty eight	31320/-
d)	Single core 2.5mm ² PVC/PVC	770	Meter	38/-	thirty eight	29260/-
21	P/F of distribution board fabricated in MS sheet best quality gauge powder coated, wall mounted type and locking arrangement with following size Circuit Breaker including cost of connection complete in all respect make (Japan/Germany/France.) 2- 30 Amps S.P. (MCB) 2- 20 Amps S.P. (MCB) 8- 10 Amps S.P. (MCB)	2	NO JOB	9000/-	Nine Thousand	18000/-
22	Wall cutting for Posing wiring as per size site requirement complete in all respect and instruction of Engineer Incharge.	400	RFT	10	Ten	4000/-
23	Remaking and finishing of walls with c.c. for mixture 1:6 ratio complete in all respect and instruction of Engineer Incharge.	400	RFT	14	Fifteen	5600/-
Sub Total:						566285/- 607085/-
KMC SCHOOL NO.22 IN U.C. NO.7 MIRZA ADAM KHAN ROAD, BEHAR COLONY LYARI KARACHI.						
1	Dismantling of existing Electrical items to prepare the site for fresh works follows:					
i)	Existing wiring with PVC pipes etc.	50	Meter	4/-	four	200/-
ii)	Switch boards all size.	14	No	19/-	nine ten	266/-
iii)	Distribution boards.	1	No	175/-	one seventy five	175/-



S#	Description	Qty.	Unit.	Rate.	In Words	Amount
1	Remounting of fans with the help of ladder and skilled labour	6	Job	100/=	One hundred	600/=
2	Point wiring for light or fan with 2x1.5mm PVC insulated cable (AGE/Pioneer/Pakistan cable Ltd) in 3/4" dia PVC conduit/channel pattu on wall or column complete in all respect	60	NO JOB	740/=	Seven hundred forty	44,400/=
3	Circuit wiring from distribution board to switch board with PVC insulated wire 2x2.5mm (AGE/Pioneer/Pakistan Cable Ltd) make in PVC conduit/channel pattu on surface complete in all respect	10	NO JOB	1900/=	Nine thousand	19,000/=
4	Rewiring for light or fan point with 2x1.5mm PVC insulated copper conductor single core wire in given PVC conduit/channel pattu complete in all respect	20	NO JOB	440/=	four hundred forty	8,800/=
5	Wiring for light plug point with 2x7/0.29 PVC insulated cable (AGE/Pioneer/Pakistan Cable Ltd) in 3/4" dia PVC conduit/channel pattu in the wall with light plug socket 5 pin 10/15 Amps back box PVC complete as required	2	NO JOB	1000/=	One thousand	2,000/=
6	Wiring for power plug point with 2x7/0.44 PVC insulated (AGE/Pioneer/Pakistan Cable Ltd) in 3/4" dia PVC conduit/channel Pattu with Power Plug, 20 Amps and back box PVC complete as required.	2	NO JOB	1750/=	Seventeen fifty	3,500/=
7	P/F of ceiling fan of size 56" with blade, down rod 1 meter if required include connection with 2 core 23/0.76 flexible wire, ceiling rose & dimmer etc complete in all aspect (Pak/Millat make)	12	NO JOB	4000/=	four thousand	48,000/=
8	P/M/F of Fan hook MS make including cutting of roof					

S.#	Description.	Qty.	Unit.	Rate.	In Words	Amount
	and plaster if required	4	NO JOB	230/-	Two Thousand	920/-
9	P/F of Bracket fan Plastic Body size 18" dia Make (Pak / Millat) with round block, ceiling rose etc complete in all as respect	2	NO JOB	3800/-	Three Thousand Eight hundred	7600/-
10	P/F of Exhaust fan Plastic Body Metal body size 12" Make (Pak / Millat) with round block, ceiling rose etc complete in all as respect	2	NO JOB	2000/-	Two Thousand	4000/-
11	P/F of Energy Saver 30Watts with threads holder, round block PVC (Philips make or Equivalent) complete in as respect	36	NO JOB	360/-	Three Sixty	12960/-
12	P/F of Energy Saver 24Watts with threads holder, round block PVC (Philips make or Equivalent) complete in as respect	15	NO JOB	360/-	Three Sixty	5400/-
13	Wiring for call bell point with 3x1 5mm PVC insulated cable (AGE/Pioneer/Pakistan Cable Ltd Make) 3/4" dia PVC conduit on wall with ding dong bell complete as required.	2	NO JOB	900/-	Nine Thousand	1800/-
14	P/F of Fancy switches with back box as per following specification.					8950
i)	4 Gang Clipsal type.	14	NO JOB	425/-	four twenty five	8075/-
ii)	6 Gang Clipsal type.	2	NO JOB	550/-	five fifty	1100/-
15	P/F of chennelpatti following size with all fixing accessories as required.					5800/-
a)	3/4" dia	290	Feets	20/-	Twenty	5800/-
b)	1" dia.	240	Feets	23	Two & Three	5520/-
16	P/F of suction pump 1 HP (Siemens/Javaid/Golden) make					

S.#	Description.	Qty.	Unit.	Rate.	In Words	Amount
	complete in all respect, including GI pipe 1" dia (Steelex/KPMF) with Union and specials as required	1	NO JOB	19000/-	Nineteen Thousand	19000/=
17	P/F of Mono Block Pump 2HP single phase (Siemens/Javand/Golden) make complete in all respect, including GI pipe 1-1/2" dia (Steelex/KPMF) with Union and specials as required	1	NO JOB	25000	Twenty five Thousand	25000/=
18	P/F of Electric Water cooler (MECO or Equivalent) 60 Galons with wooden stand C.C. base of appropriate size, discharge PVC pipe 1.5" dia with specials complete as required	1	NO JOB	55000	Five five Thousand	55000/=
19	P/F water filter for Electric Water Cooler 60 Galons as per site requirement and instruction of Engineer Incharge.	1	NO JOB	9000/-	Nine Thousand	9000/=
20	P/L (Main or Sub main) of PVC/PVC insulated copper conductor (AGE/Pioneer/Pakistan Cable Ltd.) make of the following size for light connection at the height of as per site requirement.					
a)	Single core 10mm ² PVC/PVC	240	Meter	120/-	One Twenty	28800/=
b)	Single core 6mm ² PVC/PVC	380	Meter	90/-	Nine	34200/=
c)	Single core 4mm ² PVC/PVC	510	Meter	58/-	Five Eight	29580/=
d)	Single core 2.5mm ² PVC/PVC	690	Meter	38/-	Thirty Eight	26220/=
21	P/F of distribution board fabricated in MS sheet best quality gauge powder coated, wall mounted type and locking arrangement with following size Circuit Breaker including cost of connection complete in all respect make					

S.#	Description	Qty.	Unit.	Rate.	In Words	Amount.
	(Japan/Germany/France)					
	1- 30Amps S.P. (MCB)					
	1-20Amps S.P. (MCB)					
	10-10Amps S.P. (MCB)	1	NO JOB	9000/=	Nine Thousand	9000/=
22	Wall cutting for Point wiring as per size site requirement complete in all respect and instruction of Engineer Incharge	400	RFT	13/=	Thirteen	5200/=
23	Remaking and finishing of walls with c.c. for mixture 1:6 ratio complete in all respect and instruction of Engineer Incharge	400	RFT	14/=	fourteen	5600
Sub Total:						4,25516/=
KMC SCHOOL NO.24 & 25 IN U.C. NO.7 PHOOL PATTI LANE KALRI LYARI KARACHI.						424911
1	Dismantling of existing Electrical items to prepare the site for fresh works follows:					
i)	Existing wiring with PVC pipes etc.	80	Meter	4/=	Four	320/=
ii)	Switch boards all size.	15	No	190/=	One ninety	2850/=
iii)	Distribution boards	1	No	175/=	One Seventy five	175/=
iv)	Removing of fans with the help of ladder and skilled labour	6	Job	150'	One fifty	900/=
2	Point wiring for light or fan with 2x1.5mm PVC insulated cable (AGE/Pioneer/Pakistan cable Ltd) in 3/4" dia PVC conduit/channel parti on wall or column complete in all respect	35	NO JOB	740/=	Seven forty	25900/=
3	Circuit wiring from distribution board to switch board with PVC insulated wire 2x2.5mm (AGE/Pioneer/Pakistan Cable Ltd) make in PVC conduit/channel parti on surface					

S.#	Description	Qty	Unit	Rate	In Words	Amount
	complete in all respect	8	NO JOB	1900/=	19000/-	152000/-
4	Rewiring for light or fan point with 2x1.5mm PVC insulated copper conductor single core wire in given PVC conduit channel pattern complete in all respect	25	NO JOB	440/=	four forty	11000/-
5	Wiring for light plug point with 2x7/0.29 PVC insulated cable (AGE/Pioneer/Pakistan Cable Ltd) in 3/4" dia PVC conduit channel pattern in the wall with light plug socket 5 pin 10/15 Amps back box PVC complete as required	4	NO JOB	1500/=	fifteen hundred	6000/-
6	Wiring for power plug point with 2x7/0.41 PVC insulated (AGE/Pioneer/Pakistan Cable Ltd) in 3/4" dia PVC conduit/channel pattern with Power Plug 20 Amps and back box PVC complete as required	2	NO JOB	1750/=	seventeen fifty	3500/-
7	P/F of ceiling fan of size 56" with blade, down rod 1 meter if required include connection with 2 core 23/0.76 flexible wire, ceiling rose & dimmer etc complete in all aspect (Pak/Millat make)	6	NO JOB	4000/=	four thousand	24000/-
8	P/M/F of Fan hook MS make including cutting of roof and plaster if required.	4	NO JOB	230/=	two thirty	920/-
9	P/F of Bracket Fan Plastic Body size 18" dia Make (Pak/Millat) with round block, ceiling rose etc complete in all as respect.	2	NO JOB	3800/=	three thousand eight hundred	7600/-
10	P/F of Exhaust fan Plastic Body/Metal body size 12" Make (Pak/Millat) with round block, ceiling rose etc complete in all as respect.	2	NO JOB	2500/=	two thousand five hundred	5000/-
11	P/F of Energy Saver 30Watts with threads holder, round block PVC (Philips make or equivalent)					

S.#	Description.	Qty.	Unit.	Rate.	In Words	Amount
	complete in as respect.	24	NO JOB	360/-	Three Sixty	8640/-
12	P/F of Energy Saver 24Watts with threads holder, round block PVC (Philips make or Equivalent) complete in as respect.	12	NO JOB	360/-	Three Sixty	4320/-
13	Wiring for call bell point with 3x1.5mm PVC insulated cable (AGE/Pioneer/Pakistan Cable Ltd Make) 3/4" dia PVC conduit on wall with ding dong bell complete as required.	2	NO JOB	900/-	Nine hundred	1800/-
14	P/F of Fancy switches with back box as per following specification.					
i)	4 Gang Clipsal type.	10	NO JOB	525/-	five Twenty five	5250/-
ii)	6 Gang Clipsal type.	8	NO JOB	550/-	five fifty	4400/-
15	P/F of chennelpatti following size with all fixing accessories as required.					
a)	3/4" dia	270	Feets	24/-	Twenty four	6480/-
b)	1" dia.	230	Feets	27/-	Twenty seven	6210/-
16	P/F of suction pump 1 HP (Siemens/Javid/Golden)make complete in all respect, including GI pipe 1" dia (Steelex/KPM) with Union and specials as required.	1	NO JOB	1800/-	Eighteen hundred	18000/-
17	P/F of Mono Block Pump 2 HP single phase (Siemens/ Javid/Golden) make complete in all respect, including GI pipe 1-1/2" dia (Steelex/KPM) with Union and specials as required.	1	NO JOB	2400/-	Twenty four Thousand	24000/-
18	P/F of Electric Water cooler (MECO or Equivalent) 60 Galons with wooden stand C.C.base of appropriate size, discharge PVC pipe 1.5" dia with specials complete as	1	NO JOB	59000/-	fifty nine Thousand	59000/-

S.#	Description.	Qty.	Unit.	Rate.	In Words	Amount
	required					
19	P/F water filter for Electric Water Cooler 60 Galons as per site requirement and instruction of Engineer Incharge.	1	NO JOB	8000/-	Eight thousand	8000/-
20	P/L (Main or Sub main) of PVC/PVC insulated copper conductor (AGE/Pioneer/Pakistan Cable Ltd.) make of the following size for light connection at the height of as per site requirement.					
a)	Single core 10mm ² PVC/PVC	310	Meter	120/-	One Twenty	37200/-
b)	Single core 6mm ² PVC/PVC	420	Meter	90/-	Ninety	37800/-
c)	Single core 4mm ² PVC/PVC	490	Meter	58/-	fifty eight	28420/-
d)	Single core 2.5mm ² PVC/PVC	760	Meter	38/-	Thirty eight	28880/-
21	P/F of distribution board fabricated in MS sheet best quality gauge powder coated, wall mounted type and locking arrangement with following size Circuit Breaker including cost of connection complete in all respect make (Japan/Germany/France.) 1- 30Amps S.P. (MCB). 1-20Amps S.P (MCB). 8-10Amps S.P (MCB).	1	NO JOB	9000/-	Nine thousand	9000/-
22	Wall cutting for Poring wrong as per size site requirement complete in all respect and instruction of Engineer Incharge.	450	sq ft	15/-	fifteen	6750/-

S.#	Description.	Qty.	Unit.	Rate.	In Words	Amount.
23	Remaking and finishing of walls with c.c. for mixture 1:6 ratio complete in all respect and instruction of Engineer Incharge.	450	RFT.	140/-	fourty one	6300/-
					Sub Total	392470/-
	MODEL SCHOOL NO.17 IN U.C. NO.6 NEAR BUKHARI DARGHA AT AHMED SHAH BUKHARI ROAD LYARI KARACHI					387615/-
1	Dismantling of existing Electrical items to prepare the site for fresh work as follows:					
i)	Existing wiring with PVC pipes etc.	180	Metre	4/-	four	720/-
ii)	Switch boards all size.	45	No	19/-	Nineteen	855/-
iii)	Distribution boards	2	No	175/-	one souly five	350/-
iv)	Removing of fans with the help of ladder and skilled labour.	20	Job	150/-	one fifty	3000/-
2	Point wiring for light or fan with 2x1.5mm PVC insulated cable (AGE/Pioneer/Pakistan cable Ltd) in 3/4" dia PVC conduit/channel pattern on wall or column complete in all respect.	180	NO JOB	740/-	Seven forty	133200/-
3	Circuit wiring from distribution board to switch board with PVC insulated wire 2x2.5mm (AGE/Pioneer/Pakistan Cable Ltd) make in PVC conduit/channel pattern on surface complete in all respect.	24	NO JOB	2400	Twenty four hundred	57600
4	Rewiring for light or fan point with 2x1.5mm PVC insulated copper conductor single core wire in given PVC conduit/channel pattern complete in all respect.	50	NO JOB	550	fifty	27500
5	Wiring for light plug point with 2x1.5mm PVC					

S.#	Description.	Qty.	Unit.	Rate.	In Words	Amount
	insulated cable (AGE/Pioneer/Pakistan Cable Ltd) in 3/4" dia PVC conduit/channel part in the wall with light plug socket 5 pin 10/15.Amps back box PVC complete as required.	25	NO JOB	1000/-	One Thousand	25000/-
6	Wiring for power plug point with 2x7/0.44 PVC insulated (AGE/Pioneer/Pakistan Cable Ltd) in 3/4" dia PVC conduit/channel Part with Power Plug 20.Amps and back box PVC complete as required.	8	NO JOB	1750/-	Seventeen fifty	14000/-
7	P/F of ceiling fan of size 56" with blade, down rod 1 meter if required) include connection with 2 core 23/0.76 flexible wire, ceiling rose & dimmer etc complete in all aspect (Pak/Millat make)	40	NO JOB	4600/-	four thousand	160000 16000/-
8	P/M/F of Fan hook MS make including cutting of roof and plaster if required.	20	NO JOB	230/-	Two thirty	4600/-
9	P/F of Bracket fan Plastic Body size 18" dia Make (Pak/Millat) with round block, ceiling rose etc complete in all as respect.	8	NO JOB	3800/-	Three thousand Eight hundred	30400/-
10	P/F of Exhaust fan Plastic Body/Metal body size 12" Make (Pak/Millat) with round block, ceiling rose etc complete in all as respect.	6	NO JOB	2000/-	Two thousand	12000/-
11	P/F of Energy Saver 30Watts with threads holder, round block PVC (Phklips make or Equivalent) complete in as respect.	80	NO JOB	360/-	Three Sixty	28800/-
12	P/F of Energy Saver 24Watts with threads holder, round block PVC (Phklips make or Equivalent) complete in as respect.	20	NO JOB	360/-	Three Sixty	7200/-

S.#	Description	Qty.	Unit.	Rate	In Words	Amount
13	Wiring for call bell point with 3x1.5mm PVC insulated cable (AGE/Pioneer/Pakistan Cable Ltd Make) 3/4" dia PVC conduit on wall with ding dong bell complete as required.	2	NO JOB	900/-	Nine hundred	1800/-
14	P/F of Fancy switches with back box as per following specification.					
i)	4 Gang Clipsal type	30	NO JOB	425/-	four twenty five	12750/-
ii)	6 Gang Clipsal type	30	NO JOB	550/-	fit fifty	16500/-
15	P/F of chennelpati following size with all fixing accessories as required.					
a)	3/4" dia	400	Feets	20	Twenty	8000/-
b)	1" dia	350	Feets	22	Twenty Two	7700/-
16	P/F of suction pump 1 HP (Siemens/Javid/Golden) make complete in all respect, including GI pipe 3/4" dia (Steelex/KPM) with Union and specials as required.	1	NO JOB	18000/-	Eighteen Thousand	18000/-
17	P/F of Mono Block Pump 2 HP single phase (Siemens/Javid/Golden) make complete in all respect, including GI pipe 1-1/2" dia (Steelex/KPM) with Union and specials as required.	1	NO JOB	24000/-	Twenty four Thousand	24000/-
18	P/F of Electric Water cooler (MECO or Equivalent) 60 Galons with wooden stand C.C base of appropriate size, discharge					

S.#	Description.	Qty.	Unit.	Rate.	In Words	Amount
	PVC pipe 1.5" dia with specials complete as required.	2	NO JOB	59000/-	fifty nine Thousand	118000/-
19	P/F water filter for Electric Water Cooler 60 Galons as per site requirement and instruction of Engineer Incharge.	2	NO JOB	8000/-	Eight Thousand	16000/-
20	P/L (Main or Sub main) of PVC/PVC insulated copper conductor (AGE/Pioneer/Pakistan Cable Ltd.) make of the following size for light connection at the height of as per site requirement.					
a)	Single core 10mm ² PVC/PVC	600	Meter	120/-	One Twenty	72000/-
b)	Single core 6mm ² PVC/PVC	540	Meter	90/-	Nine ty	48600/-
c)	Single core 4mm ² PVC/PVC	490	Meter	58/-	fifty eight	28420/-
d)	Single core 2.5mm ² PVC/PVC	720	Meter	38/-	Thirty eight	27360/-
21	P/F of distribution board fabricated in M.S sheet best quality gauge powder coated, wall mounted type and locking arrangement with following size Circuit Breaker including cost of connection complete in all respect make (Japan/Germany/France.) 2- 30Amps S.P. (MCB). 2- 20Amps S.P (MCB). 12- 10Amps S.P (MCB).	2	NO JOB	16000/-	Sixteen Thousand	32000/-
22	P/F of Flood light IP 65 with Energy saver lamp (Philips) with internal wiring complete in all respect.	7	NO JOB	5500/-	five thousand five hundred	38500/-
23	Wall cutting for Poing wiring as per site requirement complete in all respect and instruction of Engineer Incharge	400	RFT	10/-	Ten	4000/-


S.#	Description	Qty.	Unit	Rate	In Words	Amount
24	Remaking and finishing of walls with c/c for mixture 1:6 ratio complete in all respect and instruction of Engineer Incharge.	100	RET	14/-	66,000 fourteen	5600/-
						984455
					Sub Total	967055/-
Grand Total						31,98,241-00
Amounts in Words	Therby one lac Ninety Eight Thousand Two fourty one only					
	3217773					

I / We read each & every terms & conditions of Volume-I and agreed in all to be part & parcel of the agreement.

I/We quoted the price schedule and bound ourselves to comply all terms and conditions of this contract with all existing rules and regulations of KMC and I have attached an Bid Security in shape of Pay Order / ~~Bank Guarantee~~ No. CDR 10060220

Dated 20-3-2012 issued from Allied Bank amounting Rs.66,000/- in favour of Karachi Metropolitan Corporation (KMC).

Checked & Verified by: 

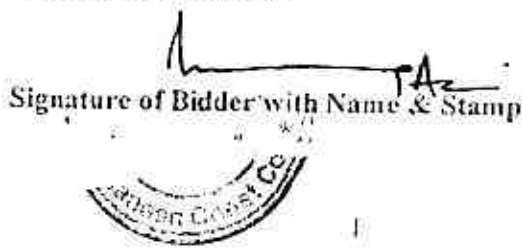Signature of Bidder with Name & Stamp


SINDH PUBLIC PROCUREMENT REGULATORY AUTHORITY

CONTRACT EVALUATION FORM

TO BE FILLED IN BY ALL PROCURING AGENCIES FOR PUBLIC CONTRACTS OF ENGINEERING DEPARTMENT.

- 1). NAME OF THE ORGANIZATION / DEPTT. KARACHI METROPOLITAN CORPORATION
- 2). PROVINCIAL GOVT./LOCAL GOVT./OTHER LOCAL GOVERNMENT (KMC) _____ (3)
- 3). TITLE OF CONTRACT Improvement & Rehabilitation of Electrical Wiring Work in 06 School (Building) Including One Model School of (Defunct)UC-8&9.
- 4). TENDER NUMBER SE/(CM)/ED/KMC/363/2012 dated 01-03-2012.
- 5). BRIEF DESCRIPTION OF CONTRACT Improvement & Rehabilitation of Electrical Wiring Work in 06 School (Building) Including One Model School of (Defunct)UC-8&9.
- 6). FORUM THAT APPROVED THE SCHEME CDGK ADMINISTRATOR, KMC
- 7). TENDER ESTIMATED VALUE Rs.3.561 Million
- 8). ENGINEER'S ESTIMATE Rs. 3.561 Million
(For Electrical Works only)
- 9). ESTIMATED COMPLETION PERIOD (AS PER CONTRACT) 02 month.
- 10). TENDER OPENED ON (DATE & TIME) 28-03-2012 & 2.30 p.m
- 11). NUMBER OF TENDER DOCUMENTS SOLD 04 Nos.
(Attach list of buyers)
- 12). NUMBER OF BIDS RECEIVED 04 Nos.
- 13). NUMBER OF BIDDERS PRESENT AT THE TIME OF OPENING OF BIDS 04 Nos.
- 14). BID EVALUATION REPORT Attached.
(Enclose a copy)
- NAME AND ADDRESS OF THE SUCCESSFUL BIDDER M/s. Shaheen Construction Company,
45-C, 27th Street, Tauheed Commercial, Phase-V, D.H.A, Karachi.
- 15). CONTRACT AWARD PRICE Rs.36,05,670/=
- 16). RANKING OF SUCCESSFUL BIDDER IN EVALUATION REPORT 1st Lowest M/s. Shaheen Construction Company.
(i.e. 1st, 2nd, 3rd EVALUATION BID)
- 17). METHOD OF PROCUREMENT USED:- (TICK ONE)
- a). SINGLE STAGE – ONE ENVELOPE PROCEDURE _____ ✓
- b). SINGLE STAGE – TWO ENVELOPE PROCEDURE _____ X
- c). TWO STAGE BIDDING PROCEDURE _____ X
- d). TWO STAGE – TWO ENVELOPE BIDDING PROCEDURE _____ X
- 18). PLEASE SPECIFY IF ANY OTHER METHOD OF PROCUREMENT WAS ADOPTED i.e.

EMERGENCY, DIRECT CONTRACTING / NEGOTIATION ETC. WITH BRIEF REASONS:

19). APPROVING AUTHORITY FOR AWARD OF CONTRACT Administrator

20). WHETHER THE PROCUREMENT WAS INCLUDED IN ANNUAL PROCUREMENT PLAN?

Yes		No	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

21). ADVERTISEMENT:

i). SPPRA Website
(If yes, give date and SPPRA's tender number)

Yes	ID # 7003/2012
No	

ii). News Papers
(If yes, give names of newspapers and dates)

Yes	Business Recorder dt-03-03-12 Naway-c-Waqt & Amn dated 04-03-2012
No	

22). NATURE OF CONTRACT

Local	<input checked="" type="checkbox"/>	Int.	
-------	-------------------------------------	------	--

23). WHETHER QUALIFICATION CRITERIA
WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?
(If yes, enclose a copy)

Yes	<input checked="" type="checkbox"/>	No	
-----	-------------------------------------	----	--

24). WHETHER BID EVALUATION CRITERIA
WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?
(If yes, enclose a copy)

Yes	<input checked="" type="checkbox"/>	No	
-----	-------------------------------------	----	--

25). WHETHER APPROVAL OF COMPETENT AUTHORITY WAS OBTAINED FOR USING A
METHOD OTHER THAN OPEN COMPETITIVE BIDDING?

Yes	<input checked="" type="checkbox"/>	No	
-----	-------------------------------------	----	--

26). WAS BID SECURITY OBTAINED FROM ALL THE BIDDERS?

Yes	<input checked="" type="checkbox"/>	No	
-----	-------------------------------------	----	--

27). WHETHER THE SUCCESSFUL BIDDER WAS LOWEST
EVALUATED BID / BEST EVALUATED BID (in case of consultancies)

Yes	<input checked="" type="checkbox"/>	No	
-----	-------------------------------------	----	--

28). WHETHER THE SUCCESSFUL BIDDER WAS TECHNICALLY COMPLAINT?

Yes		No	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

29). WHETHER INTEGRITY PACT WAS SIGNED?
(If yes, enclose a copy)

Yes	<input checked="" type="checkbox"/>	No	
-----	-------------------------------------	----	--

30). WHETHER NAMES OF THE BIDDERS AND THEIR QUOTED PRICES WERE READ OUT AT
THE TIME OF OPENING OF BIDS?

Yes	<input checked="" type="checkbox"/>	No	
-----	-------------------------------------	----	--

31). WHETHER COPY OF EVALUATION REPORT GIVEN TO ALL BIDDERS?
(Attach copy of the bid evaluation report)

Yes	<input checked="" type="checkbox"/>	No	
-----	-------------------------------------	----	--

32). WAS ANY NEGOTIATION DONE IN VIOLATION OF PPRA / OTHER
APPLICABLE RULES
(If yes, give reasons)

Yes	
No	<input checked="" type="checkbox"/>

33). ANY DEVIATION FROM SPECIFICATIONS GIVEN IN THE TENDER NOTICE / DOCUMENTS
(If yes, give details)

Yes	
No	✓

34). WAS THE EXTENSION MADE IN RESPONSE TIME?
(If yes, give reasons)

Yes	
No	✓

35). DEVIATION FROM QUALIFICATION CRITERIA
If yes, give details)

Yes	
No	✓

36). WAS IT ASSURED BY THE PROCURING AGENCY THAT THE SELECTED FIRM IS NOT
BLACK LISTED?

Yes	✓	No	-
-----	---	----	---

37). WAS A VISIT MADE BY ANY OFFICER / OFFICIAL OF THE PROCURING AGENCY TO THE
SUPPLIER'S PREMISES IN CONNECTION WITH THE PROCUREMENT? IF SO, DETAILS TO
BE ASCERTAINED REGARDING FINANCING OF VISIT, IF ABROAD.
(If yes, enclose a copy)

Yes		No	✓
-----	--	----	---

38). WERE PROPER SAFEGUARDS PROVIDED ON MOBILIZATION ADVANCE PAYMENT IN
THE CONTRACT (BANK GUARANTEE ETC)?

Yes	NA	No	NA
-----	----	----	----

39). SPECIAL CONDITIONS, IF ANY
(If yes, give Brief Description)

Yes		No	✓
-----	--	----	---

Signature & Official Stamp of
Authorized Officer

A.R.A.

Superintending Engineer (CM) KMC

FOR OFFICE USE ONLY

SPPRA, Block. No.8, Sindh Secretariat No.4-A, Court Road, Karachi.

Tele: 021-9205356; 021-9205369 & Fax: 021-9206291



KARACHI METROPOLITAN CORPORATION
OFFICE OF THE SUPDT: ENGINEER(CONTRACT MANAGEMENT)
ENGINEERING DEPARTMENT

Room # C-412, 4th Floor, Civic Centre, Gulshan-e-Iqbal, Karachi.
Phone # (92-91)9230669, Fax # (92-21)9232426

NO.SE/CM/ED/KMC/ 869 /2013

DATED:- 09/05/2013

M/s. Shalheem Construction Company,
45-C, 27th Street, Tauheed Commercial,
Phase-V, D.H.A.,
KARACHI.

ACCEPTANCE LETTER

SUBJECT:- **IMPROVEMENT & REHABILITATION OF ELECTRICAL WIRING
WORK IN 06 SCHOOL (BUILDING) INCLUDING ONE MODEL
SCHOOL OF (DEFUNCT)UC-8&9.**

The competent authority has been pleased to accord sanction the above mentioned work for an amount of Rs.36,05,670/= (Rupees Thirty Six Lac Five Thousand Six Hundred & Seventy Only).

You are advised to furnish stamps of the value of Rs.10,817/= i.e @ of 0.3% of sanction cost for execution of contract agreement within 3 days from the receipt of this letter.


SUPERINTENDING ENGINEER(CM)
ENGINEERING DEPARTMENT, KMC.

Copy to the:

1. D.G(Tech. Services), Engg: Department, KMC.
2. Chief Engineer(CM), Engg: Department, KMC.
3. Director(Accounts), Engg: Department, KMC.



10812
6/8/13

Stamp Value:- Rs. 100

An AGREEMENT made this 9th day of May (2013)

between the Karachi Metropolitan Corporation of the city of Karachi by in the Christian year Two Thousand Thirteen through their Chief Engineer(CM) hereinafter called the KMC (which expression shall include their successors) of the one part and M/s. Shaheen Construction Company carrying on business under the name and style of M/s. Shaheen Construction Company, 45-C, 27th Street, Tauheed Commercial, Phase-V, D.H.A, Karachi by their Proprietor hereinafter called the Contractors (which expression shall include their successors and assignees of the said firm and heirs executor, administrators and assignees of the said individual partners of the said firm) of the other part.

WHEREAS the KMC has accepted the Contractor's tender here unto annexed and marked 1/4 and dated 28-03-2012 for the work of "Improvement & Rehabilitation of Electrical Wiring Work in 06 School (Building) Including One Model School of (Defunct)UC-8&9" sanctioned by Administrator, KMC vide para 9/n, at a cost of Rs.36,05,670/= (Rupees Thirty Six Lac Five Thousand Six Hundred & Seventy Only) Time Limit 60 days, Penalty Rs.3,000/= per day according in to the specification and the general conditions of the contract here unto annexed and marked 1/4 and dated 28-03-2012 and signed by the Contractors after having made themselves fully acquainted with its meaning and where as the Contractors have already deposited with the KMC the sum of Rs.72,000/= as 2% Earnest Money for the above work as security deposit 8% to be deducted from running bills in addition to the Earnest Money Rs.72,000/= (Rupees Seventy Two Thousand Only) vide challan No. Nil dated 10-05-2013 and have given to the KMC a lien over such sum as Security for the due fulfillment of the contract NO V THIS AGREEMENT WITNESSETH that the KMC and the Contractor shall respectively well truly carry and fulfill the contract and abide by the all terms and conditions of the aforesaid specification and tender.

The contractors do hereby bind themselves, their heirs, successors/legal representatives and assignees to pay to the KMC a sum of Rs. Equal to 10% as mentioned above by way of penalty in case of the breach of any of the terms and conditions of the contracts including those mentioned in the tender without prejudice to the right of the KMC to recover the damages for and such breach.

IN WITNESS WHEREOF the said parties have set their hands this _____ day of _____

for the City of Karachi.


CHIEF ENGINEER,
CONTRACT MANAGEMENT
ENGINEERING DEPARTMENT, KMC

1. LIMIT Entailed - 03/11/2013

2. M/s K M Builders
Witness




SUPERINTENDENT
Office, City Court
Karachi.
18 MAY 2013





KARACHI METROPOLITAN CORPORATION
OFFICE OF THE SUPDT. ENGINEER(CONTRACT MANAGEMENT)
ENGINEERING DEPARTMENT

Room # C-412, 4th Floor, Civic Centre, Gulshan-e-Iqbal, Karachi.
Phone # (92-91)9230669, Fax # (92-21)9232426

NO.SE/CM/ED/KMC/851 /2013

DATED:- 13/05/2013

M/s. Shaheen Construction Company,
45-C, 27th Street, Tauheed Commercial,
Phase-V, D.H.A.
KARACHI.


WORK ORDER

SUBJECT:- IMPROVEMENT & REHABILITATION OF ELECTRICAL WIRING
WORK IN 06 SCHOOL (BUILDING) INCLUDING ONE MODEL
SCHOOL OF (DEFUNCT)UC-8&9.

The competent authority has been pleased to award you a contract for above mentioned work for an amount of **Rs.36,05,670/= (Rupees Thirty Six Lac Five Thousand Six Hundred & Seventy Only)**. You have accepted the contractual responsibility and have signed the contract agreement on **09-05-2013**.

You are therefore, requested to start the work with as per directions and in accordance with the specification as well as terms & conditions. The completion time of **60 days** as specified herein and also in the tender documents shall commence within **07 days** time from the receipt of this work order.

In case of failure to complete the work within the stipulated time, penalty shall be imposed @ **Rs.3,000/=** per day. In case you fail to commence the work within seven days after the receipt of work order, action under the relevant clause of the contract agreement will be initiated against you


SUPERINTENDING ENGINEER(CM)
ENGINEERING DEPARTMENT,KMC.

Copy to the:

1. D.G.(Tech. Services), Engg: Department, KMC .
2. Chief Engineer(E&M), Engg: Department, KMC .
3. Chief Engineer(CM)Engg: Department, KMC.
4. Director(Accounts), Engg: Department, KMC.



دولتی اداروں کے لئے
Bank Deposit Challan
 SECTION **28-3-2012**

DEPARTMENT **DA (PS)**
 BANK CODE
 BRANCH CODE

DIVISION **CP (CM)**
 BANK ACCOUNT NO. **01-101-0898-1**
 BANK ACCOUNT CODE

BRANCH KARACHI
 DATE

Please enter the amount as indicated below for credit to the account of CDGR mentioned above and as specified here below -

Depositor's Name & Address	Particulars	Name of Bank	Cheque/Pay Order/Demand Draft No.	Date	Amount	Pl.	Pl.	Budget Grant Code				Amount	CR				
								Maj	Min	Sub	A S		Rs.	Pa.	L.F.		
M/S Shree Consl	- Ten per cost	HBL	482980	8/11	8000/-												
V Summit Electronics	Import & Rehabilitation	HBL	482982	12/12	8000/-												
V M.S. Electric	Electrical wiring work	HBL	482985	8/12	8000/-												
V K.B. International	in 06 School (Building) included one Model School (B.Despot) Mic-8 & 9	UBC	199860	26/11	8000/-												
																	112000/-
											TOTAL DR. RS. 412000/-						

Stamp
ALLIED BANK LIMITED
CIVIC CENTRE BRANCH
 Signature Bank Cashier
11 APR 2012
 (0141) KARACHI
CLEARING

Business in words **Two to Four Only**
Accountant
Engineering Department
 Signature of Accountant
 Drawing & Disposal Officer
 CHALLAN NO.

Signature Bank Officer



KARACHI METROPOLITAN CORPORATION ENGINEERING DEPARTMENT

NAME OF SCHEME:
IMPROVEMENT & REHABILITATION OF ELECTRICAL WIRING
WORK IN 06 SCHOOL (BUILDING) INCLUDED ONE MODEL
SCHOOL OF (DEFUNCT) UC-8 & 9.

(VOLUME-II)

Estimated Cost:-	Rs. 3.561 Million	Tender Cost:	Rs.3,000/-
Time Limit:-	60 Days	Penalty	As per Contract Data
To be Opened on:-	20-03-2012	Validity of Tender:	As per Bidding Data

[Signature]
Executive Engineer (CM) E&M
Engg. Department, KMC

Tender Issued:

No: <u>KMC/CM/ED/75/11-12</u>	Dated _____
Issue to M/s _____	Pay Order No. _____
_____	Dated _____
_____	Bank: _____

Signature & Stamp of Issuing Authority

Tender issued to
M/s Shakeen Construction Co
Against pay order No. 4879817
Dated 8/12/11 of Rs. 3000/-
Of H.R. Branch
AAC Incharge
Tender Section
W&S

Tender issued to
M/s P. Khan Muhammad
Against pay order No. 4879817
Dated 8/12/11 of Rs. 3000/-
Of H.R. Branch
AAC Incharge
Tender Section
W&S



KARACHI METROPOLITAN CORPORATION

OFFICE OF THE EXECUTIVE ENGINEER (CM) E&M ENGINEERING DEPARTMENT

4th Floor, Room No. C-412, Civic Centre, Gulshan-e-Iqbal, Karachi
Phone: 021-99232426, Fax: 021-99230669

PRICE SCHEDULE

SUBJECT: IMPROVEMENT & REHABILITATION OF ELECTRICAL WIRING WORK IN 06 SCHOOL (BUILDING) INCLUDED ONE MODEL SCHOOL OF (DEFUNCT) UC-8 & 9.


S.#	Description.	Qty	Unit.	Rate.	In Words	Amount.
	KMC SCHOOL NO.26 & 27 IN U.C. NO.8 NEAR FIRE BRIGADE STATINO LASI PARA MIRANAKA, LYARI KARACHI					
1	Dismantling of existing Electrical items to prepare the site for fresh work as follows:					
i)	Existing wiring with PVC pipes etc	60	Metre	₹41/-	Four	2400.00
ii)	Switch boards all size	25	No	₹19/-	Nineteen	475.00
iii)	Distribution boards.	2	No	₹175/-	One Hundred seventy five	350.00
iv)	Removing of fans with the help of ladder and skilled labour.	10	Job	₹100/-	One Hundred	1000.00
2	Point wiring for light or fan with 2x1.5mm PVC insulated cable (AGE/Pioneer/Pakistan cable Ltd) in 3/4" dia PVC conduit/channel path on wall or column complete in all respect.	80	NO JOB	₹740/-	Seven Hundred forty	59,200.00
3	Circuit wiring from distribution board to switch board with					

S.#	Description.	Qty	Unit.	Rate.	In Words	Amount.
	PVC insulated wire 2x2.5mm (AGE/Pioneer/Pakistan Cable Ltd) make in PVC conduit/channel patti on surface complete in all respect.	14	NO JOB	1900/-	One thousand Nine Hundred	26,600
4	Rewiring for light or fan point with 2x1.5mm PVC insulated copper conductor single core wire in given PVC conduit /channel patti complete in all respect.	30	NO JOB	450/-	Four hundred fifty	1,350 13500/-
5	Wiring for light plug point with 2x7/0.29 PVC insulated cable (AGE/Pioneer/Pakistan Cable Ltd) in 3/4" dia PVC conduit/channel patti in the wall with light plug socket 5 pin 10/15Amps back box PVC complete as required.	4	NO JOB	1025/-	One thousand One hundred twenty five	4100
6	Wiring for power plug point with 2x7/0.44 PVC insulated (AGE/Pioneer/Pakistan Cable Ltd) in 3/4" dia PVC conduit/channel Patti with Power Plug 20Amps and back box PVC complete as required.	4	NO JOB	1750/-	One thousand Seven hundred fifty	7000
7	P/F of ceiling fan of size 56" with blade, down rod 1 meter if required) include connection with 2 core 23/0.76 flexible wire, ceiling rose & dimmer etc complete in all aspect (Pak/Millat make)	14	NO JOB	4100/-	Four thousand One hundred	57,400
8	P/M/F of Fan hook MS make including cutting of roof and plaster if required..	6	NO JOB	2300/-	Two thousand Three hundred	1380
9	P/F of Bracket fan Plastic Body size: 18" dia Make (Pak/Millat) with round block, ceiling rose etc complete in all as respect.	2	NO JOB	3900/-	Three thousand Nine hundred	7,800
10	P/F of Exhaust fan Plastic Body/Metal body size 12"					

S.#	Description.	Qty	Unit.	Rate.	In Words	Amount.
	Make (Pak/Millat) with round block, ceiling rose etc complete in all as respect.	2	NO. JOB	2200/-	Two Thousand Two Hundred	4400 w
11	P/F of Energy Saver 30Watts with threads holder, round block PVC (Philips make or Equivalent) complete in as respect.	48	NO. JOB	370/-	Three Hundred Seventy	17,760 w
12	P/F of Energy Saver 24Watts with threads holder, round block PVC (Philips make or Equivalent) complete in as respect.	20	NO. JOB	370/-	Three Hundred Seventy	7400 w
13	Wiring for call bell point with 3x1.5mm PVC insulated cable (AGE/Pioneer/Pakistan Cable Ltd Make) 3/4" dia PVC conduit on wall with ding dong bell complete as required.	2	NO. JOB	1100/-	One Thousand One Hundred	2200 w
14	P/F of Fancy switches with back box as per following specification.					
i)	4 Gang Clipsal (China)	20	NO. JOB	425/-	Four Hundred Twenty Five	8500 w
ii)	6 Gang Clipsal (China).	16	NO. JOB	550/-	Five Hundred Fifty	8800 w
15	P/F of chennelpatti following size with all fixing accessories as required.					
a)	3/4" dia	280	Feets	20/-	Twenty	5600 w
b)	1" dia.	240	Feets	22/-	Twenty Two	5280 w
16	P/F of suction pump 1 HP (Siemens/Javid/Golden) make complete in all respect, including GI pipe 1" dia (Steelex/KPM) with Union and specials as required.	1	NO. JOB	18000/-	Eighteen Thousand	18000 w
17	P/F of Mono Block Pump 2 HP single phase (Siemens/Javid/Golden) make complete in all					

S.#	Description.	Qty	Unit.	Rate.	In Words	Amount.
	respect, including GI pipe 1-1/2" dia (Steelex/KPMD) with Union and specials as required.	1	NO JOB	21,500/-	Twenty One Thousand Five Hundred	21,500 w
18	P/F of Electric Water cooler (MECO or Equivalent) 60 Galons with wooden stand C.C. base of appropriate size, discharge PVC pipe 1.5" dia with specials complete as required.	1	NO JOB	54,000/-	fifty four thousand	54,000 w
19	P/F water filter for Electric Water Cooler 60 Galons as per site requirement and instruction of Engineer Incharge.	1	NO JOB	8,000/-	Eight thousand	8,000 w
20	P/L (Main or Sub main) of PVC/PVC insulated copper conductor (AGE/Pioneer/Pakistan Cable Ltd.) make of the following size for light connection at the height of as per site requirement.					
a)	Single core 10mm ² PVC/PVC	320	Meter	120/-	One Hundred Twenty	38,400 w
b)	Single core 6mm ² PVC/PVC	460	Meter	90/-	Ninety	41,400 w
c)	Single core 4mm ² PVC/PVC	510	Meter	58/-	fifty eight	29,580 w
d)	Single core 2.5mm ² PVC/PVC	750	Meter	38/-	Thirty Eight	28,500 w
21	P/F of distribution board fabricated in MS sheet best quality gauge powder coated, wall mounted type and locking arrangement with following size Circuit Breaker including cost of connection complete in all respect make (Japan/Germany/France.) 1- 30Amps S.P. (MCB) 1- 20Amps S.P. (MCB).					

S.#	Description.	Qty	Unit.	Rate.	In Words	Amount.
	7-10Amps S.P (MCB).	2	NOJOB	9000/-	Nine Thousand	18,000/-
22	Wall cutting for Poing wiring as per size site requirement complete in all respect and instruction of Engineer Incharge.	460	RFT.	10/-	Ten	4600/-
23	Remaking and finishing of walls with c.c for mixture 1:6 ratio complete in all respect and instruction of Engineer Incharge.	460	RFT.	14/-	Fourteen Only.	6440/-
Sub Total:						495,250/-
KMC SCHOOL NO.28,29,30 & 31 IN U.C. NO.8 ST. NO.3 MADINA MASJID ROAD GULISTAN COLONY LYARI KARACHI						507405/-
1	Dismantling of existing Electrical items to prepare the site for fresh work as follows:					
i)	Existing wiring with PVC pipes etc.	200	Meter	4/-	Four	800/-
ii)	Switch boards all size.	40	No	19/-	Nineteen	760/-
iii)	Distribution boards.	3	No	175/-	One Hundred Seventy Five	525/-
iv)	Removing of fans with the help of ladder and skilled labour.	20	Job	100/-	One Hundred	2000/-
2	Point wiring for light or fan with 2x1.5mm PVC insulated cable (3GE/Pioneer/Pakistan cable Ltd) in 3/4" dia PVC conduit/channel path on wall or column complete in all respect	80	NOJOB	740/-	Seven Hundred Forty	59200/-
3	Circuit wiring from distribution board to switch board with PVC insulated wire 2x2.5mm (AGL/Pioneer/Pakistan Cable Ltd) make in PVC conduit/channel path on surface complete in all respect	21	NOJOB	1900/-	One Thousand Nine Hundred	39,900/-

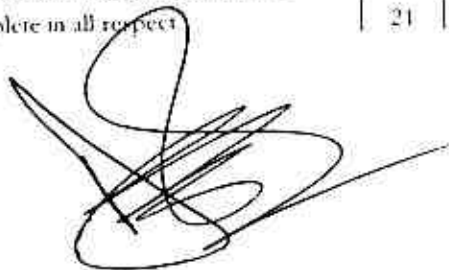


S.#	Description.	Qty	Unit.	Rate.	In Words	Amount.
4	Rewiring for light or fan point with 2x1.5mm PVC insulated copper conductor single core wire in given PVC conduit/channel pattu complete in all respect.	50	NO JOB	450/-	Four Hundred fifty	22,500 w
5	Wiring for light plug point with 2x7/0.29 PVC insulated cable (AGE/Pioneer/Pakistan Cable Ltd) in 3/4" dia PVC conduit/channel pattu in the wall with light plug socket 5 pin 10/15Amps back box PVC complete as required.	12	NO JOB	1025/-	One thousand twenty five	12,300 w
6	Wiring for power plug point with 2x7/0.44 PVC insulated (AGE/Pioneer/Pakistan Cable Ltd) in 3/4" dia PVC conduit/channel Pattu with Power Plug 20Amps and back box PVC complete as required	8	NO JOB	1750/-	One thousand seven hundred fifty	14000 w
7	P/F of ceiling fan of size 56" with blade, down rod 1 meter if required) include connection with 2 core 23/0.76 flexible wire, ceiling rose & dimmer etc complete in all aspect (Pak/Millat make)	22	NO JOB	4100/-	Four thousand One Hundred	90200 w
8	P/M/F of Fan hook MS make including cutting of roof and plaster if required.	15	NO JOB	230/-	Two hundred thirty	3450 w
9	P/F of Bracket fan Plastic Body size 18" dia Make (Pak/Millat) with round block, ceiling rose etc complete in all as respect.	6	NO JOB	3900/-	Three thousand Nine hundred	23400 w
10	P/F of Exhaust fan Plastic Body/Metal body size 12" Make (Pak/Millat) with round block, ceiling rose etc complete in all as respect	6	NO JOB	2200/-	Two thousand Two hundred	13,200 w

S.#	Description.	Qty	Unit.	Rate.	In Words	Amount.
11	P/F of Energy Saver 30Watts with threads holder, round block PVC (Philips make or Equivalent) complete in as respect.	100	NO JOB	370/-	Three Hundred Seventy	37000
12	P/F of Energy Saver 24Watts with threads holder, round block PVC (Philips make or Equivalent) complete in as respect.	30	NO JOB	370/-	Three Hundred Seventy	11100
13	Wiring for call bell point with 3x1.5mm PVC insulated cable (AGE/Pioneer/Pakistan Cable Ltd Make) 3/4" dia PVC conduit on wall with ding dong bell complete as required.	6	NO JOB	1100/-	One Thousand One Hundred	6600
14	P/F of Fancy switches with back box as per following specification.					
i)	4 Gang Clipsal (China)	36	NO JOB	425/-	Four Hundred Twenty Five	15300
ii)	6 Gang Clipsal (China)	30	NO JOB	550/-	Five Hundred Fifty	16500
15	P/F of chennelpatt following size with all fixing accessories as required					
a)	3/4" dia	600	Feet	20/-	Twenty	12000
b)	1" dia	500	Feet	22/-	Twenty Two	11000
16	P/F of suction pump 1 HP (Siemens/Javid/Golden) make complete in all respect, including GI pipe 1" dia (Steelex/KPM) with Union and specials as required	2	NO JOB	18000/-	Eighteen Thousand Only.	36000
17	P/F of Mono Block Pump 2 HP single phase (Siemens/Javid/Golden) make complete in all respect, including GI pipe 1 1/2" dia (Steelex/KPM) with Union and specials as required.	2	NO JOB	21500/-	Twenty One Thousand Five Hundred	43000

S.#	Description.	Qty	Unit.	Rate.	In Words	Amount.
18	P/F of Electric Water cooler (MECO or Equivalent) 60 Galons with wooden stand C.C. base of appropriate size, discharge PVC pipe 1.5" dia with specials complete as required.	2	NO JOB	54,000	Fifty four thousand only.	108,000 ⁰⁰
19	P/F water filter for Electric Water Cooler 60 Galons as per site requirement and instruction of Engineer... Incharge.	2	NO JOB	8,000	Eight thousand	16,000 ⁰⁰
20	P/L (Main or Sub main) of PVC/PVC insulated copper conductor (AGE/Pioneer/Pakistan Cable Ltd.) make of the following size for light connection at the height of as per site requirement.					
a)	Single core 10mm ² PVC/PVC	700	Meter	120/-	One Hundred twenty	84,000 ⁰⁰
b)	Single core 6mm ² PVC/PVC	680	Meter	90/-	ninety	61,200 ⁰⁰
c)	Single core 4mm ² PVC/PVC	590	Meter	58/-	Fifty eight	34,220 ⁰⁰
d)	Single core 2.5mm ² PVC/PVC	880	Meter	38/-	Thirty eight	33,440 ⁰⁰
21	P/F of distribution board fabricated in M.S sheet best quality gauge powder coated, wall mounted type and locking arrangement with following size Circuit Breaker including cost of connection complete in all respect make (Japan/Germany/France) 1- 30Amps S.P. (MCB) 1- 20Amps S.P. (MCB) 7- 10Amps S.P. (MCB)	3	NO JOB	10,000	Ten thousand	30,000 ⁰⁰
22	Wall cutting for Pong wiring as per size					

S.#	Description.	Qty	Unit.	Rate.	In Words	Amount.
4	Rewiring for light or fan point with 2x1.5mm PVC insulated copper conductor single core wire in given PVC conduit /channel patti complete in all respect.	40	NO JOB	1450/-	Four Hundred fifty	58000 38,000
5	Wiring for light plug point with 2x7/0.29 PVC insulated cable (AGE/Pioneer/Pakistan Cable Ltd) in 3/4" dia PVC conduit/channel patti in the wall with light plug socket 5 pin 10/15.Amps back box PVC complete as required.	6	NO JOB	1025/-	One Thousand Twenty five	6150
6	Wiring for power plug point with 2x7/0.44 PVC insulated (AGE/Pioneer/Pakistan Cable Ltd) in 3/4" dia PVC conduit/channel Patti with Power Plug 20.Amps and back box PVC complete as required	4	NO JOB	1750/-	One thousand Seven Hundred fifty	7000
7	P/F of ceiling fan of size 56" with blade, down rod 1 meter if required) include connection with 2 core 23/0 76 flexible wire, ceiling rose & dummer etc complete in all aspect (Pak/Millat make)	28	NO JOB	4100/-	Four Thousand One Hundred	114,800
8	P/M/F of Fan hook MS make including cutting of roof and plaster if required.	15	NO JOB	230/-	Two Hundred thirty	3450
9	P/F of Bracket fan Plastic Body size 18" dia Make (Pak/Millat) with round block, ceiling rose etc complete in all as respect.	4	NO JOB	3900/-	Three thousand Nine Hundred	15,600
10	P/F of Exhaust fan Plastic Body/Metal body size 12" Make (Pak/Millat) with round block, ceiling rose etc complete in all as respect	4	NO JOB	2200/-	Two thousand Two Hundred	8800
11	P/F of Energy Saver 50Watts with threads holder, round					

S.#	Description.	Qty	Unit.	Rate.	In Words	Amount.
12	block PVC (Philips make or Equivalent) complete in as respect.	42	NO JOB	370/-	Three hundred Seventy	15,540
	P/F of Energy Saver 24Watts with threads holder, round block PVC (Philips make or Equivalent) complete in as respect.	20	NO JOB	370/-	11	7400
13	Wiring for call bell point with 3x1.5mm PVC insulated cable (AGE/Pioneer/Pakistan Cable Ltd Make) 3/4" dia PVC conduit on wall with ding dong bell complete as required.	2	NO JOB	1100/-	One thousand One hundred	2200
14	P/F of Fancy switches with back box as per following specification.	22	NO JOB	425/-	Four hundred Twenty five	9350
i)	4 Gang Clipsal (China)	18	NO JOB	550/-	Five hundred fifty	9900
ii)	5 Gang Clipsal (China)					
15	P/F of chennelpati following size with all fixing accessories as required.					
a)	3/4" dia	350	Feet	20/-	Twenty	7000
b)	1" dia	250	Feet	22/-	Twenty two	5500
16	P/F of suction pump 1 HP (Siemens/Javid/Golden) make complete in all respect, including GI pipe 1" dia (Steelex/KPM) with Union and specials as required.	1	NO JOB	18000/-	Eighteen thousand	18000
17	P/F of Mono Block Pump 2 HP single phase (Siemens/Javid/Golden) make complete in all respect, including GI pipe 1 1/2" dia (Steelex/KPM) with Union and specials as required.	1	NO JOB	21500/-	Twenty one thousand Five hundred	21500

S.#	Description.	Qty	Unit.	Rate.	In Words	Amount.
18	P/F of Electric Water cooler (MECO or Equivalent) 60 Galons with wooden stand C.C. base of appropriate size, discharge PVC pipe 1.5" dia with specials complete as required.	1	NO JOB	54,000/-	Fifty four thousand	54,000 ⁰⁰
19	P/F water filter for Electric Water Cooler 60 Galons as per site requirement and instruction of Engineer Incharge.	1	NO JOB	8000/-	Eight thousand	8000 ⁰⁰
20	P/L (Main or Sub main) of PVC/PVC insulated copper conductor (AGE/Pioneer/Pakistan Cable Ltd) make of the following size for light connection at the height of as per site requirement.					
a)	Single core 10mm ² PVC/PVC	370	Meter	120/-	One Hundred twenty	44,400 ⁰⁰
b)	Single core 6mm ² PVC/PVC	490	Meter	90/-	ninety	44,100 ⁰⁰
c)	Single core 4mm ² PVC/PVC	520	Meter	58/-	Fifty eight	30,160 ⁰⁰
d)	Single core 2.5mm ² PVC/PVC	790	Meter	38/-	Thirty eight	30,020 ⁰⁰
21	P/F of distribution board fabricated in MS sheet best quality gauge powder coated, wall mounted type and locking arrangement with following size Circuit Breaker including cost of connection complete in all respect make (Japan/Germany/France). 1- 30Amps S.P. (MCB). 1- 20Amps S.P. (MCB) 7- 10Amps S.P. (MCB).	2	NO JOB	10,000/-	Ten thousand	20,000 ⁰⁰
22	Wall cutting for Pong wiring as per size site requirement complete in all					

S.#	Description.	Qty	Unit.	Rate.	In Words	Amount.
	respect and instruction of Engineer Incharge.	400	RFT.	10/-	Ten	4000.00
23	Remaking and finishing of walls with c.c. for mixture 1:6 ratio complete in all respect and instruction of Engineer Incharge.	400	RFT.	14/-	Fourteen	5600.00
KMC SCHOOL NO.35, 36, 37 & 38 IN U.C. NO.9 WALI MUHAMMAD HASSAN ALI ROAD MOHAMMAD LYARI KARCHI						
					Sub Total:	614,032.00
1	Dismantling of existing Electrical items to prepare the site for fresh work as follows:					654032
i)	Existing wiring with PVC pipes etc.	80	Meter	4/-	Four	320.00
ii)	Switch boards all size.	22	No	19/-	aluminum	418.00
iii)	Distribution boards.	1	No	175/-	One Hundred	175.00
iv)	Removing of fans with the help of ladder and skilled labour.	8	Job	100/-	One Hundred	800.00
2	Point wiring for light or fan with 2x1.5mm PVC insulated cable (AGE/Pioneer/Pakistan cable Ltd) in 3/4" dia PVC conduit/channel path on wall or column complete in all respect.	40	NO JOB	740/-	Seven Hundred forty	29,600.00
3	Circuit wiring from distribution board to switch board with PVC insulated wire 2x2.5mm (AGE/Pioneer/Pakistan Cable Ltd) make in PVC conduit/channel path on surface complete in all respect.	10	NO JOB	1900/-	One thousand nine hundred	19,000.00
4	Rewiring for light or fan point with 2x1.5mm PVC insulated					

S.#	Description.	Qty	Unit.	Rate.	In Words	Amount.
	copper conductor single core wire in given PVC conduit /channel patti complete in all respect.	10	NO JOB	1450/-	Four Hundred fifty	14,500
5	Wiring for light plug point with 2x7/0.29 PVC insulated cable (AGE/Pioneer/Pakistan Cable Ltd) in 3/4" dia PVC conduit/channel patti in the wall with light plug socket 5 pin 10/15 Amps back box PVC complete as required.	6	NO JOB	1025/-	One thousand twenty five	6,150
6	Wiring for power plug point with 2x7/0.44 PVC insulated (AGE/Pioneer/Pakistan Cable Ltd) in 3/4" dia PVC conduit/channel Patti with Power Plug 20 Amps and back box PVC complete as required.	4	NO JOB	1750/-	One thousand seven hundred fifty	7,000
7	P/F of ceiling fan of size 56" with blade, down rod 1 meter if required) include connection with 2 core 23/0.76 flexible wire, ceiling rose & dimmer etc complete in all aspect (Pak/Millat make)	10	NO JOB	4100/-	Four thousand one hundred	41,000
8	P/M/F of Fan hook MS make including cutting of roof and plaster if required..	5	NO JOB	220/-	Two hundred twenty	1,150
9	P/F of Bracket fan Plastic Body size 18" dia Make (Pak/ Millat) with round block, ceiling rose etc complete in all as respect	4	NO JOB	3900/-	Three thousand nine hundred	15,600
10	P/F of Exhaust fan Plastic Body Metal body size 12" Make (Pak/ Millat) with round block, ceiling rose etc complete in all as respect	4	NO JOB	2200/-	Two thousand two hundred	8,800
11	P/F of Energy Saver 30Watts with thread holder round					

S.#	Description.	Qty	Unit.	Rate.	In Words	Amount.
	block PVC (Philips make or Equivalent) complete in as respect.	64	NO JOB	370/-	Three Hundred Seventy	23,680
12	P/F of Energy Saver 24Watts with threads holder, round block PVC (Philips make or Equivalent) complete in as respect.	20	NO JOB	370/-	4	7400
13	Wiring for call bell point with 3x1.5mm PVC insulated cable (AGE/Pioneer/Pakistan Cable Ltd Make) 3/4" dia PVC conduit on wall with ding dong bell complete as required.	2	NO JOB	1100/-	One Thousand One Hundred	2200
14	P/F of Fancy switches with back box as per following specification: i) 4 Gang Clipsal (China) ii) 5 Gang Clipsal (China) iii) 6 Gang Clipsal (China)	12 6 10	NO JOB NO JOB NO JOB	425/- 500/- 550/-	Four Hundred Twenty Five Five Hundred Five Hundred Fifty	5100 3000 5500
15	P/F of chennelpati following size with all fixing accessories as required: a) 3/4" dia b) 1" dia	300 250	Feet Feet	20/- 22/-	Twenty Twenty Two	6000 5500
16	P/F of suction pump 1 HP (Siemens/Javard/Golden) make complete in all respect, including GI pipe 1" dia (Steelex/KPM) with Union and specials as required.	1	NO JOB	18000/-	Eighteen Thousand	18,000
17	P/F of Mono Block Pump 2 HP single phase (Siemens/Javard/Golden) make complete in all respect, including GI pipe 1-1/2" dia (Steelex/KPM) with Union and specials as required.	1	NO JOB	21500/-	Twenty One Thousand Five Hundred	21,500
18	P/F of Electric Water cooler (MECO or Equivalent) 60 Gallons					

S.#	Description.	Qty	Unit.	Rate.	In Words	Amount.
	with wooden stand C.C.base of appropriate size, discharge PVC pipe 1.5" dia with specials complete as required.	1	NO JOI	54,000	Fifty four thousand	54,000
19	P/F water filter for Electric Water Cooler 60 Galons as per site requirement and instruction of Engineer Incharge.	1	NO JOI	8,000	Eight thousand	8,000
20	P/L (Main or Sub main) of PVC/PVC insulated copper conductor (AGE/Pioneer/Pakistan Cable Ltd.) make of the following size for light connection at the height of as per site requirement.					
a)	Single core 10mm ² PVC/PVC	240	Meter	120	One Hundred twenty	28,800
b)	Single core 6mm ² PVC/PVC	380	Meter	90	Ninety	34,200
c)	Single core 4mm ² PVC/PVC	490	Meter	58	Fifty eight	28,420
d)	Single core 2.5mm ² PVC/PVC	700	Meter	38	Thirty eight	26,600
21	P/F of distribution board fabricated in MS sheet best quality gauge powder coated, wall mounted type and locking arrangement with following size Circuit Breaker including cost of connection complete in all respect make (Japan/Germany/France.)					
	2- 30Amps S.P (MCB)					
	2-20Amps S.P (MCB)					
	8 10Amps S.P (MCB)	2	NO JOI	13,000	Thirteen thousand	26,000
22	Wall cutting for Poinc wiring as per size					

S.#	Description.	Qty	Unit.	Rate.	In Words	Amount.
	site requirement complete in all respect and instruction of Engineer Incharge.	400	RFT.	10/-	Ten	4000 w
23	Remaking and finishing of walls with c.c. for mixture 1:6 ratio complete in all respect and instruction of Engineer Incharge.	400	RFT.	14/-	Fourteen	5600 56,400 w
Sub Total:						498,813 w
KMC SCHOOL NO.39 IN UC NO.9 MOLLAMADAD BUS STOP CHAKIWARA LYARI KARACHI.						458013
1	Dismentling of existing Electrical items to prepare the site for fresh work as follows:					
i)	Existing wiring with PVC pipes etc.	80	Meter	4/-	Four	320 w
ii)	Switch boards all size.	20	No	19/-	Nineteen	380 w
iii)	Distribution boards.	2	No	175/-	One Hundred Seventy Five	350 w
iv)	Removing of fans with the help of ladder and skilled labour.	6	Job	100/-	One Hundred	600
2	Point wiring for light or fan with 2x1.5mm PVC insulated cable (AGE/Pioneer/Pakistan cable Ltd) in 3/4" dia PVC conduit/channel patti on wall or column complete in all respect	45	NO JOB	740/-	Seven Hundred forty	33,300 w
3	Circuit wiring from distribution board to switch board with PVC insulated wire 2x2.5mm (AGE/Pioneer/Pakistan Cable Ltd) make in PVC conduit/channel patti on surface complete in all respect	8	NO JOB	1900/-	One thousand nine hundred	15,200 w
4	Rewiring for light or fan point with 2x1.5mm PVC insulated copper conductor single core wire in					

S.#	Description.	Qty	Unit.	Rate.	In Words	Amount.
	given PVC conduit /channel patti complete in all respect.	20	NOJOB	450/-	Four hundred fifty	9000
5	Wiring for light plug point with 2x7/0.29 PVC insulated cable (AGE/Pioneer/Pakistan Cable Ltd) in 3/4" dia PVC conduit/channel patti in the wall with light plug socket 5 pin 10/15Amps back box PVC complete as required.	4	NOJOB	1025/-	One thousand twenty five	4100
6	Wiring for power plug point with 2x7/0.44 PVC insulated (AGE/Pioneer/Pakistan Cable Ltd) in 3/4" dia PVC conduit/channel Patti with Power Plug 20Amps and back box PVC complete as required.	2	NOJOB	1750/-	One thousand seven hundred fifty	3500
7	P/F of ceiling fan of size 56" with blade, down rod 1 meter if required) include connection with 2 core 23/0.76 flexible wire, ceiling rose & dimmer etc complete in all aspect (Pak/Millat make)	8	NOJOB	4100/-	Four thousand one hundred	32800
8	P/M/F of Fan hook MS make including cutting of roof and plaster if required.	4	NOJOB	230/-	Two hundred thirty	920
9	P/F of Bracket fan Plastic Body size 18" dia Make (Pak/Millat) with round block, ceiling rose etc complete in all as respect.	2	NOJOB	3900/-	More than three thousand	7800
10	P/F of Exhaust fan Plastic Body/Metal body size 12" Make (Pak/Millat) with round block, ceiling rose etc complete in all as respect.	2	NOJOB	2200/-	Two thousand two hundred	4400
11	P/F of Energy Saver 30Watts with threads holder, round block PVC (Philips make or Equivalent) complete in					

S.#	Description.	Qty	Unit.	Rate.	In Words	Amount.
12	as respect. P/F of Energy Saver 24Watts with threads holder, round block PVC (Philips make or Equivalent) complete in as respect.	32	NO JOB	370/-	Three Hundred Seventy	11840.00
15	as respect.	15	NO JOB	370/-	11	5550.00
13	Wiring for call bell point with 3x1.5mm PVC insulated cable (AGE/Pioneer/Pakistan Cable Ltd Make) 3/4" dia PVC conduit on wall with ding dong bell complete as required.	2	NO JOB	1100/-	One Thousand One Hundred	2200.00
14	P/F of Fancy switches with back box as per following specification.	12	NO JOB	425	Four Hundred Twenty five	5100.00
	i) 4 Gang Clipsal (China)	12	NO JOB	550/-	Five Hundred Fifty	6,600.00
	ii) 6 Gang Clipsal (China)	12	NO JOB			
15	P/F of chennelpatti following size with all fixing accessories as required.	300	Feets	20/-	Twenty	6000.00
	a) 3/4" dia	240	Feets	22/-	Twenty two	5280.00
	b) 1" dia.					
16	P/F of suction pump 1 HP (Siemens/Javid/Golden) make complete in all respect, including GI pipe 1" dia (Steelex/KPM) with Union and specials as required.	1	NO JOB	18000/-	Eighteen Thousand	18,000.00
17	P/F of Mono Block Pump 2 HP single phase (Siemens/ Javid/Golden) make complete in all respect, including GI pipe 1-1/2" dia (Steelex/KPM) with Union and specials as required.	1	NO JOB	22000/-	Twenty two Thousand	22,000.00
18	P/F of Electric Water cooler (MECO or Equivalent) 60 Galons					

S.#	Description.	Qty	Unit.	Rate.	In Words	Amount.
	with wooden stand C.C. base of appropriate size, discharge PVC pipe 1.5" dia with specials complete as required.	1	NO. JOB	54000	Fifty four thousand	54,000
19	P/F water filter for Electric Water Cooler 60 Galons as per site requirement and instruction of Engineer Incharge.	1	NO. JOB	8000	Eight thousand	8,000
20	P/L (Main or Sub main) of PVC/PVC insulated copper conductor (AGE/Pioneer/Pakistan Cable Ltd.) make of the following size for light connection at the height of as per site requirement.					
a)	Single core 10mm ² PVC/PVC	280	Meter	1201	One hundred twenty	33600
b)	Single core 6mm ² PVC/PVC	430	Meter	901	ninety	38,700
c)	Single core 4mm ² PVC/PVC	510	Meter	581	Fifty eight	29,580
d)	Single core 2.5mm ² PVC/PVC	740	Meter	381	Thirty eight	28,120
21	P/F of distribution board fabricated in MS sheet best quality gauge powder coated, wall mounted type and locking arrangement with following size Circuit Breaker including cost of connection complete in all respect make (Japan/Germany/France.) 2: 30 Amps S.P. (MCB). 2: 20 Amps S.P. (MCB). 8: 10 Amps S.P. (MCB)					
		1	NO. JOB	13000	Thirteen thousand	13,000

S.#	Description.	Qty	Unit.	Rate.	In Words	Amount.
22	Wall cutting for Poing wiring as per size site requirement complete in all respect and instruction of Engineer Incharge.	400	RFT.	10/-	Four	4000
23	Remaking and finishing of walls with c.c. for mixture 1:6 ratio complete in all respect and instruction of Engineer Incharge.	400	RFT.	14/-	Fourteen	5600
Sub Total:						409,840
<p>MODEL SCHOOL NO.40 IN UC NO.9 SINGO LANE SIRBAZI MOHALLA BROGHI ROAD LYARI KARACHI.</p> <p>Dismantling of existing Electrical items to prepare the site for fresh work as follows.</p>						
1	i) Existing wiring with PVC pipes etc	80	Meter	4/-	Four	320
	ii) Switch boards all size.	38	No	20/-	Twenty	760
	iii) Distribution boards.	2	No	200/-	Two Hundred	400
	iv) Removing of fans with the help of ladder and skilled labour.	15	Job	100/-	One Hundred	1500
2	Point wiring for light or fan with 2x1.5mm PVC insulated cable (AGE/Pioneer/Pakistan Cable Ltd) in 3/4" dia PVC conduit/channel patti on wall or column complete in all respect.	60	NO JOB	750/-	Seven Hundred fifty	45,000
3	Circuit wiring from distribution board to switch board with PVC insulated wire 2x2.5mm (AGE/Pioneer/Pakistan Cable Ltd) make in PVC conduit/channel patti on surface complete in all respect.	20	NO JOB	2000/-	Two thousand	40,000
4	Rewiring for light or fan point with					

S.#	Description.	Qty	Unit.	Rate.	In Words	Amount.
	2x1.5mm PVC insulated copper conductor single core wire in given PVC conduit/channel patti complete in all respect.	20	NO JOB	600/-	Six Hundred	12,000 ^{rs}
5	Wiring for light plug point with 2x7/0.29 PVC insulated cable (AGE/Pioneer/Pakistan Cable Ltd) in 3/4" dia PVC conduit/channel patti in the wall with light plug socket 5 pin 10/15Amps back box PVC complete as required.	25	NO JOB	1200/-	Two Thousand	30,000 ^{rs}
6	Wiring for power plug point with 2x7/0.34 PVC insulated (AGE/Pioneer/Pakistan Cable Ltd) in 3/4" dia PVC conduit/channel Patti with Power Plug 20Amps and back box PVC complete as required.	8	NO JOB	2000/-	Two Thousand	16,000
7	P/F of ceiling fan of size 56" with blade, down rod 1 meter if required) include connection with 2 core 23/0.76 flexible wire, ceiling rose & chinner etc complete in all aspect (Pak/Millat make)	18	NO JOB	4200/-	Four Thousand Two Hundred	75,600
8	P/M/F of Fan hook MS make including cutting of roof and plaster if required.	12	NO JOB	250/-	Two Hundred Fifty	3,000 ^{rs}
9	P/F of Bracket fan Plastic Body size 18" dia Make (Pak/Millat) with round block, ceiling rose etc complete-in all as respect	6	NO JOB	4000/-	Four Thousand	24,000 ^{rs}
10	P/F of Exhaust fan Plastic Body/Metal body size 12" Make (Pak/Millat) with round block, ceiling rose etc complete in all as respect.	4	NO JOB	2500/-	Two Thousand Five Hundred	10,000

S.#	Description.	Qty	Unit.	Rate.	In Words	Amount.
11	P/F of Energy Saver 30Watts with threads holder, round block PVC (Philips make or Equivalent) complete in as respect.	56	NO JOB	380/-	Three Hundred Eighty	21,280.00
12	P/F of Energy Saver 24Watts with threads holder, round block PVC (Philips make or Equivalent) complete in as respect.	20	NO JOB	380/-	4	7,600.00
13	Wiring for call bell point with 3x1.5mm PVC insulated cable (AGE/Pioneer/Pakistan Cable Ltd Make) 3/4" dia PVC conduit on wall with ding dong bell complete as required.	2	NO JOB	1100/-	One Thousand One Hundred	2,200.00
14	P/F of Fancy switches with back box as per following specification: i) 4 Gang Clipsal type.	20	NO JOB	450	Four Hundred Fifty	9,000.00
	ii) 6 Gang Clipsal type.	20	NO JOB	600/-	Six Hundred	12,000.00
15	P/F of chennelpatti following size with all fixing accessories as required: a) 3/4" dia	320	Feet	221/-	Twenty Two	70,720.00
	b) 1" dia	230	Feet	241/-	Twenty Four	55,430.00
16	P/F of suction pump 1 HP (Siemens/Javid/Golden) make complete in all respect, including GI pipe 1" dia (Steelex/KPM) with Union and specials as required.	1	NO JOB	18000/-	Eighteen Thousand	18,000.00
17	P/F of Mono Block Pump 2 HP single phase (Siemens/Javid/Golden) make complete in all respect, including GI pipe 1 1/2" dia (Steelex/KPM) with Union and specials as required.	1	NO JOB	24000/-	Twenty Four Thousand	24,000.00

S.#	Description.	Qty	Unit.	Rate.	In Words	Amount.
18	P/F of Electric Water cooler (MECC) or Equivalent) 60 Galons with wooden stand C.C. base of appropriate size, discharge PVC pipe 1.5" dia with special complete as required	2	NO JOB	55,000	Fifty Five Thousand	110,000/- 55,000
19	P/F water filter for Electric Water Cooler 60 Galons as per site requirement and instruction of Engineer Incharge	2	NO JOB	18,000	Eighteen Thousand	36,000 w
20	P/E (Main or Sub main) of PVC/PVC insulated copper conductor (AGE/Pioneer/Pakistan Cable Ltd.) make of the following size for light connection at the height of as per site requirement:					
a)	Single core 10mm ² PVC/PVC	360	Meter	124/-	One Hundred Twenty four	44,640 w
b)	Single core 6mm ² PVC/PVC	350	Meter	94/-	Ninety four	32,900 w
c)	Single core 4mm ² PVC/PVC	480	Meter	60/-	Sixty	28,800 w
d)	Single core 2.5mm ² PVC/PVC	580	Meter	40/-	Forty	23,200 w
21	P/F of distribution board fabricated in MS sheet best quality gauge powder coated, wall mounted type and locking arrangement with following size Circuit Breaker including cost of connection complete in all respect make (Japan/Germany/France) 2 30Amps S.P. (MCB) 2 20Amps S.P. (MCB) 12 10Amps S.P. (MCB)	2	NO JOB	15,000	Fifteen Thousand	30,000 w
22	P/F of Flood light IP 65 with Energy saver Lamp					

S.#	Description.	Qty	Unit.	Rate.	In Words	Amount.
	(Philips) with internal wiring complete in all respect.	7	NO JOB	6000/-	Six thousand	42,000
23	Wall cutting for Poing wiring as per size site requirement complete in all respect and instruction of Engineer Incharge.	465	RFT.	10/-	Ten	4650
24	Remaking and finshing of walls with c.c. for mixture 1:6 ratio complete in all respect and instruction of Engineer Incharge.	465	RFT.	15/-	Fifteen	6975
Sub Total:						685,385
Grand Total:						3,54,464

Amounts in Words: Three Million One Hundred fifty Six Thousand Four Hundred and Sixty Four
Thirty Five Lacs Fifty Four Lacs Four hundred and Sixty Four only

I / We read each & every terms & conditions of Volume-I and agreed in all to be part & parcel of the agreement.

I/We quoted the price schedule and bound ourselves to comply all terms and conditions of this contract with all existing rules and regulations of KMC and I have attached an Bid Security in shape of Pay Order / Bank Guarantee Pay order. No HMB.05282959

Dated 20-3-2012 issued from HMB amounting Rs.72,000/- in favour of Karachi Metropolitan Corporation (KMC).

[Handwritten signature]

[Signature]
 Signature of Bidder with Name & Stamp
[Stamp: Sharaan Const Co]

Checked & Verified by: *[Handwritten signature]*

15.00% Below

Total At
Approved
11.00% Above

4/1

1. Tender received in Sealed/~~Unsealed~~
Tape sealed/Gum seal cover.

2. P.O. No: *5282958* dated *20/8/2012*
for Rs. *72,000* of Earnest Money
is/are attached/~~are attached~~.

3. Notice received from ~~contractor~~
cutting into

4. Rates written in ~~the~~ in words.

5. Rates are ~~as per~~ *Table* ~~of~~ *Appendix* ~~given~~ *quoted for Rs. 35,54,464/-*
.. The file has been forwarded for handling of the same


Dy Director (Finance)
Member / Secretary
T.O.C
Engineering Dep.
KMC


Chief Engineer ()
Member
T.O.C
Engineering Dep.
KMC


Chief Engineer
Chairman
T.O.C
Engineering Dep.
KMC

4/11

1. Tender received in Sealed/Unsealed/
Tape sealed/Gum seal cover.

2. P.O. No: 1006020 dated 20/4/2014
for Rs. 7,16,720 of Earnest Money
is/are attached/attached.

3. No: correct/incorrect cutting/

4. Rates with/without tax.

5. Rates quoted Total Amount quoted for Rs. ~~1006020~~
Three lakhs One thousand Eight hundred Two Hundred
Forty one only.

31,90,241


Dy Director (Finance)
Member / Secretary
T.O.C
Engineering Dep.
KMC


Chief Engineer ()
Member
T.O.C
Engineering Dep.
KMC


Chief Engineer
Chairman
T.O.C
Engineering Dep.
KMC

SINDH PUBLIC PROCUREMENT REGULATORY AUTHORITY

CONTRACT EVALUATION FORM

TO BE FILLED IN BY ALL PROCURING AGENCIES FOR PUBLIC CONTRACTS OF
ENGINEERING DEPARTMENT.

- 1). NAME OF THE ORGANIZATION / DEPTT. KARACHI METROPOLITAN CORPORATION
- 2). PROVINCIAL GOVT./LOCAL GOVT./OTHER LOCAL GOVERNMENT (KMC) _____
- 3). TITLE OF CONTRACT Improvement & Rehabilitation of Electrical Wiring Work in 07 School (Building) Defunct UC-10&11.
- 4). TENDER NUMBER SE/(CM)/ED/KMC/363/2012 dated 01-03-2012.
- 5). BRIEF DESCRIPTION OF CONTRACT Improvement & Rehabilitation of Electrical Wiring Work in 07 School (Building) Defunct UC-10&11.
- 6). FORUM THAT APPROVED THE SCHEME CDGK ADMINISTRATOR, KMC
- 7). TENDER ESTIMATED VALUE Rs. 3.746 Million
- 8). ENGINEER'S ESTIMATE Rs. 3.746 Million
(For Electrical Works only)
- 9). ESTIMATED COMPLETION PERIOD (AS PER CONTRACT) 02 month.
- 10). TENDER OPENED ON (DATE & TIME) 28-03-2012 & 2.30 p.m
- 11). NUMBER OF TENDER DOCUMENTS SOLD 04 Nos.
(Attach list of buyers)
- 12). NUMBER OF BIDS RECEIVED 04 Nos.
- 13). NUMBER OF BIDDERS PRESENT AT THE TIME OF OPENING OF BIDS 04 Nos.
- 14). BID EVALUATION REPORT Attached.
(Enclose a copy)
- NAME AND ADDRESS OF THE SUCCESSFUL BIDDER M/s. Shaheen Construction Company,
45-C, 27th Street, Tauheed Commercial, Phase-V, D.H.A, Karachi.
- 15). CONTRACT AWARD PRICE Rs. 37,26,531/=
- 16). RANKING OF SUCCESSFUL BIDDER IN EVALUATION REPORT 1st Lowest M/s. Shaheen
(i.e. 1st, 2nd, 3rd EVALUATION BID) Construction Company.
- 17). METHOD OF PROCUREMENT USED:- (TICK ONE)
 - a). SINGLE STAGE - ONE ENVELOPE PROCEDURE _____ ✓
 - b). SINGLE STAGE - TWO ENVELOPE PROCEDURE _____ X
 - c). TWO STAGE BIDDING PROCEDURE _____ X
 - d). TWO STAGE - TWO ENVELOPE BIDDING PROCEDURE _____ X
- 18). PLEASE SPECIFY IF ANY OTHER METHOD OF PROCUREMENT WAS ADOPTED i.e. EMERGENCY, DIRECT CONTRACTING / NEGOTIATION ETC. WITH BRIEF REASONS:

19). APPROVING AUTHORITY FOR AWARD OF CONTRACT Administrator

20). WHETHER THE PROCUREMENT WAS INCLUDED IN ANNUAL PROCUREMENT PLAN?

Yes		No	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

21). ADVERTISEMENT:

i). SPPRA Website
(If yes, give date and SPPRA's tender number)

Yes	ID # 7003/2012
No	

ii). News Papers
(If yes, give names of newspapers and dates)

Yes	Business Recorder dt-03-03-12 Naway-e-Waqt & Amn dated 04-03-2012
No	

Local	<input checked="" type="checkbox"/>	Int.	<input type="checkbox"/>
-------	-------------------------------------	------	--------------------------

22). NATURE OF CONTRACT

23). WHETHER QUALIFICATION CRITERIA
WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?
(If yes, enclose a copy)

Yes	<input checked="" type="checkbox"/>		No	<input type="checkbox"/>
-----	-------------------------------------	--	----	--------------------------

24). WHETHER BID EVALUATION CRITERIA
WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?
(If yes, enclose a copy)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

25). WHETHER APPROVAL OF COMPETENT AUTHORITY WAS OBTAINED FOR USING A
METHOD OTHER THAN OPEN COMPETITIVE BIDDING?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

26). WAS BID SECURITY OBTAINED FROM ALL THE BIDDERS?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

27). WHETHER THE SUCCESSFUL BIDDER WAS LOWEST
EVALUATED BID / BEST EVALUATED BID (in case of consultancies)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

28). WHETHER THE SUCCESSFUL BIDDER WAS TECHNICALLY COMPLAINT?

Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

29). WHETHER INTEGRITY PACT WAS SIGNED?
(If yes, enclose a copy)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

30). WHETHER NAMES OF THE BIDDERS AND THEIR QUOTED PRICES WERE READ OUT AT
THE TIME OF OPENING OF BIDS?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

31). WHETHER COPY OF EVALUATION REPORT GIVEN TO ALL BIDDERS?
(Attach copy of the bid evaluation report)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

32). WAS ANY NEGOTIATION DONE IN VIOLATION OF PPRA / OTHER
APPLICABLE RULES
(If yes, give reasons)

Yes			
No			<input checked="" type="checkbox"/>

33). ANY DEVIATION FROM SPECIFICATIONS GIVEN IN THE TENDER NOTICE / DOCUMENTS
(If yes, give details)

Yes	
No	✓

34). WAS THE EXTENSION MADE IN RESPONSE TIME?
(If yes, give reasons)

Yes	
No	✓

35). DEVIATION FROM QUALIFICATION CRITERIA
(If yes, give details)

Yes	
No	✓

36). WAS IT ASSURED BY THE PROCURING AGENCY THAT THE SELECTED FIRM IS NOT
BLACK LISTED?

Yes	✓	No	-
-----	---	----	---

37). WAS A VISIT MADE BY ANY OFFICER / OFFICIAL OF THE PROCURING AGENCY TO THE
SUPPLIER'S PREMISES IN CONNECTION WITH THE PROCUREMENT? IF SO, DETAILS TO
BE ASCERTAINED REGARDING FINANCING OF VISIT, IF ABROAD.
(If yes, enclose a copy)

Yes		No	✓
-----	--	----	---

38). WERE PROPER SAFEGUARDS PROVIDED ON MOBILIZATION ADVANCE PAYMENT IN
THE CONTRACT (BANK GUARANTEE ETC)?

Yes	NA	No	NA
-----	----	----	----

39). SPECIAL CONDITIONS, IF ANY
(If yes, give Brief Description)

Yes		No	✓
-----	--	----	---

Signature & Official Stamp of
Authorized Officer

T.R.A.
SuperIntending Engineer (CM) KMC

FOR OFFICE USE ONLY

SPPRA, Block. No.8, Sindh Secretariat No.4-A, Court Road, Karachi.
Tele: 021-9205356; 021-9205369 & Fax: 021-9206291



KARACHI METROPOLITAN CORPORATION
OFFICE OF THE SUPDT. ENGINEER (CONTRACT MANAGEMENT)
ENGINEERING DEPARTMENT

Room # C-412, 4th Floor, Civic Centre, Gulshan-e-Iqbal, Karachi.
Phone # (92-91)9230669, Fax # (92-21)9232426

DATED:- 9/5 /2013

NO.SE/CM/ED/KMC/ 870 /2013

M/s. Shaheen Construction Company,
45-C, 27th Street, Tauheed Commercial,
Phase-V, D.H.A.,
KARACHI

ACCEPTANCE LETTER

SUBJECT:- **IMPROVEMENT & REHABILITATION OF ELECTRICAL WIRING
WORK IN 07 SCHOOL (BUILDING) DEFUNCT UC-10 & 11.**

The competent authority has been pleased to accord sanction the above mentioned work for an amount of **Rs.37,26,531/= (Rupees Thirty Seven Lac Twenty Six Thousand Five Hundred & Thirty One Only)**.

You are advised to furnish stamps of the value of **Rs.11,180/= i.e @** of 0.3% of sanction cost for execution of contract agreement within 3 days from the receipt of this letter.


SUPERINTENDING ENGINEER(CM)
ENGINEERING DEPARTMENT,KMC.

Copy to the:

1. D.G(Tech. Services), Engg: Department, KMC .
2. Chief Engineer(CM), Engg: Department, KMC .
3. Director(Accounts), Engg: Department, KMC .



11200
4/8/13

Stamp Value:- Rs. 1

An AGREEMENT made this 9th day of May (2013) between the Karachi Metropolitan Corporation of the city of Karachi by in the Christian year Two Thousand Thirteen through their Chief Engineer(CM) hereinafter called the KMC (which expression shall include their successors) of the one part and M/s. Shaheen Construction Company carrying on business under the name and style of M/s. Shaheen Construction Company, 45-C, 27th Street, Tauheed Commercial, Phase-V, D.H.A, Karachi by their Proprietor hereinafter called the Contractors (which expression shall include their successors and assignees of the said firm and heirs, executor, administrators and assignees of the said individual partners of the said firm), of the other part.

WHEREAS the KMC has accepted the Contractor's tender here unto annexed and marked 1/4 and dated 28-03-2012 for the work of "Improvement & Rehabilitation of Electrical Wiring Work in 07 School (Building) Defunct HC-10 & 11" sanctioned by Administrator, KMC vide para 9/n. at a cost of Rs.37,26,531/= (Rupees Thirty Seven Lac Twenty Six Thousand Five Hundred & Thirty One Only) Time Limit 60 days, Penalty Rs.3,000/= per day according in to the specification and the general conditions of the contract here unto annexed and marked 1/4 and dated 28-03-2012 and signed by the Contractors after having made themselves fully acquainted with its meaning and where as the Contractors have already deposited with the KMC the sum of Rs.86,000/= as 2% Earnest Money for the above work as security deposit 8% to be deducted from running bills in addition to the Earnest Money Rs.86,000/= (Rupees Eighty Six Thousand Only) vide challan No. 111 dated 10-5-2013 and have given to the KMC a lien over such sum as Security for the fulfillment of the contract NO V THIS AGREEMENT WITNESSETH that the KMC and the Contractor shall respectively well truly carry and fulfill the contract and abide by the all terms and conditions of the aforesaid specification and tender.

The contractors do hereby bind themselves, their heirs, successors/legal representatives and assignees to pay to the KMC a sum of Rs. Equal to 10% as mentioned above by way of penalty in case of the breach of any of the terms and conditions of the contracts including those mentioned in the tender without prejudice to the right of the KMC to recover the damages for and such breach.

OFFICE SUPERINTENDENT
Stamp Office, City Court
Karachi.
08 MAY 2013





KARACHI METROPOLITAN CORPORATION
OFFICE OF THE SUPDT. ENGINEER(CONTRACT MANAGEMENT)
ENGINEERING DEPARTMENT

Room # C-412, 4th Floor, Civic Centre, Gulshan-e-Iqbal, Karachi.
Phone # (92-91)9230669, Fax # (92-21)9232426

DATED:- 13/05/2013

NO.SE/CM/ED/KMC/ 852 /2013

M/s. Shaheen Construction Company,
45-C, 27th Street, Tauheed Commercial,
Phase-V, D.H.A.
KARACHI.

WORK ORDER

SUBJECT:- **IMPROVEMENT & REHABILITATION OF ELECTRICAL WIRING
WORK IN 07 SCHOOL (BUILDING) DEFUNCT UC-10 & 11.**

The competent authority has been pleased to award you a contract for above mentioned work for an amount of Rs.37,26,531/= (Rupees Thirty Seven Lacs Twenty Six Thousand Five Hundred & Thirty One Only). You have accepted the contractual responsibility and have signed the contract agreement on 09-05-2013.

You are therefore, requested to start the work with as per directions and in accordance with the specification as well as terms & conditions. The completion time of 60 days as specified herein and also in the tender documents shall commence within 07 days time from the receipt of this work order.

In case of failure to complete the work within the stipulated time, penalty shall be imposed @ Rs.3,000/= per day. In case you fail to commence the work within seven days after the receipt of work order, action under the relevant clause of the contract agreement will be initiated against you


SUPERINTENDING ENGINEER(CM)
ENGINEERING DEPARTMENT,KMC.

Copy to the:

1. D.G.(Tech. Services), Engg: Department, KMC.
2. Chief Engineer(E&M), Engg: Department, KMC.
3. Chief Engineer(CM)Engg: Department, KMC.
4. Director(Accounts), Engg: Department, KMC.



KARACHI METROPOLITAN CORPORATION

Bank Deposit Challan

SECTION _____

DEPARTMENT Engineering

DIVISION _____

DATE

BANK ACCOUNT NO

BANK ACCOUNT CODE

BANK CODE

BRANCH CODE

The Manager
United Bank Limited
Civic Centre Branch, Karachi

BRANCH KARACHI Please receive the amount as noted below for credit to the account of CDCK mentioned above and as specified here below

Depositor's Name & Address		Particulars										Amount								
		B.G. NO		Depositor Code if any		Income Code		Budget Grant Code			Amount		Rs	Ps						
Maj	Min	Sub	CAT	Registered No	Dept	Div	Sec	Code	Maj	Min	Sub	A	S	Rs	Ps	CR	LF			
															86,000					
M/s. Shaheen Construction Company.		Security Deposit for the work of Improvement & Rehabilitation of Electrical Wiring Work in 07 School Building (Defunct) UC-10 & 11.										86,000								
TOTAL DR														86,000						

Bank Stamp
 Signature Bank Cashier

Rupees in Words. Eighty Six Thousand Only

CHALLAN

Signature with Stamp
Accountant/Assistant Accounts Officer
Drawing & Disbursing Officer

ACCOUNTANT
 CORPORATION OF KARACHI

Signature of Bank Officer

UJAJ DISTRICT GOVERNMENT
 UJAJ DISTRICT GOVERNMENT
 UJAJ DISTRICT GOVERNMENT



UJAJ DISTRICT GOVERNMENT
 DISTRICT OFFICE UJAJ
 DISTRICT OFFICE UJAJ
 DISTRICT OFFICE UJAJ

The amount paid to the account of the Government of Sindh is hereby acknowledged and the amount of Rs. 10,000/- is being paid to the Government of Sindh.

B. Q. No.	Disbursement Code (Rev)	Disbursement Code	Income Code	Budget Grant Code	Amount				
1					Rs.	Paise	10,000/-		

Subject in view

Handwritten signature and text:

[Signature]
 JUDGE

Accountant
 Ujaj District Government

Assistant District Officer

CHALLAN No. []

ALLIED BANK LIMITED
 ONE OF THE LEADING BANKS IN THE WORLD

Stamp and signature area:

[Stamp]
[Signature]

Signature Bank Officer

4



Tender issued to
 M/s Shaham Const. Co
 Against pay order No. 1998702
 Dated 6.11.12 of Rs. 3000/-
 Of U.B.I. Branch
 Tender Section
 W&S

KARACHI METROPOLITAN CORPORATION

ENGINEERING DEPARTMENT

NAME OF SCHEME:
IMPROVEMENT & REHABILITATION OF ELECTRICAL WIRING
WORK IN 07 SCHOOL (BUILDING) (DEFUNCT) UC-10 & 11.

(VOLUME-II)

Estimated Cost:-	Rs. 3.746 Million	Tender Cost:	Rs.3,000/-
Time Limit:-	60 Days	Penalty	As per Contract Data
To be Opened on:-	20-03-2012	Validity of Tender:	As per Bidding Data

[Signature]
 Executive Engineer (CM) E&M
 Engg. Department, KMC

Tender Issued:

No: <u>[REDACTED]</u>	Dated _____
Issue to M/s _____	Pay Order No. _____
_____	Dated _____
_____	Bank: _____

Signature & Stamp of Issuing Authority

[Signature]
 Tender issued to Shaham Const. Co.
 M/s [Signature]
 Against pay order No. 1998702
 Dated 06/11/12 of Rs. 3000/-
 Of U.B.I. Branch
 Tender Section
 W&S



KARACHI METROPOLITAN CORPORATION
OFFICE OF THE EXECUTIVE ENGINEER (CM) E&M
ENGINEERING DEPARTMENT

4th Floor, Room No. C-412, Civic Centre, Gulshan-e-Iqbal, Karachi
 Phone: 021-99232426. Fax: 021-99230669

PRICE SCHEDULE

SUBJECT : IMPROVEMENT & REHABILITATION OF ELECTRICAL WIRING
WORK IN 07 SCHOOL (BUILDING) (DEFUNCT) UC-10 & 11.

S.#	Description.	Qty.	Unit.	Rate.	In Words	Amount.
	KMC SCHOOL NO.34 IN UC NO.10 NEAR JHAT PHAT MARKET BROGHI MOHALLA PHOTO LANE CHAKIWARA LYARI KARACHI					
1	Dismantling of existing Electrical items to prepare the site for fresh works as follows:					
	i) Existing wiring with PVC pipes etc	70	Meter	41/-	Low	2800.00
	ii) Switch boards all size	20	No	19/-	Winkless	380.00
	iii) Distribution boards	1	No	175/-	One Hundred Seventy five	175.00
	iv) Removing of fans with the help of ladder and skilled labour.	8	Job	100/-	One Hundred	800.00
2	Point wiring for light or fan with 2x1.5mm PVC insulated cable (AGE/Pioneer/Pakistan cable Ltd) in 3/4" dia PVC conduit/channel pattu on wall or column complete in all respect.	38	NO JOE	740/-	Seven Hundred forty	28,120.00
3	Circuit wiring from distribution board to switch board with PVC insulated wire 2x2.5mm (AGE/Pioneer/Pakistan Cable Ltd) make in PVC conduit/channel pattu on surface					

- complete in all respect
- 4 Rewiring for light or fan point with 2x1.5mm PVC insulated copper conductor single core wire in given PVC conduit/channel patti complete in all respect
- 5 Wiring for light plug point with 2x7/0.29 PVC insulated cable (AGE/Pioneer/Pakistan Cable Ltd) in 3/4" dia PVC conduit/channel patti in the wall with light plug socket 5 pin 10/15 Amps back box PVC complete as required.
- 6 Wiring for power plug point with 2x7/0.44 PVC insulated (AGE/Pioneer/Pakistan Cable Ltd) in 3/4" dia PVC conduit/channel Patti with Power Plug 20 Amps and back box PVC complete as required
- 7 P/F of ceiling fan of size 56" with blade, down rod 1 meter if required) include connection with 2 core 23/0.76 flexible wire, ceiling rose & dimmer etc complete in all aspect (Pak/Millat make)
- 8 P/M/F of Fan hook MS make including cutting of roof and plaster if required.
- 9 P/F of Bracket fan Plastic Body size 18" dia Make (Pak/Millat) with round block, ceiling rose etc complete in all as respect.
- 10 P/F of Exhaust fan Plastic Body/Metal body size 12" Make (Pak/Millat) with round block, ceiling rose etc complete in all as respect.
- 11 P/F of Energy Saver 30 Watts with threads holder, round block PVC (Philips make or Equivalent) complete in

20	NO JOB	1900/-	One thousand Nine Hundred	19,000
30	NO JOB	4500/-	Four thousand fifty	13,500
2	NO JOB	1025/-	One thousand Twenty five	2050
2	NO JOB	1750/-	One thousand Seven hundred fifty	3,500
10	NO JOB	4100/-	Four thousand One hundred	41,000
4	NO JOB	230/-	Two hundred thirty	920
2	NO JOB	3900/-	Three thousand Nine hundred	7,800
2	NO JOB	2200/-	Two thousand Two hundred	4,400

- as respect
- 12 P/F of Energy Saver 24Watts with threads holder, round block PVC (Philips make or Equivalent) complete in
- as respect
- 13 Wiring for call bell point with 3x1.5mm PVC insulated cable (AGE/Pioneer/Pakistan Cable Ltd Make) 3/4" dia PVC conduit on wall with ding dong bell complete as required.
- 14 P/F of Fancy switches with back box as per following specification
 - a) 2 Gang Clipsal (China)
 - u) 5 Gang Clipsal (China)
- 15 P/F of chennelpati following size with all fixing accessories as required
 - a) 3/4" dia
 - b) 1" dia.
- 16 P/F of suction pump 1 HP (Siemens/Javaid/Golden) make complete in all respect, including GI pipe 1" dia (Steelex/KPM) with Union and specials as required.
- 17 P/F of Mono Block Pump 2 HP single phase (Siemens/Javaid/Golden) make complete in all respect, including GI pipe 1-1/2" dia (Steelex/KPM) with Union and specials as required.
- 18 P/F of Electric Water cooler (MECO or Equivalent) 60 Galons with wooden stand C.C base of appropriate size, discharge PVC pipe 1.5" dia with specials complete as required.

24	NO JOB	370/-	Three Hundred Seventy	8880.00
15	NO JOB	370/-	4	5580.00
2	NO JOB	1100/-	One thousand One hundred	2200.00
12	NO JOB	425/-	Four hundred Twenty five	5100.00
10	NO JOB	500/-	Five hundred	5000.00
260	Feets	20/-	Twenty	5200.00
200	Feets	22/-	Twenty two	4400.00
1	NO JOB	18,000/-	Eighteen thousand	18,000.00
1	NO JOB	21,500/-	Twenty One thousand Five hundred	21,500.00
1	NO JOB	55,000/-	Fifty five thousand	55,000.00

17)	P/F water filter for Electric Water cooler 1000 liters as per site requirement and instruction of Engineer Incharge	1	NO JOB	8000/-	Eight thousand	8,000 .-	
18)	P. L. (Main or sub main) of PVC-PVC insulated copper conductor (AGE/Pioneer/Pakistan Cable Ltd.) make of the following size for light connection at the height of as per site requirement						
a)	Single core 10mm ² PVC/PVC	270	Meter	120/-	One Hundred twenty	32,400 .-	
b)	Single core 6mm ² PVC/PVC	430	Meter	90/-	Ninety	38,700 .-	
c)	Single core 4mm ² PVC/PVC	550	Meter	58/-	Fifty eight	31,900 .-	
d)	Single core 2.5mm ² PVC/PVC	740	Meter	38/-	Thirty eight	28,120 .-	
21)	P/F of distribution board fabricated in MS sheet best quality gauge powder coated, wall mounted type and locking arrangement with following size Circuit Breaker including cost of connection complete in all respect make (Japan/Germany/France) 1- 30Amps S.P. (MCB). 1- 20Amps S.P (MCB). 10- 10Amps S.P (MCB).						
22)	Wall cutting for Posing wing as per size site requirement complete in all respect and instruction of Engineer Incharge.	400	RFI	10/-	Ten	4,000 .-	
23)	Renovating and finishing of walls with c.c for mixture 1:3 ratio complete in all respect and instruction of Engineer Incharge.	400	RFI	14/-	Fourteen	5,600 .-	
						Sub Total:	410,475 .-

KMC SCHOOL NO.42 & 43 IN UC
NO.10
ST. NO.19 PETROL PUMP GUL
MUHAMMAD
LANE, CHAKIWARA LYARI
KARACHI

1 Dismantling of existing Electrical items to prepare the site for fresh work as follows:

i) Existing wiring with PVC pipes etc

75

Meter

4/-

Four

300.00

ii) Switch boards all size

35

No

19/-

Nineteen

665.00

iii) Distribution boards

2

No

175/-

Two Hundred Seventy five

350.00

iv) Removing of fans with the help of ladder and skilled labour.

15

Job

100/-

One Hundred

1500.00

2 Point wiring for light or fan with 2x1.5mm PVC insulated cable (AGE/Pioneer/Pakistan cable Ltd) in 3/4" dia PVC conduit/channel pattu on wall or column complete in all respect.

80

NO JOB

740/-

Seven Hundred forty

59,200.00

3 Circuit wiring from distribution board to switch board with PVC insulated wire 2x2.5mm (AGE/Pioneer/Pakistan Cable Ltd) make in PVC conduit/channel pattu on surface complete in all respect.

18

NO JOB

1900/-

One Thousand Nine Hundred

34,200.00

4 Rewiring for light or fan point with 2x1.5mm PVC insulated copper conductor single core wire in given PVC conduit /channel pattu complete in all respect.

40

NO JOB

450/-

Four Hundred fifty

18,000.00

5 Wiring for light plug point with 2x7/0 29 PVC insulated cable (AGE/Pioneer/Pakistan Cable Ltd) in 3/4" dia PVC conduit/channel pattu in the wall with

- light plug
- socket 5 pin 10/15 Amps back box PVC complete as required
- Wiring for power plug point with 2x 3/4 PVC insulated
- AGE/Pioneer Pakistan Cable Ltd in 3/4" dia PVC conduit/channel Paint with Power Plug 20 Amps and back box PVC complete as required
- P/F of ceiling fan of size 36" with blade, down rod 1 meter if required) include connection with 2 core 23/0.76 flexible wire, ceiling rose & dimmer etc complete in all aspect (Pak/Millat make)
- P/M/F of Fan hook MS make including cutting of roof and plaster if required
- P/F of Bracket fan Plastic Body size 18" dia Make (Pak/Millat) with round block, ceiling rose etc complete in all as respect.
- P/F of Exhaust fan Plastic Body/Metal body size 12" Make (Pak/Millat) with round block, ceiling rose etc complete in all as respect.
- P/F of Energy Saver 30Watts with threads holder, round block PVC (Philips make or Equivalent) complete in as respect
- P/F of Energy Saver 24Watts with threads holder, round block PVC (Philips make or Equivalent) complete in as respect.
- Wiring for call bell point with 3x1.5mm PVC insulated cable (AGE/Pioneer Pakistan Cable Ltd Make) 3/4" dia

2	NO JOB	1025/-	One Thousand Seventy five	8,250/-
4	NO JOB	1750/-	One Thousand Seven Hundred Fifty	7000/-
18	NO JOB	4100/-	Four Thousand One Hundred	73,800/-
10	NO JOB	230/-	Two Hundred Thirty	2300/-
4	NO JOB	3900/-	Three Thousand Nine Hundred	15,600/-
4	NO JOB	2200/-	Two Thousand Two Hundred	8800/-
64	NO JOB	370/-	Three Hundred Seventy	23680/-
20	NO JOB	370/-	u	7400/-

PVC conduit on wall with long along bell complete as required

14 P/F of Fancy switches with back box as per following specification

8 4 Gang Clipsal (China)

10 6 Gang Clipsal (China)

15 P/F of chime/patu following size with all fixing accessories as required

a) 3/4" dia

b) 1" dia

16 P/F of suction pump 1 HP (Siemens/Javard/Golden) make complete in all respect, including GI pipe 1" dia (Steelex/KPM) with Union and specials as required

17 P/F of Mono Block Pump 2 HP single phase (Siemens/Javard/Golden) make complete in all respect, including GI pipe 1-1/2" dia (Steelex/KPM) with Union and specials as required

18 P/F of Electric Water cooler (MECO or Equivalent) 60 Galons with wooden stand C.C. base of appropriate size; discharge PVC pipe 1.5" dia with specials complete as required.

19 P/F water filter for Electric Water Cooler 60 Galons as per site requirement and instruction of Engineer Incharge

20 P/L (Main or Sub main) of PVC/PVC insulated copper conductor (AGE, Pioneer/Pakistan Cable Ltd) make of the following size for light connection at the height of as per site requirement

2	NO JOB	1100/-	One thousand One Hundred	2200.00
20	NO JOB	4200/-	Four thousand Two hundred	8500.00
20	NO JOB	5500/-	Five thousand Five hundred	11,000.00
350	Feet	20/-	Twenty	7000.00
300	Feet	22/-	Twenty two	6600.00
1	NO JOB	18000/-	Eighteen thousand	18,000.00
1	NO JOB	23000/-	Twenty three thousand	23,000.00
1	NO JOB	55000/-	Fifty five thousand	55,000.00
1	NO JOB	8000/-	Eight thousand	8,000.00

a	Single core 10mm ² PVC/PVC	350	Meter	120/2	Two Hundred Twenty	45,600/-
b	Single core 6mm ² PVC/PVC	470	Meter	90/2	Ninety	42,300/-
c	Single core 4mm ² PVC/PVC	560	Meter	58/2	fifty eight	32,480/-
d	Single core 2.5mm ² PVC/PVC	780	Meter	38/2	thirty eight	29,640/-
21	P.F of distribution board fabricated in MS sheet best quality gauge powder coated, wall mounted type and locking arrangement with following size Circuit Breaker including cost of connection complete in all respect make (Japan/Germany/France) 1-30.Amps S.P. (MCB) 1-20.Amps S.P (MCB) 9-10.Amps S.P (MCB)	2	NO JOB	11,000/-	Eleven Thousand	22,000/-
22	Wall cutting for Pong wiring as per size site requirement complete in all respect and instruction of Engineer Incharge	470	RFT	10/2	Ten	4700/-
23	Remaking and finishing of walls with c/c for mixture 1:3 ratio complete in all respect and instruction of Engineer Incharge.	470	RFT	14/2	Fourteen	6580/-
Sub Total:						583,595/-
KMC SCHOOL NO.44 & 45 IN UC NO.10 ST. NO.19 PETROL PUMP AND MAMA SWEET HOUSE KATTCHI MENON JAMAT KHANA						
1	Dismantling of existing Electrical items to prepare the site for fresh work as follows:					
a)	Existing wiring with PVC pipes etc.	90	Meter	4/2	Four	360/-

- ii) Switch boards all size
- iii) Distribution boards
- iv) Removing of fans with the help of ladder and skilled labour
- 2 Point wiring for light or fan with 2x1.5mm PVC insulated cable (AGE/Pioneer/Pakistan Cable Ltd) in 3/4" dia PVC conduit/channel path on wall or column complete in all respect
- 3 Circuit wiring from distribution board to switch board with PVC insulated wire 2x2.5mm (AGE/Pioneer/Pakistan Cable Ltd) make in PVC conduit/channel path on surface complete in all respect
- 4 Rewiring for light or fan point with 2x1.5mm PVC insulated copper conductor single core wire in given PVC conduit/channel path complete in all respect
- 5 Wiring for light plug point with 2x7/0.29 PVC insulated cable (AGE/Pioneer/Pakistan Cable Ltd) in 3/4" dia PVC conduit/channel path in the wall with light plug socket 5 pin 10/15 Amps back box PVC complete as required
- 6 Wiring for power plug point with 2x7/0.44 PVC insulated (AGE/Pioneer/Pakistan Cable Ltd) in 3/4" dia PVC conduit/channel Path with Power Plug 20 Amps and back box PVC complete as required
- 7 P/F of ceiling fan of size 36" with blade, down rod 1 meter if required) include connection with 2 core 2x0.76 flexible wire, ceiling rose & dimmer etc complete in all aspect (Pak/Millat make)

29	No	191/-	Nuclear	380 w
1	No	175/-	One Hundred Seventy five	175 w
8	Lot	100/-	One Hundred	800 w
50	NO JOB	740/-	Seven Hundred forty	37,000 w
10	NO JOB	1900/-	One thousand nine hundred	19,000 w
20	NO JOB	450/-	Four Hundred fifty	9,000 w
4	NO JOB	1025/-	One thousand twenty five	4,150 w
2	NO JOB	1750/-	One thousand seven hundred fifty	3,500 w
10	NO JOB	4100/-	Four thousand one hundred	41,000 w

8 P/F of Fan for 4.5hp size including fitting of roof and plaster if required

2 P/F of Bracket for Plastic Body size 15" dia Make (Pak/ Millat) with round block, ceiling rose etc complete in all as respect

10 P/F of Exhaust fan Plastic Body Metal body size 12" Make (Pak/Millat) with round block, ceiling rose etc complete in all as respect

11 P/F of Energy Saver 30Watts with threads holder, round block PVC (Philips make or equivalent) complete in as respect

12 P/F of Energy Saver 24Watts with threads holder, round block PVC (Philips make or equivalent) complete in as respect

13 Wiring for call bell point with 3x1 5mm PVC insulated cable (AGE/Pioneer/Pakistan Cable Ltd Make) 3/4" dia PVC conduit on wall with ding dong bell complete as required.

14 P/F of Fancy switches with back box as per following specification
 i) 4 Gang Clipsal (China)
 ii) 6 Gang Clipsal (China)

15 P/F of chennelpattir following size with all fixing accessories as required
 a) 3/4" dia

NO JOB	230/-	Two Huda Shirley	1380.00
NO JOB	3900/-	Three Huda Amin Huda	7800.00
NO JOB	2200/-	Two Huda Two Huda	4400.00
NO JOB	370/-	Three Huda Sentry	11,840.00
NO JOB	370/-	LI	4440.00
NO JOB	1100/-	One Huda One Huda	2200.00
NO JOB	425/-	Four Huda Locality	5100.00
NO JOB	550/-	Five Huda Tilly	5500.00
Feets	20/-	Locality	5200.00

- b) 1" dia
 P/F of suction pump 1 HP (Siemens/Javid/Golden) make complete in all respect, including GI pipe 1" dia (Steels/KPM) with Union and specials as required.
- 16
 P/F of Mono Block Pump 2 HP single phase (Siemens/Javid/Golden) make complete in all respect, including GI pipe 1-1/2" dia (Steels/KPM) with Union and specials as required.
- 17
 P/F of Electric Water cooler (MECO or Equivalent) 60 Galons with wooden stand C.C base of appropriate size, discharge PVC pipe 1.5" dia with specials complete as required.
- 18
 P/F water filter for Electric Water Cooler 60 Galons as per site requirement and instruction of Engineer Incharge.
- 19
 P/L (Main or Sub main) of PVC/PVC insulated copper conductor (AGE/Pioneer/Pakistan Cable Ltd) make of the following size for light connection at the height of as per site requirement.
- 20
 a) Single core 10mm² PVC/PVC
 b) Single core 6mm² PVC/PVC
 c) Single core 4mm² PVC/PVC
 d) Single core 2.5mm² PVC/PVC
- 21
 P/F of distribution board fabricated in M.S sheet best quality gauge powder coated, wall mounted type and locking arrangement with following size Circuit Breaker

22	Locality two	4400
18000	Eighteen thousand	18,000
23000	Twenty three thousand	23,000
55000	Fifty five thousand	55,000
8000	Eight thousand	8,000
120	One Hundred twenty	28,800
90	Ninety	38,700
58	Fifty eight	32,480
38	Thirty eight	28,120

including cost of construction complete in all respect make
(Japan/Germany/France)

1- 30Amps S.P. (MCB)

1- 20Amps S.P. (MCB)

10- 10Amps S.P. (MCB)

22 Wall cutting for Point wiring as per size site requirement complete in all respect and instruction of Engineer Incharge

23 Remaking and finishing of walls with c/c for mixture 1:6 ratio complete in all respect and instruction of Engineer Incharge.

NO JOB

450 RFT

450 RFT

Sub Total:

**KMC SCHOOL NO.46 IN UC NO.10
NEAR JANGIYAN HOTEL JUMAN
SHAH
PLOT REXER LANE LYARI
KARACHI**

1 Dismantling of existing Electrical items to prepare the site for fresh works as follows

i) Existing wiring with PVC pipes etc

ii) Switch boards all size

iii) Distribution boards

iv) Removing of fans with the help of ladder and skilled labour.

2 Point wiring for light or fan with 2x1.5mm PVC insulated cable (AGE/Pioneer/Pakistan cable Ltd) in 3/4" dia PVC conduit/channel patri on wall or column complete in all respect.

3 Circuit wiring from distribution board to switch board with PVC insulated wire 2x2.5mm

Meter

90

No

24

No

2

Job

6

NO JOB

48

13,000/-
Shake
Thomson
13,000/-

10/-
Ten
4500/-

14/-
Fourteen
6300/-

13,000

4500

6300

41797/-
42347/-

4/-
Four
360.00

1915
Nineteen
456.00

175/-
One Hundred
Seventy five
350.00

700/-
One Hundred
Seventy
600.00

740/-
Seven Hundred
Forty
35,520.00

360.00

456.00

350.00

600.00

35,520.00

AGE/Pioneer/Pakistan Cable Ltd) make in 10" conduit channel path on surface complete in all respect

4 Rewiring for light or fan point with 2x1.5mm PVC insulated copper conductor single core wire in given PVC conduit / channel path complete in all respect

5 Wiring for light plug point with 2x7/0.29 PVC insulated cable (AGE/Pioneer/Pakistan Cable Ltd) in 3/4" dia PVC conduit/channel path in the wall with light plug socket 5 pin 10/15 Amps back box PVC complete as required.

6 Wiring for power plug point with 2x7/0.44 PVC insulated (AGE/Pioneer/Pakistan Cable Ltd) in 3/4" dia PVC conduit/channel Path with Power Plug 20 Amps and back box PVC complete as required

7 P/F of ceiling fan of size 36" with blade, down rod 1 meter if required) include connection with 2 core 23/0.76 flexible wire, ceiling rose & dimmer etc complete in all aspect (Pak/Millat make)

8 P/M/F of Fan hook MS make including cutting of roof and plaster if required.

9 P/F of Bracket fan Plastic Body size 18" dia Make (Pak/Millat) with round block, ceiling rose etc complete in all as respect.

10 P/F of Exhaust fan Plastic Body/Metal body size 12" Make (Pak/Millat) with round block, ceiling rose etc complete in all as respect.

8	NO JOB	1900/-	One Thousand Nine Hundred	15,200.00
25	NO JOB	4500/-	Four Thousand Five Hundred	11,250.00
4	NO JOB	1025/-	One Thousand Two Hundred Fifty	4,100.00
2	NO JOB	1750/-	One Thousand Seven Hundred Fifty	3,500.00
14	NO JOB	4100/-	Four Thousand One Hundred	57,400.00
8	NO JOB	2300/-	Two Thousand Three Hundred	18,400.00
2	NO JOB	3900/-	Three Thousand Nine Hundred	7,800.00
2	NO JOB	2200/-	Two Thousand Two Hundred	4,400.00

- 11 P/F of Energy Saver 30Watts with threads holder, round block PVC (Philips make or Equivalent) complete in all respect
- 12 P/F of Energy Saver 24Watts with threads holder, round block PVC (Philips make or Equivalent) complete in all respect
- 13 Wiring for call bell point with 3x1.5mm PVC insulated cable (AGE/Pioneer/Pakistan Cable Ltd Make) 3/4" dia PVC conduit on wall with ding dong bell & complete as required.
- 14 P/F of Fancy switches with back box as per following specification.
- a) 4 Gang Clipsal (China)
 - b) 6 Gang Clipsal (China)
- 15 P/F of chennelpatu following size with all fixing accessories as required.
- a) 3/4" dia.
 - b) 1" dia.
- 16 P/F of suction pump 1 HP (Siemens/Javid/Golden) make complete in all respect, including GI pipe 1" dia (Steelex/KPM) with Union and specials as required.
- 17 P/F of Mono Block Pump 2 HP single phase (Siemens/Javid/Golden) make complete in all respect, including GI pipe 1-1/2" dia (Steelex/KPM) with Union and specials as required.
- 18 P/F of Electric Water cooler (MECO or Equivalent) 60 Gallons

24	NO JOB	370	Three Hundred Seventy	8880.00
12	NO JOB	370	11	4440.00
2	NO JOB	1100	One Thousand One Hundred	2200.00
10	NO JOB	425	Four Hundred Twenty Five	4250.00
8	NO JOB	550	Five Hundred Fifty	4400.00
320	Fects	20	Twenty	6400.00
280	Fects	22	Twenty Two	6160.00
1	NO JOB	18000	Eighteen Thousand	18,000.00
1	NO JOB	23000	Twenty Three Thousand	23,000.00

with wooden stand. (Use of appropriate size discharge PVC pipe 1.5" dia with specials complete as required)

19 P/F water filter for Electric Water Cooler 50 Galons as per site requirement and instruction of Engineer Incharge

20 P/L (Main or Sub main) of PVC/PVC insulated copper conductor (AGE/Pioneer/Pakistan Cable Ltd) make of the following size for light connection at the height of as per site requirement

a) Single core 10mm² PVC/PVC

b) Single core 6mm² PVC/PVC

c) Single core 4mm² PVC/PVC

d) Single core 2.5mm² PVC/PVC

21 P/F of distribution board fabricated in MS sheet best quality gauge powder coated, wall mounted type and locking arrangement with following size Circuit Breaker including cost of connection complete in all respect make (Japan/Germany/France)

1- 30Amps S.P. (MCB)


1-20Amps S.P (MCB)

8-10Amps S.P (MCB)

22 P/F of Flood light IP 65 with Energy saver lamp (Philips) with internal wiring complete in all respect.

23 Wall cutting for Pong wiring as per size

4	NO JOB	55000/-	Fifty five thousand	55,000.00
1	NO JOB	8000/-	Eight thousand	8,000.00
360	Meter	120/-	One Hundred twenty	43,200.00
450	Meter	90/-	九十	40,500.00
530	Meter	58/-	Fifty eight	30,740.00
710	Meter	38/-	Thirty eight	26,980.00
1	NO JOB	11,000/-	Eleven thousand	11,000.00
2	NO JOB	5610/-	Five thousand Six Hundred ten	11,220.00

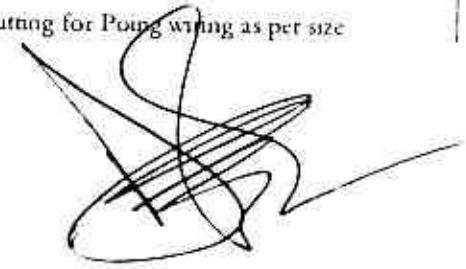

	site requirement complete in all respect and instruction of Engineer Incharge	470	RET	10/ - <i>Len</i>	4700.00
24	Remaking and finishing of walls with s.c. for mixture 1:6 ratio complete in all respect and instruction of Engineer Incharge	470	RET	14/ - <i>Fourlin</i>	6580.00
				Sub Total	458,426.00

**KMC SCHOOL NO.48 & 49 IN UC
NO.II
NEAR GABOOL PARK KALAKOT
LYARI
KARACHI**

1	Dismentling of existing Electrical items to prepare the site for fresh work as follows				
	i) Existing wiring with PVC pipes etc	100	Meter	4/ - <i>Atom</i>	400.00
	ii) Switch boards all size	38	No	19/ - <i>Nuclear</i>	722.00
	iii) Distribution boards	2	No	175/ - <i>One Handed</i>	350.00
	iv) Removing of fans with the help of ladder and skilled labour.	10	Job	100/ - <i>Swiss fine</i>	1000.00
2	Point wiring for light or fan with 2x1.5mm PVC insulated cable (AGE/Pioneer/Pakistan cable Ltd) in 3/4" dia PVC conduit/channel putti on wall or column complete in all respect	60	NO JOB	740/ - <i>One Handed</i>	46,400.00
3	Circuit wiring from distribution board to switch board with PVC insulated wire 2x2.5mm (AGE/Pioneer/Pakistan Cable Ltd) make in PVC conduit/channel putti on surface complete in all respect	14	NO JOB	1900/ - <i>One Handed</i>	26,600.00

- 1 Rewiring for light or fan point with 2x1 mm PVC insulated copper conductor single core wire in given PVC conduit /channel path complete in all respect
- 5 Wiring for light plug point with 2x7/0.29 PVC insulated cable (AGE/Pioneer/Pakistan Cable Ltd) in 3/4" dia PVC conduit/channel path in the wall with light plug socket 5 pin 10/15 Amps back box PVC complete as required.
- 6 Wiring for power plug point with 2x7/0.44 PVC insulated (AGE/Pioneer/Pakistan Cable Ltd) in 3/4" dia PVC conduit/channel Path with Power Plug 20 Amps and back box PVC complete as required.
- 7 P/F of ceiling fan of size 56" with blade, down rod 1 meter if required) include connection with 2 core 23/0.76 flexible wire, ceiling rose & dimmer etc complete in all aspect (Pak/Millat make)
- 8 P/M/F of Fan hook MS make including cutting of roof and plaster if required.
- 9 P/F of Bracket fan Plastic Body size 18" dia Make (Pak/Millat) with round block, ceiling rose etc complete in all as respect.
- 10 P/F of Exhaust fan Plastic Body/Metal body size 12" Make (Pak/Millat) with round block, ceiling rose etc complete in all as respect.
- 11 P/F of Energy Saver 30Watts with threads holder, round block PVC (Pluhps make or Equivalent) complete in as respect.

25	NO JOB	450/-	Five Hundred fifty	11,250/-
4	NO JOB	102/-	One thousand twenty	4100/-
2	NO JOB	1750/-	One thousand Seven Hundred fifty	3500/-
24	NO JOB	4100/-	Four thousand One Hundred	98,400/-
10	NO JOB	230/-	Two Hundred thirty	2300/-
4	NO JOB	3900/-	Three thousand Nine Hundred	15,600/-
2	NO JOB	2200/-	Two thousand Two Hundred	44,000/-
48	NO JOB	370/-	Three Hundred seventy	17,760/-

- 12 P/F of Energy Saver 24Watts with threads holder, round block PVC (Philips make or Equivalent) complete in as respect.
- 13 Wiring for call bell point with 3x1 5mm PVC insulated cable (AGE/Protect/Pakistan Cable Ltd Make) 3/4" dia PVC conduit on wall with ding dong bell complete as required.
- 14 P/F of Fancy switches with back box as per following specification
- i) 4 Gang Clipsal (China)
 - ii) 6 Gang Clipsal (China)
- 15 P/F of chennelpatti following size with all fixing accessories as required
- a) 3/4" dia
 - b) 1" dia
- 16 P/F of suction pump 1 HP (Siemens/Javid/Golden) make complete in all respect, including GI pipe 1" dia (Steelex/KPM) with Union and specials as required.
- 17 P/F of Mono Block Pump 2 HP single phase (Siemens/Javid/Golden) make complete in all respect, including GI pipe 1-1/2" dia (Steelex/KPM) with Union and specials as required.
- 18 P/F of Electric Water cooler (MECO or Equivalent) 60 Galons with wooden stand C.C base of appropriate size, discharge PVC pipe 1.5" dia with specials complete as required.
- 19 P/F water filter for Electric Water Cooler 60 Galons as per site requirement and instruction of

24	NO JOB	3701	Three Hundred Seventy One	8880.00
2	NO JOB	11009	One Thousand One Hundred Nine	2200.00
20	NO JOB	4251	Four Hundred Twenty Five	8500.00
18	NO JOB	5501	Five Hundred Fifty One	9900.00
300	Feets	209	Two Hundred Nine	6000.00
240	Feets	221	Two Hundred Twenty One	5280.00
1	NO JOB	18000	Eighteen Thousand	18,000.00
1	NO JOB	23000	Twenty Three Thousand	23,000.00
1	NO JOB	55000	Fifty Five Thousand	55,000.00

Engineer Incharge

20 P/I. (Main or Sub main) of PVC/PVC insulated copper conductor (AGE/Pioneer/Pakistan Cable Ltd.) make of the following size for light connection at the height of as per site requirement.

a) Single core 10mm² PVC/PVC

b) Single core 6mm² PVC/PVC

c) Single core 4mm² PVC/PVC

d) Single core 2.5mm² PVC/PVC

21 P/F of distribution board fabricated in MS sheet best quality gauge powder coated, wall mounted type and locking arrangement with following size Circuit Breaker including cost of connection complete in all respect make (Japan/Germany/France.)

1- 30Amps S.P. (MCB)

1- 20Amps S.P (MCB)


7- 10Amps S.P (MCB)

22 Wall cutting for Posing wiring as per size site requirement complete in all respect and instruction of Engineer Incharge.

23 Remaking and finishing of walls with c.c. for mixture 1:6 ratio complete in all respect and instruction of Engineer Incharge.

NO	JOB	Quantity	Rate	Total
1	NO JOB	8000/-	Eight-Thousand	8000.00
410	Meter	120/-	Four hundred twenty	49,200.00
430	Meter	90/-	Ninety	38,700.00
500	Meter	58/-	Fifty Eight	29,000.00
730	Meter	38/-	Thirty Eight	27,740.00
2	NO JOB	10,000/-	Ten thousand	21,000.00
500	RFT	10/-	Ten	5000.00
500	RFT	14/-	Fourteen	7000.00
			Sub-Total:	553,182.00

KMC SCHOOL NO.50,51,52 & 53 IN
UC NO.11
AL KAMA IQBAL COLONY
MEWASHAH

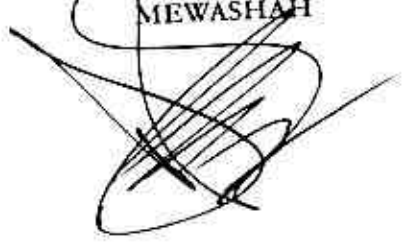

ROAD BAKRA PIRI LYARI KARACHI

1	Disassembling of existing Electrical items to prepare the site for fresh works follows			
i)	Existing wiring with PVC pipes etc	130	Meter	411 - Four - 520.00
ii)	Switch boards all size	30	No	191 - Nineteen - 570.00
iii)	Distribution boards	3	No	1751 - One Hundred Seventy five - 525.00
iv)	Removing of fans with the help of ladder and skilled labour	14	Job	1009 - One Hundred - 1400.00
2	Point wiring for light or fan with 2x1.5mm PVC insulated cable (AGE/Pioneer/Pakistan cable Ltd) in 3/4" dia PVC conduit/channel patti on wall or column complete in all respect	100	NO JOB	7401 - Seven Hundred forty - 74,000.00
3	Circuit wiring from distribution board to switch board with PVC insulated wire 2x2.5mm (AGE/Pioneer/Pakistan Cable Ltd) make in PVC conduit/channel patti on surface complete in all respect.	18	NO JOB	19001 - One thousand Nine Hundred - 34,200.00
4	Rewiring for light or fan point with 2x1.5mm PVC insulated copper conductor single core wire in given PVC conduit /channel patti complete in all respect	40	NO JOB	4501 - Four hundred fifty - 18,000.00
5	Wiring for light plug point with 2x7/0.29 PVC insulated cable (AGE/Pioneer/Pakistan Cable Ltd) in 3/4" dia PVC conduit/channel patti in the wall with light plug socket 5 pin 10/15Amps back box PVC complete as required.	6	NO JOB	10251 - One thousand twenty five - 6150.00
6	Wiring for power plug point with 2x7/0.44 PVC insulated (AGE/Pioneer/Pakistan Cable Ltd) in 3/4" dia PVC			

conduit, channel Patti with Power Plug 20Amps and back box PVC. complete as required

7 P/F of ceiling fan of size 36" with blade, down rod 1 meter if required) include connection with 2 core 25/0.76 flexible wire, ceiling rose & dimmer etc complete in all aspect (Pak/Millat make)

8 P/M/F of Fan hook MS make including cutting of roof and plaster if required.


9 P/F of Bracket fan Plastic Body size 18" dia Make (Pak/Millat) with round block, ceiling rose etc complete in all as respect.

10 P/F of Exhaust fan Plastic Body/Metal body size 12" Make (Pak/Millat) with round block, ceiling rose etc complete in all as respect.

11 P/F of Energy Saver 30Watts with threads holder, round block PVC (Philips make or Equivalent) complete in as respect.

12 P/F of Energy Saver 24Watts with threads holder, round block PVC (Philips make or Equivalent) complete in as respect.

13 Wiring for call bell point with 3x1.5mm PVC insulated cable (AGE/Pioneer/Pakistan Cable Ltd Make) 3/4" dia PVC conduit on wall with ding dong bell complete as required.



4	NO JOB	1750/-	One shown Same Hand Tifty	1000.00
30	NO JOB	4100/-	One shown One Hand	123,000.00
15	NO JOB	230/-	Two Hand Shutli	3450.00
4	NO JOB	3900/-	One shown Main Hand	15,600.00
4	NO JOB	2200/-	Two shown Two Hand	88,00.00
56	NO JOB	370/-	Three Hand Security	20720.00
24	NO JOB	370/-	(11)	8880.00
2	NO JOB	1100/-	One shown One Hand	2200.00

- 14 P/F of fancy switches with rack box as per following specification
 - i) 4 Gang Clipsal (China)
 - ii) 3 Gang Clipsal (China)
 - iii) 6 Gang Clipsal (China)
- 15 P/F of chennelpain following size with all fixing accessories as required
 - a) 3/4" dia
 - b) 1" dia
- 16 P/F of suction pump 1 HP (Siemens/Javaid/Golden) make complete in all respect, including GI pipe 1" dia (Steelex/KPM) with Union and specials as required.
- 17 P/F of Mono Block Pump 2 HP single phase (Siemens/Javaid/Golden) make complete in all respect, including GI pipe 1-1/2" dia (Steelex/KPM) with Union and specials as required.
- 18 P/F of Electric Water cooler (MECO or Equivalent) 60 Galons with wooden stand C.C. base of appropriate size, discharge PVC pipe 1.5" dia with specials complete as required.
- 19 P/F water filter for Electric Water Cooler 60 Galons as per site requirement and instruction of Engineer Incharge.
- 20 P/L (Main or Sub main) of PVC/PVC insulated copper conductor (AGE/Pioneer/Pakistan Cable Ltd.) make of the following size for light connection at the height of as per site requirement.
 - a) Single core 10mm² PVC/PVC

20	NO JOB	425/-	Four Hundred Twenty Five	8500.00
8	NO JOB	510/-	Five Hundred Ten	4080.00
18	NO JOB	550/-	Five Hundred Fifty	9900.00
350	Feets	20/-	Twenty	7000.00
310	Feets	22/-	Twenty Two	6820.00
1	NO JOB	18000/-	Eighteen Thousand	18,000.00
1	NO JOB	23000/-	Twenty Three Thousand	23,000.00
1	NO JOB	55000/-	Fifty Five Thousand	55,000.00
1	NO JOB	8000/-	Eight Thousand	8,000.00
450	Meter	120/-	One Hundred Twenty	54,000.00

b)	Single core 6mm ² PVC/PVC	530	Meter	90/-	Ninety	47,700.-
c)	Single core 4mm ² PVC/PVC	580	Meter	58/-	Fifty Eight	33,640.-
d)	Single core 2.5mm ² PVC/PVC	700	Meter	38/-	Thirty Eight	30,020.-
21	P.F of distribution board fabricated in M.S sheet best quality gauge powder coated, wall mounted type and locking arrangement with following size Circuit Breaker including cost of connection complete in all respect make (Japan/Germany/France) 1- 30Amps S.P (MCB) 1-20Amps S.P (MCB) 7-10Amps S.P (MCB)	2	NO JOB	10500/-	Ten thousand Five hundred	21,000.-
22	Wall cutting for Poring wiring as per size site requirement complete in all respect and instruction of Engineer Incharge	550	RFT	10/-	Ten	5500.-
23	Remaking and finishing of walls with c.c. for mixture 1:6 ratio complete in all respect and instruction of Engineer Incharge	550	RFT	14/-	Fourteen	7700.-
Sub Total:						664,875.-
KMC SCHOOL NO.54 & 55 IN UC NO.11 NEAR AZAD HOSPITAL NORANI COLONY BAKRA PIRI MEWSHAH ROAD LYARI KARACHI						
1	Dismantling of existing Electrical items to prepare the site for fresh work as follows:					
i)	Existing wiring with PVC pipes etc.	80	Meter	4/-	Four	320.-
ii)	Switch boards all size	32	No.	19/-	Nineteen	608.-
iii)	Distribution boards	3	No.	175/-	One hundred and Seventy five	525.-
iv)	Removing of ... with the help of					

- 2 labor and skilled labour
- 2 Point wiring for light or fan with 2x1.5mm PVC insulated cable (AGE/Pioneer/Pakistan cable Ltd) in 3/4" dia PVC conduit/channel part on wall or column complete in all respect.
- 3 Circuit wiring from distribution board to switch board with PVC insulated wire 2x2.5mm (AGE/Pioneer/Pakistan Cable Ltd) make in PVC conduit/channel part on surface complete in all respect.
- 4 Rewiring for light or fan point with 2x1.5mm PVC insulated copper conductor single core wire in given PVC conduit/channel part complete in all respect.
- 5 Wiring for light plug point with 2x7/0.29 PVC insulated cable (AGE/Pioneer/Pakistan Cable Ltd) in 3/4" dia PVC conduit/channel part in the wall with light plug socket 5 pin 10/15 Amps back box PVC complete as required.
- 6 Wiring for power plug point with 2x7/0.44 PVC insulated (AGE/Pioneer/Pakistan Cable Ltd) in 3/4" dia PVC conduit/channel part with Power Plug 20 Amps and back box PVC complete as required.
- 7 P/F of ceiling fan of size 56" with blade, down rod 1 meter if required) include connection with 2 core 23/0.76 flexible wire, ceiling rose & dimmer etc complete in all aspect (Pak/Mullat make)
- 8 P/M/F of Fan hook MS make including cutting of roof and plaster if required.

13	JOB	1009	One Hundred	1500.00
110	NO JOB	7409	Forty Only	8,400.00
18	NO JOB	19009	One thousand Ninethousand	34,200.00
30	NO JOB	4509	Four Hundred fifty	13,500.00
8	NO JOB	10289	One thousand Two hundred	8,200.00
2	NO JOB	17509	One thousand Seven hundred fifty	3,500.00
20	NO JOB	41009	Four thousand One hundred	82,000.00
8	NO JOB	2309	Two hundred thirty	1,800.00

- 9 P/F of Bracket fan Plastic Body size 18" dia Make (Pak Millat) with round block, ceiling rose etc complete in all as respect
- 10 P/F of Exhaust fan Plastic Body/Metal body size 12" Make (Pak/Millat) with round block, ceiling rose etc complete in all as respect
- 11 P/F of Energy Saver 30Watts with threads holder, round block PVC (Philips make or Equivalent) complete in as respect
- 12 P/F of Energy Saver 24Watts with threads holder, round block PVC (Philips make or Equivalent) complete in as respect
- 13 Wiring for call bell point with 3x1.5mm PVC insulated cable (AGE/Pioneer/Pakistan Cable Ltd Make) 3/4" dia PVC conduit on wall with ding dong bell complete as required.
- 14 P/F of Fancy switches with back box as per following specification
 - i) 4 Gang Clipsal (China)
 - ii) 5 Gang Clipsal (China)
 - iii) 6 Gang Clipsal (China)
- 15 P/F of chennelpatu following size with all fixing accessories as required
 - a) 3/4" dia
 - b) 1" dia
- 16 P/F of suction pump 1 HP (Siemens/Javid/Golden) make complete in all respect, including GI pipe 1" dia (Steelex/KPNO)

4	NO JOB	3900/-	Three thousand nine hundred	15,600.00
2	NO JOB	2200/-	Two thousand two hundred	44,000.00
64	NO JOB	370/-	Three hundred seventy	33,680.00
24	NO JOB	370/-	41	8880.00
2	NO JOB	1100/-	One thousand one hundred	2200
22	NO JOB	4287	Four hundred twenty eight	930.00
8	NO JOB	510	Five hundred ten	4080.00
20	NO JOB	550/-	Five hundred fifty	11,000.00
320	Feets	20/-	Twenty	6400.00
280	Feets	22/-	Twenty two	6160.00

with Union and specials as required

17 P/F of Mono Block Pump 2 HP single phase / Siemens (Javid/Golden) make complete in all respect, including GI pipe 1-1/2" dia (Steels - KPM) with Union and specials as required

18 P/F of Electric Water cooler (MECO or Equivalent) 60 Galons with wooden stand C.C. base of appropriate size, discharge PVC pipe 1.5" dia with specials complete as required.

19 P/F water filter for Electric Water Cooler 60 Galons as per site requirement and instruction of Engineer. Incharge.

20 P/L (Main or Sub main) of PVC/PVC insulated copper conductor (AGE/Pioneer/Pakistan Cable Ltd) make of the following size for light connection at the height of as per site requirement.

a) Single core 10mm² PVC/PVC

b) Single core 6mm² PVC/PVC

c) Single core 4mm² PVC/PVC

d) Single core 2.5mm² PVC/PVC

21 P/F of distribution board fabricated in MS sheet best quality gauge powder coated, wall mounted type and locking arrangement with following size Circuit Breaker including cost of connection complete in all respect make (Japan/Germany/France) 1- 60Amps T.P. (MCCB).

1	NO JOB	18000/-	Eighteen thousand	18,000.00
1	NO JOB	23000/-	Twenty three thousand	23,000.00
1	NO JOB	55000/-	Fifty five thousand	55,000.00
1	NO JOB	18000/-	Eighteen thousand	18,000.00
410	Meter	120/-	One Hundred Twenty	49,200.00
450	Meter	90/-	Ninety	40,500.00
580	Meter	58/-	Fifty Eight	33,640.00
790	Meter	38/-	Thirty Eight	30,020.00

1	30 Amps S.P. (MCB)					
1	20 Amps S.P. (MCB)					
9	10 Amps S.P. (MCB)	1	NO JOB	18000/-	Eighth Thousand	18,000.-
22	P.F. or distribution board fabricated in M.S. sheet best quality gauge powder coated, wall mounted type and locking arrangement with following size Circuit Breaker including cost of connection complete in all respect make (Japan, Germany/France.)					
1	30 Amps S.P. (MCB)					
1	20 Amps S.P. (MCB)					
9	10 Amps S.P. (MCB)	1	NO JOB	17000/-	Seventeen Thousand	17,000.-
23	Wall cutting for Poing wiring as per size site requirement complete in all respect and instruction of Engineer Incharge	450	RFT	109/-	Ten	4,500.-
24	Remaking and finishing of walls with c.c. for mixture 1:6 ratio complete in all respect and instruction of Engineer Incharge	450	RFT	141/-	Fourteen	6,300.-
						Sub Total: 632,503
						Grand Total: 3,721,030

Amounts in Words


Three Million Seven Hundred Twenty One Thousand Thirty Only.

I / We read each & every terms & conditions of Volume-I and agreed in all to be part & parcel of the agreement.

3726531 ~~3767231~~

I/We quoted the price schedule and bound ourselves to comply all terms and conditions of this contract with all existing rules and regulations of KMC and I have attached an Bid Security in shape of Pay Order / Bank Guarantee Pay order No. E.2033802

Dated 9.3.2012 issued from M.C.B. amounting Rs.75,000/- in favour of Karachi Metropolitan Corporation (KMC).
Signature of Bidder with Name & Stamp

Checked & Verified by: 



1/4

1. Tender received in Sealed/Unsealed/
Tape sealed/Gum seal cover.

2. P.O. No: (s) *3874* dated *2/11/11*
for Rs. *26,000/-* of Earnest Money
is/are attached/not attached.

3. No: correction/Correction/No: cutting/
cutting in rates.

4. Rates written/not written in words.

5. Rates quoted @ *rate* *quoted for 12* *37,21,000/-*
Thirty Seven Lakhs Twenty one Thousand *Thirty one*

[Signature]
By Director (Finance)
Member / Secretary
T.O.C
Engineering Dep.
KMC

O. S. W.
Chief Engineer ()
Member
T.O.C
Engineering Dep.
KMC

[Signature]
Chief Engineer
Chairman
T.O.C
Engineering Dep.
KMC

[Faint signature]



KARACHI METROPOLITAN CORPORATION
OFFICE OF THE SUPDT: ENGINEER(CONTRACT MANAGEMENT)
ENGINEERING DEPARTMENT

②

No.SE(CM)/ED/KMC/ 548 /2012

Dated:- 22/6 /2012

BID EVALUATION REPORT

1. Name of Procuring Agency: Karachi Metropolitan Corporation. ✓
2. Tender Reference No: KMC/CM/ED/ 74 /11-12. ✓
3. Tender Description/Name of Work/Item: Improvement & Rehabilitation of Electrical Wiring Work in 06 School (Building) Including One Model School of (Defunct)UC-5,6&7. ✓
5. Tender Published: SPPRA ID # 7003/2012 Daily Business Recorder dt: 03-03-2012 Daily Naway-e-Waqt & Amn dt:04-03-2012
Print & Electronic Media(SPPRA ID No. & News Paper Names with date)
6. Total Bid Documents Sold: 04 No. *sr. 11388*
7. Total Bid Received: 04 Nos.
8. Technical Bid Opening date(if applicable): Not Applicable (Provide details in separate form)
9. No.of Bid technically qualified (if applicable): Not Applicable.
10. Bid(s) Rejected: 1 No.
11. Financial Bid Opening Date: 28-03-2012. ✓
12. Bid Evaluation Report:

S.No.	Name of Firm or Bidder	Cost Offered by the Bidder (As Calculated)	Ranking in terms of cost	Comparison with Estimated cost	Reason for acceptance / rejection	REMARKS
1.	M/s. Shaheen Construction.	Rs.32,17,773/=	1 st Lowest	Below the Estimated Cost	Qualified as per Eligibility Criteria	Recommended for award of work.
2.	M/s. K.B. International.	Rs.32,50,490/=	2 nd Lowest	Below the estimated cost	Qualified as per Eligibility Criteria	Responsive
3.	M/s. Sumair Electric Store.	Rs.33,10,895/=	3 rd Lowest	above the estimated cost	Qualified as per Eligibility Criteria	Responsive
4.	M/s. M.S. Electric Services.	Rate Not Quoted				Not Responsive

Recommendations:- The offered amount of Rs.32,17,773/= by M/s. Shaheen Construction has been recommended by the Procurement Committee to award the work on the basis of their technical qualifying and lowest offered price bid. The unsuccessful bidders are already informed accordingly.

[Signature]
Dy. Director (Accounts)
Engineering Department, KMC
Member

[Signature]
Chief Engineer (Design) E&M
Engineering Department, KMC
Member

[Signature]
Director (Planning) F&P
Finance Department, KMC.
Member

[Signature]
Superintending Engineer (CM)
Engineering Department, KMC
Member / Secretary

[Signature]
Chief Engineer (CM)
Engineering Department, KMC
Chairman

Director (CB)SPPRA

With a request to upload on the Website of SPPRA(Authority).

Dy. Director(Web)Computer Section,

With a request to upload in the KMC website.

1. D.G.(Tech. Services), Engg: Department, KMC.
2. Chief Engineer(E&M), Engg: Department, KMC.
3. Chief Engineer(CM), Engg: Department, KMC.
4. Dy. Director (Account), Engg: Department, KMC.
5. Office Copy.



KARACHI METROPOLITAN CORPORATION
OFFICE OF THE SUPDT. ENGINEER(CONTRACT MANAGEMENT)
ENGINEERING DEPARTMENT

Dated:- 22/6/2012

No.SE(CM)/ED/KMC/ 549-A /2012

BID EVALUATION REPORT

1. Name of Procuring Agency: Karachi Metropolitan Corporation. ✓
2. Tender Reference No: KMC/CM/ED/76/11-12. ✓
3. Tender Description/Name of Work/Item: Improvement & Rehabilitation of Electrical Wiring Work in 07 School (Building) Defunct UC-10&11. ✓
5. Tender Published: SPPRA ID # 7003/2012 Daily Business Recorder dt: 03-03-2012 Daily Naway-e-Waqt & Ann dt:04-03-2012
Print & Electronic Media(SPPRA ID No. & News Paper Names with date)
6. Total Bid Documents Sold:04 No.
7. Total Bid Received: 04 Nos.
8. Technical Bid Opening date(if applicable): Not Applicable (Provide details in separate form)
9. No.of Bid technically qualified (if applicable): Not Applicable.
10. Bid(s) Rejected: No.
11. Financial Bid Opening Date: 28-03-2012. ✓

12. Bid Evaluation Report:

S.No.	Name of Firm or Bidder	Cost Offered by the Bidder (As Calculated)	Ranking in terms of cost	Comparison with Estimated cost	Reason for acceptance / rejection	REMARKS
1.	M/s. Shaheen Construction.	Rs.37,26,531/=	1 st Lowest	above the Estimated Cost	Qualified as per Eligibility Criteria	Recommended for award of work.
2.	M/s. K.B. International.	Rs.44,62,423/=	2 nd Lowest	above the Estimated Cost	Qualified as per Eligibility Criteria	Responsive
3.	M/s. Sumair Electric Store.	Rs.48,85,615/=	3 rd Lowest	above the estimated cost	Qualified as per Eligibility Criteria	Responsive
4.	M/s. M.S. Electric Services.	Rs.57,89,845/=	4 th Lowest	above the Estimated Cost	Qualified as per Eligibility Criteria	Responsive

Recommendations:- The offered amount of Rs.37,26,531/= by M/s. Shaheen Construction has been recommended by the Procurement Committee to award the work on the basis of their technical qualifying and lowest offered price bid. The unsuccessful bidders are already informed accordingly.

Dy. Director (Accounts)
 Engineering Department, KMC
 Member

Chief Engineer (Design) E&M
 Engineering Department, KMC
 Member

Director (Planning) F&P
 Finance Department, KMC.
 Member

Superintending Engineer (CM)
 Engineering Department, KMC
 Member / Secretary

Chief Engineer (CM)
 Engineering Department, KMC
 Chairman

Director (CB)SPPRA

With a request to upload on the Website of SPPRA(Authority).

Dy. Director (Web) Computer Section,

With a request to upload in the KMC website.

1. D.G.(Tech. Services), Engg. Department, KMC.
2. Chief Engineer(E&M), Engg. Department, KMC.
3. Chief Engineer(CM), Engg. Department, KMC.
4. Dy. Director (Account), Engg. Department, KMC.
5. Office Copy.



KARACHI METROPOLITAN CORPORATION
OFFICE OF THE SUPDT. ENGINEER (CONTRACT MANAGEMENT)
ENGINEERING DEPARTMENT

Dated: - 22/6 /2012

No. SE(CM)/ED/KMC/548-A /2012

BID EVALUATION REPORT

1. Name of Procuring Agency: Karachi Metropolitan Corporation ✓
2. Tender Reference No: KMC/CM/ED/ 75/11-12 ✓
3. Tender Description/Name of Work/Item: Improvement & Rehabilitation of Electrical Wiring Work in 06 School (Building) Including One Model School of (Defunct) UC-8&9. ✓
5. Tender Published: SPPRA ID # 7003/2012 Daily Business Recorder dt: 03-03-2012 Daily Naway-e-Waqt & Ann dt:04-03-2012
Print & Electronic Media/SPPRA ID No. & News Paper Names with date
6. Total Bid Documents Sold: 04 No.
7. Total Bid Received: 04 Nos.
8. Technical Bid Opening date(if applicable): Not Applicable (Provide details in separate forms)
9. No. of Bid technically qualified (if applicable): Not Applicable
10. Bid(s) Rejected: No.
11. Financial Bid Opening Date: 28-03-2012 ✓

3

12. Bid Evaluation Report:

S.No.	Name of Firm or Bidder	Cost Offered by the Bidder (As Calculated)	Ranking in terms of cost	Comparison with Estimated cost	Reason for acceptance / rejection	REMARKS
1.	M/s. Shaheen Construction.	Rs.36,05,670/=	1 st Lowest	above the Estimated Cost	Qualified as per Eligibility Criteria	Recommended for award of work.
2.	M/s. K.B. International.	Rs.39,29,901/=	2 nd Lowest	above the Estimated Cost	Qualified as per Eligibility Criteria	Responsive
3.	M/s. Sumair Electric Store.	Rs.46,95,140/=	3 rd Lowest	above the estimated cost	Qualified as per Eligibility Criteria	Responsive
4.	M/s. M.S. Electric Services.	Rs.54,18,320/=	4 th Lowest	above the Estimated Cost	Qualified as per Eligibility Criteria	Responsive

Recommendations:- The offered amount of Rs.36,05,670/= by M/s. Shaheen Construction has been recommended by the Procurement Committee to award the work on the basis of their technical qualifying and lowest offered price bid. The unsuccessful bidders are already informed accordingly.

Dy. Director (Accounts)
Engineering Department, KMC
Member

Chief Engineer (Design) E&M
Engineering Department, KMC
Member

Director (Planning) F&P
Finance Department, KMC.
Member

Superintending Engineer (CM)
Engineering Department, KMC
Member / Secretary

Chief Engineer (CM)
Engineering Department, KMC
Chairman

Director (CB)SPPRA

With a request to upload on the Website of SPPRA (Authority).

Dy. Director (Web) Computer Section.

With a request to upload in the KMC website.

1. D.G. (Tech. Services), Engg. Department, KMC.
2. Chief Engineer (E&M), Engg. Department, KMC.
3. Chief Engineer (CM), Engg. Department, KMC.
4. Dy. Director (Account), Engg. Department, KMC.
5. Office Copy.



KARACHI METROPOLITAN CORPORATION
OFFICE OF THE SUPDT. ENGINEER(CONTRACT MANAGEMENT)
ENGINEERING DEPARTMENT

No. SE(CM)/ED/KMC/ 548/A /2012

Dated: 22/6 /2012

BID EVALUATION REPORT

1. Name of Procuring Agency: Karachi Metropolitan Corporation ✓
2. Tender Reference No: KMC/CM/ED/ 73 /11-12 ✓
3. Tender Description/Name of Work/Item: Improvement & Rehabilitation of Electrical Wiring Work in 06 School (Building) Including One Model School of (Defunct)UC-1,2&3 ✓
5. Tender Published: SPPRA ID # 7003/2012 Daily Business Recorder dt: 03-03-2012 Daily Naway-e-Waqt & Amn dt:04-03-2012
Print & Electronic Media(SPPRA ID No. & News Paper Names with date)
6. Total Bid Documents Sold: 03 No.
7. Total Bid Received: 03 Nos.
8. Technical Bid Opening date(if applicable): Not Applicable (Provide details in separate form)
9. No. of Bid technically qualified (if applicable): Not Applicable.
10. Bid(s) Rejected: No.
11. Financial Bid Opening Date: 28-03-2012 ✓
12. Bid Evaluation Report:

S.No.	Name of Firm or Bidder	Cost Offered by the Bidder (As Calculated)	Ranking in terms of cost	Comparison with Estimated cost	Reason for acceptance / rejection	REMARKS
1.	M/s. Shaheen Construction.	Rs.31,80,466/=	1 st Lowest	Below the Estimated Cost	Qualified as per Eligibility Criteria	Recommended for award of work.
2.	M/s. K.B. International.	Rs.39,85,163/=	2 nd Lowest	above the estimated cost	Qualified as per Eligibility Criteria	Responsive
3.	M/s. M.S. Electric Services.	Rs.48,88,515/=	3 rd Lowest	above the estimated cost	Qualified as per Eligibility Criteria	Responsive

Recommendations:- The offered amount of Rs.31,80,466/= by M/s. Shaheen Construction has been recommended by the Procurement Committee to award the work on the basis of their technical qualifying and lowest offered price bid. The unsuccessful bidders are already informed accordingly.

Dy. Director (Accounts)
 Engineering Department, KMC
 Member

Chief Engineer (Design) E&M
 Engineering Department, KMC
 Member

Director (Planning) F&P
 Finance Department, KMC.
 Member

Superintending Engineer (CM)
 Engineering Department, KMC
 Member / Secretary

Chief Engineer (CM)
 Engineering Department, KMC
 Chairman

Director (CBISPPRA)

With a request to upload on the Website of SPPRA(Authority).

Dy. Director (Web) Computer Section,

With a request to upload in the KMC website.

1. D.G.(Tech. Services), Engg. Department, KMC.
2. Chief Engineer(E&M), Engg. Department, KMC.
3. Chief Engineer(CM), Engg. Department, KMC.
4. Dy. Director (Account), Engg. Department, KMC.
5. Office Copy.

Clipping
2/3/12



KARACHI METROPOLITAN CORPORATION
OFFICE OF THE SUPERINTENDING ENGINEER (CM)
ENGINEERING DEPARTMENT

NO. S.E.A.C/M/ED/MK/CM/12

4th Floor, Room No. E-412, Civic Centre, Gulshan-e-Iqbal, Karachi
Phone: 021-9232426, Fax: 021-9232466

Dated: 01-03-2012

NOTICE INVITING TENDERS

Tenders in sealed covers are invited on offer rate basis for the following works from the reputable and experienced contractor having valid NTN and paid up original stubs of Professional Tax prescribed fee.

Sl.	NAME OF SCHEME	ESTIMATED COST OF THE PROJECT (IN MILLION) (RM)	RISK CREDIT IN STATE OF PAY ORDER / BANK GUARANTEE	TENDER COST (RM)	PEC CATEGORY	ELIGIBILITY
1	Improvement & Rehabilitation of Electrical Wiring Work in 06 School (Building) and One Work School at (Defunct) DC-1, T.C. 8, T.C. 9 Tender Reference #KMC/CM/ED/7501-12	Ru. 1,20,000	Ru. 60,000	Ru. 3,000	C-06 or above	1. Valid PEC in C-6 & above category & relevant field of specialization 2. NTN Certificate 3. Valid Professional Tax
2	Improvement & Rehabilitation of Electrical Wiring Work in 06 School (Building) and One Model School at (Defunct) DC-1, T.C. 8, T.C. 9 Tender Reference # KMC/CM/ED/7411-12	Ru. 1,223,000	Ru. 60,000	Ru. 3,000	C-06 or above	1. Valid PEC in C-6 & above category & relevant field of specialization 2. NTN Certificate 3. Valid Professional Tax
3	Improvement & Rehabilitation of Electrical Wiring Work in 06 School (Building) and One Model School at (Defunct) DC-1, T.C. 8, T.C. 9 Tender Reference # KMC/CM/ED/7501-12	Ru. 1,200,000	Ru. 72,000	Ru. 3,000	C-06 or above	1. Valid PEC in C-6 & above category & relevant field of specialization 2. NTN Certificate 3. Valid Professional Tax
4	Improvement & Rehabilitation of Electrical Wiring Work in 02 School (Building) (Defunct) T.C. 10 & 11 Tender Reference # KMC/CM/ED/7601-12	Ru. 1,265,000	Ru. 75,000	Ru. 3,000	C-06 or above	1. Valid PEC in C-6 & above category & relevant field of specialization 2. NTN Certificate 3. Valid Professional Tax

TERMS & CONDITIONS

1. Tender schedule shall be as follows:

SCHEDULE	DATE & TIME	VENUE
1. Receiving of Application & Issuance of Tender	From 05-03-2012 to 19-03-2012 During Office Hours	Office of AAO / Incharge Tender Section, Works & Services situated in the Right Wing of 4th Floor Civic Centre Gulshan-e-Iqbal
2. Dropping of Tender	20-03-2012 at 2:00 pm	Committee Room of D.G. (TS) 4th Floor, Civic Centre, Gulshan-e-Iqbal
3. Opening of Tender	20-03-2012 at 2:30 pm	Committee Room of D.G. (TS) 4th Floor, Civic Centre, Gulshan-e-Iqbal

- The tender documents will be issued to the contractor on submission of written request on letter head and on payment of non-refundable cost of tender price through pay order from any schedule Bank in favor of KMC on the date as given above. Bid Security in shape of pay order / bank guarantee from any schedule Bank in favor of KMC as mentioned above should be enclosed with the bid otherwise the tender will be rejected. No tender will be sold on the tender opening date.
- In case of any reason, if the tenders are not responded on the above date the next date of submission and opening will be 28-03-2012 and the tender documents will be available for sale up to 27-03-2012.
- In case the date of opening or last date of sale is declared as a public holiday by the Government, or non-working day due to any reason, the next working day shall be deemed to be the date for last date of sale and submission and opening of tenders at the same time as mentioned above.
- The total bid amount as well as the rates of items must be filled both in figures and words and in case any correction made by the contractor himself after each correction must be initiated by the Contractor, otherwise the tenders are liable to be summarily rejected.
- Substantially Responsive Bid:**
Those bids which comply with minimum qualification criteria as provided in the Bidding Documents are only eligible for further detail evaluation. The bids which will not comply all the minimum qualification criteria will be liable to be summarily rejected.
- The bidder is required to submit the above information, the signed evidence against evaluation criteria along with their bids. However, joint venture between two or more firms is allowed subject to compliance of SPPRA / PEC's rules and regulations.
- If any bid documents are found then the tender is liable to be reinstated/cancelled with out any compensation and with penalty as per rules.
- Conversing in connection with tenders is strictly prohibited and tenders submitted by the contractors who are reported conversing will be liable for rejection.
- If a bidder submit a seriously unbalanced bid then if deemed necessary the procuring agency may require him to deposit extra performance security as a level sufficient to protect the procuring agency against financial losses, failing which the submitted bid amount will be forfeited by the procuring agency.
- Bid Security of the unsuccessful bidder shall be released once the contract has been finalized with the successful bidder or the validity period has expired.
- The procuring agency may reject all or any bid subject to the relevant provisions of SPPRA Rules 2010.
- The condition of contract will be available on KMC Website i.e. www.karachicity.gov.pk.

B/R 03/03/12
Superintending Engineer (CM)
Engineering Department, KMC

KMC/ADV/ES/06/2012
INF-KBY: No. 88/12