

**SINDH PUBLIC PROCUREMENT REGULATORY AUTHORITY  
CONTRACT EVALUATION FORM  
TO BE FILLED BY ALL PROCURING AGENCIES FOR PUBLIC CONTRACTS OF WORKS,  
SERVICES & GOODS**

1 NAME OF THE ORGANIZATION/DEPTT.	KARACHI WATER & SEWERAGE BOARD
2 PROVINCIAL/LOCAL GOVT/OTHER	
3 TITLE OF CONTRACT	<b>Rectification of contamination and replacement of chock &amp; rusted pipe line in Block-L, NWJ for IMP: of Water Supply in North Nazimabad.</b>
4 TENDER NUMBER	SPPRA Serial No <b>18993</b> I D /2014
5 BRIEF DESCRIPTION OF CONTRACT	Improvement of Water Supply in North Nazimabad Town.
6 FORUM THAT APPROVED THE SCHEME	Managing Director KW&SB
7 TENDER ESTIMATED VALUE	Below 1 Million
8 ENGINEER'S ESTIMATE (Attach list of buyers)	<b>Rs. 08,30,766 /-</b>
9 ESTIMATED COMPLETION PERIOD (AS PER CONTRACT)	<b>25 (Days)</b>
10 TENDER OPENED ON (DATE & TIME)	<b>05-03-2014</b> at 2:30 P.M
11 NUMBER OF TENDER DOCUMENT SOLD (Attach list of buyers).	<b>03 (Three)</b>
12 NUMBER OF BIDS RECEIVED	<b>03 (Three)</b>
13 NUMBER OF BIDDERS PRESENT AT THE TIME OF OPENING OF BIDS.	<b>03 (Three)</b>
14 BID EVALUATION REPORT (enclose copy).	Copy Attached
15 NAME AND ADDRESS OF THE SUCCESSFUL BIDDER.	<b>M/S. Sahara Tairat, A-204, Block-13, Gulistan-e-Jehar, Karachi.</b>
16 CONTRACT AWARD PRICE	Rs <b>08,30,766 /-</b>

17 RANKING OF SUCCESSFUL BIDDER IN  
EVALUATION REPORT (i.e. 1st, 2nd, ... Evaluation Bid).

M/S. Sahara Tamirat.

18 METHOD OF PROCUREMENT USED (Tick one)

- a) Single Stage One Envelope Procedure.  Domestic / local
- b) Single Stage Two Envelope Procedure.
- c) Two Stage Bidding Procedures.
- d) Two Stage Two Envelope Bidding Procedure

PLEASE SPECIFY IF ANY OTHER METHOD OF PROCUREMENT WAS ADOPTED i.e  
EMERGENCY, DIRECT CONTRACTING/NEGOTIATION ETC. WITH BRIEF REASONS:

19 APPROVING AUTHORITY FOR AWARD  
OF CONTRACT

M D KW&SB

20 WHETHER THE PROCUREMENT WAS INCLUDED IN ANNUAL PROCUREMENT PLAN?

Yes  No

21 ADVERTISEMENT:

i) SPPRA Website  
(If yes, give date and SPPRA's tender number)

Yes  Serial No \_\_\_\_\_ I.D. \_\_\_\_\_ /2014  
No

ii) News Papers  
yes, give names of newspapers and dates)

(If Yes   
No

22 NATURE OF CONTRACT

Local  Int.

23 WHETHER QUALIFICATION CRITERIA  
WAS INCLUDED IN BIDDING/TENDER DOCUMENT?  
(If yes, enclose a copy)

Yes  No

24 WHETHER EVALUATION CRITERIA BID  
WAS INCLUDED IN BIDDING/TENDER DOCUMENTS?  
(If yes, enclose a copy).

Yes  No

25 WHETHER APPROVAL OF COMPETENT AUTHORITY WAS OBTAINED FOR USING A METHOD OTHER THAN OPEN COMPETITIVE BIDDING?

Yes		No	✓
-----	--	----	---

26 WAS BID SECURITY OBTAINED FROM ALL THE BIDDERS?

Yes	✓	No	
-----	---	----	--

27 WHETHER THE SUCCESSFUL BID WAS LOWEST EVALUATED BID/BEST EVALUATED BID (in case of Consultancies).

Yes	✓	No	
-----	---	----	--

28 WHETHER THE SUCCESSFUL BIDDER WAS TECHNICALLY COMPLIANT

Yes	✓	No	
-----	---	----	--

29 WHETHER NAMES OF THE BIDDERS AND THEIR QUOTED PRICE WERE READ OUT AT THE TIME OF OPENING OF BIDS?

Yes	✓	No	
-----	---	----	--

30 WHETHER COPY OF EVALUATION REPORT GIVEN TO ALL BIDDERS?  
(Attach copy of the bid evaluation report).

Yes	✓	No	
-----	---	----	--

31 ANY COMPLAINTS RECEIVED  
(If yes, result thereof)

Yes	
No	✓

32 ANY DEVIATION FROM SPECIFICATION GIVEN IN THE TENDER NOTICE / DOCUMENT.  
(If yes, give details).

Yes	
No	✓

33 WAS THE EXTENSION MADE IN RESPONSE TIME?  
(If yes, give detailed reasons).

Yes	
No	✓

34 DEVIATION FROM QUALIFICATION CRITERIA  
(If yes, give detailed reasons).

Yes	
No	✓

35 WAS IT ASSURED BY THE PROCURING AGENCY THAT THE SELECTED FIRM IS NOT BLACK LISTED?

Yes	✓	No	
-----	---	----	--

36 WAS A VISIT MADE BY ANY OFFICER/OFFICIAL OF THE PROCURING AGENCY TO THE SUPPLIER PREMISES IN CONNECTION WITH THE PROCUREMENT? IF SO. DETAILED TO BE ASCERTAINED REGARDING FINANCING OF VISIT, OF ABROAD.  
(If yes, enclose a copy)

Yes		No	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

37 WERE PROPER SAFEGUARDS PROVIDED ON MOBILIZATION ADVANCE PAYMENT IN THE CONTRACT (BANK GUARANTEE ETC.)?

Yes		No	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------


38 SPECIAL CONDITIONS. IF ANY.  
(If yes, give Brief Description).

Yes	
No	<input checked="" type="checkbox"/>

Signature & Official Stamp of

Authorized Officer

FOR OFFICE USE ONLY

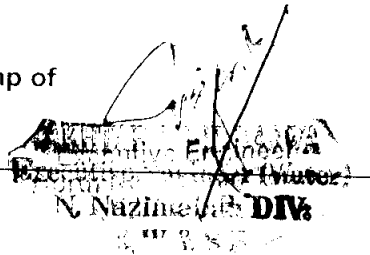  
N. Nazim **DIV**

SPPRA, Block-No. 8, Sindh Secretariat No. 4-A, Court Road, Karachi.  
Tele: 021-9205356, 021-9205369 & Fax 021-9206291



# KARACHI WATER & SEWERAGE BOARD

OFFICE OF THE CHIEF ENGINEER (IP&D)

## BID EVALUATION REPORT

44

1	Name of Procuring Agency	KARACHI WATER & SEWERAGE BOARD
2	Tender Reference No	SPPRA Serial No.18993 I.D No. /2013
3	Tender Description/Name of Work/Item	RECTIFICATION OF CONTAMINATION & REPLACEMENT OF CHOCK & RUSTED PIPE LINE IN BLOCK L,N & J FOR IMPROVEMENT OF WATER SUPPLY IN NORTH NAZIMABAD
4	Method of Procurement	Single Stage (One Envelop)
5	Tender Published	Through Web Site
6	Total Bid Documents Sold	03 Nos
7	Total Bid Received	03 Nos
8	Technical Bid Opening Date (if applicable)	N/A
9	No. of Bid Technically Qualified (if applicable)	N/A
10	Bid (s) rejected	One
11	Financial Bid Opening Date	5/3/2014
12	Bid Evaluation Report	

S#	NAME OF FIRM OR BIDDER	COST OFFERED BY THE BIDDERS	RANKING IN TERMS OF COST	COMPARISON WITH ESTIMATED COST	REASON FOR ACCEPTANCE/ REJECTION	REMARKS
1	M/s. Sahara Tamirat	Rs. 830,766/-	1st Lowest	At Par	Substantially Responsive	P.O # GLP 0C6387 Dt:04-03-2014 Rs. 17,000/- JS Bank Shop No 5&6 Plot SB-33 Gulshan-e-Iqbal Scheme No.24 Br
2	M/s. RFR Construction.	Rs. 843,147/-	2nd Lowest	@ 1.4902% Above	Substantially Responsive	P.O # 764673 Dt:04-03-2014 Rs. 17,000/- Burj Bank Chundrigar Road Karachi Br
3	M/s. Farhan Associates	Not Quoted			Un Responsive	

The all concerned bidder are being informed accordingly.

The E.E Concerned for compliance of rule 45 of SPPRA 2010 M/s. Sahara Tamirat. declared as the lowest responsive bidder by the Committee and recommended for Sanction from Competent Authority.

(Abdul Jabbar Shaikh)  
Accounts Officer (Central)  
Member/Secretary

(Saif-ul-Haque)  
Additional Director Internal  
Audit - KMC Member

(Maqsood Ahmed Shaikh)  
Superintending Engineer (KMC)  
Member

(Syed Fahim Akhtar Zaidi)  
Chief Engineer (Central)  
Member

(Abdul Rahim Khattai)  
Chief Engineer (IPD),  
(Convener)





## COMPARATIVE STATEMENT

**NAME OF WORK: RECTIFICATION OF CONTAMINATION & REPLACEMENT OF CHOCK & RUSTED PIPE LINE IN BLOCK L,N & J FOR IMPROVEMENT OF WATER SUPPLY IN NORTH NAZIMABAD**

S.No	Description of Work	Engineer's Estimate				M/s. Sahara Tamirat		M/s. RFR Construction	
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount
1	Dismantling and removing road metalling Excavation for pipe lines in trenches and pits in all kind of soil of murum i/c trimming and dressing side to true alignment and shape levelling of beds of trenches to correct level and grade, cutting joint holes and disposal of surplus earth with in a one chain as directed by the engineer incharge providing fence guards, lights, flags and temporary crossings for non-vehicular traffic where ever required lift upto 5 ft (1.52m) and lead upto one chain (30.5m).	1650 Cft	605.00	% Cft	9,982.50	605.00	9,982.50	614.00	10,131.00
2									
3	Providing Laying UPVC Pipes of Class "C" fixing in trenches i/c cutting fitting and jointing with solvent cement i/c testing with water to a head 91.5 meter or 300 ft	8250 Cft	4,650.00	% Cft	38,362.50	4,650.00	38,362.50	4,719.75	38,937.94
	80 MM Dia	300 Rft	107.00	P/Rft	32,100.00	107.00	32,100.00	108.50	32,550.00
	100 MM Dia	200 Rft	174.00	P/Rft	34,800.00	174.00	34,800.00	176.50	35,300.00
	150 MM Dia	40 Rft	373.00	P/Rft	14,920.00	373.00	14,920.00	378.50	15,140.00
	200 MM Dia	40 Rft	574.00	P/Rft	22,960.00	574.00	22,960.00	582.50	23,300.00
	250 MM Dia	40 Rft	1,045.00	P/Rft	41,800.00	1,045.00	41,800.00	1,060.50	42,420.00
	300 MM Dia	40 Rft	1,473.00	P/Rft	58,920.00	1,473.00	58,920.00	1,495.00	59,800.00
4	C.I sluice valve heavy pattern test pressure								
	21.0Kg/sq or 300 lb/sq inch (imported)								
	3" Dia	3 Nos	4,290.00	Each	12,870.00	4,290.00	12,870.00	4,354.00	13,062.00
	6" Dia	3 Nos	9,360.00	Each	28,080.00	9,360.00	28,080.00	9,500.00	28,500.00
	10" Dia	3 Nos	27,690.00	Each	83,070.00	27,690.00	83,070.00	28,105.00	84,315.00
5	Fixing of slice valve with 2 cost iron picese one flanged and other with socket including the cost of nuts bolts and rubber packing, labour etc.Complete.								
	3" Dia	3 Nos	1,254.00	Each	3,762.00	1,254.00	3,762.00	1,273.00	3,819.00


**NAME OF WORK: RECTIFICATION OF CONTAMINATION & REPLACEMENT OF CHOCK & RUSTED PIPE LINE IN BLOCK L, N & J FOR IMPROVEMENT OF WATER SUPPLY IN NORTH NAZIMABAD**


S.No	Description of Work	Engineer's Estimate			M/s. Sahara Tamirat		M/s. RFR Construction		
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount
	6" Dia	3 Nos	1,886.00	Each	5,658.00	1,886.00	5,658.00	1,914.00	5,742.00
	10" Dia	3 Nos	3,319.00	Each	9,957.00	3,319.00	9,957.00	3,369.00	10,107.00
6	Construction of C.C block masonry chamber of 6x6x6 (inside dimantion) with 24"x24" C.i cover & frame (weight-65 Kg) fixed on RCC 1:2:4 slab 6" thick with steel 1/2" Dia main bars 06" C/C & 1/4" dia @ 8" C.C distribution bars 6" thick C.C 1:3:6 block masonry wall set in 1:6 C.M 6" thick 1:4:8 in foundation 2" thick C.C 1:2:4 flooring 1/2" thick C.Plaster 1:6 to all in side wall surface top & bottom slab outer side wall surface 1'-0" deep up to roof slab MS foot rest 5/8" dia bars every 2'-0" deep including query de watering excavation refiling and disposal surplus of earth.	4 Nos	28,357.00	Each	113,428.00	28,357.00	113,428.00	28,782.00	115,128.00
	4'x4'x4'	5 Nos	55,923.00	Each	279,615.00	55,923.00	279,615.00	56,762.00	283,810.00
7	Full hire charges of pumping set per day inclusive of the wages of driver and assistant, fuel and electric energy plate form required for placing the pump etc, at lower depth with suction and delivery pipe for pumping out water pound at various depth from trenches including the cost of erection and dismantling after completion of job of 10 HP pumping out water from 10 ft deep trenches.	12.00 Day	1,500.00	P/Day	18,000.00	1,500.00	18,000.00	1,522.50	18,270.00








**NAME OF WORK: RECTIFICATION OF CONTAMINATION & REPLACEMENT OF CHOCK & RUSTED PIPE LINE IN BLOCK L, N & J FOR IMPROVEMENT OF WATER SUPPLY IN NORTH NAZIMABAD**


S.No	Description of Work	Engineer's Estimate			M/s. Sahara Tamirat		M/s. RFR Construction		
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount
8	Refilling the excavated stuff in trenches 6" layer i/c watering ramming to full compaction etc complete.	8145.17 Cft	2,760.00	% 0 Cft	22,480.67	2,760.00	22,480.67	2,801.00	22,814.62
	<b>Total Quoted / Corrected Cost</b>				<b>830,765.67</b>		<b>830,765.67</b>		<b>843,146.56</b>
	<b>Say</b>				<b>830,766</b>		<b>830,766</b>		<b>843,147</b>

  
**(Abdul Jabbar Shaikh)**  
 Accounts Officer (Central)  
 Member/Secretary

  
**(Saif-ul-Haque)**  
 Additional Director Internal  
 Audit - KMC Member

  
**(Maqsood Ahmed Shaikh)**  
 Superintending Engineer (KMC)  
 Member

  
**(Syed Fahim Akhtar Zaidi)**  
 Chief Engineer (Central)  
 Member

  
**(Abdul Rahim Khattak)**  
 Chief Engineer (IPP), (Convener)



OFFICE OF THE EXECUTIVE ENGINEER (W/D)  
ST-1, BLOCK 'C' KDA CHOWRANGI, NORTH NAZIMABAD

NO : KW&SB/EE/NN(W)/ 28 /2014

Dated: 28/05/2014.

M/s. Sahara Tamirat,


Add:- A-204, Block-13, Gulistan-e-  
Johar, Karachi.

" LETTER OF COMMENCEMENT / WORK ORDER "

Subject: RECTIFICATION OF CONTAMINATION & REPLACEMENT OF  
CHOCK AND RUSTED PIPE LINE IN BLOCK- L.M, & J FOR  
IMPROVEMENT OF WATER SUPPLY IN NORTH NAZIMABAD.


This is to inform you that your tender for the above work has been approved being 1<sup>st</sup> lowest and on amounting to Rs. 08,30,766 /= ( Eight - Lac's thirty thousand seven hundred & sixty six only ) on item rate basis, sanctioned /LOS letter has already conveyed vide letter No. KW&SB/CE/Central/2014/75 , Dated 28-05-2014 , expenditure is chargeable to B.G. No. 1-013(13) for the current financial year 2013-2014.

You are hereby directed to start the work immediately and complete the same within 25 days commencing from the date of issue of this work order. In case the work is delayed or left unfinished within the stipulated time period the penalty Rs. 1000 /= per day shall be imposed. As per condition of contractor work rules.

  
EXECUTIVE ENGINEER  
N.N. TOWN (W/D)  
KW&SB

Copy To:

- 1- CE (Central), KW&SB
- 2- S.E (W/S).North Nazimabad, KW&SB.
- 3- A.D.L.F.A, KW&SB.
- 4- A.O (Central), KW&SB
- 5- Office Copy.

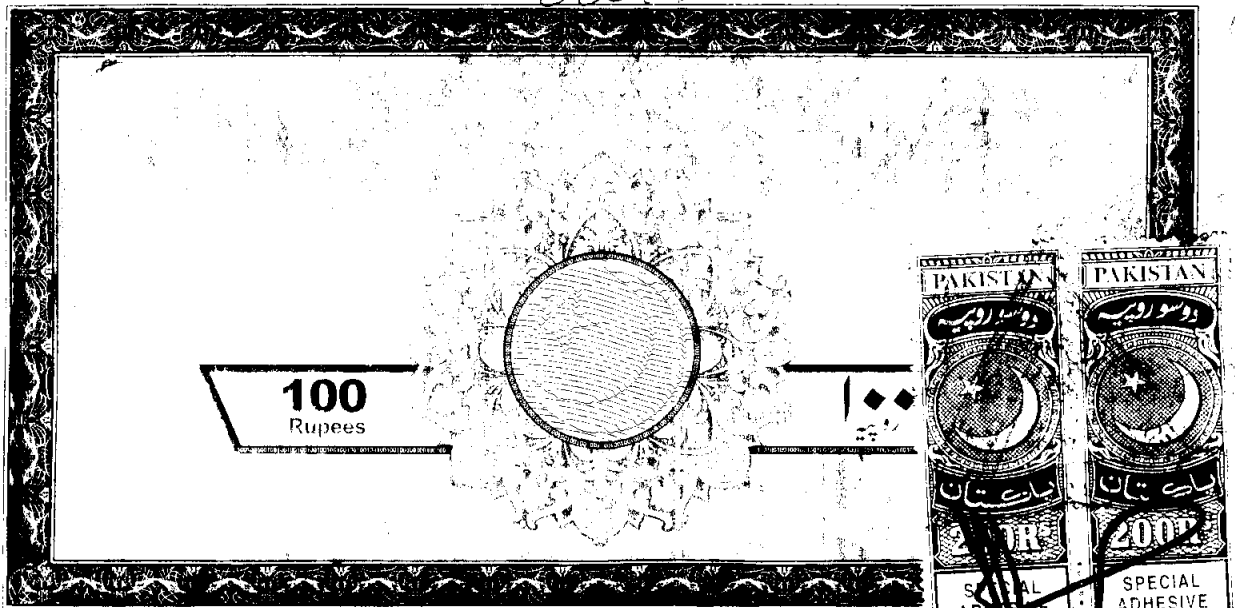

11777

11777

## CONTRACT AGREEMENT

**Sanction Amount Rs.830,766/-**

THIS CONTRACT AGREEMENT (hereinafter called the "Agreement") made on the \_\_\_ day of \_\_\_ 2014 between The Karachi Water & Sewerage Board represented by it's **The Chief Engineer (Central), KW&SB** (hereinafter called the "Employer") of the one part and **M/s. Sahara Tamirat.** (hereinafter called the "Contractor") of the other part.

WHEREAS the Employer is desirous that certain Works, viz **RECTIFICATION OF CONTAMINATION & REPLACEMENT OF CHOCK & RUSTED PIPE LINE IN BLOCK L,N & J FOR IMPROVEMENT OF WATER SUPPLY IN NORTH NAZIMABAD.** Should be executed by the Contractor and has accepted a Bid by the Contractor for the execution and completion of such Works and the remedying of any defects therein.


NOW This Agreement witness as follows:-

1. In this Agreement words and expressions shall have the same meanings as are respectively assigned to them in the Conditions of Contract hereinafter referred to.
2. The following documents after incorporating addenda, if any except those parts relating to Instructions to Bidders, shall be deemed to form and be read and construed as part of this Agreement, viz:
  - a. The Letter of Acceptance;
  - b. The completed Form of Bid along with Schedules to Bid;
  - c. Conditions of Contract & Contract Data;
  - d. The priced Schedule of Prices;
  - e. The Specifications; and
  - f. The Drawings.

1022/



164  
900

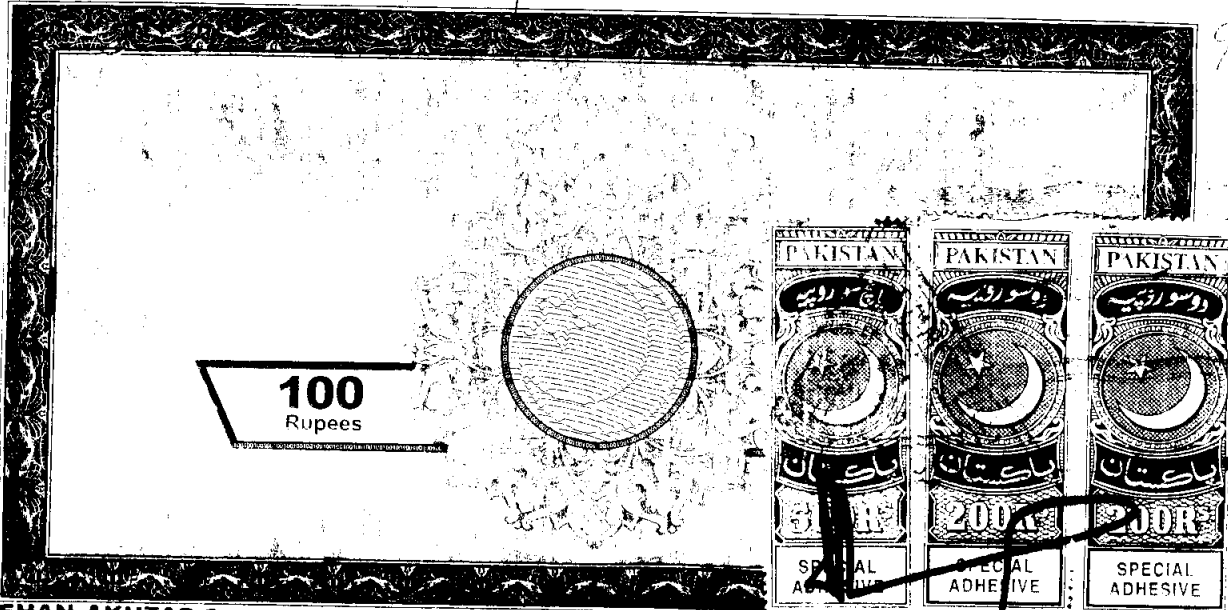

**REHAN AKHTAR Stamp Vendor**  
Licence No 129 - No 16 Block  
Sahara Plaza - G-10/1 - Islamabad - Pakistan  
P.O. NO

101305

3. In consideration of the payments to be made by the Employer to the Contractor as  
through with address Zahid Mehmood  
purpose hereinafter mentioned, the Contractor hereby covenants with the Employer to execute and  
value Rs 1000000  
stamp vendor's slip (RE)  
complete the Works and remedy defects therein in conformity and in all respects within the  
provisions of the Contract.

4. The Employer hereby covenants to pay the Contractor, in consideration of the execution and  
completion of the Works as per provisions of the Contract, the Contract Price or such other  
sum as may become payable under the provisions of the Contract at the times and in the  
manner prescribed by the Contract.

IN WITNESS WHEREOF the parties hereto have caused this Contract Agreement to be  
executed on the day, month and year first before written in accordance with their respective  
laws.

Signature of the Contractor

Signature of the Employer

M/s Sahara Tamiraat  
**SAHARA TAMIRAAT**  
Proprietor/General Contractor & General Order Suppliers  
Syed Arshad Iqbal  
Chief Executive

[Signature]  
CHIEF ENGINEER, CENTRAL  
KW&SB

Witness:

Witness:

1. [Signature]  
1. Mr. Mahad Contractor  
R-55, Block-6 - Batehawa  
G-10/1 Karachi

[Signature]  
SUPERINTENDING ENGINEER  
NORTH NAZIMABAD  
KW&SB

2. [Signature]  
2. Muhammad Hussain  
R-260, Sector-11, G-10/1  
G-10/1 Town, N. Nazimabad

[Signature]  
EXECUTIVE ENGINEER WATER  
NORTH NAZIMABAD  
KW&SB


B215448

1055/



164

900

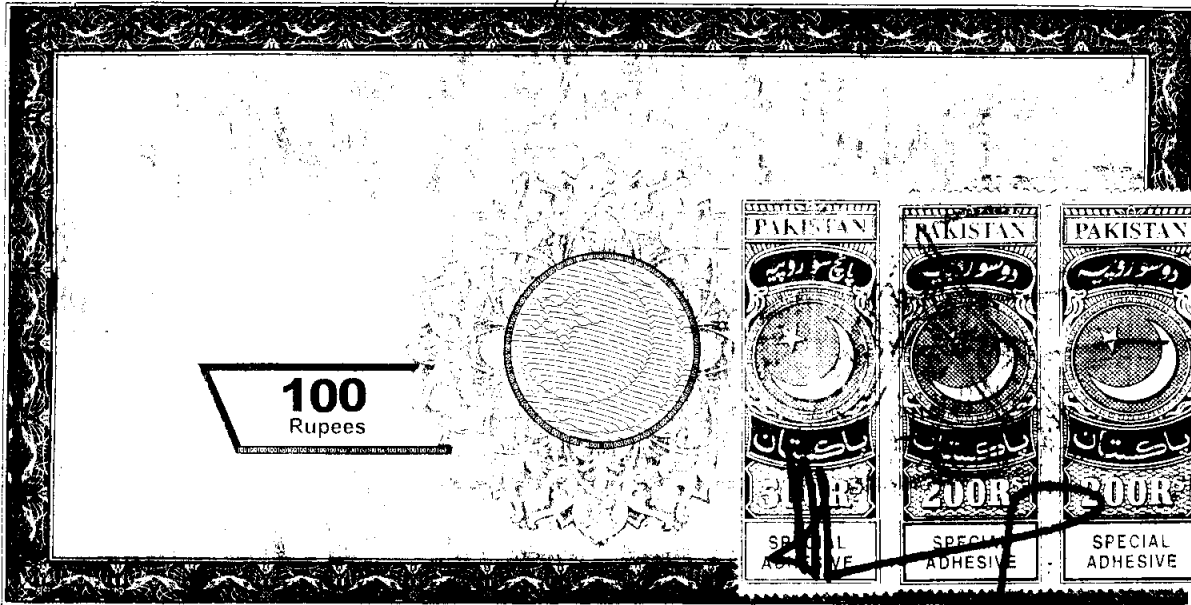

REHAN AKHTAR Stamp Vendor  
Licence No 129  
Khan Plaza  
S No

101818

DEFINITION  
City Code  
24 MAY 2009

ISSUED TO WITH ADDRESS  
THROUGH WITH ADDRESS  
PURPOSE  
VALUE RS  
STAMP VENDOR S No  
Zahid Mehmo  
Advocate

**RECTIFICATION OF CONTAMINATION & REPLACEMENT OF CHOCK & RUSTED PIPE LINE IN BLOCK L,N & J FOR IMPROVEMENT OF WATER SUPPLY IN NORTH NAZIMABAD**

BY  
M/s. Sahara Tamirat  
Rs.830,766/-

**OFFICE OF THE EXECUTIVE ENGINEER (W), NORTH NAZIMABAD TOWN,  
ST-1, BLOCK 'C' KDA CHOWRANGI, NORTH NAZIMABAD**

NAME OF WORK :- Rectification of Continuation and Replacement of Chowked and rusted pipe line in Block 'L', 'N' and 'J' for improvement of water supply in North Nazimabad.

Estimate. On Item Rate Basis

Time Limit 25 Days


Penalty Rs. 1000/- per day.

Tender Cost Rs. 1000/-


Date of Receiving 05-03-2014 at 2.00 P.M. and opened at 05-03-2014 2.30 P.M.

In the office of Chief Engineer (IPD) Block 'E', 9th Mile Sharah e Faisal, Karachi.

S.No	Description of Work	Quantity		Rate		Per Unit Item	Amount in Rupees
				Rs. In Figure	Rs. In Words		
1	Dismantling and removing road metalling.	1650	Cft	<u>605/-</u>	Six Hundreds & Five	% Cft	9982/50
2	Excavation for pipe line in trench and pits in all kind of soil of murum including trimming and dressing side to true alignment and shape leveling of beds of trenches to correct level and grade, cutting joint hole and disposal of surplus by engineer in-charge, providing fence, guards, lights, flag and temporary crossing for non-vehicular traffic where required lift up to 5 ft (1.52m) and lead up to one chain (30.5m).	8250	Cft	4650/-	Four thousands Six hundreds & Fifty	% Cft	38362/50
3	Providing laying UPVC pressure pipe of class -C fixing in trench i/c cutting, fitting and joint with solvent cement i/c testing with water cement to a head of 91.5 meter or 300 feet.						
	80 mm Ø	300	Rft	107/-	one hundred & seven	P/Rft	32100/-
	100 mm Ø	200	Rft	174/-	one hundred & seventy four	P/Rft	34800/-
	150 mm Ø	40	Rft	393/-	Three hundred & ninety three	P/Rft	14920/-
	200 mm Ø	40	Rft	574/-	Five hundred & seventy four	P/Rft	22760/-
	250 mm Ø	40	Rft	1045/-	one thousand & forty five	P/Rft	41800/-
	300 mm Ø	40	Rft	1473/-	one thousand & forty seven	P/Rft	58920/-



4	C.I sluice valve heavy pattern (Test pressure 21.0 Kg/sq. or 300 16/sq.inch) (Imported) 3" Ø	3 Nos	4290/-	Four thousands Two hundred & Ninety	Each	12870/-
	6" Ø	3 Nos	9360/-	Nine thousands Three hundred & sixty	Each	28080/-
	10" Ø	3 Nos	27690/-	Twenty seven thousand six hundred ninety	Each	83070/-
5	Fixing of sluice valve with 2 c.1 tail pieces, one end flanged and other with socket i/c the cost of nuts, bolts and rubber packing, labour etc complete. 3" Ø	3 Nos	1254/-	one thousand Two hundred & fifty four	Each	3762/-
	6" Ø	3 Nos	1886/-	one thousand Eight hundred & eighty six	Each	5658/-
	10" Ø	3 Nos	3319	Three thousand Three hundred Nineteen	Each	9957/-
6	Construction of C.C Block masonry chambers of size 6' x 6' x 6' (inside dimension) with 24" x 24" C.I cover frame weight 65 kgs fix 4" R.C.C 1:2:4 slab with steel ½" dia tor bar @ 6" C.C ¼" dia @ 8" C.C distribution bar, 6" thick C.C 1:3:6 block masonry wall set 1:6 C.M, 6" C.C 1:4:8 in foundation, 2" thick C.C 1:2:4 flooring, 1/2" thick cement plaster 1:2:6 ratio inside wall surface, 1 foot deep up to roof slab, M.S foot tress 5/8" dia bar at every 2 feet deep including query de watering, excavation, refilling and disposal surplus of earth. 4'x4'x4'	4 Nos	28357/-	Twenty eight thousand three hundred fifty Seven	Each	113428/-
	6'x6'x6'	5 Nos	55923/-	Fifty five thousand nine hundred & twenty three	Each	279615/-
7	Full hire charges of pumping set including wages of driver and assistant, fuel and electric energy platform for placing pump, delivery pipe for pumping out water from various depth i/c cost of dismantling after complete of the job, 10 H.P from 10' deep.	12 Days	1500/-	Fifteen hundred	Per Day	18000/-



8	Refilling the excavated stuff in trench 6" thick layer i/c watering, ramming to full compaction etc complete.	8145.17 Cft	2760	Two 1/1 inch 5/8 Seven hundred Sixty	% Cft	22480/66
TOTAL Rs.					830766/-	

I/We hereby quoted Rs. 830766/- (in words)

Eight Lacs Thirty Thousands Seven hundred & Sixty Six only


NOTE: All existing SPPRA Rule will be abide.

Contractor Signature

Address: A-204 Block 13 Pehrishan-e-Jashan, Kowachi

Cell No: 0322-2009750

Seal: \_\_\_\_\_



*[Signature]*  
**EXECUTIVE ENGINEER**  
**NORTH NAZIMABAD TOWN (W/D), KW&SB**

To be Filled in Sealed Cover & Opened By Procurement Committee-I

P.O. of the Bidding amount: Rs. 830,766 P.O. No. 618/2008 Date: 04/3/11

No. \_\_\_\_\_ P.O. No. \_\_\_\_\_ Date: \_\_\_\_\_

Rs. \_\_\_\_\_ P.O. No. \_\_\_\_\_ Date: \_\_\_\_\_

Bank Name: Bank of Punjab Branch: Shahdada Account No: 24

Bill/Order No: 830,766 (Amount in Words: Eight Lacs Thirty Thousand Seven Hundred Sixty Six only)

No. of Bills: \_\_\_\_\_ (Total: 830,766)


*[Signature]*  
 A.O. P. & S. (P&D)  
 Member

*[Signature]*  
 SE (TO P&D)  
 Member

*[Signature]*  
 A.O. P. & S. (P&D)  
 Member

*[Signature]*  
 Chief Engineer  
 (General) KW&SB  
 Member

*[Signature]*  
 Chief Engineer  
 (P&D), KW&SB





# KARACHI WATER & SEWERAGE BOARD

OFFICE OF THE CHIEF ENGINEER (IP&D)


## BID EVALUATION REPORT

1	Name of Procuring Agency	KARACHI WATER & SEWERAGE BOARD
2	Tender Reference No	SPPRA Serial No.18993 I.D No. /2014
3	Tender Description/Name of Work/Item	RECTIFICATION OF CONTAMINATION & REPLACEMENT OF CHOCK & RUSTED PIPE LINE IN BLOCK L,N & J FOR IMPROVEMENT OF WATER SUPPLY IN NORTH NAZIMABAD
4	Method of Procurement	Single Stage (One Envelop)
5	Tender Published	Through Web Site
6	Total Bid Documents Sold	03 Nos
7	Total Bid Received	03 Nos
8	Technical Bid Opening Date ( if applicable)	N/A .
9	No. of Bid Technically Qualified ( if applicable)	N/A .
10	Bid (s) rejected	One
11	Financial Bid Opening Date	5/3/2014
12	Bid Evaluation Report	

S #	NAME OF FIRM OR BIDDER	COST OFFERED BY THE BIDDERS	RANKING IN TERMS OF COST	COMPARISON WITH ESTIMATED COST	REASON FOR ACCEPTANCE/ REJECTION	REMARKS
1	M/s. Sahara Tamirat	Rs. 830,766/-	1st Lowest	At Par	Substantially Responsive	P.O # GLP 006387 Dt:04-03-2014 Rs.17,000/- JS Bank Shop No 5&6 Plot SB-33 Gulshan-e-Iqbal Scheme No.24 Br
2	M/s. RFR Construction.	Rs. 843,147/-	2nd Lowest	@ 1.4902% Above	Substantially Responsive	P.O # 764673 Dt:04-03-2014 Rs.17,000/- Burj Bank Chundrigar Road Karachi Br
3	M/s. Farhan Associates	Not Quoted			Un Responsive	

The all concerned bidder are being informed accordingly.


The E.E Concerned for compliance of rule 45 of SPPRA 2010 M/s. Sahara Tamirat. declared as the lowest responsive bidder by the Committee and recommended for Sanction from Competent Authority.

  
(Abdul Jabbar Shaikh)  
Accounts Officer (Central)  
Member/Secretary

  
(Saif-ul-Haque)  
Additional Director Internal  
Audit - KMC Member

  
(Maqsood Ahmed Shaikh)  
Superintending Engineer (KMC)  
Member

  
(Syed Fahim Akhtar Zaidi)  
Chief Engineer (Central)  
Member

  
(Abdul Rahim Khattai)  
Chief Engineer (IPD),  
(Convener)



**COMPARATIVE STATEMENT**




**NAME OF WORK: RECTIFICATION OF CONTAMINATION & REPLACEMENT OF CHOCK & RUSTED PIPE LINE IN BLOCK L,N & J FOR IMPROVEMENT OF WATER SUPPLY IN NORTH NAZIMABAD**

S.No	Description of Work	Engineer's Estimate			M/s. Sahara Tamirat		M/s. RFR Construction		
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount
1	Dismantling and removing road metalling Excavation for pipe lines in trenches and pits in all kind of soil of murum i/c trimming and dressing side to true alignment and shape levelling of beds of trenches to correct level and grade, cutting joint holes and disposal of surplus earth with in a one chain as directed by the engineer incharge providing fence guards, lights, flags and temporary crossings for non-vehicular traffic where ever required lift upto 5 ft (1.52m) and lead upto one chain (30.5m).	1650 Cft	605.00	% Cft	9,982.50	605.00	9,982.50	614.00	10,131.00
2		8250 Cft	4,650.00	%0 Cft	38,362.50	4,650.00	38,362.50	4,719.75	38,937.94
3	Providing Laying UPVC Pipes of Class "C" fixing in trenches i/c cutting fitting and jointing with solvent cement i/c testing with water to a head 91.5 meter or 300 ft	300 Rft	107.00	P/Rft	32,100.00	107.00	32,100.00	108.50	32,550.00
	80 MM Dia	200 Rft	174.00	P/Rft	34,800.00	174.00	34,800.00	176.50	35,300.00
	100 MM Dia	40 Rft	373.00	P/Rft	14,920.00	373.00	14,920.00	378.50	15,140.00
	150 MM Dia	40 Rft	574.00	P/Rft	22,960.00	574.00	22,960.00	582.50	23,300.00
	200 MM Dia	40 Rft	1,045.00	P/Rft	41,800.00	1,045.00	41,800.00	1,060.50	42,420.00
	250 MM Dia	40 Rft	1,473.00	P/Rft	58,920.00	1,473.00	58,920.00	1,495.00	59,800.00
	300 MM Dia								
4	C.I sluice valve heavy pattern test pressure								
	21.0Kg/sq or 300 lb/sq inch (imported)								
	3" Dia	3 Nos	4,290.00	Each	12,870.00	4,290.00	12,870.00	4,354.00	13,062.00
	6" Dia	3 Nos	9,360.00	Each	28,080.00	9,360.00	28,080.00	9,500.00	28,500.00
	10" Dia	3 Nos	27,690.00	Each	83,070.00	27,690.00	83,070.00	28,105.00	84,315.00
5	Fixing of slice valve with 2 cost iron picese one flanged and other with socket including the cost of nuts bolts and rubber packing, labour etc Complete.								
	3" Dia	3 Nos	1,254.00	Each	3,762.00	1,254.00	3,762.00	1,273.00	3,819.00

*(Handwritten signatures and initials)*

**NAME OF WORK: RECTIFICATION OF CONTAMINATION & REPLACEMENT OF CHOCK & RUSTED PIPE LINE IN BLOCK L, N & J FOR IMPROVEMENT OF WATER SUPPLY IN NORTH NAZIMABAD**

S.No	Description of Work	Engineer's Estimate			M/s. Sahara Tamirat		M/s. RFR Construction		
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount
	6" Dia	3 Nos	1,886.00	Each	5,658.00	1,886.00	5,658.00	1,914.00	5,742.00
	10" Dia	3 Nos	3,319.00	Each	9,957.00	3,319.00	9,957.00	3,369.00	10,107.00
6	Construction of C.C block masonry chamber of 6x6x6 (inside dimantion) with 24"x24" C.i cover & frame (weight-65 Kg) fixed on RCC 1:2:4 slab 6" thick with steel 1/2" Dia main bars 06" C/C & 1/4" dia @ 8" C.C distribution bars 6" thick C.C 1:3:6 block masonry wall set in 1:6 C.M 6" thick 1:4:8 in foundation 2" thick C.C 1:2:4 flooring 1/2" thick C.Plaster 1:6 to all in side wall surface top & bottom slab outer side wall surface 1'-0" deep up to roof slab MS foot rest 5/8" dia bars every 2'-0" deep including query de watering excavation refilling and disposal surplus of earth.	4 Nos	28,357.00	Each	113,428.00	28,357.00	113,428.00	28,782.00	115,128.00
	4'x4'x4'	5 Nos	55,923.00	Each	279,615.00	55,923.00	279,615.00	56,762.00	283,810.00
7	Full hire charges of pumping set per day inclusive of the wages of driver and assistant, fuel and electric energy plate form required for placing the pump etc, at lower depth with suction and delivery pipe for pumping out water pound at various depth from trenches including the cost of erection and dismantling after completion of job of 10 HP pumping out water from 10 ft deep trenches.	12.00' Day	1,500.00	Per Day	18,000.00	1,500.00	18,000.00	1,522.50	18,270.00

**NAME OF WORK: RECTIFICATION OF CONTAMINATION & REPLACEMENT OF CHOCK & RUSTED PIPE LINE IN BLOCK L,N & J FOR IMPROVEMENT OF WATER SUPPLY IN NORTH NAZIMABAD**


S.No	Description of Work	Engineer's Estimate			M/s. Sahara Tamirat		M/s. RFR Construction		
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount
8	Refilling the excavated stuff in trenches 6" layer i/c watering ramming to full compaction etc complete.	8145.17	2,760.00	% 0 Cft	22,480.67	2,760.00	22,480.67	2,801.00	22,814.62
	<b>Total Quoted / Corrected Cost</b>				<b>830,765.67</b>		<b>830,765.67</b>		<b>843,146.56</b>
	Say				<b>830,766</b>		<b>830,766</b>		<b>843,147</b>



(Abdul Jabbar Shaikh)  
Accounts Officer (Central)  
Member/Secretary



(Saif-ul-Haque)  
Additional Director Internal  
Audit - KMC Member



(Maqsood Ahmed Shaikh)  
Superintending Engineer (KMC)  
Member



(Abdul Rahim Khattai)  
Chief Engineer (PD), (Convener)



(Syed Fahim Akhtar Zaidi )  
Chief Engineer (Central)  
Member