



**OFFICE OF THE DEPUTY INSPECTOR GENERAL OF POLICE,
TRAFFIC (LICENSING & TRAINING), KARACHI
11TH ZAMZAMA STREET (ADJACENT DL BRANCH), CLIFTON, KARACHI
No.DIGP/TR/(L&T)/ACCTT/631-33 /2018, Karachi, dated. 07.02.2018.**

The Manager (Assessment),
Sindh Public Procurement Regulatory Authority,
Government of Sindh, Karachi.

Attn: Assistant Director (Assessment)

Subject:- **NIT FOR THE REPAIR & RENOVATION WORK OF
DRIVING LICENSE BRANCH HYDERABAD.**

Reference:- SPPRA Serial No.36147, dated: 12-01-2018.

Please find herewith copies of the following documents.

1. Attendance Sheets of the committee members.
2. Attendance Sheets of the contractors/builders.
3. Bid Evolution Report.
4. Minutes of the meeting.
5. Comparative statement.
6. Bidders Eligibility Reports.
7. Copies of the schedule B received from Contractors.

It is requested that BER may be placed on SPPRA website on priority basis.

Encl: 24 leaves

(FARHAT ALI JUNEJO) PSP
Deputy Inspector General of Police,
Traffic Licensing & Training,
Karachi.

Copy forwarded to the following:-

1. The Addl.IGP / Traffic Sindh Karachi.
2. The AIGP / Logistic Sindh Karachi.
3. Asstt. Engineer, CPO Sindh Karachi.

SPPRA INWARD DIARY






NO : 5632

DATED : 09.02.2018

REPAIR & MAINTENANCE WORK OF DRIVING LICENSE BRANCH
HYDERABAD.

ATTENDANCE OF THE COMMITTEE MEMBERS





Dated: 06-02-2018.

S. No	Committee Members	Time	Attendance Signature	Remarks
01	Mr. Farhat Ali Jujeno, PSP DIGP Traffic (L&T) Karachi. (Chairman)	1500 hrs		
02	Mr. Muhammad Ahmed Baig DSP/ Admin Traffic (L&T) Karachi (Secretary)	1500 hrs		
03	Mr. Hafiz Safdar Assistant Engineer CPO Sindh	1500 hrs		
04	Mr. Jahanzaib Memon Rep. of Information Science & Technology Department	1500 hrs		
05	Mr. Ghulam Asghar Shaikh Deputy Director of Works & Services Department Govt: of Sindh	1500 hrs		

REPAIR & RENOVATION WORK OF DRIVING LICENSE BRANCH
HYDERABAD.

ATTENDANCE OF THE CONTRACTORS/BUILDERS FOR
OPENING FINANCIAL BID DOCUMENTS

OPENING DATE 06-02-2018


S. No	Name of Firm	Time	Attendance Signatures	Remarks
01	M/S. S R Enterprises <i>Engr: Saleem Raza</i>	03:02 Pm		
02	M/S. Ali Jumani Enterprises	A	A	
03	M/S. Rajput Traders <i>Wahid Jaisani</i>	3:00		
04	M/S. A.M Memon & Brothers <i>Aurangzeb</i>			


BID EVALUATION REPORT


1. Name of Procuring Agency Sindh Police
2. Tender Reference No. (Re-tender Notice) DIGP/TR/(L&T)/Gen/358-66, dated: 09-01-2018.
3. Name of Work/Items Repair & Renovation Work of Driving License Branch Hyderabad.
4. Method of Procurement Single Stage One envelope Procedure
5. Tender Published (Print Media) Date 13-01-2018, INF-KRY: No.172/18.
6. SPPRA Serial No. 36147
7. Total Bid Sold 04
8. Total Bid Received 03
9. Technical Bid opening Date (if applicable) N/A
10. No of Bid Technically Qualified (if applicable) N/A
11. Bid (S) Rejected Nil
12. Tender / Bid Opening Date 06-02-2018
13. Cost of Sanctioned Estimated Rs.5.07 Million.
14. Bid Evaluation Report:

S.#	Name of Firms of Bidders	Cost offered by the Bidders	Ranking in Terms of Cost	Comparison with Estimated Cost	Reason for Acceptance/Rejection	Remarks
1	M/S. S R Enterprises	Rs.3,712,458	1st Lowest	Within Estimated Cost	Accepted being lowest amongst the competitors and sanctioned estimate	Qualified & Lowest
2	M/S. Rajput Traders	Rs.3,973,411	2nd Lowest	Within Estimated Cost	Rejected being highest	Qualified but Highest
3	M/S. A M Memon Traders	Rs.4,975,608	3rd Lowest	Within Estimated Cost	Rejected being highest	Not Qualified & Highest

The committee has accepted and recommended the Bid of M/S. S R Enterprises being lowest one.


DSP / Admin
Traffic Licensing & Training
Karachi


(JAHANZAIB MEMON)
Sp. of Information Science & Technology Department
Government of Sindh


(FARHAT ALI JUNEJO)
Deputy Inspector General of Police
Traffic (Licensing & Training)
Karachi


(HAFIZ SAFDAR)
Assistant Engineer
CPO Sindh Karachi


(GHULAM ASGHAR SHAIKH)
Deputy Director of Works & Services Department
Government of Sindh



**OFFICE OF THE DEPUTY INSPECTOR GENERAL OF POLICE,
TRAFFIC (LICENSING & TRAINING), KARACHI
11TH ZAMZAMA STREET (ADJACENT DL BRANCH), CLIFTON, KARACHI
No.DIGP/TR/(L&T)/Gen/ 1505 /2018, Karachi, dated. 6.2.2018.**

Subject: MINUTES OF MEETING OF THE COMMITTEE.

On 06 February, 2018 at 1500 hours a meeting of the Procurement Committee constituted by the IGP Sindh, Karachi vide order No.G-I/111 dated: 09-01-2018, was held at the office of the DIGP Traffic (L&T) Karachi to open the Tender called for the Repair & Renovation Work of Driving License Branch Hyderabad during the current financial year 2017-2018. The following were present:-

- | | |
|--|-----------|
| 1. DIGP / Traffic (L&T) Karachi,
(Farhat Ali Juneno), PSP | Chairman |
| 2. DSP/ Admn Traffic Branch (L&T) Karachi
(Muhammad Ahmed Baig) | Secretary |
| 3. Assistant Engineer CPO Sindh.
(Hafiz Safdar) | Member |
| 4. Rep. of Information Science & Technology Dept.
(Jahanzaib Memon) | Member |
| 5. Deputy Director of Works & Services Dept.
(Ghulam Asghar Shaikh) | Member |

02. In response to Tender Notice floated in the press on 12-01-2018, regarding Repair & renovation Work of Driving License Branch Nazimabad Karachi. The Tender Box was placed in the Hall as per schedule, the sealed Tender covers of bids of following participated firms were opened by the Committee publicly in the presence of the bidders / representative

S.#	Name of Firm
01	M/S. S R Enterprises
02	M/S. Rajput Traders
03	M/S. A M Memon & Brother


03. All the bid documents which were opened before the committee were signed by the committee members as a token of authentication and thoroughly scrutinized each case / tender documents by comparing arithmetically and financially with sanctioned estimates / bill of quantities and criteria of eligibility and minimum qualification as bidding documents.

04. During the opening of tender received following status was found:-

S.#	Name of Firm of Bidders	Cost Offered by the Bidders	Ranking in Terms of Cost	Comparison with Estimated Cost	Remarks
01	M/S. S R Enterprises	Rs.3,712,458	1 st Lowest	Within Estimated Cost	Accepted being lowest amongst the competitors and sanctioned estimate
02	M/S. Rajput Traders	Rs.3,973,411	2 nd Lowest	Within Estimated Cost	Rejected being highest
03	M/S. A M Memon & Brother	Rs.4,975,608	3 rd lowest	Within Estimated Cost	Rejected being highest


05. Committee decided to process further in accordance with SPPRA Rule-2010 Amended in 2017.

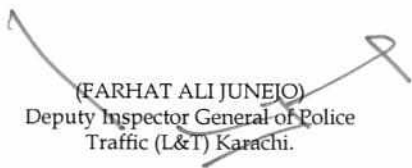
06. Meeting ended with the vote of thanks by the chairman of Procurement Committee.


(Muhammad Ahmed Baig)
DSP / Admin (L&T) Karachi


(Hafiz Safdar)
Assistant Engineer CPO Sindh


(Jahanzaib Memon)
Rep. of Information Science & Technology Department
Government of Sindh


(Ghulam Asghar Shaikh)
Deputy Director of Works & Services Department Government of
Sindh


(FARHAT ALI JUNEJO)
Deputy Inspector General of Police
Traffic (L&T) Karachi.

COMPRATIVE STATEMENT

Repair & Renovation Work of Driving License Branch Hyderabad.

No.DIGP/TR/(L&T/Gen/ 1561

/2018/Karachi/Dated: 06-02-2018.

S.#	Name of Company	Cost Offered by Bidder	Remarks
1	M/S. S R Enterprises	Rs.3,712,458	Qualified & Lowest
2	M/S. Rajput Traders	Rs.3,973,411	Qualified but Higher
3	M/S. A M Memon & Brothers	Rs.4,975,608	Not Qualified & Higher

The committee has accepted and recommended the Bid of M/S S R Enterprises being lowest one.



(Muhammad Ahmed Baig)
DSP / Admin
Traffic Licensing & Training Karachi



(HAFIZ SAFDAR)
Assistant Engineer
CPO Sindh Karachi



(JAHANZAIB MEMON)
Rep. of Information Science & Technology Department
Government of Sindh



(GHULAM ASGHAR SHAIKH)
Deputy Director of Works & Services Department
Government of Sindh



(FARHAT ALI JUNEJO)
Deputy Inspector General of Police
Traffic (Licensing & Training)
Karachi

Method and procedure of procurement: Single stage one envelope.


Repair & Renovation Work of DL Branch Hyderabad.

BIDDERS ELIGIBILITY / QUALIFICATION REPORT.

S.No	Eligibility Qualification Criteria	Name of Bidders		
		M/S. S R Enterprises	M/S. Rajput Traders	M/S. A M Memon & Brothers
1	Registration with PEC (if applicable)	Yes	Yes	No
2	NTN	Yes	Yes	No
3	Salex Tax Registration	Yes	Yes	No
<u>Qualification Criteria</u>				
4	Minimum three year's experience of relevant field	Yes	Yes	No
5	Turnover of at least last three years	Yes	Yes	No
6	Required Bid Security is attached	Yes	Yes	Yes
7	Bid is signed, named and stamped by the authorized of the firm alongwith authorization letter	Yes	Yes	Yes
8	Qualified / disqualified	Qualified	Qualified	Disqualified

Note: The procuring agency may modify the criteria as per their requirements.


(FARHAT ALI JUNEJO) PSP
Deputy Inspector General of Police
Traffic (L&T) Karachi.
Chairman


(MUHAMMAD AHMED BAIG)
DSP / Admin
Traffic (L&T) Karachi.
Secretary


(HAFIZ SAFDAR)
Assistant Engineer
CPO Sindh Karachi
Member


(JAHANZAIB MEMON)
Information Science & Technology Department
Government of Sindh
Member


(GHULAM ASGHAR SHAIKH)
Deputy Director Works & Services Department
Government of Sindh
Member

**OFFICE OF THE DEPUTY INSPECTOR GENERAL OF POLICE,
TRAFFIC (LICENSING & TRAINING), KARACHI
11TH ZAMZAMA STREET (ADJACENT DL BRANCH), CLIFTON, KARACHI**

To,

M/S. SR Enterprises.

GR No. 01

Date: 23/1/18



- ▲ Due date: 06-02-2018
- ▲ Time of Opening: 15:00 HRS
- ▲ Place of Opening: Office of DIGP Traffic (L&T) 11th Zamzama Street Clifton Karachi.

Name of work: **REPAIR & RENOVATION WORK OF DRIVING LICENSE BRANCH
HYDERABAD.**

1. Name of firm M/s SR Enterprises
2. Address Plot G3, DL-Aishaw-Square Karachi.
3. Full name of bidder
With CNIC#, Address
Phone Landline/Cell. Engr: Saleem Reza Ullah
45302-0378696-3, 03313522457
4. Person/representation to whom contact with
CNIC No. Landline/Cell No. Engr: Asif Ali
2582327-2
5. NTN Number 2582327-2
6. Category of Registration
with limit CS/E up to 65 Million,
31-06-2018,
7. Validation of Registration
8. Schedule "B" form may be
attached.
9. Cost of work 4949944.9 Rds = 3712458
10. Earnest Money 125000/-
11. Pay order No & Date 18524173, 06-02-2018,
12. Name of Bank with Branch Code
13. Signature & Seal M/S S.R. Enterprises
14. **NOTE.** The above work of Repair & Renovation would be done subject to availability of fund.

(IMRAN AHMED KHAN)
DSP/Admin

For Deputy Inspector General of Police
Traffic Licensing & Training
Karachi

Name of work: REPAIR / RENOVATION WORKS FOR DRIVING LICENSE BRANCH, HYDERABAD.

SCHEDULE BOOK DOCUMENT

L WORKS SCHEDULE ITEMS PART (A):

NO	Descriptions	Quantity	Rate	unit	Amount
1	Dismantling cement block masonry. (SI.14 / P-10).	240.339	1134.38	%Cft	2726.357548
2	Removing door with chowkats.(SI.33-a /P-12).	4	142.18	Each	568.72
3	Removing window and sky light with chowkats (33-b P/12).	12	102.85	P. No.	1234.2
4	Scraping (b) Ordinary distemper oil bound distemper or Paint on Walls. (SI.54-(b) / P-13).	8749	226.88	%Sft	19849.7312
5	Dismantling glazed or encaustic tiles etc (SI.55 / P-13).	1269.71	786.5	%Sft	9986.26915
6	Dismantling cement concrete plain 1:4:8. (SI.19-a/P-10)	366.045	1663.75	%Cft.	6090.073688
7	Providing and laying 1: 3: 6 Cement concrete solid Block masorany wall above 6" in thickness set in 1: 6 cement mortar in G.F ground floor superstructure including raking out joints & curing etc. complete. (SI.23 / P-19).	457.59	14621.44	%Cft.	66906.2473
8	Applying floating coat of Cement 1/32" thick.(SI.14/P-53).	5546.56	660	%Sft	36607.296
9	Cement plaster 1:4 upto 12' height (c) 3/4" thick (SI-11-C/P-52)	5546.56	3015.76	%Sft	167270.9379
10	Distemping two coats (SI.24c / P-54)	1953.42	1079.65	%Sft	21090.09903
11	Preparing the surface & painting with matt finish paint of approved make to old matt finish surface. B). 2nd & subsequent coat.(SI.37(A+B+B) / P-55).	4981.52	2499.76	%Sft	124526.0444
12	Providing & fixing colour crete to wall surface to provide, durable crust and aesthetics having thickness upto 3/4" with specified colour having water, fire and termite resistance (upto 20' -0 height). (SI.44/P-63).	5562.8	6319.5	%Sft	351541.146
13	First class deodar wood wrought joinery in doors and windows etc, fixed in position including chowkats hold fasts hinges, iron tower bolts, chocks cleats, handles and cords with hooks, etc. Deodar paneled or paneled and glazed, or fully glazed. (b) 1 3/4" thick. (SI.7 (b)/P-65).	91	902.93	P/Sft	82166.63
14	P/F cement paving blocks flooring having size 197x97x60 (mm) of city / quddra / cobble shape with having strength b/w 5000 psi to 8500 psi in/c filling the joints with hill sand and laying in specified manner / pattern and design etc complete. (SI-71/P-49)	1464.18	199.77	P/Sft	292499.2386
15	P/F angle iron vertical Plats for barbed wire fencing of size 2"x2" 1/4" embedded in RCC / Masonry pillars in/c making cuts / holders @ 12" in/c fixing in pillars by chiseling and filling the with cement sand mortar, spraining & finishing the surface (8 P / 95).	173.33	169.18	P/Rft	29323.9694
16	P/F barbed wire fencing with 12 guage -4 points @.6" apart barbed wire i/c straightening & fixing in angle iron vertical posts. (SI-9/P- 96)	1039.98	8.38	P/Rft	8715.0324
17	R.C.C. spout including fixing in position 2-1/2x6"x5" (SI.14/P-18)	8	211.75	P/Nos	1694
Total Amount Part (A):					1222795.993
<i>add 20% above on S.I. =</i>					<i>244559</i>
<i>Net =</i>					<i>1467355.7</i>

ELECTRIC WORKS SCHEDULE ITEMS PART (B):

S.NO	Descriptions	Quantity	Rate	unit	Amount
1	Wiring for plug point with 3/.029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required.(SI.126 / P-15).	100	985	P.Point	98500
2	Providing & laying (MAIN or SUB MAIN) PVC insulated with size 2-3/.029 copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required.(SI.8 / P-2).	650	173	P.Meter	112450

M/S S. Enterprises

Providing & laying (MAIN or SUB MAIN) PVC insulated with size 2-3 / .36 copper conductor in ¾" dia PVC conduit recessed in the wall or column as required. (SI.9 /P-2)	480	191	P.Meter	91680
Providing & Fixing three pin 10 / 15 Amp Plug & Socket.(SI.224 / P-33).	24	151	Each	3624
Providing & Fixing three pin 5 Amp Plug & Socket.(SI.226 / P-33).	24	151	Each	3624
Providing & fixing three pin 10/15 amp plug & socket flush type.(SI.227 / P-33).	24	162	Each	3888
P/F ammeters size 96/96mm Direct 15A, 30A,50A,60A, & 100A as required & as per instruction of EI. (SI.284/P-41)	2	1054	P/ No.	2108
P/F holder for 125 watts light @ as per site requirement & instruction of Engineer Incharge. (SI.189/P-29)	24	203	P/ No.	4872
P/F circuit breaker 6,10,15,20,30,40,50, & 63 amp DP (TB-5S) on prepared board as required. (SI.204/P-31)	4	2456	Each.	9824
Providing & fixing one way SP 5-Amp switch surface type.(SI.216 / P-33).	12	34	Each	408
Providing & fixing one way SP 5amp switch flush type (33/219)	12	54	P/ No.	648
P/F two way SP 5-amp switch flush type (SI.220/P-33)	12	55	P/No	660
Providing & fixing one way SP 10 / 15amp switch surface type.(SI.218 / P-33).	2	58	Each	116
P/F voltmeter size 96/96 mm 500 volt as required & as per	2	999	Each	1998
Total amount of Part (B):				334400

add 20% above on S.T - 66880
Net = 401280 =

RY WORKS SCHEDULE ITEMS PART (C):

Descriptions	Quantity	Rate	unit	Amount
S/F soap tray of made plastic of superior quality and design with fine finishing with CP screws etc complete.	2	169.4	Each	338.8
Providing & fixing chrome lated brass towel rail complete with brackets fixing on wooden cleats with 1" long c.p brass screws.(II) Towel rail 30" long. (a) ¾" dia round or square (Standard Pattern). (SI.01-II+a / P-07).	2	1082.95	Each	2165.9
(a) S/Fixing long bib-cock of superior quality with c.p head ½" dia. (SI.13-a / P-19).	4	1109.46	Each	4437.84
Providing & fixing European white glazed earthen ware wash down W.C pan complete with and in/c the cost of white/black plastic seat (Best Quality) and lid with C.P. brass hinges and buffers, 3 gallons white glazed earthen ware low level flushing cistern with siphon fitting 1-1/2" dia white porcelain enameled flush bend ¾" dia and making requisite number of holes in walls, plinth and floor for Pipe connections and making good in cement concrete 1:2:4 (Foreign Quality).(SI.5 / P-2).	2	11477.4	Each	22954.8
P/L 24"x18" bevalled edge mirror of Belgium glass complete with 1/8" thick hard board and CP screws fixed to wooden pleat (b) superior quality (SI3-b/P-07)	2	2376	P/No	4752
Providing & fixing 6"x2" or 6"x3" C.I floor trap of the approved self cleaning design with a C.I screwed down granting with or without a vent arm complete with & l/c making requisite number of holes in walls, plinth & floor for Pipe connections & making good cement concrete 1: 2: 4. (SI.20 / P-06).	4	2042.43	Each	8169.72
Add extra for labour for providing & fixing of earthen ware pedestal white or coloured glazed (Foreign or Equivalent).(SI.11 / P-3).	2	2533.47	Each	5066.94

[Signatures]
M/S S.R. Enterprises
 Page 2

S/F fiber glass tank of approved quality & design and wall thickness as specified in/c cost of nuts bolts and fixing in plate form of cement concrete 1:3:6 and making connection for inlet & out let & over flow pipes etc complete. (SI.3-C /P-21) 500 gallons	2	37505.42	Each	75010.84
(b) Supplying / Fixing wash basin mixture of superior quality with C.P head ½" dia. (SI.14-b / P-19).	2	3179	Each	6358
(a) Supplying & fixing C.P Muslim Shower with double Bib cock & ring Pipe etc complete. (SI.19 (a) / P-19).	2	3432	Each	6864
Providing & fixing in position nyloon connections complete with ½" dia, brass stop cock with pair of brass nuts and lining joints to nyloon connection. (SI. 23 / 06).	4	447.15	Each	1788.6
Providing & fixing 24" x 18" lavatory basin in white glazed earthen ware complete with & in/c the cost of W.I or C.I cantilever brackets 6 inches built into walls, painted white in two coats after a primary coat of red lead paint a pair of ½" dia rubber plug & chrome plated brass chain 1-1/4" dia, malleable iron or brass unions and making requisite number of holes in walls, plinth & floor for Pipe connections and making good in cement concrete 1:2:4 (Foreign or Equivalent).(SI.10 / P-3).	2	4928	Each	9856
Cancelled C.P. fittings of Superior quality for tiles Bath Rooms.(b) S/Fixing cancelled stop cock of superior quality with C.P. head ½" dia.(SI.11(b) / P-18).	2	509.74	Each	1019.48
(a). S/Fixing canceled tee-stop cock of superior quality with C.P head ½" dia. (SI.12-a / P-18).	2	843.92	Each	1687.84

Total Amount of Part (C): 150470.76

SCHEDULE ITEMS PART (D):

add 20% above on S.I. = 190564


Descriptions	Quantity	Rate	unit	Amount
Supplying and fixing in position Aluminum channels framing for sliding windows & ventilators of Lucky or equivalent made with 5mm thick tinted glass glazing (Belgium) and aluminum fly screen, handles, stoppers and locking arrangement etc complete. (b) Deluxe Model (Bronze of Champion color)	336	1000/-	P/Sft	336000/-
Supplying and fixing in position Aluminum channels framing for hinged doors of Lucky or equivalent made with 5mm thick tinted glass glazing (Belgium) and ALPHA (Japan) locks in/c handles, stoppers etc complete. (b) Deluxe Model (Bronze of Champion color)	56	1200/-	P/Sft	67200/-
P/F Gypsum board pelmet to be hanged from ceiling in specified shape and design as approved by the consultant. This in/c cutting the existing Gypsum board false ceiling in proper shape, hanging the structure by aluminum angle 1"x1" @ 3'-0 apart drilled and screwed in RCC slab, making hanging frame by using Aluminum U-channel section 1-1/2" wide in 18"x18" rafters and fixing Gypsum board sheet with chips and screws. Then filling the joints & screws holes with plastic mesh and plaster of Paris and making surface smooth as directed by the Engineer Incharge.	1897.42	250/-	P/Sft	474355/-
P/L Porcelain Master granite tiles glazed or matt glazed, jointed in white cement and laid over 1:2 grey cement sand mortar ¾" thick in/c finishing & filling of joints with slurry of white cement or tile grout in desired shape in/c cutting of tiles to proper profile (on floor or facing) size 18"x18"x1/4" or 16"x16"x1/4"	1897.42	300/-	P/Sft	569226/-

M/S S.F. Enterprises

5	Water proofing of roof by means of chemical by using latex solution by supplying 1 st coat of uni bond 2860 adhesive, 2 nd coat of Aqua seal 2010/11 3 rd coat of uni-bond+aqua seal mixture then filling the cracks with uni-bond then supplying 2/3 coats as per requirement of aqua seal to have rubber like surface etc complete as directed by the Engineer Incharge.	1897.42	100/=	P/Sft	189742
6	P/F fine quality roller type blind with approved design false & in/c steel angle fixing with steel screws as per window as required @ site as directed by the Engineer Incharge.	490	150/=	P/Sft	73500/=
7	S/F LED spot light China make with 7 Nos lamps each 6 watts fitted on walls, ceiling of approved quality as directed by the Engineer Incharge.	120	500/=	P/Sft	60000/=
8	S/F hydraulic door clouser imported quality as directed by the Engineer Incharge.	4	2500/=	Each	10000/=
9	P/Fixing fiber glass shade with fiber glass sheet 2-3mm thick including necessary frame work of angle iron or G.I pipe & fixing sheet with screws in proper design & shape as directed by Engineer Incharge.	732.09	800/=	P/Sft	585672/=
10	P/F wall bracket fan 18" dia of approved make & quality (Royal/Pak, Millat or equivalent) in/c fixing on wall as directed by the Engineer Incharge	12	3500/=	Each	42000/=
11	P/F ceiling fan 56" sweep Pak/Royal/GFC or equivalent deluxe model in/c carriage from shop to site of work, fixing & necessary lead connection as directed by the Engineer Incharge.	6	4500/=	Each	27000/=
12	P/F fan dimmer of ceiling fan Pak / Royal / GFC of approved quality & make as directed by the Engineer Incharge	6	200/=	Each	1200/=
13	P/F CPVC water supply pipe of AGM or Pak Arab or equivalent with all necessary fittings like elbow, bend, tee etc. This includes fixing on walls with clamps or Jubilee clips upto height of 50'-0 in vertical or horizontal position using Jhoola or long ladder or scaffolding and jointing pipe & fittings with approved solvent / JTG solution. The rate includes all cost of labour, material, and cartage, as directed by Engineer Incharge 1/2" dia	200	100/=	P/Rft	20000/=
14	P/F CPVC water supply pipe of AGM or Pak Arab or equivalent all necessary fittings like elbow, bend, tee etc . This includes fixing on walls with clamps or Jubilee clips upto height of 50'-0 in vertical or horizontal position using Jhoola or long ladder or scaffolding and jointing pipe & fittings with approved solvent / JTG solution. The rate includes all cost of labour, material, and cartage, as directed by Engineer Incharge 3/4" dia	180	115/=	P/Rft	20700/=
15	P/F UPVC water supply pipe of AGM or Pak Arab or equivalent without fittings which will be paid separately. This includes fixing on walls with clamps or Jubilee clips upto height of in vertical or horizontal position using Jhoola or long ladder or scaffolding and jointing pipe & fittings with approved solvent / JTG solution. The rate includes all cost of labour, material, and cartage, as directed by Engineer Incharge 2" dia	220	150/=	P/Rft	33000/=



M/S S.R. Enterprises

16	P/F UPVC water supply pipe of AGM or Pak Arab or equivalent with all necessary fittings. This includes fixing on walls with clamps or Jubilee clips upto height of in vertical or horizontal position using Jhoola or long ladder or scaffolding and jointing pipe & fittings with approved cement solvent / JTG solution. The rate includes all cost of labour, material, and cartage, as directed by Engineer Incharge 1" dia	150	125/-	P/Rft	18750/-
17	P/F RCC pipe 12" dia with collar of class *B* for sewerage line in/c excavating the trench of required dia and depth and then laying pipe in trench jointing and refilling excavated stuff as directed by the Engineer Incharge.	380	500/-	P/Rft	19000/-
18	Construction of manhole or inspection chamber 2'-0x2'-0 & upto 5'-0" inside depth dimension for required dia of circular sewer with walls of solid block masonry 1:3:6 set in 1:6 cement sand mortar 6" thick with 6" thick C.C. 1:4:8 in foundation, 1/2" thick plaster in 1:4 ratio to all inside wall surface & to top 1" thick C.C. flooring etc including, curing, excavation, back filling & disposal of surplus earth as directed by the Engineer Incharge.	12	10000/-	Each	120000/-
19	P/F RCC main hole cover of 3" thickness embedded with angle iron frame 1-1/2"x1-1/2"x1-1/4" and bars of 3/8" dia mild steel placed at 6" i/c both way i/c handle in centre for lifting poured with C.C. 1:2:4 in/c curing, finishing etc complete.	144	100/-	P/Sft	14400/-
20	Removing debries from Building in/c collecting from different floors, throwing to stair to ground floor at proper place and then loading on truck and throwing out of city government premises, fuel & hire charges of truck, loading & unloading etc complete	4	12000/-	P/Truck	48000/-
Total Amount of Part (D)					2900745

Grand Total amount in Rupees (A+B+C+D) 4949944/-
Grand Total amount in Rupees: 4949944/-
Or say in Million 25/ 29.49944

TERMS AND CONDITIONS

- Any typographical errors in the Schedule B are subject to the correction with Reference to the Schedule of rate General
- Arbitration clause stands deleted from the agreement.
- No premium shall be paid on a Non schedule items.
- 100% Well Graded crushed bajri shall be used in items of work without any extra payment.
- All sample of items should be got approved by the Engineer Incharge.

M/S S.R. Enterprises

(HAFIZ SAFDAR SHAIKH)
Assistant Engineer,
CPO, Sindh, Karachi

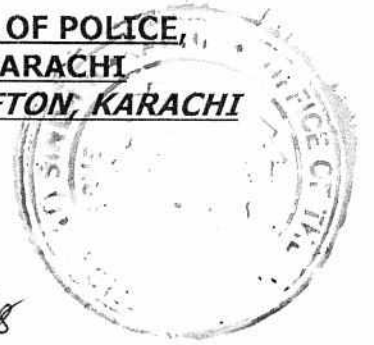
**OFFICE OF THE DEPUTY INSPECTOR GENERAL OF POLICE,
TRAFFIC (LICENSING & TRAINING), KARACHI
11TH ZAMZAMA STREET (ADJACENT DL BRANCH), CLIFTON, KARACHI**

To,

M/S. Rajput Traders.

GR No. 03

Date: 2/2/18



- ▲ Due date: 06-02-2018
- ▲ Time of Opening: 15:00 HRS
- ▲ Place of Opening: Office of DIGP Traffic (L&T) 11th Zamzama Street Clifton Karachi.

Name of work: **REPAIR & RENOVATION WORK OF DRIVING LICENSE BRANCH HYDERABAD.**

1. Name of firm Rajput Traders.
2. Address 188/A Abdullah Joun Maseem.
3. Full name of bidder Neeraj Hyderabad -
With CNIC#, Address
Phone Landline/Cell. Armeet Kumar / 41306-2028166-1
4. Person/representation to whom contact with
CNIC No. Landline/Cell No. 0333 / 2604419 - 0222-2654788
5. NTN Number 1555940-8
6. Category of Registration with limit L-5 / 6568 / 65(M)
7. Validation of Registration June 2018
8. Schedule "B" form may be attached.
9. Cost of work 3973,442.15/-
10. Earnest Money 125000/-
11. Pay order No & Date 6/2/18
12. Name of Bank with Branch Code Summit Bank - (4/2)

13. Signature & Seal [Signature]

14. **NOTE.** The above work of repair & Renovation would be done subject to availability of fund.

M/S RAJPUT TRADERS
Proprietor

[Handwritten signatures]

[Signature]
(IMRAN AHMED KHAN)
DSP/Admin
For Deputy Inspector General of Police
Traffic Licensing & Training
Karachi

SCHEDULE BOOK DOCUMENT

L WORKS SCHEDULE ITEMS PART (A):

NO	Descriptions	Quantity	Rate	unit	Amount
1	Dismantling cement block masonry. (SI.14 / P-10).	240.339	1134.381	%Cft	2726.357548
2	Removing door with chowkats.(SI.33-a /P-12).	4	142.18	Each	568.72
3	Removing window and sky light with chowkats (33-b P/12).	12	102.85	P.No.	1234.2
4	Scraping (b) Ordinary distemper oil bound distemper or Paint on Walls. (SI.54-(b) / P-13).	8749	226.88	%Sft	19849.7312
5	Dismantling glazed or encaustic tiles etc (SI.55 / P-13).	1269.71	786.5	%Sft	9986.26915
6	Dismantling cement concrete plain 1:4:8. (SI.19-a/P-10)	366.045	1663.75	%Cft.	6090.073688
7	Providing and laying 1: 3: 6 Cement concrete solid Block masorany wall above 6" in thickness set in 1: 6 cement mortar in G.F ground floor superstructure including raking out joints & curing etc. complete. (SI.23 / P-19).	457.59	14621.44	%Cft.	66906.2473
8	Applying floating coat of Cement 1/32" thick.(SI.14/P-53).	5546.56	660	%Sft	36607.296
9	Cement plaster 1:4 upto 12' height (c) 3/4" thick (SI-11-C/P-52)	5546.56	3015.76	%Sft	167270.9379
10	Distemping two coats (SI.24c / P-54)	1953.42	1079.65	%Sft	21090.09903
11	Preparing the surface & painting with matt finish paint of approved make to old matt finish surface. B). 2nd & subsequent coat.(SI.37(A+B+B) / P-55).	4981.52	2499.76	%Sft	124526.0444
12	Providing & fixing colour crete to wall surface to provide, durable crust and aesthetics having thickness upto 3/4" with specified colour having water, fire and termite resistance (upto 20' -0 height). (SI.44/P-63).	5562.8	6319.5	%Sft	351541.146
13	First class deodar wood wrought joinery in doors and windows etc, fixed in position including chowkats hold fasts hinges, iron tower bolts, chocks cleats, handles and cords with hooks, etc. Deodar paneled or paneled and glazed, or fully glazed. (b) 1 3/4" thick. (SI.7 (b)/P-65).	91	902.93	P/Sft	82166.63
14	P/F cement paving blocks flooring having size 197x97x60 (mm) of city / quddra / cobble shape with having strength b/w 5000 psi to 8500 psi in/c filling the joints with hill sand and laying in specified manner / pattern and design etc complete. (SI-71/P-49)	1464.18	199.77	P/Sft	292499.2386
15	P/F angle iron vertical Plats for barbed wire fencing of size 2"x2" 1/4" embedded in RCC / Masonry pillars in/c making cuts / holders @ 12" in/c fixing in pillars by chiseling and filling the with cement sand mortar, spraining & finishing the surface (8 P / 95).	173.33	169.18	P/Rft	29323.9694
16	P/F barbed wire fencing with 12 guage -4 points @ 6" apart barbed wire i/c straightening & fixing in angle iron vertical posts. (SI-9/P- 96)	1039.98	8.38	P/Rft	8715.0324
17	R.C.C. spout including fixing in position 2-1/2x6"x5" (SI.14/P-18)	8	211.75	P/Nos	1694
Total Amount Part (A):					1222795.993

LECTRIC WORKS SCHEDULE ITEMS PART (B):

S.NO	Descriptions	Quantity	Rate	unit	Amount
1	Wiring for plug point with 3/.029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required.(SI.126 / P-15).	100	985	P.Point	98500
2	Providing & laying (MAIN or SUB MAIN) PVC insulated with size 2-3/.029 copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required.(SI.8 / P-2).	650	173	P.Meter	112450

3	Providing & laying (MAIN or SUB MAIN) PVC insulated with size 2-3 / .36 copper conductor in ¾" dia PVC conduit recessed in the wall or column as required. (SI.9 / P-2)	480	191	P/Meter	91680
4	Providing & Fixing three pin 10 / 15 Amp Plug & Socket.(SI.224 / P-33).	24	151	Each	3624
5	Providing & Fixing three pin 5 Amp Plug & Socket.(SI.226 / P-33).	24	151	Each	3624
6	Providing & fixing three pin 10/15 amp plug & socket flush type.(SI.227 / P-33).	24	162	Each	3888
7	P/F ammeters size 96/96mm Direct 15A, 30A,50A,60A, & 100A as required & as per instruction of EI. (SI.284/P-41)	2	1054	P/ No.	2108
8	P/F holder for 125 watts light @ as per site requirement & instruction of Engineer Incharge. (SI.189/P-29)	24	203	P/ No.	4872
9	P/F circuit breaker 6,10,15,20,30,40,50, & 63 amp DP (TB-5S) on prepared board as required. (SI.204/P-31)	4	2456	Each.	9824
10	Providing & fixing one way SP 5-Amp switch surface type.(SI.216 / P-33).	12	34	Each	408
11	Providing & fixing one way SP 5amp switch flush type (33/219)	12	54	P/ No.	648
12	P/F two way SP 5-amp switch flush type (SI.220/P-33)	12	55	P/No	660
13	Providing & fixing one way SP 10 / 15amp switch surface type.(SI.218 / P-33).	2	58	Each	116
14	P/F voltmeter size 96/96 mm 500 volt as required & as per	2	999	Each	1998
Total amount of Part (B):					334400

WITARY WORKS SCHEDULE ITEMS PART (C):

S.NO	Descriptions	Quantity	Rate	unit	Amount
1	S/F soap tray of made plastic of superior quality and design with fine finishing with CP screws etc complete.	2	169.4	Each	338.8
2	Providing & fixing chrome lated brass towel rail complete with brackets fixing on wooden cleats with 1" long c.p brass screws.(II) Towel rail 30" long. (a) ¾" dia round or square (Standard Pattern). (SI.01-II+a / P-07).	2	1082.95	Each	2165.9
3	(a) S/Fixing long bib-cock of superior quality with c.p head ½" dia. (SI.13-a / P-19).	4	1109.46	Each	4437.84
4	Providing & fixing European white glazed earthen ware wash down W.C pan complete with and in/c the cost of white/black plastic seat (Best Quality) and lid with C.P. brass hinges and buffers, 3 gallons white glazed earthen ware low level flushing cistern with siphon fitting 1-1/2" dia white porcelain enameled flush bend ¾" dia and making requisite number of holes in walls, plinth and floor for Pipe connections and making good in cement concrete 1:2:4 (Foreign Quality).(SI.5 / P-2).	2	11477.4	Each	22954.8
5	P/L 24"x18" bevelled edge mirror of Belgium glass complete with 1/8" thick hard board and CP screws fixed to wooden pleat (b) superior quality (SI3-b/P-07)	2	2376	P/No	4752
6	Providing & fixing 6"x2" or 6"x3" C.I floor trap of the approved self cleaning design with a C.I screwed down granting with or without a vent arm complete with & l/c making requisite number of holes in walls, plinth & floor for Pipe connections & making good cement concrete 1: 2: 4. (SI.20 / P-06).	4	2042.43	Each	8169.72
7	Add extra for labour for providing & fixing of earthen ware pedestal white or coloured glazed (Foreign or Equivalent).(SI.11 / P-3).	2	2533.47	Each	5066.94

8	S/F fiber glass tank of approved quality & design and wall thickness as specified in/c cost of nuts bolts and fixing in plate form of cement concrete 1:3:6 and making connection for inlet & out let & over flow pipes etc complete. (SI.3-C /P-21) 500 gallons	2	37505.42	Each	75010.84
9	(b) Supplying / Fixing wash basin mixture of superior quality with C.P head ½" dia. (SI.14-b / P-19).	2	3179	Each	6358
10	(a) Supplying & fixing C.P Muslim Shower with double Bib cock & ring Pipe etc complete. (SI.19(a) / P-19).	2	3432	Each	6864
11	Providing & fixing in position nyloon connections complete with ½" dia, brass stop cock with pair of brass nuts and lining joints to nyloon connection. (SI. 23 / 06).	4	447.15	Each	1788.6
12	Providing & fixing 24" x 18" lavatory basin in white glazed earthen ware complete with & in/c the cost of W.I or C.I cantilever brackets 6 inches built into walls, painted white in two coats after a primary coat of red lead paint a pair of ½" dia rubber plug & chrome plated brass chain 1-1/4" dia, malleable iron or brass unions and making requisite number of holes in walls, plinth & floor for Pipe connections and making good in cement concrete 1:2:4 (Foreign or Equivalent).(SI.10 / P-3).	2	4928	Each	9856
13	Cancelled C.P. fittings of Superior quality for tiles Bath Rooms.(b) S/Fixing cancelled stop cock of superior quality with C.P. head ½" dia.(SI.11(b) / P-18).	2	509.74	Each	1019.48
14	(a). S/Fixing canceled tee-stop cock of superior quality with C.P head ½" dia. (SI.12-a / P-18).	2	843.92	Each	1687.84
Total Amount of Part (C):					150470.76

N-SCHEDULE ITEMS PART (D):

Sl.NO	Descriptions	Quantity	Rate	unit	Amount
1	Supplying and fixing in position Aluminum channels framing for sliding windows & ventilators of Lucky or equivalent made with 5mm thick tinted glass glazing (Belgium) and aluminum fly screen, handles, stoppers and locking arrangement etc complete. (b) Deluxe Model (Bronze of Champion color)	336	500	P/Sft	168000/-
2	Supplying and fixing in position Aluminum channels framing for hinged doors of Lucky or equivalent made with 5mm thick tinted glass glazing (Belgium) and ALPHA (Japan) locks in/c handles, stoppers etc complete. (b) Deluxe Model (Bronze of Champion color)	56	400	P/Sft	22400/-
3	P/F Gypsum board pelmet to be hanged from ceiling in specified shape and design as approved by the consultant. This in/c cutting the existing Gypsum board false ceiling in proper shape, hanging the structure by aluminum angle 1"x1" @ 3'-0 apart drilled and screwed in RCC slab, making hanging frame by using Aluminum U-channel section 1-1/2" wide in 18"x18" rafters and fixing Gypsum board sheet with chips and screws. Then filling the joints & screws holes with plastic mesh and plaster of Paris and making surface smooth as directed by the Engineer Incharge.	1897.42	100/-	P/Sft	189742
4	P/L Porcelain Master granite tiles glazed or matt glazed, jointed in white cement and laid over 1:2 grey cement sand mortar ¾" thick in/c finishing & filling of joints with slurry of white cement or tile grout in desired shape in/c cutting of tiles to proper profile (on floor or facing) size 18"x18"x1/4" or 16"x16"x1/4"	1897.42	300/-	P/Sft	569226

5	Water proofing of roof by means of chemical by using latex solution by supplying 1 st coat of uni bond 2860 adhesive, 2 nd coat of Aqua seal 2010/11 3 rd coat of uni-bond+aqua seal mixture then filling the cracks with uni-bond then supplying 2/3 coats as per requirement of aqua seal to have rubber like surface etc complete as directed by the Engineer Incharge.	1897.42	100/-	P/Sft	189742/-
6	P/F fine quality roller type blind with approved design false & in/c steel angle fixing with steel screws as per window as required @ site as directed by the Engineer Incharge.	490	300/-	P/Sft	147000/-
7	S/F LED spot light China make with 7 Nos lamps each 6 watts fitted on walls, ceiling of approved quality as directed by the Engineer Incharge.	120	500/-	P/Sft	69000/-
8	S/F hydraulic door clouser imported quality as directed by the Engineer Incharge.	4	5000/-	Each	20000/-
9	P/Fixing fiber glass shade with fiber glass sheet 2-3mm thick including necessary frame work of angle iron or G.I pipe & fixing sheet with screws in proper design & shape as directed by Engineer Incharge.	732.09	160	P/Sft	117134.4
10	P/F wall bracket fan 18" dia of approved make & quality (Royal/Pak, Millat or equivalent) in/c fixing on wall as directed by the Engineer Incharge	12	4000/-	Each	48000/-
11	P/F ceiling fan 56" sweep Pak/Royal/GFC or equivalent deluxe model in/c carriage from shop to site of work, fixing & necessary lead connection as directed by the Engineer Incharge.	6	5000/-	Each	30000/-
12	P/F fan dimmer of ceiling fan Pak / Royal / GFC of approved quality & make as directed by the Engineer Incharge	6	5000/-	Each	30000/-
13	P/F CPVC water supply pipe of AGM or Pak Arab or equivalent with all necessary fittings like elbow, bend, tee etc. This includes fixing on walls with clamps or Jubilee clips upto height of 50'-0 in vertical or horizontal position using Jhoola or long ladder or scaffolding and jointing pipe & fittings with approved solvent / JTG solution. The rate includes all cost of labour, material, and cartage, as directed by Engineer Incharge 1/2" dia	200	100/-	P/Rft	20000/-
14	P/F CPVC water supply pipe of AGM or Pak Arab or equivalent all necessary fittings like elbow, bend, tee etc . This includes fixing on walls with clamps or Jubilee clips upto height of 50'-0 in vertical or horizontal position using Jhoola or long ladder or scaffolding and jointing pipe & fittings with approved solvent / JTG solution. The rate includes all cost of labour, material, and cartage, as directed by Engineer Incharge 3/4" dia	180	150	P/Rft	27000/-
15	P/F UPVC water supply pipe of AGM or Pak Arab or equivalent without fittings which will be paid separately. This includes fixing on walls with clamps or Jubilee clips upto height of in vertical or horizontal position using Jhoola or long ladder or scaffolding and jointing pipe & fittings with approved solvent / JTG solution. The rate includes all cost of labour, material, and cartage, as directed by Engineer Incharge 2" dia	220	200/-	P/Rft	44000/-

16	P/F UPVC water supply pipe of AGM or Pak Arab or equivalent with all necessary fittings. This includes fixing on walls with clamps or Jubilee clips upto height of in vertical or horizontal position using Jhoola or long ladder or scaffolding and jointing pipe & fittings with approved cement solvent / JTG solution. The rate includes all cost of labour, material, and cartage, as directed by Engineer Incharge 1" dia	150	150/-	P/Rft	22500/-
17	P/F RCC pipe 12" dia with collar of class *B* for sewerage line in/c excavating the trench of required dia and depth and then laying pipe in trench jointing and refilling excavated stuff as directed by the Engineer Incharge.	380	1000/-	P/Rft	380,000/-
18	Construction of manhole or inspection chamber 2'-0x2'-0 & upto 5'-0" inside depth dimension for required dia of circular sewer with walls of solid block masonry 1:3:6 set in 1:6 cement sand mortar 6" thick with 6" thick C.C. 1:4:8 in foundation, 1/2" thick plaster in 1:4 ratio to all inside wall surface & to top 1" thick C.C. flooring etc including, curing, excavation, back filling & disposal of surplus earth as directed by the Engineer Incharge.	12	2000/-	Each	24000/-
19	P/F RCC main hole cover of 3" thickness embedded with angle iron frame 1-1/2"x1-1/2"x1-1/4" and bars of 3/8" dia mild steel placed at 6" i/c both way i/c handle in centre for lifting poured with C.C. 1:2:4 in/c curing, finishing etc complete.	144	1000/-	P/Sft	144000/-
20	Removing debris from Building in/c collecting from different floors, throwing to stair to ground floor at proper place and then loading on truck and throwing out of city government premises, fuel & hire charges of truck, loading & unloading etc complete	4	10,000/-	P/Truck	40,000/-
		Total Amount of Part (D)			2265,244/-

Grand Total amount in Rupees (A+B+C+D)

Grand Total amount in Rupees

Or say in Million

34734115

TERMS AND CONDITIONS

1. Any typographical errors in the Schedule B are subject to the correction with Reference to the Schedule of rate General
2. Arbitration clause stands deleted from the agreement.
3. No premium shall be paid on a Non schedule items.
4. 100% Well Graded crushed bajri shall be used in items of work without any extra payment.
5. All sample of items should be got approved by the Engineer Incharge.

[Handwritten signatures]

(HAFIZ SAFDAR SHAIKH)
Assistant Engineer,
CPO, Sindh, Karachi

**OFFICE OF THE DEPUTY INSPECTOR GENERAL OF POLICE,
TRAFFIC (LICENSING & TRAINING), KARACHI
11TH ZAMZAMA STREET (ADJACENT DL BRANCH), CLIFTON, KARACHI**

To,

M/S. A.M. Memon &
Brother

GR No. 04

Date: 21/2/18

- ▲ Due date: 06-02-2018
- ▲ Time of Opening: 15:00 HRS
- ▲ Place of Opening: Office of DIGP Traffic (L&T) 11th Zamzama Street Clifton Karachi.

Name of work: REPAIR & RENOVATION WORK OF DRIVING LICENSE BRANCH
HYDERABAD.

1. Name of firm A.M. Memon & Brother
2. Address H. office Adul Majed Mir Hussain
Abul. M uhallo Matiti
3. Full name of bidder
With CNIC#, Address
Phone Landline/Cell. 0301-3509124
4. Person/representation to whom contact with
CNIC No. Landline/Cell No. 41305-1261438-9
5. NTN Number 2788387-6
6. Category of Registration
with limit C-6 - (25-M)
7. Validation of Registration 30-6-2018
8. Schedule "B" form may be
attached. R. 4975608/-
9. Cost of work Rs. 160,000/-
10. Earnest Money Rs. 160,000/-
11. Pay order No & Date 1524084 Bank Islami Pakistan
Dt: 03-02-2018
12. Name of Bank with Branch Code Bank Islami Pakistan
13. Signature & Seal [Signature]
14. **NOTE.** The above work of Repair & Renovation would be done subject to availability of fund.

[Signature]

[Signature]
(IMRAN AHMED KHAN)

DSP/Admin

For Deputy Inspector General of Police
Traffic Licensing & Training
Karachi

Name of work: REPAIR / RENOVATION WORKS FOR DRIVING LICENSE BRANCH, HYDERABAD.

SCHEDULE BOOK DOCUMENT


WORKS SCHEDULE ITEMS PART (A):

O	Descriptions	Quantity	Rate	unit	Amount
	Dismantling cement block masonry. (SI.14 / P-10).	240.339	1134.38	%Cft	2726.357548
	Removing door with chowkats.(SI.33-a /P-12).	4	142.18	Each	568.72
	Removing window and sky light with chowkats (33-b P/12).	12	102.85	P.No.	1234.2
	Scraping (b) Ordinary distemper oil bound distemper or Paint on Walls. (SI.54-(b)/ P-13).	8749	226.88	%Sft	19849.7312
	Dismantling glazed or encaustic tiles etc (SI.55 / P-13).	1269.71	786.5	%Sft	9986.26915
	Dismantling cement concrete plain 1:4:8. (SI.19-a/P-10)	366.045	1663.75	%Cft.	6090.073688
	Providing and laying 1: 3: 6 Cement concrete solid Block masorany wall above 6" in thickness set in 1: 6 cement mortar in G.F ground floor superstructure including raking out joints & curing etc. complete. (SI.23 / P-19).	457.59	14621.44	%Cft.	66906.2473
	Applying floating coat of Cement 1/32" thick.(SI.14/P-53).	5546.56	660	%Sft	36607.296
	Cement plaster 1:4 upto 12' height (c) 3/4" thick (SI-11-C/P-52)	5546.56	3015.76	%Sft	167270.9379
0	Distemping two coats (SI.24c / P-54)	1953.42	1079.65	%Sft	21090.09903
1	Preparing the surface & painting with matt finish paint of approved make to old matt finish surface. B). 2nd & subsequent coat.(SI.37(A+B+B) / P-55).	4981.52	2499.76	%Sft	124526.0444
2	Providing & fixing colour crete to wall surface to provide, durable crust and aesthetics having thickness upto 3/4" with specified colour having water, fire and termite resistance (upto 20'-0 height). (SI.44/P-63).	5562.8	6319.5	%Sft	351541.146
3	First class deodar wood wrought joinery in doors and windows etc, fixed in position including chowkats hold fasts hinges, iron tower bolts, chocks cleats, handles and cords with hooks, etc. Deodar paneled or paneled and glazed, or fully glazed. (b) 1 3/4" thick. (SI.7 (b)/P-65).	91	902.93	P/Sft	82166.63
4	P/F cement paving blocks flooring having size 197x97x60 (mm) of city / quddra / cobble shape with having strength b/w 5000 psi to 8500 psi in/c filling the joints with hill sand and laying in specified manner / pattern and design etc complete. (SI-71/P-49)	1464.18	199.77	P/Sft	292499.2386
5	P/F angle iron vertical Plats for barbed wire fencing of size 2"x2" 1/4" embedded in RCC / Masonry pillars in/c making cuts / holders @ 12" in/c fixing in pillars by chiseling and filling the with cement sand mortar, spraining & finishing the surface (8 P / 95).	173.33	169.18	P/Rft	29323.9694
6	P/F barbed wire fencing with 12 guage -4 points @ 6" apart barbed wire i/c straightening & fixing in angle iron vertical posts. (SI-9/P- 96)	1039.98	8.38	P/Rft	8715.0324
17	R.C.C. spout including fixing in position 2-1/2x6"x5" (SI.14/P-18)	8	211.75	P/Nos	1694
Total Amount Part (A):					1222795.993
<i>Subt 2% below</i>					24455/-
<i>Total B.</i>					1198340/-

CTRIC WORKS SCHEDULE ITEMS PART (B):

NO	Descriptions	Quantity	Rate	unit	Amount
1	Wiring for plug point with 3/.029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required.(SI.126 / P-15).	100	985	P.Point	98500
2	Providing & laying (MAIN or SUB MAIN) PVC insulated with size 2-3/.029 copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required.(SI.8 / P-2).	650	173	P.Meter	112450

Page 1



Providing & laying (MAIN or SUB MAIN) PVC insulated with size 2-3 / .36 copper conductor in ¾" dia PVC conduit recessed in the wall or column as required. (SI.9 / P-2)	480	191	P.Meter	91680
Providing & Fixing three pin 10 / 15 Amp Plug & Socket.(SI.224 / P-33).	24	151	Each	3624
Providing & Fixing three pin 5 Amp Plug & Socket.(SI.226 / P-33).	24	151	Each	3624
Providing & fixing three pin 10/15 amp plug & socket flush type.(SI.227 / P-33).	24	162	Each	3888
P/F ammeters size 96/96mm Direct 15A, 30A,50A,60A, & 100A as required & as per instruction of EI. (SI.284/P-41)	2	1054	P/ No.	2108
P/F holder for 125 watts light @ as per site requirement & instruction of Engineer Incharge. (SI.189/P-29)	24	203	P/ No.	4872
P/F circuit breaker 6,10,15,20,30,40,50, & 63 amp DP (TB-5S) on prepared board as required. (SI.204/P-31)	4	2456	Each.	9824
Providing & fixing one way SP 5-Amp switch surface type.(SI.216 / P-33).	12	34	Each	408
Providing & fixing one way SP 5amp switch flush type (33/219)	12	54	P/ No.	648
P/F two way SP 5-amp switch flush type (SI.220/P-33)	12	55	P/No	660
Providing & fixing one way SP 10 / 15amp switch surface type.(SI.218 / P-33).	2	58	Each	116
P/F voltmeter size 96/96 mm 500 volt as required & as per	2	999	Each	1998
Total amount of Part (B):				334400

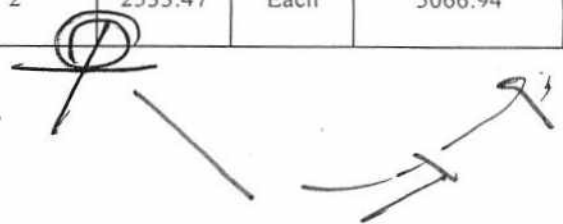
Deduct 2% below 6688

ARY WORKS SCHEDULE ITEMS PART (C):

Total K. 327712/-

D	Descriptions	Quantity	Rate	unit	Amount
	S/F soap tray of made plastic of superior quality and design with fine finishing with CP screws etc complete.	2	169.4	Each	338.8
	Providing & fixing chrome lated brass towel rail complete with brackets fixing on wooden cleats with 1" long c.p brass screws.(II) Towel rail 30" long. (a) ¾" dia round or square (Standard Pattern). (SI.01-II+a / P-07).	2	1082.95	Each	2165.9
	(a) S/Fixing long bib-cock of superior quality with c.p head ½" dia. (SI.13-a / P-19).	4	1109.46	Each	4437.84
	Providing & fixing European white glazed earthen ware wash down W.C pan complete with and in/c the cost of white/black plastic seat (Best Quality) and lid with C.P. brass hinges and buffers, 3 gallons white glazed earthen ware low level flushing cistern with siphon fitting 1-1/2" dia white porcelain enameled flush bend ¾" dia and making requisite number of holes in walls, plinth and floor for Pipe connections and making good in cement concrete 1:2:4 (Foreign Quality).(SI.5 / P-2).	2	11477.4	Each	22954.8
	P/L 24"x18" bevalled edge mirror of Belgium glass complete with 1/8" thick hard board and CP screws fixed to wooden pleat (b) superior quality (SI3-b/P-07)	2	2376	P/No	4752
	Providing & fixing 6"x2" or 6"x3" C.I floor trap of the approved self cleaning design with a C.I screwed down granting with or without a vent arm complete with & l/c making requisite number of holes in walls, plinth & floor for Pipe connections & making good cement concrete 1: 2: 4. (SI.20 / P-06).	4	2042.43	Each	8169.72
	Add extra for labour for providing & fixing of earthen ware pedestal white or coloured glazed (Foreign or Equivalent).(SI.11 / P-3).	2	2533.47	Each	5066.94

Page 2







S/F fiber glass tank of approved quality & design and wall thickness as specified in/c cost of nuts bolts and fixing in plate form of cement concrete 1:3:6 and making connection for inlet & out let & over flow pipes etc complete. (SI.3-C /P-21) 500 gallons	2	37505.42	Each	75010.84
(b) Supplying / Fixing wash basin mixture of superior quality with C.P head ½" dia. (SI.14-b / P-19).	2	3179	Each	6358
(a) Supplying & fixing C.P Muslim Shower with double Bib cock & ring Pipe etc complete. (SI.19(a) / P-19).	2	3432	Each	6864
Providing & fixing in position nyloon connections complete with ½" dia, brass stop cock with pair of brass nuts and lining joints to nyloon connection. (SI. 23 / 06).	4	447.15	Each	1788.6
Providing & fixing 24" x 18" lavatory basin in white glazed earthen ware complete with & in/c the cost of W.I or C.I cantilever brackets 6 inches built into walls, painted white in two coats after a primary coat of red lead paint a pair of ½" dia rubber plug & chrome plated brass chain 1-1/4" dia, malleable iron or brass unions and making requisite number of holes in walls, plinth & floor for Pipe connections and making good in cement concrete 1:2:4 (Foreign or Equivalent).(SI.10 / P-3).	2	4928	Each	9856
Cancelled C.P. fittings of Superior quality for tiles Bath Rooms.(b) S/Fixing cancelled stop cock of superior quality with C.P. head ½" dia.(SI.11(b) / P-18).	2	509.74	Each	1019.48
(a). S/Fixing canceled tee-stop cock of superior quality with C.P head ½" dia. (SI.12-a / P-18).	2	843.92	Each	1687.84
Total Amount of Part (C):				150470.76



SCHEDULE ITEMS PART (D):

NO	Descriptions	Quantity	Rate	unit	Total Amount
					147461
			Deduct 2% below		3009
					147461
	Supplying and fixing in position Aluminum channels framing for sliding windows & ventilators of Lucky or equivalent made with 5mm thick tinted glass glazing (Belgium) and aluminum fly screen, handles, stoppers and locking arrangement etc complete. (b) Deluxe Model (Bronze of Champion color)	336	Nineteen hundred 1900/2	P/Sft	638400/2
	Supplying and fixing in position Aluminum channels framing for hinged doors of Lucky or equivalent made with 5mm thick tinted glass glazing (Belgium) and ALPHA (Japan) locks in/c handles, stoppers etc complete. (b) Deluxe Model (Bronze of Champion color)	56	1500/2	P/Sft	84000/2
	P/F Gypsum board pelmet to be hanged from ceiling in specified shape and design as approved by the consultant. This in/c cutting the existing Gypsum board false ceiling in proper shape, hanging the structure by aluminum angle 1"x1" @ 3'-0 apart drilled and screwed in RCC slab, making hanging frame by using Aluminum U-channel section 1-1/2" wide in 18"x18" rafters and fixing Gypsum board sheet with chips and screws. Then filling the joints & screws holes with plastic mesh and plaster of Paris and making surface smooth as directed by the Engineer Incharge.	1897.42	250/2	P/Sft	474250/2
	P/L Porcelain Master granite tiles glazed or matt glazed, jointed in white cement and laid over 1:2 grey cement sand mortar ¾" thick in/c finishing & filling of joints with slurry of white cement or tile grout in desired shape in/c cutting of tiles to proper profile (on floor or facing) size 18"x18"x1/4" or 16"x16"x1/4"	1897.42	Four hundred and fifty eight 458/2	P/Sft	869100/2

Page 3

	Water proofing of roof by means of chemical by using latex solution by supplying 1 st coat of uni bond 2860 adhesive, 2 nd coat of Aqua seal 2010/11 3 rd coat of uni-bond+aqua seal mixture then filling the cracks with uni-bond then supplying 2/3 coats as per requirement of aqua seal to have rubber like surface etc complete as directed by the Engineer Incharge.	1897.42	125/2	P/Sft	237125
	P/F fine quality roller type blind with approved design false & in/c steel angle fixing with steel screws as per window as required @ site as directed by the Engineer Incharge.	490	17%	P/Sft	83300%
	S/F LED spot light China make with 7 Nos lamps each 6 watts fitted on walls, ceiling of approved quality as directed by the Engineer Incharge.	120	120/2	P/Sft	144000%
	S/F hydraulic door clouser imported quality as directed by the Engineer Incharge.	4	3000%	Each	12000%
	P/Fixing fiber glass shade with fiber glass sheet 2-3mm thick including necessary frame work of angle iron or G.I pipe & fixing sheet with screws in proper design & shape as directed by Engineer Incharge.	732.09	100/2	P/Sft	73200%
0	P/F wall bracket fan 18" dia of approved make & quality (Royal/Pak, Millat or equivalent) in/c fixing on wall as directed by the Engineer Incharge	12	4000%	Each	48000%
1	P/F ceiling fan 56" sweep Pak/Royal/GFC or equivalent deluxe model in/c carriage from shop to site of work, fixing & necessary lead connection as directed by the Engineer Incharge.	6	5000%	Each	30000%
2	P/F fan dimmer of ceiling fan Pak / Royal / GFC of approved quality & make as directed by the Engineer Incharge	6	270/2	Each	1620%
3	P/F CPVC water supply pipe of AGM or Pak Arab or equivalent with all necessary fittings like elbow, bend, tee etc. This includes fixing on walls with clamps or Jubilee clips upto height of 50'-0 in vertical or horizontal position using Jhoola or long ladder or scaffolding and jointing pipe & fittings with approved solvent / JTG solution. The rate includes all cost of labour, material, and cartage, as directed by Engineer Incharge 1/2" dia	200	110/2	P/Rft	22000%
4	P/F CPVC water supply pipe of AGM or Pak Arab or equivalent all necessary fittings like elbow, bend, tee etc . This includes fixing on walls with clamps or Jubilee clips upto height of 50'-0 in vertical or horizontal position using Jhoola or long ladder or scaffolding and jointing pipe & fittings with approved solvent / JTG solution. The rate includes all cost of labour, material, and cartage, as directed by Engineer Incharge 3/4" dia	180	125/2	P/Rft	22500%
15	P/F UPVC water supply pipe of AGM or Pak Arab or equivalent without fittings which will be paid separately. This includes fixing on walls with clamps or Jubilee clips upto height of in vertical or horizontal position using Jhoola or long ladder or scaffolding and jointing pipe & fittings with approved solvent / JTG solution. The rate includes all cost of labour, material, and cartage, as directed by Engineer Incharge 2" dia	220	150/2	P/Rft	35200%

16	P/F UPVC water supply pipe of AGM or Pak Arab or equivalent with all necessary fittings. This includes fixing on walls with clamps or Jubilee clips upto height of in vertical or horizontal position using Jhoola or long ladder or scaffolding and jointing pipe & fittings with approved cement solvent / JTG solution. The rate includes all cost of labour, material, and cartage, as directed by Engineer Incharge 1" dia	150	140% P/Rft	21600%
17	P/F RCC pipe 12" dia with collar of class *B* for sewerage line in/c excavating the trench of required dia and depth and then laying pipe in trench jointing and refilling excavated stuff as directed by the Engineer Incharge.	380	600% P/Rft	22800%
18	Construction of manhole or inspection chamber 2'-0x2'-0 & upto 5'-0" inside depth dimension for required dia of circular sewer with walls of solid block masonry 1:3:6 set in 1:6 cement sand mortar 6" thick with 6" thick C.C. 1:4:8 in foundation, 1/2" thick plaster in 1:4 ratio to all inside wall surface & to top 1" thick C.C. flooring etc including, curing, excavation, back filling & disposal of surplus earth as directed by the Engineer Incharge.	12	1500% Each	180000%
19	P/F RCC main hole cover of 3" thickness embedded with angle iron frame 1-1/2"x1-1/2"x1-1/4" and bars of 3/8" dia mild steel placed at 6" i/c both way i/c handle in centre for lifting poured with C.C. 1:2:4 in/c curing, finishing etc complete.	144	100% P/Sft	14400%
20	Removing debries from Building in/c collecting from different floors, throwing to stair to ground floor at proper place and then loading on truck and throwing out of city government premises, fuel & hire charges of truck, loading & unloading etc complete	4	21000% P/Truck	84000%
Total Amount of Part (D)				3302095

Grand Total amount in.Rupees (A+B+C+D) 4975608
 Grand Total amount in Rupees.
 Or say in Million

TERMS AND CONDITIONS

1. Any typographical errors in the Schedule B are subject to the correction with Reference to the Schedule of rate General
2. Arbitration clause stands deleted from the agreement.
3. No premium shall be paid on a Non schedule items.
4. 100% Well Graded crushed bajri shall be used in items of work without any extra payment.
5. All sample of items should be got approved by the Engineer Incharge.

[Handwritten signatures and initials]

(HAFIZ SAIFDAR SHAIKH)
 Assistant Engineer,
 CPO, Sindh, Karachi