



# KARACHI WATER & SEWERAGE BOARD

OFFICE OF THE CHIEF ENGINEER (IP&D)

## BID EVALUATION REPORT

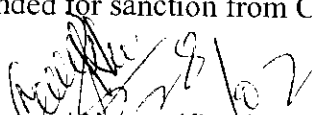
1	Name of Procuring Agency :	KARACHI WATER & SEWERAGE BOARD
2	Tender Reference No:	SPPRA Serial No.18907 I.D No. _____/2014
3	Tender Description/Name of Work/Item:	PROVIDING & LAYING 15" DIA, 12" DIA & 8" DIA R.C.C. RUBBER RING SEWER BY REPLACEMENT OLD, CHOKED AND UNSERVICEABLE SEWER LINE AT VARIOUS PLACES AND INTERMEDIATE MANHOLES AT UC'S 1,2,5,6 & 7 SADDAR OLD CITY DISTRICT SOUTH
4	Method of Procurement:	Single Stage (One Envelop)
5	Tender Published:	Through Web Site
6	Total Bid Documents Sold:	3 Nos
7	Total Bid Received:	3 Nos
8	Technical Bid Opening Date (if applicable):	N/A
9	No. of Bid Technically Qualified (if applicable)	N/A
10	Bid (s) Rejected:	01 No
11	Financial Bid Opening Date:	27-02-2014


## 12 BID EVALUATION REPORT

S #	Name of Firm / Bidder	COST OFFERED BY THE BIDDER	RANKING IN TERMS OF COST	COMPARISON WITH ESTIMATED COST	REASON FOR ACCEPTANCE/ REJECTION	REMARKS
1.	M/s.C & C Enterprises	Rs.9,23,622/-	1 <sup>st</sup> Lowest	@0.025%Below	Substantially Responsive	P.O # 10161251 dt: 27-02-2014 from HBL Sindh Secretariat Branch Karachi Rs.20,000/-
2.	M/s.Irfan & Co.	Rs.9,24,461/-	2 <sup>nd</sup> Lowest	@0.066%Above	Substantially Responsive	P.O # 1236222 dt: 19-02-2014 from KASB Bank Khalid Bin Waleed Branch Karachi Rs.22,000/-
3	M/s.P.M Zayyan Const. Co.	Not Quoted	-	-	Un-Responsive	Pay Order not Attached


The all concerned bidders are being informed accordingly.

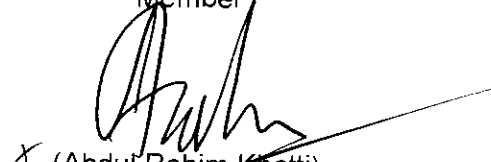
M/s. C & C Enterprises declared as the lowest responsive bidder by the Committee and recommended for sanction from Competent Authority.

  
(Muhammad Nawaz Khan)  
Accounts Officer (Distt. South)  
Member / Secretary

  
(Saif-ul-Haque)  
Additional Director Internal  
Audit – KMC Member

  
(Maqsood Ahmed Shaikh)  
Superintending Engineer (KMC)  
Member

  
(Muhammad Arif)  
Chief Engineer (Distt. South)  
Member

  
(Abdul Rahim Khattai)  
Chief Engineer (IPD)  
Convener

**COMPARATIVE STATEMENT**

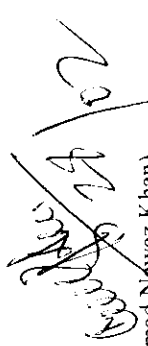
**Name of Work: PROVIDING & LAYING 15" DIA, 12" DIA & 8" DIA R.C.C. RUBBER RING SEWER BY REPLACEMENT OLD, CHOCKED AND UNSERVICEABLE SEWER LINE AT VARIOUS PLACES AND INTERMEDIATE MANHOLES AT UC'S 1,2,5,6 & 7 SADDAR OLD CITY DISTRICT SOUTH**


Item No	Description of Work	Estimated Cost				M/s.C&C Enterprises		M/s.Irfan & Co.		
		Quantity	Rate	Per	Amount	Rate	Amount	Rate	Amount	
1	Scarifying the Existing road Surface.	2220.00	Sft	116.16	%Sft	2,578.75	116.00	2,575.20	116.00	2,575.20
2	Dismantling and removing road metalling.	3330.00	Cft	605.00	%Cft	20,146.50	605.00	20,146.50	605.00	20,146.50
3	Excavation for pipe line in trenches, pits in all kind of surum i/c trimming and dressing sides to true alignment and shape, leveling of beds of trenches to correct level and grade, cutting joint holes and disposal of surplus earth within one chain as directed by Engineering Incharge. Providing fence guard, light, flags and temporary crossing for non vehicular traffic where ever required lift upto 5' ft (1.52m) and lead upto one chain (30.5m). 0' - 5'	7770.00	Cft	4650.00	%Cft	36,130.50	4650.00	36,130.50	4605.00	35,780.85
	5'-8'	6660.00	Cft	5200.00	%Cft	34,632.00	5200.00	34,632.00	5200.00	34,632.00
	8'-11'	1220.00	Cft	5750.00	%Cft	7,015.00	5750.00	7,015.00	5750.00	7,015.00
4	Full hire charges of pumping set per day inclusive of wages of driver and assistant fuel or electric energy platform for placing the pump etc at lower depth with suction and delivery pipes for pumping out water found at various depth from trenches including the cost of erection and dismantling after completion of the job. Hire charges of pumping set of upto 10 HP from 10ft depth.	80.00	Days	1500.00	P/Day	120,000.00	1500.00	120,000.00	1500.00	120,000.00
5	Providing, Laying RCC Pipe with Rubber Ring joint and fitting in trenches including cutting, fitting and jointing with rubber ring i/c testing with rubber ring i/c testing with water to specified pressure.	100.00	Rft	206.00	P/Rft	20,600.00	206.00	20,600.00	206.00	20,600.00
	08" dia	550.00	Rft	367.00	P/Rft	201,850.00	367.00	201,850.00	369.00	202,950.00
	12" dia	80.00	Rft	436.00	P/Rft	34,880.00	436.00	34,880.00	437.00	34,960.00
	15" dia									
6	Providing Manhole 4ft internal diameter without RCC Manhole Cover 5' clear depth cast in situ 1:2:4 9" thick wall 1:4:8 cement concrete in 6' dia and 6" thick in foundation 1:2:4 C.C in benching 1/2" thick cement plastering with 1:3 cement mortar on inside wall surface of channel and benching to top including making required numbers of main and branches channels 3/4" dia bars M.S foot rest at 12" C/C including cost of excavation in all kind of soil, backfilling and disposal of excavated stuff etc. complete as per design instruction of the Engineer Incharge including C.1 Frame 15 Kg.	12.00	Nos	14529.29	Each	174,351.48	14529.29	174,351.48	14529.29	174,351.48


*WMS*  
*SA*


**Name of Work: PROVIDING & LAYING 15" DIA, 12" DIA & 8" DIA R.C.C. RUBBER RING SEWER BY REPLACEMENT OLD, CHOKED AND UNSERVICEABLE SEWER LINE AT VARIOUS PLACES AND INTERMEDIATE MANHOLES AT UC'S 1,2,3,5,6 & 7 SADDAR-OLD-CITY DISTRICT SOUTH**


Item No	Description of Work	Estimated Cost			M/s. C&C Enterprises		M/s. Irfan & Co.		
		Quantity	Rate	Per	Amount	Rate	Amount	Rate	Amount
7	Add or deduct for extra / less depth then 5' to 4' dia M/H i/c footrest.	38.50	Pt	2538.62	P/ft	97,736.87	2538.62	2538.62	97,736.87
8	Making connection with existing M/H i/c the cost of cutting of cutting holes in wall making them good in cement concrete 1:2:4 and making of required channel etc. complete.	8.00	Nos	180.00	Each	1,440.00	180.00	180.00	1,440.00
9	Refilling the excavated stuff trenches 6" thick layer i/c watering, ramming to full compaction etc complete.	18115.00	Cft	2760.00	%Cft	49,997.40	2760.00	2760.00	49,997.40
10	Sand Haro or any other source sand of the same modules of the in fineness (Hill Sand).	4529.00	Cft	2425.00	%Cft	109,828.25	2420.00	2420.00	109,601.80
11	Carriage of 100 Cft / 5 Tons of all materials like stone aggregate, spawal, coal, lime, sukhi etc B.G Rail fastening points and crossing bridge, Girders, Pipes, Sheets Rail, M.S Bars etc 1000 Nos: Maunds of fuel wood by trucks any other means owned by the Contractors. 5th Mile	877.80	Cft	714.29	%Cft	6,270.04	714.29	715.00	6276.27
12	Manufacturing and supplying 21" dia RCC Manhole Covers cast in 1:2:4 cement concrete ratio 3" inch deep at centre rein-forced with 1/2" dia tor bars at 4" c/c welded to 3/16" thick 2" wide M.S Plate two hook of 3/8" dia tor bar including compacting i/c curing and transportation within 10 miles 21" dia	7	Nos	913.63	Each	6,395.41	913.63	914.00	6,398.00
	TOTAL QUOTED / CORRECTED COST					923,852.20		923,622	924,461.37
	SAY					923,852		923,622	924,461
								1st	2nd

  
 (Muhammad Nawaz Khan)  
 Accounts Officer (Distt. South)  
 Member / Secretary

  
 (Saif-ul-Haque)  
 Addl. Director Internal Audit  
 KMC - Member

  
 (Magsood Ahmed Shaikh)  
 Superintending Engineer (K.M.C)  
 Member

  
 (Muhammad Arif)  
 Chief Engineer (Distt. South)  
 Member

  
 (Abdul Raheem (hatti))  
 Chief Engineer (D.D)  
 Convener