

SINDH PUBLIC PROCUREMENT REGULATORY AUTHORITY
CONTRACT EVALUATION FORM
TO BE FILLED BY ALL PROCURING AGENCIES FOR PUBLIC CONTRACTS OF
WORKS, SERVICES & GOODS

1 NAME OF THE ORGANIZATION/DEPTT. KARACHI WATER & SEWERAGE BOARD

2 PROVINCIAL/LOCAL GOVT/OTHER K.W.&.S.B.

3 TITLE OF CONTRACT Rehabilitation of sunk down / defective chowked 18"Ø & 12"Ø RCC Rubber Ring sewer at Hindu Massan Lyafi Nadi UC-2 & Site Metroville UC-4, Site Town.

4 TENDER NUMBER SPPRA Sr.No. 19495

5 BRIEF DESCRIPTION OF CONTRACT Rehabilitation of sunk down 18"Ø & 12"Ø sewer line in UC-2 & Site Metroville UC-4 Site Town.

6 FORUM THAT APPROVED THE SCHEME M.D. KW&SB

7 TENDER ESTIMATED VALUE Rs. 9,96,561/-

8 ENGINEER'S ESTIMATE (Attach list of buyers) Rs. 9,96,243/-

9 ESTIMATED COMPLETION PERIOD (AS PER CONTRACT) 30 days.

10 TENDER OPENED ON (DATE & TIME) 09-04-2014 at 2.30 p.m.

11 NUMBER OF TENDER DOCUMENT SOLD (Attach list of buyers) 02 (Two)

12 NUMBER OF BIDS RECEIVED 02 (Two)

13 NUMBER OF BIDDERS PRESENT AT THE TIME OF OPENING OF BIDS. 02 (Two)

14 BID EVALUATION REPORT (enclose copy). Copy attached.

15 NAME AND ADDRESS OF THE SUCCESSFUL BIDDER. M/s. Sawab Noor Khan & Bros. Mujahid Colony Barsati Nala, Nasimabad, Karachi.

16 CONTRACT AWARD PRICE

Rs. 9,96,243/-

17 RANKING OF SUCCESSFUL BIDDER IN EVALUATION REPORT (i.e. 1st, 2nd, 3rd Evaluation Bid).

Ist. M/s.Sawab Noor Khan Brothers.
IIInd. M/s.Yasin Enterprises.

18 METHOD OF PROCUREMENT USED (Tick one)

- a) Single Stage One Envelope Procedure. Domestic / local
- b) Single Stage Two Envelope Procedure. NIL
- c) Two Stage Bidding Procedures. NIL
- d) Two Stage Two Envelope Bidding Procedure NIL

PLEASE SPECIFY IF ANY OTHER METHOD OF PROCUREMENT WAS ADOPTED i.e EMERGENCY, DIRECT CONTRACTING/NEGOTIATION ETC. WITH BRIEF REASONS:

19 APPROVING AUTHORITY FOR AWARD OF CONTRACT.

M. D. KW&SB.

20 WHETHER THE PROCUREMENT WAS INCLUDED IN ANNUAL PROCUREMENT PLAN?

Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

21 ADVERTISEMENT:

i) SPPRA Website
(If yes, give date and SPPRA's tender number)

Yes	<input checked="" type="checkbox"/>	SPPRA Sr.No. 19495
No	<input type="checkbox"/>	

ii) News Papers
(If yes, give names of newspapers and dates)

Yes	<input type="checkbox"/>	
No	<input checked="" type="checkbox"/>	

22 NATURE OF CONTRACT

Local	<input checked="" type="checkbox"/>	Int.	<input type="checkbox"/>
-------	-------------------------------------	------	--------------------------

23 WHETHER QUALIFICATION CRITERIA WAS INCLUDED IN BIDDING/TENDER DOCUMENT?
(If yes, enclose a copy)

Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

24 WHETHER EVALUATION CRITERIA BID WAS INCLUDED IN BIDDING/TENDER DOCUMENTS?
(If yes, enclose a copy).

Yes		No	✓
-----	--	----	---

25 WHETHER APPROVAL OF COMPETENT AUTHORITY WAS OBTAINED FOR USING A METHOD OTHER THAN OPEN COMPETITIVE BIDDING?

Yes		No	✓
-----	--	----	---

26 WAS BID SECURITY OBTAINED FROM ALL THE BIDDERS?

Yes	✓	No	
-----	---	----	--

27 WHETHER THE SUCCESSFUL BID WAS LOWEST EVALUATED BID/BEST EVALUATED BID (in case of Consultancies).

Yes	✓	No	
-----	---	----	--

28 WHETHER THE SUCCESSFUL BIDDER WAS TECHNICALLY COMPLIANT

Yes	✓	No	
-----	---	----	--

29 WHETHER NAMES OF THE BIDDERS AND THEIR QUOTED PRICE WERE READ OUT AT THE TIME OF OPENING OF BIDS?

Yes	✓	No	
-----	---	----	--

30 WHETHER COPY OF EVALUATION REPORT GIVEN TO ALL BIDDERS?
(Attach copy of the bid evaluation report).

Yes	✓	No	
-----	---	----	--

31 ANY COMPLAINTS RECEIVED
(If yes, result thereof)

Yes	
No	✓

32 ANY DEVIATION FROM SPECIFICATION GIVEN IN THE TENDER NOTICE / DOCUMENT.
(If yes, give details).

Yes	
No	✓

33 WAS THE EXTENSION MADE IN RESPONSE TIME?
(If yes, give detailed reasons).

Yes	
No	✓

34 DEVIATION FROM QUALIFICATION CRITERIA
(If yes, give detailed reasons).

Yes	
No	✓

35 WAS IT ASSURED BY THE PROCURING AGENCY THAT THE SELECTED FIRM IS NOT BLACK LISTED?

Yes	✓	No	
-----	---	----	--

36 WAS A VISIT MADE BY ANY OFFICER/OFFICIAL OF THE PROCURING AGENCY TO THE
(If yes, enclose a copy)

Yes		No	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

37 WERE PROPER SAFEGUARDS PROVIDED ON MOBILIZATION ADVANCE PAYMENT IN THE

Yes		No	<input checked="" type="checkbox"/>
-----	--	----	-------------------------------------

38 SPECIAL CONDITIONS, IF ANY.
(If yes, give Brief Description).

Yes	
No	<input checked="" type="checkbox"/>

Signature & Official Stamp of



Authorized Officer

Syed Zafar Hussain
Executive Engineer
SITE Town (SAW) K-558

FOR OFFICE USE ONLY

SPPRA, Block-No. 8, Sindh Secretariat No. 4-A, Court Road, Karachi.
Tele: 021-9205356, 021-9205369 & Fax 021-9206291.

OFFICE OF THE EXECUTIVE ENGINEER (Sewerage), SITE TOWN, WEST.
KARACHI WATER & SEWERAGE BOARD.

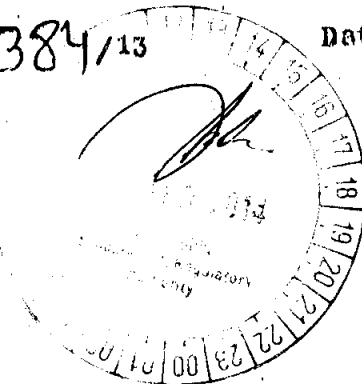
SITE TOWN OFFICE, ADJ. RASHID MINHAS SCHOOL NEAR URDU BAZAR
NAZIMABAD NO. 1, KARACHI.

NO. EE (Sew) / S. T. West / 384 / 13

Date: 15/4/2014

To,

The Director (CR),
SPPRA, Barack No. 8,
Sindh Secretariate No. 4-A,
Karachi.

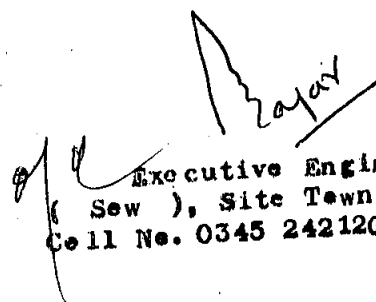


Subject: Submission of Bid Evaluation Report and Bid Opening Report (Original) & Comparative Statement (Original)

Name of work:

Rehabilitation of sunk down defective/chouked 18"Ø & 12"Ø RCC Rubber Ring sewer at Hindu Massan Lyari Nadi UC-2, Site Metreville UC-4, Site Town.

Enclosed please find herewith the Original Bid Evaluation Report and Bid Opening Report of above noted work is submitting for Upload on SPPRA website which opened on dated 09-04-2014 vide SPPRA Sr. No 19495 I.D. _____


Executive Engineer
(Sew), Site Town, KW&SB
Cell No. 0345 2421207

Copy to :

- 01: C.E. (I.P.D), KW&SB.
- 02: C.E. West, KW&SB.
- 03: S.E. Site Town, KW&SB.
- 04: Office Copy.


KARACHI WATER & SEWERAGE BOARD
OFFICE OF THE CHIEF ENGINEER (IP&D)


BID EVALUATION REPORT


1	Name of Procuring Agency	KARACHI WATER & SEWERAGE BOARD
2	Tender Reference No	SPPRA Serial No.19495 I.D No. /2014
3	Tender Description/Name of Work/Item	REHABILITATION OF SUNK DOWN/DEFECTIVE/ CHOWKED 18" DIA & 12" DIA RCC RUBBER RING SEWER AT HINDU MASSAN LYARI NADI UC-02 SITE METROVILE UC-04 SITE TOWN
4	Method of Procurement	Single Stage (One Envelop)
5	Tender Published	Through Website
6	Total Bid Documents Sold	2 Nos
7	Total Bid Received	2 Nos
8	Technical Bid Opening Date (if applicable)	N/A .
9	No. of Bid Technically Qualified (if applicable)	N/A .
10	Bid (s) rejected	N/A
11	Financial Bid Opening Date	9/4/2014
12	Bid Evaluation Report	

S #	NAME OF FIRM OR BIDDER	COST OFFERED BY THE BIDDERS	RANKING IN TERMS OF COST	COMPARISON WITH ESTIMATED COST	REASON FOR ACCEPTANCE/ REJECTION	REMARKS
1	M/s. Sawab Noor Khan & bros	Rs. 996,243/-	1st Lowest	@ 0.03197% Below	Substantially Responsive	P.O # 5166967 Dt:18-03-2014 Rs. 20,000 NIB Bank University Road Br
2	M/s. Yasin Enterprises	Rs. 997,036/-	2nd Lowest	@ 0.0476% Above	Substantially Responsive	P.O # 10772250 Dt:27-01-2014 Rs. 20,500 ABL Paria Street Br


The all concerned bidder are being informed accordingly.
The E.E Concerned for compliance of rule 45 of SPPRA 2010 M/s. Sawab Noor Khan & Bros. declared as the lowest responsive bidder by the Committee and recommended for Sanction from Competent Authority.


(Arshad Ali)
Accounts Officer (West)
Member/Secretary


(Saif-ul-Haque)
Additional Director Internal
Audit - KMC Member


(Maqsood Ahmed Shaikh)
Superintending Engineer (KMC)
Member


(Ovais Malik)
Chief Engineer (West)
Member


(Abdul Rahim Khattai)
Chief Engineer (IPD),
(Convener)

No. 19495

Mode of Procurement:

Single Stage Single Envelope.

Subject of Work:

REHABILITATION OF SUNK DOWN/DEFECTIVE/ CHOWKED 18" DIA
& 12" DIA RCC RUBBER RING SEWER AT HINDU MASSAN LYARI
NADI UC-02 SITE METROVILE UC-04 SITE TOWN

MINUTES OF BID OPENING MEETING.

A meeting of the procurement committee of this department was held on 09-04-2014 for opening the bids received in respect of subject NIT till deadlines of submission. The meeting was attended by all / following members of the procurement committee and the representative of bidders. (Attendance sheet is enclosed).

2. Two bidders submitted their bids till the deadline of submission.

- i. M/s. Sawab Noor Khan & Bros
- ii. M/s. Yasin Enterprises


3. The bids were opened at 2:00 P.M in the presence of the above mentioned participants and the rates quoted by bidders were read aloud and encircled by Chairman of the Procurement Committee.

S.No	Name of Firm	Quoted Price	Amount of Bid Security	Pay Order No. / Date
01	M/s. Sawab Noor Khan & Bros.	Rs. 996,240/-	Rs. 20,000	P.O # 5166967 Dt:18-03-2014 NIB Bank University Road Br
02	M/s. Yasin Enterprises	Rs.997,034/-	Rs. 20,500	P.O # 10772250 Dt:27-01-2014 ABL Paria Street Br


4. The bids do not contain any over-writing or cutting.


5. The committee shall examine all the bids as per the qualification / eligibility criteria provided in the bidding document and verify the documents and bid security submitted by the bidders (if required).


The meeting ended with the note of thanks to and from the chair.


(Arshad Ahmed)
Accounts Officer (West)
Member / Secretary


(Ovais Malik)
Chief Engineer (West)
Member


(Saif-ul-Haque)
Additional Director Internal
Audit – KMC Member


(Maqsood Ahmed Shaikh)
Superintending Engineer (KMC)
Member


(Abdul Raheem Khattak)
Chief Engineer (IPD)
Convener

BIDDERS QUALIFICATION REPORT
Rule-46(i) (a) Single Stage One Envelope Procedure

Opening Date: 09-04-2014


Name of Work: **REHABILITATION OF SUNK DOWN/DEFECTIVE/ CHOWKED 18" DIA & 12" DIA RCC RUBBER RING SEWER AT HINDU MASSAN LYARI NADI UC-02 SITE METROVILE UC-04 SITE TOWN**


Name of Bidder M/s: Sawab Noor Khan & Bros.


S.No	Eligibility	Yes	No
1	Relevant experience	/	
2	Turnover Statement	/	
3	Registration with Income Tax	/	
4	Registration with Sales Tax where applicable.	N/A	


Name of Bidder M/s: Yasin Enterprises

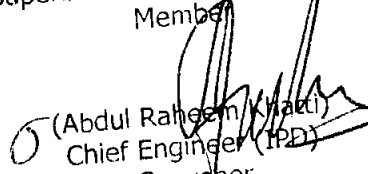
S.No	Eligibility	Yes	No
1	Relevant experience	/	
2	Turnover Statement	/	
3	Registration with Income Tax	/	
4	Registration with Sales Tax where applicable.	N/A	


 (Arshad Ali) 09/14
 Accounts Officer (West)
 Member / Secretary


 (Ovais Malik)
 Chief Engineer (West)
 Member


 (Saif-ul-Haque)
 Additional Director Internal
 Audit – KMC Member


 (Maqsood Ahmed Shaikh)
 Superintending Engineer (KMC)
 Member


 (Abdul Raheem Nadi)
 Chief Engineer (IPD)
 Convener

COMPARATIVE STATEMENT

NAME OF WORK: REHABILITATION OF SUNK DOWN/DEFECTIVE/ CHOWKED 18" DIA & 12" DIA RCC RUBBER RING SEWER AT HINDU MASSAN LYARI NADI UC-02 SITE METROVILE UC-04 SITE TOWN

S.No	Description of Work	Engineer's Estimate				M/s. Sawab Noor khan & Bros		M/s. Yasin Enterprises	
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount
1	Dismantling and removing road mantling	1489.00	605.00	% Cft	9,008.45	605.00	9,008.45	605.00	9,008.45
2	Excavation for pipe line m trenches, and pits in all kind of soils of murum i/c trimming and dressing sides to true alignment and shape leveling of beds of trenches to correct level and grade, cutting joint holes and disposal of surplus earth within a one chain as directed by Engineer Incharge. Providing fence guards, lights, flags and temporary crossings for non-vehicular traffic where ever required upto 5 ft. (1.52m) and lead upto one chain(30.5m).	0 - 5'	4,650.00	% 0 Cft	34,619.25	4,650.00	34,619.25	4,650.00	34,619.25
		5 - 8'	5,200.00	% 0 Cft	19,219.20	5,200.00	19,219.20	5,200.00	19,219.20
		8-11'	5,750.00	% 0 Cft	10,091.25	5,750.00	10,091.25	5,750.00	10,091.25
		11-14'	6,300.00	% 0 Cft	6,577.20	6,300.00	6,577.20	6,300.00	6,577.20
3	Providing laying RCC Pipe with (Rubber Ring Joint & Fitting) in trench i/c cutting fitting and jointing with rubber ring i/c testing with water to specific pressure 18" dia 12" dia	87.00	539.00	P/Rft	46,893.00	539.00	46,893.00	540.00	46,980.00
		220.00	367.00	P/Rft	80,740.00	367.00	80,740.00	368.00	80,960.00

Handwritten notes and signatures:
 W/S
 S. Qureshi
 10/11
 [Signature]

NAME OF WORK: REHABILITATION OF SUNK DOWN/DEFECTIVE/ CHOWKED 18" DIA & 12" DIA RCC RUBBER RING SEWER AT HINDU MASSAN
 LYARI NADI UC-02 SITE METROVILLE UC-04 SITE TOWN

S.No	Description of Work	Engineer's Estimate			M/s. Sawab Noor khan & Bros		M/s. Yasin Enterprises		
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount
4	Providing MH 4ft inside with CI frame (15 kg) and 5 feet clear depth 1:2.4 cast in situ in 9 inch thick wall 1:4.8 cement concrete in 6ft dia and 6" inch thick in foundation 1:2.4 c.c in ben ching, W" thick cement plastering with 1:3 cement mortar on inside wall and surface of channel/benching i/c making required Nos of main and branch channels. 1/4" dia bar footrest at 12" C/C i/c cost of excavation of all kinds of soil, backfilling and disposal of excavated stuff etc complete, as per design and instruction of the Engineer incharge.	14.00 Nos	14,529.29	Each	203,410.06	14,529.00	203,406.00	14,529.00	203,406.00
5	Add/deduct per ft depth Full hire charges of the pumping set per day i/c of wages of driver and Assistant fuel or electric energy plate forms required for placing pumps etc at lower depth with suction and delivery pipe for pumping out water found at various depth from trenches i/c the cost of erection and dismantling after completion of the job. Hire charges of pumping set upto 10 HP pumping out water from 10 ft deep trench.	66.00 Rft	2,538.62	P/Rft	167,548.92	2,538.00	167,508.00	2,538.00	167,508.00
6		32.00 Day	1,500.00	P/Day	48,000.00	1,500.00	48,000.00	1,500.00	48,000.00

Wip
Chaudhary
10/11/14
CPD


NAME OF WORK: REHABILITATION OF SUNK DOWN/DEFECTIVE/CHOKED 18" DIA & 12" DIA RCC RUBBER RING SEWER AT HINDU MASSAN
LYARI NADI UC-02 SITE METROVILE UC-04 SITE TOWN


S.No	Description of Work	Engineer's Estimate						M/s. Sawab Noor khan & Bros		M/s. Yasin Enterprises	
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount	Rate	Amount
		7	making connection with the existing manhole i/c the cost of cutting hole in wall, making them good in C.C 1:2:4 and making required channel etc Complete.	8.00 Nos	180.00	Each	1,440.00	180.00	1,440.00	180.00	1,440.00
8	Sand haro or any other source Sand of the same modulus of the Fineness (Hill Sand)	1174.50 Cft	2,425.00	% Cft	28,481.63	2,425.00	28,481.63	2,425.00	28,481.63	2,425.00	28,481.63
9	Refilling the excavated stuff in trench 6" thick layer i/c water ramming to full Compaction etc. complete.	12287.00 Cft	2,760.00	% 0 Cft	33,912.12	2,760.00	33,912.12	2,760.00	33,912.12	2,760.00	33,912.12
10	Carriage of 100 Cft/5 tons of all materials like stone aggregate spawl, coal, lime, surkhi etc B.G rail fastening points and crossing bridge, girder pipes, sheets, rail, M.S bars etc of 1000 Nos bricks 10"X5"X5" of 1000 Nos tiles 12"X6"X2" or 150 cft of timber or 100 maunds of fuel wood by trucks or any other means owned by contractor	3142.00 Cft	804.52	% Cft	25,278.02	804.00	25,261.68	805.00	25,293.10	805.00	25,293.10
11	manufacturing and Supplying of 21" dia RCC manhole cover cost in 1:2:4 concrete ratio 3" inch deep at centre rain forced with 1/2" tor steel bars at 4" C/C welded to 3/10 thick 2 week MS plate tow hook of 3/8 dia tor bar including compacting i/o during and transportation within 10 miles 21" dia Cover	68.00 Nos	913.63	Each	54,817.80	913.50	54,810.00	914.00	54,840.00	914.00	54,840.00


Handwritten signatures and initials:
 10/10/10
 10/10/10
 10/10/10

NAME OF WORK: REHABILITATION OF SUNK DOWN/DEFECTIVE/CHOWKED 18" DIA & 12" DIA RCC RUBBER RING SEWER AT HINDU MASSAN
LYARI NADI UC-02 SITE METROVILE UC-04 SITE TOWN

S.No	Description of Work	Engineer's Estimate			M/s. Sawab Noor khan & Bros		M/s. Yasin Enterprises		
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount
12	manufacturing and Supplying of RCC Ring Slab of 21" dia inside 36" dia outside 7.5 width and 6" thick i/c 3/8" for steel bars tow concentric ring with 3/8" dia 8 Nos cross linked bars welded and two sunk type hooks coated in 1:1 1/2" 3 concrete with embedded 15 kg C.I frame in perfect position i/c transportation charges for an average lead of 20 km per trip from casting yard to Town office (A minimum of 25 slabs per trip will be transported)	50.00	1,906.60	Each	95,330.00	1,906.50	95,325.00	1,907.00	95,350.00
13	Shifting to the site & fixing of 36" dia Ring slab in perfect position on damaged manhole i/c cutting of damaged portion of manhole in proper shape and laying cement mortar of 2" thickness & disposal of debris	50.00	563.09	Each	28,154.50	563.00	28,150.00	563.00	28,150.00







10/14
 10/14
 10/14

NAME OF WORK: REHABILITATION OF SUNK DOWN/DEFECTIVE/ CHOWKED 18" DIA & 12" DIA RCC RUBBER RING SEWER AT HINDU MASSAN
LYARI NADI UC-02 SITE METROVILLE UC-04 SITE TOWN


S.No	Description of Work	Engineer's Estimate			M/s. Sawab Noor khan & Bros		M/s. Yasin Enterprises		
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount
14	Cleaning inside sewerage line completely restoring original silt free space / diameter of pipe line by labour and equipment (mechanically/Electronically driven) i/c accessories like pulleys, steel ropes, buckets and draggers sizing from 6" to 18" dia their " to and fro" pulling action (No of passes shall be as many as required) would be under taken in two faces Phases (1st Phase entire land to down stream to up stream) bringing down peak hours sewerage to flow inside pipe line (as free flow) and in 2nd face from up stream to down stream of entire length insuring no silt is observed in buckets (6" dia to 18" dia) except only sewerage water and finally passing a steel ball of dia 12" less than the diameter of pipe. But not exceeding 48" dia ball even for larger dia of pipe to insure perfect cleaning. The job includes all the hire/cost of equipment and accessories of above winching machine drum sets having steel rope, pulley mounted over it, steel bucket from 6" dia to 18" dia, hocks and other protections like safety barriers, traffic signs, traffic cones, ensuring no damage to pipe line along with ensuring safety to labour and other public property/ lives and removal of silt / solid during desalting and clearance of site etc complete as per full satisfaction of site engineer 18" dia Sewer	800.00	Rft	128.80	103,040.00	128.50	102,800.00	129.00	103,200.00


Handwritten signatures and initials


NAME OF WORK: REHABILITATION OF SUNK DOWN/DEFECTIVE/ CHOWKED 18" DIA & 12" DIA RCC RUBBER RING SEWER AT HINDU MASSAN
LYARI NADI UC-02 SITE METROVILLE UC-04 SITE TOWN


S.No	Description of Work	Engineer's Estimate			M/s. Sawab Noor khan & Bros		M/s. Yasin Enterprises		
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount
					996,561.39		996,242.78		997,036.20
	Say				996,561		996,243		997,036


(Arshad Ali)
Accounts Officer (West)
Member/Secretary


(Saif-ul-Haque)
Additional Director Internal
Audit - KMC Member


(Abdul Rahim Khattai)
Chief Engineer (IPD), (Convener)


(Maqsood Ahmed Shaikh)
Superintending Engineer (KMC)
Member


(Ovais Malik)
Chief Engineer (West)
Member

ATTENDANCE OF PARTICIPATE CONTRACTOR

Name of Work : REHABILITATION OF SUNK DOWN / DEFECTIVE / CHOWKED 18" DIA & 12" DIA RCC RUBBER RING SEWER AT HINDU MASSAN LYARI NADI UC-02 SITE METROVILLE UC-04 SITE TOWN.

Date of Opening & Time : 07-04-2014 2:30 PM

Estimated Cost : Rs.9,99,948/-

SPPRA Serial No.: 19495

S.NO	NAME OF FIRM	NAME OF PERSON & DESIGNATION	SIGNATURE
1	M/s. <i>انجنيئرنگ</i>	<i>يارحان</i>	<i>يارحان</i>
2	M/s. <i>YASIN ENGINEER</i>	<i>M. Yasin</i>	<i>Yasin</i>
3	M/s.		
4			
5			
6			
7			
8			
9			
10			

eren



**OFFICE OF THE CHIEF ENGINEER (DISTRICT WEST)
KARACHI WATER & SEWERAGE BOARD**

Room No269, 2nd Floor, Old KBCA Building Behind Civic Centre,
Gulshan-e-Iqbal, Karachi.

No. KW&SB/CE/West/2014/52

Dated: 26/5/2014

M/s. Sawab Noor Khan & Bros.
Karachi.

LETTER OF ACCEPTANCE / SANCTION LETTER


SUBJECT:- **REHABILITATION OF SUNK DOWN / DEFECTIVE CHOWKED 18" DIA & 12" DIA RCC RUBBER RING SEWER AT HINDU MASSAN LYARI NADI UC-2 SITE METROVILLE UC-4 SITE TOWN**

REF:- Your Tender Opened on 09-04-2014.

The under signed is pleased to convey sanction for an amount to **Rs.9,96,243/-** (Rupees Nine Lac Ninety Six Thousand Two Hundred and Forty Three Only) for the subjected work under Rule SPPRA-2010, on item rate basis duly assessed by the Procurement/Evaluation Committee-I KW&SB vide **Para-27/N**, financially concurred-in by finance department KW&SB vide **Para-31/N to 42/N** and approved by MD, KW&SB vide **Para-44/N** The expenditure is chargeable to **BG No.B-023-18** for the financial year-2013-2014. You shall be bound to abide time to time instruction issued by KW&SB.

You are therefore directed to furnish the Earnest Money amounting to **Rs.19,925/-** being amount of 2% of sanction cost of the contract. You are further directed to contact concern Executive Engineer Office for execution of agreement, the value of stamp paper will be **Rs. 2989/- @ 0.30%** sanctioned cost which should be produced by you. In case of failure, the sanction shall be stand cancelled and action as per Contractual rules shall be taken against you.

All correspondence onward shall be carried out through Superintending Engineer, **SiteTown**, KW&SB.


CHIEF ENGINEER
(DISTRICT WEST)
KW&SB

opv to:-

DIRECTOR ACCOUNTS), KW&SB.
ADLFA, KW&SB.
ISE (SITE TOWN), KW&SB.
EE (SEW) (SITE TOWN), KW&SB.
OFFICE COPY.

C to:-

MD, KW&SB.

Site plan 437
45 DRAFTS
28/5

OFFICE OF THE EXECUTIVE ENGINEER (Sew), SITE TOWN, ZONE-III-B.
KARACHI WATER & SEWERAGE BOARD.

NO. EE (Sew) / S.T. / Z-III-B / 26 / 14


Dated 28/05/2014

WORK ORDER

SUBJECT: Rehabilitation of Sunk down / defective chowked
18'x12' R/R Sewer at Hindu Massam Lyasi Nadi
UE & Site Melrouille UE-9, Site Town.

This is to inform you that your Quotation/Tender for the above work has been approved on Item Rate Basis being the 1st lowest bidder amounting to Rs. 9,96,243/- (Rupees Nine Lacs Ninety Six thousand two hundred & forty three) has also been sanctioned vide No. WWSB/CE/meet/2014/52 dated 26/05/2014 in B.G. Code No. B-023(18).

You are hereby directed to start the work immediately and complete the same within 30 days commencing from the date of issuing this work order. In case the work is delayed or left unfinished beyond the stipulated time penalty Rs. 1000/- per day shall be imposed as per work rules.


Executive Engineer
(Sew), Site Town, KW&SB

M/s. Sauwab Noor Khans Bros

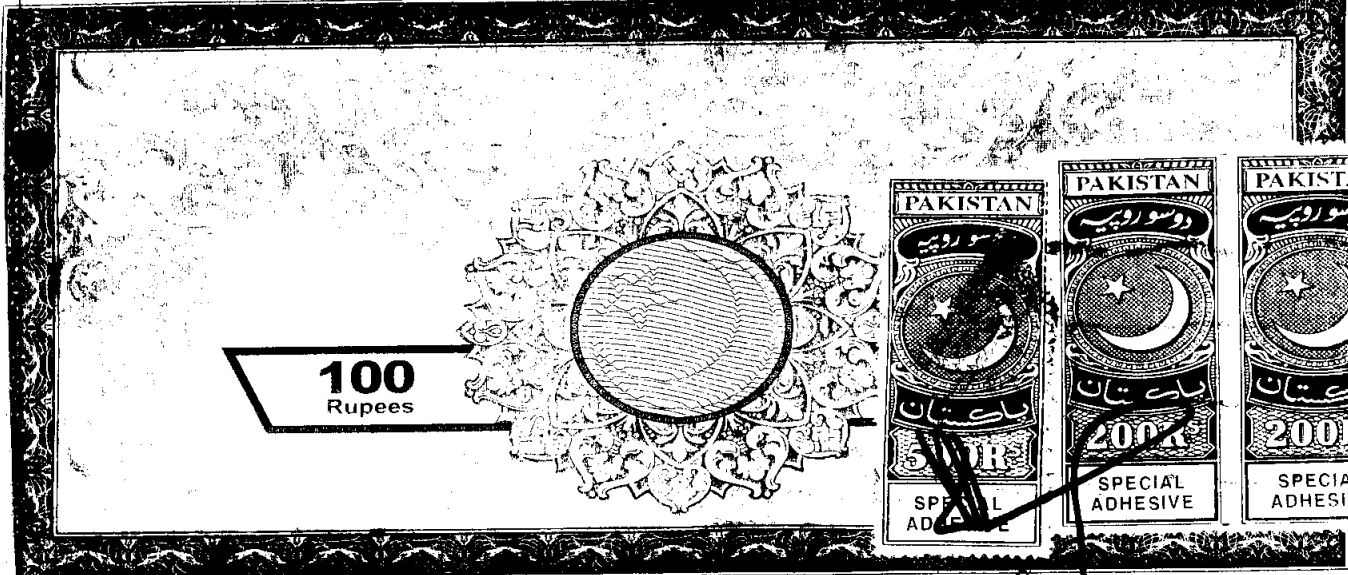
Copy to:-

01. C.E. Zone-III-B, KW&SB.
02. S.E. Site Town, KW&SB.
03. Sub-Engineer (Sme), Site Town.

1000



400



100 Rupees



116631

14 MAY 2014

ZAHID MEHMOOD Advocate

Page-2

In consideration of the payments to be made by the Employer to the Contractor as hereinafter mentioned, the Contractor hereby covenants with the Employer to execute and complete the Works and remedy defects therein in conformity and in all respects within the provisions of the Contract.

The Employer hereby covenants to pay to the Contractor, in consideration of the execution and completion of the Works as per provision of the Contract, the Contract Price or such other sum as may become payable under provisions of the Contract at the times and in the manner prescribed by the Contract.

IN WITNESS WHEREOF, the parties hereto have caused this Contract Agreement to be executed on the day, month and year first before written in accordance with their respective laws.

Signature of the Contractor

تواب نور خان

Proprietor

M/S. SAWAB NOOR KHAN & BROS. KARACHI

Signature of Employer

[Handwritten Signature]

CHIEF ENGINEER WEST KW&SB

WITNESS:

1. [Signature] MS Arzani Corporate 11-11 Sarfana City G. D. G. Karachi

2. [Signature] SARINA ENTERPRISES

WITNESS:

[Signature] SUPERINTENDING ENGINEER SITE TOWN, KW&SB

[Signature] EXECUTIVE ENGINEER (SEW) SITE TOWN, KW&SB

1235947

2000/2

59
1700

Revised



PAIG STAMP VENDOR
 No 09 Shop No 15 Block-14,
 173, Gulshan-e-Iqbal, Karachi

Stamp Office City of
 Karachi

12 MAY 2014

103314

13 MAY 2014

CONTRACT AGREEMENT

WIN ADDRESS Zamir Mehmood
 TIN ADDRESS

Advocate

Contract Amount Rs.9,96,243

THIS CONTRACT AGREEMENT (hereinafter called the "Agreement") made on the 27th day of May 2014 between The **Karachi Water & Sewerage Board** represented by it's **The Chief Engineer (West)**, **KW&SB** (hereinafter called the "Employer") of the one part and **M/s. Sawab Noor Khan & Co.** (hereinafter called the "Contractor") of the other part.

WHEREAS the Employer is desirous that certain Works, viz **"REHABILITATION OF SUNK DOWN / INEFFECTIVE CHOWKED 18" DIA & 12" DIA RCC RUBBER RING SEWER AT HINDU MASSAN LYARI NADI UC-2 SITE METROVILLE UC-4 SITE TOWN."** Should be executed by the Contractor and has accepted a Bid by the Contractor for the execution and completion of such Works and the remedying of any defects therein.

NOW This Agreement witnessed as follows:-

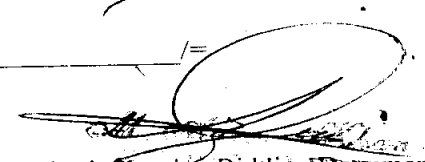
1. In this Agreement words and expressions shall have the same meanings as are respectively assigned to them in the Conditions of Contract hereinafter referred to.
2. The following documents after incorporating addenda, if any except those parts relating to Instructions to Bidders, shall be deemed to form and be read and construed as part of this Agreement, viz:
 - (a) The Letter of Sanction
 - (b) The completed Form of Bid along with Schedules to Bid:
 - (c) Conditions of Contract & Contract Data:
 - (d) The priced Schedule of Prices.
 - (e) The Specification: and
 - (f) The Drawings


BIDDING DATA

- (a) Name of Procuring Agency KW&SB
- (b) Brief Description of Work Rehabilitation of sunck down/defective/
choked 18"Ø & 12"Ø RCC Rubber Ring Sewer
at Hindu Masson Lyari Nadi UC-2 & Site
Metroville UC-4, Site Town.
- (c) Procuring Agency Address
- (d) Estimate Cost On item rate basis
- (e) Amount of Bid Security 2% of Bid amount
- (f) Period of Bid Validity 90 Days
- (g) Security Deposit
(including Bid Security) 10%
- (h) Venue, Time and Date of Bid
Opening The Tender in sealed cover super scribed with
the name of the work should be dropped in the
Tender Box kept in office of the Chief Engineer
(IP&D) at Block-"B" 9th Mile Karsaz, Karachi
on 09/04/14 at 2.30 PM by Procurement
Committee
- (i) Deadline for submission of Bid
along with time. 09-04-2014 at 2.00p.m.
- (j) Time for completion from written
order commence 30 Days
- (k) Liquidity damage 0.5% of Bid Cost per day of delay
- (l) Bid issued to Firm M/s. Sawab Noor Khan & Bro.
- (m) Deposit Receipt No. & Date R. No. 46, DT: 7-4-2014.

Amount:

Rs. _____


Authority Issuing Bidding Document
Department
K. W. & S. B.


Syed Zahir Hussain
Executive Engineer
(SITE TOWN)
KW&SB

KARACHI WATER & SEWERAGE BOARD
OFFICE OF THE EXECUTIVE ENGINEER SITE TOWN (SEW)
 TREATMENT PLANT NO.1 HAROONABAD SITE KARACHI CELL #0321-2426249

Estimate amount : Item Rate basis
 Time limit : 90 days
 Penalty for delay : Rs. 200/-p/day
 Tender Cost : Rs. 1000/-
 Date of Opening : 09-08-2014

Name of Work: **REHABILITATION OF SUNK DOWN / DEFECTIVE / CHOWKED 18" DIA & 12" DIA RCC RUBBER RING SEWER AT HINDU MASSAN LYARI NADI UC-02 SITE METROVILLE UC-04 SITE TOWN.**

S. No	Description of Work	QTY	Rate		Per Unit / Item	Amount in Rupees
			Rupees in Figures	Rupees in Words		
1	Dismantling & removing road metaling	1489 Cft	(605)	Six zero five only	%Cft Rs	(9008)
2	Excavation for pipe line in trenches, and pits in all kind of soils of murum i/c trimming and dressing side to true alignment and shape leveling of beds of trenches to correct level and grade, cutting joint holes and disposal of surplus earth within a one chain as directed by Engineer Incharge, Providing fence guard, lights, flags and temporary crossings for non vehicular traffic where ever requirement lift upto 5ft (1.52m) and lead upto one chain(30.5m)	7445 Cft 3696 Cft 1755 Cft 1044 Cft	(4650) (5200) (5750) (6300)	Four six fifty only Fifty two hundred only Fifty seven hundred only Sixty three hundred only	%Cft Rs %Cft Rs %Cft Rs %Cft Rs	(34619) (19219) (10091) (6577)
3	Providing Laying RCC Pipe with (Rubber Ring Joint & Fitting) in trench i/c cutting fitting and jointing with rubber ring i/c testing with water to specific pressure. 18" dia 12" dia	87 Rft 220 Rft	(539) (367)	Five thirty nine only Three sixty seven only	P/Rft Rs P/Rft Rs	(46893) (80740)
4	Providing Manhole 4ft inside with C.I frame (15Kg) & 5ft clear depth 1:2:4 cost in situ in 9" thick wall 1:4:8 C.C in 6" dia & 6" inch thick in foundation 1:2:4 C.C in benching 1/2" thick cement plaster 1:3 C.M on inside wall & surface of channel and benching to top i/c making required no's of main and branches channels 3/4" dia bars M.S foot at 12" dia C/C i/c cost of excavation in all kind of soil back filling and disposal of excavated stuff etc. complete as per design & instruction of the Engineer Incharge.	14 Nos.	(14529)	Fourteen five hundred twenty nine only	Each Rs	(203406)

(Signature) 09/14 *(Signature)* *(Signature)* *(Signature)*

5	Add/deduct per ft depth.	66 Rft	(2538)	Twenty five Three Eight only	P/Rft Rs	(167508)
6	Full hire charges of the pumping set per day inclusive of wages of driver and Assistant fuel or electric energy plate form required for placing the pumps etc at lower depth with suction and delivery pipes for pumping out water found at various depth from trenches i/c the cost of erection and dismantling after completion of the job Hire charges of pumping upto 10-HP pumping out water from 10' ft deep trench.	32 Days	(1500)	Fifteen hundred only.	P/Day Rs	(48000)
7	Making Connection with the existing Manholes i/c the cost of cutting holes in wall making them good in cement concrete 1:2:4 and making the required channel etc complete.	08 Nos.	(180)	one Eighty only	Each Rs	(1440)
8	Sand here on any other source sand of the same modules of the fineness (Hill sand)	1174.50 Cft	(2425)	Twenty four Two Five only	% Cft Rs	(28481)
9	Refilling the excavated stuff in trenches 6" thick layer i/c watering removing to full compaction etc.	12287 Cft	(2760)	Twenty Seven Sixty only	% Cft Rs	(33912)
10	Carriage of 100 Cft/5 tons of all materials like stone aggregate, spawl, coal, lime, surkhi etc B.G rail fastening points and crossing bridge, girders pipes, sheets, rail, M.S bras etc of 1000 Nos. bricks, 10"x5"x5" of 1000 Nos. tiles 12" x 6"x2" or 150 Cft of timber or 100 maunds of fuels wood by trucks or any other means owned by the contractor.	3142 Cft	(804)	Eight zero four only.	% Cft Rs	(25261)
11	Manufacturing and Supplying of 21" dia RCC Manhole Cover cost in 1:2:4 concrete ratio 3" inch deep at center rain forced with 1/2" tor steel bars at 4" C/C welded to 3/10 thick 2 week MS plate tow hook of 3/8 dia tor bar including compacting i/o during and transportation within 10 miles. 21" dia Cover	60 Nos.	(913.50)	Nine hundred and thirteen point fifty	Each Rs	(54810)
12	Manufacturing and supplying of RCC Ring Slab of 21" dia inside 36" dia outside 7.5 width and 6" thick i/c 3/8" for steel bars tow concentric ring with 3/8" dia 8 Nos cross linked bars welded and two sunk type hooks coated in 1:1 1/2" 3 concrete with embedded 15 Kg C.I frame in perfect position i/c transportation charges for an average lead of 20 Km per trip from casting yard to Town Office (A minimum of 25 slabs per trip will be transported).	50 Nos.	(1906.50)	Nineteen zero six hundred fifty.	Each Rs	(95325)
	Shifting to the site & fixing of 36" dia Ring slab in prefect position on damaged manhole i/c cutting of damaged portion of manhole in proper shape and laying of cement mortar of 2" thickness & disposal of debris.	50 Nos.	(83.00)	Eight Three only	Each Rs	(8150)

(Checked) 09/4
 hsh
 hsh
 [Signature]

<p>Cleaning inside sewerage lines completely restoring original silt free space diameter of pipe lie by labour and equipment. (Mechanically/Electrically Driven) including accessories like pulley's steel rope bucket and draggers sizing from 6" to 18" dia their to and for pulling action (No of passes shall be as many as required) would be taken in two phase (First phase entire length from downstream to upstream bringing down peak hours sewerage to flow inside pipe line (as free flow) and in second phase from up stream to down stream of entire length ensuring no silt is observed in buckets (6" dia to 18" dia) except only sewerage water and finally passing a steel ball of dia 12" dia lesser than the diameter of pipe but not exceeding 48" dia ball even for larger dia pipe to ensure perfect cleaning, the jobs include are the hire/cost of equipment and accessories of above winching machine/devices along with engines with winching drum set having steel rope pully mounted over it steel bucket for 6" dia to 18" dia hooks and other protection like safety barriers traffic signs traffic cones ensuring no damage to pipe along with ensuring safety to labour and other public property/lives and removal of silts/solids during festering and clearance of site etc complete as per full satisfaction of site engineer. 8" dia sewer</p>	<p>800 Rft</p>	<p>128.50</p>	<p>One included and regular paid of self.</p>	<p>P/Rft</p>	<p>102800</p>
--	----------------	---------------	---	--------------	---------------

Total Amount Rs. 9,96,240/-

Executive Engineer (Sew)
Site Town, KW&SB

tractor will abide all existing rules / terms & condition of SPPRA Rules-2010

Quoted an Amount of Rs. 9,96,240/- On item rate basis.
Nine lacs Ninety Six thousand Two hundred and forty only.

Contractor _____

Sealed Cover & Opened By Procurement Committee

Amount Rs. 20,000/- PO No 2166967 Date 18-3-2014
Rs. PO No. Date
Rs. PO No. Date

VIT Bank University Road Bldg.
9,96,240/- (Nine lacs Ninety six thousand Two Hundred Forty only)

(Item Rate Basis)

SE (TS) KMC
Member

Additional Director (S) A) KMC
Member

Chief Engineer
(IF&D), KW&SB



KARACHI WATER & SEWERAGE BOARD
OFFICE OF THE CHIEF ENGINEER (IP&D)


BID EVALUATION REPORT

1	Name of Procuring Agency	KARACHI WATER & SEWERAGE BOARD
2	Tender Reference No	SPPRA Serial No. 19495 I.D No. /2014
3	Tender Description/Name of Work/Item	REHABILITATION OF SUNK DOWN/DEFECTIVE/ CHOWKED 18" DIA & 12" DIA RCC RUBBER RING SEWER AT HINDU MASSAN LYARI NADI UC-02 SITE METROVILE UC-04 SITE TOWN
4	Method of Procurement	Single Stage (One Envelop)
5	Tender Published	Through Website
6	Total Bid Documents Sold	2 Nos
7	Total Bid Received	2 Nos
8	Technical Bid Opening Date (if applicable)	N/A .
9	No. of Bid Technically Qualified (if applicable)	N/A .
10	Bid (s) rejected	N/A
11	Financial Bid Opening Date	9/4/2014
12	Bid Evaluation Report	


S #	NAME OF FIRM OR BIDDER	COST OFFERED BY THE BIDDERS	RANKING IN TERMS OF COST	COMPARISON WITH ESTIMATED COST	REASON FOR ACCEPTANCE/ REJECTION	REMARKS
1	M/s. Sawab Noor Khan & bros	Rs. 996,243/-	1st Lowest	@ 0.03197% Below	Substantially Responsive	P.O # 5166967 Dt:18-03-2014 Rs. 20,000 NIB Bank University Road Br
2	M/s. Yasin Enterprises	Rs. 997,036/-	2nd Lowest	@ 0.0476% Above	Substantially Responsive	P.O # 10772250 Dt:27-01-2014 Rs. 20,500 ABL Paria Street Br

The all concerned bidder are being informed accordingly.

The E.E Concerned for compliance of rule 45 of SPPRA 2010 M/s. Sawab Noor Khan & Bros. declared as the lowest responsive bidder by the Committee and recommended for Sanction from Competent Authority.


(Arshad Ali)
Accounts Officer (West)
Member/Secretary


(Saif-ul-Haque)
Additional Director Internal
Audit - KMC Member


(Maqsood Ahmed Shaikh)
Superintending Engineer (KMC)
Member


(Ovais Malik)
Chief Engineer (West)
Member


(Abdul Rahim Khattai)
Chief Engineer (IPD),
(Convener)

NIT Sr. No. 19495

Method of Procurement: Single Stage Single Envelope.

Name of Work: REHABILITATION OF SUNK DOWN/DEFECTIVE/ CHOWKED 18" DIA & 12" DIA RCC RUBBER RING SEWER AT HINDU MASSAN LYARI NADI UC-02 SITE METROVILE UC-04 SITE TOWN

MINUTES OF BID OPENING MEETING.

A meeting of the procurement committee of this department was held on 09-04-2014 for opening the bids received in respect of subject NIT till deadlines of submission. The meeting was attended by all / following members of the procurement committee and the representative of bidders. (Attendance sheet is enclosed).

2. Two bidders submitted their bids till the deadline of submission.

- i. M/s. Sawab Noor Khan & Bros
- ii. M/s. Yasin Enterprises


3. The bids were opened at 2:00 P.M in the presence of the above mentioned participants and the rates quoted by bidders were read aloud and encircled by Chairman of the Procurement Committee.


S.No	Name of Firm	Quoted Price	Amount of Bid Security	Pay Order No. / Date
01	M/s. Sawab Noor Khan & Bros.	Rs. 996,240/-	Rs. 20,000	P.O # 5166967 Dt:18-03-2014 NIB Bank University Road Br
02	M/s. Yasin Enterprises	Rs.997,034/-	Rs. 20,500	P.O # 10772250 Dt:27-01-2014 ABL Paria Street Br

4. The bids do not contain any over-writing or cutting.


5. The committee shall examine all the bids as per the qualification / eligibility criteria provided in the bidding document and verify the documents and bid security submitted by the bidders (if required).

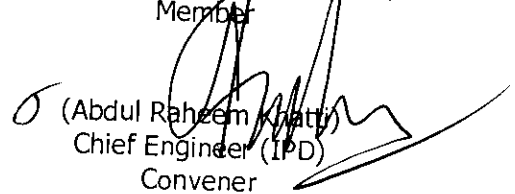
The meeting ended with the note of thanks to and from the chair.


(Arshad Ali)
Accounts Officer (West)
Member / Secretary


(Ovais Malik)
Chief Engineer (West)
Member


(Saif-ul-Haque)
Additional Director Internal
Audit - KMC Member


(Maqsood Ahmed Shaikh)
Superintending Engineer (KMC)
Member


(Abdul Raheem Khattak)
Chief Engineer (IPD)
Convener

BIDDERS QUALIFICATION REPORT
Rule-46(i) (a) Single Stage One Envelope Procedure

Opening Date: 09-04-2014


Name of Work: **REHABILITATION OF SUNK DOWN/DEFECTIVE/ CHOWKED 18" DIA & 12" DIA RCC RUBBER RING SEWER AT HINDU MASSAN LYARI NADI UC-02 SITE METROVILE UC-04 SITE TOWN**


Name of Bidder M/s. Sawab Noor Khan & Bros.

S.No	Eligibility	Yes	No
1	Relevant experience	/	
2	Turnover Statement	/	
3	Registration with Income Tax	/	
4	Registration with Sales Tax where applicable.	N/A	


Name of Bidder M/s. Yasin Enterprises


S.No	Eligibility	Yes	No
1	Relevant experience	/	
2	Turnover Statement	/	
3	Registration with Income Tax	/	
4	Registration with Sales Tax where applicable.	N/A	


 (Arshad Ali) 09/14
 Accounts Officer (West)
 Member / Secretary


 (Ovais Malik)
 Chief Engineer (West)
 Member


 (Saif-ul-Haque)
 Additional Director Internal
 Audit - KMC Member


 (Maqsood Ahmed Shaikh)
 Superintending Engineer (KMC)
 Member


 (Abdul Raheem Kyatti)
 Chief Engineer (TPD)
 Convener

COMPARATIVE STATEMENT

NAME OF WORK: REHABILITATION OF SUNK DOWN/DEFECTIVE/ CHOWKED 18" DIA & 12" DIA RCC RUBBER RING SEWER AT HINDU MASSAN LYARI NADI UC-02 SITE METROVILE UC-04 SITE TOWN





S.No	Description of Work	Engineer's Estimate				M/s. Sawab Noor khan & Bros		M/s. Yasin Enterprises	
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount
1	Dismantling and removing road mantling	1489.00	605.00	% Cft	9,008.45	605.00	9,008.45	605.00	9,008.45
2	Excavation for pipe line m trenches, and pits in all kind of soils of murum i/c trimming and dressing sides to true alignment and shape leveling of beds of trenches to correct level and grade, cutting joint holes and disposal of surplus earth within a one chain as directed by Engineer Incharge. Providing fence guards, lights, flags and temporary crossings for non-vehicular traffic where ever required lift upto 5 ft. (1.52m) and lead upto one chain(30.5m).	7445.00	4,650.00	% 0 Cft	34,619.25	4,650.00	34,619.25	4,650.00	34,619.25
		3696.00	5,200.00	% 0 Cft	19,219.20	5,200.00	19,219.20	5,200.00	19,219.20
		1755.00	5,750.00	% 0 Cft	10,091.25	5,750.00	10,091.25	5,750.00	10,091.25
		1044.00	6,300.00	% 0 Cft	6,577.20	6,300.00	6,577.20	6,300.00	6,577.20
3	Providing laying RCC Pipe with (Rubber Ring Joint & Fitting) in trench i/c cutting fitting and jointing with rubber ring i/c testing with water to specific pressure 18" dia	87.00	539.00	P/Rft	46,893.00	539.00	46,893.00	540.00	46,980.00
		220.00	367.00	P/Rft	80,740.00	367.00	80,740.00	368.00	80,960.00

Handwritten signature and date: 10/11/2011

Handwritten initials: WZ

NAME OF WORK: REHABILITATION OF SUNK DOWN/DEFECTIVE/CHOWKED 18" DIA & 12" DIA RCC RUBBER RING SEWER AT HINDU MASSAN LYARI NADI UC-02 SITE METROVILE UC-04 SITE TOWN

S.No	Description of Work	Engineer's Estimate			M/s. Sawab Noor Khan & Bros		M/s. Yasin Enterprises		
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount
4	Providing M/H 4ft inside with CI frame (15 kg) and 5 feet clear depth 1:2:4 cast in situ in 9 inch thick wall 1:4:8 cement concrete in 6ft dia and 6" inch thick in foundation 1:2:4 c.c in ben ching, W" thick cement plastering with 1:3 cement mortar on inside wall and surface of channel/benching i/c making required Nos of main and branch channels, Y4" dia bar footrest at 12" C/C i/c cost of excavation of all kinds of soil, backfilling and disposal of excavated stuff etc complete, as per design and instruction of the Engineer Incharge.	14.00 Nos	14,529.29	Each	203,410.06	14,529.00	203,406.00	14,529.00	203,406.00
5	Add/deduct per ft depth Full hire charges of the pumping set per day i/c of wages of driver and Assistant fuel or electric energy plate forms required for placing pumps etc at lower depth with suction and delivery pipe for pumping out water found at various depth from trenches i/c the cost of erection and dismantling after completion of the job. Hire charges of pumping set upto 10 HP pumping out water from 10 ft deep trench.	66.00 Rft	2,538.62	P/Rft	167,548.92	2,538.00	167,508.00	2,538.00	167,508.00
6		32.00 Day	1,500.00	P/Day	48,000.00	1,500.00	48,000.00	1,500.00	48,000.00





 10/14

NAME OF WORK: REHABILITATION OF SUNK DOWN/DEFECTIVE/ CHOWKED 18" DIA & 12" DIA RCC RUBBER RING SEWER AT HINDU MASSAN LYARI NADI UC-02 SITE METROVILE UC-04 SITE TOWN

S.No	Description of Work	Engineer's Estimate				M/s. Sawab Noor Khan & Bros		M/s. Yasin Enterprises	
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount
7	making connection with the existing manhole i/c the cost of cutting hole in wall, making them good in C.C 1:2:4 and making required channel etc Complete.	8.00 Nos	180.00	Each	1,440.00	180.00	1,440.00	180.00	1,440.00
8	Sand haro or any other source Sand of the same modulus of the Fineness (Hill Sand)	1174.50 Cft	2,425.00	% Cft	28,481.63	2,425.00	28,481.63	2,425.00	28,481.63
9	Refilling the excavated stuff in trench 6" thick layer i/c water ramming to full Compaction etc complete.	12287.00 Cft	2,760.00	% 0 Cft	33,912.12	2,760.00	33,912.12	2,760.00	33,912.12
10	Carriage of 100 Cft/5 tons of all materials like stone aggregate spawl, coal, lime, surkhi etc B.G rail fastening points and crossing bridge, girder pipes, sheets, rail, M.S bars etc of 1000 Nos bricks 10"X5"X5" of 1000 Nos tiles 12"X6"X2" or 150 cft of timber or 100 maunds of fuel wood by trucks or any other means owned by contractor	3142.00 Cft	804.52	% Cft	25,278.02	804.00	25,261.68	805.00	25,293.10
11	manufacturing and Supplying of 21" dia RCC manhole cover cost in 1:2:4 concrete ratio 3" inch deep at centre rain forced with 1/2" tor steel bars at 4" C/C welded to 3/10 thick 2 week MS plate tow hook of 3/8 dia tor bar including compacting i/o during and transportation within 10 miles 21" dia Cover	68.00 Nos	913.63	Each	54,817.80	913.50	54,810.00	914.00	54,840.00


Handwritten signature and initials


Handwritten signature


Handwritten initials

NAME OF WORK: REHABILITATION OF SUNK DOWN/DEFECTIVE/ CHOKED 18" DIA & 12" DIA RCC RUBBER RING SEWER AT HINDU MASSAN LYARI NADI UC-02 SITE METROVILLE UC-04 SITE TOWN

S.No	Description of Work	Engineer's Estimate			M/s. Sawab Noor Khan & Bros		M/s. Yasin Enterprises		
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount
12	manufacturing and Supplying of RCC Ring Slab of 21" dia inside 36" dia outside 7.5 width and 6" thick i/c 3/8" for steel bars tow concentric ring with 3/8" dia 8 Nos cross linked bars welded and two sunk type hooks coated in 1:1 1/2" 3 concrete with embedded 15 kg C.I frame in perfect position i/c transportation charges for an average lead of 20 km per trip from casting yard to Town office (A minimum of 25 slabs per trip will be transported)	50.00 Nos	1,906.60	Each	95,330.00	1,906.50	95,325.00	1,907.00	95,350.00
13	Shifting to the site & fixing of 36" dia Ring slab in perfect position on damaged manhole i/c cutting of damaged portion of manhole in proper shape and laying cement mortar of 2" thickness & disposal of debris	50.00 Nos	563.09	Each	28,154.50	563.00	28,150.00	563.00	28,150.00







Daudh
 10/14
 M/s


NAME OF WORK: REHABILITATION OF SUNK DOWN/DEFECTIVE/CHOWKED 18" DIA & 12" DIA RCC RUBBER RING SEWER AT HINDU MASSAN
 LYARI NADI UC-02 SITE METROVILE UC-04 SITE TOWN


S.No	Description of Work	Engineer's Estimate			M/s. Sawab Noor Khan & Bros		M/s. Yasin Enterprises		
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount
14	Cleaning inside sewerage line completely restoring original silt free space / diameter of pipe line by labour and equipment (mechanically/Electronically driven) i/c accessories like pulleys, steel ropes, buckets and draggers sizing from 6: to 18" dia their " to and fro" pulling action (No of passes shall be as many as required) would be under taken in two faces Phases (1st Phase entire land to down stream to up stream) bringing down peak hours sewerage to flow inside pipe line (as free flow) and in 2nd face from up stream to down stream of entire length insuring no silt is observed in buckets (6" dia to 18" dia) except only sewerage water and finally passing a steel ball of dia 12" less than the diameter of pipe. But not exceeding 48" dia ball even for larger dia of pipe to insure perfect cleaning. The job includes all the hire/cost of equipment and accessories of above winching machine drum sets having steel rope, pulley mounted over it , steel bucket from 6" dia to 18" dia , hocks and other protections like safety barriers , traffic signs , traffic cones, ensuring no damage to pipe line along with ensuring safety to labour and other public property/ lives and removal of silt / solid during desalting and clearance of site etc complete as per full satisfaction of site engineer 18" dia Sewer	800.00	128.80	P/Rft	103,040.00	128.50	102,800.00	129.00	103,200.00


Quaid
10/11
M/s
10/11
10/11
10/11


NAME OF WORK: REHABILITATION OF SUNK DOWN/DEFECTIVE/ CHOWKED 18" DIA & 12" DIA RCC RUBBER RING SEWER AT HINDU MASSAN
 LYARI NADI UC-02 SITE METROVILE UC-04 SITE TOWN


S.No	Description of Work	Engineer's Estimate			M/s. Sawab Noor khan & Bros		M/s. Yasin Enterprises		
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount
	Say				996,561.39		996,242.78		997,036.20
					996,561		996,243		997,036


 (Ashraf Ali) 10/14
 Accounts Officer (West)
 Member/Secretary


 (Saif-ul-Haque)
 Additional Director Internal
 Audit - KMC Member


 (Maqsood Ahmed Shaikh)
 Superintending Engineer (KMC)
 Member


 (Ovais Malik)
 Chief Engineer (West)
 Member


 (Abdul Rajim Khattai)
 Chief Engineer (IPD), (Convener)




ATTENDANCE OF PARTICIPATE CONTRACTOR

Name of Work : REHABILITATION OF SUNK DOWN / DEFECTIVE / CHOWKED 18" DIA & 12" DIA RCC RUBBER RING SEWER AT HINDU MASSAN LYARI NADI UC-02 SITE METROVILLE UC-04 SITE TOWN.

Date of Opening & Time : 09-04-2014 2:30 PM

Estimated Cost : Rs.9,99,948/-

SPPRA Serial No.: 19495

S.NO	NAME OF FIRM	NAME OF PERSON & DESIGNATION	SIGNATURE
1	M/s. 	يارحان	
2	M/s. YASIN ENTERS	m. yasin	
3	M/s.		
4			
5			
6			
7			
8			
9			
10			