






BID EVALUATION REPORT

Name of Procurement Agency:	M/s. Nazir Construction Company Deputy Commission P. D. Khairpur
Tender Reference No.	DC/PS/1044(A)/KHAIRPUR Dt: 3-4-2015 (INF/KRY No. 1387/2015)
Tender Description/Name of Work/Item:	CONSTRUCTION OF HEART CENTER NEAR CIVIL HOSPITAL KHP.
Type of Bidding adopted	Single stage - One envelope
Procedure adopted for open competitive bidding	
Tender Published for prequalification:	14 APRIL, 2015
Tender Prequalification Documents Sold:	UPTO 28 APRIL, 2015
Nos. of firms qualified:	03 FIRMS
Total Bid Documents Issued:	03 NOS.
Total Bids Received:	03 NOS.
Technical Bid Opening Date (if applicable):	N.A.
Nos. of firms qualified:	03 NOS.
Bid(s) rejected:	NIL
Financial Bid Opening Date	28-05-2015

Bid Evaluation Report:

Sr.No.	Name of Firm or Bidder	Cost offered by the Bidder	Ranking in terms of cost	Comparison with Estimated Cost	Reasons of acceptance or Rejection
1	M/s. Nazir Construction Company	Rs. 182749159/=	1 ST LOWEST	Low	Responsive. 1 ST LOWEST
2	M/s. Meesam Construction Co.	Rs. 198185661/=	3 RD LOWEST		Highest
3	M/s. A.A Memon	Rs. 191415538/=	2 ND LOWEST		High

 Divisional Accounts Officer (Special Projects) Khairpur	 Superintending Engineer Works & Services Department Khairpur	 Executive Engineer (Buildings), W&S Department Khairpur	 The Principal PTTI, Khairpur
--	---	---	---


CHAIRMAN
Deputy Commissioner Khairpur

Annexure - 'B'

TOTAL POINTS 100

Qualifying Score is 75%, but it is mandatory to obtain at least 40% in each of the following sections

Name of Scheme: Construction of Heart Centre near Civil Hospital, Khairpur ADP-1646

TENTATIVE ESTIMATED COST: 203.82 MILLION

Name of Firm	COMPANY PROFILE					General Experience Record										Personnel Capabilities required for				Financial Soundness/Status				TOTAL POINTS	
	Period since Firm/ Contractor is in construction business (TOTAL 10 MARKS)	Office Facilities (TOTAL 05 MARKS)	A) Projects of similar nature and complexity completed over last 05 years. (TOTAL 20 MARKS) (Attach satisfactory completion certificates)	B) Projects of similar nature and complexity in hand (TOTAL 15 MARKS) (Attach copies of work orders)	A) 2 BSc (Civil Engg) / BEd (Civil Engineers with experience of 5 years or above. A firm should have atleast 02 BSc/BE (Pedagogical) / (Arach Tax payment challans showing employment with firm. 1 additional Mark for MSc (Civil Engg)/M.E.(Civil)	B) 4 Diploma in Civil Engineering, with experience of 2 years or above. (TOTAL 10 MARKS)	Equipment Capability (TOTAL 20 MARKS)	Less than 15% of Estimate of Cost of this Work	16 - 25% of Estimate of Cost of this Work	26 - 40% of Estimate of Cost of this Work	40% of Estimate of Cost of this Work	More than 40% of Estimate of Cost of this Work	2	4	8	10									
M/S. Khan Muhammad & Co.	2	5	10	3	1	1	4	8	12	16	20	5	10	15	3	5	10	10	20	20	2	4	8	10	100
M/S. Khan Muhammad & Co.	NOT RESPONDED																								
M/S. Al Noor Construction Company	NOT CONSIDERED FOR THE PROCESS OF PRE-QUALIFICATION AS THE PROCUREMENT COMMITTEE FOUND AN EXPIRED PEC CERTIFICATE INSIDE THE BROCHURE.																								
M/S. Umar Jan & Co.	NOT CONSIDERED FOR THE PROCESS OF PRE-QUALIFICATION AS THE PROCUREMENT COMMITTEE FOUND THAT THE FIRM IS NOT REGISTERED IN THE REQUIRED DISCIPLINE-BC03																								
M/S. Nazir Construction Company	NOT CONSIDERED FOR THE PROCESS OF PRE-QUALIFICATION AS THE PROCUREMENT COMMITTEE FOUND THAT THE FIRM IS NOT REGISTERED IN THE REQUIRED DISCIPLINE-BC03																								
M/S. Messam Construction Co.	NOT CONSIDERED FOR THE PROCESS OF PRE-QUALIFICATION AS THE PROCUREMENT COMMITTEE FOUND THAT THE FIRM IS NOT REGISTERED IN THE REQUIRED DISCIPLINE-BC03																								
M/S. A.A. Memon	NOT CONSIDERED FOR THE PROCESS OF PRE-QUALIFICATION AS THE PROCUREMENT COMMITTEE FOUND THAT THE FIRM IS NOT REGISTERED IN THE REQUIRED DISCIPLINE-BC03																								
M/S. Eveshine Constructors	NOT CONSIDERED FOR THE PROCESS OF PRE-QUALIFICATION AS THE PROCUREMENT COMMITTEE FOUND THAT THE FIRM IS NOT REGISTERED IN THE REQUIRED DISCIPLINE-BC03																								
M/S. Nawab Brothers (Pvt) Ltd	NOT CONSIDERED FOR THE PROCESS OF PRE-QUALIFICATION AS THE PROCUREMENT COMMITTEE FOUND THAT THE FIRM IS NOT REGISTERED IN THE REQUIRED DISCIPLINE-BC03																								
M/S. Sharkh Abdul Qayoom	NOT CONSIDERED FOR THE PROCESS OF PRE-QUALIFICATION AS THE PROCUREMENT COMMITTEE FOUND THAT THE FIRM IS NOT REGISTERED IN THE REQUIRED DISCIPLINE-BC03																								
M/S. Muhammad Aslam	NOT CONSIDERED FOR THE PROCESS OF PRE-QUALIFICATION AS THE PROCUREMENT COMMITTEE FOUND THAT THE FIRM IS NOT REGISTERED IN THE REQUIRED DISCIPLINE-BC03																								
Syed Pir-Ali Shah	NOT CONSIDERED FOR THE PROCESS OF PRE-QUALIFICATION AS THE PROCUREMENT COMMITTEE FOUND THAT THE FIRM IS NOT REGISTERED IN THE REQUIRED DISCIPLINE-BC03																								
M/S. Mahar Builders	NOT CONSIDERED FOR THE PROCESS OF PRE-QUALIFICATION AS THE PROCUREMENT COMMITTEE FOUND THAT THE FIRM IS NOT REGISTERED IN THE REQUIRED DISCIPLINE-BC03																								
M/S. Jiva Enterprises	NOT CONSIDERED FOR THE PROCESS OF PRE-QUALIFICATION AS THE PROCUREMENT COMMITTEE FOUND THAT THE FIRM IS NOT REGISTERED IN THE REQUIRED DISCIPLINE-BC03																								

MEMBER	MEMBER	MEMBER	MEMBER	SECRETARY/MEMBER	CHAIRMAN
ADDITIONAL ACCOUNTS OFFICE SPF KHARPUR	THE PRINCIPAL PETROLEUM TECHNICAL INSTITUTE KHARPUR	EXECUTIVE ENGINEER (BUILDINGS) WORKS & SERVICES DEPARTMENT KHARPUR	SUPERINTENDING ENGINEER WORKS & SERVICES DEPARTMENT KHARPUR	DEPUTY COMMISSIONER DISTRICT KHARPUR	

OFFICE OF THE DEPUTY COMMISSIONER/ PROJECT DIRECTOR
SPECIAL DEVELOPMENT PACKAGES KHAIRUR.

MINUTES OF PROCUREMENT COMMITTEE MEETING HELD ON 28.5.2015 IN THE OFFICE OF DEPUTY COMMISSIONER/ PROJECT DIRECTOR SPECIAL DEVELOPMENT PACKAGES KHAIRPUR.

VENUE: OFFICE OF DEPUTY COMMISSIONER/ PROJECT DIRECTOR SPECIAL DEVELOPMENT PACKAGES KHAIRPUR.

CONTRACT NAME: CONSTRUCTION OF HEART CENTRE NEAR CIVIL HOSPITAL KHAIRPUR.

NOTICE INVITING TENDER#: PRE-QUALIFICATION NOTICES WERE ISSUED TO CONTRACTORS.

PREMEABLE

The tender documents/ Bidding documents are prepared by Procurement Committee constituted by the Deputy Commissioner Khairpur/ Project Director Speial Development Packages Khairpur.

The Prequalification was floated and published in newspapers viz Daily KAWISH Hyderabad dated 14.4.2015 and others also hosited on SPPRA website at S.No.23645

EVALUATION REPORT:

Consequently three numbers bids were purchased by M/S Nazir Construction Company, Miesam Construction company and A.A. Memon. who were qualified for the above work on payment of Rs.1500/- (Non refundable) and submitted the bid on fixed date i.e.28.5.2015 within stipulated time period. The bid is opened on same day at 2.45 pm before Procurement Committee and bidders.

The committee assessed the bids, copy of check list is attached as Annexure-A.

Attendance sheet of Procurement committee Members and contractors is attached at Annexure-B.

The bid amount quoted by all contractors is checked and found correct and there is no any over writing/ corrections.

After evaluation the bidder was asked for any type of observation/ complaint, who has raised no objection or complaint.

RECOMMONDATION OF PROCUREMENT COMMITTEE.

On the basis of scrutiny, evaluation, analysis, as per criteria mentioned in bidding documents the committee recommended the bid of M/S Nazir Construction Company for approval and award of contract, which the economical lowest rate (Bid Evaluation Report) is attached as Annexure-C.

The contractors were informed accordingly and copy of Bid Evaluation Report was delivered to him.

Mune.
MUNAWAR ALI MITHANI
DEPUTY COMMISSIONER/
PROJECT DIRECTOR SDP
KHAIRPUR

ATTENDANCE SHEET ON DAY OF OPENING

Construction of Heart Centre near Civil
Hospital, Khairpur

Bid Reference No.		ADP # 1646 OF 2014-15		SECTOR: BUILDING SECTOR/HEALTH SECTOR	
Opening Date:				Time:	
Sr. No.	NAME	SIGNATURE			
1	Deputy Commissioner Khairpur				
2	Superintending Engineer, W&S Dept., Khairpur - Member/Secretary				
3	Executive Engineer (Buildings Division) Works & Services Department Khairpur				
4	The Principal PTI, Khairpur				
5	Divisional Accounts Officer (Special Projects) Khairpur				
6	Masrur Ali Measran Construction Company				
7	Pearaz Ahmad M/S Nazri Construction Company				
8	Mushatay Meera A.A. Meera				

SINDH PUBLIC PROCUREMENT REGULATORY AUTHORITY

CONTRACT EVALUATION FORM

**TO BE FILLED IN BY ALL PROCURING AGENCIES FOR PUBLIC CONTRACTS OF
WORKS, SERVICES & GOODS**

1) NAME OF THE ORGANIZATION / DEPTT.	Local Govt: Deptt.
2) PROVINCIAL / LOCAL GOVT. / OTHER	Provincial
3) TITLE OF CONTRACT.	ADP
4) TENDER NUMBER	Construction of Heart
5) BRIEF DESCRIPTION OF CONTRACT	Centre in Civil Hospital Khy
6) FORUM THAT APPROVED THE SCHEME	
7) TENDER ESTIMATED VALUE	193.087 M.11.
8) ENGINEER'S ESTIMATE (For Civil Works only)	193.087
9) ESTIMATED COMPLETION PERIOD (AS PER CONTRACT)	2 Years
10) TENDER OPENED ON (DATE & TIME)	28.5.2015
11) NUMBER OF TENDER DOCUMENT SOLD	3 Nos.
12) NUMBER OF BIDS RECEIVED	3 Nos.
13) NUMBER OF BIDDERS PRESENT AT THE TIME OF OPENING OF BIDS.	3 Nos
14) BID EVALUATION REPORT (Enclose a copy)	
15) NAME AND ADDRESS OF THE SUCCESSFUL BIDDER	M/s Nazir Constt: Co.
16) CONTRACT AWARD PRICE	182.749 M.11
17) RANKING OF SUCCESSFUL BIDDER IN EVALUATION REPORT (i.e 1 st , 2 nd , 3 rd EVALUATION BID).	1st
18) METHOD OF PROCUREMENT USED:- (Tick One)	
a) SINGLE STAGE -ONE ENVELOPE PROCEDURE	<input checked="" type="checkbox"/> Domestic / Local
b) SINGLE STATE-TWO ENVELOPE PROCEDURE	<input type="checkbox"/>
c) TWO STAGE BIDDING PROCEDURE	<input type="checkbox"/>
d) TWO STAGE-TWO ENVELOPE BIDDING PROCEDURE	<input type="checkbox"/>

PLEASE SPECIFY IF ANY OTHER METHOD OF PROCUREMENT WAS ADOPTED i.e EMERGENCY, DIRECT CONTRACTING ETC. WITH BRIEF REASONS

19) APPROVING AUTHORITY FOR AWARD OF CONTRACT.

20) WHETHER THE PROCUREMENT WAS INCLUDED IN ANNUAL PROCUREMENT PLAN?

Yes	<input checked="" type="checkbox"/>	No.	
-----	-------------------------------------	-----	--

21) ADVERTISEMENT

i) SPPRA WEBSITE
(if yes, give date and SPPRA Identification No.)

Yes	S.N.23645		
No.			

ii) Newspapers
(if yes, give name of newspapers and dates)

Yes	Daily Kaurish dt: 14.4.2015		
No.			

22) NATURE OF CONTACT

Domestic/ Local	<input checked="" type="checkbox"/>	Int:	
--------------------	-------------------------------------	------	--

23) WHETHER QUALIFICATION CRITERIA WAS INCLUDED IN BIDDING/TENDER DOCUMENTS?
(if yes, enclose a copy).

Yes	<input checked="" type="checkbox"/>	No.	
-----	-------------------------------------	-----	--

24) WHETHER BID EVALUATION CRITERIA WAS INCLUDED IN BIDDING/TENDER DOCUMENTS?
(if yes, enclose a copy).

Yes	<input checked="" type="checkbox"/>	No.	
-----	-------------------------------------	-----	--

25) WHETHER APPROVAL OF COMPETENT AUTHORITY WAS OBTAINED FOR USING A METHOD OTHER THAN OPEN COMPETITIVE BIDDING?

Yes		No.	N.A
-----	--	-----	-----

26) WAS BID SECURITY OBTAINED FROM ALL THE BIDDERS?

Yes	<input checked="" type="checkbox"/>	No.	
-----	-------------------------------------	-----	--

27) WHETHER THE SUCCESSFUL BID WAS LOWEST EVALUATED BID / BEST EVALUATED BID (in case of Consultancies)

Yes	<input checked="" type="checkbox"/>	No.	
-----	-------------------------------------	-----	--

28) WHETHER THE SUCCESSFUL BIDDER WAS TECHNICALLY COMPLIANT?

Yes		No.	
-----	--	-----	--

29) WHETHER NAMES OF THE BIDDERS AND THEIR QUOTED PRICES WERE READ OUT AT THE TIME OF OPENING OF BIDS?

Yes	<input checked="" type="checkbox"/>	No.	
-----	-------------------------------------	-----	--

30) WHETHER EVALUATION REPORT GIVEN TO BIDDERS BEFORE THE AWARD OF CONTRACT?
(Attach copy of the bid evaluation report).

Yes	<input checked="" type="checkbox"/>	No.	
-----	-------------------------------------	-----	--

31) ANY COMPLAINTS RECEIVED
(if yes, result thereof)

Yes	
No.	✓

32) ANY DEVIATION FROM SPECIFICATIONS GIVEN IN
THE TENDER NOTICE/ DOCUMENTS
(if yes, give details)

Yes	
No.	✓

33) WAS THE EXTENSION MADE IN RESPONSE TIME?
(if yes, give reasons).

Yes	
No.	✓

34) DEVIATION FROM QUALIFICATION CRITERIA
(if yes, give detailed reason)

Yes	
No.	✓

35) WAS IT ASSURED BY THE PROCUREMENT AGENCY
THAT THE SELECTED FIRM IS NOT BLACK LISTED?

Yes	✓	No	
-----	---	----	--

36) WAS A VISIT MADE BY ANY OFFICER/ OFFICIAL OF
THE PROCURING AGENCY TO THE SUPPLIER'S
PREMISES IN CONNECTION WITH THE
PROCUREMENT? IF SO, DETAILS TO BE
ASCERTAINED REGARDING FINANCING GOVT, IF A
ROAD:
(if yes, enclose copy)

Yes		No	
-----	--	----	--

37) WERE PROPER SAFEGUARDS PROVIDED ON
MOBILIZATION THE CONTRACT (BANK GUARANTEE
ETC)?

Yes	✓	No	
-----	---	----	--

38) SPECIAL CONDITIONS, IF ANY
(if yes, give Brief Description)

Yes.	
No.	✓

Signature & Official Stamp of
Authorized Officer

[Handwritten Signature]
DEPUTY COMMISSIONER/
PROJECT DIRECTOR
JMAIRBUB

FOR OFFICE USE ONLY



Ph.# (0243) 9280201
Fax # (0243) 9280202

OFFICE OF THE DC/PROJECT DIRECTOR KHAIRPUR

No.DC/KSP/ 1225 /2015

Date: 01-06-2015

WORK ORDER

To,

M/s. NAZIR CONSTRUCTION COMPANY
Office Plot #. 3C,
2nd Floor Saba Commercial
St.No,02,
Phase-05, Ext.DHA, Karachi
Contact #: 0300.8262974

SUBJECT: "Construction of Heart Centre near Civil Hospital, Khairpur"
As per Drawings and Specification attached

Reference: Your Bid Opened on 28-05-2015

The item rate quoted by you has been scrutinized and evaluated by the Procurement Committee, and found your financial offer lowest and responsive:

S.NO:	DESCRIPTION OF WORK	QTY.	UNIT	RATE	Amount.
1	Civil, Plumbing & Electric Work (As per Drawings and Specification attached)	1.00	No.	178,303,310.00	178,303,310.00
2	Construction of Under Ground Water Tank (As per Drawings and Specification attached)	1.00	No.	1,251,337.00	1,251,337.00
3	External Development Work (As per Drawings and Specification attached)	1.00	No.	3,194,512.00	3,194,512.00
				GRAND TOTAL:	182,749,159.00


In words: (Rupees One Hundred Eighty Two Million, Seven Hundred Forty Nine Thousand, One Hundred & Fifty Nine Only).

This Work Order is for the said work subject to acceptance of all rules and regulations mentioned in the given tender documents.

The completion period will be 02 Years from the date of receipt of this Work Order.

Defect liability period will be 364 days from the date of completion certificate.

In case the Contractor (you) fail to complete the work within the stipulated period, a penalty of **Rs.5000/=** per day shall be levied to the maximum of 10% of the total cost of work.


Munawar Ali Mithani
DC/Project Director
Khairpur

Copy for information to:

1. All members of Procurement Committee
2. Master File (Office Copy)



Construction of Heart Centre At DHQ Hospital Khairpur

At District, Khairpur, Sindh.

BILL OF QUANTITY

GRAND SUMMARY

Total Component - I Construction of Heart Centre Building	Rs.	178303310/-
---	-----	-------------

Total Component - II Construction of Under Ground Water Tank	Rs.	1251337/-
--	-----	-----------

Total Component - III External Development Work of Heart Centre Building	Rs.	3194512/-
--	-----	-----------

Grand Total	Rs.	182749159/-
-------------	-----	-------------

Total in Words: (One Hundred Eighty Two Million Seven Hundred Forty Nine Thousand
One Hundred & fifty Nine Rupees Only)

Signature: *Mahmud*
Stamp

M/S Nazir Associates
M/S Nazir Construction Company

Dated: _____

Muz
DEPUTY COMMISSIONER
KHAIRPUR

First lowest
price or so
Muz
DEPUTY COMMISSIONER
KHAIRPUR



Construction of Heart Centre Building.
At DHQ Hospital Khairpur, District Khairpur, Sindh.
BILL OF QUANTITY

SUMMARY

Total (Part-A) Civil Work	Rs.	158624585/-
Total (Part-B) Plumbing Work	Rs.	3884310/-
Total (Part-C) Electrical Work	Rs.	15794415/-
Total (Part-A + B + C)	Rs.	178303310/-
Total in Words:(_____)		

Signature: *Arshad*
Arshad Arshad
Contractor Company

Arshad
DEPUTY COMMISSIONER
KHAIRPUR

dated: _____



Construction of Heart Centre Building.
At DHQ Hospital Khairpur, District Khairpur, Sindh.
BILL OF QUANTITY

SUMMARY

Total (Part-A) Civil Work	Rs.	158624585/-
---------------------------	-----	-------------

Total in Words: (_____)

Signature: *Mahmud*
Mahmud
Atif Nazaf Associates

dated: _____

Mahmud
Atif Nazaf Associates



Construction of Heart Centre Building.
At DHQ Hospital Khairpur, District Khairpur, Sindh.

BILL OF QUANTITY
(CIVIL WORKS)

Sr.	Description	Quantity	Unit	Rate	Amount
A	CIVIL WORK				
1	EARTHWORK				
1.1	EXCAVATION Excavation for foundation in all kinds of soils, dry or wet, hard or soft, up to 6'-0" from Natural Ground Level (N.G.L) including all operation of site clearing, complete with breaking clods, levelling, dressing, dewatering, shoring & compacting including lifting, shifting, buried foundation or disposing of surplus earth outside premises complete as per drawings, specifications and as per instructions of Consultant / Engineer In-charge.	126603	Cu.ft.	10/-	1266030
1.2	BACKFILLING Filling excavated earth in foundation, plinth and under floors i/c breaking clods, dressing, watering and consolidating by ramming in layers not exceeding 9" depth to obtain 95% modified AASHTO density i/c all lead and lift complete as per drawings, specifications and as per instructions of Consultant / Engineer In-charge.	126603	Cu.ft.	4/-	506412/-
1.3	EARTHFILLING Filling earth obtained from outside source (as per approved AASHTO Standard) and filling the same in foundation, plinth and under floors i/c breaking clods, dressing, watering and consolidating with mechanical means by compacter or roller in layers not exceeding 9" depth to obtain 95% modified AASHTO density i/c all lead and lift complete as per drawings, specifications and as per instructions of Consultant / Engineer In-charge.	27415	Cu.ft.	19/-	520885/-
1.4	EMBANKMENT Filling earth obtained from outside source (as per approved AASHTO Standard) and preparing embankment around plinth i/c breaking clods, dressing, watering and consolidating with mechanical means by compacter or roller in layers not exceeding 9" depth to obtain 95% modified AASHTO density i/c all lead and lift complete as per drawings, specifications and as per instructions of Consultant / Engineer In-charge.	10224	Cu.ft.	19/-	194286/-

Handwritten signature



Construction of Heart Centre Building.
At DHQ Hospital Khairpur, District Khairpur, Sindh.

BILL OF QUANTITY
(CIVIL WORKS)

Sr.	Description	Quantity	Unit	Rate	Amount
1.5	STONE SOLING Providing and laying stone soling (6" thick) of approved quality under foundation & sub floor including hand packing vertically and filling voids with spawels, consolidating and compacting with mechanical means by compacter or roller, complete as per drawings, specifications and as per instructions of Consultant / Engineer In-charge.				
1.5.1	6" thick Stone Soling Under Foundation.	21992	Sq.ft.	55/-	1209560/-
1.5.2	6" thick Stone Soling Under Sub Floor.	20650	Sq.ft.	55/-	1135750/-
2	PLAIN CEMENT CONCRETE Providing and laying Plain Cement Concrete where required using approved quality 3/4" max size down gauge graded crushed aggregate with approved quality fine aggregate i/c all formwork rodding vibrating levelling, compacting and curing etc. complete in all respects as per drawings, specifications and as per instructions of Consultant / Engineer In-charge.(SR cement should be used for all sub structure works)				
2.1	6" thick CC 1:4:8 (1 cement 4 sand and 8 coarse aggregate) under foundation.	4750	Cu.ft.	135/-	641250/-
2.2	4" thick CC 1:4:8 (1 cement 4 sand and 8 coarse aggregate) under Situ & plinth beam.	2531	Cu.ft.	135/-	341685/-
2.3	PCC 1:3:6 (1 cement 3 sand and 6 coarse aggregate) Cast in Situ with Formwork & Scaffolding complete.	2464	Cu.ft.	220/-	542080/-
3	DAMP PROOF COURSE Providing and laying 2" thick 1:11/2:3 (1 cement 11/2 sand & 3 coarse aggregate) DPC under walls and entrance over plinth beams using pudlo as per manufacturers instructions with 2 Coats of Hot Bitumen 10/20 at 1.64 kg per sqm complete as per drawing, specification and as per instructions of Engineer In-charge	4533	R.ft.	53/-	240249/-

Atif Nazar

DEPUTY COMMISSIONER
KHAIRPUR



Construction of Heart Centre Building.
At DHQ Hospital Khairpur, District Khairpur, Sindh.

BILL OF QUANTITY
(CIVIL WORKS)

Sr.	Description	Quantity	Unit	Rate	Amount
4	WATER PROOFING Providing, laying and applying hot bitumen to the vertical surfaces of the columns and the walls in foundation & plinth in two layers with 10/20 at 1.64 kg per sqm, applied hot over the completely dry surfaces of the concrete works, after the curing period is over, complete as per drawings, specifications and as per instructions of Consultant / Engineer In-charge.	30323	Sq.ft.	28/-	849044/-
5	TERMITE TREATMENT Termite proofing treatment with (Bi Flex FMC / Mairaj 5% SC By Ali Akbar Group or equivalent approved by Consultant) as per manufacturer specifications) comprising the following :	20650	Sq.ft.	9/-	185850/-
5.1	To all the earth dressed horizontal and vertical surfaces before laying of concrete etc. for columns and wall foundations as well as trenches for drain lines etc.				
5.2	To all foundations and plinth beams surfaces upto plinth level before earth filling				
5.3	To completion of stone soling in plinth area complete and also in plinth protection Note: Payment as per Plinth Area one time.				
6	REINFORCED CEMENT CONCRETE Providing and laying Reinforced cement concrete (Design Mix) of specified strength using approved quality 3/4" max. size and down gauge graded crushed aggregate & fine aggregate and any required admixtures as per manufacturer specs. with the approval of consultant including approved form work & its removal, all operations of vibrating, levelling, compacting and curing etc complete but excluding the cost of steel (SR cement should be used for all sub structure works). (Design Mix of Concrete will be prepared and report will be submitted before execution of work at site)				
6.1	RCC 3000 Psi (Cylindrical Strength) footing (isolated/raft/pad/combined)	31995	Cu.ft.	379/-	12126105/-
6.2	RCC 3000 Psi (Cylindrical Strength) Column Stem upto Plinth.	2857	Cu.ft.	400/-	1142800/-



Construction of Heart Centre Building.
At DHQ Hospital Khairpur, District Khairpur, Sindh.

BILL OF QUANTITY
(CIVIL WORKS)

Sr.	Description	Quantity	Unit	Rate	Amount
6.3	RCC 3000 Psi (Cylindrical Strength) Lift Well Walls upto Plinth.	313	Cu.ft.	400/-	125200/-
6.4	RCC 3000 Psi (Cylindrical Strength) in Plinth Beams including Ledges.	4050	Cu.ft.	390/-	1579500/-
6.5	RCC 3000 Psi (Cylindrical Strength) in Super Structure Columns of Ground Floor, First Floor, Second Floor & Roof.	12971	Cu.ft.	410/-	5318110/-
6.6	RCC 3000 Psi (Cylindrical Strength) in Super Structure Lift Well Walls of Ground Floor, First Floor, Second Floor & Machine Room Roof.	1778	Cu.ft.	410/-	728980/-
6.7	RCC 3000 Psi (Cylindrical Strength) Beams of Ground Floor, First Floor, Second Floor & Roof.	13770	Cu.ft.	405/-	5576850/-
6.8	RCC 3000 Psi (Cylindrical Strength) slabs at Ground Floor, First Floor, Second Floor, Roof, Machine Room Base & Roof Slab.	28707	Cu.ft.	410/-	11769870/-
6.9	RCC 3000 Psi (Cylindrical Strength) staircase flight, steps & Landing.	559	Cu.ft.	400/-	223600/-
6.10	RCC 3000 Psi (Cylindrical Strength) Door Lintels as per drawing and specifications.	500	Cu.ft.	400/-	200000/-
6.11	RCC 3000 Psi (Cylindrical Strength) Slabs for Counters as per drawing and specifications.	293	Cu.ft.	400/-	117200/-
6.12	RCC 3000 Psi (Cylindrical Strength) O.H.W.Tank Base Slab as per drawing and specifications.	92	Cu.ft.	400/-	36800/-
6.13	RCC 3000 Psi (Cylindrical Strength) O.H.W.Tank Walls as per drawing and specifications.	150	Cu.ft.	410/-	61500/-
6.14	RCC 3000 Psi (Cylindrical Strength) O.H.W.Tank Roof Slab as per drawing and specifications.	92	Cu.ft.	410/-	37720/-

makms

Alwa

DEPUTY COMMISSIONER
KHAIRPUR



Construction of Heart Centre Building.
At DHQ Hospital Khairpur, District Khairpur, Sindh.

BILL OF QUANTITY
(CIVIL WORKS)

Sr.	Description	Quantity	Unit	Rate	Amount
7	STEEL REINFORCEMENT Providing fabricating and laying hard grade ribbed deformed (min yield point 60,000 psi) steel reinforcement bars including the cost of straightening, cutting, bending, binding, wastage and such overlaps as are not shown in drawings, placing in position on cement concrete 1:2:4 / 1:11/2:3 precast spacer block or m.s chairs,tying with binding wire (GI wire of 18 guage), including cost of chairs and wires etc. in all kinds of RCC works. Note: The Contractor has to submit the Bar Bending Schedule twenty working days before execution of any related activity to the Consultant Head Office.				
7.1	Deformed Steel (Grade 60)	333	Tons	132000/-	43956000/-
8	BRICK MASONRY				
8.1	Providing and laying Brick masonry (9" thick) with good quality 1st class burnt bricks (origin from Local as approved by Consultant) for External Wall & All Internal Walls at any level at any height in 1:4 (1 cement 4 sand) including fixing of wall ties (b/w RCC & Brick Masonry Joints 3/8"Ø Dowel Bar (1'-6" length) at every 3rd course of masonry) (inclusive of cost of steel) complete as per drawings, specifications and as per instructions of Consultant / Engineer In-charge.	46176	Cu.ft.	180/-	8311680/-
8.2	Providing and laying Brick masonry (4½" thick) with good quality 1st class burnt bricks (origin from Local as approved by Consultant) for Internal partition walls at any level at any height in 1:4 (1 cement 4 sand) including fixing of wall ties (b/w RCC & Brick Masonry Joints 3/8"Ø Dowel Bar (1'-6" length) at every 3rd course of masonry) (inclusive of cost of steel) complete as per drawings, specifications and as per instructions of Consultant / Engineer In-charge.	556	Cu.ft.	205/-	113980/-

Mahmud

Khan

DEPUTY COMMISSIONER
KHAIRPUR



Construction of Heart Centre Building.
At DHQ Hospital Khairpur, District Khairpur, Sindh.

BILL OF QUANTITY
(CIVIL WORKS)

Sr.	Description	Quantity	Unit	Rate	Amount
9	PLASTER Providing & applying smooth 1/2" to 3/4" th plaster to walls columns, Ceiling etc. with 1:4 (1 cement 4 sand) ratio, i/c all corners, recesses, jambs, patta, gola, cornice and raking out joints and fixing of Expanded metal 1/2" to 3/4" 16 Gauge (3" wide) lathing to all joints of masonry & RCC Works and over cuttings of electric conduits with washers & steel nails (as per detail) including katcha/base plaster complete as per drawings, specifications and as per instructions of Consultant / Engineer In-charge.				
9.1	Internal Plaster (at any level at any height) (1/2" thick 1:4 O.P. Cement Sand Plaster) with coving in all wall, floor, slab joints (including 1/2" thick 1:4 O.P. Cement Sand katcha/base plaster)	164370	Sq.ft.	58/-	9533460/-
9.2	External Plaster with Grooves as per design (at any level at any height) (3/4" thick 1:4 O.P.Cement Sand Plaster)	24480	Sq.ft.	34/-	832320/-
9.3	PUDLO PLASTER Providing & applying smooth 3/4" thick to internal walls of O.H.W.Tank etc. with 1:4 cement ratio, i/c all corners, recesses, jambs and raking out joints alongwith (pudlo - 2kg per bag of approved quality) complete as per drawings, specifications and as per instructions of Consultant / Engineer In-charge.	282	Sq.ft.	50/-	14100/-
10	EXTERNAL FINISHES				
10.1	COLOR CREETE PLASTER Providing and Applying Smooth Colour Crete Plaster 5mm thick of 1:4 Cement Sand Plaster over previously laid plaster with white cement and approved colour pigment in external surface of the building (at any level at any height) as per approved pattern of grooves and design complete as per drawing and specification or as directed by Engineer-In-Charge / Consultant.	3415	Sq.ft.	60/-	204900/-

maht

Maht

DEPUTY COMMISSIONER
KHAIRPUR



Construction of Heart Centre Building.
At DHQ Hospital Khairpur, District Khairpur, Sindh.
BILL OF QUANTITY
(CIVIL WORKS)

Sr.	Description	Quantity	Unit	Rate	Amount
10.2	ACP CLADDING Supplying fabricated Cladding of Aluminium Composite Panel ACP Cladding Sheet "PVDF Coated" 4mm overall thickness (0.5mm aluminum skin on front and 0.3mm aluminum skin on back side and polyethylene between both skins) brand name (DADEX Alucopanel / Aluco Master / I-Bond or equivalent approved by Consultant) different multi colours as approved by Consultant on external walls at any level any height with aluminium heavy duty channel, U channel, pipe channels, hardware accesories etc. and complete finish work 1/2" groove size, low modulus sealent, gaskit 15 years shining and lifetime material warranty (Fixing through their approved fabricators or as approved by Consultant complete as per drawings, specifications and as per instructions of Engineer In-charge / Consultant. (Shop drawings shall be provided for the approval of Engineer/Consultant)..	5901	Sq.ft.	450/-	2655450/-
10.3	DOUBLE GLAZED CURTAIN WALL Providing and fixing in position anodized Champagne Colour aluminium Double Glazed Curtain Wall Section of best quality manufactured by (Pakistan Cables / Alcop or equivalent approved by consultant) (at any level at any height) (Fixing through their approved fabricators) 92mm x 50mm curtain wall section, 2.5 mm thick Powder Coated MS Flange Plate 3mm thickness Regular size 3in x 3in min. or bigger as per requirement, silicon, heavy duty rubber, gaskit with all accessories cutting holes etc., fixing and cost of first class 5 mm thick tempered glass (tinted / Green / Blue / Gray Glass) outside and 5 mm thick plain clear glass (tinted / Green / Blue / Gray Glass) and 12 mm thick spacing filled with moisture absorbent chemical / gel or equivalent approved by Consultant) complete as per drawings, specifications and instruction of Engineer In-charge / Consultant (Shop drawings shall be provided for the approval of Engineer/Consultant).	1332	Sq.ft.	1050/-	1398600/-

mehtab

Alwe.



Construction of Heart Centre Building.
At DHQ Hospital Khairpur, District Khairpur, Sindh.

BILL OF QUANTITY
(CIVIL WORKS)

Sr.	Description	Quantity	Unit	Rate	Amount
10.4	GRANITE CLADDING Providing & Fixing 3/4" thick pre polished approved Granite in single piece (Dark Colour shade (Cherry Brown / Red) or as approved by Consultant) in single piece (Size 1'-0" x 1'-0", 2'-0"x 2'-0" & 3'-0"x 1'-0" or as approved on site by Consultant) on Front Wall as shown on drawings including complete fixing arrangement / hooks, hangers with nut bolts incl. preparation and laying of base plaster (3/4" thick) in 1:3 cement sand mortar, filling / grouting joints in white cement & matching colour grout as required, mechanical cutting and required scaffolding complete as per drawings, specifications and as per instructions of Engineer In-charge / Consultant.	1382	Sq.ft.	800/-	1105600/-
10.5	ALUMINUM RIBS Providing, making and fixing 4" X 6" Aluminum Ribs (Wood Colour) Powder Coated in Front elevation at every 6" in Front Wall opening with fixing arrangement and including buffing and making joints, finished with high standard fittings complete as per drawings, specifications, and/or as directed by the Consultant (Shop drawings to be provided to Consultant for approval).	449	R.ft.	600/-	269400/-
11	FLOORING				
11.1	3" thick CC 1:3:6 (1 cement 3 sand and 6 coarse aggregate) under flooring using approved quality 3/4" max size graded crushed aggregate or crushed stone with approved quality fine aggregate i/c all levelling, compacting and curing etc. complete in all respects as per drawings, specifications and as per instructions of Engineer In-charge.	18813	Sq.ft.	68/-	1279284/-
11.2	3" thick CC 1:2:4 (1 cement 2 sand and 4 coarse aggregate) finish flooring using approved quality 3/4" max size graded crushed aggregate or crushed stone with approved quality fine aggregate i/c all levelling, compacting, troweling, finishing and curing etc. complete in all respects as per drawings, specifications and as per instructions of Engineer In-charge.	5240	Sq.ft.	95/-	497800/-

M. Nazir

M. Nazir



Construction of Heart Centre Building.
At DHQ Hospital Khairpur, District Khairpur, Sindh.

BILL OF QUANTITY
(CIVIL WORKS)

Sr.	Description	Quantity	Unit	Rate	Amount
11.3	Providing & laying Porcelain tiles size (24" x 24") (Non Skid) Make (Shabbir Tiles / Nano Polished Tiles or equivalent approved by Consultant) polished of approved quality, plain / approved diagonal patterns and shades / border of approved colour and shades, preparation and laying of base coat (2" thick) in 1:2:4 plain cement concrete, over Sub floor / RCC Slab including filling of joints with matching colour grout, complete in all respect as per drawings, specifications and as per instructions of Consultant / Engineer In-charge.	40484	Sq.ft.	360/-	14574240/-
11.4	Providing & Laying of approved quality & sizes (as per floor tiles or as per border tiles) of porcelain tiles Make (Shabbir Tiles / Nano Polished Tiles or equivalent approved by Consultant) skirting 4" high including chieseling/ wall where ever required and cement mortar backing complete in all respects as per drawings, specifications and as per instructions of Consultant / Engineer In-charge.	9271	Sq.ft.	250/-	2317750/-
11.5	Providing & laying ceramic tiles (on Walls size 10" x 13") (on floor size 10" x 10") Make (Shabbir Tiles / Master Tiles or equivalent approved by Consultant) with borders on walls, walls (up to 5'-0") & floors of approved shades & patterns (approved by Consultant) in bath room & toilets, preparation and laying of base plaster / concrete in 1:5 cement sand mortor, over previously laid floor, complete in all *respect as per drawing / specification and instructions of Consultant / Engineer In-charge.	13910	Sq.ft.	220/-	3060200/-
11.6	Providing & laying ceramic tiles (size 8" x 8" or as approved, Make Shabbir Tiles / Master Tiles or equivalent approved by Consultant) on counter top walls in kitchens, Pantry, Path Laboratory (2'-0" high) approved shades & patterns (Printed / Textured & Plain as per Design) (approved by Consultant), preparation and laying of min. 1/2" thick base plaster in 1:4 cement sand mortor, complete in all respect as per drawings, specifications and as per instructions of Consultant / Engineer In-charge.	2273	Sq.ft.	220/-	500060/-

Mahmud

Deep



Construction of Heart Centre Building.
At DHQ Hospital Khairpur, District Khairpur, Sindh.

BILL OF QUANTITY
(CIVIL WORKS)

Sr.	Description	Quantity	Unit	Rate	Amount
11.7	Providing & laying Pre Polished Terrazoo Chequered Tiles in Ramp Floor size (12" x 12") (Non Skid) Make (Mohammadi Tiles / Alnoor Tiles or equivalent approved by Consultant) polished of approved quality / approved patterns and shades / border of approved colour and shades, preparation and laying of base coat (2" thick) in 1:2:4 plain cement concrete, over Sub floor / RCC Slab including filling of joints with matching colour grout, complete in all respect as per drawings, specifications and as per instructions of Consultant / Engineer In-charge.	6693	Sq.ft.	180/-	1204740/-
11.8	Providing & applying 3mm thick Epoxy Flooring by Corro Floor SS2000 on floor i/c applying priming coat, filling, rubbing smoothing with sand paper. Applying three coats of Epoxy Coat of Shabbir Tiles & Ceramics Limited or equivalent brand approved by Consultant of approved light colour shade to floor, coved skirting, coved surfaces in the interior of the Minor OT / OT & Sterile Areas as shown on the drawings including application of primer and preparation of surface to be painted complete as per drawings, specifications and as per instructions of Consultant / Engineer In-charge.	2037	Sq.ft.	350/-	71950/-
11.9	Providing & applying 500 microns thickness Epoxy Coating Corro Coat SF500 on walls i/c applying priming coat, filling, rubbing smoothing with sand paper. Applying three coats of Epoxy Coat of Shabbir Tiles & Ceramics Limited or equivalent brand approved by Consultant of approved light colour shade to walls, columns, coved surfaces in the interior of the Minor OT / OT & Sterile Areas as shown on the drawings including application of primer and preparation of surface to be painted complete as per drawings, specifications and as per instructions of Consultant / Engineer In-charge.	6334	Sq.ft.	140/-	886760/-

Mahmud

Deputy

DEPUTY COMMISSIONER
KHAIRPUR



Construction of Heart Centre Building.
At DHQ Hospital Khairpur, District Khairpur, Sindh.

BILL OF QUANTITY
(CIVIL WORKS)

Sr.	Description	Quantity	Unit	Rate	Amount
11.10	Providing & laying Porcelain tiles on Dado Wall upto height 5'-0" size (20" x 10" Bone White / 20" x 5" Chocolate Brown) Make (Shabbir Tiles or equivalent approved by Consultant) polished of approved quality, approved patterns and shades / preparation and laying of base Plaster (1/2" thick) in 1:4 cement Sand Mortar, Plastered Wall including filling of joints with matching colour grout, complete in all respect as per drawings, specifications and as per instructions of Consultant / Engineer In-charge.	4346	Sq.ft.	360/-	1564560/-
12	MARBLE FIXING				
12.1	Providing & laying 3/4" thick pre polished approved marble (China Verona or as approved by Engineer In-Charge / Consultant) in single piece on Entrance Steps / Stairs Steps as shown on drawings including preparation and laying of base plaster / concrete (2" thick) in 1:5 cement sand mortar, filling/grouting joints in white cement & matching colour grout as required, mechanical cutting complete as per drawings, specifications and as per instructions of Consultant / Engineer In-charge.	349	Sq.ft.	200/-	69800/-
12.2	Providing & laying 3/4" thick pre polished approved marble (size 1'-0" x 1'-0") (China Verona or as approved by Engineer In-Charge / Consultant) on Stairs Landing as shown on drawings including preparation and laying of base plaster / concrete (2" thick) in 1:5 cement sand mortar, filling/grouting joints in white cement & matching colour grout as required, mechanical cutting complete as per drawings, specifications and as per instructions of Consultant / Engineer In-charge.	228	Sq.ft.	180/-	41040/-
12.3	Providing & laying 3/8" thick pre polished approved marble (China Verona or as approved by Consultant) on Entrance stair riser / stairs skirting as shown on drawings including preparation and laying of base plaster in 1:5 cement sand mortar, pointing in white cement & matching colour grout as required, mechanical cutting complete as per drawings, specifications and as per instructions of Consultant / Engineer In-charge.	109	Sq.ft	200/-	21800/-



Construction of Heart Centre Building.
At DHQ Hospital Khairpur, District Khairpur, Sindh.

BILL OF QUANTITY
(CIVIL WORKS)

Sr.	Description	Quantity	Unit	Rate	Amount
12.4	Providing & laying 3/4" thick pre polished approved marble (China Verona or as approved by Engineer In-Charge / Consultant) in single piece on Counter Tops / VanityTops / Nursing Counters as shown on drawings including preparation and laying of base plaster / concrete (2" thick) in 1:5 cement sand mortar, filling/grouting joints in white cement & matching colour grout as required, mechanical cutting complete as per drawings, specifications and as per instructions of Consultant / Engineer In-charge.	587	Sq.ft.	400/-	234800/-
13	PLINTH PROTECTION				
13.1	Plinth protection all around building including the cost of levelling, dressing and compacting surface, providing and laying 4" thick stone soling and 3" thick 1:2:4 (1 cement 2 sand & 4 coarse aggregate) over soling in panels and specified slopes complete as per drawings, specifications and as per instructions of Consultant / Engineer In-charge.	500	Sq.ft.	100/-	50000/-
14	ROOF SCREEDING				
14.1	Providing & Making Roof finishing composed of R.C.C.1:2:4 screed of min.50mm thickness laid in panels not exceeding 16 Sft. in specified slopes over RCC slab and applying two coats of hot bitumen PB4 at 1.64 kg per sqm, spreading of Pea gravel over bitumen surface, and laying RCC 1:2:4 (with nominal steel), including the cost of steel, bitumen, complete as per drawings, specifications and as per instructions of Consultant / Engineer In-charge.	10650	Sq.ft.	100/-	1065000/-
15	PAINTS				
15.1	Providing & applying distemper paint over the interior surfaces of ceiling i/c. rubbing, smoothing with sand paper. Applying three coats of dulux (ICI) or Berger of approved shade & colour to the ceiling of slab, as per drawing / specifications & as per instructions of Consultant.	55885	Sq.ft.	30/-	1676550/-

M. H. Nazir

Plave.

DEPUTY COMMISSIONER
KHAIKHAIRPUR



Construction of Heart Centre Building.
At DHQ Hospital Khairpur, District Khairpur, Sindh.
BILL OF QUANTITY

Sr.	Description	Quantity	Unit	Rate	Amount
15.2	Providing & applying Matt Finish Paint on walls i/c applying priming coat, filling, rubbing smoothing with sand paper. Applying three coats of dulux ICI or Berger of approved shade to walls, columns, coved surfaces in the interior of the building as shown on the drawings including application of primer and preparation of surface to be painted complete as per drawings, specifications and as per instructions of Consultant / Engineer In-charge.	95613	S.ft.	35/-	3346455/-
15.3	Providing & applying weather shield paint over the external surfaces of building, columns & beams / Projections i/c. filling, rubbing, smoothing with sand paper. Applying three coats of dulux (ICI) or Berger of approved shade & colour complete as per drawings, specifications and as per instructions of Consultant / Engineer In-charge.	15867	Sq.ft.	30/-	476010/-
15.4	Providing & applying oil paint on wood works surfaces of doors, including rubbing, finishing with sand paper. Applying three coats of Matt dulux (ICI) or Berger of approved shade, including preparation of surface to be painted complete as per drawings, specifications and as per instructions of Consultant / Engineer In-charge.	1940	Sq.ft.	35/-	67900/-
15.5	Providing & applying Lacquer Polish (Matt) on wood works surfaces of doors, including rubbing, finishing with sand paper, Applying three coats of Wood Shield Wood Protection of Jotun / ICI i/c termite treatment as per manufacturer specifications & (matt pattern / shade of door polish approved by Consultant), including preparation of surface to be polished complete as per drawings, specifications and as per instructions of Consultant / Engineer In-charge.	3300	Sq.ft.	140/-	462000/-

naheem

Alwe.

DEPUTY COMMISSIONER
KHAIRPUR



Construction of Heart Centre Building.
At DHQ Hospital Khairpur, District Khairpur, Sindh.

BILL OF QUANTITY
(CIVIL WORKS)

Sr.	Description	Quantity	Unit	Rate	Amount
16	WOODEN DOOR				
16.1	Providing and fixing 1-1/2" thick solid commercial ply single shutter flush doors with 3/8" thick wooden lipping best quality all around and 16 guage galvanized steel sheet frame and molding (thickness of frame is same as wall thickness) The item includes fixing of door frames in wall opening with six holdfasts filling around frames as well as in pockets with 1:4 mortar, with fixing of S.S. Push Plate on both side this item include application of one coat of zinc chromate primer to steel frames complete including wooden architrave / beading, handle, lock (Basic Price of Lock = Rs. 1000/=), closer, hinges & door stoper of approved quality complete as per drawings, specifications and as per instructions of Consultant / Engineer In-charge.	3060	Sq.ft.	820/-	2509200/-
16.2	Providing and fixing 1-1/2" thick solid commercial ply single shutter flush doors (For Toilets) with 3/8" thick wooden lipping best quality all around, fixing kick plate 1'-0" high and 16 guage galvanized steel sheet frame and molding (thickness of frame is same as wall thickness) The item includes fixing of door frames in wall opening with six holdfasts filling around frames as well as in pockets with 1:4 mortar, with fixing of S.S. Push Plate on both side this item include application of one coat of zinc chromate primer to steel frames complete including wooden architrave / beading, handle, lock/latch (Basic Price of Lock/Latch = Rs. 1000/=), closer, hinges & door stoper of approved quality complete as per drawings, specifications and as per instructions of Consultant / Engineer In-charge.	970	Sq.ft.	820/-	795400/-

Mahmud

MWC
DEPUTY COMMISSIONER
KHAIRPUR



Construction of Heart Centre Building.
At DHQ Hospital Khairpur, District Khairpur, Sindh.

BILL OF QUANTITY
(CIVIL WORKS)

Sr.	Description	Quantity	Unit	Rate	Amount
16.3	Providing and fixing 1-1/2" thick solid commercial ply single shutter flush doors (Double Action) (For Scrub) with 3/8" thick wooden lipping best quality all around and 16 guage galvanized steel sheet frame and molding (thickness of frame is same as wall thickness) The item includes fixing of door frames in wall opening with six holdfasts filling around frames as well as in pockets with 1:4 mortar, with fixing of S.S. Push Plate on both side this item include application of one coat of zinc chromate primer to steel frames complete including wooden architrave / beading, handle, Special lock/Latch for Scrub (Basic Price of Lock = Rs. 1000/=), closer special hinges, & door stoper of approved quality complete as per drawings, specifications and as per instructions of Consultant / Engineer In-charge.	103	Sq.ft.	820/-	84460/-
16.4	Providing and fixing 1-1/2" thick solid commercial ply single shutter flush doors of Control Room with (Provision of Lead Sheet Clading) with 3/8" thick wooden lipping best quality all around and 16 guage galvanized steel sheet frame and molding (thickness of frame is same as wall thickness) The item includes fixing of door frames in wall opening with six holdfasts filling around frames as well as in pockets with 1:4 mortar, with fixing of S.S. Push Plate on both side this item include application of one coat of zinc chromate primer to steel frames complete including wooden architrave / beading, handle, lock (Basic Price of Lock = Rs. 1000/=), closer, hinges & door stoper of approved quality complete as per drawings, specifications and as per instructions of Consultant / Engineer In-charge.	34	Sq.ft.	1000/-	34000/-

nazar

DEPUTY COMMISSIONER
KHAIRPUR

Raw



Construction of Heart Centre Building.
At DHQ Hospital Khairpur, District Khairpur, Sindh.

BILL OF QUANTITY
(CIVIL WORKS)

Sr.	Description	Quantity	Unit	Rate	Amount
17	ALUMINIUM WINDOWS SLIDING				
17.1	Providing and fixing in position Champagne anodized aluminium windows of best quality manufactured by (Pakistan Cables Alum-Ex / Prime Aluminum or equivalent approved by consultant) (Fixing through their approved fabricators) Box Sliding Window section, 95mm x 30 mm and 1.6mm thick including the cost of aluminium netting / fly proofing fittings with all accessories cutting holes etc., fixing and cost of first class 6 mm thick Imported tinted glass complete as per drawings, specifications and instruction of Engineer In-charge (Shop drawings shall be provided for the approval of Engineer/Consultant).	1590	Sq.ft.	850/-	1351500/-
18	ALUMINIUM WINDOWS FIXED				
18.1	Providing and fixing in position Champagne anodized aluminium windows of best quality manufactured by (Pakistan Cables Alum-Ex / Prime Aluminum or equivalent approved by consultant) (Fixing through their approved fabricators) Box Fixed Window section, 95mm x 30 mm and 1.6mm thick including the cost of fittings with all accessories cutting holes etc., fixing and cost of first class 6 mm thick Imported tinted glass complete as per drawings, specifications and instruction of Engineer In-charge (Shop drawings shall be provided for the approval of Engineer/Consultant).	18	Sq.ft.	850/-	15300/-
19	ALUMINIUM VENTILATORS				
19.1	Providing and fixing in position Champagne anodized aluminium ventilators as per manufactured by (Pakistan Cables Alum-Ex / Prime Aluminum or equivalent approved by consultant) (Fixing through their approved fabricators), Box Sliding section, 95mm x 30 mm and 1.6mm thick including the cost of aluminium netting / fly proofing fittings with all accessories cutting holes etc., fixing and cost of 1st class 6mm thick Imported tinted glass (frosted) complete as per drawings, specifications and instructions of Consultant / Engineer In-charge. (Shop drawings shall be provided for the approval of Engineer/Consultant)	219	Sq.ft.	950/-	208050/-

Mahmud

DEPUTY COMMISSIONER
KHAIRPUR



Construction of Heart Centre Building.
At DHQ Hospital Khairpur, District Khairpur, Sindh.

BILL OF QUANTITY
(CIVIL WORKS)

Sr.	Description	Quantity	Unit	Rate	Amount
20	ALUMINUM DOORS				
20.1	Providing and fixing Champagne anodized aluminium swing doors with frame as per British standards manufactured by (Pakistan Cables Alum-Ex / Prime Aluminum or equivalent approved by consultant) (Fixing through their approved fabricators), Deluxe model section, 101.6mmx 44.5mm and 2mm thick including the aluminium fittings with all accessories including door closers, hinges, handles & lock, cutting holes etc fixing and cost of 1st class Belgium made 8mm thick tinted glass and aluminum corrugated sheet complete as per drawings, specifications and instructions of Engineer/Consultant (Shop drawings shall be provided for the approval of Engineer/Consultant)	1009	Sq.ft.	1100/-	1109900/-
20.2	Providing and fixing Champagne anodized aluminium swing doors with frame (Provision of Lead Sheet Cladding) as per British standards manufactured by (Pakistan Cables Alum-Ex / Prime Aluminum or equivalent approved by consultant) (Fixing through their approved fabricators), Deluxe model section, 101.6mmx 44.5mm and 2mm thick including the aluminium fittings with all accessories including door closers, hinges, handles & lock, cutting holes etc fixing and cost of double aluminum corrugated sheet heavy duty complete as per drawings, specifications and instructions of Engineer/Consultant (Shop drawings shall be provided for the approval of Engineer/Consultant)	68	Sq.ft.	1300/-	88400/-

nahtms

News
DEPUTY COMMISSIONER
KHAIRPUR



Construction of Heart Centre Building.
At DHQ Hospital Khairpur, District Khairpur, Sindh.

BILL OF QUANTITY
(CIVIL WORKS)

Sr.	Description	Quantity	Unit	Rate	Amount
21	UPVC DOORS				
21.1	Providing and fixing in position High quality UPVC Openable/Swing Doors Double leaf Framed Pannelled Door for O.T. (White Color as approved by Consultant) of best quality manufactured by (FRAMEZ or approved equivalent) (Fixing through their approved fabricators) Premium Model section with beading / architrave, 60 mm x 60 mm and 2.6 mm thick with Door Shutter Size 106mm x 60mm x 2.6mm thick including the cost of imported stainless steel fittings, Stainless Steel Screws, door closers, imported hinges, handles & lock, with all fittings & accessories (rust proof) cutting holes etc., fixing and cost of first class Belgium made 8 mm thick imported Tinted / Plain glass in vision panel complete as per drawings, specifications and instruction of Engineer In-charge (Shop drawings shall be provided for the approval of Engineer/Consultant).	113	Sq.ft.	1300/-	146900/-
22	S.S. HAND RAILING				
22.1	Providing, making and fixing S.S. hand railing in stair case consisting of 1 1/2" Ø S.S. Vertical Post at every alternate Step with fixing arrangement of 16 gauge 4"x4" S.S. Circular Plate with Rawal Bolts and horizontal main rail of 2" Ø S.S. Pipe & 3 Nos 1/2" Ø S.S. Pipes as horizontal pipe with SS Clamps and including buffing and making joints with finished, welded with high standard all fitting fixtures of S.S.complete as per drawings, specifications, and/or as directed by the Consultant (Shop drawings to be provided to Consultant for approval).	139	R.ft.	400/-	55600/-
23	WOODEN HAND RAIL				
23.1	Providing & Fixing Wooden Hand Rail 6"inch wide (Sheesham Wood) embeded in wall with MS Flat Patti / holdfasts accesories grouted in walls including lacquer polish to all sheesham wood surfaces and one prime coat and three coats of enamel paint to all iron works complete in all respect as per drawings, specifications and as per instructions of Consultant / Engineer In-charge. (Shop drawings shall be provided for the approval of Engineer/Consultant)	1469	Sq.ft.	600/-	881400/-

malik



Construction of Heart Centre Building.
At DHQ Hospital Khairpur, District Khairpur, Sindh.

BILL OF QUANTITY
(CIVIL WORKS)

Sr.	Description	Quantity	Unit	Rate	Amount
24	WOODEN CABINETS				
24.1	Providing and fixing Floor mounted Wooden Cabinets (Make Interwood / Betterhome or equivalent approved by Consultant) (2'-0" deep) in Pharmacy / Path Lab complete comprising of Malaysian MDF Lasani with Double Pressed approved colour Formica with 1st class soft wood frame and wooden lipping complete including handles & stopers of approved quality and drawer arrangements complete as per drawings, specifications and as per instructions of Consultant / Engineer In-charge. (Marble Top Paid in Item No.12.4)	345	Sq.ft.	900/-	310500/-
24.2	Providing and fixing at any height Wall mounted Wooden Cabinets with frame of (Make Interwood / Betterhome or equivalent approved by Consultant) (1'-3" deep) comprising of Malaysian MDF Lasani with Double Pressed approved colour Formica with 1st class soft wood frame and wooden lipping complete including handles & stopers of approved quality and drawer arrangement complete as per drawings, specifications and as per instructions of Consultant / Engineer In-charge.	248	Sq.ft.	1000/-	248000/-
24.3	Providing and fixing at any height Wall mounted Wooden Cabinets with frame of kitchen exhaust hood or chimney (Make Interwood / Betterhome or equivalent approved by Consultant) (1'-3" deep) comprising of Malaysian MDF Lasani with Double Pressed approved colour Formica with 1st class soft wood frame and wooden lipping complete including handles & stopers of approved quality and drawer arrangement complete as per drawings, specifications and as per instructions of Consultant / Engineer In-charge.	68	Sq.ft.	1000/-	68000/-

matras

Aluz
DEPUTY COMMISSIONER
KHAIRPUR



Construction of Heart Centre Building.
At DHQ Hospital Khairpur, District Khairpur, Sindh.

BILL OF QUANTITY
(CIVIL WORKS)

Sr.	Description	Quantity	Unit	Rate	Amount
25	FALSE CEILING				
25.1	Providing and Fixing Gypsum Board False Ceiling in First Floor ICU /CCU (Make DFB Brand or equivalent as approved by Consultant) with aluminium foil back comprising of Imported (4'-0"x8'-0") Seamless / Jointless Sealing 12mm thick gypsum board and metal suspension system including cartage at site, wastage, and hole for lighting arrangement & inspection panel as per drawing (if any) complete as per drawings, specifications and as per instructions of Consultant / Engineer In-charge.	2000	Sq.ft.	310/-	620000/-
26	LEAD SHEET CLADDING & GLASS				
26.1	LEAD SHEET CLADDING Providing & Laying Lead Sheet (imported) (1.5mm thick) according to standard approved by Pakistan Atomic Energy Commission and Pakistan Nuclear Regulatory Authority on walls upto 8'-0" high & Doors Shutter and Door frame of X-Ray and Thallium Stress Test including providing and fixing both side 1/2" thick Lasani sheets and required finishing and fixing complete in all respect as per drawings, specifications, and/or as directed by the Engineer In-charge / Consultant.	660	Sq.ft.	750/-	495000/-
26.2	LEAD GLASS Providing & Fixing Lead Glass (imported) (10mm - 12mm thick) according to standard approved by Pakistan Atomic Energy Commission and Pakistan Nuclear Regulatory Authority on lead cladded (1.5mm thick) 1st Class soft wooden frame of X-Ray Control Room / Thallium Stress Test Control Room including all fittings and fixing complete in all respect as per drawings, specifications, and/or as directed by the Engineer In-charge / Consultant.	40	Sq.ft.	5000/-	200000/-

malik

Alvi



Construction of Heart Centre Building.
At DHQ Hospital Khairpur, District Khairpur, Sindh.

BILL OF QUANTITY
(CIVIL WORKS)

Sr.	Description	Quantity	Unit	Rate	Amount
27	SUNK SLAB TREATMENT				
27.1	Providing and filling of Sunk Slab with light weight pots and filling with 3" thick PCC 1:3:6 / light weight concrete with crushed or broken stone over it and finishing the same as underlay for Tile Flooring of Toilets complete as per drawing / specification and instructions of Engineer Incharge.	1743	Sq.ft.	140/-	244020/-
28	MS STEEL LOUVER DOOR				
28.1	Providing and fixing framed doors and gates prepared attachment of Covering through GI Sheet Louvers (16 Gauge) including hinges, door fittings, fastening, tower bolts, aldrops and hanging including welding complete and including applying one primer coat of red oxide and three coats of dulux (ICI) / Berger Enamel Paint of approved shade and colour complete as per drawings, specifications and instructions of Consultant (Shop drawings shall be provided for the approval of Consultant)	70	Sq.ft.	700/-	49000/-
29	MISCELANEOUS				
29.1	MANHOLE COVER Supply and Fix Manhole cast iron cover with frame (24" x 24") (Make CMP) with frame set in cement mortar and fixing in tank slab in concrete complete as per drawings, specifications and as per instructions of Consultant / Engineer In-charge.	2	Nos.	5000/-	10000/-
29.2	Providing and fixing Precast Rain Water Spouts in Roof as per approved design complete as per drawings, specifications and as per instructions of Consultant / Engineer In-charge.	15	Nos.	1100/-	16500/-

mahmud

Mur.

DEPUTY COMMISSIONER
KHAIRPUR



Construction of Heart Centre Building.
At DHQ Hospital Khairpur, District Khairpur, Sindh.

BILL OF QUANTITY
(CIVIL WORKS)

Sr.	Description	Quantity	Unit	Rate	Amount
29.3	Providing and fixing PCC Jali Size 12" x 12", (Make Mohammadi Tile Khi. / Alnoor Tiles or equivalent approved by Consultant) of 1:4 cement sand mortar (Double Jali 2" thick each total thickness 4") of approved sample. Setting the jali in 1:4 cement sand mortar at any level at any height including grouting, curing, scaffolding etc, complete as per drawings, specifications and as per instructions of Consultant / Engineer In-charge. General Note: For all finishing items, line size mockup model will be required at site for final approval from the Consultant (Design team / Monitoring team) & Engineer In-charge.	231	Sq.ft.	180/-	41580/-
Total Civil Work				Rs.	158624585/-

Say Rs. 158624585/-

nahees

Nahees

DEPUTY COMMISSIONER
KHAIRPUR



Construction of Heart Centre Building.
At DHQ Hospital Khairpur, District Khairpur, Sindh.
BILL OF QUANTITY

SUMMARY

Total (Part-B) Plumbing Work	Rs.	3884310/-
------------------------------	-----	-----------

Total in Words: (_____)

Signature: *Mahmud*

Muz
DEPUTY COMMISSIONER
KHAIRPUR

dated: _____



PLUMBING WORK.
CARDIAC HOSPITAL

Summary Of Plumbing Works

1	Water Supply Works			Rs.	961900/-
2	Drainage Works			Rs.	
3	Plumbing Fixtures			Rs.	2843610/-
	Fire Fighting			Rs.	
4	Natural Gas Works			Rs.	78800/-
			TOTAL		3884310/-

GRAND TOTAL =

na hms

Awc.

DEPUTY COMMISSIONER
KHAIRPUR


BILL OF QUANTITIES

Plumbing Works

Construction of Heart Center Building,

At DHQ Hospital Khairpur, District Khairpur, Sindh

MAIN HOSPITAL BUILDING

 <p style="text-align: center;">BILL OF QUANTITY CARDIAC HOSPITAL</p>					
S.NO.	DESCRIPTION	UNIT	QTY.	RATE (Rs.)	AMOUNT
	PLUMBING WORKS				
	All items under this head to be carried out as per specifications, Drawings and relevant BSI/ASTM Standards to the entire satisfaction of the Engineer.				
	WATER SUPPLY:				
1	COLD/ HOT WATER PIPING:				
a	Supply, installation Testing and Commissioning of PPR PN - 20 Cold/Hot water pipes as per DIN 8077-8078 with molded fittings PN - 25 as per DIN 16962, including pipe supports as indicated on the drawing, as per specifications and Engineers approval.				
(i)	¾" dia.	Rft.	3400	120/-	408000/-
(ii)	½" dia.	Rft.	300	100/-	30000/-
(iii)	1" dia.	Rft.	80	190/-	15200/-
(iv)	1¼" dia.	Rft.	10	210/-	2100/-
(v)	1½" dia.	Rft.	640	335/-	214400/-
(vi)	2" dia.	Rft.	140	275/-	38500/-
2	ISOLATION/GATE VALVE:				
	Providing and fixing of brass (PPR coated) ball valves as indicated on the drawing and as specified in specifications				
(i)	¾" dia.	Nos.	21	1200/-	25200/-
(ii)	1" dia.	Nos.	2	1700/-	3400/-
(iii)	1¼" dia.	Nos.	1	2100/-	2100/-
(iv)	1½" dia.	Nos.	5	2400/-	12000/-
(v)	2" dia.	Nos.	2	3000/-	6000/-
3	Water Geyser				
	Supply and installation of Gas fired hot water geyser with below mentioned capacity including, 2 nos ball valves for piping, accessories, etc., complete all in accordance with the drawing and specifications.				
	35 Gallons Capacity	Nos	4	25000/-	100000/-
4	2 STAGE UV FILTERS				
	Supply and installation of Two stage UV filter of minimum 0.8 GPM flow for Kitchen Pantry with valves, piping, accessories, etc., as indicated on the drawing, as per specifications and Engineers approval.	Nos	4	20000/-	80000/-

mahmud

Muz.
DEPUTY COMMISSIONER
KHAIRPUR


BILL OF QUANTITIES

Plumbing Works

Construction of Heart Center Building,

At DHQ Hospital Khairpur, District Khairpur, Sindh

MAIN HOSPITAL BUILDING

 <p style="text-align: center;">BILL OF QUANTITY CARDIAC HOSPITAL</p>					
S.NO.	DESCRIPTION	UNIT	QTY.	RATE (Rs.)	AMOUNT
5	WATER TANK:				
	Connection from external network to RCC water tanks including fittings, float valves, vent pipes, accessories, valves, supports, warning pipes, low and high level float switches, etc. as per specifications	Job	1	25000-	25000/-
Sub Total for Water Supply					961900
	SOIL SANITARY WASTE AND VENT & RW PIPES:				
1	SOIL, WASTE & VENT SYSTEM:			170-	23800
a	Providing, fixing, Testing and commissioning of uPVC pipes Class 'D' Pipes and fittings as per BS 4660 for above ground installations for Soil, Waste, Vent & R/w pipes including cleanout plug, clamps, hanger collars, supports, specials (bend, tees, Y-tee etc.) as indicated on the drawing, as per specifications and Engineers approval.				
(ii)	2" dia.	Rft.	140	170-	23800-
(ii)	3" dia.	Rft.	1600	220-	352000-
(iii)	4" dia.	Rft.	1550	265-	410750-
2	Providing, fixing, Testing and commissioning of uPVC pipes and fittings as per EN 1401 for below grade installations for Soil, Waste, Vent & R/w pipes including cleanout plug, clamps, hanger collars, supports, specials (bend, tees, Y-tee etc.) as indicated on the drawing, as per specifications and Engineers approval.				
(i)	6" dia.	Rft.	40	340-	13600-
	DRAINAGE SPECIALTIES				
3	Providing and fixing of PVC floor Trap with multiple inlets and 3" dia outlet with S.S grating the approved design as per specifications	Nos	175	580-	101500-
4	Providing and fixing UPVC cowl for vent pipe of the following dia including all accessories complete in all respects.	Nos.	32	280-	8960-
5	MANHOLES AND GULLY TRAPS				
	Sewer Manhole	Nos.	5	10000-	50000-
	1' x 1' Gully trap	Nos.	6	2500-	15000-
6	EXTERNAL CONNECTION				
	Sewage and storm Connection to external Sewer network including piping required for connection, excavation works and other requirements as per engineers approval	Job	1	21000-	21000-
Sub Total for Drainage					

maht

Alau

DEPUTY COMMISSIONER
KHAIRPUR


BILL OF QUANTITIES

Plumbing Works

Construction of Heart Center Building,

At DHQ Hospital Khairpur, District Khairpur, Sindh

MAIN HOSPITAL BUILDING

 BILL OF QUANTITY CARDIAC HOSPITAL					
S.NO.	DESCRIPTION	UNIT	QTY.	RATE (Rs.)	AMOUNT
PLUMBING FIXTURES:					
a	Providing and fixing first quality European type water closet by Porta model HD 9N or Equivalent with flush tank, build in S-Trap, Stop cock with flexible pipe as per drawings, specifications and Engineers Approval.	Nos.	69	11000-	759000
b	Providing and fixing first quality Eastern water closet with flush tank, S-Trap, stop cock and flexible pipe as per as per drawings, specifications and Engineers Approval.	Nos.	18	5500-	99000
d	Providing and fixing wash basin with mixer two (2) nos. Stop cocks with Flexible Connection, flexible drain pipe to floor drain as per drawings, specifications and engineers approval.	Nos.	91	7900	718900
e	Providing and fixing of kitchen sink with waste trap, bib cock, stop cocks, Flexible Connection as per drawings, specifications and engineers approval.	Nos.	2	6500	13000
(iii)	Mirror full size (Beveled edge type) as shown on the architectural drawing (5mm thick glass with backing of hardboard) posted with silicon with necessary clips as required. Complete in all respects.	Nos	25	1500	37500
(iv)	Double Bib Cock with Hand Spray / Muslim shower	Nos.	87	800	69600
Sub Total for Fixtures					
7 FIRE FIGHTING :					
	Providing and fixing fire hose cabinet complete with all required accessories tee, joint, pipe, elbows, handle valve and G.I pipe of 3" dia with bitumen coating follow the specification as per Engineer approval.	Nos.	6	25000	150000
Sub Total for Fire Fighting					2843610/-
NATURAL GAS					
GAS PIPING					
1	Providing and fixing of G.I (Medium) pipe and fitting by ILL, conforming to and approved by Local Gas Company standards to correct Lines, Levels and Grade, coating and wrapping including fixing and laying, fitting, valve, flanges, reducers, tees, sockets, bends, clamps, support, excavation works complete with testing and as per drawings, specifications and requirements of local gas company complete in all respects.				
(i)	1/2" dia.	Rft.	300	100	30000
(i)	3/4" dia.	Rft.	400	110	44000

Mahmud

DEPUTY COMMISSIONER
KHAIRPUR

Mehar


BILL OF QUANTITIES

Plumbing Works

Construction of Heart Center Building,

At DHQ Hospital Khairpur, District Khairpur, Sindh

MAIN HOSPITAL BUILDING

		BILL OF QUANTITY CARDIAC HOSPITAL			
S.NO.	DESCRIPTION	UNIT	QTY.	RATE (Rs.)	AMOUNT
	STOP COCKS/BALL VALVES				
2	Providing and fixing brass ball valve with unsoldered copper ball conforming to API standards and approved by Local Gas Company.				
(i)	1/2" dia.	Nos.	6	800	4800
Sub Total for Gas Works					78800

Mahmud

Muhammad

DEPUTY COMMISSIONER
KHAIRPUR



Construction of Heart Centre Building.
At DHQ Hospital Khairpur, District Khairpur, Sindh.
BILL OF QUANTITY

SUMMARY

Total (Part-C) Electrical Work	Rs.	15794415/-
--------------------------------	-----	------------

Total in Words: (_____)

Signature: *malik*

dated: _____

Alvi
DEPUTY COMMISSIONER
KHAIRPUR

Construction of Heart Center Building,
At DHQ Hospital Khairpur, District Khairpur, Sindh
Electrical Works



Summary Of Electrical Works

Summary Of Electrical Works			
1	Wiring & accessories		Rs. 3305575
2	Light & Fan Fixture		Rs. 2794200 -
3	Race Ways		Rs. 55600 -
4	L.V Switch Gear		Rs. 1172000 -
5	Main/Sub-main Feeders		Rs. 1227000 -
6	Nurse Call System		Rs. 952800 -
7	Data & Voice System		Rs. 64440 -
8	Cable TV		Rs. 25800 -
9	Split Type Air-Conditioning		Rs. 497000 -
10	Passanger/Bed Lift		Rs. 5650000/-
11	Earthing		Rs. 50000/-
Total Amount:			15794415/-

Grand Total :

Amount Rupees :

Date : _____

naheem

Naheem
DEPUTY COMMISSIONER
KHAIRPUR


BILL OF QUANTITIES

Electrical Works

Construction of Heart Center Building,

At DHQ Hospital Khairpur, District Khairpur, Sindh

Electrical Works

 <p align="center">BILL OF QUANTITY CARDIAC HOSPITAL</p>					
S.NO.	DESCRIPTION	UNIT	QTY.	RATE(Rs.)	AMOUNT (Rs.)
1	Wiring & Accessories				
1.1	Supply, installation & testing of following items, clipped to the				
a)	Wiring of light / fan point controlled by one switch with 3x1C-1.5 sq. mm PVC cables drawn in 20/25mm dia PVC conduits, including 1.5 mm, powder coated MS back box and gang switches. Clipsal / Orange cable Pakistan/fast Cable	1070	Nos	1490/-	1594300/-
b)	Wiring of light point to light point with 3x1C-1.5 sq.mm PVC cables drawn in 20/25mm dia PVC conduits.	200	Nos	750/-	150000/-
c)	Wiring of light circuits from DB to switch board(s) with 3x1C-2.5 sq.mm PVC cables drawn in 20 mm dia PVC conduits, including termination & labelling at both ends.	140	Nos	1410/-	197400/-
d)	Wiring for power circuits from DB to 1st SSO Power Circuit with 3x1C-4 sqmm PVC cables in 20 mm dia PVC conduit, including termination & labelling at both ends.	160	Nos	2400/-	384000/-
e)	Wiring for A/C circuit from DB to A/C unit with 3x1C-6.0 sqmm PVC cables drawn in 25 mm dia PVC conduit, including termination & labelling at both ends.	80	Nos	3550/-	284000/-
f)	Wiring of SSO to SSO with 3x1C-2.5 sq.mm PVC cables drawn in 20 mm dia PVC conduits, including termination & labelling at both ends. (side by side or back to back will not be payable).	550	Nos	770/-	423500/-
1.2	Supply & Installation of following Switch Socket Outlets (SSO) on already installed boxes.				
a)	5 Amp 3 Pin SSO.	550	Nos	320/-	176000/-
b)	15 Amp 3Pin SSO.	75	Nos	415/-	31125/-
1.3	Providing & fixing of following technology / floor boxes made of 1.5 mm sheet steel, power coated with earth terminal.				

matani

DEPUTY COMMISSIONER
KHAIRPUR


BILL OF QUANTITIES

Electrical Works

Construction of Heart Center Building,

At DHQ Hospital Khairpur, District Khairpur, Sindh

Electrical Works

 <p style="text-align: center;">BILL OF QUANTITY CARDIAC HOSPITAL</p>					
S.NO.	DESCRIPTION	UNIT	QTY.	RATE(Rs.)	AMOUNT (Rs.)
a)	1.5 mm, powder coated MS back box with earthing terminal.	725	Nos	90	65250/-
Sub Total of Wiring & Accessories Rs.					3305575/-
2	Light & Fan Fixtures				
2.1	Supply & Installation of following light fixtures complete with lamps, starters, holders, electronic ballast etc including hangers, supports & all mounting / fixing accessories, complete in all respect & as per consultants approval.				
a)	Down Light Surface Mounted LED (Philips)	410	Nos	1300/-	533000/-
b)	Celinig mounted fan 56" dia including suitable fan rod & 1.5 mm sq. flexible cable as per requirement with 5 / 8 inch MS fan hook + dimer.	256	Nos	4100/-	1049600/-
c)	Wall Bracket fan 16" dia	4	Nos	3000/-	12000/-
d)	Exhaust fan 8" dia Plastic Body	48	Nos	2100/-	100800/-
e)	Exhaust fan 12" dia Matel Body	54	Nos	2400/-	129600/-
f)	Bulk Head Light with 1x18w CLF lamp.(Philips)	12	Nos	2500/-	30000/-
g)	TMS-LED Flourescent light fixture.(Philips)	380	Nos	2000/-	760000/-
h)	Wall Mounted LED Light (Philips)	58	Nos	1400/-	81200/-
j)	Emergency light	60	Nos	1500/-	90000/-
k)	walk way light	8	Nos	1000/-	8000/-
Sub Total of Light & Fan Fixtures Rs.					2794200/-
3	Race ways				
3.1	Supply & Installation of following sizes of conduits with all accessories, clipped to the surface or concealed in building fabric or to be laid in floor including cutting /excavation & back filling, complete in all respect.				
a)	PVC pipe 25 mm dia	80	Mtr	140/-	11200/-
a)	PVC pipe 38 mm dia	100	Mtr	180/-	18000/-
a)	PVC pipe 50 mm dia	120	Mtr	220/-	26400/-
Sub Total of Race ways Rs.					55600/-
4)	L.V. Switchgear				

malms

new

DEPUTY COMMISSIONER,
KHAIRPUR


BILL OF QUANTITIES

Electrical Works

Construction of Heart Center Building,

At DHQ Hospital Khairpur, District Khairpur, Sindh

Electrical Works

		<p align="center">BILL OF QUANTITY CARDIAC HOSPITAL</p>			
S.NO.	DESCRIPTION	UNIT	QTY.	RATE(Rs.)	AMOUNT (Rs.)
4.1	Supply, installation, testing & commissioning of following factory assembled, pre-wired panel / distribution boards, concealed in wall or surface mounted or floor standing, 1.5/2 0 mm MS sheet steel fabricated, 120 microns powder coated, suitable for 500 volts, 3phase, 4wires, 50Hz, incorporate following components and configuration, complete with all mounting & connecting accessories as per drawings. make hussain & Company . Zelon Engineering Electrech (Pvt) Ltd.				
a)	M DB -	1	Nos	25000	25000
b)	M DB - E	1	Nos	25000	25000
c)	DBE(G+F+S) - LIGHT	3	Nos	6500	19500
d)	DBE (G+F+S) - P	3	Nos	6500	19500
f)	DBG-A/C	1	Nos	8000	8000
g)	DBF-A/C	1	Nos	8000	8000
h)	DBS-A/C	1	Nos	5000	5000
i)	DB AUTOCLAVE	1	Nos	1800	1800
l)	DB - X-RAY	1	Nos	1800	1800
m)	DB- LIFT	2	Nos	1800	3600
Sub Total of L.V. Switchgear Rs.					1172000/-
5	Main / Sub-main Feeders				
5.1	Supply, installation & termination at both ends of following main/sub-main cables in already installed Pipes complete as per site requirements Pakistan Cable / Fast Cable				
a)	1x6.0 mm sq 4core PVC/PVC Cable+1x 6mm sq 1 core PVC Cable.	100	Mtr	1100 -	110000
b)	1x10 mm sq 4core PVC/PVC Cable+1x10mm sq 1 core PVC Cable.	100	Mtr	1200 -	120000
c)	1x16 mm sq 4core PVC/PVC Cable+1x16mm sq 1 core PVC Cable.	120	Mtr	1300 -	156000
d)	1x 25 mm sq 4core PVC/PVC Cable+1x25mm sq 1 core PVC Cable.	110	Mtr	1600 -	176000
e)	1x 35 mm sq 4core PVC/PVC Cable+1x35mm sq 1 core PVC Cable.	40	Mtr	1850 -	74000

metals

BILL OF QUANTITIES

Electrical Works

Construction of Heart Center Building,

At DHQ Hospital Khairpur, District Khairpur, Sindh

Electrical Works



**BILL OF QUANTITY
CARDIAC HOSPITAL**

S.NO.	DESCRIPTION	UNIT	QTY.	RATE(Rs.)	AMOUNT (Rs.)
f)	1x 50 mm sq 4core PVC/PVC Cable+1x50mm sq 1 core PVC Cable.	50	Mtr	1950	97500
g)	1x 70 mm sq 4core PVC/PVC Cable+1x70mm sq 1 core PVC Cable.	100	Mtr	2150	215000
h)	1x 95 mm sq 4core PVC/PVC Cable+1x95mm sq 1 core PVC Cable.	30	Mtr	2750	82500
i)	1x 120 mm sq 4core PVC/PVC Cable+1x120mm sq 1 core PVC Cable.	40	Mtr	3150	126000
h)	1x 185 mm sq 4core PVC/PVC Cable+1x185mm sq 1 core PVC Cable.	20	Mtr	3500	70000
Sub Total of Main / Sub-main Feeder Rs.					1227000
6	Voice System				
6.1	Supply, pulling & fluke testing of Data or Voice cables in PVC Pipe, including labeling at both ends as per drawings. Make: Clipsal / Systimax/orange /3M				
a)	Cat-5E UTP Cable in 20/25 mm dia PVC Pipe	200	Mtr	190	38000
6.2	Supply, installation and connecting of telephone Junction box 1.5 mm MS sheet steal fabricated, 120 micron powder coated, surface mounted or concealed in wall with locking arrangements and comprising with 2x10 pairs tag blocks.	1	Nos	12000	12000
6.3	Supply, installation & termination of face plates comprising as follows. Make: Clipsal / Systimax/orange/3M.				
a)	1No RJ-11 socket outlet	38	Nos	380	14440
Sub Total of Voice System Rs.					64440
12	Nurse Calling System				
12.1	Supply, Installation, Testing, Commissioneig, Training & Programming of following Nurse Calling System. (Make MCD - UK,DUKANE CANADA)				
a)	Quantum 14 Character Alphanumeric Mimic Display	9	Nos	41000	369000

man

man


BILL OF QUANTITIES

Electrical Works

Construction of Heart Center Building,

At DHQ Hospital Khairpur, District Khairpur, Sindh

Electrical Works

 <p style="text-align: center;">BILL OF QUANTITY CARDIAC HOSPITAL</p>					
S.NO.	DESCRIPTION	UNIT	QTY.	RATE(Rs.)	AMOUNT (Rs.)
b)	Quantum Data bus module for 4 & 14 Digit Display Panels	12	Nos	7500	90000
c)	Quantum Mini Data Bus Hardwire Call Point. Pear Push Format	65	Nos	2300	149500
d)	4 Meter pear push lead with 6.35 stereo jack plug	65	Nos	3100	201500
e)	Quantum Mini Hardare Overdoor Lamp. 12/24 volt	12	Nos	10000	120000
h)	Yuasa 12V 7 amp Battery	12	Nos	1900	22800
Sub Total of Nurse Calling System Rs.					952800
7	Split Type Air-Conditioning				
7.2	Supply, installation & testing of refrigerant piping (5/8" +3/8") with rubber foam instullation, protected with tape. Control wiring in 20mm dia PVC pipe, complete in all respect. Make: (1). Refrigerant pipe: Muller USA. (2). Foam instullation: Gulf-o-flex / Aero flex. (3). Control cable: Pakistan cable ltd / New age cable ltd. (4) PVC pipe & accessories: Jeddah / Galco.	150	Mtr	1800/-	270000/-
7.3	Supply & installation of UPVC pipe with all accessories including cutting of wall / floor etc. Make: AGM / Nepro.				
a)	20 mm dia.	300	Mtr	90-	27000
7.4	Supply & installation of frame / plateform for A/C compressor made with 2"x1/4" MS angle iron including 2 coats of anti rust paint & finally black enamel paint. Anti vibration pads to be fixed on exterior wall, complete in all respect.	80	Nos	2500-	200000
Sub Total of Split Type Air-Conditioning Rs.					497000
7	Cable TV System.				
7.1	Supply, pulling & testing of following Cable TV wiring in 20mm dia PVC Pipe including labelling at both ends. Make: WISI / Pakistan Cables LTD/Orange / 3M.				
a)	Co-axial cable double shielded RG-6 B/U	6	Nos	4000	24000
b)	RG-6 Socket outlet on 1.5 mm powder coated MS back box.	6	Nos	300	1800
					25800

Mahmud

Alamy

a)	Control system AC-VVVF					
b)	Operation system 1C-2BC Simplex					
c)	Capacity 1800KG					
d)	Speed 1.0 m/s					
e)	Stops 3 Stops / 3 Openings (All in line)					
f)	Service floor G + 2 = 3 Stops					
g)	Door size W1200mm×H2100mm (Center Opening)					
h)	Machine room Directly Above the Shaft					
i)	Power supply 380 V 3 Phase 50HZ 220 V 1 Phase 50HZ					
j)	Shaft size (W) 2300mm X (D) 3000mm 1D1G (W) 2350mm X (D) 3144mm 2D2G					
k)	Car size (W) 1500mm X (D) 2500mm					
l)	Pit depth 1350mm					
m)	Headroom 4500mm					
9.2	Car Design					
a)	Car wall Hairline Stainless Steel					
b)	Car ceiling BIII-DX2					
c)	Car door Hairline Stainless Steel					
d)	Car floor PVC real stone					



Ph. #(0243) 9280200-1
Fax # (0243) 9280202

OFFICE OF THE DEPUTY COMMISSIONER KHAIRPUR

NO.

Date:

M/s. Nazir Construction Company
Office Plot #. 3C, 2nd Floor Saba Commercial
St.No,02, Phase-05, Ext.DHA, Karachi
Contact #: 0300-8262974

REFERENCE OF SCHEMES:

1. Construction of Heart Centre near Civil Hospital, Khairpur

SUBJECT: PREQUALIFICATION OF FIRMS

Dear Concerned,

You are informed that the Procurement Committee has pre-qualified your firm for the above-referred schemes.

You are further advised to collect Bid Document from the office of undersigned at your earliest till 28-05-2015 up to 1:00 P.M and the same will be received back up to 2.0 pm and opened at 2:45 PM on same day i.e. 28-05-2015 before procurement committee and intending contractors.

You are advised to attach 2% as Call Deposit with your BID.

Received

DEPUTY COMMISSIONER
KHAIRPUR



Ph. #(0243) 9280200-1

Fax # (0243) 9280202

OFFICE OF THE DEPUTY COMMISSIONER KHAIRPUR

NO.

Date:

M/s. Meesam Construction Co.
B # A-16/200,
Abdullah Bunglows
Wadhu Wah Road,
Hyderabad
Contact #: 0300-3279805

REFERENCE OF SCHEMES:

1. Construction of Heart Centre near Civil Hospital, Khairpur

SUBJECT: PREQUALIFICATION OF FIRMS

Dear Concerned,

You are informed that the Procurement Committee has pre-qualified your firm for the above-referred schemes.

You are further advised to collect Bid Document from the office of undersigned at your earliest till 28-05-2015 up to 1:00 P.M and the same will be received back up to 2.0 pm and opened at 2:45 PM on same day i.e. 28-05-2015 before procurement committee and intending contractors.

You are advised to attach 2% as Call Deposit with your BID.



DEPUTY COMMISSIONER
KHAIRPUR



Ph. #(0243) 9280200-1
Fax # (0243) 9280202

OFFICE OF THE DEPUTY COMMISSIONER KHAIRPUR

NO.

Date:

M/s. A.A Memon
Noorani Rice Mill
Near Fish Market Road Sajawal
Contact #: 0345-2823611

REFERENCE OF SCHEMES:

1. Construction of Heart Centre near Civil Hospital, Khairpur

SUBJECT: PREQUALIFICATION OF FIRMS

Dear Concerned,

You are informed that the Procurement Committee has pre-qualified your firm for the above-referred schemes.

You are further advised to collect Bid Document from the office of undersigned at your earliest till 28-05-2015 up to 1:00 P.M and the same will be received back up to 2.0 pm and opened at 2:45 PM on same day i.e. 28-05-2015 before procurement committee and intending contractors.

You are advised to attach 2% as Call Deposit with your BID.


A.A Memon


DEPUTY COMMISSIONER
KHAIRPUR

OFFICE OF THE DEPUTY COMMISSIONER KHAIRPUR

NO.

Date:

NOTIFICATION

In exercise of powers conferred by Rule 7 of the Sindh Public Procurement Rules 2010, the office of the undersigned is pleased to constitute a Procurement Committee for hiring of contractors for following works:

S.No.	Name of Project
1	Construction of Heart Center near Civil Hospital Khairpur
2	Construction of Drainage system at UCs Mori, Babarloi Machyoon Tando Masti, Therhi, Nizamani, Shadi Shaheed District Khairpur
3	Construction of District Election Commissioner's Office, Khairpur and residence at first floor, Khairpur
4	Const: of link road from village Ghulam Abid to Zanwar Saindad Darban, Union Council Sami, Taluka Sobhadero, Dist: Khairpur (3.1 Kms)
5	Rehabilitation of City roads of Khairpur i/c Side drains.
6	Road Work: Construction of Overhead Bridge over New National Highway at Shah Hussain By-pass Chowk (2300 Rft)
7	Providing and fixing of CCTV Cameras, Walk through gates, metal detector, for main district offices, hospitals, sensitive public & religious places) of District Khairpur.
8	Construction of playground at Dabbar Taluka Khairpur
9	Zoological park in Khairpur
10	Reconditioning of road from Old NHW via Khalid Petrol Pump to Bhatti Muhalla upto Mumtaz College @ Dabbar Taluka Khairpur I/C Drainage 0/0-0/3 +495' ft (0.8 km)
11	Providing carpetting of road from NHW Ostagahi to Shaikh Muhalla & link to Muhalla Shaman Shaikh mile 0/0-1/0 (1.4 km)
12	Construction of internal road Sanwalo Jamali mile 0/0-0/4 (0.80 km) I/C providing and lining pavers blocks in various streets (5650) sft.
13	Reconditioning of Internal Road from Kachehari Road via OK Service to Saida Goth Khairpur mile 0/0-0/6
14	Construction of road from Village Waris Ghambhir road to connect new NH over Faiz Wah (left bank) mile 0/0-0/4 +330 km)
15	Improvement of road from Pir Jo Goth road near Maitla Muhalla Sim Nala to Ganj-e-Shaheedan upto Jind Wado I/C link to Khursheed Colony, Khudad Colony and Manganhar Muhalla 0/0-2/0+330 (4.10 km)
16	Construction of road from Village Langah to Dur Muhammad Phulpoto mile 0/0-0/4 +330
17	Widening and Reconditioning of Road from Luqman Bypass to Radio Pakistan Bypass Via Deh Gujo mile 0/0-0/7 (1.40 km)
18	Widening and Reconditioning of road from Chandia Morr to Police Training Center via Sadoro Janwari Taluka Khairpur 0/0-1/4 (2.4 km)
19	Widening and Reconditioning of road from Raina Phattak to Raina Village Manganhar Village Qasim Phulpoto Village up to old NHW 0/0-4/4 (7.2 km)
20	Construction of road from Sachal Shah road to Shoaib Rind Gulab Rind Village mile 0/0-3/0 (4.827 km)
21	Construction of road from N.H road Ubheri Shah Village Haji Rustam Naich Taluka Khairpur I/C retaining wall mile 0/0-0/4 (0.80 KM)
22	Improvement of road from Old Nakka Tando Masti road to Food Godowns mile 0/0-1/4-1/2 (2.513 km)
23	Reconditioning of road from Various Streets of Madina Colony near Civil Hospital Khairpur mile 0/0-0/5 (1.00 km)
24	Construction of various internal links of Gagagri to village Bukhsho Wahan mile 0/0-1/1 (1.80 km)
25	Construction of Road Village Ali Jam Pahor & Jam Khan Pahor Khan mile 0/0-0/4 (0.80 KM)
26	Construction of road from Village Aalam Khan Gopang Deh Bugro mile 0/0-0/2 (0.4 KM)
27	Construction of road hussainabad to naru dhoro road to village Waryam shar mile 0/0-0/4 (1.40 km)

	ment of Modern Rescue Center at Khairpur (near Banaras Colony) Taluka Khairpur
	in Various Streets of City Khairpur
	ding & Fixing of Solar Street Lights for 08 Talukas of District Khairpur
	Construction of road from Sukkur Pir Jo Goth road to Dargah Shah Ladhani via Buland Khan Chandio mile 0/0-0/7 (1.40 km)
	Construction of Internal roads of Village Muhammad Ramzan Mallah Deh Palah UC Baberloi mile 0/0-1/0 (1.5 km)
	C.C Block in Creative Tiles in Various Polling Stations (9 Nos) under UC Therhi Taluka Khairpur
34	Drainage scheme at Village Muhammad Saleh Katohar Deh Gujo UC Nizamani Taluka Khairpur
35	Drain and CC Block village Jam Khan Pahore UC Shadi Shaheed
36	Drain and CC Block village Sajam Khan Rind and Mangria UC Shadi Shaheed
37	Remaining Portion of Village Ahmed Ali Phulpoto and Mohalla Kashif UC Nizamani
38	Remaining Portion of Drain and CC Block village Mevo Khan Kalhoru UC Mehar Ali
39	Drain and CC Block village Janwari UC Machyoon
40	Drain and CC Block village Sobho Khan Mastoi and Sardar Bux Mastoi UC Babarloi
41	Drain and CC Block Mohalla Hindu at near Allahdad Tunio UC Babarloi
42	Drain and CC Block near Chandia More opposite Lashari Hospital UC Shah Latif
43	Drain and CC Block village Raina UC Nizamani
44	Rehabilitation of Water supply scheme at Pir Hoti Noti UC Khanpur
45	Remaining Portion of Drainage scheme at village Simang and Channa
46	Construction of road from New N.H Way to Village Lal Bux Mangi Parallel Mangi Shakh mile 0/0-1/2 (2.0)

The members for the said committee are following (**READ: Rule 7 of SPPRA 2010**):

- | | |
|--|--------------------|
| 1. Deputy Commissioner, Khairpur | - Chairman |
| 2. Superintending Engineer, W&S Dept., Khairpur | - Member/Secretary |
| 3. Executive Engineer (Concerned Department) Khairpur
(Highways/Building/Public Health Eng. Dept./Municipal Engineer) | - Member |
| 4. The Principal, PTI, Khairpur | - Member |
| 5. Divisional Accounts Officer (Special Projects), Khairpur | - Member |

Terms of References

The Procurement Committee shall perform the following functions:

1. Preparing bidding documents
2. Caring out technical as well as financial evaluation of the bids.
3. Preparing evaluation report as provided in Rule-45
4. Making recommendations for the award of contract to the competent authority;
5. Perform any other function ancillary and incidental to the above.

Alwz.

**DEPUTY COMMISSIONER
DISTRICT KHAIRPUR**

Copy to:

1. All Concerned
2. Office File

Integrity Pact

DECLARATION OF FEES, COMMISSION AND BROKERAGE ETC. PAYABLE BY THE SUPPLIERS/CONTRACTORS/CONSULTANTS.

Contract Number: _____

Dated: _____

Contract Value: _____

182.749 Mill

Contract Title: _____

Const: of Heart Centre in Civil Hospital khp

M/S Nazir Const: Co.

[Name of Supplier/Contractor/Consultant] hereby declares that it has not obtained or induced the procurement of any contract, right, interest, privilege or other obligation or benefit from Government of Sindh (GoS) or any administrative subdivision or agency thereof or any other entity owned or controlled by it (GoS) through any corrupt business practice.

Without limiting the generality of the foregoing, M/S Nazir Const: Co. [Name of Supplier/Contractor/Consultant] represents and warrants that it has fully declared the brokerage, commission, fees etc. paid or payable to anyone and not given or agreed to give and shall not give or agree to give to anyone within or outside Pakistan either directly or indirectly through any natural or juridical person, including its affiliate, agent, associate, broker, consultant, director, promoter, shareholder, sponsor or subsidiary, any commission, gratification, bribe, finder's fee or kickback, whether described as consultation fee or otherwise, with the object of obtaining or inducing the procurement of a contract, right, interest, privilege or other obligation or benefit, in whatsoever form, from Procuring Agency (PA), except that which has been expressly declared pursuant hereto.

M/S Nazir Const: Co.

[Name of Supplier/Contractor/Consultant] certifies that it has made and will make full disclosure of all agreements and arrangements with all persons in respect of or related to the transaction with PA and has not taken any action or will not take any action to circumvent the above declaration, representation or warranty.

M/S Nazir Const: Co.


[Name of Supplier/Contractor/Consultant] accepts full responsibility and strict liability for making any false declaration, not making full disclosure, misrepresenting facts or taking any action likely to defeat the purpose of this declaration, representation and warranty. It agrees that any contract, right, interest, privilege or other obligation or benefit obtained or procured as aforesaid shall, without prejudice to any other right and remedies available to PA under any law, contract or other instrument, be voidable at the option of PA.

M/S Nazir Const: Co. Notwithstanding any rights and remedies exercised by PA in this regard, [Name of Supplier/Contractor/Consultant] agrees to indemnify PA for any loss or damage incurred by it on account of its corrupt business practices and further pay compensation to PA in an amount equivalent to ten times the sum of any commission, gratification, bribe, finder's fee or kickback given by [Name of Supplier/Contractor/Consultant] as aforesaid for the purpose of obtaining or inducing the procurement of any contract, right, interest, privilege or other obligation or benefit, in whatsoever form, from PA.

DEPUTY COMMISSIONER
PROJECT DIRECTOR
KHWARZAR

[Procuring Agency]

[Supplier /Contractor/Consultant]

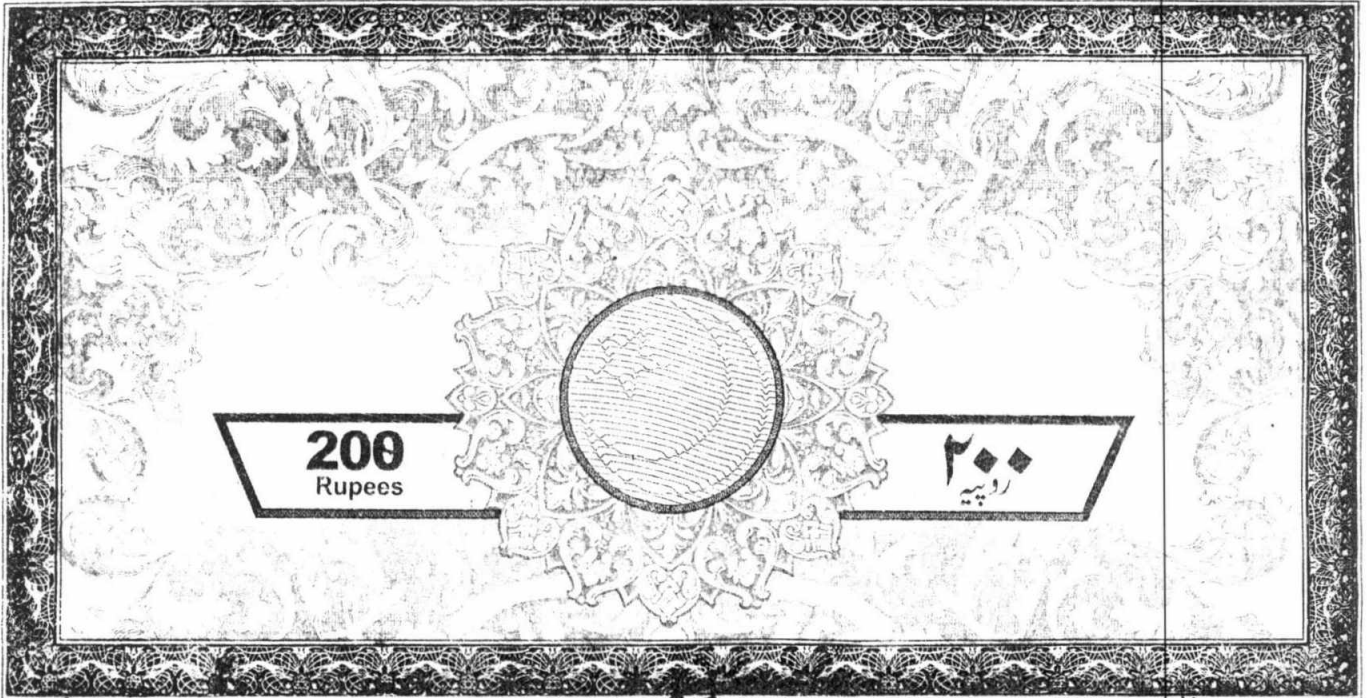

Nabeer Ahmad 810 Akbar Ali Shaikh. 695

*CA 1
17-4-15*

FORM OF CONTRACT AGREEMENT

THIS CONTRACT AGREEMENT (hereinafter called the "Agreement") made on the _____ day of _____ (month) 20____ between (hereafter called the "Procuring Agency") of the one part **Deputy Commissioner / Project Director Khairpur** and **M/S Nazir Construction Company** (hereafter called the "Contractor") of the other part.

WHEREAS the Procuring Agency is desirous that certain works, viz **"Construction of Heart Centre near Civil Hospital Khairpur"** should be executed by the Contractor and has accepted a bid by the Contractor for the execution and completion of such works and the remedying of any defects therein.

NOW this Agreement witnesseth—as follows:


1. In this Agreement words and expressions shall have the same meanings as are respectively assigned to them in the Conditions of Contract hereinafter referred to.
2. The following documents after incorporating addenda, if any, except those parts relating to Instructions to bidders shall be deemed to form and be read and constructed as part of this Agreement, viz:
 - (a) The Contract Agreement:
 - (b) The Letter of Acceptance:
 - (c) The Completed Form of Bid:
 - (d) Special Stipulations (Appendix-A to Bid):
 - (e) The Special Conditions of Contract-Part II):
 - (f) The General Conditions-Part I):
 - (g) The Priced Bill of Quantities (Appendix-D to Bid):
 - (h) The Completed Appendices to Bid (B,C,E to L):
 - (i) The Drawings:
 - (j) The Specifications:
 - (k) _____(any other)
3. In consideration of the payments to be made by the procuring agency to the Contractor as hereinafter mentioned, the Contractor hereby covenants with the procuring agency to execute and complete the works and remedy defects therein in conformity and in all respects with the provisions of the contract.
4. Procuring agency hereby covenants to pay the contractor, in consideration of the execution and completion of the works as per provisions of the contract, the contract Price or such other sum as may become payable under the provisions of the contract at the times and in the manner prescribed by the contract.



Handwritten signature and scribbles at the bottom left of the page.

Nazeer Ahmed s/o Abbab Ali Sheikh

10098
11-6-15

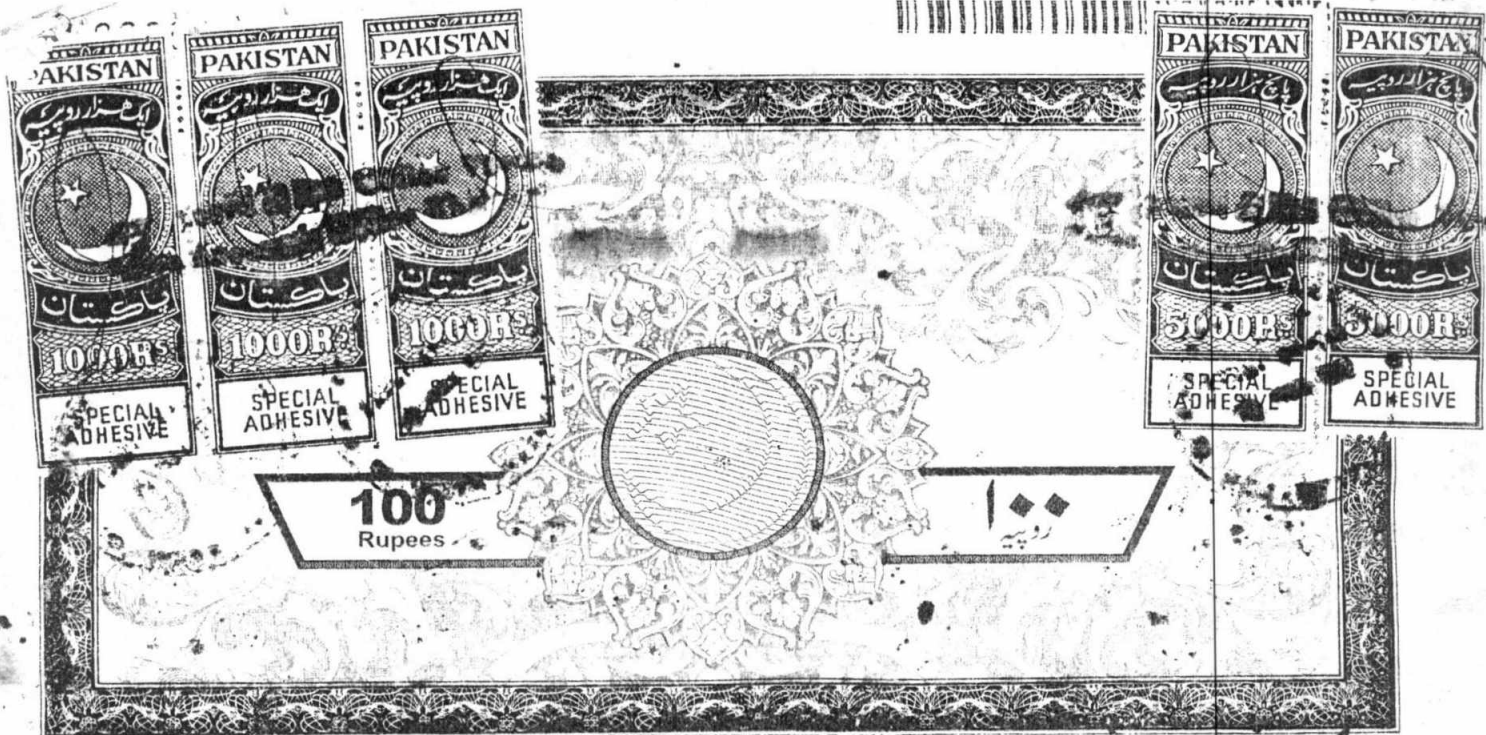

Nazir Ahmed Shaikh

695
CPD-4-15

SHAIKH - SANAUL
STAMP - VENDOR
Taluka Gama

IN WITNESS WHEREOF the parties here to have caused this Agreement to be executed on the day, month and year first before written in accordance with their respective laws.

Signature of the Contractor
Nazir Ahmed Shaikh
M/S Nazir Construction Company
Nazir Ahmed Shaikh
Proprietor
(Seal) M/S Nazir Construction Company

Signature of Procuring Agency
Nazir
Deputy Commissioner / Project
Director Khairpur
(Seal)

Signed, Sealed and Delivered in the presence of:

Witness:

Witness:

Name, Title and Address

Name, Title and Address










BID EVALUATION REPORT

Name of Procurement Agency:	M/s. Nazir Construction Company Deputy Commission	P. D. Khairpur
Tender Reference No.	DC/P3/1094(A)/KHAIRPUR Dt: 3-4-2015 (INF/KR No. 1387/2015)	
Tender Description/Name of Work/Item:	CONSTRUCTION OF HEART CENTER NEAR CIVIL HOSPITAL KHP.	
Type of Bidding adopted	Single stage - One envelope	
Procedure adopted for open competitive bidding		
Tender Published for prequalification:	14 APRIL, 2015	
Tender Prequalification Documents Sold:	UPTO 28 APRIL, 2015	
Nos. of firms qualified:	03 FIRMS	
Total Bid Documents Issued:	03 NOS.	
Total Bids Received:	03 NOS.	
Technical Bid Opening Date (if applicable):	N.A.	
Nos. of firms qualified:	03 NOS.	
Bid(s) rejected:	NIL	
Financial Bid Opening Date	28-05-2015	

Bid Evaluation Report:

Sr.No.	Name of Firm or Bidder	Cost offered by the Bidder	Ranking in terms of cost	Comparison with Estimated Cost	Reasons of acceptance or Rejection
1	M/s. Nazir Construction Company	Rs. 182749159/- Rs. 182749159/-	1 ST LOWEST		Responsive. 1 ST LOWEST
2	M/s. Meesam Construction Co.	Rs. 198185661/-	3 RD LOWEST		Highest
3	M/s. A.A Memon	Rs. 191415538/-	2 ND LOWEST		High

 Divisional Accounts Officer (Special Projects) Khairpur	 Superintending Engineer Works & Services Department Khairpur	 Executive Engineer (Buildings), W&S Department Khairpur	 The Principal PTTI, Khairpur
--	---	---	---


CHAIRMAN
Deputy Commissioner Khairpur

Annexure - 'B'

TOTAL POINTS 100

Qualifying Score is 75%, but it is mandatory to obtain at least 40% in each of the following sections

Name of Scheme: Construction of Heart Centre near Civil Hospital, Khairpur ADP-1646

TENTATIVE ESTIMATED COST: 203.82 MILLION

Sl. No.	Name of Firm	COMPANY PROFILE					General Experience Record					Personal Capabilities required for					Financial Soundness/Status					TOTAL POINTS						
		Period since Firm/Contractor is in construction business (TOTAL 10 MARKS)	Office Facilities (TOTAL 05 MARKS)	A) Projects of similar nature and complexity completed over last 05 years. (TOTAL 20 MARKS) (Attach satisfactory completion certificates)	B) Projects of similar nature and complexity in hand (TOTAL 15 MARKS) (Attach copies of work orders)	A) 2 BSc (Civil Engg) / B.E./Chit Engineers with experience of 5 years or above. A firm should have at least 02 BSc/B.E. (Relevant Technical) (Attach Tax payment stubs showing employment with firm. 1 additional Mark for BSc (Civil Engg)/M.E./Chit)	B) 4 Diploma in Civil Engineering, with experience of 2 years or above (TOTAL 10 MARKS)	Equipment Capability (TOTAL 20 MARKS)	Less than 15% of Estimate of Cost of this Work	16 - 25% of Estimate of Cost of this Work	26 - 40% of Estimate of Cost of this Work	40% of Estimate of Cost of this Work																
1.00	M/s. K.M. Sharif & Co.	2	5	10	3	1	1	4	8	12	16	20	5	10	15	3	5	10	10	10	10	20	2	4	8	10	100	
2.00	M/s. Khan Muhammad & Co.	10	10	10	5	5	10	15	15	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	100
3.00	M/s. Al Noor Construction Company	NOT CONSIDERED FOR THE PROCESS OF PRE-QUALIFICATION AS THE PROCUREMENT COMMITTEE FOUND AN EXPIRED PEC CERTIFICATE INSIDE THE BROCHURE.																										
4.00	M/s. Umar Jan & Co.	NOT CONSIDERED FOR THE PROCESS OF PRE-QUALIFICATION AS THE PROCUREMENT COMMITTEE FOUND THAT THE FIRM IS NOT REGISTERED IN THE REQUIRED DISCIPLINE-BC03																										
5.00	M/s. Nazir Construction Company	NOT CONSIDERED FOR THE PROCESS OF PRE-QUALIFICATION AS THE PROCUREMENT COMMITTEE FOUND THAT THE FIRM IS NOT REGISTERED IN THE REQUIRED DISCIPLINE-BC03																										
6.00	M/s. Messam Construction Co.	NOT CONSIDERED FOR THE PROCESS OF PRE-QUALIFICATION AS THE PROCUREMENT COMMITTEE FOUND THAT THE FIRM IS NOT REGISTERED IN THE REQUIRED DISCIPLINE-BC03																										
7.00	M/s. A.A. Memon	NOT CONSIDERED FOR THE PROCESS OF PRE-QUALIFICATION AS THE PROCUREMENT COMMITTEE FOUND THAT THE FIRM IS NOT REGISTERED IN THE REQUIRED DISCIPLINE-BC03																										
8.00	M/s. Evershine Constructors	NOT CONSIDERED FOR THE PROCESS OF PRE-QUALIFICATION AS THE PROCUREMENT COMMITTEE FOUND THAT THE FIRM IS NOT REGISTERED IN THE REQUIRED DISCIPLINE-BC03																										
9.00	M/s. Nawab Brothers (Pvt) Ltd	NOT CONSIDERED FOR THE PROCESS OF PRE-QUALIFICATION AS THE PROCUREMENT COMMITTEE FOUND THAT THE FIRM IS NOT REGISTERED IN THE REQUIRED DISCIPLINE-BC03																										
10.00	M/s. Shaikh Abdul Qayoom	NOT CONSIDERED FOR THE PROCESS OF PRE-QUALIFICATION AS THE PROCUREMENT COMMITTEE FOUND THAT THE FIRM IS NOT REGISTERED IN THE REQUIRED DISCIPLINE-BC03																										
11.00	M/s. Muhammad Aslam	NOT CONSIDERED FOR THE PROCESS OF PRE-QUALIFICATION AS THE PROCUREMENT COMMITTEE FOUND THAT THE FIRM IS NOT REGISTERED IN THE REQUIRED DISCIPLINE-BC03																										
12.00	Syed Pir Ali Shah	NOT CONSIDERED FOR THE PROCESS OF PRE-QUALIFICATION AS THE PROCUREMENT COMMITTEE FOUND THAT THE FIRM IS NOT REGISTERED IN THE REQUIRED DISCIPLINE-BC03																										
13.00	M/s. Mahar Builders	NOT CONSIDERED FOR THE PROCESS OF PRE-QUALIFICATION AS THE PROCUREMENT COMMITTEE FOUND THAT THE FIRM IS NOT REGISTERED IN THE REQUIRED DISCIPLINE-BC03																										
14.00	M/s. Jiva Enterprises	NOT CONSIDERED FOR THE PROCESS OF PRE-QUALIFICATION AS THE PROCUREMENT COMMITTEE FOUND THAT THE FIRM IS NOT REGISTERED IN THE REQUIRED DISCIPLINE-BC03																										

MEMBER	(MEMBER)	(MEMBER)	(SECRETARY/MEMBER)	(CHAIRMAN)
NATIONAL ACCOUNTS OFFICE SPE PROJECTS KHAIKRI	THE PRINCIPAL PETROLEUM TECHNICAL INSTITUTE KHAIKRI	EXECUTIVE ENGINEER (BUILDINGS) WORKS & SERVICES DEPARTMENT KHAIKRI	SUPERINTENDING ENGINEER WORKS & SERVICES DEPARTMENT KHAIKRI	DEPUTY COMMISSIONER DISTRICT KHAIKRI

OFFICE OF THE DEPUTY COMMISSIONER/ PROJECT DIRECTOR
SPECIAL DEVELOPMENT PACKAGES KHAIRUR.

MINUTES OF PROCUREMENT COMMITTEE MEETING HELD ON 28.5.2015 IN THE OFFICE OF DEPUTY COMMISSIONER/ PROJECT DIRECTOR SPECIAL DEVELOPMENT PACKAGES KHAIRPUR.

VENUE: OFFICE OF DEPUTY COMMISSIONER/ PROJECT DIRECTOR SPECIAL DEVELOPMENT PACKAGES KHAIRPUR.

CONTRACT NAME: CONSTRUCTION OF HEART CENTRE NEAR CIVIL HOSPITAL KHAIRPUR.

NOTICE INVITING TENDER#: PRE-QUALIFICATION NOTICES WERE ISSUED TO CONTRACTORS.

PREMEABLE

The tender documents/ Bidding documents are prepared by Procurement Committee constituted by the Deputy Commissioner Khairpur/ Project Director Special Development Packages Khairpur.

The Prequalification was floated and published in newspapers viz Daily KAWISH Hyderabad dated 14.4.2015 and others also hosted on SPPRA website at S.No.23645

EVALUATION REPORT:

Consequently three numbers bids were purchased by M/S Nazir Construction Company, Meesam Construction company and A.A. Memon. who were qualified for the above work on payment of Rs.1500/- (Non refundable) and submitted the bid on fixed date i.e.28.5.2015 within stipulated time period. The bid is opened on same day at 2.45 pm before Procurement Committee and bidders.

The committee assessed the bids, copy of check list is attached as Annexure-A.

Attendance sheet of Procurement committee Members and contractors is attached at Annexure-B.

The bid amount quoted by all contractors is checked and found correct and there is no any over writing/ corrections.

After evaluation the bidder was asked for any type of observation/ complaint, who has raised no objection or complaint.

RECOMMONDATION OF PROCUREMENT COMMITTEE.

On the basis of scrutiny, evaluation, analysis, as per criteria mentioned in bidding documents the committee recommended the bid of M/S Nazir Construction Company for approval and award of contract, which the economical lowest rate (Bid Evaluation Report) is attached as Annexure-C.

The contractors were informed accordingly and copy of Bid Evaluation Report was delivered to him.

Mune.
MUNAWAR ALI MITHANI
DEPUTY COMMISSIONER/
PROJECT DIRECTOR SDP
KHAIRPUR

ATTENDANCE SHEET ON DAY OF OPENING


Construction of Heart Centre near Civil
Hospital, Khairpur


Bid Reference No. ADP # 1646 OF 2014-15 SECTOR: BUILDING SECTOR/HEALTH SECTOR


Opening Date: Time:


Sr. No. NAME SIGNATURE


1	Deputy Commissioner Khairpur	
---	---------------------------------	---


2	Superintending Engineer, W&S Dept., Khairpur - Member/Secretary	
---	--	---


3	Executive Engineer (Buildings Division) Works & Services Department Khairpur	
---	---	---

4	The Principal PTI, Khairpur	
---	--------------------------------	--

5	Divisional Accounts Officer (Special Projects) Khairpur	
---	---	---

6	Masrur Ali Measran Construction Company	
---	---	--

7	Perang Ahmad M/S Nazki Construction Company	
---	--	--

8	Mushkiy Meman A.A. Meman	
---	-----------------------------	--