

SINDH PUBLIC PROCUREMENT REGULATORY AUTHORITY

CONTRACT EVALUATION FORM

TO BE FILLED IN BY ALL PROCURING AGENCIES FOR PUBLIC CONTRACTS OF
WORKS, SERVICES & GOODS
KW&SB/Liaquatabad Town Sewerage.

- 1) NAME OF THE ORGANIZATION / DEPTT. Local Govt KW&SB.
 - 2) PROVINCIAL / LOCAL GOVT / OTHER Local Government/ KW&SB.
 - 3) TITLE OF CONTRACT Emergent Replacement of 12", 18" dia Sunk Down Sewer and Repairing of Collapsed Manholes during Recent Heavy Rain various places in Liaquatabad Town (Sew),
 - 4) TENDER NUMBER Improvement of Sewerage system.
 - 5) BRIEF DESCRIPTION OF CONTRACT M.D. KW&SB.
 - 6) FORUM THAT APPROVED THE SCHEME 9,60,778
 - 7) TENDER ESTIMATED VALUE 9,61,739
 - 8) ENGINEER'S ESTIMATE (For civil works only) 10-10-2013
 - 9) ESTIMATED COMPLETION PERIOD (AS PER CONTRACT) 10-10-2013 3.00 P.M.
 - 10) TENDER OPENED ON (DATE & TIME) 03
 - 11) NUMBER OF TENDER DOCUMENTS SOLD (Attach list of buyers) 03
 - 12) NUMBER OF BIDS RECEIVED 03
 - 13) NUMBER OF BIDDERS PRESENT AT THE TIME OF OPENING OF BIDS 03
 - 14) BID EVALUATION REPORT (Enclose a copy) Yes
 - 15) NAME AND ADDRESS OF THE SUCCESSFUL BIDDER M/s Pervaiz Khan & Bros. No. 4-471 Mujahid Col. Mazi mabad Karachi.
 - 16) CONTRACT AWARD PRICE M/s Sawab moor Khan & Bros.
 - 17) RANKING OF SUCCESSFUL BIDDER IN EVALUATION REPORT (i.e. 1st, 2nd, 3rd EVALUATION BID). M/s Yousuf Khan & Bros.
- 18) METHOD OF PROCUREMENT USED : - (Tick one)
- | | | |
|---|-------------------------------------|--|
| a) SINGLE STAGE - ONE ENVELOPE PROCEDURE | <input checked="" type="checkbox"/> | <input type="checkbox"/> Domestic/ Local |
| b) SINGLE STAGE - TWO ENVELOPE PROCEDURE | <input type="checkbox"/> | <input type="checkbox"/> |
| c) TWO STAGE BIDDING PROCEDURE | <input type="checkbox"/> | <input type="checkbox"/> |
| d) TWO STAGE - TWO ENVELOPE BIDDING PROCEDURE | <input type="checkbox"/> | <input type="checkbox"/> |

PLEASE SPECIFY IF ANY OTHER METHOD OF PROCUREMENT WAS ADOPTED i.e. EMERGENCY, DIRECT CONTRACTING ETC. WITH BRIEF REASONS:

19) APPROVING AUTHORITY FOR AWARD OF CONTRACT Managing Director, KW&SB.

20) WHETHER THE PROCUREMENT WAS INCLUDED IN ANNUAL PROCUREMENT PLAN?

Yes	<input type="checkbox"/>	No	<input type="checkbox"/>
-----	--------------------------	----	--------------------------

21) ADVERTISEMENT :

i) SPPRA Website
(If yes, give date and SPPRA Identification No.)

Yes	Sr. no. 17400
No	I.D no.

ii) News Papers
(If yes, give names of newspapers and dates)

Yes	
No	

22) NATURE OF CONTRACT

Domestic/Local	<input checked="" type="checkbox"/>	Int.	<input type="checkbox"/>
----------------	-------------------------------------	------	--------------------------

23) WHETHER QUALIFICATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?
(If yes, enclose a copy)

Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

24) WHETHER BID EVALUATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?
(If yes, enclose a copy)

Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

25) WHETHER APPROVAL OF COMPETENT AUTHORITY WAS OBTAINED FOR USING A METHOD OTHER THAN OPEN COMPETITIVE BIDDING?

Yes	<input type="checkbox"/>	No	<input type="checkbox"/>
-----	--------------------------	----	--------------------------

26) WAS BID SECURITY OBTAINED FROM ALL THE BIDDERS?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

27) WHETHER THE SUCCESSFUL BID WAS LOWEST EVALUATED BID / BEST EVALUATED BID (in case of Consultancies)

Yes	<input type="checkbox"/>	No	<input type="checkbox"/>
-----	--------------------------	----	--------------------------

28) WHETHER THE SUCCESSFUL BIDDER WAS TECHNICALLY COMPLIANT?

Yes	<input type="checkbox"/>	No	<input type="checkbox"/>
-----	--------------------------	----	--------------------------

29) WHETHER NAMES OF THE BIDDERS AND THEIR QUOTED PRICES WERE READ OUT AT THE TIME OF OPENING OF BIDS?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

30) WHETHER EVALUATION REPORT GIVEN TO BIDDERS BEFORE THE AWARD OF CONTRACT?

(Attach copy of the bid evaluation report)

Yes	<input type="checkbox"/>	No	<input type="checkbox"/>
-----	--------------------------	----	--------------------------

31) ANY COMPLAINTS RECEIVED
(If yes, result thereof)

Yes	
No	✓

32) ANY DEVIATION FROM SPECIFICATIONS GIVEN IN THE TENDER NOTICE / DOCUMENTS
(If yes, give details)

Yes	
No	✓

33) WAS THE EXTENSION MADE IN RESPONSE TIME?
(If yes, give reasons)

Yes	
No	✓

34) DEVIATION FROM QUALIFICATION CRITERIA
(If yes, give detailed reasons.)

Yes	
No	

35) WAS IT ASSURED BY THE PROCURING AGENCY THAT THE SELECTED FIRM IS NOT BLACK LISTED?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

36) WAS A VISIT MADE BY ANY OFFICER/OFFICIAL OF THE PROCURING AGENCY TO THE SUPPLIER'S PREMISES IN CONNECTION WITH THE PROCUREMENT? IF SO, DETAILS TO BE ASCERTAINED REGARDING FINANCING OF VISIT, IF ABROAD:
(If yes, enclose a copy)

Yes	<input type="checkbox"/>	No	<input type="checkbox"/>
-----	--------------------------	----	--------------------------

37) WERE PROPER SAFEGUARDS PROVIDED ON MOBILIZATION ADVANCE PAYMENT IN THE CONTRACT (BANK GUARANTEE ETC.)?


Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

38) SPECIAL CONDITIONS, IF ANY
(If yes, give Brief Description)

Yes	
No	✓

39) Date of Award of Contract: _____

Signature & Official Stamp of
Authorized Officer


ZAFAR MALIK
Executive Engineer (SF.W)
Liaquatabad Town,
Karachi Water & Sewerage Board

FOR OFFICE USE ONLY

SPPRA, Block. No.8, Sindh Secretariat No.4-A, Court Road, Karachi

Tele: 021-9205356; 021-9205369 & Fax: 021-9206291

Print

Save

Reset

OFFICE OF THE EXECUTIVE ENGINEER (SEW)
LIAQUATABAD TOWN, K.W.&S.B

No: EE /LQT/Sew/2013/ //

Dated: 18-11- 2013

M/S Pervaiz Khan & Brothers,
House No.A-471, Mujahid Colony
Nazimabad No.-4
Karachi

LETTER OF COMMENCEMENT

SUBJECT:- EMERGENT REPLACEMENT OF 12", 18" DIA SUNK DOWN SEWERS AND REPAIRING OF COLLAPSED MANHOLES DURING RECENT HEAVY RAIN VARIOUS PLACES IN LIAQUATABAD TOWN (SEWERAGE).


Consequent upon the condition of Contract and letter of acceptance vide No.KW&SB/CE/Central/2013/11 Dated 13-11-2013 and subsequent you are hereby directed to commence the works in strict accordance with the contract with the expedition and diligence the date of commencement of work shall be reckoned from the 14 day of the received of the letter.

Please be noted that M/s Pervaiz Khaan & Brohters shall act as the engineer on this project through their authorized representative, the names and designation of the personnel's deputed will be communicated to you accordingly.

Therefore, you are advised to attend the office of the undersigned to obtain necessary instruction to carry out the work assigned to your firm and get it complete the same within (20) days positively, failing which penalty of Rs.500 per days will be charged.

Please note that the work would be carried out strictly according to the specification and will be completed within the stipulated period.

The expenditure will be charge under BG No.O-023-18 for year 2013-14 .Please acknowledge the receipt of this letter by signing in the space provided below.


EXECUTIVE ENGINEER
LIAQUATABAD TOWN (Sew)

- 1.The C.E,(Central),KWSB
- 2.S.E. Liaquatabad Town.
- 3.A.E.E. Liaquatbad Twon Sew.
- 4.Office Copy.

With directive to communicate the names along-with the Designation of the personnel's engaged for the works.

Received the latter.

Signature _____

Designation. _____

date _____



**OFFICE OF THE EXECUTIVE ENGINEER (SEW) LIAQUATABAD TOWN
KARACHI WATER & SEWREAGE BOARD**

ABSTRACT OF COST

Name of Work: - EMERGENT REPLACEMENT OF 12". 18" DIA SUNK DOWN SEWERS AND REPLAIRING OF COLLOPSED MANHOLES DURING RECENT HEAVY RAIN AT VARIOUS PLACES IN LIAQUATABAD ZONE (SEW)

S.No	Ref No	DESCRIPTION	QUANTITY	RATE	PER	AMOUNT
1.	pub-52 P-13 ITM-51	Dismantling & removing road metalling.	2368 Cft	605.00	%Cft.	Rs.14326.40/
2	pub-52 P-10 ITM-19/c	Dismantling Cement concrete plane 1:2:4	Nil	3327.50	% Cft.	Nil
3	pub-53 P-62 ITM-5	Excavation for pipe line in trenches, and pits in all kind of soils of murum i/c trimming and dressing sides to true alignment and shape leveling of beds of trenches to correct level and grade, cutting joint holes and disposal of surplus earth within a one chain as directed by engineer In charge, Providing fence guards, lights, flags and temporary crossing for non vehicular traffic where ever required lift up to 5 ft. (1.52m) and lead up to one chain (30.5m). Add for additional lift of every three ft or part there of in item No.1 to 15 (A&B) excavation for pipe lines and storage tanks trenches and pits.	12232.7 Cft	4650.00	%0Cft.	Rs. 56882/
		5 to 8 ft	7104 Cft	550.00	%0Cft.	Rs.36940.80/
		8 to 11 ft	3000 Cft	5200.00	%0Cft.	Rs.17250/
		11 to 14 ft	Nil	5750.00	%0Cft.	Nil
		14 to 17 ft	Nil	6300.00	%0Cft.	Nil
4	pub-53 P-76 ITM-23	Full hire charges of the pumping per day inclusive of wage of driver & Assistant, fuel or Electric. Energy plate from required for placing pumps etc. at lower depth with suction and delivery pipes for pumping out water found at various depths from trenches i/c the cost of erection and dismantling after completion of the job.	07 days	1500	P/Day.	Rs.10500/
5	pub-53 P-18 ITM-B 2	Providing, Laying RCC pipes with (Rubber Ring Joint and fitting in trench i/c cutting rubber ring i/c testing with water to specified pressure.				
		8" dia	Nil	206.00	P/Rft.	Nil
		12" dia	456 Rft	367.00	P/Rft.	Rs.167352/
		18" dia	250 Rft	539.00	P/Rft.	Rs.134750/

W.C.
ZAFAR MALIK
Executive Engineer (SEW)
Liaquatbad Town,
Karachi Water & Sewerage Board.

1-32611-25

2-25091-25

7	Pub-54 P-31 ITM-3	Construction of 4 feet internal diameter without RCC manhole cover with C.I frame (15 kg) and 5 feet clear depth cast in situ 1:2:4 concrete with stone and 60% grade of 9" thick wall 1:4:8 cement concrete in 6ft dia and 6 inch thick in foundation. 1:2:4, 1:2:4 CC in benching 1/2" cement plaster 1:3 cement mortar on inside wall and surface of channel and benching to top including making required number of main and branches channels 3/4" dia abrs M.S rest at 12" C/C kind of soil back filling and disposal of excavated stuff etc complete, as per design and instruction of the engineer in charge.	14 Nos	14529.29	Each	Rs.203410/
7		Extra for depth beyond 5' depth, if less than 5, deduction will be made at the same rate.	+66 Rft	2538.62	P/Rft.	Rs.167548.92/
8	Pub-53 P-77 ITM-24	Making connections with the existing manholes 1/c cost of cutting holes in walls, making them good in cement concrete 1:2:4 and making the required channel etc complete.	08 Nos	180.00	Each	Rs.1440/
9	Pub-52 P-16 ITM-(1)	Refilling the excavated stuff in trenches 6" thick layer 1/c watering ramming to full compaction etc. complete.	22336.7 Cft	2760.00	%0Cft.	Rs.61649.29/
10	Based on Sch.2012	Cement concrete plain including placing compacting, finishing and curing and complete. (i/c screening and washing at stone aggregate) Ratio 1:2:4	510.22 Cft	14429.25	% Cft.	Rs.73620.91/
11	Based on Sch.2012	Steel Shuttering for construction of Manhole (Circular) at site i/c its erection in proper position and removal after concrete i/c transportation complete etc	56.25 Rft	99.00	P/Rft.	Rs.5568.75/
12	Based on Sch.2012	C.I Frame	150 Kg	70/=	P/Kg	Rs.10500/
			Total			961739/=

Sub-Engineer (Sew)
Liaquatabad Zone KW&SB

Assistant Ex-Engineer (Sew)
Liaquatabad Zone, KW&SB

Technically Satisfied

Executive Engineer (Sew)
Liaquatabad Zone, KW&SB

ZAFAR MALIK
Executive Engineer (Sew)
Liaquatabad Town
Karachi Water & Sewerage Board

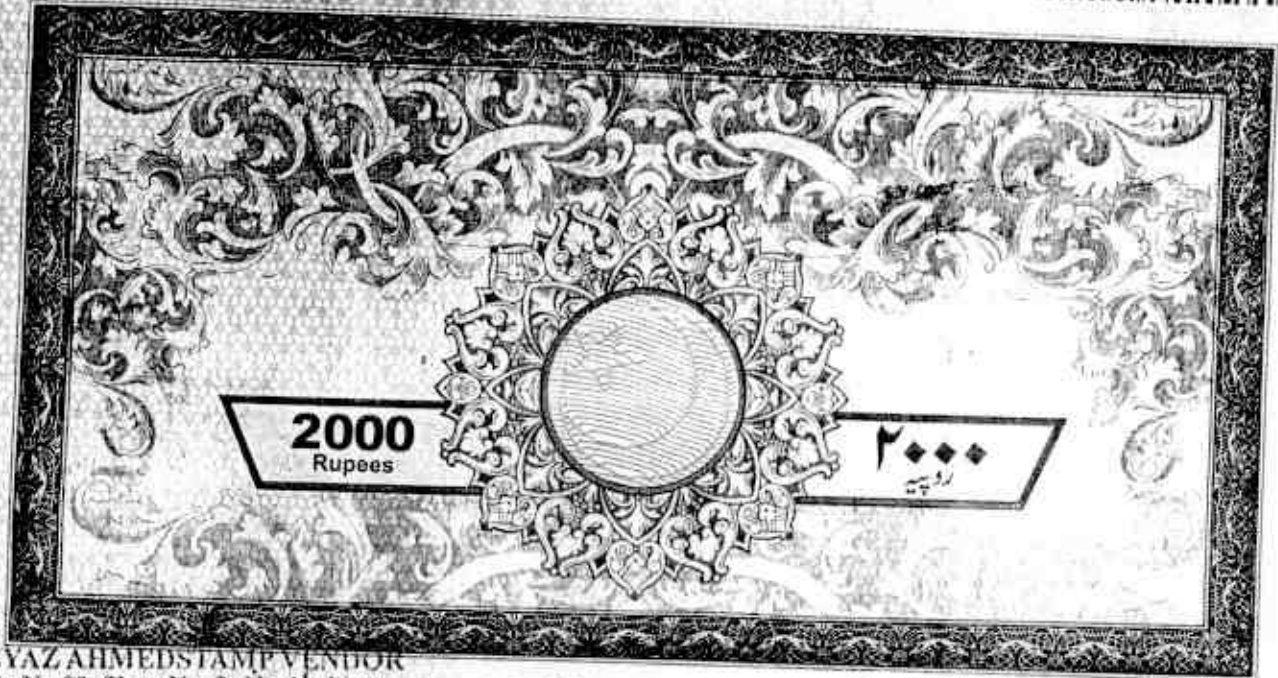
CE (Control)

Notes and Calculations checked mathematically as Rs. = 961739/ in the light of letter no. KW&SB/die/Design/2012/722 dt. 20-8-13

Sub-Eng
20/8/13
20-8-13
AEE

EE
20/8/13
EE

20/08/13



NEYAZ AHMED STAMP VENDOR
Lic No.83, Shop No. 3, Karim Plaza
Block-14, Gulshan-e-Iqbal, Karachi

1.2 NOV 2013

S. NO. 27468 DATE

Issue To With Address

Through With Address Muhammad Yaqoob

Purpose

Value Rs. Advocate Ledger No. 1459

Stamp Vendor's Signature

Page-2

3. In consideration of the payments to be made by the Employer to the Contractor as hereinafter mentined, the Contractor hereby covenants with the Employer to execute and complete the Works and remedy defects therein in conformity and in all respects within the provisions of the Contract.
4. The Employer hereby covenants to pay the Contractor, in consideration of the execution and completion of the Works as per provisions of the Contract, the Contract Price or such other sum as may become payable under the provisions of the Contract at the times and in the manner prescribed by the Contract.

IN WITNESS WHEREOF the parties hereto have caused this Contract Agreement to be executed on the day, month and year first before written in accordance with their respective laws.

Signature of the Contractor

Pervaiz Khan
Proprietor
M/s. Pervaiz Khan &
Brothers

Signature of the Employer

[Signature]
CHIEF ENGINEER, CENTRAL
KW&SB

Witness:

اولاد نورجان
اولاد نورجان
يوسف خان
يوسف خان

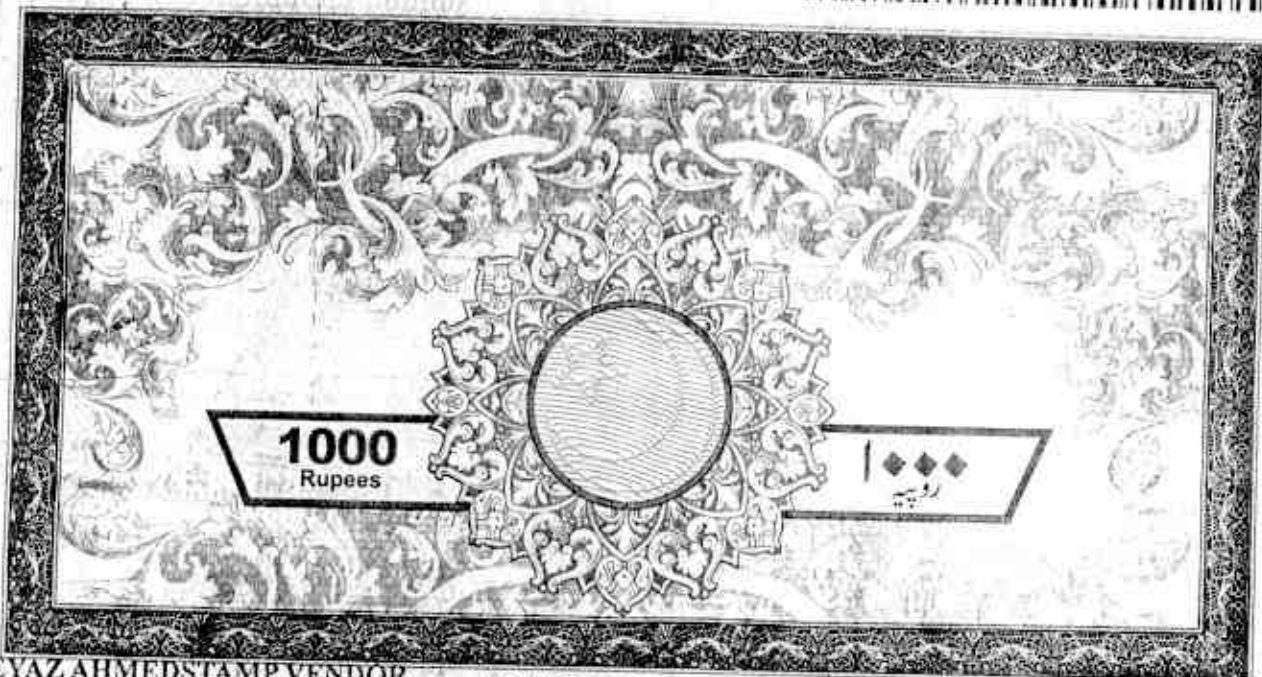
Attested

[Signature]
ZAFAR MALIK
Executive Engineer (SEW)
Liaquatabad Town
Karachi Water & Sewerage Board

Witness:

[Signature]
SUPERINTENDING ENGINEER
LIAQUATABAD
KW&SB

[Signature]
EXECUTIVE ENGINEER (SEW)
LIAQUATABAD
KW&SB



NEYAZ AHMED STAMP VENDOR
Lic No.83, Shop No. 3, Karim Plaza
Block-14, Gulshan-e-Iqbal, Karachi

12 NOV 2013

S. NO DATE

Issue To With Address

Through With Address

Purpose

Value Rs..... Attached

Stamp Vendor's Signature

Sanction Amount Rs.9,60,778/-

Muhammad Ali
Advocate Lodger No.1459

CONTRACT AGREEMENT

THIS CONTRACT AGREEMENT (hereinafter called the "Agreement") made on the 13th day of Nov-2013 between The Karachi Water & Sewerage Board represented by it's The Chief Engineer (Central), KW&SB (hereinafter called the "Employer") of the one part and M/s. Pervaiz Khan & Brothers. (hereinafter called the "Contractor") of the other part

WHEREAS the Employer is desirous that certain Works, viz EMERGENT REPLACEMENT OF 12",18" DIA SUNK DOWN SEWERS AND REPAIRING OF COLLAPSED MANHOLES DURING RECENT HEAVY RAIN VARIOUS PLACES IN LIAQUATABAD TOWN (SEWERAGE).. Should be executed by the Contractor and has accepted a Bid by the Contractor for the execution and completion of such Works and the remedying of any defects therein.

NOW This Agreement witnesseth as follows:-

1. In this Agreement words and expressions shall have the same meanings as are respectively assigned to them in the Conditions of Contract hereinafter referred to.
2. The following documents after incorporating addenda, if any except those parts relating to Instructions to Bidders, shall be deemed to form and be read and construed as part of this Agreement, viz:
 - (a) The Letter of Acceptance;
 - (b) The completed Form of Bid alongwith Schedules to Bid;
 - (c) Conditions of Contract & Contract Data;
 - (d) The priced Schedule of Prices;
 - (e) The Specifications; and
 - (f) The Drawings.

Attested

Muhammad Ali
Advocate

Zafar Mali
ZAFAR MALI
Executive Engineer (SEW)
Liaquatabad Town
Karachi Water & Sewerage Board

COMPARATIVE STATEMENT
NAME OF WORK: EMERGENT REPLACEMENT OF 12", 18" DIA SUNK DOWN SEWERS AND REPAIRING OF COLLAPSED MANHOLES DURING RECENT HEAVY RAIN VARIOUS PLACES IN LIAQUATABAD TOWN (SEWERAGE)

S.No	Description of Work	Engineer's Estimate		M/s. Pervaiz Khan & Bros		M/s. Sawab Noor Khan & Bros		M/s. Yousuf Khan & Brothers	
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount
1	Dismantling & removing road mantling Excavation for pipe line in trenches, and pits in all kind of soils of murum w/c trimming and dressing sides to true alignment and shape leveling of beds of trenches to correct level and grade, cutting joint holes and disposal of surplus earth within a one chain as directed by engineer in charge. Providing fence guards, lights, flags and temporary crossing for non vehicular traffic where ever required lift up to 5 ft (1.52m) and lead up to one chain (30.5m)	2368	605.00	% Cft	14,326.40	605.00	14,326.40	605.00	14,326.40
2	Add for additional lift of every three ft or part there of in item No.1 to 15 (A&B) excavation for pipe lines and storage tanks trenches and pits. 5 to 8 ft 8-11 ft	12232.7	4,650.00	% 0 Cft	56,882.06	4,650.00	56,882.06	4,650.00	56,882.06
		7104	5,200.00	% 0 Cft	36,940.80	5,200.00	36,940.80	5,200.00	36,940.80
		3000	5,750.00	% 0 Cft	17,250.00	5,750.00	17,250.00	5,750.00	17,250.00
3	Full hire charges of the pumping per day inclusive of wage of driver & Assistant, fuel or Electric, Energy plate from required for placing pumps etc at lower depth with suction and delivery pipes for pumping out water found at various depths from trenches i/c the cost of erection and dismantling after completion of the job. Hire charges pumping set of up to 10 HP pumping out water from 10 ft deep trench	7	1,500.00	P/Day	10,500.00	1,500.00	10,500.00	1,500.00	10,500.00

NAME OF WORK: EMERGENT REPLACEMENT OF 12", 18" DIA SUNK DOWN SEWERS AND REPAIRING OF COLLAPSED MANHOLES DURING RECENT HEAVY RAIN VARIOUS PLACES IN LIAQUATABAD TOWN (SEWERAGE)

S.No	Description of Work	Engineer's Estimate			M/s. Pervaiz Khan & Bros			M/s. Sawab Noor Khan & Bros			M/s. Yousuf Khan & Brothers		
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount	Rate	Amount		
4	Providing, Laying, Joint and fitting in Rubber Ring and cutting rubber ring in trench with water to specified pressure												
	12" dia	456	Rft	367.00	P/Rft	167,352.00	366.00	166,896.00	370.00	168,720.00	366.00	166,896.00	
	18" dia	250	Rft	539.00	P/Rft	134,750.00	539.00	134,750.00	539.00	134,750.00	539.00	134,750.00	
	Providing Manhole 4 feet internal diameter without RCC manhole cover with C.I frame (15 kg) and 5 feet clear depth cast in situ 1:2.4:9" thick wall 1:4:8 cement concrete in 6ft dia and 6 inch thick in foundation, 1:2.4, 1:2.4 CC in benching VZ" cement plaster 1:3 cement mortar on inside wall and surface of channel and benching to top including making required number of main and branches channels% dia abrs MS rest at 12" C/C kind of soil back filling and disposal of excavated stuff etc complete, as per design and instruction of the engineer in charge												
5		14	Nos	14,529.29	Each	203,410.06	14,529.00	203,406.00	14,529.00	203,406.00	14,529.00	203,406.00	
6	Extra for depth beyond 5' depth, if less than 5, deduction will be made at the same rate	66	Rft	2,538.62	P/Rft	167,548.92	2,538.00	167,508.00	2,538.00	167,508.00	2,538.00	167,508.00	
7	Making connections with the existing manholes i/c cost of cutting holes in walls, making them good in cement concrete 1:2.4 and making the required channel etc com lete	8	Nos	180.00	Each	1,440.00	180.00	1,280.00	500.00	4,000.00	800.00	6,400.00	
8	Refilling the excavated stuff in trenches 5" thick layer i/c watering ramming to full compaction etc complete	223367	Cft	2,780.00	% 0 Cft	61,649.29	2,760.00	61,649.29	2,760.00	61,649.29	2,760.00	61,649.29	

NAME OF WORK: EMERGENT REPLACEMENT OF 12", 18" DIA SUNK DOWN SEWERS AND REPAIRING OF COLLAPSED MANHOLES DURING RECENT HEAVY RAIN VARIOUS PLACES IN LIAQUATABAD TOWN (SEWERAGE)

S.No	Description of Work	Engineer's Estimate			M/s. Pervaiz Khan & Bros			M/s. Sawab Noor Khan & Bros			M/s. Yousuf Khan & Brothers		
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount	Rate	Amount		
9	Cement concrete plain i/c placing compacting finishing and curing and complete i/c screening and washing at stone aggregate ratio 1:2:4	510.22	Cft	% Cft	73,620.92	14,429.25	73,620.92	14,529.25	74,131.14	14,429.25	73,620.92		
10	Steel shuttering for construction of Manholes (Circular) at site i/c its erection in proper position and removal after concrete i/c transportation complete etc												
11	C.I Frame	56.25	Rft	P/Rft	5,568.75	99.00	5,568.75	140.00	6,187.50	99.00	5,568.75		
	Total Quoted / Corrected Cost	150	Kg	P/Kg	10,500.00	68.00	10,200.00	80.00	12,000.00	100.00	15,000.00		
	Say				961,739.20		960,778.22		968,251.19		970,698.22		
					961,739		960,778		968,251		970,698		

(Niaz Ahmed Shaikh)
Accounts Officer (Central)
Member/Secretary

(Saif-ul-Haque)
Additional Director Internal
Audit - KMC Member

(Magsood Ahmed Shaikh)
Superintending Engineer (KMC)
Member

(Syed Fahim Akhtar Zaidi)
Chief Engineer (Central)
Member

(Abdul Rahim Khattai)
Chief Engineer (IPD), (Convener)

NAME OF WORK: EMERGENT REPLACEMENT OF 12", 18" DIA SUNK DOWN SEWERS AND REPAIRING OF COLLAPSED MANHOLES DURING RECENT HEAVY RAIN VARIOUS PLACES IN LIAQUATABAD TOWN (SEWERAGE)

S.No	Description of Work	Engineer's Estimate			M/s. Pervaiz Khan & Bros		M/s. Sawab Noor Khan & Bros		M/s. Yousuf Khan & Brothers		
		Quantity	Rate	Unit	Amount	Rate	Amount	Rate	Amount	Rate	Amount
4	Providing Laying RCC pipes with Rubber Ring Joint and fitting in trench i/c cutting rubber ring i/c testing with water to specified pressure.										
	12" dia	456	Rt 367.00	P/Rt	167,352.00	366.00	166,896.00	370.00	168,720.00	366.00	166,896.00
	18" dia	250	Rt 539.00	P/Rt	134,750.00	539.00	134,750.00	539.00	134,750.00	539.00	134,750.00
5	Providing Manhole 4 feet internal diameter without RCC manhole cover with C.I frame (15 kg) and 5 feet clear depth cast in situ 1:2.4 9" thick wall 1:4 8 cement concrete in 6ft dia and 6 inch thick in foundation. 1:2.4, 1:2.4 CC in benching Vz" cement plaster 1:3 cement mortar on inside wall and surface of channel and benching to top including making required number of main and branches channels%" dia abrs M.S rest at 12" C/C kind of soil back filling and disposal of excavated stuff etc complete, as per design and instruction of the engineer in charge										
	Extra for depth beyond 5' depth, if less then 5, deduction will be made at the same rate	14	Nos 14,529.29	Each	203,410.06	14,529.00	203,406.00	14,529.00	203,406.00	14,529.00	203,406.00
6	Making connections with the existing manholes i/c cost of cutting holes in walls, making them good in cement concrete 1:2.4 and making the required channel etc com late	66	Rt 2,538.62	P/Rt	167,548.92	2,538.00	167,508.00	2,538.00	167,508.00	2,538.00	167,508.00
7	Refilling the excavated stuff in trenches 6" thick layer i/c watering ramming to full compaction etc. complete	8	Nos 180.00	Each	1,440.00	160.00	1,280.00	500.00	4,000.00	800.00	6,400.00
8		22336.7	Cft 2,760.00	% 0 Cft	61,649.29	2,760.00	61,649.29	2,760.00	61,649.29	2,760.00	61,649.29

KARACHI WATER & SEWERAGE BOARD

OFFICE OF THE CHIEF ENGINEER (IP&D)


BID EVALUATION REPORT

1	Name of Procuring Agency	KARACHI WATER & SEWERAGE BOARD
2	Tender Reference No	SPPRA Serial No.17400 I.D No. /2013
3	Tender Description/Name of Work/Item	EMERGENT REPLACEMENT OF 12".18" DIA SUNK DOWN SEWERS AND REPAIRING OF COLLAPSED MANHOLES DURING RECENT HEAVY RAIN VARIOUS PLACES IN LIAQUATABAD TOWN (SEWERAGE)
4	Method of Procurement	Single Stage (One Envelop)
5	Tender Published	Through Web Site
6	Total Bid Documents Sold	03 Nos
7	Total Bid Received	03 Nos
8	Technical Bid Opening Date (if applicable)	N/A
9	No. of Bid Technically Qualified (if applicable)	N/A
10	Bid (s) rejected	Nil
11	Financial Bid Opening Date	10/10/2013
12	Bid Evaluation Report	


S#	NAME OF FIRM OR BIDDER	COST OFFERED BY THE BIDDERS	RANKING IN TERMS OF COST	COMPARISON WITH ESTIMATED COST	REASON FOR ACCEPTANCE/ REJECTION	REMARKS
1	M/s. Pervaiz Khan & Bros	Rs. 960,776/-	1st Lowest	@ 0.0999% Below	Substantially Responsive	P.O # 8289729 Dt:07-10-2013 Rs. 21,000/- HBL Taimuria Market Br
2	M/s. Sawab Noor Khan & Bros	Rs. 968,251/-	2nd Lowest	@ 0.6771% Above	Substantially Responsive	P.O # 8289728 Dt:07-10-2013 Rs. 20,000/- HBL Taimuria-Market Br
3	M/s. Yusuf Khan & Brothers	Rs. 970,698/-	3rd Lowest	@ 0.9315% Above	Substantially Responsive	P.O # AAA 11135350 Dt:07-10-2013 Rs. 23,000/- Allied Bank Paposh Nagar Br

The all concerned bidder are being informed accordingly.


The E.E Concerned for compliance of rule 45 of SPPRA 2010 M/s. Pervaiz Khan & Bros. declared as the lowest responsive bidder by the Committee and recommended for Sanction from Competent Authority.


(Niaz Ahmed Shaikh)
Accounts Officer (Central)
Member/Secretary


(Saif-ul-Haque)
Additional Director Internal
Audit - KMC Member


(Maqsood Ahmed Shaikh)
Superintending Engineer (KMC)
Member


(Syed Fahim Akhtar Zaidi)
Chief Engineer (Central)
Member


(Abdul Rahim Khattai)
Chief Engineer (IPD),
(Convener)



KARACHI WATER & SEWERAGE BOARD

OFFICE OF THE CHIEF ENGINEER (IP&D)

BID EVALUATION REPORT


1	Name of Procuring Agency	KARACHI WATER & SEWERAGE BOARD
2	Tender Reference No	SPPRA Serial No.17400 I.D No. /2013
3	Tender Description/Name of Work/Item	EMERGENT REPLACEMENT OF 12",18" DIA SUNK DOWN SEWERS AND REPAIRING OF COLLAPSED MANHOLES DURING RECENT HEAVY RAIN VARIOUS PLACES IN LIAQUATABAD TOWN (SEWERAGE)
4	Method of Procurement	Single Stage (One Envelop)
5	Tender Published	Through Web Site
6	Total Bid Documents Sold	03 Nos
7	Total Bid Received	03 Nos
8	Technical Bid Opening Date (if applicable)	N/A
9	No. of Bid Technically Qualified (if applicable)	N/A
10	Bid (s) rejected	Nil
11	Financial Bid Opening Date	10/10/2013

12 Bid Evaluation Report


S #	NAME OF FIRM OR BIDDER	COST OFFERED BY THE BIDDERS	RANKING IN TERMS OF COST	COMPARISON WITH ESTIMATED COST	REASON FOR ACCEPTANCE/ REJECTION	REMARKS
1	M/s. Pervaiz Khan & Bros	Rs. 960,778/-	1st Lowest	@ 0.0899% Below	Substantially Responsive	P.O # 8289729 Dt:07-10-2013 Rs.21,000/- HBL Taimuria Market Br
2	M/s. Sawab Noor Khan & Bros	Rs. 968,251/-	2nd Lowest	@ 0.6771% Above	Substantially Responsive	P.O # 8289728 Dt:07-10-2013 Rs.20,000/- HBL Taimuria Market Br
3	M/s. Yousuf Khan & Brothers	Rs. 970,698/-	3rd Lowest	@ 0.9315% Above	Substantially Responsive	P.O # AAA 11135350 Dt:07-10-2013 Rs 23,000/- Allied Bank Paposh Nagar Br

The all concerned bidder are being informed accordingly.


The E.E Concerned for compliance of rule 45 of SPPRA 2010 M/s. Pervaiz Khan & Bros. declared as the lowest responsive bidder by the Committee and recommended for Sanction from Competent Authority.


(Niaz Ahmed Shaikh)
Accounts Officer (Central)
Member/Secretary


(Saif-ul-Haque)
Additional Director Internal
Audit - KMC Member


(Maqsood Ahmed Shaikh)
Superintending Engineer (KMC)
Member


(Syed Fahim Akhtar Zaidi)
Chief Engineer (Central)
Member


(Abdul Rahim Khattai)
Chief Engineer (IPD),
(Convener)