



OFFICE OF THE DISTRICT MUNICIPAL CORPORATION, MALIR KARACHI.

No.DMC Malir / B.Q.Zone/Administrator/ 283 /2015.

Dated: 17-9-15

TENDER NOTICE

The Tender is sealed covers are invited for the following work under SPPRA Rules-2010 from the firms having adequate experience in the relevant field. The tentative cost of work is under Rs: 1.00 Million

S.No.	Name of Work	Amount	Earnest Money	Time Allowed	Tender Fee Non Refundable
1.	PROVIDING LAYING SEWERAGE LINE AT MALKAI PARA REHRI GDTH UC- REHRI BIN QASIM ZONE DMC MALIR	999500	19980	03 Month	1000
2.	PROVIDING LAYING SEWERAGE LINE AT ILYAS GOTH BANGALI PARA UC- REHRI BIN QASIM ZONE DMC MALIR	999700	19994	03 Month	1000
3.	CLEANING OF SEWERAGE LINE AT MALKAI PARA REHRI GOTH UC-REHRI BIN QASIM ZONE DMC MALIR	999000	19980	03 Month	1000
4.	PROVIDING LAYING WATER SUPPLY LINE AT COAST GUARD SIE JAN MOHAMMAD BALOUCH PARA ALI BROHI GOTH UC- REHRI BIN QASIM ZONE DMC MALIR	999800	19996	03 Month	1000

Tender Processing Schedule shall be as follows:-

1-Receiving of Applications & Issuance of Tenders	23-09-2015 To 07-10-2015	Superintending Engineer, DMC Malir, Karachi
2-Dropping of Tenders	during office hours	In the office of the Superintending Engineer, DMC Malir, Karachi
3-Opening of Tenders	08-10-2015 11:00 AM	Tender opening Committee in the office of Superintending Engineer, DMC Malir, Karachi
	08-10-2015 12:00 PM	

Terms & Conditions:

The Tender Document will be issued to the Contractors on the submission of written request on their letterhead and on payment of non-refundable cost of tender price through pay order from any scheduled bank in favors of District Municipal Corporation, Malir Karachi as mentioned above each work.

In case of any reason beyond our control, if the tenders are not responded on the above date, the next date of submission & opening of Tenders will be ~~26-10-2015~~ 23-10-2015 at 12:00 pm and the tender documents will be available for sale from ~~07-10-2015~~ 07-10-2015 To 23-10-2015

In case the date of opening is declared as a public holiday by the government, the next official working day shall be deemed to the date for submission and opening of tenders of the same time as mentioned.

- Registration with income tax Department (NTN Copy) and Sindh Revenue Board.
- Documentary of work equivalent cost or above executed in last 3 years & Certificate of satisfactory completion showing date of start & completion from employer.
- List of machinery & equipment available with documentary proof of its ownership
- 2% of specified amount against each work in shape of Pay Order/Bank draft in favor of District Municipal Corporation, Malir Karachi shall be attached with the tender documents.
- Tenders in unsealed covers / without 2% Earnest Money will not be entertained and discarded.
- The single envelop procedure adopted for tender work as per S.P.P.R.A Rules-2010.
- The total bid amount as well as the rates of items must be filled both in figure and words and incase any correction is made by the contractor himself then each correction must be initiated by the contractor otherwise the tenders are liable to be summarily rejected.
- If any fake documents are found then the tender is liable to be rejected-cancelled without any compensation but penalty as per rules.
- Tenders can be seen/download on Authority's web sites S.P.P.R.A www.sppra.sindh.gov.pk.
- The procuring agency may reject all or any bid subject to the relevant provision of S.P.P.R.A Rules-2010.

ADMINISTRATOR
DISTRICT MUNICIPAL CORPORATION
MALIR KARACHI

DIRECTOR (CB) S.P.P.R.A, GOS.

With a request to upload on the website of S.P.P.R.A (Authority) .A Soft copy is also enclosed.

Copy to:

- The Municipal Commisniener, DMC Malir Karachi
- The Superintending Engineer, DMC Malir Karachi.
- The Executive Engineer, Bin Qasim Zone DMC Malir Karachi.
- The Accounts Officer DMC Malir Karachi.
- P.S. to Managing Director, S.P.P.R.A

ADMINISTRATOR
DISTRICT MUNICIPAL CORPORATION

SPPRA INWARD DIARY
NO: 2236
DATED: 22/9/15

NAME OF WORK: - PROVIDING LAYING SEWERAGE LINE AT ILYAS GOTH BANGALI PARA
UC- REHRI BIN QASIM ZONE DMC MALIR

BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
1.	9450.00	Excavation for pipe line in trenches and pits in all kind of soil of murmur i/c trimming and dressing side to true alignment and shape leveling of beds of trenches to correct level and grade cutting joint holes and disposal of surplus earth with in one chain as directed by Engineer in charge providing fence guards light flags and temporary crossing for non-vehicular traffic where ever required lift up to 5ft and lead up to one chain.(Ph Sch.05P/62)	Rs.4650/-	%Ocft	Rs:43942.00
2.	700.00	Providing R.C.C pipe of ASTM C-76-62 T/C 76-70 class II wall B and fixing in trenches i/c cutting fitting and jointing with rubber ring i/c testing with water to specified pressure. 12" Dia	Rs.412.00	P.Rft	Rs:288400.00
3.	8505.0	Refilling the excavated stuff in trenches 6" thick layers i/c watering ramming to full compaction etc complete.(Ph Sch P- It.)	Rs.2760.00	%Ocft	Rs:23474.00
4.	28 Nos	Construction of manhole or inspection chamber for 4ft dia and 5ft in depth with circular sewer with wall c.c 1:2:4 width 9"thick including centering and fixing c.i manhole frame without R,C.C manhole cover etc complete as per specification(Sch RA)	Rs.13952.53	Each	Rs:390665.00
5.	28 Nos	Manufacturing and supplying R.C.C Ring slab 21"dia out side 7.5"widthand 6"thick i/c 3/8"dia to steel bar to concentric ring with 3/8"dia 8 Nos cross link bars 1/c curing staking and transportation with in 10 Miles etc complete.(W 5 schedule P-27 It-2)	Rs.1906.60	Each.	Rs:53385.00
6.	28 Nos	Manufacturing and supplying R.C.C manhole covers cast in 1:2:4 concrete ratio 3" deep at center to center reinforcement with 3/8" dia for steel bars at 4" center to center welded to 1/8" thick 2.5" deep M.S Plate 1/c curing staking and transportation with in 10 Miles etc complete.(W 5 Schedule P-27 It-1) 21" Dia	Rs.913.63	Each	Rs:25582.00

7.	13.06	Add or Deduct for depth of manhole above or beyond 4'(Sch RA) (Add:)	2335.45	P.Rft	Rs:30501 .00
----	-------	--	---------	-------	--------------

Amount Total (a) **Rs: 8,55,949.00**

_____ %Above/Below Dn The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

Total (A)= a + b in words & Figures:

Contractor

Executive Engineer / Procuring Agency

Summary of Bill of Quantities

Cost of Bid	Amount
1 (A) Cost based on composite Schedule of Rate	_____
2 (B) Cost of based on Non / Offered Schedule of Rates.	_____
TOTAL COST OF BID (C) = TOTAL (A) + Total (B)	_____

Contractor

Executive Engineer / Procuring Agency

NAME OF WORK: - PROVIDING LAYING SEWERAGE LINE AT MALKAI PARA REHRI GOTH UC- REHRI
BIN QASIM ZONE DMC MALIRBILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
1.	9450.00	Excavation for pipe line in trenches and pits in all kind of soil of murmur i/c trimming and dressing side to true alignment and shape leveling of beds of trenches to correct level and grade cutting joint holes and disposal of surplus earth with in one chain as directed by Engineer in charge providing fence guards light flags and temporary crossing for non-vehicular traffic where ever required lift up to 5ft and lead up to one chain.(Ph Sch.0SP/62)	Rs.4650/-	%Ocft	Rs:43942.00
2.	700.00	Providing R.C.C pipe of ASTM C-76-62 T/C 76-70 class II wall B and fixing in trenches i/c cutting fitting and jointing with rubber ring i/c testing with water to specified pressure. 12"Dia	Rs.412.00	P.Rft	Rs:288400.00
3.	8505.0	Refilling the excavated stuff in trenches 6" thick layers i/c watering ramming to full compaction etc complete.(Ph Sch P- It-)	Rs.2760.00	%OCft	Rs:23474.00
4.	28 Nos	Construction of manhole or inspection chamber for 4ft dia and 5ft in depth with circular sewer with wall c.c 1:2:4 width 9"thick including centering and fixing c.i manhole frame without R.C.C manhole cover etc complete as per specification(Sch RA)	Rs.13952.53	Each	Rs:390665.00
5.	28 Nos	Manufacturing and supplying R.C.C Ring slab 21"dia out side 7.5"widthand 6"thick i/c 3/8"dia to steel bar to concentric ring with 3/8"dia B Nos cross link bars 1/c curing staking and transportation with in 10 Miles etc complete.(W 5 Schedule P-27 It-2)	Rs.1906.60	Each.	Rs:53385.00
6.	28 Nos	Manufacturing and supplying R.C.C manhole covers cast in 1:2:4 concrete ratio 3" deep at center to center reinforcement with 3/8" dia for steel bars at 4" center to center welded to 1/8" thick 2.5" deep M.S Plate 1/c curing staking and transportation with in 10 Miles etc complete.(W 5 Schedule P-27 It-1) 21"Dia	Rs.913.63	Each	Rs:25582.00

7.	12.97	Add or Deduct for depth of manhole above or beyond 4'(Sch RA) (Add:)	2335.45	P.Rft	Rs:30291.00
----	-------	--	---------	-------	-------------

Amount Total (a) **Rs: 8,55,739.00**

_____ %Above/Below On The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

Total (A)= a + b in words & Figures:

Contractor

Executive Engineer / Procuring Agency

(Cont.....Page No.02)

Summary of Bill of Quantities

Cost of Bid	Amount _____
1 (A) Cost based on composite Schedule of Rate	_____
2 (B) Cost of based on Non / Offered Schedule of Rates.	_____
TOTAL COST OF BID (C) = TOTAL (A) + Total (B)	_____

Contractor

Executive Engineer / Procuring Agency

NAME OF WORK: - PROVIDING LAYING WATER SUPPLY LINE AT COAST GUARD SIE JAN MOHAMMAD
BALOUCH PARA ALI BROHI GOTH UC- REHRI BIN QASIM ZONE DMC MALIR.

BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

5.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
1.	2477.50Cft	Excavation for pipe line in trenches and pits in all kind of soil of murum i/c trimming and dressing side to true alignment and shape leveling of beds of trenches to correct level and grade cutting joint holes and disposal of surplus earth with in one chain as directed by Engineer incharge providing fence guards light flags and temporary crossing for non-vehicular traffic where ever required lift up to 5ft and lead upto one chain.	Rs:4650.00	%Cft	Rs:114960.00
2.	2900.0Rft	Providing, laying & fixing in trench i/c fitting, jointing & testing etc complete in all respect the high Density polyethylene pipes (HDDE-100) for W/S conforming ISO 4427 / DIN 8071/8075 B.5 3580 & PSI 3051.(PN.12.50)(P.25&27 1/1) 3" Dia	Rs:213.00	P.Rft	Rs.617700.00
3.	22250.25Cft	Refilling the excavated stuff in trenches 6" thick layers i/c watering, ramming to full compaction etc...complete	Rs:2760.00	%Cft	Rs:61411.00
4.		Providing and fitting of P.E fittings etc complete			
	02 Nos	Elbow 90 Degree 3" Dia	Rs:1676.00	Each	Rs:3352.00
	02 Nos	Elbow 45 Degree 3" Dia	Rs:1341.00	Each	Rs:2682.00
	02 Nos	Cross Tee Equal 90x90x90	Rs:2218.00	Each	Rs:4436.00
	04 Nos	But Fusion Joint 3" Dia	Rs:600.00	Each	Rs:2400.00
5.	04 Nos	Construction small wheel valve chamber clear inside size 18"x18"x18" with walls of 9"thick of B.B in cement mortar 1:3 over 4" thick cement concrete 1:3:6 cement plastered 1/2" thick 1:3 inside i/c supplying and fixing C.I light weight manhole cover with frame and locking arrangement of 18" x 18" clear opening etc complete.(P.H.Sch. P/53 1/9)	Rs:4103.00	Each	Rs:16412.00
6.	03 Nos	Providing & fixing full way gun metal valve with wheel, threaded or flanged ends with rubber washer standard pattern(C.5ch. Page No.15, Item No.6(b) 3"Dia	Rs:1940.84	Each	Rs:5822.00

7.	02 Nos	Providing and fixing Air Valve Double action etc complete 3" Dia	Rs:4000.00	Each	Rs:8000.00
----	--------	--	------------	------	------------

Amount Total (a) **Rs:8, 33,182.00**

_____ %Above/Below On the Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

Total (A)= a + b in words & Figures:

Contractor

Executive Engineer / Procuring Agency

(Cont.....Page No.02)

Summary of Bill of Quantities

Cost of Bid	Amount _____
1 (A) Cost based on composite Schedule of Rate	_____
2 (B) Cost of based on Non / Offered Schedule of Rates.	_____
TOTAL COST OF BID (C) = TOTAL (A) + Total (B)	_____

Contractor

Executive Engineer / Procuring Agency

NAME OF WORK: - **CLEANING OF SEWERAGE LINE AT MALKAI PARA REHRI GOTH UC-
REHRI BIN QASIM ZONE DMC MALIR**

BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

S.NO	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1.	2.	3.	4.	5.	6.
1.	6386.0Rft	Cleaning inside sewerage lines completely restoring original silt free space/diameter of pipe line by labour and equipment (Mechanically/electrically driven). Including accessories like pulleys steel rape, bucket and draggers sizing from 6" to 18" dia their "to and fro" pulling action etc complete as per full satisfaction of site engineer. i) 12" Oia	Rs:80/50	P.Rft	Rs:514073.00
2.	362 Nos	Cleaning / De-silting of manhole or inspection chamber i/c cleaning and Roding of connected sewers (Average 50' per manhole removing sewerage and solid wastes and throwing out side KMC limits	Rs:474/83	Each	Rs:171888.00
3.	50 Nos	Manufacturing and supplying R.C.C Ring slab 21" dia out side 7.5" width and 6" thick i/c 3/8" dia to steel bar to concentric ring with 3/8" dia 8 Nos cross link bars 1/c curing staking and transportation with in 10 Miles etc complete.	Rs.1906.60	Each.	Rs:95330.00
4.	56 Nos	Manufacturing and supplying R.C.C manhole covers cast in 1:2:4 concrete ratio 3" deep at center to center reinforcement with 3/8" dia for steel bars at 4" center to center welded to 1/8" thick 2.5" deep M.S Plate 1/c curing staking and transportation with in 10 Miles etc complete. (W S Schedule P-27 It-1) 21" dia	Rs.913.63	Each	Rs:51163.00

Amount Total (a) **Rs:8,32,454.0**

_____ %Above/Below On The Schedule Rates of CSR.

Amount to be Added/Deducted on the basis of premium quoted Total (b)

Total (A)= a + b in words & Figures:

Contractor

Executive Engineer / Procuring Agency

Summary of Bill of Quantities

Cost of Bid	Amount _____
1 (A) Cost based on composite Schedule of Rate	_____
2 (B) Cost of based on Non / Offered Schedule of Rates.	_____
TOTAL COST OF BID (C) = TOTAL (A) + Total (B)	_____

Contractor

Executive Engineer / Procuring Agency

OFFICE OF THE DISTRICT MUNICIPAL CORPORATION
MALIR KARACHI

NO: DMC (Malir) / ADMINISTRATOR/ 730 /15

Dated: 27-08-2015

The Secretary,
Local Government Department,
Government of Sindh
Karachi.

Subject: CONSTITUTION OF PROCUREMENT COMMITTEE OF DMC MALIR FOR THE YEAR 2015-2016

DMC Malir intend to invite bids from the interested parties for execution of Development / maintenance works during 2015-2016 for which a procurement committee is required to be constituted by the Head of Department as provided in Rule 7,8 of Sindh Public Procurement Rule 2010.


It is therefore requested that approval may kindly be accorded for constitution of procurement committee of B&R, Bin Qasim Zone, DMC Malir consisting upon three member as under :


1	Superintending Engineer, DMC Malir	Chairman
2	EXECUTIVE ENGINEER, B&R BIN QASIM ZONE DMC Malir	Member
3	Mr. Amanullah Watio Executive Engineer, B&R DMC South	Member

ADMINISTRATOR
DISTRICT MUNICIPAL CORPORATION
MALIR, KARACHI.

Copy to:

1. The Director (CB),
Sindh Public Procurement Regularity Authority Karachi


ADMINISTRATOR
DISTRICT MUNICIPAL CORPORATION
MALIR, KARACHI

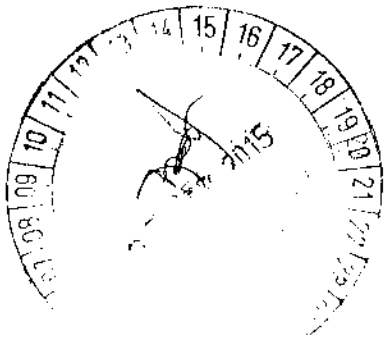

*Per Secretary, Karachi
27/08/2015*