

Office of the Executive Engineer
Education Works Division
Shikarpur

No: /TC/G-55/ 326 / of /2015,
Shikarpur Dated: 16/12 /2015.

Sealed Tenders on standard bidding documents are invited from interested contractors /firms / parties required as per SPPRA Rules 2010, for the following works.

S.No:	Name of Work	Estimated Cost	Earnest Money	Tender Fee	Time Allowed
	<u>Separate list Attached</u>				
1.	The Blank Tender forms can be obtained from the office of the undersigned on payment of tender fee shown against each work.				
2.	The blank tender forms will be issued from the date of publication of this N.I.T upto 04.01.2016 at 2:00 pm and will be received back on 05.01.2016 at 3.00 pm and opened on same day at 3:00 pm in presence of all intending contractors and tendering committee.				
3.	Earnest Money as shown against each work should be deposited in favour of undersigned from any scheduled bank & call deposit must be attached with tender in envelop as SPPRA Rules.				
4.	The undersigned or the authority competent to accept the tenders reserve the right to reject any or all tenders as per SPPRA rules 2010.				
5.	Bidding documents, estimates, drawings and design and specification etc can be seen in the office of the undersigned on any working day during office hours.				
6.	The Bidders will have to produce the following documents while submitting the tender documents. 01. The bidders should produce registration with Sindh Revenue Board in light of SPPRA Rule 2010 amended rule 46 (1) (iii) of 2014. 02. Registration with Income Tax Department (NTN Certificate) copy of N.I.C at the time of submission bids. 03. Undertaking on affidavit that firm is not involved in any litigation or abandoned any work in the Department.				
7.	No conditional tender will be accepted.				
8.	If any holiday is announced by the Government on the dates stated above, the tenders will be issued, received back and opened on next working day.				
9.	In case any of the works remains un-responded, the tenders will be issued upto 21.01.2016 at 2:00 pm and will be received back and opened on 22.01.2016 at 3:00 pm,				
	Note:- This N.I.T. can be seen on SPPRA Web site at www.ppra.sindh.gov.pk				

EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR

Copy F.W.C's to The :-

Secretary to Government of Sindh Information Technology Department Ist: floor Sindh Secretariat No: 06 Karachi for information and along with Soft Copy of N.I.T. for placing the same on website.

Deputy Commissioner Officer Shikarpur.

Chief Engineer Education Works Sukkur for favour of information.

Copy to the Director (A&F) Government of Sindh, Sindh Public Procurement Regulatory Authority, Planning & Development Department Karachi.

Copy to along with (Seven copies) is forwarded to the Director, of information Public Relation Department (Adv:) Block 96 Sindh.

Superintending Engineer Education Works Circle Larkana for favour of information.

Executive Engineer Buildings/Highways Division Shikarpur, for wide publicity.

Assistant Engineer Education Works Sub-Division Shikarpur, Lakhi, Khanpur, Garhi Yasin, The Notice Board / Drawing Branch.

EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR

NO: 6197
DATED: 18-12-15

LIST OF LOCATION

S.No./ A.D.P.No:	Name of Scheme/Location	Taluka	Estimated Cost in Million	Earnest Money in Million	Tender Fee in Rupees	Time Allowed
<u>DISTRICT A.D.P. SCHEMES</u>						
1/2324	REHABILITATION OF GOVERNMENT GIRLS HIGH SCHOOL <u>TALUKA KHANPUR DISTT: SHIKARPUR 2011-12 PROG:</u> GBHS Tando Ali Sher (R/Work)	Khanpur	0.800	0.040	1500	12 Months
2/2336	REHABILITATION OF EXISTING BUILDING FOR BOYS/GIRLS PRIMARY/ ELEMENTARY SCHOOLS OF DISTRICT SHIKARPUR <u>TALUKA G.YASIN (2013-14 PROG:)</u> GBPS Qabalo (Ext: Dev:)	G.Yasin	0.400	0.020	500	06 Months
3/2341	REHABILITATION OF EXISTING BUILDING FOR BOYS/GIRLS SECONDARY/HIGHER SECONDARY SCHOOL IN TALUKA <u>LAKHI DISTRICT SHIKARPUR (2013-14 PROG:)</u> GBHS Chak (R/Work)	Lakhi	0.950	0.048	2000	12 Months
4/2343	REHABILITATION OF EXISTING BUILDING FOR BOYS/GIRLS PRIMARY/ ELEMENTARY SCHOOLS OF DISTRICT SHIKARPUR <u>TALUKA LAKHI (2013-14 PROG:)</u> GBPS Wazirabad (Ext: Dev:)	Lakhi	0.600	0.030	1000	6 Months
5/2344	REHABILITATION OF EXISTING BUILDING FOR BOYS/GIRLS PRIMARY/ ELEMENTARY SCHOOLS OF DISTRICT SHIKARPUR <u>TALUKA LAKHI (2013-14 PROGRAMME).</u> GBPS Budh Goth (Ext: Dev:)	Lakhi	0.700	0.035	1500	12 Months
6/2346	REHABILITATION OF EXISTING BUILDING FOR BOYS/GIRLS PRIMARY/ ELEMENTARY SCHOOLS OF DISTRICT <u>SHIKARPUR TALUKA KHANPUR (2013-14 PROG:)</u> GGPS Khanpur-II (Ext: Dev:)	Khanpur	0.800	0.040	1500	12 Months
<u>PROVINCIAL A.D.P. SCHEMES</u>						
7/127	UP-GRADATION OF PRIMARY SCHOOL TO <u>MIDDLE SCHOOLS (2007-08 PROGRAMME)</u> GBPS Lodra (R/Work) GBPS Gindal Buriro shifted to Rahoja (R/Work) GBPS Muhammad Salih Pahore U/C Rahimabad (Ext: Dev:)	Shikarpur Shikarpur Khanpur	0.300 0.250 0.500	0.015 0.013 0.025	500 500 500	03 Months 03 Months 06 Months
8/128	CONSTRUCTION OF 2-ROOMED SHELTERLESS PRIMARY <u>SCHOOLS IN SINDH (2007-08 PROGRAMME).</u> GBPS Ghulam Mustafa Lohar U.C. Karan (Ext: Dev:)	Shikarpur	0.200	0.010	500	03 Months
9/162	UP-GRADATION OF MIDDLE SCHOOLS TO HIGH SCHOOLS & HIGH SCHOOLS TO HIGHER SECONDARY SCHOOLS IN <u>SINDH (2007-08 PROGRAMME)</u> GGMS Jindo Dero (Ext: Dev:)	G.Yasin	0.500	0.025	500	06 Months
10/164	REHABILITATION OF EXISTING HIGH / HIGHER SECONDARY <u>SCHOOLS IN SINDH (2008-09 PROGRAMME).</u> GBHS Hamayoon (R/Work) GBHSS & GGHS Khanpur (Ext: Dev:)	Shikarpur Khanpur	1.000 0.500	0.050 0.025	2000 500	12 Months 6 Months


EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR

ANNUAL PROCUREMENT PLAN FOR THE YEAR 2015-2016


WORKS FOR EDUCATIONAL INSTITUTIONS UNDER PROVINCIAL/DISTRICT ONGOING ADPs',
NEW ADPs' 2015-2016, MAINTAINANCE & REPAIR AT EDUCATION WORKS DIVISION SHIKARPUR

1	2	3	4	5	6	7	8
S.No./ADP No:	DESCRIPTION OF PROCUREMENT	QUANTITY WHERE APPLICABLE	FUNDS ALLOCATION FOR THE YEAR 2015-16	SOURCE OF FUNDING	PROCURING METHOD	TIME OF PROCUREMENT	REMARKS
DISTRICT A.D.P. SCHEMES							
1/2324	REHABILITATION OF GOVERNMENT GIRLS HIGH SCHOOL TALUKA KHANPUR DISTT: SHIKARPUR 2011-12 PROG: GBHS Tando Ali Sher (R/Work)	As per Bidding Data Khanpur	0.850	ADP	National Competitive bidding single stage one envelope	ADP	
2/2336	REHABILITATION OF EXISTING BUILDING FOR BOYS/GIRLS PRIMARY/ ELEMENTARY SCHOOLS OF DISTRICT SHIKARPUR TALUKA G.YASIN (2013-14 PROG.) GBPS Qabalo (Ext: Dev:) G. Yasin	As per Bidding Data	3.000	ADP	-do-	ADP	
3/2341	REHABILITATION OF EXISTING BUILDING FOR BOYS/GIRLS SECONDARY/HIGHER SECONDARY SCHOOL IN TALUKA LAKHI DISTRICT SHIKARPUR (2013-14 PROG.) GBHS Chak (R/Work)	As per Bidding Data Lakhi	3.000	ADP	-do-	ADP	
4/2343	REHABILITATION OF EXISTING BUILDING FOR BOYS/GIRLS PRIMARY/ ELEMENTARY SCHOOLS OF DISTRICT SHIKARPUR TALUKA LAKHI (2013-14 PROG.) GBPS Wazirabad (Ext: Dev:)	As per Bidding Data Lakhi	2.700	ADP	-do-	ADP	
5/2344	REHABILITATION OF EXISTING BUILDING FOR BOYS/GIRLS PRIMARY/ ELEMENTARY SCHOOLS OF DISTRICT SHIKARPUR TALUKA LAKHI (2013-14 PROGRAMME). GBPS Budh Goth (Ext: Dev:)	As per Bidding Data Lakhi	2.500	ADP	-do-	ADP	
6/2346	REHABILITATION OF EXISTING BUILDING FOR BOYS/GIRLS PRIMARY/ ELEMENTARY SCHOOLS OF DISTRICT SHIKARPUR TALUKA KHANPUR (2013-14 PROG.) GGPS Khanpur-II (Ext: Dev:)	As per Bidding Data Khanpur	2.500	ADP	-do-	ADP	

S.No./ADP No:	DESCRIPTION OF PROCUREMENT	QUANTITY WHERE APPLICABLE	FUNDS ALLOCATION FOR THE YEAR 2015-16	SOURCE OF FUNDING	PROCURING METHOD	TIME OF PROCUREMENT	REMARKS
---------------	----------------------------	---------------------------	---------------------------------------	-------------------	------------------	---------------------	---------

PROVINCIAL A.D.P. SCHEMES

7/127	UP-GRADATION OF PRIMARY SCHOOL TO MIDDLE SCHOOLS (2007-08 PROGRAMME) GBPS Lodra (R/Work) GBPS Gindal Burro shifted to Rahoja (R/Work) GBPS Muhammad Salih Pahore U/C Rahimabad (Ext. Dev.:	As per Bidding Data Shikarpur Shikarpur Khanpur	6.400	ADP	-do-	ADP	
8/128	CONSTRUCTION OF 2-ROOMED SHELTERLESS PRIMARY SCHOOLS IN SINDH (2007-08 PROGRAMME). GBPS Ghulam Mustafa Lohar U.C. Karan (Ext. Dev.:	As per Bidding Data Shikarpur	3.200	ADP	-do-	ADP	
9/162	UP-GRADATION OF MIDDLE SCHOOLS TO HIGH SCHOOLS & HIGH SCHOOLS TO HIGHER SECONDARY SCHOOLS IN SINDH (2007-08 PROGRAMME) GGMS Jindo Dero (Ext. Dev.:	As per Bidding Data G. Yasin	6.000	ADP	-do-	ADP	
10/164	REHABILITATION OF EXISTING HIGH / HIGHER SECONDARY SCHOOLS IN SINDH (2008-09 PROGRAMME). GBHS Hamayoon (R/Work) GBHSS & GGHS Khanpur (Ext. Dev.:	As per Bidding Data Shikarpur Khanpur	8.000	ADP	-do-	ADP	


 EXECUTIVE ENGINEER
 EDUCATION WORKS DIVISION
 SHIKARPUR

NOTIFICATION

U/E&A/PRO-EW(CRC)/14-15: In pursuance of Rule - 31 of the Sindh Public Procurement and Departmental Complaint Redressal Committee comprising of following Officers is under to resolve complaint's of aggrieved bidders:-

Superintendent Engineer (Education Works) of concerned Education Works Circle Education & Literacy Department	Chairman
Representative of District Account Officer / Accountant General, Sindh	Member
Representative of Head of procuring Agency (Professional from relevant field concerning)	Member

To perform according to Rule - 31 of SPPRA, 2010;
Perform any other function ancillary and incidental to the above.

SECRETARY EDUCATION
TO GOVT. OF SINDH
Karachi, date the 28th May, 2015

EDU/E&A/PRO-EW(CRC)/14-15:

Copy is forwarded for information & necessary action to:-

Members of the Committee.

1 P.S to Secretary, Education & Literacy Department.


1 Case Order File



SINDH EDUCATION &
LITERACY DEPARTMENT



28/04/15
DEPUTY SECRETARY (GA)



NOTIFICATION

NO.SO(G) EDU/E&A/PRO-EW(SHP)/14-15: In pursuance of Rule – 7 of the Sindh Public Procurement Rules, 2010, a Departmental Procurement Committee comprising of following Officers for procurement of works for Education Works Division Shikarpur working under Administrative Control of Education & Literacy Department to be procured under ADP / Regular Budget / SNE of Education Department is constituted as under:-

- | | | |
|----|--|----------|
| 1. | Executive Engineer (Education Works)
Education Works Division, Shikarpur
Education & Literacy Department | Chairman |
| 2. | Assistant Engineer
Provincial Highway Shikarpur
Works & Services Department | Member |
| 3. | Assistant Engineer
Education Works sub Division Shikarpur
Education & Literacy Department | Member |

ToRs

- Preparing bidding documents;
- Carrying out technical as well as financial evaluation of the bids;
- Preparing evaluation report as provided in Rule 45 of SPPRA 2010;
- Making recommendations for the award of contract to the competent authority; and
- Perform any other function ancillary and incidental to the above.

- DR. FAZLULLAH PECHUHO -
SECRETARY TO GOVT. OF SINDH

NO.SO(G) EDU/E&A/PRO-EW(SHP)/14-15:

Karachi, date the 27th October, 2015

A copy is forwarded for information & necessary action to:-

1. All Members of the Committee.
2. The P.S. to Senior Minister, Education & Literacy Department, Govt. of Sindh, Karachi.
3. The P.S to Secretary, Education & Literacy Department.
4. The P.S to Secretary, Works & Services Department, Karachi.
5. Office Order File

DEPUTY SECRETARY (GA)

Phone No: 0726-920186

Office of the Executive Engineer
Education Works Division
Shikarpur

No:TC/G-55/ 335 / of/2015,
Shikarpur Dated: 17/ 12 /2015.

Sealed Tenders on standard bidding documents are invited from interested contractors /firms / parties required as per SPPRA Rules 2010, for the following works.

S.No:	Name of Work	Estimated Cost	Earnest Money	Tender Fee	Time Allowed
	Separate list Attached				
1.	The Blank Tender forms can be obtained from the office of the undersigned on payment of tender fee shown against each work.				
2.	The blank tender forms will be issued from the date of publication of this N.I.T upto 04.01.2016 at 2:00 pm and will be received back on 05.01.2016 at 3.00 pm and opened on same day at 3:00 pm in presence of all intending contractors and tendering committee.				
3.	Earnest Money as shown against each work should be deposited in favour of undersigned from any scheduled bank & call deposit must be attached with tender in envelop as SPPRA Rules.				
4.	The undersigned or the authority competent to accept the tenders reserve the right to reject any or all tenders as per SPPRA rules 2010.				
5.	Contract documents, estimates, drawings and design and specification etc can be seen in the office of the undersigned on any working day during office hours.				
6.	The contractor will have to produce the following Documents while submitting the tender documents. 1: Registration certificate with Pakistan Engineering Council ending upto 31.12.2015 2. The bidders should produce registration with Sindh Revenue Board in light of SPPRA Rule 2010 amended rule 46 (1) (iii) of 2014. . 3. Registration with Income Tax Department (NTN Certificate) copy of N.I.C at the time of submission bids. 4. N.T.N Certificate. 5. Undertaking on affidavit that firm is not involved in any litigation or abandoned any work in the Department.				
7.	No conditional tender will be accepted.				
8.	If any holiday is announced by the Government on the dates stated above, the tenders will be issued, received back and opened on next working day.				
9.	In case any of the works remains un-responded, the tenders will be issued upto 21.01.2016 at 2:00 pm and will be received back and opened on 22.01.2016 at 3:00 pm,				
	Note:- This N.I.T. can be seen on SPPRA Web site at www.sppra.sindh.gov.pk				

EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR

Copy F.W.C's to The :-

Secretary to Government of Sindh Information Technology Department Ist: floor Sindh Secretariat No: 06 Karachi for information and along with Soft Copy of N.I.T. for placing the same on website.

Deputy Commissioner Officer Shikarpur.

Chief Engineer Education Works Sukkur for favour of information.

Copy to the Director (A&F) Government of Sindh, Sindh Public Procurement Regulatory Authority, Planning & Development Department Karachi.

Copy to along with (Seven copies) is forwarded to the Director, of information Public Relation Department (Adv:) Block 96 Sindh.

Superintending Engineer Education Works Circle Larkana for favour of information.

Executive Engineer Buildings/Highways Division Shikarpur, for wide publicity.

Assistant Engineer Education Works Sub-Division Shikarpur, Lakhi, Khanpur, Garhi Yasin, The Notice Board / Drawing Branch.

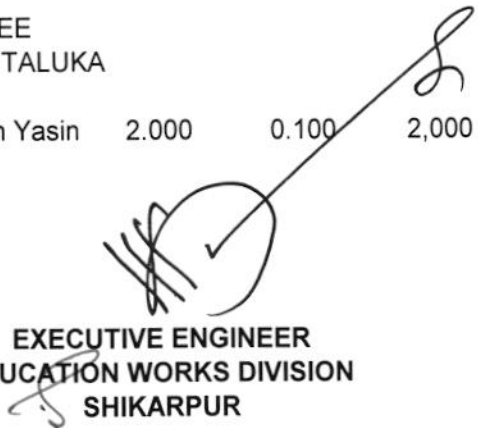
EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR

LIST OF LOCATION

S.No:/ A.D.P.No:	Name of Scheme/Location	Taluka	Estimated Cost in Million	Earnest Money in Million	Tender Fee in Rupees	Time Allowed
<u>DISTRICT A.D.P. SCHEMES</u>						
1/2313	REHABILITATION OF BUILDING FOR EXISTING SECONDARY SCHOOL OF DISTRICT SHIKARPUR 2010-11 PROGRAMME <u>(BOUNDARY WALL)</u> GGHS Haji Fateh Muhammad Usto (R/Work)	Shikarpur	5.000	0.250	3,000	24 Months
2/2314	REHABILITATION OF GOVERNMENT BOYS SECONDARY SCHOOL OF DISTRICT SHIKARPUR 2010-2011 PROGRAMME GBHS No:-I Shikarpur (R/Work)	Shikarpur	3.500	0.175	3,000	24 Months
3/2316	REHABILITATION OF BUILDING FOR EXISTING GIRLS SECONDARY SCHOOL OF TALUKA & DISTRICT SHIKARPUR (2010-11 PROGRAMME) (1 UNIT) GGHS Shikarpur (R/Work)	Shikarpur	3.000	0.150	3,000	24 Months
4/2321	REHABILITATION OF GOVERNMENT BOYS PRIMARY SCHOOL TALUKA & DISTRICT SHIKARPUR (2011-12 PROGRAMME) GBPS Lakhi Gate (Main) (R/R)	Shikarpur	2.800	0.140	3,000	24 Months
5/2325	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS SECONDARY /HIGHER SECONDARY SCHOOLS IN TALUKA & DISTRICT SHIKARPUR (2013-14) PROG: GBHS Islamia Add: 3C/Room	Shikarpur	4.000	0.200	3,000	24 Months
6/2326	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS SECONDARY /HIGHER SECONDARY SCHOOLS IN TALUKA & DISTRICT SHIKARPUR (2013-14) PROG: GBPS Jumani Hall	Shikarpur	1.800	0.090	2,000	24 Months
7/2327	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS SECONDARY /HIGHER SECONDARY SCHOOLS IN TALUKA & DISTRICT SHIKARPUR (02 Units)(2013-14) PROG: GBHSS Sultan Kot	Shikarpur	4.500	0.225	3,000	24 Months
8/2328	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS PRIMARY/ ELEMENTARY SCHOOLS IN TALUKA & DISTRICT SHIKARPUR (05 Units)(2013-14)PROGRAMME GBPS Sultan kot GGPS Lodra GBPS Wahidabad	Shikarpur Shikarpur Shikarpur	5.000 2.700 2.400	0.250 0.135 0.120	3,000 3,000 3,000	24 Months 24 Months 24 Months
9/2329	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS PRIMARY/ ELEMENTARY SCHOOLS IN TALUKA & DISTRICT SHIKARPUR (04 Units)(2013-14)PROGRAMME GGPS Dadwai Road	Shikarpur	2.600	0.130	3,000	24 Months
10/2330	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS PRIMARY/ ELEMENTARY SCHOOLS IN TALUKA & DISTRICT SHIKARPUR (05 Units)(2013-14)PROG: GGPS Haji Fateh Muhammad Usto GBPS Lakhi Gate (Main) Toilet, Water Facilities and B/Wall	Shikarpur Shikarpur	2.000 1.500	0.100 0.075	2,000 2,000	24 Months 24 Months
11/2331	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS PRIMARY/ ELEMENTARY SCHOOLS IN TALUKA & DISTRICT SHIKARPUR (04 Units)(2013-14)PROGRAMME GBPS Qazi Muhalla GGPS Lakhi Gate	Shikarpur Shikarpur	4.000 5.000	0.200 0.250	3,000 3,000	24 Months 24 Months
12/2325	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS SECONDARY /HIGHER SECONDARY SCHOOLS IN TALUKA & DISTRICT SHIKARPUR (2013-14) PROG: GBHS Islamia Repair/Renovation	Shikarpur	5.000	0.250	3,000	24 Months

S.No:/ A.D.P.No:	Name of Scheme/Location	Taluka	Estimated Cost in Million	Earnest Money in Million	Tender Fee in Rupees	Time Allowed
13/2332	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS SECONDARY/HIGHER SECONDARY SCHOOLS IN TALUKA GARHI YASIN DISTRICT SHIKARPUR (03 Units)(2013-14) PROG: GBHS Town Garhi Yasin	Garhi Yasin	5.000	0.250	3,000	24 Months
14/2333	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS SECONDARY/HIGHER SECONDARY SCHOOLS IN TALUKA GARHI YASIN DISTRICT SHIKARPUR (03 Units)(2013-14) PROGRAMME GBHS Madeji	Garhi Yasin	5.000	0.250	3,000	24 Months
15/2334	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS SECONDARY/HIGHER SECONDARY SCHOOLS IN TALUKA GARHI YASIN DISTRICT SHIKARPUR (03 Units)(2013-14) PROGRAMME GBHS Dakhan	Garhi Yasin	3.500	0.175	3,000	24 Months
16/2336	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS PRIMARY/ ELEMENTARY SCHOOLS IN TALUKA GARHI YASIN DISTRICT SHIKARPUR (07 Units)(2013-14) PROGRAMME GGPS Garhi Yasin- II GGPS Urdu Garhi Yasin-III	Garhi Yasin Garhi Yasin	1.800 3.000	0.090 0.150	2,000 3,000	24 Months 24 Months
17/2337	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS PRIMARY/ ELEMENTARY SCHOOLS IN TALUKA GARHI YASIN DISTRICT SHIKARPUR (05 Units)(2013-14) PROGRAMME GBPS Khan Kalhoro GGPS Madeji - II	Garhi Yasin Garhi Yasin	1.800 5.000	0.090 0.250	2,000 3,000	24 Months 24 Months
18/2338	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS PRIMARY/ ELEMENTARY SCHOOLS IN TALUKA GARHI YASIN DISTRICT SHIKARPUR (05 Units)(2013-14) PROGRAMME GBPS O-C Madeji GBPS Soomra Muhalla Madeji	Garhi Yasin Garhi Yasin	4.000 3.800	0.200 0.190	3,000 3,000	24 Months 24 Months
19/2339	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS SECONDARY/HIGHER SCHOOLS IN TALUKA LAKHI DISTRICT SHIKARPUR (02 Units) (2013-14) PROGRAMME GBHS Jahan Khan Main Building (Repair/Renovation) GBHS Habib Kot High School Portion (Repair/R)	Lakhi Lakhi	5.000 3.000	0.250 0.150	3,000 3,000	24 Months 24 Months
20/2340	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS SECONDARY/HIGHER SECONDARY SCHOOLS IN TALUKA LAKHI DISTRICT SHIKARPUR (02 Units)(2013-14) PROGRAMME GBHSS Rustam Main Building(Repair/Renovation) GBHS Wazirabad i Main Building (Repair & Renovation) ii Toilet Water & Compound Wall	Lakhi Lakhi Lakhi	5.000 5.000 1.500	0.250 0.250 0.075	3,000 3,000 2,000	24 Months 24 Months 24 Months
21/2341	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS SECONDARY/HIGHER SECONDARY SCHOOLS IN TALUKA LAKHI DISTRICT SHIKARPUR (03 Units)(2013-14) PROGRAMME GGHSS Mukhi Kirori Mal Parsvam Talreja Chak GGHSS Lakhi Add: 4C/Room	Lakhi Lakhi	2.500 5.000	0.125 0.250	3,000 3,000	24 Months 24 Months
22/2343	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS PRIMARY/ELEMENTARY SCHOOLS IN TALUKA LAKHI DISTRICT SHIKARPUR (07 Units)(2013-14) PROGRAMME GBPS Fateh Tando GBPS Dahar GBPS Wazirabad	Lakhi Lakhi Lakhi	2.000 2.500 2.000	0.100 0.125 0.100	2,000 3,000 2,000	24 Months 24 Months 24 Months
23/2344	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS PRIMARY/ELEMENTARY SCHOOLS IN TALUKA LAKHI DISTRICT SHIKARPUR (07 Units)(2013-14) PROGRAMME GGMS Hothi GGPS Ruk GBMS Dahar	Lakhi Lakhi Lakhi	2.000 2.500 4.000	0.100 0.125 0.200	2,000 3,000 3,000	24 Months 24 Months 24 Months

S.No./ A.D.P.No:	Name of Scheme/Location	Taluka	Estimated Cost in Million	Earnest Money in Million	Tender Fee in Rupees	Time Allowed
24/2345	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS SECONDARY/HIGHER SECONDARY SCHOOLS IN TALUKA KHANPUR DISTRICT SHIKARPUR (03 Units)(2013-14) <u>PROGRAMME</u> GBHS Noor Muhammad Shujrah (B.Wall & Lav:Block)	Khanpur	1.200	0.060	2,000	24 Months
25/2346	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS PRIMARY/ ELEMENTARY SCHOOLS IN TALUKA KHANPUR DISTRICT SHIKARPUR (06 Units)(2013-14) <u>PROGRAMME</u> GBPS Khanpur Sindhi	Khanpur	2.000	0.100	2,000	24 Months
26/2347	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS PRIMARY/ ELEMENTARY SCHOOLS IN TALUKA KHANPUR DISTRICT SHIKARPUR (09 Units)(2013-14) <u>PROGRAMME</u> GGPS Turit Muhro GBPS Muhammad Hassan Brohi	Khanpur Khanpur	1.800 1.200	0.090 0.060	2,000 2,000	24 Months 24 Months
27/2348	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS PRIMARY/ ELEMENTARY SCHOOLS IN TALUKA KHANPUR DISTRICT SHIKARPUR (06 Units)(2013-14) <u>PROGRAMME</u> GBPS Mehmooda Bagh GBPS Khan Muhammad Khan GBPS Tando Ali Sher GBPS Ghulam Nabi Shujrah	Khanpur Khanpur Khanpur Khanpur	4.000 1.800 2.200 2.200	0.200 0.090 0.110 0.110	3,000 2,000 2,000 2,000	24 Months 24 Months 24 Months 24 Months
<u>PROVINCIAL A.D.P. SCHEMES</u>						
28/159	UP-GRADATION OF MIDDLE SCHOOLS TO HIGH SCHOOLS IN SINDH (2008-09 PROGRAMME) (07 UNITS) GBMS Muhammad Saleh Pahore (R/Work)	Khanpur	5.000	0.250	3,000	24 Months
29/162	UP-GRADATION OF MIDDLE SCHOOLS TO HIGH SCHOOLS & HIGH SCHOOLS TO HIGHER SECONDARY SCHOOLS IN SINDH 2007-08 PROGRAMME (i) <u>UP-GRADATION MIDDLE SCHOOLS TO HIGH SCHOOLS</u> GGMS Hothi (Remaining Work) (ii) <u>HIGH SCHOOLS TO HIGHER SEC: SCHOOLS</u> GBHS Jhali Kalwari (Remaining Work)	Lakhi Lakhi	2.000 5.000	0.100 0.250	2,000 3,000	24 Months 24 Months
30/224	ESTABLISHMENT OF GOVERNMENT (BOYS/GIRLS) DEGREE COLLEGE IN SINDH AT GOVT: (GIRLS) COLLEGE MADEJI TALUKA <u>GARHI YASIN, DISTRICT SHIKARPUR (2007)</u> Block (B) (Remaining Work)	Garih Yasin	2.000	0.100	2,000	24 Months


EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR

Office of the Executive Engineer
Education Works Division
Shikarpur

No:/TC/G-55/ **335** / of/2015,
Shikarpur Dated: **17/12** /2015.

Sealed Tenders on standard bidding documents are invited from interested contractors /firms / parties required as per SPPRA Rules 2010, for the following works.

S.No:	Name of Work	Estimated Cost	Earnest Money	Tender Fee	Time Allowed
<u>Separate list Attached</u>					
1.	The Blank Tender forms can be obtained from the office of the undersigned on payment of tender fee shown against each work.				
2.	The blank tender forms will be issued from the date of publication of this N.I.T upto 04.01.2016 at 2:00 pm and will be received back on 05.01.2016 at 3.00 pm and opened on same day at 3:00 pm in presence of all intending contractors and tendering committee.				
3.	Earnest Money as shown against each work should be deposited in favour of undersigned from any scheduled bank & call deposit must be attached with tender in envelop as SPPRA Rules.				
4.	The undersigned or the authority competent to accept the tenders reserve the right to reject any or all tenders as per SPPRA rules 2010.				
5.	Contract documents, estimates, drawings and design and specification etc can be seen in the office of the undersigned on any working day during office hours.				
6.	The contractor will have to produce the following Documents while submitting the tender documents. 1. Registration certificate with Pakistan Engineering Council ending upto 31.12.2015 2. The bidders should produce registration with Sindh Revenue Board in light of SPPRA Rule 2010 amended rule 46 (1) (iii) of 2014. 3. Registration with Income Tax Department (NTN Certificate) copy of N.I.C at the time of submission bids. 4. N.T.N Certificate. 5. Undertaking on affidavit that firm is not involved in any litigation or abandoned any work in the Department.				
7.	No conditional tender will be accepted.				
8.	If any holiday is announced by the Government on the dates stated above, the tenders will be issued, received back and opened on next working day.				
9.	In case any of the works remains un-responded, the tenders will be issued upto 21.01.2016 at 2:00 pm and will be received back and opened on 22.01.2016 at 3:00 pm,				
Note:- This N.I.T. can be seen on SPPRA Web site at www.ppra.sindh.gov.pk					

EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR

Copy F.W.C's to The :-

Secretary to Government of Sindh Information Technology Department Ist: floor Sindh Secretariat No: 06 Karachi for information and along with Soft Copy of N.I.T. for placing the same on website.

Deputy Commissioner Officer Shikarpur.

Chief Engineer Education Works Sukkur for favour of information.

Copy to the Director (A&F) Government of Sindh, Sindh Public Procurement Regulatory Authority, Planning & Development Department Karachi.

Copy to along with (Seven copies) is forwarded to the Director, of information Public Relation Department (Adv:) Block 96 Sindh.

Superintending Engineer Education Works Circle Larkana for favour of information.

Executive Engineer Buildings/Highways Division Shikarpur, for wide publicity.

Assistant Engineer Education Works Sub-Division Shikarpur, Lakhi, Khanpur, Garhi Yasin, The Notice Board / Drawing Branch.

EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR

LIST OF LOCATION

S.No./ A.D.P.No:	Name of Scheme/Location	Taluka	Estimated Cost in Million	Earnest Money in Million	Tender Fee in Rupees	Time Allowed
<u>DISTRICT A.D.P. SCHEMES</u>						
1/2313	REHABILITATION OF BUILDING FOR EXISTING SECONDARY SCHOOL OF DISTRICT SHIKARPUR 2010-11 PROGRAMME <u>(BOUNDARY WALL)</u> GGHS Haji Fateh Muhammad Usto (R/Work)	Shikarpur	5.000	0.250	3,000	24 Months
2/2314	REHABILITATION OF GOVERNMENT BOYS SECONDARY SCHOOL OF DISTRICT SHIKARPUR 2010-2011 PROGRAMME GBHS No:-I Shikarpur (R/Work)	Shikarpur	3.500	0.175	3,000	24 Months
3/2316	REHABILITATION OF BUILDING FOR EXISTING GIRLS SECONDARY SCHOOL OF TALUKA & DISTRICT SHIKARPUR (2010-11 PROGRAMME) (1 UNIT) GGHS Shikarpur (R/Work)	Shikarpur	3.000	0.150	3,000	24 Months
4/2321	REHABILITATION OF GOVERNMENT BOYS PRIMARY SCHOOL TALUKA & DISTRICT SHIKARPUR (2011-12 PROGRAMME) GBPS Lakhi Gate (Main) (R/R)	Shikarpur	2.800	0.140	3,000	24 Months
5/2325	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS SECONDARY /HIGHER SECONDARY SCHOOLS IN TALUKA & DISTRICT SHIKARPUR (2013-14) PROG: GBHS Islamia Add: 3C/Room	Shikarpur	4.000	0.200	3,000	24 Months
6/2326	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS SECONDARY /HIGHER SECONDARY SCHOOLS IN TALUKA & DISTRICT SHIKARPUR (2013-14) PROG: GBPS Jumani Hall	Shikarpur	1.800	0.090	2,000	24 Months
7/2327	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS SECONDARY /HIGHER SECONDARY SCHOOLS IN TALUKA & DISTRICT SHIKARPUR (02 Units)(2013-14) PROG: GBHSS Sultan Kot	Shikarpur	4.500	0.225	3,000	24 Months
8/2328	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS PRIMARY/ ELEMENTARY SCHOOLS IN TALUKA & DISTRICT SHIKARPUR (05 Units)(2013-14)PROGRAMME GBPS Sultan kot GGPS Lodra GBPS Wahidabad	Shikarpur Shikarpur Shikarpur	5.000 2.700 2.400	0.250 0.135 0.120	3,000 3,000 3,000	24 Months 24 Months 24 Months
9/2329	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS PRIMARY/ ELEMENTARY SCHOOLS IN TALUKA & DISTRICT SHIKARPUR (04 Units)(2013-14)PROGRAMME GGPS Dadwai Road	Shikarpur	2.600	0.130	3,000	24 Months
10/2330	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS PRIMARY/ ELEMENTARY SCHOOLS IN TALUKA & DISTRICT SHIKARPUR (05 Units)(2013-14)PROG: GGPS Haji Fateh Muhammad Usto GBPS Lakhi Gate (Main) Toilet, Water Facilities and B/Wall	Shikarpur Shikarpur	2.000 1.500	0.100 0.075	2,000 2,000	24 Months 24 Months
11/2331	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS PRIMARY/ ELEMENTARY SCHOOLS IN TALUKA & DISTRICT SHIKARPUR (04 Units)(2013-14)PROGRAMME GBPS Qazi Muhalla GGPS Lakhi Gate	Shikarpur Shikarpur	4.000 5.000	0.200 0.250	3,000 3,000	24 Months 24 Months
12/2325	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS SECONDARY /HIGHER SECONDARY SCHOOLS IN TALUKA & DISTRICT SHIKARPUR (2013-14) PROG: GBHS Islamia Repair/Renovation	Shikarpur	5.000	0.250	3,000	24 Months

S.No./ A.D.P.No:	Name of Scheme/Location	Taluka	Estimated Cost in Million	Earnest Money in Million	Tender Fee in Rupees	Time Allowed
13/2332	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS SECONDARY/HIGHER SECONDARY SCHOOLS IN TALUKA <u>GARHI YASIN DISTRICT SHIKARPUR (03 Units)(2013-14) PROG:</u> GBHS Town Garhi Yasin	Garhi Yasin	5.000	0.250	3,000	24 Months
14/2333	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS SECONDARY/HIGHER SECONDARY SCHOOLS IN TALUKA GARHI YASIN <u>DISTRICT SHIKARPUR (03 Units)(2013-14) PROGRAMME</u> GBHS Madeji	Garhi Yasin	5.000	0.250	3,000	24 Months
15/2334	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS SECONDARY/HIGHER SECONDARY SCHOOLS IN TALUKA GARHI YASIN <u>DISTRICT SHIKARPUR (03 Units)(2013-14) PROGRAMME</u> GBHS Dakhan	Garhi Yasin	3.500	0.175	3,000	24 Months
16/2336	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS PRIMARY/ ELEMENTARY SCHOOLS IN TALUKA GARHI YASIN <u>DISTRICT SHIKARPUR (07 Units)(2013-14) PROGRAMME</u> GGPS Garhi Yasin- II GGPS Urdu Garhi Yasin-III	Garhi Yasin Garhi Yasin	1.800 3.000	0.090 0.150	2,000 3,000	24 Months 24 Months
17/2337	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS PRIMARY/ ELEMENTARY SCHOOLS IN TALUKA GARHI YASIN <u>DISTRICT SHIKARPUR (05 Units)(2013-14) PROGRAMME</u> GBPS Khan Kalhoro GGPS Madeji - II	Garhi Yasin Garhi Yasin	1.800 5.000	0.090 0.250	2,000 3,000	24 Months 24 Months
18/2338	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS PRIMARY/ ELEMENTARY SCHOOLS IN TALUKA GARHI YASIN <u>DISTRICT SHIKARPUR (05 Units)(2013-14) PROGRAMME</u> GBPS O-C Madeji GBPS Soomra Muhalla Madeji	Garhi Yasin Garhi Yasin	4.000 3.800	0.200 0.190	3,000 3,000	24 Months 24 Months
19/2339	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS SECONDARY/HIGHER SCHOOLS IN TALUKA LAKHI DISTRICT <u>SHIKARPUR (02 Units) (2013-14) PROGRAMME</u> GBHS Jahan Khan Main Building (Repair/Renovation) GBHS Habib Kot High School Portion (Repair/R)	Lakhi Lakhi	5.000 3.000	0.250 0.150	3,000 3,000	24 Months 24 Months
20/2340	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS SECONDARY/HIGHER SECONDARY SCHOOLS IN TALUKA <u>LAKHI DISTRICT SHIKARPUR (02 Units)(2013-14) PROGRAMME</u> GBHSS Rustam Main Building(Repair/Renovation) GBHS Wazirabad i Main Building (Repair & Renovation) ii Toilet Water & Compound Wall	Lakhi Lakhi Lakhi	5.000 5.000 1.500	0.250 0.250 0.075	3,000 3,000 2,000	24 Months 24 Months 24 Months
21/2341	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS SECONDARY/HIGHER SECONDARY SCHOOLS IN TALUKA <u>LAKHI DISTRICT SHIKARPUR (03 Units)(2013-14) PROGRAMME</u> GGHSS Mukhi Kirori Mal Parsvam Talreja Chak GGHSS Lakhi Add: 4C/Room	Lakhi Lakhi	2.500 5.000	0.125 0.250	3,000 3,000	24 Months 24 Months
22/2343	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS PRIMARY/ELEMENTARY SCHOOLS IN TALUKA LAKHI <u>DISTRICT SHIKARPUR (07 Units)(2013-14) PROGRAMME</u> GBPS Fateh Tando GBPS Dahar GBPS Wazirabad	Lakhi Lakhi Lakhi	2.000 2.500 2.000	0.100 0.125 0.100	2,000 3,000 2,000	24 Months 24 Months 24 Months
23/2344	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS PRIMARY/ELEMENTARY SCHOOLS IN TALUKA LAKHI <u>DISTRICT SHIKARPUR (07 Units)(2013-14) PROGRAMME</u> GGMS Hothi GGPS Ruk GBMS Dahar	Lakhi Lakhi Lakhi	2.000 2.500 4.000	0.100 0.125 0.200	2,000 3,000 3,000	24 Months 24 Months 24 Months

S.No./ A.D.P.No:	Name of Scheme/Location	Taluka	Estimated Cost in Million	Earnest Money in Million	Tender Fee in Rupees	Time Allowed
24/2345	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS SECONDARY/HIGHER SECONDARY SCHOOLS IN TALUKA KHANPUR DISTRICT SHIKARPUR (03 Units)(2013-14) <u>PROGRAMME</u> GBHS Noor Muhammad Shujrah (B.Wall & Lav:Block)	Khanpur	1.200	0.060	2,000	24 Months
25/2346	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS PRIMARY/ ELEMENTARY SCHOOLS IN TALUKA KHANPUR DISTRICT SHIKARPUR (06 Units)(2013-14) <u>PROGRAMME</u> GBPS Khanpur Sindhi	Khanpur	2.000	0.100	2,000	24 Months
26/2347	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS PRIMARY/ ELEMENTARY SCHOOLS IN TALUKA KHANPUR DISTRICT SHIKARPUR (09 Units)(2013-14) <u>PROGRAMME</u> GGPS Turit Muhro GBPS Muhammad Hassan Brohi	Khanpur Khanpur	1.800 1.200	0.090 0.060	2,000 2,000	24 Months 24 Months
27/2348	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS PRIMARY/ ELEMENTARY SCHOOLS IN TALUKA KHANPUR DISTRICT SHIKARPUR (06 Units)(2013-14) <u>PROGRAMME</u> GBPS Mehmooda Bagh GBPS Khan Muhammad Khan GBPS Tando Ali Sher GBPS Ghulam Nabi Shujrah	Khanpur Khanpur Khanpur Khanpur	4.000 1.800 2.200 2.200	0.200 0.090 0.110 0.110	3,000 2,000 2,000 2,000	24 Months 24 Months 24 Months 24 Months
<u>PROVINCIAL A.D.P. SCHEMES</u>						
28/159	UP-GRADATION OF MIDDLE SCHOOLS TO HIGH SCHOOLS IN SINDH (2008-09 PROGRAMME) (07 UNITS) GBMS Muhammad Saleh Pahore (R/Work)	Khanpur	5.000	0.250	3,000	24 Months
29/162	UP-GRADATION OF MIDDLE SCHOOLS TO HIGH SCHOOLS & HIGH SCHOOLS TO HIGHER SECONDARY SCHOOLS IN SINDH 2007-08 PROGRAMME (i) <u>UP-GRADATION MIDDLE SCHOOLS TO HIGH SCHOOLS</u> GGMS Hothi (Remaining Work) (ii) <u>HIGH SCHOOLS TO HIGHER SEC: SCHOOLS</u> GBHS Jhali Kalwari (Remaining Work)	Lakhi Lakhi	2.000 5.000	0.100 0.250	2,000 3,000	24 Months 24 Months
30/224	ESTABLISHMENT OF GOVERNMENT (BOYS/GIRLS) DEGREE COLLEGE IN SINDH AT GOVT: (GIRLS) COLLEGE MADEJI TALUKA GARHI YASIN, DISTRICT SHIKARPUR (2007) Block (B) (Remaining Work)	Garih Yasin	2.000	0.100	2,000	24 Months
31/519	CONSTRUCTION / RE-CONSTRUCTION OF EXISTING OFFICES FOR FIELD OFFICERS OF EDUCATION & LITERACY DEPARTMENT IN LARKANA DISIVISION (2014-15) <u>PROGRAMME.</u> District Education Office Shikarpur	Shikarpur	3.000	0.150	3,000	24 Months

EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR

..D.P.No:	Name of Scheme/Location	Taluka	Estimated Cost in Million	Earnest Money in Million	Tender Fee in Rupees	Time Allowed
24/2345	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS SECONDARY/HIGHER SECONDARY SCHOOLS IN TALUKA KHANPUR DISTRICT SHIKARPUR (03 Units)(2013-14) PROGRAMME GBHS Noor Muhammad Shujrah (B.Wall & Lav:Block)	Khanpur	1.200	0.060	2,000	24 Months
25/2346	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS PRIMARY/ ELEMENTARY SCHOOLS IN TALUKA KHANPUR DISTRICT SHIKARPUR (06 Units)(2013-14) PROGRAMME GBPS Khanpur Sindhi	Khanpur	2.000	0.100	2,000	24 Months
26/2347	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS PRIMARY/ ELEMENTARY SCHOOLS IN TALUKA KHANPUR DISTRICT SHIKARPUR (09 Units)(2013-14) PROGRAMME GGPS Turit Muhro GBPS Muhammad Hassan Brohi	Khanpur Khanpur	1.800 1.200	0.090 0.060	2,000 2,000	24 Months 24 Months
27/2348	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS PRIMARY/ ELEMENTARY SCHOOLS IN TALUKA KHANPUR DISTRICT SHIKARPUR (06 Units)(2013-14) PROGRAMME GBPS Mehmooda Bagh GBPS Khan Muhammad Khan GBPS Tando Ali Sher GBPS Ghulam Nabi Shujrah	Khanpur Khanpur Khanpur Khanpur	4.000 1.800 2.200 2.200	0.200 0.090 0.110 0.110	3,000 2,000 2,000 2,000	24 Months 24 Months 24 Months 24 Months
<u>PROVINCIAL A.D.P. SCHEMES</u>						
28/159	UP-GRADATION OF MIDDLE SCHOOLS TO HIGH SCHOOLS IN SINDH (2008-09 PROGRAMME) (07 UNITS) GBMS Muhammad Saleh Pahore (R/Work)	Khanpur	5.000	0.250	3,000	24 Months
29/162	UP-GRADATION OF MIDDLE SCHOOLS TO HIGH SCHOOLS & HIGH SCHOOLS TO HIGHER SECONDARY SCHOOLS IN SINDH 2007-08 PROGRAMME (i) <u>UP-GRADATION MIDDLE SCHOOLS TO HIGH SCHOOLS</u> GGMS Hothi (Remaining Work) (ii) <u>HIGH SCHOOLS TO HIGHER SEC: SCHOOLS</u> GBHS Jhali Kalwari (Remaining Work)	Lakhi Lakhi	2.000 5.000	0.100 0.250	2,000 3,000	24 Months 24 Months
30/224	ESTABLISHMENT OF GOVERNMENT (BOYS/GIRLS) DEGREE COLLEGE IN SINDH AT GOVT: (GIRLS) COLLEGE MADEJI TALUKA GARHI YASIN, DISTRICT SHIKARPUR (2007) Block (B) (Remaining Work)	Garih Yasin	2.000	0.100	2,000	24 Months


EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR

BIDDING DATA

(This section should be filled in by the Engineer/Procuring Agency before issuance of the Bidding Documents).

(a). **Name of Procuring Agency:-** Executive Engineer (Education Works)
Division Shikarpur.

DISTRICT ADP SCHEMES

(b). **Brief Description of Works:-** ADP NO: 2324 REHABILITATION OF GOVERNMENT
GIRLS HIGH SCHOOL TALUKA KHANPUR DISTRICT
SHIKARPUR (2011-12 PROG:)

GBHS Tando Ali Sher (Ext: Dev:)

(c). **Procuring Agency's address:-** Executive Engineer (Education Works) Division Shikarpur
Near GBHS No.II Shikarpur.

(d). **Estimated Cost:-** 0.800 (Millions).

(e). **Amount of Bid Security:-** 5% (Fill in lump sum amount or in % age of bid amount /estimated cost.

(f). **Period of Bid Validity (days):-** 60 Days (Not more than sixty days).

(g). **Security Deposit:-(including bid security):-** 10%
(in % age of bid amount /estimated cost equal to 10%)

(h). **Percentage, if any, to be deducted from bills:-** 7.50% Income tax

(i). **Deadline for Submission of Bids along with time :-** As Per NIT

(j). **Venue, Time, and Date of Bid Opening:-** Near GBHS II (Shikarpur As Per NIT).

(k). **Time for Completion from written order of commence: -** 12 Months


(L). **Liquidity damages:-** -NIL- (0.05 of Estimated Cost or Bid cost per day of delay, but total not exceeding 10%).

(m). **Deposit Receipt No:** _____ **Date:** _____ **Amount:Rs:** _____

Bank _____

(n) **D.R.NO:** _____ **DATED:-** _____ . **Amount 1500/-**-(Rupees: One Thousand Five Hundred only).

(o). **Tender issued to Mr. / M/s** _____ **Govt: Contractor.**


EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR

SCHEDULED (B).

NAME OF WORK:- REHABILITATION OF GOVERNMENT GIRLS HIGH SCHOOL
TALUKA KHANPUR DISTRICT SHIKARPUR (2011-12-PROG:)
AT G:B:H:S: TANDO ALI SHER TALUKA KHANPUR DISTRICT
SHIKARPUR. (A:D:P:NO: SPO-273 / 2324).
(REMAINING WORK).

SR:NO:	ITEM OF WORK.	QTY:	RATE.	UNIT.	AMOUNT.
1/.	Removing cement plaster from walls. (S:I:NO:53,P:NO:13).				
	920	@Rs:121/-	%sft:		Rs:- 1113/-
2/.	Applying floating coat of cement 1/32" thick. (S:I:NO:14,P:53).				
	920	@Rs:660/-	%sft:		Rs:- 6072/-
3/.	Cement plaster (1:6) ratio upto 20' height 1/2" thick. (S:I:NO:13,P:NO:52).				
	2140	@Rs:2206/60	%sft:		Rs:- 47221/-
4/.	Cement plaster (1:4) ratio upto 20' height 3/8" thick. (S:I:NO:11,P:NO:52). (S:I:NO:				
	2140	@Rs:2197/52	%sft:		Rs:- 47027/-
5/.	Supplying and fixing M:S round bars for burried windows.				
	1.76	@Rs:3550/-	P:Cwt:		Rs:- 6248/-
6/.	Cutting and fixing M:S round bars for barried windows. (S:I:NO: 18,P:NO:92).				
	45	@Rs:28/23	P:NO:		Rs:- 1270/-
7/.	Laying white Marble Flooring fine dressed in the surface without wining set in Lime mortar (1:2) including rubbing and polishing of the joints (a) 3/4" thick Flooring. (S:I:NO:28,P:NO:43).				
	208	@Rs:567/48	P:sft:		Rs:- 118036/-
8/.	White washing Three coats. (S:I:NO:26,P:NO:54).				
	3798	@Rs:829/95	%sft:		Rs:- 31522/-
	(B). (TWO COATS OLD SURFACE).				
	2878	@Rs:425/84	%sft:		Rs:- 12256/-
9/.	Distemping Two coats. (S:I:NO:24,P:NO:54).				
	15606	@Rs:1043/90	%sft:		Rs:- 162911/-
10/.	Colour washing Two coats. (S:I:NO:25,P:NO:54).				
	6627	@Rs:859/90	%sft:		Rs:- 56985/-

- 11/. Painting to guard bars gates of iron bars grattings, millings i/c standards brass fittings etc Three coats New Surface. (S.I.NO:04, P.NO:69).
4046 @Rs: 1270/83 %sft: Rs:- 51418/-
- 12/. Painting to doors and windows of any type i/c edges Three coats New surface. (S.I:NO:04 , P:NO:68).
536 @Rs: 2116/41 %sft: Rs:- 11344/-
- (B) (TWO COATS OLD SURFACE).
1540 @Rs: 1160/06 %sft: Rs:- 17865/-

TOTAL RS:- 571,288/-

PART (B) WATER SUPPLY & SANITARY

- 1/- Providing & fixing squating type white glazed of flushine cistern fitting & flush pipe with bend and making requisite numbers of holes in wall plinth & floor for pipe cement concrete 1:2:4 (S.I.NO:1 P NO.1)
A. W.C pan of non less 23" clear opening between flushing rims and 3 gallon flushing tank with 4" dia C.I trape.
1 4802.6 Each Rs: 4803
- 2/- Providing and fixing 4" dia C.I soil & vent pipes including Cutting and fitting and extra painting to match the colour of building (S.I.NO.1 ,P.NO.8)
12 333.29 Each Rs: 3999
- 3/- Providing & fixing 4"x4"x4" dia C.I branch of the required degree with access doors, rubber washer 1/8" thick and builts & nuts and extra painting to match the colour of the building. (S.I.NO.5.P.NO.8)
1 270.6 Each Rs: 271
- 4/- Providing G.I Pipes specials & clamps etc including fixing cutting and fitting complete with and i/c the cost of breaking through walls and roof making good etc. Painting two coats after cleaning the pipe etc. with white zink paint with pigment to match the colour of the building and testing with water to a pressure head of 200 feet and handling. (S.I.NO.1 P NO 12)
(i) 1/2" dia G.I Pipe 20 73.21 Rft: Rs: 1464
(ii) 3/4" dia G.I Pipe 35 95.79 Rft: Rs: 3353
(iii) 1" dia G.I Pipe 15 28.55 Rft: Rs: 428
- 5/- Supplying & fixing in position brass bib cock (S.I.NO.1 P.NO.16)
b. 3/4" dia brass bib cock. Standard pattern.
1 348.92 Each Rs: 349.
- 6/- Providing & fixing bal valve (with unsoldered copper ball) made to B.B S. 1212 (S.I.NO.6 .P.NO. 18)
(ii) 3/4" dia 1 290.84 Each Rs: 291
- 7/- Providing R.C.C pipe with collars class "B" and digging the trench to required depth and fixing in position including cutting fitting and joining with maxphall composition & cement mortar 1:1 and testing with water pressure to a head of 4 feet above the top of the highest pipe & refiling with exeavated staff. (S.I.NO .2 P.NO.21)
(c) 6" dia R.C.C pipe class "B" 6 199.25 Rft: Rs: 1196
- 8/- Supplying & Fixing Fiber Glass Tank of approved quality and design and wall thickness as soecified i/c cost of nuts bolts and fixing in plate form of cement concrete 1:3:6 and making connections for in-let out & over flow inlet .outlet flow pipes etc complete. (S.I.NO .3. P.NO.18)
a) 250 gallons thickness 3.5 mm 1 21989.61 Each Rs: 21990


Supplying and fixing approved quality Electric A.C. motor pumping set (Javed Engineering made) 1-1/4"x1" section and delivery with base plate and compiling one horse power single phase motor (siemens make) 60' feet head of 2800 RPM including the cost of nuts and bolts c.c. (1:2:4)

Elect: Motor 1 12500 P.No Rs: 12500

10/- Providing and Installation of Hand pump 1-1/4" G.I pipe and colr syainer with wooden shap including cost of 4" feet above ground level embded in C.C. (1:2:4) with iron handle and required same shape with acc and fixing etc complete.

(a) Filter pipe 10 120 Rft: Rs: 1200
 (b) G.I pipe 45 110 Rft: Rs: 4950
 (c) H.P Machine 1 2500 P.NO Rs: 2500

59,294/-


 DRAUGHTSMAN
 EDUCATION WORKS DIVISION
 SHIKARPUR


 EXECUTIVE ENGINEER
 EDUCATION WORKS DIVISION
 SHIKARPUR

Amount	Total (CSR)
Part "A"	% Above / Below _____
Part "B"	% Above / Below _____
Part "C"	% Above / Below _____

Total Amount	_____
Total Amount	_____
Total Amount	_____

CONTRACTOR

EXECUTIVE ENGINEER
 EDUCATION WORKS DIVISION
 SHIKARPUR

BIDDING DATA

(This section should be filled in by the Engineer/Procuring Agency before issuance of the Bidding Documents).

(a). Name of Procuring Agency:- Executive Engineer (Education Works)
Division Shikarpur.

DISTRICT ADP SCHEMES

(b). Brief Description of Works:- ADP NO: 2336 REHABILITATION OF EXISTING BUILDING FOR BOYS/GIRLS PRIMARY/ELEMENTARY SCHOOLS OF DISTRICT SHIKARPUR TALUKA G.YASIN (2013-14 PROG:

GBPS Qabalo (Ext: Dev:)

(c). Procuring Agency's address:- Executive Engineer (Education Works) Division Shikarpur
Near GBHS No.II Shikarpur.

(d). Estimated Cost:- 0.400 (Millions).

(e). Amount of Bid Security:- 5% (Fill in lump sum amount or in % age of bid amount /estimated cost.

(f). Period of Bid Validity (days):- 60 Days (Not more than sixty days).

(g). Security Deposit:- (including bid security):- 10%
(in % age of bid amount /estimated cost equal to 10%)

(h). Percentage, if any, to be deducted from bills:- 7.50% Income tax

(i). Deadline for Submission of Bids along with time :- As Per NIT

(j). Venue, Time, and Date of Bid Opening:- Near GBHS II (Shikarpur As Per NIT).

(k). Time for Completion from written order of commence: - 06 Months

(L). Liquidity damages:- -NIL- (0.05 of Estimated Cost or Bid cost per day of delay, but total not exceeding 10%).

(m). Deposit Receipt No: _____ Date: _____ Amount: Rs: _____

Bank _____

(n) D.R.NO: _____ DATED: _____ Amount 500/- (Rupees: Five Hundred only).

(o). Tender issued to Mr. / M/s _____ Govt: Contractor.


EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR

(S C H E D U L E " B ")

NAME OF WORK :- REHABILITATION OF EXISTING BOYS/GIRLS
Primary/~~XXXXXX~~ELEMENTARY SCHOOLS
IN DISTRICT SHIKARPUR TALUKA GARHIYASIN
AT G.B.P.S. QABALO (2013-14)PROGRAMME
(DISTT: AD.P.NO: 2336)

(E X T E R N A L D E V E L O P M E N T)

S.NO:	ITEM OF WORK.	QTY:	RATE.	UNIT	AMOUNT.
01.	Excavation in foundation of building bridges and other structure i/c diagbelling dressing arround the lead upto 5 ft:	32	3176/25	% Cft	102/00
02.	Cement concrete brick or stone ballast 1½" to 2"guage 1.5.10.ratio.	1685	8694/75	% Cft	146507/-
03.	Pacca brick work in foundation and plinth with 1.6. ratio.	36	11948/36	%Cft	4301/-
04.	Pacca brick work on ground floor with 1.6. ratio.	24	12674/36	% Cft	3042/-
05.	P/L polythen sheet 0.33 mm guage single layer instruction given by Engineer incharges.	1194	10/70	P:Sft	12776/-
06.	Mud plaster over on roof "1" thick etc.	2388	555/-	% Sft	13253/-
07.	P/L c.c. toping 1.2.4. ratio 2" thick dividing into pannals.	5056	3275/50	% Sft	165609/-
08.	Cement plaster 1.6. ratio 1/2" thick upto 20 height.	32	2206/60	% Sft	706/-
09.	Cement plaster 1.4. ratio 3/8" thick upto 20 height.	32	2197/52	% Sft	703/-
10.	Supplying and filling sand under floor plugging into walls.	41571	1643/77	% Cft	41571/-

M. V. S.
DRAUGHTSMAN
EDUCATION WORKS DIVISION
SHIKARPUR.

Total Rs: 3,88570/00

[Signature]
EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR.

BIDDING DATA

(This section should be filled in by the Engineer/Procuring Agency before issuance of the Bidding Documents).

(a). **Name of Procuring Agency:-** Executive Engineer (Education Works)
Division Shikarpur.

DISTRICT ADP SCHEMES

(b). **Brief Description of Works:-** ADP NO: 2341 REHABILITATION OF EXISTING BUILDING
FOR BOYS/GIRLS SECONDARY/HIGHER SECONDARY
SCHOOLS OF DISTRICT SHIKARPUR TALUKA LAKHI
(2013-14 PROGRAMME)

GBHS Chak (R/Work)

(c). **Procuring Agency's address:-** Executive Engineer (Education Works) Division Shikarpur
Near GBHS No.II Shikarpur.

(d). **Estimated Cost:-** 0.950 (Millions).

(e). **Amount of Bid Security:-** 5% (Fill in lump sum amount or in % age of bid amount /estimated cost.

(f). **Period of Bid Validity (days):-** 60 Days (Not more than sixty days).

(g). **Security Deposit:-(including bid security):-** 10%
(in % age of bid amount /estimated cost equal to 10%)

(h). **Percentage, if any, to be deducted from bills:-** 7.50% Income tax

(i). **Deadline for Submission of Bids along with time :-** As Per NIT

(j). **Venue, Time, and Date of Bid Opening:-** Near GBHS II (Shikarpur As Per NIT).

(k). **Time for Completion from written order of commence: -** 12 Months

(L). **Liquidity damages:-** -NIL- (0.05 of Estimated Cost or Bid cost per day of delay, but total not exceeding 10%).

(m). **Deposit Receipt No:** _____ **Date:** _____ **Amount:Rs:** _____

Bank _____

(n) **D.R.NO:** _____ **DATED:** _____ **Amount 2000/-**-(Rupees:Two Thousand only).

(o). **Tender issued to Mr. / M/s** _____ **Govt. Contractor.**


EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR

- 10/. S/Fixing Iron Girders at site of work.
10.929 @Rs:-3850/- P:Cwt: Rs:- 42077/-
- 11/. S/Fixing Iron Tears at site of work.
12.679 @Rs:-3575/- P:Cwt: Rs:- 45327/-
- 12/. Errection of rolled steel beams or iron rails etc.
(S:I:NO:6,P:NO:91).
23.608 @Rs:-186/34 P:Cwt: Rs:- 4399/-
- 13/. Second class Tiles roofing consisting of 4" earth 1" mud plaster with 34 lbs: of hot bitumen coating sand blinded provided over one layer of 12"x6"x2" tiles i/c curring etc complete.
(S:I:NO:02,P:NO:33).
593 @Rs:-7607/25 %Sft: Rs:- 45111/-
- 14/. P/Laying single per layer of polythin sheet 0.13 mm thick for water proofing as per specification and instructions given by Engineer Incharge.(S:I:NO:38,P:NO:38).
593 @Rs:- 10/70 P:Sft: Rs:- 6345/-
- 15/. First class deodar wood wrought joinery in doors and windows etc fixed in position i/c chawkats heldfasts handles iron towerbolts cleats nuts and cords with hooks etc deodar wood 1 1/4" thick.
(S:I:NO:07,P:NO:58).
9.0 @Rs:-1273/76 P:Sft: Rs:- 11464/-
- 16/. Applying floating coat of cement 1/32" thick .
(S:I:NO:14,P:NO:53).
1085 @Rs:-660/- %Sft: Rs:- 7161/-
- 17/. Cement plaster (1:6) ratio upto 20' height 1/2" thick.
(S:I:NO:13,P:NO:52).
1307 @Rs:-2206/60 %Sft: Rs:- 28840/-
- 18/. Cement plaster (1:4) ratio upto 20' height 3/8" thick.
(S:I:NO:11,P:NO:52).
1687 @Rs:-2197/52 %Sft: Rs:- 37072/-
- 19/. Cement concrete plain i/c placing compacting finishing and curring etc complete i/c screening and washing of stone aggregates without finishing ratio (1:2:4) .(S:I:NO:5,P:NO:16).
88 @Rs:-14429/25 %Cft: Rs:- 12698/-
- 20/. P/Laying 1" thick Topping cement concrete ratio (1:2:4) i/c surface finishing and dividing into pannels.(3" thick).
(S:I:NO:16,P:NO:42).
1882 @Rs:-4411/82 %Sft: Rs:- 83030/-

21/. Laying white marble Flooring fine dressed in the surface without wining set in lime mortar (1:2) i/c rubbing and polishing of the joints (a) 3/4" thick Flooring.(S:I:NO:28,P:NO:43).

650 @Rs:-567/48 P:Sft: Rs:- 368862/-

22/. P/Fixing 3/8" thick marble tiles of approved quality & colour shade size 8"x4" / 6"x4" in Dado skirting and facing removal tucking of existing plaster surface etc over 1/2" thick base of cement mortar (1:3) setting of tiles in slurry of white cement over mortar base i/c filling the joints etc.(S:I:NO:68,P:NO:49).

114 @Rs:-186/04 P:Sft: Rs:- 21209/-

23/. Laying floor of approved with glazed tiles 1/4" thick in white cement (1:2) over 3/4" thick cement mortar (1:2) etc complete. (S:I:NO:24,P:NO:43).

20.0 @Rs:-27678/86 %Sft: Rs:- 5536/-

24/. White washing Two coats.(S:I:NO:26,P:NO:54).

2982 @Rs:-425/84 %Sft: Rs:- 12699/-

25/. Distemping Two coats.(S:I:NO:24,P:NO:54).

10739 @Rs:-1043/90 %Sft: Rs:- 112104/-

26/. Colour washing Two coats. (S:I:NO:25,P:NO:54).

2082 @Rs:-859/90 %Sft: Rs:- 17903/-

27/. Painting to Guard bargates of iron bars grattings, railings i/c standards braccess Three coats New surface.(S:I:NO:44,P:NO:69).

556 @Rs:-1270/83 %Sft: Rs:- 7066/-

(B). OLD SURFACE TWO COATS).

2840 @Rs:-674/60 %Sft: Rs:- 19159/-

28/. Painting to Doors and windows of any type i/c edges Three coats New surface.(S:I:NO:04,P:NO:68).

18 @Rs:-2116/41 %Sft: Rs:- 381/-

(B). OLD SURFACE TWO COATS).

1094 @Rs:-1160/06 %Sft: Rs:- 12691/-

MWS
DRAUGHTSMAN
EDUCATION WORKS DIVISION
SHIKARPUR.

[Signature]
EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR.

Total Rs:- 952,231/-

BIDDING DATA

(This section should be filled in by the Engineer/Procuring Agency before issuance of the Bidding Documents).

(a). **Name of Procuring Agency:-** Executive Engineer (Education Works)
Division Shikarpur.

DISTRICT ADP SCHEMES

(b). **Brief Description of Works:-** ADP NO: 2343 REHABILITATION OF EXISTING BUILDING FOR BOYS/GIRLS PRIMARY/ELEMENTARY SCHOOLS OF DISTRICT SHIKARPUR TALUKA LAKHI (2013-14 PROG:

GBPS Wazirabad (Ext: Dev:)

(c). **Procuring Agency's address:-** Executive Engineer (Education Works) Division Shikarpur
Near GBHS No.II Shikarpur.

(d). **Estimated Cost:-** 0.600 (Millions).

(e). **Amount of Bid Security:-** 5% (Fill in lump sum amount or in % age of bid amount /estimated cost.

(f). **Period of Bid Validity (days):-** 60 Days (Not more than sixty days).

(g). **Security Deposit:-(including bid security):-** 10%
(in % age of bid amount /estimated cost equal to 10%)

(h). **Percentage, if any, to be deducted from bills:-** 7.50% Income tax

(i). **Deadline for Submission of Bids along with time :-** As Per NIT

(j). **Venue, Time, and Date of Bid Opening:-** Near GBHS II (Shikarpur As Per NIT).

(k). **Time for Completion from written order of commence: -** 06 Months

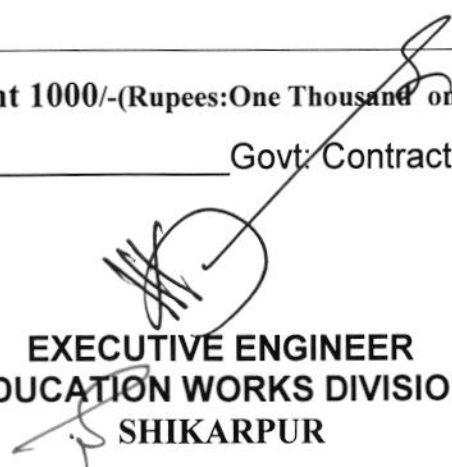
(L). **Liquidity damages:-** -NIL- (0.05 of Estimated Cost or Bid cost per day of delay, but total not exceeding 10%).

(m). **Deposit Receipt No:** _____ **Date:** _____ **Amount:Rs:** _____

Bank _____

(n) **D.R.NO:** _____ **DATED:** _____ **Amount 1000/-**(Rupees:One Thousand only).

(o). **Tender issued to Mr. / M/s** _____ **Govt: Contractor.**


EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR

(SCHEDULE(B))

NAME OF WORK:- REHABILITATION OF EXISTING BUILDING FOR BOYS/GIRLS
PRIMARY/ELEMENTARY SCHOOLS IN TALUKA LAKHI DISTRICT
DISTRICT SHIKARPUR(2013-14-PROG:) AT G:G:P:S:
WAZIR ABAD (EXT:DEVELOPMENT).(ADP:NO:2343).

SR:NO:	ITEM OF WORK.	QTY:	RATE.	UNIT.	AMOUNT.
1/.	Dismantling Second class tiles roofing.(S:I:NO:22,P:NO:10).	107	@Rs:-378/13	%Sft:	Rs:- 405/-
2/.	Dismantling rolled steel beams or old rails etc. (S:I:NO:41,P:NO:13).	2.313	@Rs:-126/04	P:Cwt:	Rs:- 292/-
3/.	Dismantling brick work in Lime or cement mortar. (S:I:NO:13,P:NO:10).	37	@Rs:-1285/63	%Cft:	Rs:- 476/-
4/.	Dismantling cement concrete reinforced separating reinforced from concrete cleaning and straightening the same.(S:I:NO:20,P:10).	4.0	@Rs:-5445/-	%Cft:	Rs:- 218/-
5/.	Dismantling cement concrete plain (1:2:4).(S:I:NO:19,P:10).	144	@Rs:-3327/50	%Cft:	Rs:- 4792/-
6/.	Pacca brick work in foundation and plinth with (1:6) ratio in cement sand mortar.(S:I:NO:4,P:NO:21).	19	@Rs:-11948/36	%Cft:	Rs:- 2270/-
7/.	Pacca brick work on Ground floor with (1:6) ratio in cement sand mortar.(S:I:NO:5,P:NO:21).	110	@Rs:-12674/36	%Cft:	Rs:- 13942/-
8/.	Pacca brick work on otherthan building with (1:6) ratio in cement sand mortar.(S:I:NO:7,P:NO:22).	65	@Rs:-12346/65	%Cft:	Rs:- 8025/-
9/.	R:c:c work in roofslab beams coloumns rafts lintels and other structural members laid in situ or precast laid in position complete in all respects C:C(1:2:4) ratio.(S:I:NO:6,P:NO:17).	18	@Rs:-337/-	P:Cft:	Rs:- 6066/-
10/.	Fabrication of mild steel reinforcement for cement concrete i/c cutting bending and laying in position i/c cost of steel binding wire also includes removal of rust from bars.(S:I:NO:8,P:NO:17).	0.803	@Rs:-5001/70	P:Cwt:	Rs:- 4016/-

- 11/. Supplying and filling sand under floor and plugging in well
(S:I:NO:29,P:NO:26).
- 121 @Rs:-1643/77 %Cft: Rs:- 1989/-
- 12/. Filling watering ramming earth under floor with Newe earth
(Excavated form outside) lead upto one chain and lift upto 5 feet.
(S:I:NO: 22,P:NO:04).
- 2700 @Rs:-8655/20 %Cft: Rs:- 23369/-
- 13/. Removing cement plaster from walls.(S:I:NO:53,P:NO:13).
- 377 @Rs:-121/- %Sft: Rs:- 456/-
- 14/. Applying floating coat of cement 1/32" thick.
(S:I:NO:14,P:NO:53).
- 456 @Rs:-660/- %Sft: Rs:- 3010/-
- 15/. Cement plaster (1:6) ratio upto 20' height 1/2" thick.
(S:I:NO:13,P:NO:52).
- 804 @Rs:-2206/60 %Sft: Rs:- 17741/-
- 16/. Cement plaster (1:4) ratio upto 20' height 3/8" thick.
(S:I:NO:11,P:NO:52).
- 804 @Rs:-2197/52 %Sft: Rs:- 17668/-
- 17/. Cement pointing struck joints on walls ratio (1:2).
(S:I:NO:19,P:NO:53).
- 150 @Rs:-1287/44 %Sft: Rs:- 1931/-
- 18/. Cement concrete brick or stone ballast 1 1/2" to 2" guage
with ratio (1:4:8). (S:I:NO: 4,P:NO:15).
- 123 @Rs:-9416/28 %Cft: Rs:- 11582/-
- 19/. Cement concrete plain i/c placing compacting finishing &
curring etc complete i/c screening and washing of stone aggregates
without ginishing. ratio (1:2:4).(S:I:NO:5,P:NO:16).
- 40 @Rs:-14429/25 %Cft: Rs:- 5772/-
- 20/. Laying floor of approved with glazed tiles 1/4" thick in
white cement (1:2) over 3/4" thick cement morder (1:2) etc complete.
(S:I:NO:24,P:NO:43).
- 94 @Rs:-27678/86 %Sft: Rs:- 26018/-
- 21/. White glazed tiles 1/4" thick Dado jointed in cement and l
laid over (1:2) cement sand morder 3/4" thick i/c finishing.
(S:I:NO:37,P:NO:45).
- 214 @Rs:-28253/61 %Sft: Rs:- 60463/-

- 22/. P/Laying 1" thick Topping cement concrete ratio (1:2:4) i/c surface finishing and dividing into pannels.(S:I:NO:16,P:42). (3" thick).
- 732 @Rs:-4411/82 %Sft: Rs:- 32295/-
- 23/. Supplying and fixing Iron Girders at site of work.
- 2.159 @Rs:-3850/- P:Cwt: Rs:- 8312/-
- 24/. Supplying and fixing Iron Tears at site of work.
- 2.343 @Rs:-3575/- P:Cwt: Rs:- 8376/-
- 25/. Erection of rolled steel beams or iron rails etc.
- 4.502 @Rs:-186/34 P:Cwt: Rs:- 839/-
- 26/. Second class tiles roofing consisting of 4" earth 1" mud plaster with 34 lbs: of hot bitumen coating sand blinded provided over one layer of 12"x6"x2" tiles i/c curring etc complete. (S:I:NO:02,P:NO:33).
- 107 @Rs:-7607/25 %Sft: Rs:- 8140/-
- 27/. Laying white marble Flooring fine dressed in the surface without wining set in Lime merter (1:2) i/c rubbing and polishing of the joints(A) 3/4" thick flooring.)(S:I:NO:28,P:NO:43).
- 323 @Rs:-567/48 P:Sft: Rs:- 183297/-
- 28/. Providing and fixing 3/8" thick marble tiles of approved quality & colour shade size 8"x4" / 6"x4" in Dado skirting and facing removal of tucking of existing plaster surface etc over 1/2" thick base of cement merter (1:3) seting of tiles in slurry of white cement over merter base i/c filling the joints and polishing etc complete. (S:I:NO:68,P:NO:49).
- 30.0 @Rs:-186/04 P:Sft: Rs:- 5581/-
- 29/. Cement plaster (1:2) upto 12' height 3/4" thick. (S:I:NO:9(c),P:NO:52).
- 120 @Rs:-3056/62 %Sft: Rs:- 3668/-
- 30/. Cement plaster (1:4) upto 12' height 3/4" thick. (S:I:NO:11(c),P:NO:52).
- 120 @Rs:-3015/76 %Sft: Rs:- 3619/-
- 31/. First class deodar wood wrought joinery in doors and windows etc fixed in position i/c chowkats holdfastshandles iron towerbolts cleats nuts and cords with hooks etc deodar wood 1 1/4" thick. (S:I:NO:7,P:NO:58).
- 41.0 @Rs:-1273/76 P:Sft: Rs:- 52224/-

32/.	White washing Three coats.(S:I:NO:26,P:NO:54).	80	829/95	%Sft:	Rs:- 664/-
33/.	Colour washing Three coats.(S:I:NO:25,P:NO:54).	719	859/90	%Sft:	Rs:- 6183/-
34/.	Painting to Doors and windows of any type i/c edges Three coats New surface.(S:I:NO:4(c),P:NO:68).	82	2116/41	%Sft:	Rs:- 1735/-
35/.	Painting to Guard bars gates of iron bars grattings, railings i/c Standards braccess Three coats New surface. (S:I:NO:4(d),P:NO:69).	114	1270/83	%Sft:	Rs:- 1449/-

[Signature]
DRAUGHTSMAN
EDUCATION WORKS DIVISION
SHIKARPUR.

Total Rs:- 526,883/-

[Signature]
EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR.

SCHEDULE OF (WATER SUPPLY & SANITARY)

S.NO	DESCRIPTION	RATE	UNIT	AMOUNT
1/-	Providing & fixing squatting type white glazed of flushline cistern fitting & flush pipe with bend and making requisite numbers of holes in wall plinth & floor for pipe connetions & cement concrete 1:2:4 (S.I.NO.1 P.NO.1). B.(i) W.C of not less than 19" clear opening between flushing rims and 3 gallons flushing tank with 4" C.I trape & C.I Thumble.	02	Rs:4802/60 Each	RS: 9605/-
2/-	Providing and fixing 4" dia C.I soil & vent pipes including Cutting and fitting and extra painting to match the colour of building.(S.I.NO.1 ,P.NO,8)	3.0	Rs:333/29 Each	RS: 1000/-
3/-	Providing & fixing 4"x4"x4" dia C.I branch of the required degree with access doors, rubber washer 1/8" thick and built & nuts and extra painting to match the colour of the building.(S.I.NO.5.P:NO.8)	02	Rs:270/60 Each	RS: 541/-
4/-	Providing G.I Pipes specials & clamps etc including fixing cutting and fitting complete with and i/c the cost of breaking through walls and roof .making good etc . Painting two coats after cleaning the pipe etc. with white zink paint with pigment to match the colour of the building and testing with water to a pressure head of 200 feet and handling. (S.I.NO.1 .P.NO.11)			
	(iii) 1" dia G.I Pipe	15.0	Rs:120/55 Rft:	RS: 1928/-
	(i) 1/2" dia G.I Pipe	30.0	Rs: 73/21 Rft:	RS: 2196/-
	(ii) 3/4" dia G.I Pipe	30.0	Rs: 95/79 Rft:	RS: 2874/-
5/-	Supplying and fixing in position brass bib cock 3/4" dia (S.I.NO.15 P.NO.15)	02	Rs: 348/92 Each	RS: 698/-
6/-	Providing & fixing bal valve (with unsoldered copper ball) made to B.B S. 1212 (S.I.NO.8 .P.NO. 14)			
	(ii) 3/4" dia	02	Rs:290/84 Each	RS: 582/-
7/-	Providing R.C.C.pipe with collars class "B" and digging the trenche to required depth and fixing in position including cutting fitting and joining with maxphalt composition & cement mortar 1:1 and testing with water pressure to a head of 4 feet above the top of the highest pipe & refilling with exeavated staff. (S.I.NO .2 P.NO.21)			
	(c) 6" dia R.C.C pipe class "B"	18.0	Rs: 199/25 Rft:	RS: 3587/-
8/-	Supplying & Fixing Fiber Glass Tank of approved quality and design and wall thickness as soecified i/c cost of nuts bolts and fixing in plate form of cement concrete 1:3:6 and making connections for in-let out & over flow inlet .outlet flow pipes etc complete.(S.I.NO .3. P.NO.18) (250 GLB;)	01	Rs:21989/61 P.Gallon	RS: 21990/-
9/-	Supplying & Fixing approved quality Eelectric motor pumping set (Javed Engineering made)1-1/4"x1" section and delievery with base plate and compiling one horsepower single phase motor (siemens make) 60'feet head pf 2800 RPM including the cost of nuts and bolts c.c (1:2:4)	01	Rs:12500/00 Each	RS: 12500/-
10/-	Providing and Installation of Hand pump 1-1/4" G.I pipe and colr syainer with wooden shap including cost of 4" feet above ground level embded in C.C (1:2:4) with iron handle and required same shape with acc and fixing etc complete.			
	(a) Filter pipe	10.0	Rs:120/00 Rft:	RS: 1200/-
	(b) G.I pipe	45.0	Rs:110/00 Rft:	RS: 4950/-
	(c) H.P Machine	01	Rs:2500/00 P.NO	RS: 2500/-

	DESCRIPTION	RATE	UNIT	AMOUNT
	Providin and fixing 22"x16" lavatory basin in white glazed earthen ware complete with & i/c the cost of W.I or C.I cantilever brackets 6 inch built into wall. Painted while in two coat after a primary coat of red lead paint a pair of 1/2" dia chrome plated pillar traps 1-1/2" dia rubber plug chrome brass waste of approved pattern. 1-1/4" dia malleable iron cp union making and traps, malleable iron or brass requisite number of holes in wall plinth & floor for pipe connection and making good in cement concrete 1:2:4 (standard pattern) (S.I.NO.13.P.NO.3)	02	Rs: 4694/80 Each	RS: 9390/-
12/-	Add extra for labour for oroviding & fixing of earthen ware pedestals white or coloured glazed (standard pattern) (S.I.NO.9.P.NO.3)	02	Rs: 938/47 Each	RS: 1877/-
13/-	(a) Supplying & Fixing swan type pillar cock of Superior quality single c.p head 1/2" dia(S.I.NO.18.P.NO.16)	02	Rs: 795/30 Each	RS: 1591/-
14/-	Supplying & Fixing Bath room accessories (7 pieces) i/c towel rod ,brush,holder ,soap tray. Shelf of approved quality and design etc complete (S.I.NO.24 .P.NO.16)	-	Rs: 8122/40 Each	RS: -
15/-	Construction manhole or inspection chamber for the required dia of circular sewer and 3"x6" (1067mm) dept with walls of B.B in cement mortar 1:3 cement plastered 1:3,1/2" thick inside of walls and 1" (25mm) thick over benching and channel i/c fixing C.I manhole cover with frame of clear opening 1-1/2"x1-1/2" (457x457mm) of 1.75Cwt. (88.9 kg.) embedded in plain C.C 1:2:4 and fixing 1" (25mm) dia M.S steps 6" (150mm) wide projecting 4" (102mm) from the face of wall at 12" (305mm) C/C duly painted etc complete as per specificati and drawing No. D.P/I of Public Health Circle Southern Zone.(S.I.NO.1 P. NO.39)	-	Rs: 14748/- Each	RS: -
16/-	Providing & fixing 4" dia C.I Terminal guard including extra painting to match the colour of the building (S.I.NO.10.P.NO.9)	01	Rs: 399/70 Each	RS: 390/-
17/-	Providing and fixing in position nyloon connections complete with 1/2" dia brass stop cock with pair of brass nuts and lining joints to nyloon connection. (S.I.NO.23 .P.NO.6)	02	Rs: 447/15 Each	RS: 894/-
18/-	Providing asbestos pipe with collar (Dadex or equivalent) i/c digging the trenche to required death and fixing to position and joining with rubber rings including testing to water pressure head of 200 feet. (S.I.NO.3. P.NO.21)	18.0	Rs: 188/44 Rft:	RS: 3392/-
19/-	Providing & fixing 15"x 12" beveled edge mirror of belgium glass complete with 1/8" thick hard board and C.P screws fixed to wooden pleat.(S.I.NO 3 .P.NO .7)	01	Rs: 1161/60 Each	RS: 1161/-
	a) Standard pattern			

Total Rs:- 84,846/-

DRAUGHTSMAN
EDUCATION WORKS DIVISION
SHIKARPUR.

EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR.

BIDDING DATA

(This section should be filled in by the Engineer/Procuring Agency before issuance of the Bidding Documents).

(a). **Name of Procuring Agency:-** Executive Engineer (Education Works)
Division Shikarpur.

DISTRICT ADP SCHEMES

(b). **Brief Description of Works:-** ADP NO: 2344 REHABILITATION OF EXISTING BUILDING FOR BOYS/GIRLS PRIMARY/ELEMENTARY SCHOOLS OF DISTRICT SHIKARPUR TALUKA LAKHI (2013-14 PROG:

GBPS Budh Goth (Ext: Dev:)

(c). **Procuring Agency's address:-** Executive Engineer (Education Works) Division Shikarpur
Near GBHS No.II Shikarpur.

(d). **Estimated Cost:-** 0.700 (Millions).

(e). **Amount of Bid Security:-** 5% (Fill in lump sum amount or in % age of bid amount /estimated cost.

(f). **Period of Bid Validity (days):-** 60 Days (Not more than sixty days).

(g). **Security Deposit:-(including bid security):-** 10%
(in % age of bid amount /estimated cost equal to 10%)

(h). **Percentage, if any, to be deducted from bills:-** 7.50% Income tax

(i). **Deadline for Submission of Bids along with time :-** As Per NIT

(j). **Venue, Time, and Date of Bid Opening:-** Near GBHS II (Shikarpur As Per NIT).

(k). **Time for Completion from written order of commence: -** 12 Months

(L). **Liquidity damages:-** -NIL- (0.05 of Estimated Cost or Bid cost per day of delay, but total not exceeding 10%).

(m). **Deposit Receipt No:** _____ **Date:** _____ **Amount:Rs:** _____

Bank _____

(n) **D.R.NO:** _____ **DATED:** _____ **Amount 1500/-** (Rupees:One Thousand Five Hundred only).

(o). **Tender issued to Mr. / M/s** _____ **Govt: Contractor.**

EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR

SCHEDULE (B).

NAME OF WORK:- REHABILITATION OF EXISTING BUILDING FOR BOYS/GIRLS
PRIMARY/ELEMENTARY SCHOOLS IN TALUKA LAKHI DISTRICT
SHIKARPUR(2013-14-PROGRAMME) AT G:B:P:S: BUDH GOTH
(EXTERNAL DEVELOPMENT).

SR:NO:	ITEM OF WORK.	QTY:	RATE.	UNIT.	AMOUNT.
1/.	Dismantling brick work in Lime or cement mortar. (S:I:NO:13,P:NO:10).				
	270	@Rs:-1285/63	%Cft:	Rs:-	3471/-
2/.	Pacca brick work in foundation and plinth with ratio (1:6) in cement sand mortar.(S:I:NO:4(E),P:NO:21).				
	288	@Rs:-11948/36	%Cft:	Rs:-	34411/-
3/.	R:c:c work in roofslab beams columns rafts lintels and other structural members laid in situ or precast laid in position complete in all respects R:C (1:2:4) ratio.(S:I:NO:6(A),P:NO:17).				
	183.0	@Rs:-337/-	P:Cft:	Rs:-	61671/-
4/.	Fabrication of mild steel reinforcement for cement concrete i/c cutting bending and laying in position i/c cost of steel binding wire also includes removal of rust from bars.(S:I:NO:8,P:NO:17).				
	8.169	@Rs:-5001/70	P:Cwt:	Rs:-	40859/-
5/.	Pacca brick work on othetthan building with (1:6) ratio in cement sand mortar.(S:I:NO:7(E),P:NO:22).				
	810	@Rs:-12346/65	%Cft:	Rs:-	100008/-
6/.	Pacca brick work on Ground floor with (1:6) ratio in cement sand mortar.(S:I:NO:5(E),P:NO:21).				
	27	@Rs:-12674/36	%Cft:	Rs:-	3422/-
7/.	Making and fixing steel grated door with 1/16" thick sheeting i/c angle iron frame 2"x2"x3/8" and 3/4" sq: bars @ 4" centre to centre with Locking arrangements.(S:I:NO:24,P:NO:92).				
	66.0	@Rs:-726/72	P:Sft:	Rs:-	47964/-
8/.	Cement plaster (1:6) ratio upto 20' height 1/2" thick. (S:I:NO:13,P:NO:52).				
	1451	@Rs:-2206/60	%Sft:	Rs:-	32018/-

9/. Cement plaster (1:4) ratio upto 20' height $3\frac{1}{8}$ " thick.
(S:I:NO:11,P:NO:52).

1451 @Rs:-2197/52 %Sft: Rs:- 31886/-

10/. P/Laying single per layer of polythin sheet 0.13 mm thick for water proofing as per specification and instructions given by Engineer Incharge.(S:I:NO:38,P:NO:38).

1324 @Rs:-10/70 P:Sft: Rs:- 14167/-

11/. Mud plaster on floor or roof 1" thick.(S:I:NO:2,P:NO:51).

2648 @Rs:-555/- %Sft: Rs:- 14696/-

12/. $1\frac{1}{8}$ " thick gobree keeping on roofs or floors.
(S:I:NO:12,P:NO:35).

1324 @Rs:-91/74 %Sft: Rs:- 1215/-

13/. S/Fixing iron/steel grill $3\frac{3}{8}$ " sq: bars Diagonally fixed both way at 3" centre to centre on $3\frac{3}{4}$ "x $3\frac{3}{4}$ "x $1\frac{1}{8}$ " angle iron frame i/c welded etc complete as per instructions given by Engineer Incharge.(R.....A).

487 @Rs:-329/64 P:Sft: Rs:- 160535/-

14/. Cement pointing struck joints on walls ratio (1:2).
(S:I:NO:19,P:NO:53).

1057 @Rs:-1287/44 %Sft: Rs:- 13608/-

15/. White washing Three coats.(S:I:NO:26,P:NO:54).

64 @Rs:-829/95 %Sft: Rs:- 531/-

16/. Preparing surface painting with weather coat i/c rubbing the surface with rubbing brick/sand paper, filling the voids with chalk/plaster of paris and then painting etc.(S:I:NO:38,P:NO:56).

2860 @Rs:- 1948/10 %Sft: Rs:- 55716/-

17/. Painting to Doors and windows of any type i/c edges Three coats New surface.(S:I:NO:4,P:NO:68).

82 @Rs:-2116/41 %Sft: Rs:- 1735/-

18/. Painting to Guard bars gates of iron bars grattings, railings i/c Standards braccess Three coats New surface.
(S:I:NO:4,P:NO:69).

702 @Rs:-1270/83 %Sft: Rs:- 8921/-

19/. Fixing water spouts or pannels.(S:I:NO:37,P:NO:38).

04 @Rs:- 211/75 P:NO: Rs:- 347/-

20/. P/Laying HALA tiles glazed 6"x6"x1/4" on floor or wall facing in required pattern and STILE specification jointed in white cement and pigment over a base of (1:2) grey cement mortar 3/4" thick i/c cutting tiles to proper profile.(S:I:NO:62,P:NO:48).

21/. 112 @Rs:-34520/31 %Sft: Rs:- 38663/-
Laying white marble Flooring fine dressed in the surface without wining set in lime mortar (1:2) 3/4" thick flooring.

36.0 @Rs:-567/48 P:Sft: Rs:- 20429/-

TOTAL RS:- 686,773/-

WWS
DRAUGHTSMAN
EDUCATION WORKS DIVISION
SHIKARPUR.

[Signature]
EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR.

BIDDING DATA

(This section should be filled in by the Engineer/Procuring Agency before issuance of the Bidding Documents).

(a). **Name of Procuring Agency:-** Executive Engineer (Education Works)
Division Shikarpur.

DISTRICT ADP SCHEMES

(b). **Brief Description of Works:-** ADP NO: 2346 REHABILITATION OF EXISTING BUILDING
FOR BOYS/GIRLS PRIMARY/ELEMENTARY SCHOOLS
OF DISTRICT SHIKARPUR TALUKA KHANPUR (2013-14
PROGRAMME:

GGPS Khanpur-II (Ext: Dev:)

(c). **Procuring Agency's address:-** Executive Engineer (Education Works) Division Shikarpur
Near GBHS No.II Shikarpur.

(d). **Estimated Cost:-** 0.800 (Millions).

(e). **Amount of Bid Security:-** 5% (Fill in lump sum amount or in % age of bid amount /estimated cost.

(f). **Period of Bid Validity (days):-** 60 Days (Not more than sixty days).

(g). **Security Deposit:-(including bid security):-** 10%
(in % age of bid amount /estimated cost equal to 10%)

(h). **Percentage, if any, to be deducted from bills:-** 7.50% Income tax

(i). **Deadline for Submission of Bids along with time :-** As Per NIT

(j). **Venue, Time, and Date of Bid Opening:-** Near GBHS II (Shikarpur As Per NIT).

(k). **Time for Completion from written order of commence: -** 12 Months

(L). **Liquidity damages:-** -NIL- (0.05 of Estimated Cost or Bid cost per day of delay, but total not exceeding 10%).

(m). **Deposit Receipt No:** _____ **Date:** _____ **Amount:Rs:** _____

Bank _____

(n) **D.R.NO:** _____ **DATED:** _____ **Amount 1500/-**(Rupees:One Thousand Five Hundred only).

(o). **Tender issued to Mr. / M/s** _____ **Govt: Contractor.**

EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR

SCHEDULE (B).

NAME OF WORK:-- REHABILITATION OF EXISTING BUILDING FOR BOYS/
GIRLS, PRIMARY/ELEMENTARY SCHOOL BUILDINGS IN
TALUKA KHANPUR DISTRICT SHIKARPUR (2013-14-PROG:)
AT G:G:P:S: KHANPUR-II TALUKA KHANPUR.
(A:D:P:NO: 156 / 2346). (EXT:DEVELOPMENT).

SR:NO: ITEM OF WORK. QTY: RATE. UNIT. AMOUNT.

1/. Excavation in foundation of building bridges and other
structure i/c degbelling dressing refilling around the structure
with excavated earth watering and ramming lead upto one chain and
lift upto 5 feet in ordinary soil. (S:I:NO:18,P:NO:04).

90 @Rs:-3176/25 %Cft: Rs:- 286/-

2/. Cement concrete brick or stone ballast 1½" to 2" gauge
with ratio (1:5:10). (S:I:NO:04,P:NO:15).

278 @Rs:-8694/95 %Cft: Rs:- 24172/-

3/. Pacca brick work in foundation and plinth with ratio
(1:6). (S:I:NO:4(E),P:NO:21).

68 @Rs:-11948/36 %Cft: Rs:- 8125/-

4/. P/L 1" thick Topping cement concrete ratio (1:2:4) i/c
surface finishing and dividing into pannels. (3" thick).
(S:I:NO:16,P:NO:42).

1080 @Rs:-4411/82 %Sft: Rs:- 47648/-

5/. First class deodar wood wrought joinery and in doors
and windows etc fixed in position i/c chawkats holdfasts handles
iron tower bolts cleats nuts and cords with hooks etc deodar wood
1½" thick. (S:I:NO:07,P:NO:58).

148 @Rs:-1273/76 P:Sft: Rs:- 188516/-

6/. S/Fixing iron/steel grill of ¾"x1/4" of approved quality
and design i/c 3 coats painting (weight not to be less than 3.7
lbs./sq: feet) as finished grill. (S:I:NO:26,P:NO:93).

63 @Rs:-180/50 P:Sft: Rs:- 11372/-

7/. P/Fixing deodar wooden Almirah 9"-12" depth i/c boxing and
back shelves i/c shutters and brass fittings etc complete.
(S:I:NO:23,P:NO:61) without boxing and back shelves.

16 @Rs:-1748/- P:Sft: Rs:- 27968/-

8/. Laying white marble Flooring fine dressed in the surface without wining set in Lime mortar (1:2) i/c rubbing and polishing of the joints (A) 3/4" thick flooring.(S:I:NO:28,P:NO:43).

287 @Rs:- 567/48 P:Sft: Rs:- 162867/-

9/. P/Fixing 3/8" thick Marble tiles of approved colour and shade size 8"x4" / 6"x4" in Dado/skirting and facing removal/tucking to existing plaster syrface etc over 1/2" thick base of cement mortar (1:3) etc complete.(S:I:NO:68,P:NO:49).

48 @Rs:- 186/04 P:Sft: Rs:- 8930/-

10/. P/L HALA tiles glazed 6"x6"x1/4" on floor or wall facing in required pattern and STILE specification jointed in white cement and laid over (1:2) cement sand mortar 3/4" thick i/c cutting tiles to proper profile.(S:I:NO:62,P:NO:48).

40.0 @Rs:- 34520/31 %Sft: Rs:- 13808/-

11/. Providing and fixing cement paving blocks flooring having Of 197x97x60(mm) of city/quadra/cobble shape with natural colours, having strength b/w 5000 psi to 8500 psi i/c filling the joints with hillsand and laying in specified manner / pattern and design etc complete. (S:I:NO:71,P:NO:49).

1200 @Rs:- 199/77 P:Sft: Rs:- 239724/-

12/. White washing Three coats. (S:I:NO:26,P:NO:54).

1043 @Rs:- 829/95 %Sft: Rs:- 8656/-

13/. Distempering Two coats. (S:I:NO:24,P:NO:54).

2731 @Rs:- 1043/90 %Sft: Rs:- 28509/-

14/. ColourF washing Two coats.(S:I:NO:25,P:NO:54).

765 @Rs:- 443/27 %Sft: Rs:- 3391/-

15/. Painting to Doors and windows of any type i/c edges three coats new surface. (S:I:NO: 04,P:NO:68).

296 @Rs:- 1160/26 %Sft: Rs:- 3434/-

~~TOTAL~~ Rs:- 777,406/-

W. K. S.
DRAUGHTSMAN
EDUCATION WORKS DIVISION
SHIKARPUR.

EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR.

BIDDING DATA

(This section should be filled in by the Engineer/Procuring Agency before issuance of the Bidding Documents).

(a). Name of Procuring Agency:- Executive Engineer (Education Works)
Division Shikarpur.

PROVINCIAL ADP SCHEMES

(b). Brief Description of Works:- ADP NO: 127 UP-GRADATION OF PRIMARY SCHOOL TO
MIDDLE SCHOOLS (2007-08 PROGRAMME)

GBPS Lodra (R/Work)

(c). Procuring Agency's address:- Executive Engineer (Education Works) Division Shikarpur
Near GBHS No.II Shikarpur.

(d). Estimated Cost:- 0.300 (Millions).

(e). Amount of Bid Security:- 5% (Fill in lump sum amount or in % age of bid amount /estimated cost.

(f). Period of Bid Validity (days):- 60 Days (Not more than sixty days).

(g). Security Deposit:- (including bid security):- 10%
(in % age of bid amount /estimated cost equal to 10%)

(h). Percentage, if any, to be deducted from bills:- 7.50% Income tax

(i). Deadline for Submission of Bids along with time :- As Per NIT

(j). Venue, Time, and Date of Bid Opening:- Near GBHS II (Shikarpur As Per NIT).

(k). Time for Completion from written order of commence: - 03 Months


(L). Liquidity damages:- -NIL- (0.05 of Estimated Cost or Bid cost per day of delay, but total not exceeding 10%).

(m). Deposit Receipt No: _____ Date: _____ Amount: Rs: _____

Bank _____

(n) D.R.NO: _____ DATED: _____ Amount 500/- (Rupees: Five Hundred only).

(o). Tender issued to Mr. / M/s _____ Govt. Contractor.


EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR

SCHEDULE "B".

NAME OF WORK: = UP-GRADATION OF PRIMARY SCHOOL TO MIDDLE SCHOOL
2007-08 PROGRAMME AT G:B:P:S: LODRA TALUKA AND
DISTRICT SHIKARPUR: (EXT: DEVELOPMENT:):

SR: NO:	ITEM OF WORK:	QTY:	RATE:	UNIT:	AMOUNT:
1/.	Excavation in foundation of building bridges and other str; including dagbelling dressing refilling around structure with excavated earth whering and ramming lead upto 5'feet;	49.0	@RS: =2176/25	%cft;	Rs: 155/=
2/.	Pecca brick work in plinth in ratio (1;0;) in cement sand moter;	121.0	11948/36	%cft;	Rs: 14458/=
3/.	Providing and laying cement concrete topping ratio (1;2;4;) i/c surface dividing into pannels				
(a)	3"thick;	3015.0	@RS: =4411/82	%cft;	Rs: 133016/-
(b)	2"thick;	16.0	@RS: =3275/50	%cft;	Rs: 524/-
4/.	Cement plster (1;6;) upto 20'high 1/2"thick;	209.0	@RS: =2206/60	%sft;	Rs: 4612/-
5/.	cement plster (1;4;) upto 20'high 3/8"thick;	209.0	@RS: =2197/52	%sft;	Rs: 4593/00
6/.	First class deodar wood wrought joinery in doors and windows etc fixed in position i/c chowkats hold fasts hinges iron towers holts under f leats with hocks etc deodar wood 1-3/4"thivk	104.0	P; sft; @RS: =1273/76	P; sft;	Rs: 132471/-
7/.	supplying and fixing in position iron/steel grill of 3/4"x1/4"size flat iron of approved design including painting three cmts etc comploter	189.0	@RS: =180/50	P; sft;	Rs: 34115/-

Total Rs: 323,944/00.

Muhammad
DRAUGHTSMAN
EDUCATION WORKS DIVISION
SHIKARPUR.

[Signature]
EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR.

BIDDING DATA

(This section should be filled in by the Engineer/Procuring Agency before issuance of the Bidding Documents).

(a). **Name of Procuring Agency:-** Executive Engineer (Education Works)
Division Shikarpur.

PROVINCIAL ADP SCHEMES

(b). **Brief Description of Works:-** ADP NO: 127 UP-GRADATION OF PRIMARY SCHOOL TO
MIDDLE SCHOOLS (2007-08 PROGRAMME)

GBPS Gindal Buriro Shifted to Rahoja (R/Work)

(c). **Procuring Agency's address:-** Executive Engineer (Education Works) Division Shikarpur
Near GBHS No.II Shikarpur.

(d). **Estimated Cost:-** 0.250 (Millions).

(e). **Amount of Bid Security:-** 5% (Fill in lump sum amount or in % age of bid amount /estimated cost.

(f). **Period of Bid Validity (days):-** 60 Days (Not more than sixty days).

(g). **Security Deposit:-(including bid security):-** 10%
(in % age of bid amount /estimated cost equal to 10%)

(h). **Percentage, if any, to be deducted from bills:-** 7.50% Income tax

(i). **Deadline for Submission of Bids along with time :-** As Per NIT

(j). **Venue, Time, and Date of Bid Opening:-** Near GBHS II (Shikarpur As Per NIT).

(k). **Time for Completion from written order of commence: -** 03 Months


(L). **Liquidity damages:-** -NIL- (0.05 of Estimated Cost or Bid cost per day of delay, but total not exceeding 10%).

(m). **Deposit Receipt No:** _____ **Date:** _____ **Amount:Rs:** _____

Bank _____

(n) **D.R.NO:** _____ **DATED:** _____ **Amount 500/-**(Rupees: Five Hundred only).

(o). **Tender issued to Mr. / M/s** _____ **Govt. Contractor.**


EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR

BIDDING DATA

(This section should be filled in by the Engineer/Procuring Agency before issuance of the Bidding Documents).

(a). **Name of Procuring Agency:-** Executive Engineer (Education Works)
Division Shikarpur.

PROVINCIAL ADP SCHEMES

(b). **Brief Description of Works:-** ADP NO: 127 UP-GRADATION OF PRIMARY SCHOOL TO MIDDLE SCHOOLS (2007-08 PROGRAMME)

GBPS Muhammad Salih Pahore U.C Rahimabad
(Ext: Dev.)

(c). **Procuring Agency's address:-** Executive Engineer (Education Works) Division Shikarpur
Near GBHS No.II Shikarpur.

(d). **Estimated Cost:-** 0.500 (Millions).

(e). **Amount of Bid Security:-** 5% (Fill in lump sum amount or in % age of bid amount /estimated cost).

(f). **Period of Bid Validity (days):-** 60 Days (Not more than sixty days).

(g). **Security Deposit:-(including bid security):-** 10%
(in % age of bid amount /estimated cost equal to 10%)

(h). **Percentage, if any, to be deducted from bills:-** 7.50% Income tax

(i). **Deadline for Submission of Bids along with time :-** As Per NIT

(j). **Venue, Time, and Date of Bid Opening:-** Near GBHS II (Shikarpur As Per NIT).

(k). **Time for Completion from written order of commence: -** 06 Months

(L). **Liquidity damages:-** -NIL- (0.05 of Estimated Cost or Bid cost per day of delay, but total not exceeding 10%).

(m). **Deposit Receipt No:** _____ **Date:** _____ **Amount:Rs:** _____

Bank _____

(n) **D.R.NO:** _____ **DATED:** _____ **Amount 500/- (Rupees: Five Hundred only).**

(o). **Tender issued to Mr. / M/s** _____ **Govt: Contractor.**


EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR

SCHEDULED (B).

NAME OF WORK:- UP-GRADATION OF PRIMARY SCHOOL TO MIDDLE SCHOOL
(2007-08-PROGRAMME) AT GBPS MOHAMMAD SALEM PANORE
TALUKA KHANPUR DISTRICT SHIKARPUR. (AIP:NO:162).
EXTERNAL DEVELOPMENT).

SR:NO:	ITEM OF WORK.	QTY:	RATE.	UNIT.	AMOUNT.
1/.	Cement concrete brick or stone ballast 1½" to 2" gauge with ratio (1:5:10). (S:I:NO:04,P:NO:15).	68	@Rs:8694/95	%Cft:	Rs:- 5913/-
2/.	Cement concrete plain i/c placing compacting finishing and curing etc complete i/c screening and washing of stone aggregate without shuttering ratio (1:2:4). (S:I:NO:5(a),P:16).	35	@Rs:14429/25	%Cft:	Rs:- 5050/-
3/.	Laying white marble Flooring fine dressed in the surface without wining set in lime mortar (1:2) including rubbing and polishing of the joints (a) ¾" thick Flooring. (S:I:NO:28,P:NO:43).	206	@Rs:567/48	P:Sft:	Rs:- 116901/-
4/.	P/Fixing ¾" thick marble tiles of approved quality and colour shade size 8"x4"/6"x4" in Dado skirting and facing removal/tucking of existing plaster surface etc over ½" thick base of cement mortar (1:3) steeing in tiles in slurry of white cement over mortar base i/c filling the joints and i/c polishing etc complete. (S:I:NO:68,P:NO:49).	34	@Rs:186/04	P:Sft:	Rs:- 6325/-
5/.	S/F steel iron grill ¾" sq:bars diagonally fixed both way at 3" centre to centre on ¾"x¾"x1/8" angle iron frame i/c welded etc complete as per instructions given by Engr: Incharge. (R.....A).	253	@Rs:329/64	P:Sft:	Rs:- 83399/-
6/.	White glazed tiles ¼" thick Dado jointed in cement and laid over (1:2) cement sand mortar ¾" thick including finishing. (S:I:NO:37,P:NO:45).	417	@Rs:28253/61	%Sft:	Rs:- 117818/-
7/.	Laying floor of approved with glazed tiles ¼" thick cement (1:2) over ¾" thick cement mortar (1:2) complete. (S:I:NO:24,P:NO:43).	119	@Rs:27678/86	%Sft:	Rs:- 32938/-
8/.	P/L HALA tiles glazed 6"x6"x1/4" on floor or wall facing in required pattern and STILE specification jointed in white cement and laid over ¾" thick cement mortar (1:3) i/c cutting tiles to proper profile. (S:I:NO:62,P:NO:48).	32	@Rs:34520/31	%Sft:	Rs:- 11046/-
					TOTAL RS:- 379,390/-

SCHEDULE OF (WATER SUPPLY & SANITARY)

S.NO	DESCRIPTION	RATE	UNIT	AMOUNT	
1/-	Providing & fixing squatting type white glazed of flushline cistern fitting & flush pipe with bend and making requisite numbers of holes in wall plinth & floor for pipe connections & cement concrete 1:2:4 (S.I.NO.1 P.NO.1). B.(i) W.C of not less than 19" clear opening between flushing rims and 3 gallons flushing tank with 4" C.I trape & C.I Thumble.	03	Rs:4802/60	Each	RS: 14400/-
2/-	Providing and fixing 4" dia C.I soil & vent pipes including Cutting and fitting and extra painting to match the colour of building.(S.I.NO.1 ,P.NO.8)	18	Rs:333/29	Each	RS: 5999/-
3/-	Providing & fixing 4"x4"x4" dia C.I branch of the required degree with access doors, rubber washer 1/8" thick and bolts & nuts and extra painting to match the colour of the building.(S.I.NO.5.P.NO.8)	03	Rs:270/60	Each	RS: 812/-
4/-	Providing G.I Pipes specials & clamps etc including fixing cutting and fitting complete with and i/c the cost of breaking through walls and roof .making good etc . Painting two coats after cleaning the pipe etc. with white zink paint with pigment to match the colour of the building and testing with water to a pressure head of 200 feet and handling. (S.I.NO.1 .P.NO.11)				
	(iii) 1" dia G.I Pipe	15.0	Rs:128/55	Rft:	RS: 1928/-
	(i) 1/2" dia G.I Pipe	30.0	Rs: 73/21	Rft:	RS: 2196/-
	(ii) 3/4" dia G.I Pipe	45.0	Rs: 95/79	Rft:	RS: 4311/-
5/-	Supplying and fixing in position brass bib cock 3/4" dia (S.I.NO.15 P.NO.15)	03	Rs: 348/92	Each	RS: 1047/-
6/-	Providing & fixing bal valve (with unsoldered copper ball) made to B.B S. 1212 (S.I.NO.8 .P.NO. 14)				
	(ii) 3/4" dia	01	Rs:290/84	Each	RS: 291/-
7/-	Providing R.C.C.pipe with collars class "B" and digging the trench to required depth and fixing in position including cutting fitting and joining with maxphalt composition & cement mortar 1:1 and testing with water pressure to a head of 4 feet above the top of the highest pipe & refilling with excavated stuff. (S.I.NO .2 P.NO.21)				
	(c) 6" dia R.C.C pipe.class "B"	20	Rs: 199/25	Rft:	RS: 3985/-
8/-	Supplying & Fixing Fiber Glass Tank of approved quality and design and wall thickness as specified i/c cost of nuts bolts and fixing in plate form of cement concrete 1:3:6 and making connections for in-let out & over flow inlet .outlet flow pipes etc complete.(S.I.NO .3. P.NO.18) (250 G.L.S ;)	01	Rs:21989/61	P.Gallon	RS: 21990/-
9/-	Supplying & Fixing approved quality Eelectric motor pumping set (Javed Engineering made)1-1/4"x1" section and delivery with base plate and compiling one horsepower single phase motor (siemens make) 60'feet head pf 2800 RPM including the cost of nuts and bolts c.c (1:2:4)	01	Rs:12500/00	Each	RS: 12500/-
10/-	Providing and Installation of Hand pump 1-1/4" G.I pipe and colr syainer with wooden shap including cost of 4" feet above ground level embedd in C.C (1:2:4) with iron handle and required same shape with acc and fixing etc complete.				
	(a) Filter pipe	10.0	Rs:120/00	Rft:	RS: 1200/-
	(b) G.I pipe	45.0	Rs:110/00	Rft:	RS: 4950/-
	(c) H.P Machine	01	Rs:2500/00	P.NO	RS: 2500/-

	DESCRIPTION	RATE	UNIT	AMOUNT	
	Providing and fixing 22"x16" lavatory basin in white glazed earthen ware complete with & i/c the cost of W.I or C.I cantilever brackets 6 inch built into wall. Painted white in two coat after a primary coat of red lead paint a pair of 1/2" dia chrome plated pillar traps 1-1/2" dia rubber plug chrome brass waste of approved pattern. 1-1/4" dia malleable iron c.p union making and traps, malleable iron or brass requisite number of holes in wall plinth & floor for pipe connection and making good in cement concrete 1:2:4 (standard pattern) (S.I.NO.13.P.NO.3)	01	Rs: 4694/80	Each	RS: 4695/-
12/-	Add extra for labour for providing & fixing of earthen ware pedestal white or coloured glazed (standard pattern) (S.I.NO.9.P.NO.3)	01	Rs: 938/47	Each	RS: 938/-
13/-	(a) Supplying & Fixing swan type pillar cock of Superior quality single c.p head 1/2" dia(S.I.NO.18.P.NO.16)	01	Rs: 795/30	Each	RS: 795/-
14/-	Supplying & Fixing Bath room accessories (7 pieces) i/c towel rod ,brush,holder ,soap tray. Shelf of approved quality and design etc complete (S.I.NO.24 .P.NO.16)	01	Rs: 8122/40	Each	RS: 8122/-
15/-	Construction manhole or inspection chamber for the required dia of circular sewer and 3"x6" (1067mm) dept with walls of B.B in cement mortar 1:3 cement plastered 1:3,1/2" thick inside of walls and 1" (25mm) thick over benching and channel i/c fixing C.I manhole cover with frame of clear opening 1-1/2"x1-1/2" (457x457mm) of 1.75Cwt. (88.9 kg.) embedded in plain C.C 1:2:4 and fixing 1" (25mm) dia M.S steps 6" (150mm) wide projecting 4" (102mm) from the face of wall at 12" (305mm) C/C duly painted etc complete as per specification and drawing No. D.P/I of Public Health Circle Southern Zone.(S.I.NO.1 P. NO.39)	-Nil-	Rs: 14748/-	Each	RS: -Nil-
16/-	Providing & fixing 4" dia C.I Terminal guard including extra painting to match the colour of the building (S.I.NO.10.P.NO.9)	01	Rs: 399/70	Each	RS: 390/-
17/-	Providing and fixing in position nylon connections complete with 1/2" dia brass stop cock with pair of brass nuts and lining joints to nylon connection. (S.I.NO.23 .P.NO.6)	01	Rs: 447/15	Each	RS: 447/-
18/-	Providing asbestos pipe with collar (Dadex or equivalent) i/c digging the trench to required depth and fixing to position and joining with rubber rings including testing to water pressure head of 200 feet. (S.I.NO.3. P.NO.21)	06	Rs: 188/44	Rft:	RS: 1132/-
19/-	Providing & fixing 15"x 12" beveled edge mirror of belgium glass complete with 1/8" thick hard board and C.P screws fixed to wooden plate.(S.I.NO 3 .P.NO .7)	01	Rs: 1161/60	Each	RS: 1162/-
	a) Standard pattern	01	Rs: 1161/60	Each	RS: 1162/-

TOTAL RS:- 95,798/-

muhammad
DRAUGHTSMAN
EDUCATION WORKS DIVISION
SHIKARPUR.

[Signature]
EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR.

Amount	Total (CSR)	
Part "A"	% Above / Below _____	Total Amount _____
Part "B"	% Above / Below _____	Total Amount _____
Part "C"	% Above / Below _____	Total Amount _____

CONTRACTOR

EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR

BIDDING DATA

(This section should be filled in by the Engineer/Procuring Agency before issuance of the Bidding Documents).

(a). **Name of Procuring Agency:-** Executive Engineer (Education Works)
Division Shikarpur.

PROVINCIAL ADP SCHEMES

(b). **Brief Description of Works:-** ADP NO: 128 CONSTRUCTION OF 2-ROOMED
SHELTERLESS PRIMARY SCHOOLS IN SINDH (2007-08
PROGRAMME)

GBPS Ghulam Mustafa Lohar U.C Karan (Ext: Dev.)

(c). **Procuring Agency's address:-** Executive Engineer (Education Works) Division Shikarpur
Near GBHS No.II Shikarpur.

(d). **Estimated Cost:-** 0.200 (Millions).

(e). **Amount of Bid Security:-** 5% (Fill in lump sum amount or in % age of bid amount /estimated cost.

(f). **Period of Bid Validity (days):-** 60 Days (Not more than sixty days).

(g). **Security Deposit:-(including bid security):-** 10%
(in % age of bid amount /estimated cost equal to 10%)

(h). **Percentage, if any, to be deducted from bills:-** 7.50% Income tax

(i). **Deadline for Submission of Bids along with time :-** As Per NIT

(j). **Venue, Time, and Date of Bid Opening:-** Near GBHS II (Shikarpur As Per NIT).

(k). **Time for Completion from written order of commence: -** 03 Months

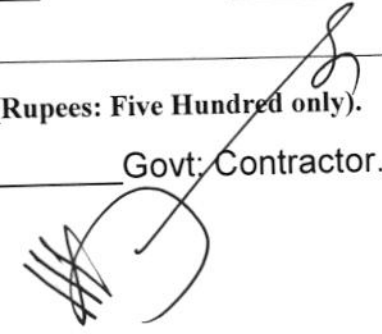
(L). **Liquidity damages:-** -NIL- (0.05 of Estimated Cost or Bid cost per day of delay, but total not exceeding 10%).

(m). **Deposit Receipt No:** _____ **Date:** _____ **Amount:Rs:** _____

Bank _____

(n) **D.R.NO:** _____ **DATED:** _____ **Amount 500/-**-(Rupees: Five Hundred only).

(o). **Tender issued to Mr. / M/s** _____ **Govt. Contractor.**


EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR

SCHEDULE "B".

NAME OF WORK:== CONSTRUCTION OF BUILDING FOR EXISTING SHELTERLESS
TWO PRIMARY SCHOOL AT G:B:P:S: GHULAM MUSTAFA LOHAR
TALUKA AND DISTRICT SHIKARPUR: (EXT:DEVEOPMENT:):

SR:NO:	ITEM OF WORK:	QTY:	RATE:	UNIT:	AMOUNT:	
1/.	Excavation in foundation of building and other str; i/c degbelling i/c degbelling dressing refilling around the structure with excavated earth watering and ramming lead upto 5'feet;	246.0	@RS:3176/25	%cft;	Rs:781/00.	
2/.	Cement concrete brick or stone ballast 1-1/2"to 2" guage ratio 1;5;10	51.0	@RS:8694/95	%cft;	Rs:4434/00	
3/.	Pacca brick work in foundation end plinth in cement sand moter ratio (1;6;);	154.0	@RS:11948/36	%cft;	Rs:18400/=	
4/.	R.c.c. work in roof slab beams column rafts linels and other str; members laid in sitta or precast laid in position etc comploter in all respect ratio (1;2;4;);	38.0	@RS:337/00	P;cwt;	Rs:12806/=	
5/.	Fabrication of mild steel reinforcement for cement including cutting blaying in position making jolats and fashing i/c the cost of steel wire (Also includes removal of rug bars.	1.357.0	@RS:5001/70	P;cwt;	Rs:6787/00	
6/.	Filling watering and ramming earth in floor with surplus earth foundation led upto one chain and lift upto 5'feet;	164.0	@RS:1512/50	%cft;	Rs: 248/=	
7/.	Filling watering ramming earth under floor with New earth excavated from out side lead upto one chain and lift upto 5'feet;	81.0	@RS:8655/20	%cft;	Rs:701/=	
8/.	Pacca brick work in G/Floor in cement sand moter ratio (1;6;);	117.0	@RS:12674/34	%cft;	Rs:14829/=	
9/.	Supplying and fixing iron Girders at site of work;	0.80	P;cwt;	@RS:3850/-	P;cwt;	Rs:3080/-
10/.	Supplying and fixing iron Teares at site of work;	2.187.0	@RS:3575/-	P;cwt;	Rs:7819/=	
11/.	Errection rolled steel beams old rails etc comploter;	2.99	P;cwt;	@RS:186/34	P;cwt;	Rs:557/=
12/.	2nd class tiles roofing consisting of 4"earth 1"mud plster with gobi keeping over 1/2"thick cement plster (1;6;) with 34 Lbs of hot bitumen coating sand blinded proved 12"x6"x2" tiles.	92.0	@RS:7607/25	%sft;	Rs:6999/=	
13/.	Providing and laying 1"thick topping cement concrete (1;2;4;) i/c surface finishing and dividing into pannels 2"thick;	92.0	@RS:3275/50	%sft;	Rs:3014/=	

- 14/. Cement plaster (1;6;) upto 20'high 1/2"thick;
674.0 @RS: 2206/60 %sft; Rs: 14872/=
- 15/. Cement plaster (1;4;) upto 20'high 3/8"thick;
674.0 @RS: 2197/52 %sft; Rs: 14811/=
- 16/. First class deodar wood wrought joinery in door and windows etc fixed in position i/c deodar panelled and glazed (b) 1/3/4"thick;
41.0 @RS: 1273/76 P; sft; Rs: 52224/=
- 17/. supplying and fixing iron steel grill of 3/4"x1/4" size iron of approved design including painting three coats etc compiter;
6.0 @RS: =180/50 P; sft; Rs: 1083/=
- 18/. Cement concrete plain i/c placing compacting finishing and curing compiter i/c screening and washing of stone aggregate without shuttering ratio (1;2;4;);
5.0 @RS: =14429/25 %sft; Rs: 721/=
- 19/. Providing and laying 1"thick topping cement concrete (1;2;4;) i/c surface finishing and dividing into pannels 3"thick;
28.0 @RS: =4411/82 %sft; Rs: 1235/=
- 20/. Laying floor of white glazed tiles 1/4"thick jointed in white cement laid over 3/4"thick bed (1;2;) ratio;
64.0 @RS: =27678/86 %sft; Rs: 17715/=
- 21/. white glazed tiles 1/4"thick jointed in white cement (1;2;) over 3/4"thick cement motr (1;2;) etc compiter;
16.0 @RS: =28253/61 %sft; Rs: 4521/=
- 22/. white wash Three coats.
52.0 @RS: =829/95 %sft; Rs: 2736/431/=
- 23/. Primary coat of chalk under distempering.
618.0 @RS: =442/75 %sft; Rs: 2736/00
- 24/. Distempering Three coats.
618.0 @RS: 1079/75 %sft; Rs: 6673/=
- 25/. Painting guard bns gates iron bars gratings railing including braces etc and similar oper work New surface three coats.
45.0 @RS: 1270/83 %sft; Rs: 572/=
- 26/. Painting door and windows any type New surface three coats.
82.0 @RS: =2116/41 %sft; Rs: 1735/=

Total P: (A) Rs: 199,784/=

M. S. D.
DRAUGHTSMAN
EDUCATION WORKS DIVISION
SHIKARPUR.

[Signature]
EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR.

SCHEDULE OF (WATER SUPPLY & SANITARY)

TNO. Selected

S.NO	DESCRIPTION	RATE	UNIT	AMOUNT
17.	Providing & fixing squaring type white glazed of flushing cistern fitting & flush pipe with bond and making requisite numbers of holes in wall plinth & floor for pipe connections & cement concrete 1:2:4 (S.I.NO.1 P.NO.1). B.(i) W.C of not less than 19" clear opening between flushing rim and 3 gallons flushing tank with 4" C.I teape & C.I Thumble.	2.0 Rs:4802/60	Each	RS: 96057
21.	Providing and fixing 4" dia C.I soil & vent pipes including Cutting and fitting and extra painting to match the colour of building. (S.I.NO.1 P.NO.8)	2.0 Rs:333/29	Each	RS: 667/
31.	Providing & fixing 4"x4"x4" dia C.I branch of the required degree with access doors, rubber washer 1/8" thick and bolts & nuts and extra painting to match the colour of the building. (S.I.NO.5 P.NO.8)	2.0 Rs:270/60	Each	RS: 540/
41.	Providing G.I Pipes specials & clamps etc including fixing cutting and fitting complete with and /ie the cost of breaking through walls and roof making good etc. Painting two coats after cleaning the pipe etc. with white zinc paint with pigment to match the colour of the building and testing with water to a pressure head of 200 feet and handling. (S.I.NO.1 P.NO.11)			
(iii)	1" dia G.I Pipe	10.0 Rs:128/55	Rft:	RS: 1286/
(i)	1/2" dia G.I Pipe	30 Rs: 73/21	Rft:	RS: 2196/
(ii)	3/4" dia G.I Pipe,	80.0 Rs: 95/79	Rft:	RS: 1916/
	Supplying and fixing in position brass bib cock 3/4" dia (S.I.NO.15 P.NO.15)	3.0 Rs: 348/92	Each	RS:
	Providing & fixing bal valve (with unsoldered copper ball) made to B.B S. 1212 (S.I.NO.8 P.NO. 14)			
(ii)	3/4" dia	2.0 Rs:290/84	Each	RS: 580/
	Providing R.C.C pipe with collars class "B" and digging the trenches to required depth and fixing in position including cutting fitting and joining with asphalt composition & cement mortar 1:1 and testing with water pressure to a head of 4 feet above the top of the highest pipe & refilling with excavated stuff. (S.I.NO.2 P.NO.21)			
(c)	6" dia R.C.C pipe class "B"	15.0 Rs: 199/25	Rft:	RS: 2989/
	Supplying & Fixing Fiber Glass Tank of approved quality and design and wall thickness as specified /ie cost of nuts bolts and fixing in plate form of cement concrete 1:3:6 and making connections for in-let out & over flow inlet outlet flow pipes etc complete. (S.I.NO.3 P.NO.18) (250 GLts)			
		250 Rs:21989/61	P.Gallon	RS: 54974/
	Supplying & Fixing approved quality Electric motor pumping set (Javed Engineering made) 1-1/4"x1" section and delivery with base plate and compiling one horsepower single phase motor (siemens make) 60'feet head of 2800 RPM including the cost of nuts and bolts c.c (1:2:4)	1.0 Rs:12500/00	Each	RS: 12500/
	Providing and installation of Hand pump 1-1/4" G.I pipe and coil syalner with wooden shap including cost of 4" feet above ground level embeded in C.C (1:2:4) with iron handle and required same shape with acc and fixing etc complete.			
(a)	Filter pipe	10.0 Rs:120/00	Rft:	RS: 1200/
(b)	G.I pipe	30.0 Rs:110/00	Rft:	RS: 3300/
(c)	H.P Machine	7.0 Rs:2500/00	P.NO	RS: 2500/

	DESCRIPTION	RATE	UNIT	AMOUNT
	Supply and fixing 22"x16" lavatory basin in white glazed earthen ware complete with & 1/2 the cost of for C.I cantilever brackets 6 inch built into wall. Painted white in two coat after a primary coat of red red paint a pair of 1/2" dia chrome plated pillar traps 1-1/2" dia rubber plug chrome brass waste of approved pattern. 1-1/4" dia malleable iron cp union making and traps, malleable iron or brass requisite number of holes in wall plinth & floor for pipe connection and making good in cement concrete 1:2:4 (standard pattern) (S.I.NO.13.P.NO.3)	1.0 Rs: 4694/80	Each	RS: 4694/80
	Add extra for labour for providing & fixing of earthen ware pedestal white or coloured glazed (standard pattern) (S.I.NO.9.P.NO.3)	1.0 Rs: 938/47	Each	RS: 938/47
	(a) Supplying & Fixing swan type pillar cock of Superior quality single c.p head 1/2" dia(S.I.NO.18.P.NO.16)	1.0 Rs: 795/30	Each	RS: 795/30
14/-	Supplying & Fixing Bath room accessories (7 pieces) 1/2 towel rod ,brush,holder ,soap tray. Shelf of approved quality and design etc complete (S.I.NO.24 .P.NO.16)	1.0 Rs: 8122/40	Each	RS: 8122/40
15/-	Construction manhole or inspection chamber for the required dia of circular sewer and 3"x6" (1067mm) dept with walls of B.B in cement mortar 1:3 cement plastered 1:3, 1/2" thick inside of walls and 1" (25mm) thick over benching and channel 1/2" fixing C.I manhole cover with frame of clear opening 1-1/2"x1-1/2" (457x457mm of 1.75Cwt. (80.9 kg.) embedded in plain C.C 1:2:4 and fixing 1" (25mm) dia M.S steps 6" (150mm) wide projecting 4" (102mm) from the face of wall at 12" (305mm) C/C duly painted etc complete as per specification and drawing No. D.P/I of Public Health Circle Southern Zone.(S.I.NO.1 P. NO.39)	Rs: 14748/-	Each	RS: 14748/-
16/-	Providing & fixing 4" dia C.I Terminal guard including extra painting to match the colour of the building (S.I.NO.10.P.NO.9)	2.0 Rs: 389/70	Each	RS: 389/70
17/-	Providing and fixing in position nylon connections complete with 1/2" dia brass stop cock with pair of brass nuts and lining joints to nylon connection. (S.I.NO.23 .P.NO.6)	2.0 Rs: 447/15	Each	RS: 447/15
18/-	Providing asbestos pipe with collar (Dadex or equivalent) 1/2" digging the trench to required depth and fixing to position and joining with rubber rings including testing to water pressure head of 200 feet. (S.I.NO.3. P.NO.21)	20.0 Rs: 188/44	Rft	RS: 188/44
19/-	Providing & fixing 15"x 12" beveled edge mirror of belgium glass complete with 1/8" thick hard board and C.P screws fixed to wooden plant.(S.I.NO 3 .P.NO .7)	Rs: 1161/60	Each	RS: 1161/60
	a) Standard pattern			

DRAGHTSMAN
EDUCATION WORKS DIVISION
SHIKARPUR.

EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR.

BIDDING DATA

(This section should be filled in by the Engineer/Procuring Agency before issuance of the Bidding Documents).

(a). **Name of Procuring Agency:-** Executive Engineer (Education Works)
Division Shikarpur.

PROVINCIAL ADP SCHEMES

(b). **Brief Description of Works:-** ADP NO: 162 UP-GRADATION OF MIDDLE SCHOOLS TO HIGH SCHOOLS & HIGH SCHOOLS TO HIGHER SECONDARY SCHOOLS IN SINDH (2007-08 PROGRAMME)

GGMS Jindo Dero (Ext: Dev:)

(c). **Procuring Agency's address:-** Executive Engineer (Education Works) Division Shikarpur
Near GBHS No.II Shikarpur.

(d). **Estimated Cost:-** 0.500 (Millions).

(e). **Amount of Bid Security:-** 5% (Fill in lump sum amount or in % age of bid amount /estimated cost).

(f). **Period of Bid Validity (days):-** 60 Days (Not more than sixty days).

(g). **Security Deposit:-(including bid security):-** 10%
(in % age of bid amount /estimated cost equal to 10%)

(h). **Percentage, if any, to be deducted from bills:-** 7.50% Income tax

(i). **Deadline for Submission of Bids along with time :-** As Per NIT

(j). **Venue, Time, and Date of Bid Opening:-** Near GBHS II (Shikarpur As Per NIT).

(k). **Time for Completion from written order of commence: -** 06 Months

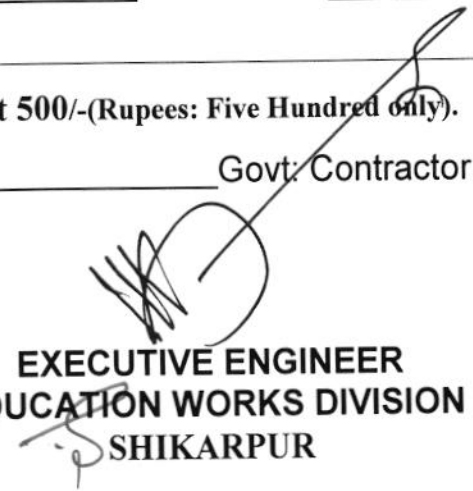
(L). **Liquidity damages:-** -NIL- (0.05 of Estimated Cost or Bid cost per day of delay, but total not exceeding 10%).

(m). **Deposit Receipt No:** _____ **Date:** _____ **Amount:Rs:** _____

Bank _____

(n) **D.R.NO:** _____ **DATED:** _____ **Amount 500/- (Rupees: Five Hundred only).**

(o). **Tender issued to Mr. / M/s** _____ **Govt. Contractor.**


EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR

SCHEDULE B

NAME OF WORK:-

**UP-GRADATION MIDDLE SCHOOL TO HIGH SCHOOL & HIGH
SCHOOLS TO HIGHER SECONDARY SCHOOLS IN SINDH (2007-08 PROG:)
@ GGMS JINDO DERO TALUKA GARHI YASIN DISTRICT SHIKARPUR.**

S.NO	ITEM OF WORK	QTY:	RATE	UNIT	AMOUNT
1	Excavation in foundation of building bridges and other structure l/c dagbelling dressing reffling around the excavated earth watering ramming lead upto one chain and lift upto 5' feet. (In ordinary soil)(S.I.NO:18 .P.NO:4).	Qty: <u>477.0</u>			
			Rs: 3176.25	%Cft	Rs: 1515/-
2	Cement concrete brick or stone ballast 1-1/2" to 2" guage ratio in cement sand mortar. (S.I.NO:4,P.NO:15) Ratio 1:5:10	Qty: <u>140.0</u>			
			Rs: 8694.95	%Cft	Rs: 12173/-
3	Reinforced cement concrete work including all labour and material except the cost of steel Reinforcement and its labour for bending and binding which will be paid separately. This rates also includes all kind of forms moulds lifting shuttering curring ra	Qty: <u>368.00</u>			
			Rs: 337.00	%Pcwt	Rs: 124016/-
4	Fabrication of mild steel reinforcement for cement concrete including cutting bending binding and laying in position making joints fastening including the cost of steel binding wire (also includes removal of rust from bars) (S.I.NO:8(A),P.NO:17).	Qty: <u>16.429</u>			
			Rs: 5001.70	P.Cwt:	Rs: 82171/-
5	Pacca brick work in Foundation and Plinth 1.6 .(S.I.NO:4 E,P.NO:21)	Qty: <u>120.0</u>			
			Rs: 11948.36	%Cft	Rs: 14338/-
6	Cement concrete plain i/c placing compacting, finishing and curring complete i/c screening and washing of stone aggregate without shuttering (1:3:6).	Qty: <u>240.0</u>			
			Rs: 12595.00	%Cft	Rs: 30228/-
7	Errection and removal of centering for R.C.C or Plain cement concrete works of deodar (2nd-class) (S.I.NO 19 P-No:18)	Qty: <u>480.0</u>			
			Rs: 7000.00	%Sft	Rs: 33600/-

8 Pacca brick work other than building including striking of joints upto 20 feet height ratio (1:6)
(S.I NO 7 E P.NO 22)

Qty: 481.0

Rs: 12346.65 % Cft" Rs: 59387/-

9 Cement plaster (1:6) ratio upto 20' height 1/2" thick.(S.I.NO:13,P.NO:52).

Qty: 1440.0

Rs: 2206.60 %Sft Rs: 31775/-

10 Cement plaster 1:4 upto 20' ft; height ground floor 3/8" thick.

Qty: 1440.0

Rs: 2197.52 %Sft Rs: 31644/-

11 Preparing the surface and painting with weather coat i/c rubbing the surface with rubbing brick/sand filling the voids with chalk / plaster of paris and then painting with weather coat of approved make
(S.I NO:38 P.NO:56).

Qty: 1440.0

Rs: 1328.25 %Sft Rs: 19127/-

TOTAL RS: 439974/-


DRAUGHTSMAN
EDUCATION WORKS DIVISION
SHIKARPUR.


EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR.

Part "A" % Above / Below _____ Total Amount _____

Part "B" % Above / Below _____ Total Amount _____

Part "C" % Above / Below _____ Total Amount _____

CONTRACTOR

EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR

BIDDING DATA

(This section should be filled in by the Engineer/Procuring Agency before issuance of the Bidding Documents).

(a). **Name of Procuring Agency:-** Executive Engineer (Education Works)
Division Shikarpur.

PROVINCIAL ADP SCHEMES

(b). **Brief Description of Works:-** ADP NO: 164 REHABILITATION OF EXISTING HIGH / HIGHER
SECONDARY SCHOOLS IN SINDH (2008-09 PROGRAMME)

GBHS Hamayoon (R/Work)

(c). **Procuring Agency's address:-** Executive Engineer (Education Works) Division Shikarpur
Near GBHS No.II Shikarpur.

(d). **Estimated Cost:-** 1.000 (Millions).

(e). **Amount of Bid Security:-** 5% (Fill in lump sum amount or in % age of bid amount /estimated cost).

(f). **Period of Bid Validity (days):-** 60 Days (Not more than sixty days).

(g). **Security Deposit:-(including bid security):-** 10%
(in % age of bid amount /estimated cost equal to 10%)

(h). **Percentage, if any, to be deducted from bills:-** 7.50% Income tax

(i). **Deadline for Submission of Bids along with time :-** As Per NIT

(j). **Venue, Time, and Date of Bid Opening:-** Near GBHS II (Shikarpur As Per NIT).

(k). **Time for Completion from written order of commence: -** 12 Months

(L). **Liquidity damages:-** -NIL- (0.05 of Estimated Cost or Bid cost per day of delay, but total not exceeding 10%).

(m). **Deposit Receipt No:** _____ **Date:** _____ **Amount:Rs:** _____

Bank _____

(n) **D.R.NO:** _____ **DATED:** _____ **Amount 2000/- (Rupees:Two Thousand only).**

(o). **Tender issued to Mr. / M/s** _____ **Govt: Contractor.**


EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR

SCHEDULE "B".

NAME OF WORK: = REHABILITATION OF EXISTING HIGH/HIGHER SCONDARY SCHOOL IN SINDH 2008-09 PROG: AT: G:B:H:S: HAMAYOON TALUKA AND DISTRICT SHIKARPUR: (EXT: DEVEOPEMENT:):

SR: NO:	ITEM OF WORK:	QTY:	RATE:	UNIT:	AMOUNT:
1/.	Dismantling R.c.c. work;	28.0	@RS: =5445/-	%cft;	Rs:1524/=
2/.	Dismantling Pacca brick work in Cement sand moter	24.0	@RS: =1285/62	%cft;	Rs:309/-
3/.	Excavation in foundation of building bridges and oterher other structure i/c dagbelling dressing refilling around the structure with excavatd and ramming lead upto 5'feet;	53.0	@RS: =3176/25	%0cft;	Rs:1683/00
4/.	Cement concrete brick or stone ballast 1½"to 2" gueage ratio 1;5;10	701.0	@RS: =8694/95	%cft;	Rs:60952/-
5/.	Filling watering ramming earth under floor New earth excavateed from out side lead upto one chain and lift upto 5'feet;	3113.0	@RS: =8655/20	%0cft;	Rs:26944/-
6/.	supplying and fixing in position iron/steel grill of 3/4"x1/4 size flat iron of approved design including painting three coats.	189.0	@RS: =180/50	P; sft;	Rs:34114/-
7/.	supplying and fixing steel iron Grill 3/8"sq; bars Diagonally Fixed in both way at 3" c.c. on 3/4"x3/4"x1/8"as per angle iron frame i/c wellding etc compltee as instruction given by Engineer in charge;(R....A.).	408.28	@RS: = 329/64	P; sft;	Rs:134585/-
8/.	Pacca brick work in foundation and plinth in cement sand moter ratio (1;6;);	24.0	@RS: =11948/36	%cft;	Rs:2868/-
9/.	Pacca brick work in G/Floor in cement sand moter ratio (1;6;);	91.0	@RS: = 12674/36	% cft;	Rs:11534/
10/.	cement plster (1;6;) upto 20'height 1/2"thick;	1633.0	@RS: =2206/60	%sft;	Rs:36034/-
11/.	cement plste4 (1;4;) upto 20'height 3/8"thick;	1633.0	@RS: =2197/52	%sft;	Rs:35886/00.
12/.	P/L 1"thick topping cement concrete (1;2;4;) i/c surface individing into pannels 3"thick;	1320.0	@RS: =4411/82	%sft;	Rs:58236/-
	3"thick;				
	2"thick;	16.0	@RS:3275/50	%sft;	Rs: 524/00.
13/.	white glazed tiles 1/4"thick jointed in white cement (1;2;) over 3/4"thick cement moter (1;2;) etc complete;	232.0	@RS: =28253/61	%sft;	Rs:65548/-

14/. Laying floor of white glazed tiles 1/4"thick jointed in white cement laid over 3/4"thick bed (1;2;) ratio etc compiter;

625.0 @RS: =27678/86 %sft; Rs: 172992/-

15/. Cutting cement concrete plain i/c placing compacting finishing and currin compiter i/c screening and washing of stone aggregate shuttering ratio(1;2;4;);

27.0 @RS: =14429/25 %cft; Rs: 3896/00.

16/. R.c.c. work in roof slb beams columns rafts linels and other structural members laid in sattu or precast laid in position et compiter in all respect ratio (1;2;4;);

109.0 @RS: =337/00 P;cft; Rs: 36733/00.

17/. Fabrication of mild steel reimforce moter of cement concrete i/c cutting bending and laying in position i/c steel binding wire also i/c removal of rust from bars.

4.86.0 @RS: =5001/70 P; cwt; Rs: 24308/-

18/. First class deodar wood wrought joiner in doors and windod etc fixed in positon i/c deodar pannelled and glazed (b) 1-3/4"thick;

41.0 @RS: =1273/76 P; sft; Rs: 52224/00.

19/. Providing and laying HALA tiles glazed 6"x6"x1/4"on floor or wall fcng in required colour and pattern of STILE Specification jointed in white cement and pugment over a base of (1;2;) etc

156.0 @RS: =34520/31 %sft; Rs: 53852/00.

20/. White wash Three coats.

328.0 @RS: =829/95 %sft; Ps: 2722/00.

21/. Primary cot of chalk under distempering.

932.0 @RS: =442/75 %sft; Rs: 4126/00.

22/. Painting doors and windows any type New surface three cocats.

47.0 @RS: =2116/41 %sft; Rs: 995/00.

23/. Making of fixing steel grated door with 1/16"thick sheeting i/c sheeting i/c angle iron frame 2"x2"3/8"and 3/4"square bars at 4 ceneter to cent with locking arrangements.

48.0 @RS: =726/72 P; sft; Rs: 34883/00.

24/. Distempering three coats.

934.0 @RS: =1079/65 %sft; Rs: 10084/00.

25/. Colour Wash Three coats.

6525.0 @RS: =859/90 %sft; Rs: 56109/00.

P: (A). Total 923,665/00.

M. G. S.
DRAUGHTSMAN
EDUCATION WORKS DIVISION
SHIKARPUR.

[Signature]
EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR.

SCHEDULE OF (WATER SUPPLY & SANITARY)

3- Sealed.

DESCRIPTION	RATE	UNIT	AMOUNT
Providing & fixing squatting type white glazed of flushline cistern fitting & flush pipe with bond and making requisite numbers of holes in wall plinth & floor for pipe connections & cement concrete 1:2:4 (S.I.NO.1 P.NO.1). B.(i) W.C of not less than 19" clear opening between flushing rim and 3 gallons flushing tank with 4" C.I trape & C.I Thumbln.	3.0 Rs:4002/60	Each	RS: 144087
Providing and fixing 4" dia C.I soil & vent pipes including Cutting and fitting and extra painting to match the colour of building. (S.I.NO.1 ,P.NO.8)	3.0 Rs:333/29	Each	RS: 10887
Providing & fixing 4"x4"x4" dia C.I branch of the required degree with access doors, rubber washer 1/8" thick and bolts & nuts and extra painting to match the colour of the building. (B.I.NO.5.P.NO.8)	3.0 Rs:270/60	Each	RS: 8127
Providing G.I Pipes specials & clamps etc including fixing cutting and fitting complete with and to the coat of breaking through walls and roof making good etc. Painting two coats after cleaning the pipe etc. with white zinc paint with pigment to match the colour of the building and testing with water to a pressure head of 200 feet and handling. (S.I.NO.1 P.NO.11)			
(iii) 1" dia G.I Pipe	10.0 Rs:120/55	Rft	RS: 1286
(i) 1/2" dia G.I Pipe	30.0 Rs: 73/21	Rft	RS: 2186
(ii) 3/4" dia G.I Pipe	30.0 Rs: 95/79	Rft	RS: 1916
Supplying and fixing in position brass ball cock 3/4" dia (S.I.NO.15 P.NO.15)	3.0 Rs: 348/92	Each	RS: 10487
Providing & fixing ball valve (with unsoldered copper ball) made to B.B S. 1212 (S.I.NO.8 :P.NO. 14)			
(ii) 3/4" dia	3.0 Rs:290/84	Each	RS: 8737
Providing R.C.C. pipe with collars class "B" and digging the trenches to required depth and fixing in position including cutting fitting and joining with maphalt composition & cement mortar 1:1 and testing with water pressure to a head of 4 feet above the top of the highest pipe & refilling with excavated stuff. (S.I.NO.2 P.NO.21)			
(c) 6" dia R.C.C pipe class "B"	30.0 Rs: 139/25	Rft	RS: 39857
Supplying & Fixing Fiber Glass Tank of approved quality and design and wall thickness as specified 1/2 cost of nuts bolts and fixing in plate form of cement concrete 1:3:6 and making connections for in-let out & over flow inlet outlet flow pipes etc complete. (S.I.NO.3. P.NO.18) (250 GLt)	1.0 Rs:21989/61	P.Gallon	RS: 21989
Supplying & Fixing approved quality Electric motor pumping set (Javed Engineering made)1-1/4"x1" section and delivery with base plate and compiling one horsepower single phase motor (siemens make) 60'feet head of 2800 RPM including the cost of nuts and bolts c.c (1:2:4)	1.0 Rs:12500/00	Each	RS: 12500
Providing and Installation of Hand pump 1-1/4" G.I pipe and coil syner with wooden shap including cost of 4" feet above ground level embeded in C.C (1:2:4) with iron handle and required same shape with acc and fixing etc complete.			
(a) Filter pipe	10.0 Rs:120/00	Rft	RS: 1200
(b) G.I pipe	30.0 Rs:110/00	Rft	RS: 3300
(c) H.P Machine	1.0 Rs:2500/00	P.NO	RS: 2500

	DESCRIPTION	RATE	UNIT	AMOUNT
	Providing and fixing 22"x16" lavatory basin in white glazed earthen ware complete with 8. 1/2 the cost of W.I or C.I cantilever brackets 6 inch built into wall. Painted white in two coat after a primary coat of red lead paint a pair of 1/2" dia chrome plated pillar traps 1-1/2" dia rubber plug chrome brass waste of approved pattern. 1-1/4" dia malleable iron c.p union making and traps, malleable iron or brass requisite number of holes in wall plinth & floor for pipe connection and making good in cement concrete 1:2:4 (standard pattern) (S.I.NO.13.P.NO.3)	1.0 Rs: 4694/80	Each	RS: 4694/80
12/-	Add extra for labour for providing & fixing of earthen ware pedestal white or coloured glazed (standard pattern) (S.I.NO.9.P.NO.3)	1.0 Rs: 938/47	Each	RS: 938/47
13/-	(a) Supplying & Fixing swan type pillar cock of Superior quality single c.p head 1/2" dia(S.I.NO.18.P.NO.16)	1.0 Rs: 795/30	Each	RS: 795/30
14/-	Supplying & Fixing Bath room accessories (7 pieces) 1/2 towel rod ,brush,holder ,soap tray. Shelf of approved quality and design etc complete (S.I.NO.24 .P.NO.16)	1.0 Rs: 8122/40	Each	RS: 8122/40
15/-	Construction manhole or inspection chamber for the required dia of circular sewer and 3"x6" (1007mm) dept with walls of D.B in cement mortar 1:3 cement plastered 1:3, 1/2" thick inside of walls and 1" (25mm) thick over benching and channel 1/2 using C.I manhole cover with frame of clear opening 1-1/2"x1-1/2" (457x457mm) of 1.75Cwt. (80.9 kg.) embedded in plain C.C 1:2:4 and fixing 1" (25mm) dia M.S steps 6" (150mm) wide projecting 4" (102mm) from the face of wall at 12" (305mm) C/C duly painted etc complete as per specification and drawing No. D.P/I of Public Health Circle Southern Zone.(S.I.NO.1 P. NO.39)	1.0 Rs: 14748/-	Each	RS: 14748/-
16/-	Providing & fixing 4" dia C.I Terminal guard including extra painting to match the colour of the building (S.I.NO.10.P.NO.9)	1.0 Rs: 309/70	Each	RS: 309/70
17/-	Providing and fixing in position nylon connections complete with 1/2" dia brass stop cock with pair of brass nuts and lining joints to nylon connection. (S.I.NO.23 .P.NO.6)	1.0 Rs: 447/15	Each	RS: 447/15
18/-	Providing asbestos pipe with collar (Dadex or equivalent) 1/2 digging the trench to required depth and fixing to position and joining with rubber rings including testing to water pressure head of 200 feet. (S.I.NO.3. P.NO.21)	20 Rs: 188/44	Rft:	RS: 3768/44
19/-	Providing & fixing 15"x 12" beveled edge mirror of belgium glass complete with 1/8" thick hard board and C.P screws fixed to wooden plate.(S.I.NO 3 .P.NO.7)			
	a) Standard pattern	Rs: 1161/60	Each	RS: 1161/60

DRAUGHTSMAN
EDUCATION WORKS DIVISION,
SHIKARPUR.

EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR.

BIDDING DATA

(This section should be filled in by the Engineer/Procuring Agency before issuance of the Bidding Documents).

(a). **Name of Procuring Agency:-** Executive Engineer (Education Works)
Division Shikarpur.

PROVINCIAL ADP SCHEMES

(b). **Brief Description of Works:-** ADP NO: 164 REHABILITATION OF EXISTING HIGH / HIGHER
SECONDARY SCHOOLS IN SINDH (2008-09 PROGRAMME)

GBHSS & GGHS Khanpur (Ext: Dev:)

(c). **Procuring Agency's address:-** Executive Engineer (Education Works) Division Shikarpur
Near GBHS No.II Shikarpur.

(d). **Estimated Cost:-** 0.500 (Millions).

(e). **Amount of Bid Security:-** 5% (Fill in lump sum amount or in % age of bid amount /estimated cost.

(f). **Period of Bid Validity (days):-** 60 Days (Not more than sixty days).

(g). **Security Deposit:-(including bid security):-** 10%
(in % age of bid amount /estimated cost equal to 10%)

(h). **Percentage, if any, to be deducted from bills:-** 7.50% Income tax

(i). **Deadline for Submission of Bids along with time :-** As Per NIT

(j). **Venue, Time, and Date of Bid Opening:-** Near GBHS II (Shikarpur As Per NIT).

(k). **Time for Completion from written order of commence: -** 06 Months

(L). **Liquidity damages:-** -NIL- (0.05 of Estimated Cost or Bid cost per day of delay, but total not exceeding 10%).

(m). **Deposit Receipt No:** _____ **Date:** _____ **Amount:Rs:** _____
Bank _____

(n) **D.R.NO:** _____ **DATED:** _____ **Amount 500/-**-(Rupees:Five Hundred only).

(o). **Tender issued to Mr. / M/s** _____ **Govt: Contractor.**


EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR

SCHEDULE (B).

NAME OF WORK:- REHABILITATION OF EXISTING HIGH HIGHER SECONDARY SCHOOLS IN SINIH (2008-09-PROGRAMME) AT G:G:H:S: KHANPUR TALUKA KHANPUR DISTRICT SHIKARPUR. (A:D:P:NO: 186 / 279).

SR:NO:	ITEM OF WORK.	QTY:	RATE.	UNIT.	AMOUNT.
1/.	Dismantling cement concrete plain (1:2:4) ratio. (S:I:NO:19(c) P:NO:10).	54	@Rs:-3327/50	%Cft:	Rs:- 1797/-
2/.	Removong Cement plaster from walls.(S:I:NO:53,P:NO:13).	770	@Rs:-121/-	%Sft:	Rs:- 932/-
3/.	Applying floating coat of cement 1/32" thick.(S:I:NO:14,P:NO:53).	770	@Rs:-660/-	%Sft:	Rs:- 5082/-
4/.	Cement plaster (1:6) ratio upto 20' height 1/2" thick. (S:I:NO:13,P:NO:52).	770	@Rs:-2206/60	%Sft:	Rs:- 1699 1/-
5/.	Cement concrete bricl or stone ballast 1 1/2" to 2" guage with ratio (1:4:8).(S:I:NO:04,P:NO:15).	150	@Rs:-94 16/28	%Sft:	Rs:- 14 124/-
6/.	Cement concrete plain i/c <u>plasing</u> compacting finishing & curring etc complete i/c screening and washing of stone aggregates without shuttering.(S:I:NO:5,P:NO:16).(Ratio 1:2:4).	54	@Rs:-14429/25	%Cft:	Rs:- 7792/-
7/.	Laying white marble flooring fine dressed in the surface without wining set in lime mortar (1:2) i/c rubbing and polishing of the joints(a) 3/4" thick flooring.(S:I:NO:28,P:NO:43).	555	@Rs:-567/48	P:Sft:	Rs:- 317221/-
8/.	P/Fixing 3/8" thick marble tiles of approved quality and colour shade size 8"x4"/6"x4" in dado skirting and facing removal/ tacking of existing plaster surface etc over 1/2" thick base of cement mortar (1:3) i/c filling the joints etc.(S:I:NO:68,P:NO:49).	770	@Rs:-186/04	P:Sft:	Rs:- 14325 1/-

Phone No: 0726-920186

Office of the Executive Engineer
Education Works Division
Shikarpur

No:TC/G-55/ 335 / of/2015,
Shikarpur Dated: 17/ 12 /2015.

Sealed Tenders on standard bidding documents are invited from interested contractors / firms / parties required as per SPPRA Rules 2010, for the following works.

S.No:	Name of Work	Estimated Cost	Earnest Money	Tender Fee	Time Allowed
<u>Separate list Attached</u>					
1.	The Blank Tender forms can be obtained from the office of the undersigned on payment of tender fee shown against each work.				
2.	The blank tender forms will be issued from the date of publication of this N.I.T upto 04.01.2016 at 2:00 pm and will be received back on 05.01.2016 at 3.00 pm and opened on same day at 3:00 pm in presence of all intending contractors and tendering committee.				
3.	Earnest Money as shown against each work should be deposited in favour of undersigned from any scheduled bank & call deposit must be attached with tender in envelop as SPPRA Rules.				
4.	The undersigned or the authority competent to accept the tenders reserve the right to reject any or all tenders as per SPPRA rules 2010.				
5.	Contract documents, estimates, drawings and design and specification etc can be seen in the office of the undersigned on any working day during office hours.				
6.	The contractor will have to produce the following Documents while submitting the tender documents. 1: Registration certificate with Pakistan Engineering Council ending upto 31.12.2015 2. The bidders should produce registration with Sindh Revenue Board in light of SPPRA Rule 2010 amended rule 46 (1) (iii) of 2014. . 3. Registration with Income Tax Department (NTN Certificate) copy of N.I.C at the time of submission bids. 4. N.T.N Certificate. 5. Undertaking on affidavit that firm is not involved in any litigation or abandoned any work in the Department.				
7.	No conditional tender will be accepted.				
8.	If any holiday is announced by the Government on the dates stated above, the tenders will be issued, received back and opened on next working day.				
9.	In case any of the works remains un-responded, the tenders will be issued upto 21.01.2016 at 2:00 pm and will be received back and opened on 22.01.2016 at 3:00 pm,				
Note:- This N.I.T. can be seen on SPPRA Web site at www.sppra.sindh.gov.pk					

EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR

Copy F.W.C's to The :-

Secretary to Government of Sindh Information Technology Department Ist: floor Sindh Secretariat No: 06 Karachi for information and along with Soft Copy of N.I.T. for placing the same on website.

Deputy Commissioner Officer Shikarpur.

Chief Engineer Education Works Sukkur for favour of information.

Copy to the Director (A&F) Government of Sindh, Sindh Public Procurement Regulatory Authority, Planning & Development Department Karachi.

Copy to along with (Seven copies) is forwarded to the Director, of information Public Relation Department (Adv:) Block 96 Sindh.

Superintending Engineer Education Works Circle Larkana for favour of information.

Executive Engineer Buildings/Highways Division Shikarpur, for wide publicity.

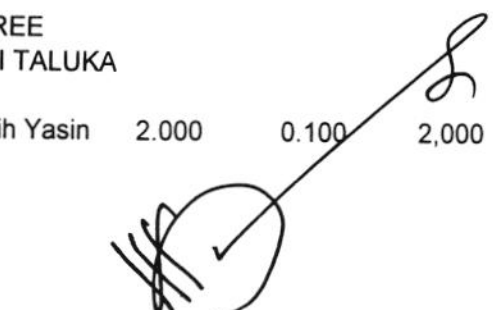
Assistant Engineer Education Works Sub-Division Shikarpur, Lakhi Khanpur, Garhi Yasin, The Notice Board / Drawing Branch.

EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR

LIST OF LOCATION

S.No./ A.D.P.No:	Name of Scheme/Location	Taluka	Estimated Cost in Million	Earnest Money in Million	Tender Fee in Rupees	Time Allowed
<u>DISTRICT A.D.P. SCHEMES</u>						
1/2313	REHABILITATION OF BUILDING FOR EXISTING SECONDARY SCHOOL OF DISTRICT SHIKARPUR 2010-11 PROGRAMME <u>(BOUNDARY WALL)</u> GGHS Haji Fateh Muhammad Usto (R/Work)	Shikarpur	5.000	0.250	3,000	24 Months
2/2314	REHABILITATION OF GOVERNMENT BOYS SECONDARY SCHOOL <u>OF DISTRICT SHIKARPUR 2010-2011 PROGRAMME</u> GBHS No:-I Shikarpur (R/Work)	Shikarpur	3.500	0.175	3,000	24 Months
3/2316	REHABILITATION OF BUILDING FOR EXISTING GIRLS SECONDARY SCHOOL OF TALUKA & DISTRICT <u>SHIKARPUR (2010-11 PROGRAMME) (1 UNIT)</u> GGHS Shikarpur (R/Work)	Shikarpur	3.000	0.150	3,000	24 Months
4/2321	REHABILITATION OF GOVERNMENT BOYS PRIMARY SCHOOL <u>TALUKA & DISTRICT SHIKARPUR (2011-12 PROGRAMME)</u> GBPS Lakhi Gate (Main) (R/R)	Shikarpur	2.800	0.140	3,000	24 Months
5/2325	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS SECONDARY /HIGHER SECONDARY SCHOOLS IN TALUKA & <u>DISTRICT SHIKARPUR (2013-14) PROG:</u> GBHS Islamia Add: 3C/Room	Shikarpur	4.000	0.200	3,000	24 Months
6/2326	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS SECONDARY /HIGHER SECONDARY SCHOOLS IN TALUKA & <u>DISTRICT SHIKARPUR (2013-14) PROG:</u> GBPS Jumani Hall	Shikarpur	1.800	0.090	2,000	24 Months
7/2327	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS SECONDARY /HIGHER SECONDARY SCHOOLS IN TALUKA & <u>DISTRICT SHIKARPUR (02 Units)(2013-14) PROG:</u> GBHSS Sultan Kot	Shikarpur	4.500	0.225	3,000	24 Months
3/2328	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS PRIMARY/ ELEMENTARY SCHOOLS IN TALUKA & DISTRICT <u>SHIKARPUR (05 Units)(2013-14)PROGRAMME</u> GBPS Sultan kot GGPS Lodra GBPS Wahidabad	Shikarpur Shikarpur Shikarpur	5.000 2.700 2.400	0.250 0.135 0.120	3,000 3,000 3,000	24 Months 24 Months 24 Months
9/2329	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS PRIMARY/ ELEMENTARY SCHOOLS IN TALUKA & DISTRICT <u>SHIKARPUR (04 Units)(2013-14)PROGRAMME</u> GGPS Dadwai Road	Shikarpur	2.600	0.130	3,000	24 Months
10/2330	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS PRIMARY/ ELEMENTARY SCHOOLS IN TALUKA & DISTRICT <u>SHIKARPUR (05 Units)(2013-14)PROG:</u> GGPS Haji Fateh Muhammad Usto GBPS Lakhi Gate (Main) Toilet, Water Facilities and B/Wall	Shikarpur Shikarpur	2.000 1.500	0.100 0.075	2,000 2,000	24 Months 24 Months
11/2331	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS PRIMARY/ ELEMENTARY SCHOOLS IN TALUKA & DISTRICT <u>SHIKARPUR (04 Units)(2013-14)PROGRAMME</u> GBPS Qazi Muhalla GGPS Lakhi Gate	Shikarpur Shikarpur	4.000 5.000	0.200 0.250	3,000 3,000	24 Months 24 Months
12/2325	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS SECONDARY /HIGHER SECONDARY SCHOOLS IN TALUKA & <u>DISTRICT SHIKARPUR (2013-14) PROG:</u> GBHS Islamia Repair/Renovation	Shikarpur	5.000	0.250	3,000	24 Months

..D.P.No:	Name of Scheme/Location	Taluka	Estimated Cost in Million	Earnest Money in Million	Tender Fee in Rupees	Time Allowed
24/2345	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS SECONDARY/HIGHER SECONDARY SCHOOLS IN TALUKA KHANPUR DISTRICT SHIKARPUR (03 Units)(2013-14) PROGRAMME GBHS Noor Muhammad Shujrah (B.Wall & Lav:Block)	Khanpur	1.200	0.060	2,000	24 Months
25/2346	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS PRIMARY/ ELEMENTARY SCHOOLS IN TALUKA KHANPUR DISTRICT SHIKARPUR (06 Units)(2013-14) PROGRAMME GBPS Khanpur Sindhi	Khanpur	2.000	0.100	2,000	24 Months
26/2347	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS PRIMARY/ ELEMENTARY SCHOOLS IN TALUKA KHANPUR DISTRICT SHIKARPUR (09 Units)(2013-14) PROGRAMME GGPS Turit Muhro GBPS Muhammad Hassan Brohi	Khanpur Khanpur	1.800 1.200	0.090 0.060	2,000 2,000	24 Months 24 Months
27/2348	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS PRIMARY/ ELEMENTARY SCHOOLS IN TALUKA KHANPUR DISTRICT SHIKARPUR (06 Units)(2013-14) PROGRAMME GBPS Mehmooda Bagh GBPS Khan Muhammad Khan GBPS Tando Ali Sher GBPS Ghulam Nabi Shujrah	Khanpur Khanpur Khanpur Khanpur	4.000 1.800 2.200 2.200	0.200 0.090 0.110 0.110	3,000 2,000 2,000 2,000	24 Months 24 Months 24 Months 24 Months
PROVINCIAL A.D.P. SCHEMES						
28/159	UP-GRADATION OF MIDDLE SCHOOLS TO HIGH SCHOOLS IN SINDH (2008-09 PROGRAMME) (07 UNITS) GBMS Muhammad Saleh Pahore (R/Work)	Khanpur	5.000	0.250	3,000	24 Months
29/162	UP-GRADATION OF MIDDLE SCHOOLS TO HIGH SCHOOLS & HIGH SCHOOLS TO HIGHER SECONDARY SCHOOLS IN SINDH 2007-08 PROGRAMME (i) <u>UP-GRADATION MIDDLE SCHOOLS TO HIGH SCHOOLS</u> GGMS Hothi (Remaining Work) (ii) <u>HIGH SCHOOLS TO HIGHER SEC: SCHOOLS</u> GBHS Jhali Kalwari (Remaining Work)	Lakhi Lakhi	2.000 5.000	0.100 0.250	2,000 3,000	24 Months 24 Months
30/224	ESTABLISHMENT OF GOVERNMENT (BOYS/GIRLS) DEGREE COLLEGE IN SINDH AT GOVT: (GIRLS) COLLEGE MADEJI TALUKA GARHI YASIN, DISTRICT SHIKARPUR (2007) Block (B) (Remaining Work)	Garih Yasin	2.000	0.100	2,000	24 Months


EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR

ANNUAL PROCUREMENT PLAN FOR THE YEAR 2015-2016

**WORKS FOR MAINTAINANCE OR EDUCATIONAL INSTITUTIONS UNDER PROVINCIAL/DISTRICT ONGOING ADPs,
NEW ADPs* 2015-2016, MAINTAINANCE & REPAIR AT EDUCATION WORKS DIVISION SHIKARPUR**

S.No./ ADP No:	1	2	3	4	5	6	7	8
	DESCRIPTION OF PROJECT	QUANTITY WHERE APPLICABLE	FUNDS ALLOCATION FOR THE YEAR 2015-16	SOURCE OF FUNDING	PROCURING METHOD	TIME OF PROCUREMENT		REMARKS
1/2313	DISTRICT A.D.P. SCHEMES REHABILITATION OF BUILDING FOR EXISTING SECONDARY SCHOOL OF DISTRICT SHIKARPUR 2010-11 PROGRAMME (BOUNDARY WALL) GGHS Haji Fateh Muhammad Usto (R/W Shikarpur)	As per Bidding Data	2,000	ADP	National Competitive bidding single stage one envelope	ADP		
2/2314	REHABILITATION OF GOVERNMENT BOYS OF DISTRICT SHIKARPUR 2010-2011 PROGRAMME GBHS No:-1 Shikarpur (R/Work)	As per Bidding Data	3,300	ADP	-do-	ADP		
3/2316	REHABILITATION OF BUILDING FOR EXISTING GIRLS SECONDARY SCHOOL OF TALUKA & DISTRICT SHIKARPUR (2010-11 PROGRAMME) (UNIT) GGHS Shikarpur (R/Work)	As per Bidding Data	2,500	ADP	-do-	ADP		
4/2321	REHABILITATION OF GOVERNMENT BOYS PRIMARY SCHOOL TALUKA & DISTRICT SHIKARPUR (2011-12 PROGRAMME) GBPS Lakhri Gate (Main) (R/R)	As per Bidding Data	0,800	ADP	-do-	ADP		
5/2325	REHABILITATION OF EXISTING BUILDING FOR NGSS FOR BOYS / GIRLS SECONDARY /HIGHER SECONDARY SCHOOLS IN TALUKA & DISTRICT SHIKARPUR (2013-14) PROGRAMME GBHS Islamia Add: 3C/Room	As per Bidding Data	3,000	ADP	-do-	ADP		
6/2326	REHABILITATION OF EXISTING BUILDING FOR NGSS FOR BOYS / GIRLS SECONDARY /HIGHER SECONDARY SCHOOLS IN TALUKA & DISTRICT SHIKARPUR (2013-14) PROGRAMME GBPS Jumani Hall	As per Bidding Data	2,500	ADP	-do-	ADP		
7/2327	REHABILITATION OF EXISTING BUILDING FOR NGSS FOR BOYS / GIRLS SECONDARY /HIGHER SECONDARY SCHOOLS IN TALUKA & DISTRICT SHIKARPUR (02 Units)(2013-14) PROG: GBHS: Sultan Kot	As per Bidding Data	2,000	ADP	-do-	ADP		

S.No./ ADP No:	DESCRIPTION OF PROCUREMENT	QUANTITY WHERE APPLICABLE	FUNDS ALLOCATION FOR THE YEAR 2015-16	SOURCE OF FUNDING	PROCURING METHOD	TIME OF PROCUREMENT	REMARKS
8/2328	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS PRIMARY/ ELEMENTARY SCHOOLS IN TALUKA & DISTRICT SHIKARPUR (05 Units)(2013-14)PROGRAMME Shikarpur Shikarpur Shikarpur GBPS Sultan kot GGPS Lodra GBPS Wahidabad	As per Bidding Data	2.500	ADP	-do-	ADP	
9/2329	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS PRIMARY/ ELEMENTARY SCHOOLS IN TALUKA & DISTRICT SHIKARPUR (04 Units)(2013-14)PROGRAMME GGPS Dadwai Road Shikarpur	As per Bidding Data	4.000	ADP	-do-	ADP	
10/2330	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS PRIMARY/ ELEMENTARY SCHOOLS IN TALUKA & DISTRICT SHIKARPUR (05 Units)(2013-14)PROG: GGPS Haji Fateh Muhammad Usto GBPS Lakhi Gate (Main) Toilet, Water Facilities and BWall Shikarpur Shikarpur	As per Bidding Data	2.500	ADP	-do-	ADP	
11/2331	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS PRIMARY/ ELEMENTARY SCHOOLS IN TALUKA & DISTRICT SHIKARPUR (04 Units)(2013-14)PROGRAMME GBPS Qazi Muhalla GGPS Lakhi Gate Shikarpur Shikarpur	As per Bidding Data	4.000	ADP	-do-	ADP	
12/2325	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS SECONDARY /HIGHER SECONDARY SCHOOLS IN TALUKA & DISTRICT SHIKARPUR (2013-14) PROG: GBHS Islamia Repair/Renovation Shikarpur	As per Bidding Data	3.000	ADP	-do-	ADP	
13/2332	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS SECONDARY/HIGHER SECONDARY SCHOOLS IN TALUKA GARHI YASIN DISTRICT SHIKARPUR (03 Units)(2013-14) PROG: GBHS Town Garhi Yasin G. Yasin	As per Bidding Data	2.500	ADP	-do-	ADP	
14/2333	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS SECONDARY/HIGHER SECONDARY SCHOOLS IN TALUKA GARHI YASIN DISTRICT SHIKARPUR (03 Units)(2013-14) PROGRAMME GBHS Madeji G. Yasin	As per Bidding Data	2.000	ADP	-do-	ADP	

S.No./ADP No:	DESCRIPTION OF PROCUREMENT	QUANTITY WHERE APPLICABLE	FUNDS ALLOCATION FOR THE YEAR 2015-16	SOURCE OF FUNDING	PROCURING METHOD	TIME OF PROCUREMENT	REMARKS
15/2334	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS SECONDARY/HIGHER SECONDARY SCHOOLS IN TALUKA GARHI YASIN DISTRICT SHIKARPUR (03 Units)(2013-14) PROGRAMME GBHS Dakhan G. Yasin	As per Bidding Data	3,000	ADP	-do-	ADP	
16/2336	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS PRIMARY/ ELEMENTARY SCHOOLS IN TALUKA GARHI YASIN DISTRICT SHIKARPUR (07 Units)(2013-14) PROGRAMME GGPŞ Garhi Yasin- II GGPŞ Urdu Garhi Yasin-III G. Yasin G. Yasin	As per Bidding Data	3,000	ADP	-do-	ADP	
17/2337	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS PRIMARY/ ELEMENTARY SCHOOLS IN TALUKA GARHI YASIN DISTRICT SHIKARPUR (05 Units)(2013-14) PROGRAMME GBPS Khan Kalhoro GGPŞ Madeji - II G. Yasin G. Yasin	As per Bidding Data	2,500	ADP	-do-	ADP	
18/2338	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS PRIMARY/ ELEMENTARY SCHOOLS IN TALUKA GARHI YASIN DISTRICT SHIKARPUR (05 Units)(2013-14) PROGRAMME GBPS O-C Madeji GBPS Soomra Muhallia Madeji G. Yasin G. Yasin	As per Bidding Data	2,500	ADP	-do-	ADP	
19/2339	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS SECONDARY/HIGHER SCHOOLS IN TALUKA LAKHI DISTRICT SHIKARPUR (02 Units) (2013-14) PROGRAMME Lakhi Lakhi GBHS Jahan Khan Main Building (Repair/Renovation) GBHS Habib Kot High School Portion (Repair/R)	As per Bidding Data	3,500	ADP	-do-	ADP	
20/2340	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS SECONDARY/HIGHER SECONDARY SCHOOLS IN TALUKA LAKHI DISTRICT SHIKARPUR (02 Units)(2013-14) PROGRAMME Lakhi Lakhi GBHS: Rustam Main Building(Repair/Renovation) GBHS Wazirabad i Main Building (Repair & Renovation) ii Toilet Water & Compound Wall	As per Bidding Data	2,500	ADP	-do-	ADP	
21/2341	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS SECONDARY/HIGHER SECONDARY SCHOOLS IN TALUKA LAKHI DISTRICT SHIKARPUR (03 Units)(2013-14) PROGRAMME Lakhi Lakhi GGHSS Mukhi Kirori Mal Parsvam Talreja Chak GGHSS Lakhi Add: 4C/Room	As per Bidding Data	3,000	ADP	-do-	ADP	

S.No./ ADP No:	DESCRIPTION OF PROCUREMENT	QUANTITY WHERE APPLICABLE	FUNDS ALLOCATION FOR THE YEAR 2015-16	SOURCE OF FUNDING	PROCURING METHOD	TIME OF PROCUREMENT	REMARKS
22/2343	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS PRIMARY/ELEMENTARY SCHOOLS IN TALUKA LAKHI DISTRICT SHIKARPUR (07 Units)(2013-14) PROGRAMME GBPS Fateh Tando GBPS Dahar GBPS Wazirabad	As per Bidding Data Lakhi Lakhi Lakhi	2.700	ADP	-do-	ADP	
23/2344	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS PRIMARY/ELEMENTARY SCHOOLS IN TALUKA LAKHI DISTRICT SHIKARPUR (07 Units)(2013-14) PROGRAMME GGMs Hothi GGPS Ruk GBMS Dahar	As per Bidding Data Lakhi Lakhi Lakhi	2.500	ADP	-do-	ADP	
24/2345	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS SECONDARY/HIGHER SECONDARY SCHOOLS IN TALUKA KHANPUR DISTRICT SHIKARPUR (03 Units)(2013-14) PROGRAMME GBHS Noor Muhammad Shujrah (B.Wall & Lav Block)	As per Bidding Data Khanpur	3.000	ADP	-do-	ADP	
25/2346	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS PRIMARY/ ELEMENTARY SCHOOLS IN TALUKA KHANPUR DISTRICT SHIKARPUR (06 Units)(2013-14) PROGRAMME GBPS Khanpur Sindhi	As per Bidding Data Khanpur	2.500	ADP	-do-	ADP	
26/2347	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS PRIMARY/ ELEMENTARY SCHOOLS IN TALUKA KHANPUR DISTRICT SHIKARPUR (09 Units)(2013-14) PROGRAMME GGPS Turit Muhro GBPS Muhammad Hassan Brohi	As per Bidding Data Khanpur Khanpur	2.000	ADP	-do-	ADP	
27/2348	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS PRIMARY/ ELEMENTARY SCHOOLS IN TALUKA KHANPUR DISTRICT SHIKARPUR (06 Units)(2013-14) PROGRAMME GBPS Mehmooda Bagh GBPS Khan Muhammad Khan GBPS Tando Ali Sher GBPS Ghulam Nabi Shujrah	As per Bidding Data Khanpur Khanpur Khanpur Khanpur	2.210	ADP	-do-	ADP	

S.No./ ADP No.	DESCRIPTION OF PROCUREMENT	QUANTITY WHERE APPLICABLE	FUNDS ALLOCATION FOR THE YEAR 2015-16	SOURCE OF FUNDING	PROCURING METHOD	TIME OF PROCUREMENT	REMARKS
PROVINCIAL A.D.P. SCHEMES							
28/159	UP-GRADATION OF MIDDLE SCHOOLS TO HIGH SCHOOLS IN SINDH (2008-09 PROGRAMME) (07 UNITS) GBMS Muhammad Saleh Pahore (R/Work)	As per Bidding Data Khanpur	4,000	ADP	-do-	ADP	
29/162	UP-GRADATION OF MIDDLE SCHOOLS TO HIGH SCHOOLS & HIGH SCHOOLS TO HIGHER SECONDARY SCHOOLS IN SINDH 2007-08 PROGRAMME	As per Bidding Data	6,000	ADP	-do-	ADP	
(i)	UP-GRADATION MIDDLE SCHOOLS TO HIGH SCHOOLS GGMS Hothi (Remaining Work)	Lakhi					
(ii)	HIGH SCHOOLS TO HIGHER SEC. SCHOOLS GBHS Jhali Kalwar (Remaining Work)	Lakhi					
30/224	ESTABLISHMENT OF GOVERNMENT (BOYS/GIRLS) DEGREE COLLEGE IN SINDH AT GOVT: (GIRLS) COLLEGE MADEJI TALUKA GARHI YASIN, DISTRICT SHIKARPUR (2007) Block (B) (Remaining Work)	As per Bidding Data G. Yasin	8,000 3Y	ADP	-do-	ADP	


EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR



NOTIFICATION

NO.SO(G) EDU/E&A/PRO-EW(SHP)/14-15: In pursuance of Rule – 7 of the Sindh Public Procurement Rules, 2010, a Departmental Procurement Committee comprising of following Officers for procurement of works for Education Works Division Shikarpur working under Administrative Control of Education & Literacy Department to be procured under ADP / Regular Budget / SNE of Education Department is constituted as under:-

- | | | |
|----|--|----------|
| 1. | Executive Engineer (Education Works)
Education Works Division, Shikarpur
Education & Literacy Department | Chairman |
| 2. | Assistant Engineer
Provincial Highway Shikarpur
Works & Services Department | Member |
| 3. | Assistant Engineer
Education Works sub Division Shikarpur
Education & Literacy Department | Member |

ToRs

- Preparing bidding documents;
- Carrying out technical as well as financial evaluation of the bids;
- Preparing evaluation report as provided in Rule 45 of SPPRA 2010;
- Making recommendations for the award of contract to the competent authority; and
- Perform any other function ancillary and incidental to the above.

- DR. FAZLULLAH PECHUHO -
SECRETARY TO GOVT. OF SINDH

NO.SO(G) EDU/E&A/PRO-EW(SHP)/14-15:

Karachi, date the 27th October, 2015

A copy is forwarded for information & necessary action to:-

1. All Members of the Committee.
2. The P.S. to Senior Minister, Education & Literacy Department, Govt. of Sindh, Karachi.
3. The P.S to Secretary, Education & Literacy Department.
4. The P.S to Secretary, Works & Services Department, Karachi.
5. Office Order File

DEPUTY SECRETARY (GA)

Office of the Executive Engineer
Education Works Division
Shikarpur

No: /TC/G-55/ 334 / of/2015,
Shikarpur Dated: 17 / 12 /2015.

Sealed Tenders on standard bidding documents are invited from interested contractors /firms / parties required as per SPPRA Rules 2010, for the following works.

S.No:	Name of Work	Estimated Cost	Earnest Money	Tender Fee	Time Allowed
<u>Separate list Attached</u>					
1.	The Blank Tender forms can be obtained from the office of the undersigned on payment of tender fee shown against each work.				
2.	The blank tender forms will be issued from the date of publication of this N.I.T upto 04.01.2016 at 2:00 pm and will be received back on 05.01.2016 at 3.00 pm and opened on same day at 3:00 pm in presence of all intending contractors and tendering committee.				
3.	Earnest Money as shown against each work should be deposited in favour of undersigned from any scheduled bank & call deposit must be attached with tender in envelop as SPPRA Rules.				
4.	The undersigned or the authority competent to accept the tenders reserve the right to reject any or all tenders as per SPPRA rules 2010.				
5.	Contract documents, estimates, drawings and design and specification etc can be seen in the office of the undersigned on any working day during office hours.				
6.	The contractor will have to produce the following Documents while submitting the tender documents. 1. Registration certificate with Pakistan Engineering Council ending upto 31.12.2015 2. The bidders should produce registration with Sindh Revenue Board in light of SPPRA Rule 2010 amended rule 46 (1) (iii) of 2014. 3. Registration with Income Tax Department (NTN Certificate) copy of N.I.C at the time of submission bids. 4. N.T.N Certificate. 5. Undertaking on affidavit that firm is not involved in any litigation or abandoned any work in the Department.				
7.	No conditional tender will be accepted.				
8.	If any holiday is announced by the Government on the dates stated above, the tenders will be issued, received back and opened on next working day.				
9.	In case any of the works remains un-responded, the tenders will be issued upto 21.01.2016 at 2:00 pm and will be received back and opened on 22.01.2016 at 3:00 pm,				
Note:- This N.I.T. can be seen on SPPRA Web site at www.opra.sindh.gov.pk					

EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR

Copy F.W.C's to The :-

Secretary to Government of Sindh Information Technology Department Ist: floor Sindh Secretariat No: 06 Karachi for information and along with Soft Copy of N.I.T. for placing the same on website.

Deputy Commissioner Officer Shikarpur.

Chief Engineer Education Works Sukkur for favour of information.

Copy to the Director (A&F) Government of Sindh, Sindh Public Procurement Regulatory Authority, Planning & Development Department Karachi.

Copy to along with (Seven copies) is forwarded to the Director, of information Public Relation Department (Adv:) Block 96 Sindh.

Superintending Engineer Education Works Circle Larkana for favour of information.

Executive Engineer Buildings/Highways Division Shikarpur, for wide publicity.

Assistant Engineer Education Works Sub-Division Shikarpur, Lakhi, Khanpur, Garhi Yasin, The Notice Board / Drawing Branch.

EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR

LIST OF LOCATION

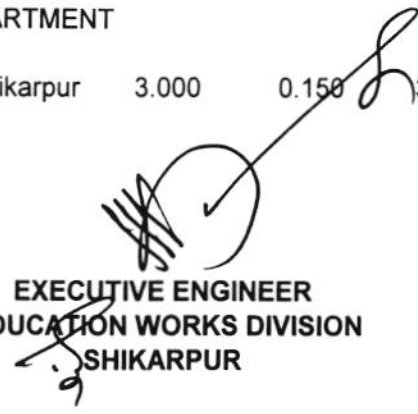
S.No./ A.D.P.No:	Name of Scheme/Location	Taluka	Estimated Cost in Million	Earnest Money in Million	Tender Fee in Rupees	Time Allowed
---------------------	-------------------------	--------	---------------------------------	--------------------------------	----------------------------	-----------------

DISTRICT A.D.P. SCHEMES

1/2333	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS SECONDARY/HIGHER SECONDARY SCHOOLS IN TALUKA <u>GARHI YASIN DISTRICT SHIKARPUR (2013-14) PROGRAMME</u> GGHS Madeji	Garhi Yasin	3.000	0.150	3,000	24 Months
2/2337	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS PRIMARY/ ELEMENTARY SCHOOLS <u>IN TALUKA GARHI YASIN DISTRICT SHIKARPUR</u> <u>(2013-14) PROGRAMME</u> GBPS Town Madeji	Garhi Yasin	3.000	0.150	3,000	24 Months
3/2345	REHABILITATION OF EXISTING BUILDINGS FOR BOYS / GIRLS SECONDARY/HIGHER SECONDARY SCHOOLS IN TALUKA KHANPUR DISTRICT SHIKARPUR (03 Units)(2013-14) <u>PROGRAMME</u> GBHS Khanpur	Khanpur	5.000	0.250	3,000	24 Months

PROVINCIAL A.D.P. SCHEMES

4/159	UP-GRADATION OF MIDDLE SCHOOLS TO HIGH <u>SCHOOLS IN SINDH (2008-09 PROGRAMME) (07 UNITS)</u> GBMS Maroon Kakepota (R/Work)	G.Yasin	5.000	0.250	3,000	24 Months
5/519	CONSTRUCTION / RE-CONSTRUCTION OF EXISTING OFFICES FOR FIELD OFFICERS OF EDUCATION & LITERACY DEPARTMENT <u>IN LARKANA DISIVISION (2014-15) PROGRAMME.</u> District Education Office Shikarpur	Shikarpur	3.000	0.150	3,000	24 Months


**EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR**

WORKS
NEW ADPs

S.No./ ADP No:	DESCRIPTION OF PROCUR
1	2

DISTRICT A.D.P. SCHEMES

1/2333 REHABILITATION OF EXISTING BUILDINGS
SECONDARY/HIGHER SECONDARY SCHOOLS
GARHI YASIN DISTRICT SHIKARPUR (2013-
GGHS Madeji

2/2337 REHABILITATION OF EXISTING BUILDINGS
BOYS / GIRLS PRIMARY/ ELEMENTARY SCHOOLS
IN TALUKA GARHI YASIN DISTRICT SHIKARPUR
(2013-14) PROGRAMME
GBPS Town Madeji

3/2345 REHABILITATION OF EXISTING BUILDING
SECONDARY/HIGHER SECONDARY SCHOOLS
KHANPUR DISTRICT SHIKARPUR (03 Units)
PROGRAMME
GBHS Khanpur

PROVINCIAL A.D.P. SCHEMES

4/159 UP-GRADATION OF MIDDLE SCHOOLS TO
SCHOOLS IN SINDH (2008-09 PROGRAM
GBMS Maroon Kakepota (R/Work)

5/519 CONSTRUCTION / RE-CONSTRUCTION OF
FOR FIELD OFFICERS OF EDUCATION OFFICES
IN LARKANA DIVISION (2014-15) PROGRAMME
District Education Office Shikarpur

NOTIFICATION

U/E&A/PRO-EW(CRC)/14-15: In pursuance of Rule - 31 of the Sindh Public Procurement
a Departmental Complaint Redressal Committee comprising of following Officers is
under to resolve complaint's of aggrieved bidders:-

Superintendent Engineer (Education Works) Chairman
of concerned Education Works Circle
Education & Literacy Department

Representative of District Account Officer / Member
Accountant General, Sindh

Representative of Head of procuring Agency Member
(Professional from relevant field concerning)

To perform according to Rule - 31 of SPPRA, 2010;
Perform any other function ancillary and incidental to the above.

SECRETARY EDUCATION
TO GOVT. OF SINDH
Karachi, date the 28th May, 2015

EDU/E&A/PRO-EW(CRC)/14-15:

Copy is forwarded for information & necessary action to:-

Members of the Committee.

P.S to Secretary, Education & Literacy Department.

Order File



SINDH EDUCATION &
LITERACY DEPARTMENT



28/4/15
DEPUTY SECRETARY (GA)



NOTIFICATION

NO.SO(G) EDU/E&A/PRO-EW(SHP)/14-15: In pursuance of Rule – 7 of the Sindh Public Procurement Rules, 2010, a Departmental Procurement Committee comprising of following Officers for procurement of works for Education Works Division Shikarpur working under Administrative Control of Education & Literacy Department to be procured under ADP / Regular Budget / SNE of Education Department is constituted as under:-

- | | | |
|----|--|----------|
| 1. | Executive Engineer (Education Works)
Education Works Division, Shikarpur
Education & Literacy Department | Chairman |
| 2. | Assistant Engineer
Provincial Highway Shikarpur
Works & Services Department | Member |
| 3. | Assistant Engineer
Education Works sub Division Shikarpur
Education & Literacy Department | Member |

ToRs

- Preparing bidding documents;
- Carrying out technical as well as financial evaluation of the bids;
- Preparing evaluation report as provided in Rule 45 of SPPRA 2010;
- Making recommendations for the award of contract to the competent authority; and
- Perform any other function ancillary and incidental to the above.

- DR. FAZLULLAH PECHUHO -
SECRETARY TO GOVT. OF SINDH

NO.SO(G) EDU/E&A/PRO-EW(SHP)/14-15:

Karachi, date the 27th October, 2015

A copy is forwarded for information & necessary action to:-

1. All Members of the Committee.
2. The P.S. to Senior Minister, Education & Literacy Department, Govt. of Sindh, Karachi.
3. The P.S to Secretary, Education & Literacy Department.
4. The P.S to Secretary, Works & Services Department, Karachi.
5. Office Order File

DEPUTY SECRETARY (GA)