



FORM "A"

N.I.T SUBMISSION (1)

PROCURING AGENCY: EE, Edu Works Divi Shikarpur TENDER REF: 347

<u>Documents Required with NIT:</u>	IC	AM
a. Notice Inviting Tender	<input checked="" type="checkbox"/>	<input type="checkbox"/>
b. Notification of Procurement Committee	<input checked="" type="checkbox"/>	<input type="checkbox"/>
c. Notification of Complaint redressal committee.	<input checked="" type="checkbox"/>	<input type="checkbox"/>
d. Bidding documents	<input checked="" type="checkbox"/>	<input type="checkbox"/>
e. Annual Procurement Plan	<input checked="" type="checkbox"/>	<input type="checkbox"/>
f. Method of Receiving Courier	<input type="checkbox"/> Hand <input checked="" type="checkbox"/> Courier	
Initial		

E.O.I / PRE-QUALIFICATION SUBMISSION (2)

PROCURING AGENCY: _____ TENDER REF: _____

<u>EOI / Pre-qualification:</u>	IC	AM
a. Notice of EOI / Pre-qualification.	<input type="checkbox"/>	<input type="checkbox"/>
b. Notification of Procurement Committee / Consultant selection committee	<input type="checkbox"/>	<input type="checkbox"/>
c. Notification of Complaint redressal committee.	<input type="checkbox"/>	<input type="checkbox"/>
d. Pre-qualification / shortlisting documents / RFP documents	<input type="checkbox"/>	<input type="checkbox"/>
e. Annual Procurement Plan	<input type="checkbox"/>	<input type="checkbox"/>
f. Method of Receiving Courier	<input type="checkbox"/> Hand <input type="checkbox"/> Courier	
Initial		

Name: Bashir
 Signature:
 Date: 30-12-15

Office of the Executive Engineer
Education Works Division
Shikarpur

No./TC/G-55/ 342 / of/2015,
Shikarpur Dated: 29/12/2015.

Sealed Tenders on standard bidding documents are invited from interested contractors / firms / parties required as per SPPRA Rules 2010, for the following works.

S.No:	Name of Work	Estimated Cost	Earnest Money	Tender Fee	Time Allowed
<u>Separate list Attached</u>					
1.	The Blank Tender forms can be obtained from the office of the undersigned on payment of tender fee shown against each work.				
2.	The blank tender forms will be issued from the date of publication of this N.I.T upto 14.01.2016 at 2:00 pm and will be received back on 15.01.2016 at 3.00 pm and opened on same day at 3:00 pm in presence of all intending contractors and tendering committee.				
3.	Earnest Money as shown against each work should be deposited in favour of undersigned from any scheduled bank & call deposit must be attached with tender in envelop as SPPRA Rules.				
4.	The undersigned or the authority competent to accept the tenders reserve the right to reject any or all tenders as per SPPRA rules 2010.				
5.	Bidding documents, estimates, drawings and design and specification etc can be seen in the office of the undersigned on any working day during office hours.				
6.	The Bidders will have to produce the following documents while submitting the tender documents. 01. The bidders should produce registration with Sindh Revenue Board in light of SPPRA Rule 2010 amended rule 46 (1) (iii) of 2014. 02. Registration with Income Tax Department (NTN Certificate) copy of N.I.C at the time of submission bids. 03. Undertaking on affidavit that firm is not involved in any litigation or abandoned any work in the Department.				
7.	No conditional tender will be accepted.				
8.	If any holiday is announced by the Government on the dates stated above, the tenders will be issued, received back and opened on next working day.				
9.	In case any of the works remains un-responded, the tenders will be issued upto 01.02.2016 at 2:00 pm and will be received back and opened on 02.02.2016 at 3:00 pm,				
Note:- This N.I.T. can be seen on SPPRA Web site at www.ppra.sindh.gov.pk					

EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR

Copy F.W.C's to The :-

Copy to the Director (A&F) Government of Sindh, Sindh Public Procurement Regulatory Authority, Planning & Development Department Karachi.
Deputy Commissioner Officer Shikarpur.

Chief Engineer Education Works Sukkur for favour of information.

Copy to along with (Seven copies) is forwarded to the Director, of information Public Relation Department (Adv:) Block 96 Sindh.

Superintending Engineer Education Works Circle Larkana for favour of information.

Executive Engineer Buildings/Highways Division Shikarpur, for wide publicity.

Assistant Engineer Education Works Sub-Division Shikarpur, Lakhi, Khanpur, Garhi Yasin,

The Notice Board / Drawing Branch.

EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR

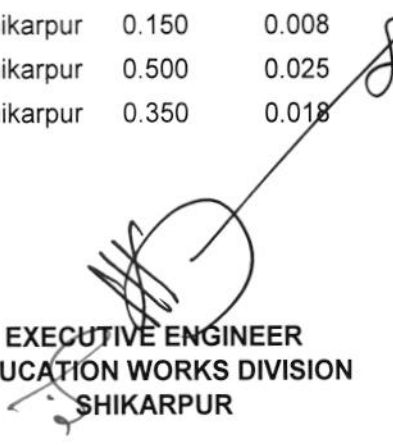
NO: 6476
DATED: 30-12-15

LIST OF LOCATION

S.No./ A.D.P.No:	Name of Scheme/Location	Taluka	Estimated Cost in Million	Earnest Money in Million	Tender Fee in Rupees	Time Allowed
---------------------	-------------------------	--------	---------------------------------	--------------------------------	----------------------------	-----------------

PROVINCIAL A.D.P. SCHEMES

1/128	<u>CONSTRUCTION OF 2-ROOMED SHELTERLESS PRIMARY SCHOOLS IN SINDH (2007-08 PROGRAMME).</u>					
	GBPS Muhammad Ramzan Memon U.C Grahi Dakho (Ext: Dev:)	Khanpur	0.200	0.010	500	03 Months
	GBPS Shahdad @ Wali Muhammad Jatoi (Ext: Dev:)	Khanpur	0.150	0.008	500	03 Months
	GBPS Haji Noor Muhammad Jaffry (Ext: Dev:)	Khanpur	0.300	0.015	500	03 Months
2/129	<u>INTRODUCTION OF COMPUTER EDUCATION IN EXISTING MIDDLE SCHOOLS IN SINDH (2007-08 PROGRAMME)</u>					
	GGMS Sultankot U.C. Sultankot (Ext: Dev:)	Shikarpur	0.150	0.008	500	03 Months
	GBMS Sanjrani Muhallah U.C.-5 (Ext: Dev:)	Shikarpur	0.500	0.025	500	03 Months
	GGMS Kot Akhtar Muhammad Shaikh U/C 6 (Ext: Dev:)	Shikarpur	0.350	0.018	500	03 Months


EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR


ANNUAL PROCUREMENT PLAN FOR THE YEAR 2015-2016

**WORKS FOR EDUCATIONAL INSTITUTIONS UNDER PROVINCIAL/DISTRICT ONGOING ADPs,
NEW ADPs' 2015-2016, EXTERNAL & DEVELOPMENT AT EDUCATION WORKS DIVISION SHIKARPUR**

S.No./ ADP No:	2 DESCRIPTION OF PROCUREMENT	3 QUANTITY WHERE APPLICABLE	4 FUNDS ALLOCATION FOR THE YEAR 2015-16	5 SOURCE OF FUNDING	6 PROCURING METHOD	7 TIME OF PROCUREMENT	8 REMARKS
-------------------	---------------------------------	--------------------------------	--	------------------------	-----------------------	--------------------------	--------------

PROVINCIAL A.D.P. SCHEMES:

1/128	CONSTRUCTION OF 2-ROOMED SHELTERLESS PRIMARY SCHOOLS IN SINDH (2007-08 PROGRAMME). GBPS Muhammad Ramzan Memon U.C Grahni Dakhro (Ext: Dev:) GBPS Shahdad @ Wali Muhammad Jatoi (Ext: Dev:) GBPS Haji Noor Muhammad Jaffry (Ext: Dev:)	As Per Bidding Data Khanpur Khanpur Khanpur	3.200	ADP	National Competitive bidding single stage one envelope	ADP	
2/129	INTRODUCTION OF COMPUTER EDUCATION IN EXISTING MIDDLE SCHOOLS IN SINDH (2007-08 PROGRAMME) GGMS Sultankot U.C. Sultankot (Ext: Dev:) GBMS Sanjrani Muhallah U.C.-5 (Ext: Dev:) GGMS Kot Akhtar Muhammad Shaikh U/C 6 (Ext: Dev:)	As Per Bidding Data Shikarpur Shikarpur Shikarpur	4.000	ADP	-do-	ADP	


EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR



GOVERNMENT OF SINDH
EDUCATION & LITERACY DEPARTMENT
Karachi, date the 28-04-2015

NOTIFICATION

SO(G) EDU/E&A/PRO-EW(CRC)/14-15: In pursuance of Rule - 31 of the Sindh Public Procurement Act, 2010 a Departmental Complaint Redressal Committee comprising of following Officers is constituted as under to resolve complaint's of aggrieved bidders:-

- | | | |
|----|---|----------|
| 1. | Superintendent Engineer (Education Works)
of concerned Education Works Circle
Education & Literacy Department | Chairman |
| 2. | Representative of District Account Officer /
Accountant General, Sindh | Member |
| 3. | Representative of Head of procuring Agency
(Professional from relevant field concerning) | Member |

ToRs

- To perform according to Rule - 31 of SPPRA, 2010;
- Perform any other function ancillary and incidental to the above.

SECRETARY EDUCATION
TO GOVT. OF SINDH
Karachi, date the 28th May, 2015

SO(G) EDU/E&A/PRO-EW(CRC)/14-15:

A copy is forwarded for information & necessary action to:-

- All Members of the Committee.
- The P.S to Secretary, Education & Literacy Department.
- The Order File



SINDH EDUCATION &
LITERACY DEPARTMENT



28/04/15
DEPUTY SECRETARY (GA)



NOTIFICATION

NO.SO(G) EDU/E&A/PRO-EW(SHP)/14-15: In pursuance of Rule – 7 of the Sindh Public Procurement Rules, 2010, a Departmental Procurement Committee comprising of following Officers for procurement of works for Education Works Division Shikarpur working under Administrative Control of Education & Literacy Department to be procured under ADP / Regular Budget / SNE of Education Department is constituted as under:-

- | | | |
|----|--|----------|
| 1. | Executive Engineer (Education Works)
Education Works Division, Shikarpur
Education & Literacy Department | Chairman |
| 2. | Assistant Engineer
Provincial Highway Shikarpur
Works & Services Department | Member |
| 3. | Assistant Engineer
Education Works sub Division Shikarpur
Education & Literacy Department | Member |

ToRs

- Preparing bidding documents;
- Carrying out technical as well as financial evaluation of the bids;
- Preparing evaluation report as provided in Rule 45 of SPPRA 2010;
- Making recommendations for the award of contract to the competent authority; and
- Perform any other function ancillary and incidental to the above.

- DR. FAZLULLAH PECHUHO -
SECRETARY TO GOVT. OF SINDH

NO.SO(G) EDU/E&A/PRO-EW(SHP)/14-15:

Karachi, date the 27th October, 2015

A copy is forwarded for information & necessary action to:-

1. All Members of the Committee.
2. The P.S. to Senior Minister, Education & Literacy Department, Govt. of Sindh, Karachi.
3. The P.S to Secretary, Education & Literacy Department.
4. The P.S to Secretary, Works & Services Department, Karachi.
5. Office Order File

DEPUTY SECRETARY (GA)

BIDDING DATA

(This section should be filled in by the Engineer/Procuring Agency before issuance of the Bidding Documents).

(a). **Name of Procuring Agency:-** Executive Engineer (Education Works)
Division Shikarpur.

PROVINCIAL ADP SCHEMES

(b). **Brief Description of Works:-** ADP NO: 128 CONSTRUCTION OF 2-ROOMED
SHELTERLESS PRIMARY SCHOOLS IN SINDH
(2007-08 PROGRAMME)

GBPS Muhammad Ramzan Memon
U.C Garhi Dakho (Ext: Dev:)

(c). **Procuring Agency's address:-** Executive Engineer (Education Works) Division Shikarpur
Near GBHS No.II Shikarpur.

(d). **Estimated Cost:-** 0.200 (Millions).

(e). **Amount of Bid Security:-** 5% (Fill in lump sum amount or in % age of bid amount /estimated cost).

(f). **Period of Bid Validity (days):-** 60 Days (Not more than sixty days).

(g). **Security Deposit:-(including bid security):-** 10%
(in % age of bid amount /estimated cost equal to 10%)

(h). **Percentage, if any, to be deducted from bills:-** 7.50% Income tax

(i). **Deadline for Submission of Bids along with time :-** As Per NIT

(j). **Venue, Time, and Date of Bid Opening:-** Near GBHS II (Shikarpur As Per NIT).

(k). **Time for Completion from written order of commence: -** 03 Months

(L). **Liquidity damages:-** -NIL- (0.05 of Estimated Cost or Bid cost per day of delay, but total not exceeding 10%).

(m). **Deposit Receipt No:** _____ **Date:** _____ **Amount:Rs:** _____

Bank _____

(n) **D.R.NO:** _____ **DATED:** _____ **Amount 500/- (Rupees: Five Hundred only)**

(o). **Tender issued to Mr. / M/s** _____ **Govt: Contractor.**


EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR

SCHEDULE (B).

NAME OF WORK:- CONSTRUCTION OF TWO ROOMED SHELTERLESS PRIMARY SCHOOLS IN SINDH (2007-08-PROGRAMME) AT G:B:P:S: MOHAMMAD RAMZAN MEMON U/C GARHI DAKHO TALUKA KHANPUR DISTRICT SHIKARPUR. (EXT: DEVELOPMENT).

(ADP: NO: 128).

SR: NO:	ITEM OF WORK.	QTY:	RATE.	UNIT.	AMOUNT.
1/.	Excavation in foundation of building bridges and other structure i/c degbelling dressing refilling around the structure with excavated earth watering and ramming lead upto one chain and lift upto 5 feet in ordinary soil. (S:I:NO:18,P:NO:04).				
		179	@Rs:- 3176/25	%Cft:	Rs:- 569/-
2/.	Cement concrete brick or stone ballast 1 1/2" to 2" gauge with ratio (1:5:10). (S:I:NO:04,P:NO:15).				
		45	@Rs:- 8694/95	%Cft:	Rs:- 3913/-
3/.	Pacca brick work in foundation and plinth with (1:6) ratio. (S:I:NO:04,P:NO:21).				
		154	@Rs:- 11948/36	%Cft:	Rs:- 18400/-
4/.	R:c:c work in roofslab beams coloumns rafts lintels and other structural members laid in situ or precast laid in position complete in all respects C:C (1:2:4) ratio. (S:I:NO:6(a),P:NO:17).				
		25.39	@Rs:- 337/-	P:Cft:	Rs:- 8480/-
5/.	Fabrication of mild steel reinforcement forcement concrete i/c cutting bending and laying in position i/c cost of steel binding wire also includes removal of rust from bars. (S:I:NO:8,P:NO:17).				
		1.133	@Rs:- 500 1/70	P:Cwt:	Rs:- 5667/-
6/.	Filling watering ramming earth under floor with New earth (Excavated from outside) lead upto one chain and lift upto 5 feet. (S:I:NO:4,P:NO:18).				
		40	@Rs:- 8655/20	%Cft:	Rs:- 346/-
7/.	Pacca brick work on Ground floor with (1:6) ratio. (S:I:NO:5(a),P:NO:21).				
		119	@Rs:- 12674/36	%Cft:	Rs:- 15082/-
8/.	Supplying and fixing Iron Girdrs at site of work.				
		0.910	@Rs:- 3850/-	P:Cwt:	Rs:- 3504/-
9/.	Supplying and fixing Iron Tears at site of work.				
		1.517	@Rs:- 3575/-	P:Cwt:	Rs:- 5423/-

10/. Errection of rolled steel beams or iron rails etc.
(S:I:NO:6,P:NO:91).

2.427 @Rs:- 186/34 P:Cwt: Rs:- 452/-

11/. Second class tiles roofing consisting of 4" earth 1" mud plaster with 34 lbs: of hot bitumen coating sand blinded provided over one layer of 12"x6"x2" tiles i/c curring etc complete.
(S:I:NO:02,P:NO:33).

64 @Rs:-7607/25 %Sft: Rs:- 4869/-

12/. P/L single per layer of polythin sheet 0.13 mm thick for water proofing as per specification and instructions given by the Engineer Incharge.(S:I:NO:38,P:NO:38).

64 @Rs:- 10/70 P:Sft: Rs:- 685/-

13/. First class deodar wood wrought joinery in doors and windows etc fixed in position i/c chowkats holdfasts handles iron tower bolts cleats nuts and cords with hooks etc deodar wood 1 1/2" thick. (S:I:NO:07,P:NO:58).

21 @Rs:-1273/76 P:Sft: Rs:- 26749/-

14/. Cement plaster (1:6) ratio upto 20' height 1/2" thick.
(S:I:NO:13,P:NO:52).

235 @Rs:-2206/60 %Sft: Rs:- 5186/-

15/. Cement plaster (1:4) ratio upto 20' height 3/8" thick.
(S:I:NO:11,P:NO:52).

217 @Rs:-2197/52 %Sft: Rs:- 4769/-

16/. Cement pointing (1:2) ratio struck joints on walls.
(S:I:NO:19,P:NO:53).

155 @Rs:-1287/44 %Sft: Rs:- 1996/-

17/. Cement concrete plain i/c placing compacting finishing and curring etc complete i/c screening and washing of stone aggregates without shuttering ratio (1:2:4).(S:I:NO:05,P:NO:16).

20 @Rs:-14429/25 %Sft: Rs:- 2886/-

18/. P/Laying 1" thick Topping cement concrete ratio (1:2:4) i/c surface finishing and dividing into pannels. (2" thick).
(S:I:NO:16,P:NO:42).

12 @Rs:-3275/50 %Sft: Rs:- 393/-

19/. Laying floor of approved with glazed tiles 1/4" thick tiles in white cement (1:2) over 3/4" thcik cement mortar (1:2) etc complet
(S:I:NO:24,P:NO:43).

20 @Rs:-27678/86 %Sft: Rs:- 5536/-

20/. White glazed tiles 1/4" thick tiles Dado jointed in white cement and laid over (1:2) cement sand mortar 3/4" thick i/c finishing (S:I:NO:37,P:NO:45).

18 @Rs:-2825 3/61 %sft: Rs:- 5086/-

21/. White washing Three coats.(S:I:NO:26,P:NO:54).

48 @Rs:-829/95 %sft: Rs:- 398/-

22/. Colour washing Three coats.(S:I:NO:25,P:NO:54).

316 @Rs:-859/90 %sft: Rs:- 2717/-

23/. Painting to Guard bars gates of iron bars grattings, railings i/c standards braccess Three coats New surface. (S:I:NO:4,P:NO:69).

48 @Rs:- 1270/83 %sft: Rs:- 610/-

24/. Painting to Doors and windows of any type i/c edges Three coats New surface.(S:I:NO:04,P:NO:68).

41 @Rs:-2116/41 %sft: Rs:- 868/-

ms
DRAUGHTSMAN
EDUCATION WORKS DIVISION
SHIKARPUR.

TOTAL RS:- 124,584/-

[Signature]
EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR.

PART (B) WATER SUPPLY & SANITARY

1/-	Providing & fixing squatting type white glazed of flushline cistern fitting & flush pipe with bend and making requisite numbers of holes in wall plinth & floor for cement concrete 1:2:4 (S.I.NO.1 P.NO.1). A. W.C pan of non less 23" clear opening between flushing rims and 3 gallon flushing tank with 4" dia C.I trape.	01 No:	4802.6	Each	Rs: 4803/-
2/-	Providing and fixing 4" dia C.I soil & vent pipes including Cutting and fitting and extra painting to match the colour of building.(S.I.NO.1 ,P,NO,8)	3.0 Rft:	333.29	Each	Rs: 1000/-
3/-	Providing & fixing 4"x4"x4" dia C.I branch of the required degree with access doors, rubber washer 1/8" thick and bolts & nuts and extra painting to match the colour of the building.(S.I.NO.5.P.NO.8)	01 No:	270.6	Each	Rs: 271/-
4/-	Providing G.I Pipes specials & clamps etc including fixing cutting and fitting complete with and i/c the cost of breaking through walls and roof making good etc . Painting two coats after cleaning the pipe etc. with white zink paint with pigment to match the colour of the building and testing with water to a pressure head of 200 feet and handling. (S.I.NO.1 .P.NO.12)				
(i)	1/2" dia G.I Pipe	3.0 Rft:	73.21	Rft:	Rs: 220/-
(ii)	3/4" dia G.I Pipe	15.0 Rft:	95.79	Rft:	Rs: 1437/-
(iii)	1" dia G.I Pipe	10.0 Rft:	128.55	Rft:	Rs: 1286/-
5/-	Supplying & fixing in position brass bib cock (S.I.NO.1 P.NO.16) b. 3/4" dia brass bib cock. Standard pattern.	01 No:	348.92	Each	Rs: 349/-
6/-	Providing & fixing ball valve (with unsoldered copper ball) made to B.B S. 1212 (S.I.NO.6 .P.NO. 18) (ii) 3/4" dia	01 No:	290.84	Each	Rs: 291/-
7/-	Providing R.C.C.pipe with collars class"B" and digging the trench to required depth and fixing in position including cutting fitting and joining with maxphalt composition & cement mortar 1:1 and testing with water pressure to a head of 4 feet above the top of the highest pipe & refiling with excavated staff. (S.I.NO .2 P.NO.21) (c) 6" dia R.C.C pipe class "B"	3.0 Rft:	199.25	Rft:	Rs: 598/-
8/-	Supplying & Fixing Fiber Glass Tank of approved quality and design and wall thickness as soecified i/c cost of nuts bolts and fixing in plate form of cement concrete 1:3:6 and making connections for in-let out & over flow inlet .outlet flow pipes etc complete.(S.I.NO .3. P.NO.18) a) 250 gallons thickness 3.5 mm	150 Gls:	87/95	P:G1:	Rs: 13193/-
					Rs: 23,448/-
9/-	Supplying and fixing approved quality Electric A.C. motor pumping set (Javed Engineering made) 1-1/4"x1" and delievery with base plate and compiling one horse power single phase motor (siemens make) 60' feet head c 2800 RPM including the cost of nuts and bolts c.c. (1:2:4)	01 No:	12500	P.No	Rs: 12500/-
10/-	Providing and Installation of Hand pump 1-1/4" G.I pipe and colr syainer with wooden shap including cost of 4" feet above ground level embeded in C.C (1:2:4) with iron handle and required same shape with acc and fixing etc complete.	10.0 Rft:	120	Rft:	Rs: 1200/-
(a)	Filter pipe	40.0 Rft:	110	Rft:	Rs: 4400/-
(b)	G.I pipe	01 No:	2500	P.NO	Rs: 2500/-
(c)	H.P Machine				Rs: 20,600/-

DRAUGHTSMAN
EDUCATION WORKS DIVISION
SHIKARPUR.

EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR.

BIDDING DATA

(This section should be filled in by the Engineer/Procuring Agency before issuance of the Bidding Documents).

(a). **Name of Procuring Agency:-** Executive Engineer (Education Works)
Division Shikarpur.

PROVINCIAL ADP SCHEMES

(b). **Brief Description of Works:-** ADP NO: 128 CONSTRUCTION OF 2-ROOMED
SHELTERLESS PRIMARY SCHOOLS IN SINDH
(2007-08 PROGRAMME)

GBPS Shahdad @ Wali Muhammad Jatoi (Ext: Dev:)

(c). **Procuring Agency's address:-** Executive Engineer (Education Works) Division Shikarpur
Near GBHS No.II Shikarpur.

(d). **Estimated Cost:-** 0.150 (Millions).

(e). **Amount of Bid Security:-** 5% (Fill in lump sum amount or in % age of bid amount /estimated cost.

(f). **Period of Bid Validity (days):-** 60 Days (Not more than sixty days).

(g). **Security Deposit:-(including bid security):-** 10%
(in % age of bid amount /estimated cost equal to 10%)

(h). **Percentage, if any, to be deducted from bills:-** 7.50% Income tax

(i). **Deadline for Submission of Bids along with time :-** As Per NIT

(j). **Venue, Time, and Date of Bid Opening:-** Near GBHS II (Shikarpur As Per NIT).

(k). **Time for Completion from written order of commence: -** 03 Months

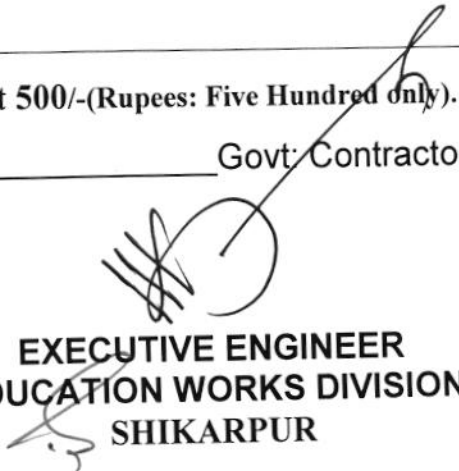
(L). **Liquidity damages:-** -NIL- (0.05 of Estimated Cost or Bid cost per day of delay, but total not exceeding 10%).

(m). **Deposit Receipt No:** _____ **Date:** _____ **Amount:Rs:** _____

Bank _____

(n) **D.R.NO:** _____ **DATED:** _____ **Amount 500/- (Rupees: Five Hundred only).**

(o). **Tender issued to Mr. / M/s** _____ **Govt/ Contractor.**


EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR

SCHEDULE (B).

NAME OF WORK:- CONSTRUCTION OF TWO ROOMED SHELTERLESS PRIMARY SCHOOLS IN SINDH (2007-08-PROGRAMME) AT G:B:P:S: SHAHDAD @ WALI MOHAMMAD JATOI TALUKA KHANPUR DISTRICT SHIKARPUR. (EXT: DEVELOPMENT). ADP: NO: 128).

SR: NO:	ITEM OF WORK.	QTY:	RATE.	UNIT.	AMOUNT.
1/.	Excavation in foundation of building bridges and other structure i/c degbelling dressing refilling around the structure with excavated earth watering and ramming lead upto one chain and lift upto 5 feet in ordinary soil. (S:I:NO:18,P:NO:04).	179	@Rs:- 3176/25	%Cft:	Rs:- 569/-
2/.	Cement concrete brick or stone ballast 1 1/2" to 2" guage with ratio (1:5:10). (S:I:NO:04,P:NO:15).	45	@Rs:-8694/95	%Cft:	Rs:- 3913/-
3/.	Pacca brick work in foundation and plinth with (1:6) ratio. (S:I:NO:04,P:NO:21).	154	@Rs:- 11948/36	%Cft:	Rs:- 18400/-
4/.	R:c:c work in roofslab beams coloumns rafts lintels and other structural members laid in situ or precast laid in position complete in all respects C:C (1:2:4) ratio. (S:I:NO:6(a),P:NO:17).	25.39	@Rs:- 337/-	P:Cft:	Rs:- 8480/-
5/.	Fabrication of mild steel reinforcement forcement concrete i/c cutting bending and laying in position i/c cost of steel binding wire also includes removal of rust from bars. (S:I:NO:8,P:NO:17).	1.133	@Rs:-500 1/70	P:Cwt:	Rs:- 5667/-
6/.	Filling watering ramming earth under floor with New earth (Excavated from outside) lead upto one chain and lift upto 5 feet. (S:I:NO:4,P:NO:18).	40	@Rs:- 8655/20	%Cft:	Rs:- 346/-
7/.	Pacca brick work on Ground floor with (1:6) ratio. (S:I:NO:5(a),P:NO:21).	119	@Rs:- 12674/36	%Cft:	Rs:- 15082/-
8/.	supplying and fixing Iron Girdrs at site of work.	0.910	@Rs:- 3850/-	P:Cwt:	Rs:- 3504/-
9/.	supplying and fixing Iron Tears at site of work.	1.517	@Rs:- 3575/-	P:Cwt:	Rs:- 5423/-

10/. Erection of rolled steel beams or iron rails etc.
(S:I:NO:6,P:NO:91).

2.427 @Rs:- 186/34 P:Qwt: Rs:- 452/-

11/. Second class tiles roofing consisting of 4" earth 1" mud plaster with 34 lbs: of hot bitumen coating sand blinded provided over one layer of 12"x6"x2" tiles i/c curring etc complete.
(S:I:NO:02,P:NO:33).

64 @Rs:-7607/25 %sft: Rs:- 4869/-

12/. P/L single per layer of polythin sheet 0.13 mm thick for water proofing as per specification and instructions given by the Engineer Incharge. (S:I:NO:38,P:NO:38).

64 @Rs:- 10/70 P:sft: Rs:- 685/-

13/. First class deodar wood wrought joinery in doors and windows etc fixed in position i/c chowkats holdfasts handles iron tower bolts cleats nuts and cords with hooks etc deodar wood 1 1/2" thick. (S:I:NO:07,P:NO:58).

21 @Rs:-1273/76 P:sft: Rs:- 26749/-

14/. Cement plaster (1:6) ratio upto 20' height 1/2" thick.
(S:I:NO:13,P:NO:52).

235 @Rs:-2206/60 %sft: Rs:- 5186/-

15/. Cement plaster (1:4) ratio upto 20' height 3/8" thick.
(S:I:NO:11,P:NO:52).

145 @Rs:-2197/52 %sft: Rs:- 3186/-

16/. Cement pointing (1:2) ratio struck joints on walls.
(S:I:NO:19,P:NO:53).

155 @Rs:-1287/44 %sft: Rs:- 1996/-

17/. Cement concrete plain i/c placing compacting finishing and curring etc complete i/c screening and washing of stone aggregates without shuttering ratio (1:2:4). (S:I:NO:05,P:NO:16).

20 @Rs:-14429/25 %sft: Rs:- 2886/-

18/. P/Laying 1" thick Topping cement concrete ratio (1:2:4) i/c surface finishing and dividing into pannels. (2" thick).
(S:I:NO:16,P:NO:42).

12 @Rs:-3275/50 %sft: Rs:- 393/-

19/. Laying floor of approved with glazed tiles 1/4" thick tiles in white cement (1:2) over 3/4" thick cement mortar (1:2) etc complete
(S:I:NO:24,P:NO:43).

20 @Rs:-27678/86 %sft: Rs:- 5536/-

20/. White glazed tiles 1/4" thick tiles Dado jointed in white cement and laid over (1:2) cement sand mortar 3/4" thick i/c finishin (S:I:NO:37,P:NO:45).

90 @Rs:-2825 3/61 %sft: Rs:- 25428/-

21/. White washing Three coats.(S:I:NO:26,P:NO:54).

48 @Rs:-829/95 %sft: Rs:- 398/-

22/. Colour washing Three coats.(S:I:NO:25,P:NO:54).

244 @Rs:-859/90 %sft: Rs:- 2098/-

23/. Painting to Guard bars gates of iron bars grattings, railings i/c standards braccess Three coats New surface. (S:I:NO:4,P:NO:69).

48 @Rs:-1270/83 %sft: Rs:- 610/-

24/. Painting to Doors and windows of any type i/c edges Three coats New surface.(S:I:NO:04,P:NO:68).

41 @Rs:-2116/41 %sft: Rs:- 868/-


DRAUGHTSMAN
EDUCATION WORKS DIVISION
SHIKARPUR.

TOTAL RS:- 142,724/-


EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR.

PART (B) WATER SUPPLY & SANITARY

1/-	Providing & fixing squatting type white glazed of flushline cistern fitting & flush pipe with bend and making requisite numbers of holes in wall plinth & floor for cement concrete 1:2:4 (S.I.NO.1 P.NO.1). A. W.C pan of non less 23" clear opening between flushing rims and 3 gallon flushing tank with 4" dia C.I trape.	01 No:	4802.6	Each	Rs:	4803/-
2/-	Providing and fixing 4" dia C.I soil & vent pipes including Cutting and fitting and extra painting to match the colour of building.(S.I.NO.1 ,P,NO,8)	3.0 Rft:	333.29	Each	Rs:	1000/-
3/-	Providing & fixing 4"x4"x4" dia C.I branch of the required degree with access doors, rubber washer 1/8" thick and built & nuts and extra painting to match the colour of the building.(S.I.NO.5.P.NO.8)	01 No:	270.6	Each	Rs:	271/-
4/-	Providing G.I Pipes specials & clamps etc including fixing cutting and fitting complete with and i/c the cost of breaking through walls and roof .making good etc . Painting two coats after cleaning the pipe etc. with white zink paint with pigment to match the colour of the building and testing with water to a pressure head of 200 feet and handling. (S.I.NO.1 .P.NO.12)					
(i)	1/2" dia G.I Pipe	3.0 Rft:	73.21	Rft:	Rs:	220/-
(ii)	3/4" dia G.I Pipe	15.0 Rft:	95.79	Rft:	Rs:	1437/-
(iii)	1" dia G.I Pipe	10.0 Rft:	128.55	Rft:	Rs:	1286/-
5/-	Supplying & fixing in position brass bib cock (S.I.NO.1 P.NO.16) b. 3/4" dia brass bib cock. Standard pattern.	01 No:	348.92	Each	Rs:	349/-
6/-	Providing & fixing bal valve (with unsoldered copper ball) made to B.B S. 1212 (S.I.NO.6 .P.NO. 18)					
(ii)	3/4" dia	01 No:	290.84	Each	Rs:	291/-
7/-	Providing R.C.C.pipe with collars class"B" and digging the trenche to required depth and fixing in position including cutting fitting and joining with maxphalt composition & cement mortar 1:1 and testing with water pressure to a head of 4 feet above the top of the highest pipe & refiling with exeavated staff. (S.I.NO .2 P.NO.21)					
(c)	6" dia R.C.C pipe class "B"	3.0 Rft:	199.25	Rft:	Rs:	598/-
8/-	Supplying & Fixing Fiber Glass Tank of approved quality and design and wall thickness as soecified i/c cost of nuts bolts and fixing in plate form of cement concrete 1:3:6 and making connections for in-let out & over flow inlet .outlet flow pipes etc complete.(S.I.NO .3. P.NO.18)					
(a)	250 gallons thickness 3.5 mm	150 Gls:	87/95	P:Gl:	Rs:	13193/-
					Rs:	<u>23,448/-</u>
9/-	Supplying and fixing approved quality Electric A.C. motor pumping set (Javed Engineering made) 1-1/4"x1" and delievery with base plate and compiling one horse power single phase motor (siemens make) 60' feet head c 2800 RPM including the cost of nuts and bolts c.c. (1:2:4)					
	Elect: Motor	01 No:	12500	P.No	Rs:	12500/-
10/-	Providing and Installation of Hand pump 1-1/4" G.I pipe and colr syainer with wooden shap including cost of 4" feet above ground level embeded in C.C (1:2:4) with iron handle and required same shape with acc and fixing etc complete.					
(a)	Filter pipe	10.0 Rft:	120	Rft:	Rs:	1200/-
(b)	G.I pipe	40.0 Rft:	110	Rft:	Rs:	4400/-
(c)	H.P Machine	01 No:	2500	P.NO	Rs:	2500/-
					Rs:	<u>20,600/-</u>

Mishra
DRAUGHTSMAN
EDUCATION WORKS DIVISION
SHIKARPUR.

[Signature]
EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR.

BIDDING DATA

(This section should be filled in by the Engineer/Procuring Agency before issuance of the Bidding Documents).

(a). **Name of Procuring Agency:-** Executive Engineer (Education Works)
Division Shikarpur.

PROVINCIAL ADP SCHEMES

(b). **Brief Description of Works:-** ADP NO: 128 CONSTRUCTION OF 2-ROOMED
SHELTERLESS PRIMARY SCHOOLS IN SINDH
(2007-08 PROGRAMME)

GBPS Haji Noor Muhammad Jaffry (Ext: Dev:)

(c). **Procuring Agency's address:-** Executive Engineer (Education Works) Division Shikarpur
Near GBHS No.II Shikarpur.

(d). **Estimated Cost:-** 0.300 (Millions).

(e). **Amount of Bid Security:-** 5% (Fill in lump sum amount or in % age of bid amount /estimated cost.

(f). **Period of Bid Validity (days):-** 60 Days (Not more than sixty days).

(g). **Security Deposit:-(including bid security):-** 10%
(in % age of bid amount /estimated cost equal to 10%)

(h). **Percentage, if any, to be deducted from bills:-** 7.50% Income tax

(i). **Deadline for Submission of Bids along with time :-** As Per NIT

(j). **Venue, Time, and Date of Bid Opening:-** Near GBHS II (Shikarpur As Per NIT).

(k). **Time for Completion from written order of commence: -** 03 Months

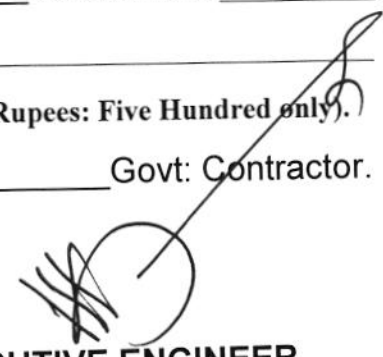
(L). **Liquidity damages:-** -NIL- (0.05 of Estimated Cost or Bid cost per day of delay, but total not exceeding 10%).

(m). **Deposit Receipt No:** _____ **Date:** _____ **Amount:Rs:** _____

Bank _____

(n) **D.R.NO:** _____ **DATED:** _____ **Amount 500/- (Rupees: Five Hundred only).**

(o). **Tender issued to Mr. / M/s** _____ **Govt: Contractor.**


EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR

SCHEDULE (B).

NAME OF WORK:- CONSTRUCTION OF TWO ROOMED SHELTERLESS PRIMARY SCHOOLS IN SINDH (2007-08-PROGRAMME) AT G:B:P:S:HAJI NOOR MOHD JAFFRY TALUKA KHANPUR DISTRICT SHIKARPUR. (EXT:DEVELOPMENT). (ADP:NO: 128).

SR:NO:	ITEM OF WORK.	QTY:	RATE.	UNIT.	AMOUNT.
1/.	Excavation in foundation of building bridges and other structure i/c degbelling dressing refilling around the structure with excavated earth watering and ramming lead upto one chain and lift upto 5 feet in ordinary soil.(S:I:NO:18,P:NO:04).	268.0	@Rs:-3176/25	%Cft:	Rs:- 5107/00
2/.	Cement concrete brick or stone ballast 1 1/2" to 2" guage with ratio (1:5:10).(S:I:NO:04,P:NO:15).	79.0	@Rs:-8694/95	%Cft:	Rs:- 6869/00
3/.	Pacca brick work in foundation and plinth with (1:6) ratio. (S:I:NO:04,P:NO:21).	264.0	@Rs:-11948/36	%Cft:	Rs:- 31544/00
4/.	R:c:c work in roofslab beams coloumns rafts lintels and other structural members laid in situ or precast laid in position complete in all respects C:C (1:2:4) ratio.(S:I:NO:6(a),P:NO:17).	44.0	@Rs:- 337/-	P:Cft:	Rs:- 14828/00
5/.	Fabrication of mild steel reinforcement forcement concrete i/c cutting bending and laying in position i/c cost of steel binding wire also includes removal of rsut from bars.(S:I:NO:8,P:NO:17).	1.964	@Rs:-500 1/70	P:Cwt:	Rs:- 9843/00
6/.	Filling watering ramming earth under floor with New earth (Excavated from outside) lead upto one chain and lift upto 5 feet. (S:I:NO:4,P:NO:18).	141.0	@Rs:- 8655/20	%Cft:	Rs:- 1220/00
7/.	Pacca brick work on Ground floor with (1:6) ratio. (S:I:NO:5(a),P:NO:21).	224.0	@Rs:-12674/36	%Cft:	Rs:- 28391/00
8/.	Supplying and fixing Iron Girdrs at site of work.	1.366	@Rs:-3850/-	P:Cwt:	Rs:- 5259/00
9/.	Supplying and fixing Iron Tears at site of work.	2.468	@Rs:-3575/-	P:Cwt:	Rs:- 8809/00

10/. Errection of rolled steel beams or iron rails etc.
(S:I:NO:6,P:NO:91).

3.83 @Rs:- 186/34 P:Cwt: Rs:- 714/00

11/. Second class tiles roofing consisting of 4" earth 1" mud plaster with 34 lbs. of hot bitumen coating sand blinded provided over one layer of 12"x6"x2" tiles i/c curring etc complete.
(S:I:NO:02,P:NO:33).

92.0 @Rs:-7607/25 %Sft: Rs:- 6999/00

12/. P/L single per layer of polythin sheet 0.13 mm thick for water proofing as per specification and instructions given by the Engineer Incharge.(S:I:NO:38,P:NO:38).

92.0 @Rs:- 10/70 P:Sft: Rs:- 984/00

13/. First class deodar wood wrought joinery in doors and windows etc fixed in position i/c chowkats holdfasts handles iron tower bolts cleats nuts and cords with hooks etc deodar wood 1 1/2" thick. (S:I:NO:07,P:NO:58).

34.0 @Rs:-1273/76 P:Sft: Rs:- 43308/00

14/. Cement plaster (1:6) ratio upto 20' height 1/2" thick.
(S:I:NO:13,P:NO:52).

503.0 @Rs:-2206/60 %Sft: Rs:- 11099/00

15/. Cement plaster (1:4) ratio upto 20' height 3/8" thick.
(S:I:NO:11,P:NO:52).

503.0 @Rs:-2197/52 %Sft: Rs:- 11054/00

16/. Cement pointing (1:2) ratio struck joints on walls.
(S:I:NO:19,P:NO:53).

164.0 @Rs:-1287/44 %Sft: Rs:- 2111/00

17/. Cement concrete plain i/c placing compacting finishing and curring etc complete i/c screening and washing of stone aggregates without shuttering ratio (1:2:4).(S:I:NO:05,P:NO:16).

5.0 @Rs:-14429/25 %Sft: Rs:- 721/00

18/. P/Laying 1" thick Topping cement concrete ratio (1:2:4) i/c surface finishing and dividing into pannels. (2" thick).
(S:I:NO:16,P:NO:42).

26.0 @Rs:-3275/50 %Sft: Rs:- 852/00

19/. Laying floor of approved with glazed tiles 1/4" thick tiles in white cement (1:2) over 3/4" tholk cement mortar (1:2) etc complete
(S:I:NO:24,P:NO:43).

16.0 @Rs:-27678/86 %Sft: Rs:- 4429/00

20/. White glazed tiles 1/4" thick tiles Dado jointed in white cement and laid over (1:2) cement sand mortar 3/4" thick i/c finish in (S:I:NO:37,P:NO:45).

96.0 @Rs:-2825.3/61 = = %Sft: Rs:- 27123/00

21/. White washing Three coats.(S:I:NO:26,P:NO:54).

68.0 @Rs:-829/95 %Sft: Rs:- 564/00

22/. Colour washing Three coats.(S:I:NO:25,P:NO:54).

610.0 @Rs:-859/90 %Sft: Rs:- 5245/00

23/. Painting to Guard bars gates of iron bars grattings, railings i/c standards braccs Three coats New surface. (S:I:NO:4,P:NO:69).

82.0 @Rs:-1270/83 %Sft: Rs:- 1042/00

24/. Painting to Doors and windows of any type i/c edges Three coats New surface.(S:I:NO:04,P:NO:68).

33.0 @Rs:-2116/41 %Sft: Rs:- 698/00


DRAUGHTSMAN
EDUCATION WORKS DIVISION
SHIKARPUR.

TOTAL RS:- 228,813/00


EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR.

PART (B) WATER SUPPLY & SANITARY

Providing & fixing squatting type white glazed of flushline cistern fitting & flush pipe with bend and making requisite numbers of holes in wall plinth & floor for cement concrete 1:2:4 (S.I.NO.1 P.NO.1).

A. W.C pan of non less 23" clear opening between flushing rims and 3 gallon flushing tank with 4" dia C.I trape.

02 No: 4802.6 Each Rs: 9605/00

2/- Providing and fixing 4" dia C.I soil & vent pipes including Cutting and fitting and extra painting to match the colour of building.(S.I.NO.1 ,P.NO.8)

3.0 Rft: 333.29 Each Rs: 1000/-

3/- Providing & fixing 4"x4"x4" dia C.I branch of the required degree with access doors, rubber washer 1/8" thick and built & nuts and extra painting to match the colour of the building.(S.I.NO.5.P.NO.8)

01 No: 270.6 Each Rs: 271/-

4/- Providing G.I Pipes specials & clamps etc including fixing cutting and fitting complete with and i/c the cost of breaking through walls and roof .making good etc . Painting two coats after cleaning the pipe etc. with white zink paint with pigment to match the colour of the building and testing with water to a pressure head of 200 feet and handling. (S.I.NO.1 .P.NO.12)

(i) 1/2" dia G.I Pipe 3.0 Rft: 73.21 Rft: Rs: 220/-

(ii) 3/4" dia G.I Pipe 15.0 Rft: 95.79 Rft: Rs: 1437/-

(iii) 1" dia G.I Pipe 10.0 Rft: 128.55 Rft: Rs: 1286/-

5/- Supplying & fixing in position brass bib cock (S.I.NO.1 P.NO.16)

b. 3/4" dia brass bib cock. Standard pattern. 01 No: 348.92 Each Rs: 349/-

6/- Providing & fixing bal valve (with unsoldered copper ball) made to B.B S. 1212 (S.I.NO.6 .P.NO. 18)

(ii) 3/4" dia 01 No: 290.84 Each Rs: 291/-

7/- Providing R.C.C.pipe with collars class"B" and digging the trenche to required depth and fixing in position including cutting fitting and joining with maxphalt composition & cement mortar 1:1 and testing with water pressure to a head of 4 feet above the top of the highest pipe & refiling with exeavated staff. (S.I.NO .2 P.NO.21)

(c) 6" dia R.C.C pipe class "B" 3.0 Rft: 199.25 Rft: Rs: 598/-

8/- Supplying & Fixing Fiber Glass Tank of approved quality and design and wall thickness as soecified i/c cost of nuts bolts and fixing in plate form of cement concrete 1:3:6 and making connections for in-let out & over flow inlet .outlet flow pipes etc complete.(S.I.NO .3. P.NO.18)

a) 250 gallons thickness 3.5 mm 150 Gls: 87/95 P:Gls: Rs: 13193/-

Rs: 28,250/00

9/- Supplying and fixing approved quality Electric A.C. motor pumping set (Javed Engineering made) 1-1/4"x1" and delievery with base plate and compiling one horse power single phase motor (siemens make) 60' feet head c 2800 RPM including the cost of nuts and bolts c.c. (1:2:4)

Elect. Motor 01 No: 12500 P.No Rs: 12500/-

10/- Providing and Installation of Hand pump 1-1/4" G.I pipe and colr syainer with wooden shap including cost of 4" feet above ground level embded in C.C (1:2:4) with iron handle and required same shape with acc and fixing etc complete.

(a) Filter pipe 10.0 Rft: 120 Rft: Rs: 1200/-

(b) G.I pipe 40.0 Rft: 110 Rft: Rs: 4400/-

(c) H.P Machine 01 No: 2500 P.No Rs: 2500/-

Rs: 20,600/-

M. S. D.
DRAUGHTSMAN
EDUCATION WORKS DIVISION
SHIKARPUR.

EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR.

BIDDING DATA

(This section should be filled in by the Engineer/Procuring Agency before issuance of the Bidding Documents).

(a). **Name of Procuring Agency:-** Executive Engineer (Education Works)
Division Shikarpur.

PROVINCIAL ADP SCHEMES

(b). **Brief Description of Works:-** ADP NO: 129 INTRODUCTION OF COMPUTER
EDUCATION IN EXISTING MIDDLE SCHOOLS IN
SINDH (2007-08 PROGRAMME)

GGMS Sultankot (Ext: Dev:)

(c). **Procuring Agency's address:-** Executive Engineer (Education Works) Division Shikarpur
Near GBHS No.II Shikarpur.

(d). **Estimated Cost:-** 0.150 (Millions).

(e). **Amount of Bid Security:-** 5% (Fill in lump sum amount or in % age of bid amount /estimated cost).

(f). **Period of Bid Validity (days):-** 60 Days (Not more than sixty days).

(g). **Security Deposit:-(including bid security):-** 10%
(in % age of bid amount /estimated cost equal to 10%)

(h). **Percentage, if any, to be deducted from bills:-** 7.50% Income tax

(i). **Deadline for Submission of Bids along with time :-** As Per NIT

(j). **Venue, Time, and Date of Bid Opening:-** Near GBHS II (Shikarpur As Per NIT).

(k). **Time for Completion from written order of commence: -** 03 Months

(L). **Liquidity damages:-** -NIL- (0.05 of Estimated Cost or Bid cost per day of delay, but total not exceeding 10%).

(m). **Deposit Receipt No:** _____ **Date:** _____ **Amount:Rs:** _____

Bank _____

(n) **D.R.NO:** _____ **DATED:** _____ **Amount 500/- (Rupees: Five Hundred only).**

(o). **Tender issued to Mr. / M/s** _____ **Govt. Contractor.**


EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR

SCHEDULE "B".

NAME OF WORK: =

INTRODUCTION OF COMPUTER EDUCATION IN EXISTING
SECONDARY HIGHER SECONDARY SCHOOL AT G:G:M:S:
SULTAN KOT TALUKA AND DISTRICT SHIKARPUR:

SR: NO:	ITEM OF WORK:	QTY:	RATE:	UNIT:	AMOUNT:
1/.	Cement plaster (1;6;) upto 20'high 1/2"thick;	3095.0	@RS: =2206/70	%sft;	Rs:68294/=
2/.	Cement plaster (1;4;) upto 20'high 3/8"thick;	3095.0	@RS: =2197/52	%sft;	Rs:68013/=
3/.	Pacca brick work in foundation and plinth in cement sand moter ratio (1;6;);	53.0	@RS: =11948/36	%cft;	Rs:6273/00
4/.	First class deodar wood wrought joinery in doors and windows etc fixed in position i/c deodar panelled and glazed (b) 1-3/4"thick; etc complter;	146.0	@RS: =1273/76	P; sft;	Rs:185969/=

[Signature]
DRAUGHTSMAN
EDUCATION WORKS DIVISION
SHIKARPUR.

[Signature]
Total Rs: = 328,549/00.

[Signature]
EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR.

BIDDING DATA

(This section should be filled in by the Engineer/Procuring Agency before issuance of the Bidding Documents).

(a). **Name of Procuring Agency:-** Executive Engineer (Education Works)
Division Shikarpur.

PROVINCIAL ADP SCHEMES

(b). **Brief Description of Works:-** ADP NO: 129 INTRODUCTION OF COMPUTER
EDUCATION IN EXISTING MIDDLE SCHOOLS IN
SINDH (2007-08 PROGRAMME)

GBMS Sanjrani Muhallah U.C-5 (Ext: Dev:)

(c). **Procuring Agency's address:-** Executive Engineer (Education Works) Division Shikarpur
Near GBHS No.II Shikarpur.

(d). **Estimated Cost:-** 0.500 (Millions).

(e). **Amount of Bid Security:-** 5% (Fill in lump sum amount or in % age of bid amount /estimated cost.

(f). **Period of Bid Validity (days):-** 60 Days (Not more than sixty days).

(g). **Security Deposit:-(including bid security):-** 10%
(in % age of bid amount /estimated cost equal to 10%)

(h). **Percentage, if any, to be deducted from bills:-** 7.50% Income tax

(i). **Deadline for Submission of Bids along with time :-** As Per NIT

(j). **Venue, Time, and Date of Bid Opening:-** Near GBHS II (Shikarpur As Per NIT).

(k). **Time for Completion from written order of commence: -** 03 Months

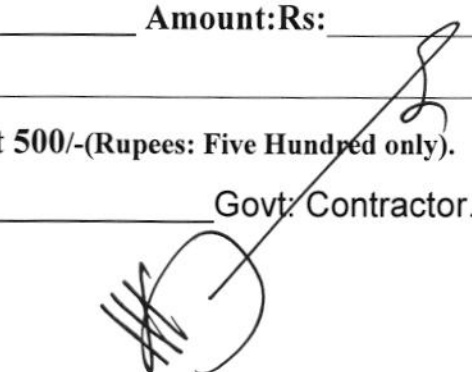
(L). **Liquidity damages:-** -NIL- (0.05 of Estimated Cost or Bid cost per day of delay, but total not exceeding 10%).

(m). **Deposit Receipt No:** _____ **Date:** _____ **Amount:Rs:** _____

Bank _____

(n) **D.R.NO:** _____ **DATED:** _____ **Amount 500/-**(Rupees: Five Hundred only).

(o). **Tender issued to Mr. / M/s** _____ **Govt. Contractor.**


EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR

SCHEDULE "B".

NAME OF WORK: =

INTRODUCTION OF COMPUTER EDUCATION IN EXISTING
MIDDLE SCHOOL IN SINDH 2007-2008 PROG: AT: G:B:M:S
SANJRANI MUHALLA U/C -05 TALUKA AND DISTRICT
SHIKARPUR: (EXT: DEVELOPMENT:):

Sl. NO:	ITEM OF WORK:	QTY:	RATE:	UNIT:	AMOUNT:
1/.	Pacca brick work in G/Floor in cement sand moter ratio (1;6;);	686.0	@RS: =12674/36	%cft;	Rs:8695/-
2/.	R:C:C: Work in roof slab beams colomsn rafta lineis and other snctural members laid in sattu or precast laid in position etc complter ratio (1;2;4;);	737.84	@RS: =337/-	P; cft;	Rs: 248652/-
3/.	Fabrication of mild steel reinforcement for cement concrete i/c cutting bending binding and wire also i/c removal of rust from bars.	36.233	@RS: =5001/70	P; cwt;	Rs: 181227/=
4/.	Cement concrete brick or stone ballast 1½" to 2" guage ratio 1;5;10 in cement sand moter;	229.0	cft; @RS: =8694/95	%cft;	Rs: 19911/00.
5/.	Cement plster (1;6;) upto 20'high 1/2"thick;	3722.0	cft; @RS: =2206/60	%cft;	Rs: 82130/=
6/.	cement plster (1;4;) upto 20'high 3/8"thick;	3722.0	cft @RS: =2197/52	%cft;	Rs: 81792/00

[Signature]
DRAUGHTSMAN
EDUCATION WORKS DIVISION
SHIKARPUR.

Total Rs: 622,407/00.

[Signature]
EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR.

BIDDING DATA

(This section should be filled in by the Engineer/Procuring Agency before issuance of the Bidding Documents).

(a). **Name of Procuring Agency:-** Executive Engineer (Education Works)
Division Shikarpur.

PROVINCIAL ADP SCHEMES

(b). **Brief Description of Works:-** ADP NO: 129 INTRODUCTION OF COMPUTER
EDUCATION IN EXISTING MIDDLE SCHOOLS IN
SINDH (2007-08 PROGRAMME)

GGMS Kot Akhtar Muhammad Shaikh (Ext: Dev:)

(c). **Procuring Agency's address:-** Executive Engineer (Education Works) Division Shikarpur
Near GBHS No.II Shikarpur.

(d). **Estimated Cost:-** 0.350 (Millions).

(e). **Amount of Bid Security:-** 5% (Fill in lump sum amount or in % age of bid amount /estimated cost.

(f). **Period of Bid Validity (days):-** 60 Days (Not more than sixty days).

(g). **Security Deposit:-(including bid security):-** 10%
(in % age of bid amount /estimated cost equal to 10%)

(h). **Percentage, if any, to be deducted from bills:-** 7.50% Income tax

(i). **Deadline for Submission of Bids along with time :-** As Per NIT

(j). **Venue, Time, and Date of Bid Opening:-** Near GBHS II (Shikarpur As Per NIT).

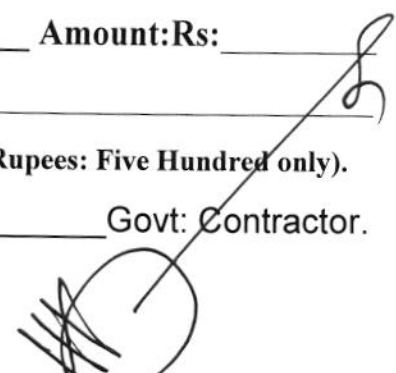
(k). **Time for Completion from written order of commence: -** 03 Months

(L). **Liquidity damages:-** -NIL- (0.05 of Estimated Cost or Bid cost per day of delay, but total not exceeding 10%).

(m). **Deposit Receipt No:** _____ **Date:** _____ **Amount:Rs:** _____
Bank _____

(n) **D.R.NO:** _____ **DATED:** _____ **Amount 500/- (Rupees: Five Hundred only).**

(o). **Tender issued to Mr. / M/s** _____ **Govt: Contractor.**


EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR

SCHEDULE "B".

NAME OF WORK: =

INTRODUCTION OF COMPUTER EDUCATION IN EXISTING
MIDDLE SCHOOL IN SINDH AT G.G.M.S. KOT AKTAR
MUHAMMAD TALUKA AND DISTRICT SHIKARPUR.
(EXT. DEVELOPEMENT):

SR: NO:	ITEM OF WORK:	QTY:	RATE:	UNIT:	AMOUNT.
1/.	Cement plstr (1;6;) upto 20'high 1/2"thick;	4274.0	@RS: =2206/60	%sft;	Rs:94310/-
2/.	cemen plster (1;4;) upto 20'high 3/8"thick;	4274.0	@RS: =2197/52	%sft;	Rs:93922/-
3/.	Providing and laying 1"thick topping cement concrete (1;2;4;); i/c surfade finishing and dividing into pannels 3"thick;				
(a)	3"thick;	1118.0	@RS: =4411/82	%sft;	Rs:49326/00.
(b)	2"thick;	1411.0	@RS: =3275/50	%sft;	Rs:46217/00.
4/.	First class deodar wood wrought joinery in doors and windows etc type i/c heldee fasts hinges iron tower bolts, with fixing of handles 1-3/4"thick etc compiter;	1140.0	@RS: 1273/76	%sft;	Rs: 176,326/

[Signature]
DRAUGHTSMAN
EDUCATION WORKS DIVISION
SHIKARPUR.

Total Rs: 4,02,099/00.

[Signature]
EXECUTIVE ENGINEER
EDUCATION WORKS DIVISION
SHIKARPUR.