

Name of work: STRENGTHENING AND UP GRADUATION OF SOCIAL WELFARE TRAINING INSTITUTE KARACHI  
(ADP 1823 OF 2015-2016) INTERNAL ELECTRIFICATION OF GROUND FLOOR & FIRST FLOOR)  
SCHEDULE B

S. No.	Description	Qty	Rate	Unit	Amount
1	Wiring for light or fan point with 3/029 PVC insulated wire in 20mm ¾ PVC conduit recessed in the wall or col as req.	154.00 Pts	1130/-	P.Pts	174020
2	Wiring for light or fan point with 3/029 PVC insulated wire in 20mm (3/4)channel patti on surface as required.(S.I.129/18)	192-Pts	910/-	P.pts	174720
3	Wiring for Plug point with 3/029 PVC insulated wire in 20mm (3/4)channel patti on surface as required.(S.I.134/15)	65-Pts	742/-	P.Pts	48230
4	Wiring for Call Bell point with 3/029 PVC insulated wire in 20mm (3/4)channel patti on surface as required.(S.I.134/15)	8-Pts	1380/-	P.Pts	11040
5	P/L main or Sub main PVC insulated with size 2-7/029 (6mm <sup>2</sup> ) copper conductor in ¾ " dia PVC conduit on surface.(S.I.5/1)	1157-Meter	171/-	P.Meter	197847
6	P/F Bacolite Ceiling Rose with two terminals (S.I.226/33)	250-Nos	72/-	Each	18000
7	P/F one way SP 5-amps switch flush type (33/219)	200-Nos	54/-	"	10800
8	P/F two Pin 5-amp plug socket flush type (225/33)	65-Nos	83/-	"	5395
9	P/F Circuit Brackers 6,10,15,20, 30,40,50 & 63 amps SP (TB SS) on a prepared board as required.(S.I.203/31)	126-Nos	916/-	Each	115416
10	P/F Circuit Brackers ,15,20, 30,40,50 60,&75&100 amps TP (XS-100NS) on a prepared board as required.(S.I.207/31)	15-Nos	9261/-	Each	138915
11	P/F Circuit Bracker 250 amp TP setting 160-250 amps (XS-250N) on prepared board as required.(S.I.209/31)	1-No	27411/-	Each	27411
12	P/L main or Sub main PVC insulated with size 2-7/044 (6mm <sup>2</sup> ) copper conductor in 1" dia PVC conduit on surface.(S.I.5/1)	756.00	305/-	P.Meter	230580
13	P/L main or Sub main PVC insulated with size 4-7/064 (16mm <sup>2</sup> ) copper conductor	58.00	1169/-	P.Meter	67802

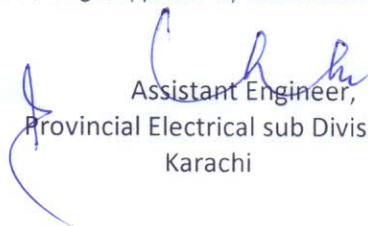
	in 1-1/2" dia PVC conduit on surface.(S.I.5/1)				
	Total				1220176
	Part B N.S.I				
1	P/F Light Plug fancy type imported quality with fancy PVC concealed board and necessary screws and electric wiring and connection of approved quality make & quality.	90-Nos		Each	
2	P/F Power Plug fancy type imported quality with fancy PVC concealed board and necessary screws and electric wiring and connection of approved quality make & quality.	36-Nos		Each	
3	P/F distribution board 16 gauge of accommodate for main or sub main circuit bracket bus bar and other similar job double shutter painted with enameled paint as directed by the Engineer Incharge.	33.00 Sft		P.sft	
4	P/F Energy Saver lamp 220 watts of approved quality Philips or equivalent make fitted on wall ceiling & paneled upto required height in existing holder as directed by the Engineer Incharge.	86-Nos		Each	
5	P/F Fan dimmer or ceiling fan Pak Royal GFC of approved quality & make as directed by the Engineer Incharge.	55-Nos		"	
6	P/F Exhaust Fan 18" dia size Plastic metal body i/c making hole in wall to required size i/c cutting chiseling & making corner with with cement sand mortar 1.4 Pak Millat Royal make in/c removing dismantled material from site to out side of premises in proper place as directed by the Engineer Incharge.	1-No		Each	
7	P/F Phase Indicating lamp with lamp red yellow blue fitted in panel board with 3/029 wiring as directed by the Engineer Incharge.	15-Nos		"	
8	S/F 1.5 mm PVC insulated copper wire single conduit as earth continuity conductor i/c connecting	2480.00 Rft		P.Rft	

	man copper wire to metallic body as directed by Engineer Incharge.				
9	P/F Call bell Ding Dong type of approved quality & make as directed by the Engineer Incharge	8-Nos		Each	
10	P/F LED Liner LED light 2x20 watts led rods colour temperature 6000 K in put voltage 170/265 volts (Imported)	8-Nos		"	
11	P/F False Ceiling spot light fancy type round shape of glass and 2-holder and energy saver of approved quality	36-Nos		"	
	Total B				
	G Total				

#### TERMS & CONDITION

1. Any typographical errors in the schedule B are subject to the correct condition with Reference to the schedule of rate General 2012 enforced from 12-07-2012 as approved by the SRC Sindh.
2. Arbitration clause stands deleted from the agreement.
3. No Premium shall be paid on Non Schedule Items
4. 100% well Graded crushed bajri shall be used in items of work without any extra payment.
5. No any items of exveceed then the quantity provided in the schedule B without prior of the Executive Engineer.
6. All sample of items should be got approved by the Executive Engineer

Contractor

  
Assistant Engineer,  
Provincial Electrical sub Division-XII,  
Karachi