

Name of work: M/R to Chief Minister House Karachi Day to Day Complaints Electric Work  
(Al-Hukum Mosque)

Schedule B

| S.No.      | Description   | Qty       | Rate   | Unit                     | Amount |
|------------|---|-----------|--------|--------------------------|--------|
| 1          | Wiring for light or fan point with 3/029 PVC insulated wire in 20mm $\phi$ PVC conduit recessed in the wall or col as req. <i>12/15</i>   | 20.00     | 1130/- | P.Pts                    | 22600  |
| 2          | Wiring for Plug point with 3/029 PVC insulated wire in 20mm (3/4) PVC conduit recessed in the wall or col as required. on .(S.I.129/18)   | 10.00     | 985/-  | P.Pts                    | 9850   |
| 3          | P/F Circuit Brackers ,15,20, 30,40,50 60,&75&100 amps TP (XS-100NS) on a prepared board as required.(S.I.207/31)  | 1-Nos     | 9261/- | Each<br><i>P.No.</i>     | 9261   |
| 4          | P/F Circuit Brackers 6,10,15,20, 30,40,50 & 63 amps SP (TB <i>55</i> ) on a prepared board as required.(S.I.203/31)   | 18-Nos    | 916/-  | Each<br><i>P.No.</i>     | 16488  |
| 5          | P/F Circuit Brackers ,15,20, 30,40,50 60, amps TP (XE-100CS)(CB) on a prepared board as required.(S.I.206/31)   | 4-No      | 5521/- | Each<br><i>P.No.</i>     | 22084  |
| 5          | P/L main or Sub main PVC insulated with size 2-7/029 (6mm <sup>2</sup> ) copper conductor in 1" dia PVC conduit on surface.(S.I.5/1)  | 100-Meter | 222/-  | P.Meter                  | 22200  |
| 6          | P/L main or Sub main PVC insulated with size 2-7/044 (6mm <sup>2</sup> ) copper conductor in <i>1 1/4</i> dia PVC conduit on surface.(S.I.5/1) <i>19/21</i>                               | 150.00    | 305/-  | P.Meter                  | 45750  |
| Total      |   |           |        |                          | 148233 |
| Part B NSI |   |           |        |                          |        |
| 1          | P/F Distribution board double shutter size (1-1/2"x1-1/4") to accommodate heavy duty for Circuit Brackers i/c painting enameled paint for other similar job on prepared board on surface. | 3,12      |        | Sft                      |        |
| 2          | P/F Energy Saver 24 watts Philips or equilenet quality as directed by the E.I   | 16-nos    |        | "                        |        |
| 3          | S/F Fancy Switch socket with board as approved quality by the Engineer Incharge etc complete.   | 30-Nos    |        | Each                     |        |
| 4          | P/F Universal light Plug 10-amp imported quality i/c necessary electric connection etc complete.  | 10-Nos    |        | <input type="checkbox"/> |        |
| 5          | P/F Power Plug 15-amps imported quality i/c necessary electric connection etc complete.   | 8-Nos     |        | <input type="checkbox"/> |        |

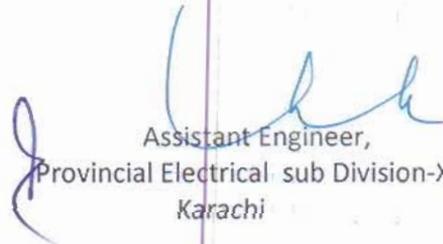
**CHECKED**

|    |  |        |                          |  |
|----|--|--------|--------------------------|--|
| 6  | P/F Fancy Tube Light 2-40 watt fancy shade i/c chock & starter i/c necessary electric connection etc complete.   | 10-Nos | <input type="checkbox"/> |  |
| 7  | P/F Ceiling Fan 56" sweep make GFC imported or equalent quality i/c necessary electric connection as req.  | 6-Nos  | "                        |  |
| 8  | S/F Fancy Fan Dimmer as approved quality etc complete.   | 6-Nos  | <input type="checkbox"/> |  |
| 9  | P/F Wall Bracket Fan 18" sweep make GFC imported or equalent quality i/c necessary electric connection as req.   | 8-Nos  | "                        |  |
| 10 | P/F LED Pannel Light (Energy Saving Effect)(24"x24")(Model 6500 k) for using false ceiling imported quality i/c making connection as per requirement of site etc complete. | 2-Nos  |                          |  |
|    | Total  |        |                          |  |
|    | G Total  |        |                          |  |

TERMS & CONDITION

1. Any typographical errors in the schedule B are subject to the correct condition with Reference to the schedule of rate General 2012 enforced from 12-07-2012 as approved by the SRC Sindh.
2. Arbitration clause stands deleted from the agreement.
3. No Premium shall be paid on Non Schedule Items
4. 100% well Graded crushed bajri shall be used in items of work without any extra payment.
5. No any items of exveceed then the quantity provided in the schedule B without prior of the Executive Engineer.
6. All sample of items should be got approved by the Executive Engineer

Contractor

  
Assistant Engineer,  
Provincial Electrical sub Division-XII,  
Karachi