
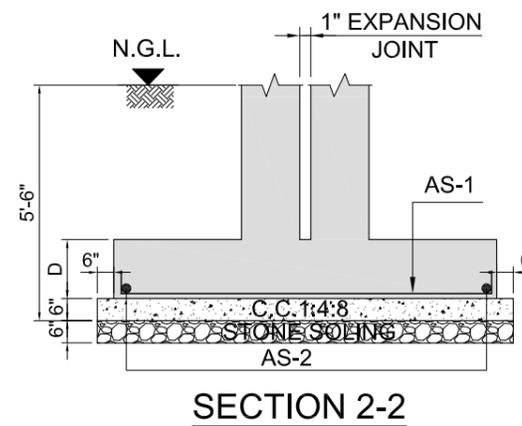
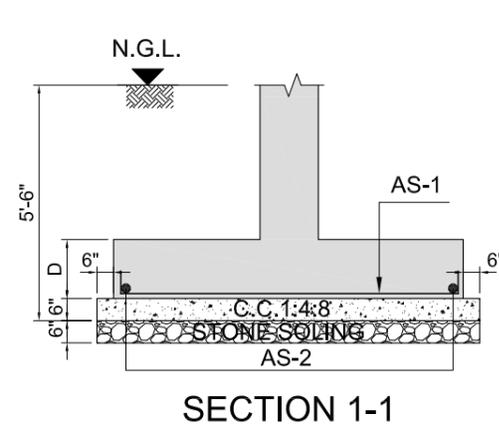
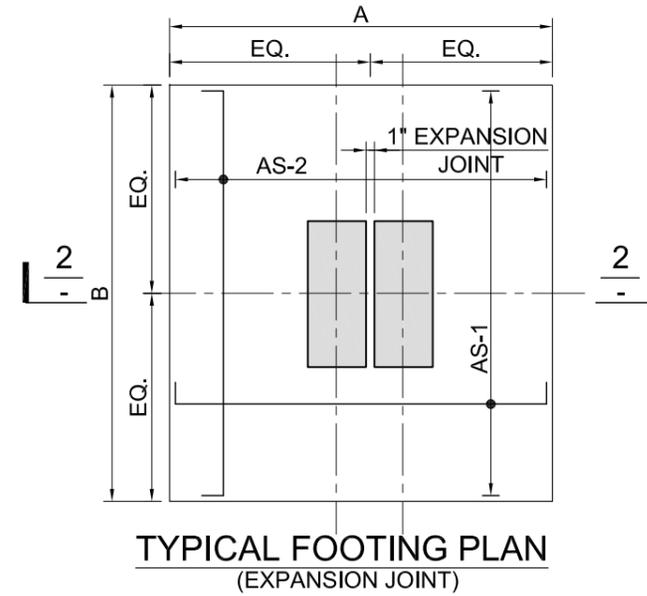


SCHEDULE OF R . C . C . FOOTING						
MARK	SIZE		DEPTH	REINFORCEMENT		REMARK
	A	B		AS-1	AS-2	
F1	5'-6"	6'-6"	30"	#4@5"C/C	#4@5"C/C	
F2	7'-0"	8'-0"	30"	#4@4"C/C	#4@4"C/C	
F3	8'-0"	9'-0"	30"	#5@6"C/C	#5@6"C/C	
F4	9'-0"	10'-0"	30"	#5@5"C/C	#5@5"C/C	
F5	10'-0"	11'-0"	30"	#5@4"C/C	#5@4"C/C	

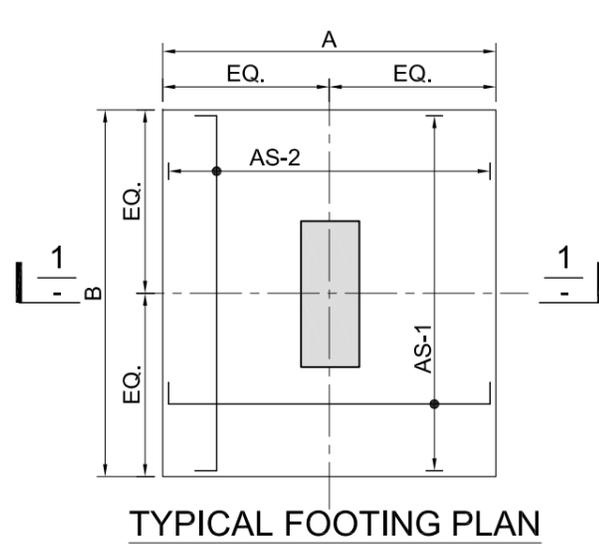

CONSULTANTS  
**W**asif nazar associates  
 CONSULTING ENGINEERS, ARCHITECTS  
 PLANNERS AND PROJECT MANAGERS.  
 B-28, BLOCK NO-15,  
 GULSHAN-E-IQBAL, KARACHI.  
 P.H. 34820497 - 34982561

CLIENT  
**HEJ. RESEARCH INSTITUTE  
 OF CHEMISTRY UNIVERSITY  
 OF KARACHI.**

- NOTES:
- FOR GENERAL NOTES REFER DRAWING NO. N-HEJ-01 AND N-HEJ-02.
  - ALL DRAWING REQUIRED APPROVAL FROM CLIENT BEFORE PROCEEDING OF WORK.

TENDER DRAWING

-	-	ISSUED FOR TENDER	NOMAN
NO.	DATE	DESCRIPTION	BY

DESIGNED BY: A. H. MANSURI	DRAWN BY: NOMAN
CHECKED / CO-ORDINATED BY: WASIF NAZAR	APPROVED BY: -

PROJECT  
**Strengthening Of Research Program**

TITLE  
**VIROLOGY LABORATORY  
 Foundation Details**

HEJ	SCALE: N.T.S	JOB NO. P-1701
	DRAWING No. ST-HEJ-VL-03	REVISION. -
	DATE. OCT 2016	PLOT SCALE. A3