## OFFICE OF THE EXECUTIVE ENGINEER (B&R) ORANGI ZONE DMC (WEST) KARACHI

Tel: 36697869 & 36660102

NO.EE/B&R/O.Z/DMC/W/3/2017

DATED.27/09/2017

#### TENDER NOTICE

(Through Website of SPPRA & Orangi Zone DMC (West))

Tender in sealed covers are invited for the following work (s) under SPP Rules 2010 from the firms having adequate experience in the relevant field. The tentative cost of work is under Rs. 1.0 Million.

S. No	Name of Work	E/Cost Rs.	Bids Security 2%	Cost of Tender
1	Repairing of Rcc Pipe 15" dia Near Taj Muhammad House at Umer Baloch Mohallah UC-22	Rs. 7,61,727/- +O/R	Rs.20,000/-	Rs.1000/-
2	Rehabilitation of Sewerage System by 15"dia Pipe Near Baba Elementary School, Usmani Mohallah UC-22	Rs. 7,70,864/- +O/R	Rs. 20,000/-	Rs.1000/-
3	Repair of Drain / Slab Near Asra General Stor Masqati Mohallah UC- 21	Rs. 2,18,594/- +O/R	Rs. 20,000/-	Rs.1000/-
4	Rehabilitation / Improvement of Drain & Rcc Slab Near UC-21 Office Masqati Mohallah	Rs.2,19,219/- +O/R	Rs. 20,000/-	Rs.1000/-
5	Repairing of Rcc Pipe and Manholes Qamer House Zia Colony UC-23	Rs. 7,14,484/- +O/R	Rs. 20,000/-	Rs.1000/-
6	Rehabilitation of Rcc Pipe 12"dia Near Rehmani Masjd, Rehmani Mohallah, Zia Colony No. 03, UC- 23	Rs. 8,52,022/- +O/R	Rs. 20,000/-	Rs.1000/-
7	Repairing of Rcc Pipe and Manhole Rehmania Mohallah and Other Places of UC-23 in Orangi Zone DMC (West)	Rs. 9,86,900/-	Rs. 20,000/-	Rs.1000/-
8	Rehabilitation and Construction of Rcc Pipe Line Gali # 05, Ward # 04, in UC-24 Orangi Zone DMC (West)	Rs. 8,15,746/- +O/R	Rs. 20,000/-	Rs.1000/-
9	Rehabilitation of Sewerage System in Bunerty Mohallah Hill Area, Other Places of UC-23 in Orangi Zone DMC (West)	Rs. 9,98,700/-	Rs. 20,000/-	Rs.1000/-
10	Imp of Rcc Culvert Near Kabady Ground Road & Near Sheel Petrol Pump, Faquer Colony, in UC-22 Orangi Zone DMC (West)	Rs. 4,12,645/- +O/R	Rs. 20,000/-	Rs.1000/-

11	Improvement of Drain & Rcc Slab in Raheem Shah Colony in UC-25 Orangi Zone DMC (West)	Rs. 3,06,689/- +O/R	Rs. 20,000/-	Rs.1000/-
12	Rehabilitation and Construction of CC Street Raees Amrohi Colony in Gali #9,10,11 Ward 04 in UC-26 Orangi Zone	Rs. 5,57,614/- +O/R	Rs. 20,000/-	Rs.1000/-
13	Imp / Repair of Rcc Pipe & Manhole Near Sector 1/D, Block A in UC-20 Orangi Zone DMC (West)	Rs. 8,20,586/- +O/R	Rs. 20,000/-	Rs.1000/-
14	Imp / Repair of Road Carpeting in Sector 5/E in UC-20 Orangi Zone DMC (West)	Rs. 7,35,201/- +O/R	Rs. 20,000/-	Rs.1000/-
15	Repair of Damage Rcc Pipe & Main Hole at Khyber Colony, Gali # 02 and Other Gali UC-23 Orangi Zone	Rs. 8,45,888/- +O/R	Rs. 20,000/-	Rs.1000/-
16	Rehabilitation / Imp of CC Street Gali # 1,2 Agror Colony UC-23 Orangi Zone	Rs. 8,64,658/- +O/R	Rs. 20,000/-	Rs.1000/-
17	P/L R.C.C Pipe line in Ward # 01, near Rehmania Masjid, in UC# 38, Surjani Town, DMC (West), Karchi.	Rs. 8,24,240/- +O/R	Rs. 20,000/-	Rs.1000/-
18	P/L Rcc Pipe & Sewerage System in Sector 1/A Ward 04 in UC-13 Orangi Zone DMC (West)	Rs. 8,23,327/- +O/R	Rs. 20,000/-	Rs.1000/-
19	Repairing of Broken Manhole and Cover / Ring Slab in Ward # 1, 2, 3 & 4 in UC-22 Orangi Zone DMC (West)	Rs. 5,00,031/- +O/R	Rs. 20,000/-	Rs.1000/-
20	Imp of CC Drain Wall in Usmania Mohallah in UC-22 Orangi Zone	Rs. 9,98,851/-	Rs. 20,000/-	Rs.1000/-
21	Const of CC Street in Ward#4 Near Noorani Mohallah in UC-13 Orangi Zone DMC (West)	Rs. 8,30,909/- +O/R	20,000/-	Rs.1000/-
22	Rehabilitation and Repair of Road Near Ibrahim Ali Bhai Graveyard, Ward # 01 in UC-28 Orangi Zone DMC (West)	Rs. 6,50,783/- +O/R	Rs. 20,000/-	Rs.1000/-
23	Desalting of Nallah Ward # 04 UC.19 Orangi Zone DMC (West)	Rs. 6,51,199/- +O/R	Rs. 20,000/-	Rs.1000/-
24	Construction of crossing culvert at Islam Chowk near Sarwan Foods U.C # 19 Orangi Zone DMC (West).	Rs. 7,67,432/- +O/R	Rs. 20,000/-	Rs.1000/-

#### Terms & Conditions: -

1. Tender Schedule Shall be as follows.

SCHEDULE	DATE & TIME	VENUE
Receiving of Application & Issuance of Tenders	27/09/2017 to 17/10/2017 During Office Hours	DMC (West) ORANGI Zone Office Sector 11-E Shahrah-e- Orangi Karachi

Dropping of Tenders	18/10/2017 11:30 A.M	Executive Engineer Orangi Zone DMC (West) Office
Opening of Tenders	18/10/2017 12:00 Noon	Executive Engineer Orangi Zone DMC (West) Office

- 2. The tender documents will be issued to contractor on submission of written request on letter head and on payment of non-refundable cost of tender price through pay order from Sindh Bank in favour of Orangi Zone DMC (West).
- 3. The Bid Security as mentioned above in shape of pay order in favour of Orangi Zone DMC (West) shall must be enclosed with tender documents without which the tender will be treated as cancelled.
- 4. In case the date of opening is declared as a public holiday by the Government, the next official working day shall be deemed to be the date for submission and opening of tenders at the same time as mentioned.
- 5. The total bid amount as well as the rates of items must be filled both in figures and words and in case any correction is made by the contractor himself then each correction must be initialed by the contractor; otherwise the tenders are liable to be summarily rejected.
- 6. The bidder are required to submit the above information along with their bid.
- 7. If any fake documents are found then the tender is liable to be rejected / cancelled without any compensation but with penalty as per rules.
- 8. Canvassing in connection with tenders is strictly prohibited and tenders submitted by the contractors who are reported to be involved in canvassing will be liable for rejection.
- 9. Bid Security of the unsuccessful bidder shall be released once the contractor has been signed with the successful bidder or the validity period has expired.
- 10. The Procuring agency may reject all or any bid subject to the relevant provisions of SPPRA Rules 2010.

11. Eligibility

NTN Certificate i.

Valid Professional Tax ii.

S.R.B Certificate iii.

iv. Bank Statement

Relevant Experience ٧.

Turn Over of at least three years vi.

EXECUTIVE ENGINEER (B&R)

ORANGI ZONE DMC (WEST) EXECUTIVE ENGIN

Building and Roads

Director (CB) SPPRA

With a request to upload on SPPRA (Authority) website and issue ID Number

#### Incharge (I.T), Orangi Zone DMC (West)

With a request to upload on Orangi Zone DMC (West) Website

Copy to: -

- 1. Administrator DMC (West)
- 2. P.S to Managing Director SPPRA
- 3. Office File

Not to be published

### 4

# DISTRICT MUNICIPAL CORPORATION (WEST) KARACHI, ORANGI ZONE

Estimated Cost	Rs: 7,61,727 (+) O/R	Earnest Money Rs:	20,000/-
Time Limit:	45 Days	Penalty Per Day Rs:	1,000/-
SUBJECT:	REPAIRING OF R.C.C. PIPE		D HOUSE

S.No:	DESCRIPTION OF WORK	QUANTITY	RATE	PER	AMOUNT
1.	Dismantling of cement concrete 1:2:4 plain flooring.	1508 Cft	3327.50	%Cft	50,179.00
2.	Excavation for pipe line in trenches and pits in all kind of soil of murum i/c trimming and dressing side to true alignment and shape traveling of beds of trenches to correct level and grade cutting joint holes and disposal of surplus earth within a one chain as directed by Engineer Incharge. Providing fence guard light flags and temporary crossing for non vehicular traffic wherever required left upto 05' and lead upto 01 chain.	2250 Cft	4650.00	1000 Cft	10,463.00
3.	Excavation for pipe line in trenches and pits in soft rock by hammering and chieslling i/c alignment and shape level and grade cutting joint holes and disposal of surplus earth within one chain as directed by Engineer Incharge.	3000 Cft	10770.00	1000 Cft	32,310.00
4.	P/L R.C.C. rubber ring pipe of class "A" and fixing in trenches i/c cutting, fitting and jointing with rubber ring etc complete	600 Rft	436.00	P/Rft	2,61,600.00
5.	Construction of manhole 4' dia inside i/c RCC ring slab 39" dia with manhole cover 21" dia of 5' clear depth in 1:2:4 CC in 9" thick wall and beding cast in situ with fair face steel shuttering i/c excavation, back filling and disposal of surplus stuff etc.	30 Nos.	13064.00	Each	3,91,920.00
6.	Add for extra depth beyond 5' depth, less than 5' depth deduct at the same rate.	(-) 45 Rft	1540.00	P/Rft	(-) 69,300.00
7.	Cartage of sand, bajri, lime, surkhi, murrum, building rubbish Vc loading unloading stacking at site all lide and lift.	4508 Cft	1065.00	%Cft	48,010.00
8.	P/L 1:2:4 RCC manhole cover i/c tor bars frame using GSB ¾" and down gauge etc complete.	40 Nos.	913.63	Each	36,545.00
9.	Hiring of Private Labour for cleaning of Nallah (by Afghani or Bajorri for 8 Hours).	30 Nos.	O/R	Each	
10.	P/F pre-casted RCC ring slab 39" dia with RCC manhole cover of 21" dia as per direction of Engineer Incharage.	44 Nos.	O/R	Each	
11.	S/F Imported Earth with in the a radius of 5 miles i/c digging, lodging, un-lodging all lead and lift leveling and water compaction etc complete.	2000 Cft	O/R	P/Cft	
		Tot	al Estimate	ed Cost	7,61,727 (+) Open Rate

Nomenclature, Quantities and Rates etc checked and found correct.

EXECUTIVE ENGINEER(B&R)
ORANGI ZONE

Address:\_

Estimated Cost	Rs: 7,70,864 (+) O/R	Earnest Money Rs:	20,000/-
Time Limit:	45 Days	Penalty Per Day Rs:	1,000/-
SUBJECT:		RAGE SYSTEM BY 15" DIA PIP DL, USMANI MOHALLAH UC-22	

S.No:	DESCRIPTION OF WORK	QUANTITY	RATE	PER	AMOUNT
1.	Dismantling of cement concrete 1:2:4 plain flooring.	1508 Cft	3327.50	%Cft	50,179.00
2.	Excavation for pipe line in trenches and pits in all kind of soil of murum i/c trimming and dressing side to true alignment and shape traveling of beds of trenches to correct level and grade cutting joint holes and disposal of surplus earth within a one chain as directed by Engineer Incharge. Providing fence guard light flags and temporary crossing for non vehicular traffic wherever required left upto 05' and lead upto 01 chain.	2250 Cft	4650.00	1000 Cft	10,463.00
3.	Excavation for pipe line in trenches and pits in soft rock by hammering and chieslling Vc alignment and shape level and grade cutting joint holes and disposal of surplus earth within one chain as directed by Engineer Incharge.	3000 Cft	10770.00	1000 Cft	32,310.00
4.	P/L R.C.C. rubber ring pipe of class "A" and fixing in trenches i/c cutting, fitting and jointing with rubber ring etc complete.  15" Dia	600 Rft	436.00	P/Rft	2,61,600.00
5.	Construction of manhole 4' dia inside i/c RCC ring slab 39" dia with manhole cover 21" dia of 5' clear depth in 1:2:4 CC in 9" thick wall and beding cast in situ with fair face steel shuttering i/c excavation, back filling and disposal of surplus stuff etc.	30 Nos.	13064.00	Each	3,91,920.00
6.	Add for extra depth beyond 5' depth, less than 5' depth deduct at the same rate.	(-) 45 Rft	1540.00	P/Rft	(-) 69,300.00
7.	Cartage of sand, bajri, lime, surkhi, murrum, building rubbish i/c loading unloading stacking at site all lide and lift.	4508 Cft	1065.00	%Cft	48,010.00
8.	P/L 1:2:4 RCC manhole cover i/c tor bars frame using GSB ¾" and down gauge etc complete.	50 Nos.	913.63	Each	45,682.00
9.	P/F pre-casted RCC ring slab 39" dia with RCC manhole cover of 21" dia as per direction of Engineer Incharage.	50 Nos.	O/R	Each	
10.	S/F Imported Earth with in the a radius of 5 miles i/c digging, lodging, un-lodging all lead and lift leveling and water compaction etc complete.	2000 Cft	O/R	P/Cft	
		Tot	al Estimate	ed Cost	7,70,864 (+) Open Rate

Nomenclature, Quantities and Rates etc checked and found correct.

EXECUTIVE ENGINEER(B&R)
ORANGI ZONE

I/We hereby quoted Rates @(+) Open Rate Rs:	% above/below the for complete work/job.	ne S/R	EXECUTIVE ENGINEER Building and Roads Orangi Zone DMC (West)
The total amount is Rs:	(Rupees:		
(In Figure)		(In Word)	
	Contractor's Signat	ure:	

Address:

# DISTRICT MUNICIPAL CORPORATION (WEST) KARACHI, ORANGI ZONE

Estimated Cost Rs.	2,18,594 (+) O/R	Earnest Money Rs:	20,000/-
Time Limit:	45 Days	Penalty Per Day Rs:	1,000/-
SUBJECT: RE	PAIR OF DRAIN / SLAB NE	EAR ASRA GENERAL STORE	

SUBJECT: REPAIR OF DRAIN / SLAB NEAR ASRA GENERAL STORE MASQATI MOHALLAH UC-21.

S.No:	DESCRIPTION OF WORK	QUANTITY	RATE	PER	AMOUNT
1.	Dismantling of R.C.C. separating reinforcement from concrete, cleaning and straightening same.	781 Cft	5445.00	%Cft	42,525.00
2.	Fabrication of mild steel reinforcement for cement concrete i/c cutting, bending, layer in position making joints and fastening i/c cost of binding works and removal of rust from bars.	7.375 Cwt	5001.70	P/Cwt	36,888.00
3.	RCC work i/c all labor and material except the cost of reinforcement and its labor for bending which will be paid separately. This rate also i/c all kinds of forms, molds, lifting, shuttering, cutting, rendering and finishing the expose surface i/c screening and washing of shingles ratio 1:2:4.	413 Cft	337.00	P/Cft	1,39,181.00
4.	P/F R.C.C. pre-cast slab 2" thick of required size and shape and racking out joints with CM curing etc complete as per direction of Engineer Incharge.	1300 Sft	O/R	P/Sft	
5.	Hiring of Excavator for desalting and cleaning of Nallah Long Boom i/c POL (for 08 Hours Per Day).	24 Hours	O/R	P/Hour	
6.	Hiring of Tractor Blade Heavy Duty for cleaning of Garbage, Street of Road side earth with POL (for 08 Hours Per Day).	06 Days	O/R	P/Day	
7.	Hiring of Tractor Trolly Heavy Duty for cleaning of Garbage, Street of Road side earth i/c Loading, Unloading etc complete with POL (for 08 Hours Per Day).	180 Trips	O/R	P/Trip	ri Viralij
8.	Hiring of Private Labour for cleaning of Nallah (by Afghani or Bajorri for 08 Hours).	134 Nos.	O/R	Each P.Day	
		T	otal Estima	ted Cost	2,18,594 (+) Open Rate

Total Estimated Cos

Nomenclature, Quantities and Rates etc checked

and found correct.

EXECUTIVE ENGINEER(B&R)
ORANGI ZONE

	Contractor's Signature:	
The total amount is Rs:	(Rupees:	
(+) Open Rate Rs:	for complete work/job.	Building and Roads Orangi Zone DMC (West)
I/We hereby quoted Rates @	% above/below the S/R	EXECUTIVE ENGINEER
		ORANGI ZONE

CELL #:

Address:\_\_\_\_

## DISTRICT MUNICIPAL CORPORATION (WEST) KARACHI, ORANGI ZONE

Estimated Cost	Rs: 2,19,219 (+) O/R	Earnest Money Rs:	20,000/-
Time Limit:	45 Days	Penalty Per Day Rs:	1,000/-
SUBJECT:	REHABILITATION / IMPROVE		SLAB

S.No:	DESCRIPTION OF WORK	QUANTITY	RATE	PER	AMOUNT
1.	Dismantling of R.C.C. separating reinforcement from concrete, cleaning and straightening same.	781 Cft	5445.00	%Cft	42,525.00
2.	Fabrication of mild steel reinforcement for cement concrete i/c cutting, bending, layer in position making joints and fastening i/c cost of binding works and removal of rust from bars.	7.50 Cwt	5001.70	P/Cwt	37,513.00
3.	RCC work i/c all labor and material except the cost of reinforcement and its labor for bending which will be paid separately. This rate also i/c all kinds of forms, molds, lifting, shuttering, cutting, rendering and finishing the expose surface i/c screening and washing of shingles ratio 1:2:4.	413 Cft	337.00	P/Cft	1,39,181.00
4.	P/F R.C.C. pre-cast slab 2" thick of required size and shape and racking out joints with CM curing etc complete as per direction of Engineer Incharge.	1300 Sft	O/R	P/Sft	
5.	Hiring of Excavator for desalting and cleaning of Nallah Long Boom i/c POL (for 08 Hours Per Day).	16 Hours	O/R	P/Hour	
6.	Hiring of Tractor Blade Heavy Duty for cleaning of Garbage, Street of Road side earth with POL (for 08 Hours Per Day).	02 Days	Q/R	P/Day	
7.	Hiring of Tractor Trolly Heavy Duty for cleaning of Garbage, Street of Road side earth 1/c Loading, Unloading etc complete with POL (for 08 Hours Per Day).	180 Trips	O/R	P/Trip	
8.	Hiring of Private Labour for cleaning of Nallah (by Afghani or Bajorri for 08 Hours).	183 Nos.	O/R	Each P. Day	
		T	otal Estima	ted Cost	2,19,219 (+) Open Rate

## DISTRICT MUNICIPAL CORPORATION (WEST) KARACHI, ORANGI ZONE

Estimated Cost	Rs: 7,14,484 (+) O/R	Earnest Money Rs:	20,000/-
Time Limit:	45 Days	Penalty Per Day Rs:	1,000/-
SUBJECT:	REPAIRING OF R.C.C. PIPE A	AND MANHOLES QAMER HOL	ISE

S.No:	DESCRIPTION OF WORK	QUANTITY	RATE	PER	AMOUNT
1.	Dismantling of cement concrete 1:2:4 plain flooring.	1724 Cft	3327.50	%Cft	57,366.00
2.	Excavation for pipe line in trenches and pits in all kind of soil of murum i/c trimming and dressing side to true alignment and shape traveling of beds of trenches to correct level and grade cutting joint holes and disposal of surplus earth within a one chain as directed by Engineer Incharge. Providing fence guard light flags and temporary crossing for non vehicular traffic wherever required left upto 95' and lead upto 01 chain.	4125 Cft	4650.00	1000 Cft	19,181.00
3.	P/L R.C.C. rubber ring pipe of class "A" and fixing in trenches i/c cutting, fitting and jointing with rubber ring etc complete.  12" Dia	550 Rft	367.00	P/Rft	2,01,850.00
4.	Construction of manhole 4' dia inside i/c RCC ring slab 39" dia with manhole cover 21" dia of 5' clear depth in 1:2:4 CC in 9" thick wall and beding cast in situ with fair face steel shuttering i/c excavation, back filling and disposal of surplus stuff etc.	25 Nos.	13064.00	Each	3,26,600.00
5.	Add for extra depth beyond 5' depth, less than 5' depth deduct at the same rate.	( - ) 50 Rft	1540.00	P/Rft	(-) 77,000.00
6.	Refilling of excavated stuff in trenches 6" thick layer i/c watering ramming to full compaction etc complete.	3544 Cft	2760.00	1000 Cft	9,781.00
7.	P/L 1:2:4 RCC manhole cover i/c tor bars frame using GSB ¾" and down gauge etc complete.	150 Nos.	913.63	Each	1,37,045.00
8.	Hiring of Private Labour for cleaning of Nallah (by Afghani or Bajorri for 8 Hours).	25 Nos.	O/R	Each P.Day	
9.	P/F pre-casted RCC ring slab 39" dia with RCC manhole cover of 21" dia as per direction of Engineer Incharage.	75 Nos.	O/R	Each	
10.	Cartage of sand, bajri, lime, surkhi, murrum, building rubbish i/c loading unloading stacking at site all lide and lift.	3724 Cft	1065.00	%Cft	39,661.00
		Tot	al Estimat	ed Cost	7,14,484 (+)

Address:

# DISTRICT MUNICIPAL CORPORATION (WEST) KARACHI, ORANGI ZONE

 Estimated Cost Rs:
 8,52,022 (+) O/R
 Earnest Money Rs:
 20,000/ 

 Time Limit:
 45 Days
 Penalty Per Day Rs:
 1,000/ 

SUBJECT: REHABILITATION OF RCC PIPE 12" DIA NEAR REHMANI MASJID, REHMANI MOHALLAH, ZIA COLONY No: 03, UC-23.

S.No:	DESCRIPTION OF WORK	QUANTITY	RATE	PER	AMOUNT
1.	Dismantling of cement concrete 1:2:4 plain flooring.	2413 Cft	3327.50	%Cft	80,293.00
2.	Excavation for pipe line in trenches and pits in all kind of soil of murum i/c trimming and dressing side to true alignment and shape traveling of beds of trenches to correct level and grade cutting joint holes and disposal of surplus earth within a one chain as directed by Engineer Incharge. Providing fence guard light flags and temporary crossing for non vehicular traffic wherever required left upto 05' and lead upto 01 chain.	3000 Cft	4650.00	1000 Cft	13,950.00
3.	Excavation for pipe line in trenches and pits in soft rock by hammering and chieslling i/c alignment and shape level and grade cutting joint holes and disposal of surplus earth within one chain as directed by Engineer Incharge.	3281 Cft	10770.00	1000 Cft	35,336.00
4.	P/L R.C.C. rubber ring pipe of class "A" and fixing in trenches i/c cutting, fitting and jointing with rubber ring etc complete	750 Rft	367.00	P/Rft	2,75,250.00
5.	Construction of manhole 4' dia inside i/c RCC ring slab 39" dia with manhole cover 21" dia of 5' clear depth in 1:2:4 CC in 9" thick wall and beding cast in situ with fair face steel shuttering i/c excavation, back filling and disposal of surplus stuff etc.	35 Nos.	13064.00	Each	4,57,240.00
6.	Add for extra depth beyond 5' depth, less than 5' depth deduct at the same rate.	(-) 70 Rft	1540.00	P/Rft	(-) 1,07,800.00
7.	Refilling of excavated stuff in trenches 6" thick layer i/c watering ramming to full compaction etc complete.	2207 Cft	2760.00	1000 Cft	6,091.00
8.	P/L 1:2:4 RCC manhole cover i/c tor bars frame using GSB ¾" and down gauge etc complete.	20 Nos.	913.63	Each	18,273.00
9.	S/F Imported Earth with in the a radius of 5 miles i/c digging, lodging, un-lodging all lead and lift leveling and water compaction etc complete.	1500 Cft	O/R	P/Cft	
10.	Hiring of Private Labour for cleaning of Nallah (by Afghani or Bajorri for 8 Hours).	40 Nos.	O/R	Each P. Day	
11.	P/F pre-casted RCC ring slab 39" dia with RCC manhole cover of 21" dia as per direction of Engineer Incharage.	11 Nos.	O/R	Each	
12	Cartage of sand, bajri, lime, surkhi, murrum, building rubbish i/c loading unloading stacking at site all lide and lift.	6891 Cft	1065.00	%Cft	73,389.00
		Tot	al Estimate	ed Cost	8,52,022 (+) Open Rate

Nomenclature, Quantities and Rates etc checked and found correct.

EXECUTIVE ENGINEER(B&R)
ORANGI ZONE
EXECUTIVE ENGINEER
ORANGI ZONE
EXECUTIVE ENGINEER
EXECUTIVE ENGINEER

Building and Roads
(+) Open Rate Rs:\_\_\_\_\_\_\_ for complete work/job.

The total amount is Rs:\_\_\_\_\_\_ (Rupees:\_\_\_\_\_\_\_

Contractor's Signature:\_\_\_\_\_

Address:



Estimated Cost H	Rs: 9,86,900/-	Earnest Money Rs:	20,000/-
Time Limit:	45 Days	Penalty Per Day Rs:	1,000/-
		E AND MANHOLE REHMANIA MOI UC-23, IN ORANGI ZONE, DMC(V	

S.No:	DESCRIPTION OF WORK	QUANTITY	RATE	PER	AMOUNT
1.	Dismantling of cement concrete 1:2:4 plain flooring.	1980 Cft	3327.50	%Cft	65,885.00
2.	Excavation for pipe line in trenches and pits in soft rock by hammering and chieslling i/c alignment and shape level and grade cutting joint holes and disposal of surplus earth within one chain as directed by Engineer Incharge.	6000 Cft	10770.00	1000 Cft	64,620.00
3.	P/L R.C.C. rubber ring pipe of class "A" and fixing in trenches i/c cutting, fitting and jointing with rubber ring etc complete.  8" Dia	1000 Rft	206.00	P/Rft	2,06,000.00
4.	Construction of manhole 4' dia inside i/c RCC ring slab 39" dia with manhole cover 21" dia of 5' clear depth in 1:2:4 CC in 9" thick wall and beding cast in situ with fair face steel shuttering i/c excavation, back filling and disposal of surplus stuff etc.	42 Nos.	13064.00	Each	5,48,688.00
5.	Add for extra depth beyond 5' depth, less than 5' depth deduct at the same rate.	( - ) 73.5 Rft	1540.00	P/Rft	(-) 1,13,190.00
6.	P/L 1:2:4 RCC manhole cover i/c tor bars frame using GSB ¾" and down gauge etc complete.	20 Nos.	913.63	Each	18,273.00
7.	S/F Imported Earth with in the a radius of 5 miles i/c digging, lodging, un-lodging all lead and lift leveling and water compaction etc complete.	3000 Cft	21.691	P/Cft	65,074.00
8	Hiring of Private Labour for cleaning of Nallah (by Afghani or Bajorri for 8 Hours).	10 Nos.	1200.00	Each P. Day	12,000.00
9.	P/F pre-casted RCC ring slab 39" dia with RCC manhole cover of 21" dia as per direction of Engineer Incharage.	15 Nos.	3000.00	Each	45,000.00
10.	Cartage of sand, bajri, lime, surkhi, murrum, building rubbish i/c loading unloading stacking at site all lide and lift.	7000 Cft	1065.00	%Cft	74,550.00
		Tot	al Estimat	ed Cost	9,86,900.00

Nomenclature, Quantities and Rates etc checked and found correct.

| EXECUTIVE ENGINEER | B.R. |
| OF ALL OF A CONTROL OF

## DISTRICT MUNICIPAL CORPORATION (WEST) KARACHI, ORANGI ZONE

Estimated Cost Rs:_	8,15,746 (+) O/R	Earnest Money Rs:	20,000/-
Time Limit:	45 Days	Penalty Per Day Rs:	1,000/-
SUBJECT: REL	ABILITATION AND COM	STRUCTION OF RCC PIPE LIN	IE.

SUBJECT: REHABILITATION AND CONSTRUCTION OF RCC PIPE LINE GALI # 05, WARD # 04 IN UC-24, ORANGE ZONE, DMC(WEST).

S.No:	DESCRIPTION OF WORK	QUANTITY	RATE	PER	AMOUNT
1.	Dismantling of cement concrete flooring 1:3:6 plain.	825 Cft	1306.80	% Cft	10,781.00
2.	Earth work excavation of road side nails forming its banks or putting the same on embankment as directed breaking clods dressing etc complete in ordinary soil.	7344 Cft	1437.00	% Cft	10,553.00
3.	Excavation for pipe line in trenches and pits in all kind of soil of murum i/c trimming and dressing side to true alignment and shape traveling of beds of trenches to correct level and grade cutting joint holes and disposal of surplus earth within a one chain as directed by Engineer Incharge. Providing fence guard light flags and temporary crossing for non vehicular traffic wherever required left upto 05' and lead upto 01 chain.	1772 Cft	4650.00	% Cft	8,239.00
4.	Excavation for pipe line in trenches and pits in soft rock by hammering and chieslling i/c alignment and shape level and grade cutting joint holes and disposal of surplus earth within one chain as directed by Engineer Incharge.	2953 Cft	10770.00	% Cft	31,805.00
5.	P/L R.C.C. rubber ring pipe of class "A" and fixing in trenches i/c cutting, fitting and jointing with rubber ring etc complete.  12" Dia	700 Rft	367.00	P/Rft	2,56,900.00
6.	Construction of manhole 4' dia inside i/c RCC ring slab 39" dia with manhole cover 21" dia of 5' clear depth in 1:2:4 CC in 9" thick wall and beding cast in situ with fair face steel shuttering i/c excavation, back filling and disposal of surplus stuff etc.	31 Nos.	13064.00	Each	4,04,984.00
7.	Add for extra depth beyond 5' depth, less than 5' depth deduct at the same rate.	(-) 44 Rft	1540.00	P/Rft	(-) 67,375.00
8.	P/L 1:3:6 CC using GSB ¼" and down gauge i/c consolidation curing etc complete without shuttering.	306 Cft	12595.00	% Cft	38,596.00
9.	Refilling of excavated stuff in trenches 6" thick layer i/c watering ramming to full compaction etc complete.	1019 Cft	2760.00	% Cft	2,812.00
10.	Cartage of sand, bajri, lime, surkhi, murrum, building rubbish i/c loading unloading stacking at site all lide and lift.	11122 Cft	1065.00	% Cft	1,18,451.00
11.	P/F RCC ring slab 39" dia with RCC manhole cover of 21" dia as per direction of Engineer Incharage.	45 Nos.	O/R	Each	
		Tot	al Estimate	ed Cost	8,15,746 (+) Open Rate

Nomenclature, Quantities and Rates etc checked and found correct.

EXECUTIVE ENGINEER(B&R)

EXEC

Address:

Contractor's Signature:

# DISTRICT MUNICIPAL CORPORATION (WEST) KARACHI, ORANGI ZONE

Earnest Money Rs:	20,000/-
Penalty Per Day Rs:	1,000/-

SUBJECT: REHABILITATION OF SEWERAGE SYSTEM IN BUNERTY MOHALLAH, HILL AREA, OTHER PLACES OF UC-23, IN ORANGE ZONE, DMC(WEST).

S.No:	DESCRIPTION OF WORK	QUANTITY	RATE	PER	AMOUNT
1.	Dismantling of cement concrete 1:2:4 plain flooring.	1980 Cft	3327.50	%Cft	65,885.00
2.	Excavation for pipe line in trenches and pits in all kind of soil of murum i/c trimming and dressing side to true alignment and shape traveling of beds of trenches to correct level and grade cutting joint holes and disposal of surplus earth within a one chain as directed by Engineer Incharge. Providing fence guard light flags and temporary crossing for non vehicular traffic wherever required left upto 05' and lead upto 01 chain.	4000 Cft	4650.00	1000 Cft	18,600.00
3.	Excavation for pipe line in trenches and pits in soft rock by hammering and chieslling i/c alignment and shape level and grade cutting joint holes and disposal of surplus earth within one chain as directed by Engineer Incharge.	3000 Cft	10770.00	1000 Cft	32,310.00
4.	P/L R.C.C. rubber ring pipe of class "A" and fixing in trenches i/c cutting, fitting and jointing with rubber ring etc complete	700 Rft 200 Rft	206.00 367.00	P/Rft P/Rft	1,44,200.00 73,400.00
5.	Construction of manhole 4' dia-inside i/c RCC ring slab 39" dia with manhole cover 21" dia of 5' clear depth in 1:2:4 CC in 9" thick wall and beding cast in situ with fair face steel shuttering i/c excavation, back filling and disposal of surplus stuff etc.	40 Nos.	13064.00	Each	5,22,560.00
6.	Add for extra depth beyond 5' depth, less than 5' depth deduct at the same rate.	(-) 70 Rft	1540.00	P/Rft	(-) 1,07,800.00
7.	Refilling of excavated stuff in trenches 6" thick layer i/c watering ramming to full compaction etc complete.	3400 Cft	2760.00	1000 Cft	9,384.00
8.	P/L 1:2:4 RCC manhole cover i/c tor bars frame using GSB ¾" and down gauge etc complete.	20 Nos.	913.63	Each	18,273.00
9.	S/F Imported Earth with in the a radius of 5 miles i/c digging, lodging, un-lodging all lead and lift leveling and water compaction etc complete.	3100 Cft	19.996	P/Cft	61,988.00
10.	Hiring of Private Labour for cleaning of Nallah (by Afghani or Bajorri for 8 Hours).	30 Nos.	1200.00	Each P. Day	36,000.00
11.	P/F pre-casted RCC ring slab 39" dia with RCC manhole cover of 21" dia as per direction of Engineer Incharage.	20 Nos.	3000.00	Each	60,000.00
12.	Cartage of sand, bajri, lime, surkhi, murrum, building rubbish i/c loading unloading stacking at site all lide and lift.	6000 Cft	1065.00	%Cft	63,900.00
		Tot	al Estimate	ed Cost	9,98,700.00

Contractor's Signature:

Address:

Estimated Cost Rs: 4,12,645 (+) O/R Earnest Money Rs: 20,000/-Time Limit: 45 Days Penalty Per Day Rs: 1,000/-

SUBJECT: IMPROVEMENT OF R.C.C. CULVERT NEAR KABADY GROUND ROAD AND NEAR SHELL PETROL PUMP, FAQEER COLONY IN

UC-22, ORANGE ZONE, DMC(WEST).

S.No:	DESCRIPTION OF WORK	QUANTITY	RATE	PER	AMOUNT
1.	Dismantling of R.C.C. separating reinforcement from concrete, cleaning and straightening same.	480 Cft	5445.00	%Cft	26, 136.00
2.	Earth work excavation in irrigation channels, irrigation drain etc dressed to designed section and profile excavated material disposed off and dressed within 50 feet lead.	860 Cft	2420.00	1000 Cft	2,081.0
3.	Fabrication of mild steel reinforcement for cement concrete i/c cutting, bending, layer in position making joints and fastening i/c cost of binding works and removal of rust from bars.	16.50 Cwt	5001.70	P/Cwt	82,528.0
4.	RCC work i/c all labor and material except the cost of reinforcement and its labor for bending which will be paid separately. This rate also i/c all kinds of forms, molds, lifting, shuttering, cutting, rendering and finishing the expose surface i/c screening and washing of shingles ratio 1:2:4.	616 Cft	337.00	P/Cft	2,07,592.00
5.	Bailing or pumping out sub soil water during excavation concrete cast in situ or masonry work in foundation only three operator allowed.	3360 Cft	543.00	%Cft	18,245.00
6.	S/F new jute bags 4 to 5 Cft capacity with sand or earth laying in position under water.	200 Nos.	202.46	Each	40,492.00
7.	Cartage of sand, bajri, lime, surkhi, murrum, building rubbish i/c loading unloading stacking at site all lide and lift.	3340 Cft	1065.00	%Cft	35,571.00
8.	P/F R.C.C. pre-cast slab 2" thick of required size and shape and racking out joints with CM curing etc complete as per direction of Engineer Incharge.	362 Sft	O/R	P/Sft	
9.	Hiring of Excavator for desalting and cleaning of Nallah Long Boom i/c POL (for 08 Hours Per Day).	24 Hours	O/R	P/Hour	
10.	Hiring of Tractor Blade Heavy Duty for cleaning of Garbage, Street of Road side earth with POL (for 08 Hours Per Day).	03 Days	O/R	P/Day	
11.	Hiring of Tractor Trolly Heavy Duty for cleaning of Garbage, Street of Road side earth i/c Loading, Unloading etc complete with POL (for 08 Hours Per Day).	125 Trips	O/R	P/Trip	
12.	Hiring of Loader for Lifting of Garbage and silt etc with POL (for 08 Hours Per Day).	02 Days	O/R	P/Day	
13.	Hiring of Private Labour for cleaning of Nallah (by Afghani or Bajorri for 08 Hours).	95 Nos.	O/R P. Day	Each	
			otal Estima	tod Cost	4,12,645 (+)

Nomenclature, Quantities and Rates etc checked and found correct.

> EXECUTIVE ENGINEER(B&R) EXPLANGIEZOWENEE **Building and Roads** Orangi Zone DMC (West)

Open Rate

I/We hereby quoted Rates @ \_\_\_\_\_ % above/below the S/R (+) Open Rate Rs:\_\_\_\_\_\_ for complete work/job.

The total amount is Rs: \_\_\_\_\_ (Rupees: \_

Contractor's Signature:

Addrass.

# DISTRICT MUNICIPAL CORPORATION (WEST) KARACHI, ORANGI ZONE

Estimated Cost Rs:_	3,06,689 (+) O/R	Earnest Money Rs:	20,000/-
Time Limit:	45 Days	Penalty Per Day Rs:	1,000/-

SUBJECT: IMPROVEMENT OF DRAIN AND RCC SLAB IN RAHEEM SHAH COLONY IN UC-25, ORANGI ZONE, DMC(WEST).

S.No:	DESCRIPTION OF WORK	QUANTITY	RATE	PER	AMOUNT
1.	Dismantling of R.C.C. separating reinforcement from concrete, cleaning and straightening same.	750 Cft	5445.00	%Cft	40,838.00
2.	Fabrication of mild steel reinforcement for cement concrete i/c cutting, bending, layer in position making joints and fastening i/c cost of binding works and removal of rust from bars.	8.84 Cwt	5001.70	P/Cwt	44,215.00
3.	RCC work i/c all labor and material except the cost of reinforcement and its labor for bending which will be paid separately. This rate also i/c all kinds of forms, molds, lifting, shuttering, cutting, rendering and finishing the expose surface i/c screening and washing of shingles ratio 1:2.4.	396 Cft	337.00	P/Cft	1,33,452.00
4.	Cartage of sand, bajri, lime, surkhi, murrum, building rubbish i/c loading unloading stacking at site all lide and lift.	2250 Cft	1065.00	%Cft	23,963.00
5.	P/F R.C.C. pre-cast slab 2" thick of required size and shape and racking out joints with CM curing etc complete as per direction of Engineer Incharge.	1050 Sft	O/R	P/Sft	
6.	Hiring of Excavator for desalting and cleaning of Nallah Long Boom i/c POL (for 08 Hours Per Day).	24 Hours	O/R	P/Hour	
7.	Hiring of Seal Dumpers Hino for Lifting of Garbage and silt of Nallah i/c Loading & unloading in all respect with POL (for 08 Hours Per Day).	32 Hours	2006.90	P/Hour	64,221.00
8.	Hiring of Tractor Blade Heavy Duty for cleaning of Garbage, Street of Road side earth with POL (for 08 Hours Per Day).	04 Days	O/R	P/Day	
9.	Hiring of Tractor Trolly Heavy Duty for cleaning of Garbage, Street of Road side earth I/c Loading, Unloading etc complete with POL (for 08 Hours Per Day).	45 Trips	O/R	P/Trip	
10	Hiring of Loader for Lifting of Garbage and silt etc with POL (for 08 Hours Per Day).	01 Day	O/R	P/Day	
11.	Hiring of Private Labour for cleaning of Nallah (by Afghani or Bajorri for 08 Hours).	240 Nos.	O/R P. Day	Each	
		T	otal Estima	ted Cost	3,06,689 (+) Open Rate

CELL #:

## DISTRICT MUNICIPAL CORPORATION (WEST) KARACHI, ORANGI ZONE

	Estimated Cost Rs: 5,57,614 (+)	O/R Earnes	t Money Rs	:	20,000/-	
	Time Limit: 45 Days	Penalty	Per Day R	s:	1,000/-	
		AND CONSTRUCTION COLONY IN GALI # 9, 10 MC(WEST).			2-26,	
S.No:	DESCRIPTION OF	WORK	QUANTITY	RATE	PER	AMOUNT
1.	Dismantling of cement concrete 1:2:4 plain floor	oring.	2520 Cft	3327.50	%Cft	83,853.00
2.	Dismantling of cement concrete flooring 1:3:6 j	olain.	2888 Cft	1306.80	%Cft	37,734.00
3.	Cartage of sand, bajri, lime, surkhi, murrum, unloading stacking at site all lide and lift.	building rubbish i/c loading	5408 Cft	1065.00	%Cft	57,590.00
4.	Supplying and filling imported earth with in digging, loading, unloading all lead and lift le complete.	veling, water compaction etc	2814 Cft	O/R	P/Cft	
5.	Earth work excavation of road side nails form same on embankment as directed breaking of ordinary soil.		4080 Cft	1437.00	1000 Cft	5,863.00
6.	Preparing of sub-grade i/c earth excavation let 9" dressing to camber and consolidation with p		9800 Sft	526.28	%Sft	51,575.00
7.	P/L Granular sub-base course material over pathickness and typical cross sections for new pavement using well graded granular stone smooth gradation as per AASHTO-M watering directed by Engineer Incharge.	w grade / widening existing with sand and silt having a	2842 Cft	O/R	P/Cft	
8.	P/L Aggregate base course material over pro- thickness and typical cross sections grade / using well graded crushed stone with sand graduation as per AASHTO-M watering with all by Engineer Incharge.	widening existing pavement and silt having a smooth	3675 Cft	O/R	P/Cft	
9	Providing and laying topping cement concrete dividing into panels.	1:2:4 i/c surface finishing and	9800 Sft	3275.50	%Sft	3,20,999.00
10.	Extra for using (S.R Cement) Sulphate resistar Portland cement.	nt cement in place of ordinary	283 Cwt	O/R	P/Cwt	
			Tota	al Estimat	ed Cost	5,57,614 (+) Open Rate
	omenclature, Quantities and Rates etc and found correct.  I/We hereby quoted Rates @  (+) Open Rate Rs:  The total amount is Rs:	% above/below to for complete work/job.	ture:	Ora	EGUZO/RA Building an angi Zone	ENGINEER ad Roads DMC (West)



Estimated Cost Rs:_	8,20,586 (+) O/R	Earnest Money Rs:	20,000/-
Time Limit:	45 Days	Penalty Per Day Rs:	1,000/-
			_

SUBJECT: IMPROVEMENT / REPAIR OF RCC PIPE & MANHOLE NEAR SECTOR 1/D, BLOCK "A" IN UC-20, ORANGE ZONE, DMC(WEST).

S.No:	DESCRIPTION OF WORK	QUANTITY	RATE	PER	AMOUNT
1.	Dismantling of cement concrete 1:2:4 plain flooring.	1706 Cft	3327.50	% Cft	56,767.00
2.	Excavation for pipe line in trenches and pits in all kind of soil of murum i/c trimming and dressing side to true alignment and shape traveling of beds of trenches to correct level and grade cutting joint holes and disposal of surplus earth within a one chain as directed by Engineer Incharge. Providing fence guard light flags and temporary crossing for non vehicular traffic wherever required left upto 05' and lead upto 01 chain.	3938 Cft	4650.00	% Cft	18,312.00
3.	P/L R.C.C. rubber ring pipe of class "A" and fixing in trenches i/c cutting, fitting and jointing with rubber ring etc complete.  12" Dia.	750 Rft	367.00	P/Rft	2,75,250.00
4.	Construction of manhole 4' dia inside i/c RCC ring slab 39" dia with manhole cover 21" dia of 5' clear depth in 1:2:4 CC in 9" thick wall and beding cast in situ with fair face steel shuttering i/c excavation, back filling and disposal of surplus stuff etc.	35 Nos.	13064.00	Each	4,57,240.00
5	Add for extra depth beyond 5' depth, less than 5' depth deduct at the same rate.	(-) 52.5 Rft	1540.00	P/Rft	(-) 80,850.00
6.	Refilling of excavated stuff in trenches 6" thick layer i/c watering ramming to full compaction etc complete.	3018 Cft	2760.00	% Cft	8,330.00
Z.	Cartage of sand, bajri, lime, surkhi, murrum, building rubbish i/c loading unloading stacking at site all lide and lift.	2627 Cft	1065.00	% Cft	27,978.00
8.	P/L 1:2:4 RCC manhole cover i/c tor bars frame using GSB ¾" and down gauge etc complete.	63 Nos.	913.63	Each	57,550.00
9.	P/F pre-casted RCC ring slab 39" dia with RCC manhole cover of 21" dia as per direction of Engineer Incharage.	47 Nos.	O/R	Each	
		Total	al Estimate	ed Cost	8,20,586 (+)



	Estimated Cost	Rs: 7,35,201 (-	+) O/R	Earnest	Money Rs	:2	20,000/-	
	Time Limit:	45 Days		Penalty	Per Day R	s:	1,000/-	
	SUBJECT:	IMPROVEMENT IN UC-20 ORANG			PETING IN S	SECTOR 5	/E	
S.No:		DESCRIPTION OF	WORK		QUANTITY	RATE	PER	AMOUNT
1.		ng asphalt concrete i I material to designated		base and	7200 Sft	773.86	%Sft	55,718.00
2.		n of road side nails fo It as directed breaking			24413 Cft	1437.00	1000 Cft	35,082.00
3.	Cartage of sand, baj unloading stacking at	ri, lime, surkhi, murrui site all lide and lift.	m, building rubbish i	Vc loading	23200 Cft	1065.00	%Cft	2,47,080.00
4.	conformity with lime of drawing for new payr graded granular cru gradation carver with 65 (1980) and compact AASHTO-T -180 me	ase course material prade, thicknesss and to ment at grade/widening shed stone with san in the limit for grading cting to 100% of the mithod D using approvitional lift as per specifications.	typical cross sections of existing pavement of and silt having C or I as per AASH nimum dry density ac red mechanical med	s shown in using well a smooth TO-M 147- ccording to ans of VC	800 Cft	O/R	P/Cft	
5.	with lines, grade, thick new pavement at granular crushed stor- with in the limit for gr compacting to 100% of 180 method D using	course material over pre- kness and typical cross rade/widening existing he with sand and silt ha rading A or B as per A of the mimimum dry de approved mechanical perification and as per d	s sections shown in a pavement using we aving a smooth grade ASHTO-M 142-65 ( ensity according to Al means of I/c wateri	rawing for ell graded ation curve 1985) and ASHTO-T- ng with all	3600 Cft	O/R	P/Cft	
6.	grade i/c supplying 1 grade) bitumen of 80 required proportion i/c	onsolidated) premixed 0 Cft bajri 4 Cft Hill s 1/100 penetration i/c n heating materials and t T&P and carriage upto	sand (of approved q mixing in mechanica cleaning the road su	uality and I mixer in rface (rate	7800 Sft	4107.84	%Sft	3,97,321.00
					Tot	al Estimat	ed Cost	7,35,201 (+) Open Rate
	Nomenclature, Qua and found correct.	antities and Rates	etc checked				1	tu
	I/We hereby quoted	d Rates @	% abov	/e/below ti		p. ild	ENGINEE (G) Z QNE ling and R Zone DMC	NEER oads
	(+) Open Rate Rs:		for complete	work/job.				
	The total amount is	Rs:	(Rupees:					
		(In Figure)	)		(In Word)			

Contractor's Signature:\_\_

Address:



Estimated Cost I	Rs: 8,45,888 (+) O/R	Earnest	Money Rs:	20,000/-
Time Limit:	45 Days	Penalty	Per Day Rs:	1,000/-
SUD IECT.	REPAIR OF DAMAGE R.C.C.	DIDE & MANIE	HOLE AT KHYRE	R COLONY

SUBJECT: REPAIR OF DAMAGE R.C.C. PIPE & MANHOLE AT KHYBER COLONY GALI # 02 AND OTHER GALI UC-23, ORANGE ZONE.

S.No:	DESCRIPTION OF WORK	QUANTITY	RATE	PER	AMOUNT
1.	Dismantling of cement concrete 1:2:4 plain flooring.	1608 Cft	3327.50	%Cft	53,506.00
2.	Excavation for pipe line in trenches and pits in all kind of soil of murum i/c trimming and dressing side to true alignment and shape traveling of beds of trenches to correct level and grade cutting joint holes and disposal of surplus earth within a one chain as directed by Engineer Incharge. Providing fence guard light flags and temporary crossing for non vehicular traffic wherever required left upto 05' and lead upto 01 chain.	3900 Cft	4650.00	% Cft	18,135.00
3.	Excavation for pipe line in trenches and pits in soft rock by hammering and chieslling i/c alignment and shape level and grade cutting joint holes and disposal of surplus earth within one chain as directed by Engineer Incharge.	1750 Cft	10770.00	% Cft	18,848.00
4.	P/L R.C.C. rubber ring pipe of class "A" and fixing in trenches i/c cutting, fitting and jointing with rubber ring etc complete.  12" Dia.	800 Rft	367.00	P/Rft	2,93,600.00
5.	Construction of manhole 4' dia inside i/c RCC ring slab 39" dia with manhole cover 21" dia of 5' clear depth in 1:2:4 CC in 9" thick wall and beding cast in situ with fair face steel shuttering i/c excavation, back filling and disposal of surplus stuff etc.	35 Nos.	13064.00	Each	4,57,240.00
6.	Add for extra depth beyond 5' depth, less than 5' depth deduct at the same rate.	( - ) 61.25 Rft	1540.00	P/Rft	(-) 94,325.00
7.	Refilling of excavated stuff in trenches 6" thick layer i/c watering ramming to full compaction etc complete.	3054 Cft	2760.00	% Cft	8,429.00
8	Cartage of sand, bajri, lime, surkhi, murrum, building rubbish i/c loading unloading stacking at site all lide and lift.	4204 Cft	1065.00	%Cft	44,773.00
9.	P/L 1:2:4 RCC manhole cover i/c tor bars frame using GSB ¾" and down gauge etc complete.	50 Nos.	913.63	Each	45,682.00
10.	P/F pre-casted RCC ring slab 39" dia with RCC manhole cover of 21" dia as per direction of Engineer Incharage.	30 Nos.	O/R	Each	
11.	S/F Imported Earth with in the a radius of 5 miles i/c digging, lodging, un-lodging all lead and lift leveling and water compaction etc complete.	3000 Cft	O/R	P/Cft	

Address:

## DISTRICT MUNICIPAL CORPORATION (WEST) KARACHI, ORANGI ZONE

Estimated Cost	Rs: 8,24,240 (+) O/R	Earnest Money Rs:	20,000/-
Time Limit:	45 Days	Penalty Per Day Rs:	1,000/-
SUBJECT:	P/L R.C.C Pipe line in Wa in UC#38, Surjani Town,	rd # 01, near Rehmania Masj DMC (West), Karchi.	id,

S.No:	DESCRIPTION OF WORK	QUANTITY	RATE	PER	AMOUNT
1.	Dismantling of cement concrete 1:2:4 plain flooring	1706 Cft	3327.50	%Cft	56,767.00
2.	Excavation for pipe line in trenches and pits in all kind of soil of murum i/c trimming and dressing side to true alignment and shape traveling of beds of trenches to correct level and grade cutting joint holes and disposal of surplus earth within a one chain as directed by Engineer Incharge. Providing fence guard light flags and temporary crossing for non vehicular traffic wherever required left upto 05' and lead upto 01 chain.	3938 Cft	4650.00	1000 Cft	18,312.00
3.	P/L R.C.C. rubber ring pipe of class "A" and fixing in trenches i/c cutting, fitting and jointing with rubber ring etc complete	750 Rft	367.00	P/Rft	2,75,250.00
4.	Construction of manhole 4' dia inside i/c RCC ring slab 39" dia with manhole cover 21" dia of 5' clear depth in 1:2:4 CC in 9" thick wall and beding cast in situ with fair face steel shuttering i/c excavation, back filling and disposal of surplus stuff etc.	35 Nos.	13064.00	Each	4,57,240.00
5.	Add for extra depth beyond 5' depth, less than 5' depth deduct at the same rate.	(-) 52.5 Rft	1540.00	P/Rft	(-) 80,850.00
6.	Refilling of excavated stuff in trenches 6" thick layer i/c watering ramming to full compaction etc complete.	3018 Cft	2760.00	1000 Cft	8,330.00
7.	Cartage of sand, bajri, lime, surkhi, murrum, building rubbish i/c loading unloading stacking at site all lide and lift.	2627 Cft	1065.00	%Cft	27,978.00
8.	P/L 1:2:4 RCC manhole cover i/c tor bars frame using GSB ¾" and down gauge etc complete.	67 Nos.	913.63	Each	61,213.00
9.	P/F pre-casted RCC ring slab 39" dia with RCC manhole cover of 21" dia as per direction of Engineer Incharage.	45 Nos.	O/R	Each	
		Tot	al Estimate	ed Cost	8,24,240 (+) Open Rate

Estimated Cost	Rs: 8,23,327 (+) O/R	Earnest Money Rs:	20,000/-
Time Limit:	45 Days	Penalty Per Day Rs:	1,000/-
SUBJECT:	P/L RCC PIPE & SEWERAGE IN UC-13 ORANGI ZONE DM	SYSTEM IN SECTOR I/A WAF C(WEST).	RD 04

S.No:	DESCRIPTION OF WORK	QUANTITY	RATE	PER	AMOUNT
1.	Dismantling of cement concrete 1:2:4 plain flooring.	1706 Cft	3327.50	%Cft	56,767.00
2.	Excavation for pipe line in trenches and pits in all kind of soil of murum i/c trimming and dressing side to true alignment and shape traveling of beds of trenches to correct level and grade cutting joint holes and disposal of surplus earth within a one chain as directed by Engineer Incharge. Providing fence guard light flags and temporary crossing for non vehicular traffic wherever required left upto 05' and lead upto 01 chain.	3938 Cft	4650.00	1000 Cft	18,312.00
3.	P/L R.C.C. rubber ring pipe of class "A" and fixing in trenches i/c cutting, fitting and jointing with rubber ring etc complete	750 Rft	367.00	P/Rft	2,75,250.00
4.	Construction of manhole 4' dia inside i/c RCC ring slab 39" dia with manhole cover 21" dia of 5' clear depth in 1:2:4 CC in 9" thick wall and beding cast in situ with fair face steel shuttering i/c excavation, back filling and disposal of surplus stuff etc.	35 Nos.	13064.00	Each	4,57,240.00
5.	Add for extra depth beyond 5' depth, less than 5' depth deduct at the same rate.	(-) 52.5 Rft	1540.00	P/Rft	( - ) 80,850.00
6.	Refilling of excavated stuff in trenches 6" thick layer i/c watering ramming to full compaction etc complete.	3018 Cft	2760.00	1000 Cft	8,330.00
7.	Cartage of sand, bajri, lime, surkhi, murrum, building rubbish Vc loading unloading stacking at site all lide and lift.	2627 Cft	1065.00	%Cft	27,978.00
8.	P/L 1:2:4 RCC manhole cover i/c tor bars frame using GSB ¾" and down gauge etc complete.	66 Nos.	913.63	Each	60,300.00
9.	P/F pre-casted RCC ring slab 39" dia with RCC manhole cover of 21" dia as per direction of Engineer Incharage.	45 Nos.	O/R	Each	
	Total Estimated Cost				8,23,327 (+) Open Rate

Nomenclature, Quantities and Rates etc checked and found correct.

	EXECUTIVE ENGINEER(B&R) ORANGI ZONE
% above/below the S/R	
for complete work/job.	
(Rupees:	
(In V	Vord)
Contractor's Signature:	
Address:	
	for complete work/job.  (Rupees:

Estimated Cost	Rs: 5,00,031 (+) O/R	Earnest Money Rs:	20,000/-
Time Limit:	45 Days	Penalty Per Day Rs:	1,000/-
SUBJECT:		NHOLE AND COVER / RING S 22, ORANGI ZONE DMC(WES	

S.No:	DESCRIPTION OF WORK	QUANTITY	RATE	PER	AMOUNT
1.	Dismantling of cement concrete 1:2:4 plain flooring.	1005 Cft	3327.50	%Cft	33,441.00
2.	Construction of manhole 4' dia inside i/c RCC ring slab 39" dia with manhole cover 21" dia of 5' clear depth in 1:2:4 CC in 9" thick wall and beding cast in situ with fair face steel shuttering i/c excavation, back filling and disposal of surplus stuff etc.	20 Nos.	13064.00	Each	2,61,280.00
3.	Add for extra depth beyond 5' depth, less than 5' depth deduct at the same rate.	(-) 35 Rft	1540.00	P/Rft	(-) 53,900.00
4.	P/L 1:2:4 RCC manhole cover i/c tor bars frame using GSB ¾" and down gauge etc complete.	272 Nos.	913.63	Each	2,48,507.00
5.	Cartage of sand, bajri, lime, surkhi, murrum, building rubbish i/c loading unloading stacking at site all lide and lift.	1005 Cft	1065.00	%Cft	10,703.00
6.	P/F pre-casted RCC ring slab 39" dia with RCC manhole cover of 21" dia as per direction of Engineer Incharage.	160 Nos.	O/R	Each	
		Tot	al Estimate	ed Cost	5,00,031 (+) Open Rate

Nomenclature, Quantities and Rates etc checked and found correct.

ORANGI ZONE NGINEER **Building and Roads** I/We hereby quoted Rates @ \_\_\_\_\_\_\_ % above/below the S/R Orangi Zone DMC (West)

EXECUTIVE ENGINEER(B&R)

(In Figure)

(+) Open Rate Rs:\_\_\_\_\_\_ for complete work/job.

The total amount is Rs:\_\_\_\_\_\_ (Rupees: \_\_\_\_\_

(In Word)

Contractor's Signature:\_\_\_\_\_

Address:

Estimated Cost	Rs: 8,64,658 (+) O/R	Earnest Money Rs:	20,000/-
Time Limit:	45 Days	Penalty Per Day Rs:	1,000/-
SUBJECT:	REHABILITATION / IMPROVE AGROR COLONY UC-23, ORA	MENT OF C.C. STREET GALI ANGI ZONE.	# 1, 2

S.No:	DESCRIPTION OF WORK	QUANTITY	RATE	PER	AMOUNT
1.	Dismantling of cement concrete 1:2:4 plain flooring.	4909 Cft	3327.50	%Cft	1,63,347.00
2.	Dismantling of cement concrete flooring 1:3:6 plain.	1300 Cft	1306.80	%Cft	16,988.00
3.	Earth work excavation of road side nails forming its banks or putting the same on embankment as directed breaking clods dressing etc complete in ordinary soil.	5414 Cft	1437.00	1000 Cft	7,780.00
4.	4. Cartage of sand, bajri, lime, surkhi, murrum, building rubbish i/c loading unloading stacking at site all lide and lift.		1065.00	%Cft	1,23,785.00
5.	Preparing of sub-grade i/c earth excavation leveling to an average depth of 9" dressing to camber and consolidation with power roller.	8000 Sft	526.28	%Sft	42,102.00
6.	P/L 1:4:8 C.C. using GSB 2" to 3" and i/c leveling compacting, curing etc complete without shuttering.	2000 Cft	11288.75	%Cft	2,25,775.00
7.	P/L Granular sub-base course material over prepared sub-grade in grade, thickness and typical cross sections for new grade / widening existing pavement using well graded granular stone with sand and silt having a smooth gradation as per AASHTO-M watering with all lead and lift as per directed by Engineer Incharge.	1500 Cft	O/R	P/Cft	
8.	Providing and laying topping cement concrete 1:2:4 I/c surface finishing and dividing into panels.	8000 Sft	3275.50	%Sft	2,62,040.00
9.	P/L 1:2:4 RCC manhole cover i/c tor bars frame using GSB ¾" and down gauge etc complete.	25 Nos.	913.63	Each	22,841.00
10.	P/F RCC ring slab 39" dia with RCC manhole cover of 21" dia as per direction of Engineer Incharage.	25 Nos.	O/R	Each	
	Total Estimated Cost		ed Cost	8,64,658 (+) Open Rate	

Nomenclature, Quantities and Rates etc checked

## DISTRICT MUNICIPAL CORPORATION (WEST) KARACHI, ORANGI ZONE

Estimated Cost	Rs: 9,98,851/-	Earnest Money Rs:	20,000/-
Time Limit:	45 Days	Penalty Per Day Rs:	1,000/-
SUBJECT:	IMPROVEMENT OF C.C. IN UC-22. ORANGE ZON	DRAIN WALL IN USMANIA MOHAL E.	LLAH

S.No:	DESCRIPTION OF WORK	QUANTITY	RATE	PER	AMOUNT
1.	Fabrication of mild steel reinforcement for cement concrete i/c cutting, bending, layer in position making joints and fastening i/c cost of binding works and removal of rust from bars.	2.0 Cwt	5001.70	P/Cwt	10,003.00
2.	RCC work i/c all labor and material except the cost of reinforcement and its labor for bending which will be paid separately. This rate also i/c all kinds of forms, molds, lifting, shuttering, cutting, rendering and finishing the expose surface i/c screening and washing of shingles ratio 1:2:4.	56 Cft	337.00	P/Cft	18,872.00
3.	Cement plaster 1:4 upto 20 feet height ½" thick on walls.	567 Sft	2283.93	%Sft	12,950.00
4.	P/L 1:3:6 C.C. Solid Block Masonry wall 6" thick and below in thickness set in 1:6 CM in G. Floor, Super Structure i/c raking out joints and curing etc complete.	186 Cft	15771.01	%Cft	29,334.00
5.	Hiring of Excavator for desalting and cleaning of Nallah Long Boom i/c POL (for 08 Hours Per Day).	48 Hours	3088.13	P/Hour	1,48,230.00
6.	Hiring of Seal Dumpers Hino for Lifting of Garbage and silt of Nallah i/c Loading & unloading in all respect with POL (for 08 Hours Per Day).	96 Hours	2006.90	P/Hour	1,92,662.00
7.	Hiring of Tractor Blade Heavy Duty for cleaning of Garbage, Street of Road side earth with POL (for 08 Hours Per Day).	12 Days	8500.00	P/Day	1,02,000.00
8.	Hiring of Tractor Trolly Heavy Duty for cleaning of Garbage, Street of Road side earth i/c Loading, Unloading etc complete with POL (for 08 Hours Per Day).	168 Trips	1600.00	P/Trip	2,68,800.00
9.	Hiring of Private Labour for cleaning of Nallah (by Afghani or Bajorri for 08 Hours).	180 Nos.	1200.00	Each P. Day	2,16,000.00
		T	otal Estima	ted Cost	9,98,851

## DISTRICT MUNICIPAL CORPORATION (WEST) KARACHI, ORANGI ZONE

Estimated Cost Rs: 8,30,909 (+) O/R	Earnest Money Rs:	20,000/-
Time Limit: 45 Days	Penalty Per Day Rs:	1,000/-
SUBJECT: CONSTRUCTION OF C	C STREET IN WARD # 4 NEAR	

SUBJECT: CONSTRUCTION OF C.C. STREET IN WARD # 4 NEAR NOORANI MOHALLAH IN UC-13 ORANGI ZONE, DMC(WEST).

S.No:	DESCRIPTION OF WORK	QUANTITY	RATE	PER	AMOUNT
1.	Dismantling of cement concrete 1:2:4 plain flooring.	2250 Cft	3327.50	%Cft	74,869.00
2.	Dismantling of cement concrete flooring 1:3:6 plain.	1200 Cft	1306.80	%Cft	15,682.00
3.	Cartage of sand, bajri, lime, sukhi, murrum, building rubbish i/c loading unloading stacking at site all lide and lift.	7950 Cft	1065.00	%Cft	84,668.00
4.	Preparing of sub-grade i/c earth excavation leveling to an average depth of 9" dressing to camber and consolidation with power roller.		526.28	%Sft	44,734.00
5	P/L 1:4:8 C.C. using GSB 2" to 3" and i/c leveling compacting, curing etc complete without shuttering.		11288.75	%Cft	2,39,886.00
6.	Providing and laying topping cement concrete 1:2.4 i/c surface finishing and dividing into panels.	9934 Sft	3275.50	%Sft	3,25,388.00
7.	P/L 1:2:4 RCC manhole cover i/c tor bars frame using GSB ¾" and down gauge etc complete.	50 Nos	913.63	Each	45,682.00
8.	P/F RCC ring slab 39" dia with RCC manhole cover of 21" dia as per direction of Engineer Incharage.	15 Nos.	O/R	Each	
_					8 30 909/- (+)

**Total Estimated Cost** 

8,30,909/- (+) Open Rate

Nomenclature, Quantities and Rates etc checked and found correct.

EXECUTIVE ENGINEER (B&R)

I/We hereby quoted Rates @	% above/below the S/R	Orangi Zone DMC (West)
(+) Open Rate Rs:	for complete work/job.	
The total amount is Rs:	(Rupees:	
	Contractor's Signature:	
	Address:	
	CELL #:	

S.No:

1.

2.

3.

4.

5.

Estimated Cos	t Rs.	6,51,199 (+) C	)/R E	arnesi	Money Rs	_	20,000/-	
Time Limit:					Per Day F		1,000/-	
	DES	ALTING OF NAL (WEST).				OFF COM	7,000/	
	DESC	RIPTION OF WO	ORK		QUANTITY	RATE	PER	AMOUNT
		or desalting and 08 Hours Per D		lallah	48 Hours	O/R	P/Hour	
	ding &	s Hino for Lifting unloading in all r			324.48 Hours	2006.90	P/Hour	6,51,199.00
	side	Heavy Duty for o earth i/c Load 08 Hours Per Da	ling, Unloading		34 Trips	O/R	P/Trip	
Hiring of Loader (for 08 Hours Pe		ing of Garbage a	and silt etc with	POL	04 Days	O/R	P/Day	
Hiring of Private Bajorri for 08 Ho		for cleaning of I	Nallah (by Afgha	ani or	46 Nos.	O/R	Each P. Day	
					Tot	al Estimat	ed Cost	6,51,199 (+) Open Rate
omenclature, Quai and found correct.		and Rates etc ch	ecked			1	*	
I/We hereby quote (+) Open Rate Rs. The total amount i		fo	or complete wor	k/job.	ne S/R	Orangi	MP/IZONG ling and Ro Zone DMC	NEER pads (West)
			Contractor's	Signat	ure:			

CELL #:

# DISTRICT MUNICIPAL CORPORATION (WEST) KARACHI, ORANGI ZONE

Estimated Cost Rs:_	7,67,432 (+) O/R	Earnest Money Rs:	20,000/-
Time Limit:	45 Days	Penalty Per Day Rs:	1,000/-

SUBJECT: CONSTRUCTION OF CROSSING CULVERT AT ISLAM CHOWK NEAR SARAWAN FOODS U.C # 19, ORANGI ZONE, DMC

(WEST).

S.No:	DESCRIPTION OF WORK	QUANTITY	RATE	PER	AMOUNT
1.	Dismantling of R.C.C. separating reinforcement from concrete, cleaning and straightening same.	970 Cft	5445.00	% Cft	52,817.00
2.	Dismantling of cement concrete 1:2:4 plain flooring.	1116 Cft	3327.50	% Cft	37,135.00
3.	Dismantling of cement concrete flooring 1:3:6 plain.	317 Cft	1306.80	% Cft	4,143.00
4.	Earth work excavation in irrigation channels, irrigation drain etc dressed to designed section and profile excavated material disposed off and dressed within 50 feet lead.	6520 Cft	2420.00	% Cft	15,778.00
5.	Stone filling dry hand packed as filling behind retaining walls or in pitching and aprons.	248 Cft	2684.00	% Cft	6,656.00
6.	P/L 1:4:8 C.C. using GSB 2" to 3" and i/c leveling compacting, curing etc complete without shuttering.	308 Cft	11288.75	% Cft	.34,769.00
7.	Cement concrete plain 1:2:4 i/c placing, compacting, finishing and curing complete i/c screening & washing of stone aggregate without shuttring.	825 cft	14429.25	% Cft	1,19,041.00
15.	Erection and removal of centering for RCC or plain CC work in partal wood (vertical)	1050 Sft	3127 41	% Sft	32,838 00
9	Fabrication of mild steel reinforcement for cement concrete i/c cutting, bending, layer in position making joints and fastening i/c cost of binding works and removal of rust from bars.	17.94 Cwt	5001.70	P/Cwt	89,730.00
10.	RCC work i/c all labor and material except the cost of reinforcement and its labor for bending which will be paid separately. This rate also i/c all kinds of forms, molds, lifting, shuttering, cutting, rendering and finishing the expose surface i/c screening and washing of shingles ratio 1:2:4.	396 Cft	337.00	P/Cft	1,33,452.00
11.	Bailing or pumping out sub soil water during excavation concrete cast in situ or masonry work in foundation only three operator allowed.	3168 Cft	543.00	% Cft	17,202.00
12	S/F new jute bags 4 to 5 Cft capacity with sand or earth laying in position under water.	528 Nos	202.46	Each	1,06,899.00

		7	otal Estima	ted Cost	7,67,432.00 (+) Open Rate
16.	P/L Aggregate base course material over prepared sub-grade in grade, thickness and typical cross sections grade / widening existing pavement using well graded crushed stone with sand and silt having a smooth graduation as per AASHTO-M watering with all lead and lift as per directed by Engineer Incharge.	396 Cft	5542,24	% Cft	21,947.00
17.	Dismantling of removing of road metal carpeting etc.	7200 Sft	605.00	% Sft	43,560 00
8	P/F R.C.C. pre-cast slab 2" thick of required size and shape and racking out joints with CM curing etc complete as per direction of Engineer Incharge.	264 Sft	O/R	P/Sft	
<b>4</b>	Cartage of sand, bajri, lime, surkhi, murrum, building rubbish i/c loading unloading stacking at site all lide and lift.	8923 Cft	1065.00	%Cft	95,030.00
13.	Extra for using (S.R Cement) Sulphate resistant cement in place of ordinary Portland cement.	224 Cwt	O/R	P/Cwt	

Nomenclature, Quantities and Rates etc checked and found correct.

I/We hereby quoted Rates @	% above/below the S/R	EXECUTIVE ENGINEER (B&R)  EXECUTIVE ENGINEER (B&R)  Building and Roads  Orangi Zone DMC (West)
(+) Open Rate Rs:	for complete work/job.	
The total amount is Rs:	(Rupees:	
,	Contractor's Signature:	
	Address:	
	CELL #	



(WEST),

Phone: 36697869 & 36660102

#### BIDDING DATA NIT No: 04/2017-18, Work No:01

ad House at
_
_
_
Zone, -Orangi,
%).
_
_

CONTRACTOR

ORANGI Zone, DMC(West)
EXECUTIVE ENGINEER **Building** and Roads Orangi Zone DMC (West)



(WEST),

Phone: 36697869 & 36660102

#### BIDDING DATA NIT No: 04/2017-18, Work No:02

Name of Procuring Agency_	District Municipal Corp	poration (West), Karachi
Brief Description of Works		ge System by 15"dia Pipe Near , Usmani Mohallah UC-22
Procuring Agency's address	Sector 11-E Shahrah-e-	-Orangi Karachi
Estimated Cost:	7,70,864/-+O/R	
Amount of Bid Security:	20,000/-	
Period of Bid Validity (days).	90 Days	3
Percentage, if any, to be ded	ducted from bills :	7.5 % Income Tax
Deadline for Submission of L	Bids along with time :	18.10.2017 at 11:30 AM
Venue, Time and Date of Bio	DMC(West), Karad	utive Engineer (B&R), Orangi Zone, chi, at Sector 11-E Shahrah-e-Orangi, loon On:18.10.2017,
Time for Completion from wi	ritten order of commence:_	45 Days
Liquidity damages:	Rs: 500/- Per Day	it total not exceeding 10%).
Earnest Money Vide Pay Ord	der No:	_ Dated:
Bidding Document issued to	M/S:	
		1
	Brief Description of Works  Procuring Agency's address  Estimated Cost:	Procuring Agency's address: Sector 11-E Shahrah-e  Estimated Cost: 7,70,864/-+O/R  Amount of Bid Security: 20,000/-  Period of Bid Validity (days): 90 Days  (i). Security Deposit:-(i/c bid security): 02.00% of Co (ii). 8% Retention Money of bill amount will be dedu  Percentage, if any, to be deducted from bills:  Deadline for Submission of Bids along with time: Venue, Time and Date of Bid Opening: Office of the Executive DMC(West), Karah

CONTRACTOR

EXECUTIVE ENGINEER(B&R) ORANGI Zone, DMC(West) EXECUTIVE ENGINEER

Building and Roads **Orangi** Zone DMC (West)



(WEST),

Phone: 36697869 & 36660102

#### BIDDING DATA NIT No: 04/2017-18, Work No:03

(a).	Name of Procuring Agency District Municipal Corporation (West), Karachi
(b).	Brief Description of Works Repair of Drain / Slab Near Asra General Stor Masqati Mohallah UC-21
(c).	Procuring Agency's address: Sector 11-E Shahrah-e-Orangi Karachi
(d).	Estimated Cost: 2,18,594/-+O/R
(e).	Amount of Bid Security: 20,000/-
(f).	Period of Bid Validity (days): 90 Days
(g).	(i). Security Deposit:-(i/c bid security): 02.00% of Contract/Sanction Amount (ii). 8% Retention Money of bill amount will be deducted from Running Bill.
(h).	Percentage, if any, to be deducted from bills : 7.5 % Income Tax
(i).	Deadline for Submission of Bids along with time : 18.10.2017 at 11:30 AM
(j).	Venue, Time and Date of Bid Opening: Office of the Executive Engineer (B&R), Orangi Zone, DMC(West), Karachi, at Sector 11-E Shahrah-e-Orang Karachi at 12:00 Noon On:18.10.2017.
(k).	Time for Completion from written order of commence: 45 Days
(1).	Liquidity damages: Rs: 500/- Per Day
	(0.05 of Estimated Cost or Bid cost per day of delay, but total not exceeding 10%).
(m).	Tender Cost Vide Pay Order No: Dated:
	Amount: Rs: 1000/- (Rupees: One Thousand Only).
(n).	Earnest Money Vide Pay Order No: Dated: Amount:
(0).	Bidding Document issued to: M/S:
	CONTRACTOR  EXECUTIVE ENGINEER(B&R)  ORANGI Zone, DMC(West)  EXECUTIVE ENGINEER  Building and Roads  Orangi Zone DMC (West)



(WEST),

Phone: 36697869 & 36660102

#### BIDDING DATA NIT No: 04/2017-18, Work No:04

(a).	Name of Procuring Agency <u>District Municipal Corporation (West), Karachi</u>
(b).	Brief Description of Works Rehabilitation / Improvement of Drain & Rcc Slab Near UC-21 Office Masqati Mohallah
(c).	Procuring Agency's address: Sector 11-E Shahrah-e-Orangi Karachi
(d).	Estimated Cost: 2,19,219/-+O/R
(e).	Amount of Bid Security: 20,000/-
(f).	Period of Bid Validity (days): 90 Days
(g).	(i). Security Deposit:-(i/c bid security): 02.00% of Contract/Sanction Amount (ii). 8% Retention Money of bill amount will be deducted from Running Bill.
(h).	Percentage, if any, to be deducted from bills : 7.5 % Income Tax
(i).	Deadline for Submission of Bids along with time : 18.10.2017 at 11:30 AM
(j).	Venue, Time and Date of Bid Opening: Office of the Executive Engineer (B&R), Orangi Zone, DMC(West), Karachi, at Sector 11-E Shahrah-e-Orangi, Karachi at 12:00 Noon On:18.10.2017.
(k).	Time for Completion from written order of commence: 45 Days
(1).	Liquidity damages: Rs: 500/- Per Day (0.05 of Estimated Cost or Bid cost per day of delay, but total not exceeding 10%).
(m).	Tender Cost Vide Pay Order No: Dated:
	Amount: Rs: 1000/- (Rupees: One Thousand Only).
(n).	Earnest Money Vide Pay Order No: Dated:
	Amount:
(0).	Bidding Document issued to: M/S:
	EXECUTIVE ENGINEER(B&R)

CONTRACTOR

ORANGI Zone, DMC(West) EXECUTIVE ENGINEER **Building and Roads** Orangi Zone DMC (West)



(WEST),

Phone. 36697869 & 36660102

#### BIDDING DATA NIT No: 04/2017-18, Work No:05

(a).	Name of Procuring Agency <u>District Municipal Corporation (West), Karachi</u>
(b).	Brief Description of Works Repairing of Rcc Pipe and Manholes Qamer House Zia Colony UC-23
(c).	Procuring Agency's address: Sector 11-E Shahrah-e-Orangi Karachi
(d).	Estimated Cost: 7,14,484/-+O/R
(e).	Amount of Bid Security: 20,000/-
(f).	Period of Bid Validity (days): 90 Days
(g).	(i). Security Deposit:-(i/c bid security): 02.00% of Contract/Sanction Amount (ii). 8% Retention Money of bill amount will be deducted from Running Bill.
(h).	Percentage, if any, to be deducted from bills : 7.5 % Income Tax
(i).	Deadline for Submission of Bids along with time : 18.10.2017 at 11:30 AM
(j).	Venue, Time and Date of Bid Opening: Office of the Executive Engineer (B&R), Orangi Zone, DMC(West), Karachi, at Sector 11-E Shahrah-e-Orangi, Karachi at 12:00 Noon On:18.10.2017.
(k).	Time for Completion from written order of commence: 45 Days
(1).	Liquidity damages: Rs: 500/- Per Day
	(0.05 of Estimated Cost or Bid cost per day of delay, but total not exceeding 10%).
(m).	Tender Cost Vide Pay Order No: Dated:
	Amount: Rs: 1000/- (Rupees: One Thousand Only).
(n).	Earnest Money Vide Pay Order No: Dated: Amount:
(0).	Bidding Document issued to: M/S:
	CONTRACTOR  EXECUTIVE ENGINEER(B&R)  ORANGI Zone, DMC(West)  EXECUTIVE ENGINEER  Building and Roads  Orangi Zone DMC (West)



(WEST),

Phone: 36697869 & 36660102

#### BIDDING DATA NIT No: 04/2017-18, Work No:06

(a).	Name of Procuring Agency District Municipal Corporation (West), Karachi
(b).	Brief Description of Works  Rehabilitation of Rcc Pipe 12"dia Near Rehmani Masjd, Rehmani Mohallah, Zia Colony No. 03, UC-23
(c).	Procuring Agency's address: Sector 11-E Shahrah-e-Orangi Karachi
(d).	Estimated Cost: 8,52,022/-+O/R
(e).	Amount of Bid Security: 20,000/-
(f).	Period of Bid Validity (days): 90 Days
(g).	(i). Security Deposit:-(i/c bid security): 02.00% of Contract/Sanction Amount (ii). 8% Retention Money of bill amount will be deducted from Running Bill.
(h).	Percentage, if any, to be deducted from bills : 7.5 % Income Tax
(i).	Deadline for Submission of Bids along with time : 18.10.2017 at 11:30 AM
(j).	Venue, Time and Date of Bid Opening: Office of the Executive Engineer (B&R), Orangi Zone, DMC(West), Karachi, at Sector 11-E Shahrah-e-Orangi, Karachi at 12:00 Noon On:18.10.2017.
(k).	Time for Completion from written order of commence: 45 Days
(1).	Liquidity damages: Rs: 500/- Per Day (0.05 of Estimated Cost or Bid cost per day of delay, but total not exceeding 10%).
(m).	Tender Cost Vide Pay Order No: Dated:
	Amount: Rs: 1000/- (Rupees: One Thousand Only).
(n).	Earnest Money Vide Pay Order No: Dated: Amount:
(0).	Bidding Document issued to: M/S:
	- Lunh

CONTRACTOR

EXECUTIVE ENGINEER(B&R) ORANGI Zone, DMC(West) EXECUTIVE ENGINEER **Building and Roads** 

Orangi Zone DMC (West)



## DISTRICT MUNICIPAL CORPORATION ORANGI ZONE, KARACHI

(WEST),

Sector 11/E Shahrah-e-Orangi, Karachi Phone: 36697869 & 36660102

#### BIDDING DATA NIT No: 04/2017-18, Work No:07

(a).	Name of Procuring Agency <u>District Municipal Corporation (West), Karachi</u>			
(b).	Brief Description of Works  Repairing of Rcc Pipe and Manhole Rehmania Mohallah an Other Places of UC-23 in Orangi Zone DMC (West)			
(C).	Procuring Agency's address: Sector 11-E Shahrah-e-Orangi Karachi			
(d).	Estimated Cost:9,86,900/-			
(e).	Amount of Bid Security: 20,000/-			
(f).	Period of Bid Validity (days): 90 Days			
(g).	(i). Security Deposit:-(i/c bid security): 02.00% of Contract/Sanction Amount (ii). 8% Retention Money of bill amount will be deducted from Running Bill.			
(h).	Percentage, if any, to be deducted from bills : 7.5 % Income Tax			
(i).	Deadline for Submission of Bids along with time : 18.10.2017 at 11:30 AM			
(j).	Venue, Time and Date of Bid Opening: Office of the Executive Engineer (B&R), Orangi Zone, DMC(West), Karachi, at Sector 11-E Shahrah-e-Orangi, Karachi at 12:00 Noon On:18.10.2017.			
(k).	Time for Completion from written order of commence: 45 Days			
(1).	Liquidity damages: Rs: 500/- Per Day  (0.05 of Estimated Cost or Bid cost per day of delay, but total not exceeding 10%).			
(m).	Tender Cost Vide Pay Order No: Dated:			
	Amount: Rs: 1000/- (Rupees: One Thousand Only).			
(n).	Earnest Money Vide Pay Order No: Dated: Amount:			
(0).	Bidding Document issued to: M/S:			
	CONTRACTOR  EXECUTIVE ENGINEER(B&R) ORANGI Zone, DMC(West)			

Building and Roads Orangi Zone DMC (West)



(WEST),

**Building and Roads** Orangi Zone DMC (West)

Phone, 36697869 & 36660102

#### BIDDING DATA NIT No: 04/2017-18, Work No:08

(a).	Name of Procuring Agency	District Municipal Corporation (West), Karachi		
(b).	Brief Description of Works	Rehabilitation and Construction of Rcc Pipe Line Gali # 05, Ward # 04, in UC-24 Orangi Zone DMC (West)		
(c).	Procuring Agency's address	s:Sector 11-E Shahrah-e-Orangi Karachi		
(d).	Estimated Cost:	8, 15, 746/-+O/R		
(e).	Amount of Bid Security:	20,000/-		
(f).	Period of Bid Validity (days)	:90 Days		
(g).		bid security): 02.00% of Contract/Sanction Amount of bill amount will be deducted from Running Bill.		
(h).	Percentage, if any, to be de	ducted from bills : 7.5 % Income Tax		
(i).	Deadline for Submission of Bids along with time : 18.10.2017 at 11:30 AM			
(j).	Venue, Time and Date of B	id Opening: Office of the Executive Engineer (B&R), Orangi Zone, DMC(West), Karachi, at Sector 11-E Shahrah-e-Orangi, Karachi at 12:00 Noon On:18.10.2017.		
(k).	Time for Completion from w	ritten order of commence: 45 Days		
(1).	Liquidity damages:(0.05 of Estimated Cost or E	Rs: 500/- Per Day Bid cost per day of delay, but total not exceeding 10%).		
(m).	Tender Cost Vide Pay Orde	r No: Dated:		
		Rs: 1000/- (Rupees: One Thousand Only).		
(n).	Earnest Money Vide Pay Of	rder No: Dated:		
(o).	Bidding Document issued to	o:_M/S:		
	CONTRACTOR	EXECUTIVE ENGINEER(B&R) ORANGI Zone, DMC(West) EXECUTIVE ENGINEER		



(WEST),

Phone: 36697869 & 36660102

#### BIDDING DATA NIT No: 04/2017-18, Work No:09

(a).	Name of Procuring Agency_	District Municipal Corporation (West), Karachi		
(b).	Brief Description of Works	Rehabilitation of Sewerage System in Bunerty Mohallah Hill Area, Other Places of UC-23 in Orangi Zone DMC (West)		
(c).	Procuring Agency's address	:Sector 11-E Shahrah-e-Orangi Karachi		
(d).	Estimated Cost:	9,98,700/-		
(e).	Amount of Bid Security:	20,000/-		
(f).	Period of Bid Validity (days).	90 Days		
(g).	(i). Security Deposit:-(i/c bid security): 02.00% of Contract/Sanction Amount (ii). 8% Retention Money of bill amount will be deducted from Running Bill.			
(h).	Percentage, if any, to be ded	ducted from bills : 7.5 % Income Tax		
(i).	Deadline for Submission of L	Bids along with time :18.10.2017 at 11:30 AM		
(j).	Venue, Time and Date of Bio	d Opening: Office of the Executive Engineer (B&R), Orangi Zone, DMC(West), Karachi, at Sector 11-E Shahrah-e-Orangi, Karachi at 12:00 Noon On:18.10.2017.		
(k).	Time for Completion from wi	ritten order of commence: 45 Days		
(1).	Liquidity damages:	Rs: 500/- Per Day tid cost per day of delay, but total not exceeding 10%).		
(m). Tender Cost Vide Pay Order No: Dated:		r No: Dated:		
		Rs: 1000/- (Rupees: One Thousand Only).		
(n).	Earnest Money Vide Pay Or Amount:	der No: Dated:		
(0).	Bidding Document issued to	:_ M/S:		
	CONTRACTOR	EXECUTIVE ENGINEER(B&R) ORANGI Zone, DMC(West) EXECUTIVE ENGINEER Building and Roads		

Orangi Zone DMC (West)



(WEST),

Sector 11/E Shahrah-e-Orangi, Karachi Phone, 36697869 & 36660102

### BIDDING DATA NIT No: 04/2017-18, Work No:10

(a).	Name of Procuring Agency_	District Municipal Corporation (West), Karachi
(b).	Brief Description of Works	Imp of Rcc Culvert Near Kabady Ground Road & Near Sheel Petrol Pump, Faquer Colony, in UC-22 Orangi Zone DMC (West)
(C).	Procuring Agency's address	:Sector 11-E Shahrah-e-Orangi Karachi
(d).	Estimated Cost:	4,12,645/-+O/R
(e).	Amount of Bid Security:	20,000/-
(f).	Period of Bid Validity (days):	90 Days
(g).		of bill amount will be deducted from Running Bill.
(h).	Percentage, if any, to be dec	ducted from bills : 7.5 % Income Tax
(i).	Deadline for Submission of E	Bids along with time :18.10.2017 at 11:30 AM
(j).	Venue, Time and Date of Bio	d Opening: Office of the Executive Engineer (B&R), Orangi Zone, DMC(West), Karachi, at Sector 11-E Shahrah-e-Orangi, Karachi at 12:00 Noon On:18.10.2017.
(k).	Time for Completion from wr	ritten order of commence: 45 Days
(1).	Liquidity damages: (0.05 of Estimated Cost or B	Rs: 500/- Per Day id cost per day of delay, but total not exceeding 10%).
(m).	Tender Cost Vide Pay Order	No: Dated:
	Amount: R	2s: 1000/- (Rupees: One Thousand Only).
(n).	Earnest Money Vide Pay Ord	der No: Dated:
(0).	Bidding Document issued to	: <u>M/S</u> :
	CONTRACTOR	EXECUTIVE ENGINEER(B&R) ORANGI Zone, DMC(West) EXECUTIVE ENGINEER

Building and Roads Orangi Zone DMC (West)



(WEST),

Sector 11/E Shahrah-e-Orangi, Karachi Phone: 36697869 & 36660102

### BIDDING DATA NIT No: 04/2017-18, Work No:11

Name of Procuring Agency_	District Municipal Corporation (West), Karachi
Brief Description of Works	Improvement of Drain & Rcc Slab in Raheem Shah Colony UC-25 Orangi Zone DMC (West)
Procuring Agency's address:	Sector 11-E Shahrah-e-Orangi Karachi
Estimated Cost:	3,06,689/-+O/R
Amount of Bid Security:	20,000/-
Period of Bid Validity (days):_	90 Days
	id security): 02.00% of Contract/Sanction Amount of bill amount will be deducted from Running Bill.
Percentage, if any, to be ded	ucted from bills : 7.5 % Income Tax
Deadline for Submission of B	ids along with time :18.10.2017 at 11:30 AM
Venue, Time and Date of Bid	Opening: Office of the Executive Engineer (B&R), Orangi Zone, DMC(West), Karachi, at Sector 11-E Shahrah-e-Orangi, Karachi at 12:00 Noon On:18.10.2017.
Time for Completion from writ	tten order of commence: 45 Days
Liquidity damages:(0.05 of Estimated Cost or Bio	Rs: 500/- Per Day d cost per day of delay, but total not exceeding 10%).
Tender Cost Vide Pay Order	No: Dated:
Amount: Rs	s: 1000/- (Rupees: One Thousand Only).
	ler No: Dated:
Amount:	
Bidding Document issued to:	M/S:
	EXECUTIVE FAGINEER(B&R)
	Procuring Agency's address:  Estimated Cost:  Amount of Bid Security:  Period of Bid Validity (days):  (i). Security Deposit:-(i/c bidii).  8% Retention Money:  Percentage, if any, to be ded  Deadline for Submission of Bid  Venue, Time and Date of Bid  Time for Completion from writh  Liquidity damages:  (0.05 of Estimated Cost or Bid  Tender Cost Vide Pay Order  Amount:  Earnest Money Vide Pay Order  Amount:

CONTRACTOR

EXECUTIVE ENGINEER(B&R, ORANGI Zone, DMC(West)

EXECUTIVE ENGINEER

Building and Roads

Orangi Zone DMC (West)



(WEST),

Grangi Zone DMC (West)

Sector 11/E Shahrah-e-Orangi, Karachi Phone: 36697869 & 36660102

### BIDDING DATA NIT No: 04/2017-18, Work No:12

(a).	Name of Procuring Agency_	District Municipal Corporation (West), Karachi
(b).	Brief Description of Works	Rehabilitation and Construction of CC Street Raees Amrohi Colony in Gali #9,10,11 Ward 04 in UC-26 Orangi Zone
(c).	Procuring Agency's address	:Sector 11-E Shahrah-e-Orangi Karachi
(d).	Estimated Cost:	5,57,614/-+O/R
(e).	Amount of Bid Security:	20,000/-
(f).	Period of Bid Validity (days):	90 Days
(g).		of bill amount will be deducted from Running Bill.
(h).	Percentage, if any, to be dec	ducted from bills : 7.5 % Income Tax
(i).	Deadline for Submission of E	Bids along with time: 18.10.2017 at 11:30 AM
(j).	Venue, Time and Date of Bio	Opening: Office of the Executive Engineer (B&R), Orangi Zone, DMC(West), Karachi, at Sector 11-E Shahrah-e-Orangi, Karachi at 12:00 Noon On:18.10.2017.
(k).	Time for Completion from wr	itten order of commence: 45 Days
(1).	Liquidity damages:	Rs: 500/- Per Day id cost per day of delay, but total not exceeding 10%).
(m).	Tender Cost Vide Pay Order	No: Dated:
	Amount: R	s: 1000/- (Rupees: One Thousand Only).
(n).	Earnest Money Vide Pay Ord	der No: Dated:
	Amount:	
(0).	Bidding Document issued to:	M/S:
	CONTRACTOR	EXECUTIVE ENGINEER(B&R) ORANGI Zone, DMC(West) EXECUTIVE ENGINEER Building and Reads



(WEST),

Sector 11/E Shahrah-e-Orangi, Karachi Phone: 36697869 & 36660102

### BIDDING DATA NIT No: 04/2017-18, Work No:13

(a).	Name of Procuring Agency_	District Municipal Corporation (West), Karachi	
(b).	Brief Description of Works	Imp / Repair of Rcc Pipe & Manhole Near Sector 1/D, in UC-20 Orangi Zone DMC (West)	Block A
(c).	Procuring Agency's address:	Sector 11-E Shahrah-e-Orangi Karachi	
(d).	Estimated Cost:	8,20,586/-+O/R	
(e).	Amount of Bid Security:	20,000/-	
(f).	Period of Bid Validity (days):_	90 Days	
(g).		id security): 02.00% of Contract/Sanction Amount of bill amount will be deducted from Running Bill.	
(h).	Percentage, if any, to be ded	ucted from bills : 7.5 % Income Tax	
(i).	Deadline for Submission of B	ids along with time : 18.10.2017 at 11:30 AM	
(j)-	Venue, Time and Date of Bid	Opening: Office of the Executive Engineer (B&R), Orangi Zone DMC(West), Karachi, at Sector 11-E Shahrah-e-Oran Karachi at 12:00 Noon On:18.10.2017.	
(k).	Time for Completion from writ	tten order of commence: 45 Days	
(1).	Liquidity damages:	Rs: 500/- Per Day d cost per day of delay, but total not exceeding 10%).	
(m)			
(m).		No: Dated: s: 1000/- (Rupees: One Thousand Only).	
(n).		er No: Dated:	
(0).	Bidding Document issued to:	M/S:	
	CONTRACTOR	ORANGI Zone, DMC(West)  EXECUTIVE ENGINEER(B&R)  EXECUTIVE ENGINEER  Building and Roads  Orangi Zone DMC (West)	



(WEST),

Sector 11/E Shahrah-e-Orangi, Karachi Phone: 36697869 & 36660102

### BIDDING DATA NIT No: 04/2017-18, Work No:14

(a).	Name of Procuring Agency_	District Municipal Corporation (West), Karachi
(b).	Brief Description of Works	Imp / Repair of Road Carpeting in Sector 5/E in UC-20 Orangi Zone DMC (West)
(c).	Procuring Agency's address:	Sector 11-E Shahrah-e-Orangi Karachi
(d).	Estimated Cost:	7,35,201/-+O/R
(e).	Amount of Bid Security:	20,000/-
(f).	Period of Bid Validity (days):_	90 Days
(g).		of bill amount will be deducted from Running Bill.
(h).	Percentage, if any, to be ded	ucted from bills : 7.5 % Income Tax
(i).	Deadline for Submission of Bids along with time : 18.10.2017 at 11:30 AM	
(j).	Venue, Time and Date of Bid	Opening: Office of the Executive Engineer (B&R), Orangi Zone, DMC(West), Karachi, at Sector 11-E Shahrah-e-Orangi, Karachi at 12:00 Noon On:18.10.2017.
(k).	Time for Completion from writ	ten order of commence: 45 Days
(1).	Liquidity damages:	Rs: 500/- Per Day d cost per day of delay, but total not exceeding 10%).
(m).	Tender Cost Vide Pay Order	No: Dated:
	Amount: Rs	: 1000/- (Rupees: One Thousand Only).
(n).	Earnest Money Vide Pay Ord	er No: Dated:
(0).	Bidding Document issued to:	M/S:
925		

CONTRACTOR

EXECUTIVE ENGINEER(B&R)
ORANGI Zone, DMC(West)
EXECUTIVE ENGINEER

Building and Roads
Orangi Zone DMC (West)



### DISTRICT MUNICIPAL CORPORATION Orangi Zone, Karachi

(WEST),

Sector 11/E Shahrah-e-Orangi, Karachi Phone: 36697869 & 36660102

### BIDDING DATA NIT No: 04/2017-18, Work No:15

(a).	). Name of Procuring Agency <u>District M</u>	unicipal Corporation (West), Karachi
(b).		mage Rcc Pipe & Main Hole at Khyber Colony, d Other Gali UC-23 Orangi Zone
(c).	c). Procuring Agency's address: Sector 11-	E Shahrah-e-Orangi Karachi
(d).	f). Estimated Cost: 8,45,888	3/-+O/R
(e).	). Amount of Bid Security: 20,000/-	
(f).	. Period of Bid Validity (days):	90 Days
(g).		02.00% of Contract/Sanction Amount will be deducted from Running Bill.
(h).	). Percentage, if any, to be deducted from bit	Ils : 7.5 % Income Tax
(i).	Deadline for Submission of Bids along with	time:18.10.2017_at 11:30 AM
(j).	DN	ice of the Executive Engineer (B&R), Orangi Zone, fC(West), Karachi, at Sector 11-E Shahrah-e-Orangi, rachi at 12:00 Noon On:18.10.2017.
(k).	Time for Completion from written order of o	commence: 45 Days
(1).	Liquidity damages: Rs: 500/- (0.05 of Estimated Cost or Bid cost per day	Per Day of delay, but total not exceeding 10%).
(m).	n). Tender Cost Vide Pay Order No:	Dated:
	Amount: Rs: 1000/- (Ruj	pees: One Thousand Only).
(n).	). Earnest Money Vide Pay Order No: Amount:	Dated:
(0).	). Bidding Document issued to: M/S:	
		EXECUTIVE ENGINEER(B&R)

CONTRACTOR

ORANGI Zone, DMC(West)



(WEST),

Sector 11/E Shahrah-e-Orangi, Karac Phone: 36697869 & 36660102

### BIDDING DATA NIT No: 04/2017-18, Work No:16

(a).	Name of Procuring Agency <u>District Municipal Corporation (West), Karachi</u>
(b).	Brief Description of Works Rehabilitation / Imp of CC Street Gali # 1,2 Agror Colony U 23 Orangi Zone
(c).	Procuring Agency's address: Sector 11-E Shahrah-e-Orangi Karachi
(d).	Estimated Cost: 8,64,658/-+O/R
(e).	Amount of Bid Security: 20,000/-
(f).	Period of Bid Validity (days): 90 Days
(g).	(i). Security Deposit:-(i/c bid security): 02.00% of Contract/Sanction Amount (ii). 8% Retention Money of bill amount will be deducted from Running Bill.
(h).	Percentage, if any, to be deducted from bills : 7.5 % Income Tax
(i).	Deadline for Submission of Bids along with time : 18.10.2017 at 11:30 AM
(j).	Venue, Time and Date of Bid Opening: Office of the Executive Engineer (B&R), Orangi Zone, DMC(West), Karachi, at Sector 11-E Shahrah-e-Orangi, Karachi at 12:00 Noon On:18.10.2017.
(k).	Time for Completion from written order of commence: 45 Days
(1).	Liquidity damages: Rs: 500/- Per Day  (0.05 of Estimated Cost or Bid cost per day of delay, but total not exceeding 10%).
(m).	Tender Cost Vide Pay Order No: Dated:
	Amount: Rs: 1000/- (Rupees: One Thousand Only).
(n).	Earnest Money Vide Pay Order No: Dated: Amount:
(o).	Bidding Document issued to: M/S:
	- Ind

CONTRACTOR

EXECUTIVE ENGINEER(B&R)
ORANGI Zone, DMC(West)



(WEST),

Phone: 36697869 & 36660102

### BIDDING DATA NIT No: 04/2017-18, Work No:17

Name of Procuring Agency <u>District Municipal Corporation (West), Karachi</u>
Brief Description of Works P/L R.C.C Pipe line in Ward # 01, near Rehmania Masjid, in UC# 38, Surjani Town, DMC (West), Karchi.
Procuring Agency's address: Sector 11-E Shahrah-e-Orangi Karachi
Estimated Cost: 8,24,240/-+O/R
Amount of Bid Security: 20,000/-
Period of Bid Validity (days):90 Days
(i). Security Deposit:-(i/c bid security): 02.00% of Contract/Sanction Amount (ii). 8% Retention Money of bill amount will be deducted from Running Bill.
Percentage, if any, to be deducted from bills : 7.5 % Income Tax
Deadline for Submission of Bids along with time : 18.10.2017 at 11:30 AM
Venue, Time and Date of Bid Opening: Office of the Executive Engineer (B&R), Orangi Zone DMC(West), Karachi, at Sector 11-E Shahrah-e-Oran Karachi at 12:00 Noon On:18.10.2017.
Time for Completion from written order of commence: 45 Days
Liquidity damages: Rs: 500/- Per Day  (0.05 of Estimated Cost or Bid cost per day of delay, but total not exceeding 10%).
Tender Cost Vide Pay Order No: Dated:
Amount: Rs: 1000/- (Rupees: One Thousand Only).
Earnest Money Vide Pay Order No: Dated:
Amount:
Bidding Document issued to: _M/S:

CONTRACTOR

EXECUTIVE ENGINEER(B&R) ORANGI Zone, DMC(West)
EXECUTIVE ENGINEER **Building and Roads** Qrangi Zone DMC (West)



(WEST),

Phone: 36697869 & 36660102

### BIDDING DATA NIT No: 04/2017-18, Work No:18

(a).	Name of Procuring Ager	ncy District Municipal Corporation (West), Karachi
(b).	Brief Description of World	ks P/L Rcc Pipe & Sewerage System in Sector 1/A Ward 04 in UC-13 Orangi Zone DMC (West)
(c).	Procuring Agency's add	ress: Sector 11-E Shahrah-e-Orangi Karachi
(d).	Estimated Cost:	8,23,327/-+O/R
(e).	Amount of Bid Security:_	20,000/-
(f).	Period of Bid Validity (da	90 Days
(g).		i/c bid security): 02.00% of Contract/Sanction Amount ney of bill amount will be deducted from Running Bill.
(h).	Percentage, if any, to be	deducted from bills : 7.5 % Income Tax
(i).	Deadline for Submission	of Bids along with time : 18.10.2017 at 11:30 AM
(j).	Venue, Time and Date o	f Bid Opening: Office of the Executive Engineer (B&R), Orangi Zone, DMC(West), Karachi, at Sector 11-E Shahrah-e-Orangi, Karachi at 12:00 Noon On:18.10.2017.
(k).	Time for Completion from	n written order of commence: 45 Days
(1).	Liquidity damages:(0.05 of Estimated Cost of	Rs: 500/- Per Day or Bid cost per day of delay, but total not exceeding 10%).
(m). Tender Cost Vide Pay Order No: Dated:		rder No: Dated:
	Amount:	Rs: 1000/- (Rupees: One Thousand Only).
n).	Earnest Money Vide Pay	Order No: Dated:
	Amount:	
o).	Bidding Document issued	d to:_M/S:
		A tour
	CONTRACTOR	EXECUTIVE ENGINEER(B&R) ORANGI Zone, DMC(West)

**EXECUTIVE ENGINEER** 

Building and Roads Orangi Zone DMC (West)



(WEST),

Phone: 36697869 & 36660102

### BIDDING DATA NIT No: 04/2017-18, Work No:19

Name of Procuring A	gency <u>District Municipal Co</u>	orporation (West), Karachi
). Brief Description of W		anhole and Cover / Ring Slab in Orangi Zone DMC (West)
. Procuring Agency's a	ddress: Sector 11-E Shahrah	-e-Orangi Karachi
. Estimated Cost:	5,00,031/-+O/R	
. Amount of Bid Securi	ty:20,000/-	
Period of Bid Validity	(days):90 Da	ys
이 그 그 사람이 하는 그 그 그 그 그 그 그 그 그 그 그 그 그 그 그 그 그 그	it:-(i/c bid security):_02.00% of 0 Money of bill amount will be dec	
. Percentage, if any, to	be deducted from bills :	7.5 % Income Tax
Deadline for Submiss	ion of Bids along with time :	18.10.2017 at 11:30 AM
Venue, Time and Date	DMC(West), Ka	ecutive Engineer (B&R), Orangi Zone, rachi, at Sector 11-E Shahrah-e-Orang 0 Noon On:18.10.2017.
Time for Completion f	rom written order of commence	45 Days
	Rs: 500/- Per Day st or Bid cost per day of delay,	but total not exceeding 10%).
. Tender Cost Vide Pay	Order No:	Dated:
Amount:	Rs: 1000/- (Rupees: One	Thousand Only).
Earnest Money Vide F	Pay Order No:	Dated:
Amount:		
Bidding Document iss	ued to:_M/S:	
		1 Com
		) —

CONTRACTOR

EXECUTIVE ENGINEER(B&R) ORANGI Zone, DMC(West)



(WEST),

Phone: 36697869 & 36660102

### BIDDING DATA NIT No: 04/2017-18, Work No:20

(a).	Name of Procuring Agency District Municipal Corporation (West), Karachi
(b).	Brief Description of Works Imp of CC Drain Wall in Usmania Mohallah in UC-22 Orang Zone
(C).	Procuring Agency's address: Sector 11-E Shahrah-e-Orangi Karachi
(d).	Estimated Cost: 9,98,851/-
(e).	Amount of Bid Security: 20,000/-
(f).	Period of Bid Validity (days): 90 Days
(g).	(i). Security Deposit:-(i/c bid security): 02.00% of Contract/Sanction Amount  (ii). 8% Retention Money of bill amount will be deducted from Running Bill.
(h).	Percentage, if any, to be deducted from bills : 7.5 % Income Tax
(i).	Deadline for Submission of Bids along with time : 18.10.2017 at 11:30 AM
(j).	Venue, Time and Date of Bid Opening: Office of the Executive Engineer (B&R), Orangi Zone, DMC(West), Karachi, at Sector 11-E Shahrah-e-Orangi, Karachi at 12:00 Noon On:18.10.2017.
(k).	Time for Completion from written order of commence: 45 Days
(1).	Liquidity damages: Rs: 500/- Per Day  (0.05 of Estimated Cost or Bid cost per day of delay, but total not exceeding 10%).
(m).	Tender Cost Vide Pay Order No: Dated:
	Amount: Rs: 1000/- (Rupees: One Thousand Only).
(n).	Earnest Money Vide Pay Order No: Dated:
(0).	Bidding Document issued to: M/S:
	EXECUTIVE ENGINEER(B&R)

CONTRACTOR

ORANGI Zone, DMC(West)



(WEST),

Phone: 36697869 & 36660102

### BIDDING DATA NIT No: 04/2017-18, Work No:21

(a).	Name of Procuring Agency <u>District Municipal Corporation (West), Karachi</u>
(b).	Brief Description of Works  Const of CC Street in Ward#4 Near Noorani Mohallah in UC-  13 Orangi Zone DMC (West)
(c).	Procuring Agency's address: Sector 11-E Shahrah-e-Orangi Karachi
(d).	Estimated Cost: 8,30,909/-+O/R
(e).	Amount of Bid Security: 20,000/-
(f).	Period of Bid Validity (days): 90 Days
(g).	(i). Security Deposit:-(i/c bid security): 02.00% of Contract/Sanction Amount (ii). 8% Retention Money of bill amount will be deducted from Running Bill.
(h).	Percentage, if any, to be deducted from bills : 7.5 % Income Tax
(i).	Deadline for Submission of Bids along with time : 18.10.2017 at 11:30 AM
(j).	Venue, Time and Date of Bid Opening: Office of the Executive Engineer (B&R), Orangi Zone, DMC(West), Karachi, at Sector 11-E Shahrah-e-Orangi, Karachi at 12:00 Noon On:18.10.2017.
(k).	Time for Completion from written order of commence: 45 Days
(I).	Liquidity damages: Rs: 500/- Per Day (0.05 of Estimated Cost or Bid cost per day of delay, but total not exceeding 10%).
(m).	Tender Cost Vide Pay Order No: Dated:
	Amount: Rs: 1000/- (Rupees: One Thousand Only).
(n).	Earnest Money Vide Pay Order No: Dated: Amount:
o).	Bidding Document issued to: M/S:
	A tom

CONTRACTOR

EXECUTIVE ENGINEER(B&R) ORANGI Zone, DMC(West)



(WEST),

Phone: 36697869 & 36660102

### BIDDING DATA NIT No: 04/2017-18, Work No:22

(a).	Name of Procuring Agency District Municipal Corporation (West), Karachi
(b).	Brief Description of Works  Rehabilitation and Repair of Road Near Ibrahim Ali Bhai  Graveyard, Ward # 01 in UC-28 Orangi Zone DMC (West)
(C).	Procuring Agency's address: Sector 11-E Shahrah-e-Orangi Karachi
(d).	Estimated Cost:6,50,783/-+O/R
(e).	Amount of Bid Security: 20,000/-
(f).	Period of Bid Validity (days):90 Days
(g).	(i). Security Deposit:-(i/c bid security): 02.00% of Contract/Sanction Amount (ii). 8% Retention Money of bill amount will be deducted from Running Bill.
(h).	Percentage, if any, to be deducted from bills : 7.5 % Income Tax
(i).	Deadline for Submission of Bids along with time : 18.10.2017 at 11:30 AM
(j).	Venue, Time and Date of Bid Opening: Office of the Executive Engineer (B&R), Orangi Zone, DMC(West), Karachi, at Sector 11-E Shahrah-e-Orangi, Karachi at 12:00 Noon On:18.10.2017.
(k).	Time for Completion from written order of commence: 45 Days
(1).	Liquidity damages: Rs: 500/- Per Day (0.05 of Estimated Cost or Bid cost per day of delay, but total not exceeding 10%).
(m).	Tender Cost Vide Pay Order No: Dated:
	Amount: Rs: 1000/- (Rupees: One Thousand Only).
'n).	Earnest Money Vide Pay Order No: Dated: Amount:
o).	Bidding Document issued to: M/S:

CONTRACTOR

EXECUTIVE ENGINEER(B&R) ORANGI Zone, DMC(West)



(WEST),

Phone: 36697869 & 36660102

### BIDDING DATA NIT No: 04/2017-18, Work No:23

(a).	Name of Procuring Agency <u>District Municipal Corporation (West), Karachi</u>
(b).	Brief Description of Works  Desalting of Nallah Ward # 04 UC.19 Orangi Zone DM  (West)
(c).	Procuring Agency's address: Sector 11-E Shahrah-e-Orangi Karachi
(d).	Estimated Cost: 6,51,199/-+O/R
(e).	Amount of Bid Security: 20,000/-
(f).	Period of Bid Validity (days):90 Days
(g).	(i). Security Deposit:-(i/c bid security): 02.00% of Contract/Sanction Amount (ii). 8% Retention Money of bill amount will be deducted from Running Bill.
(h).	Percentage, if any, to be deducted from bills :
(i).	Deadline for Submission of Bids along with time : 18.10.2017 at 11:30 AM
(j).	Venue, Time and Date of Bid Opening: Office of the Executive Engineer (B&R), Orangi Zone, DMC(West), Karachi, at Sector 11-E Shahrah-e-Orang Karachi at 12:00 Noon On:18.10.2017.
(k).	Time for Completion from written order of commence: 45 Days
(1).	Liquidity damages: Rs: 500/- Per Day (0.05 of Estimated Cost or Bid cost per day of delay, but total not exceeding 10%).
(m).	Tender Cost Vide Pay Order No: Dated:
	Amount: Rs: 1000/- (Rupees: One Thousand Only).
'n).	Earnest Money Vide Pay Order No: Dated: Amount:
o).	Bidding Document issued to: M/S:
	A 'mi

CONTRACTOR

EXECUTIVE ENGINEER(B&R) ORANGI Zone, DMC(West)

EXECUTIVE ENGINEER **Bullding** and Roads Orangi Zone DMC (West)



(WEST),

Sector 11/E Shahrah-e-Orangi, Karachi Phone: 36697869 & 36660102

### BIDDING DATA NIT No: 04/2017-18, Work No: 24

(a).	Name of Procuring Agency <u>District Municipal Corporation (West), Karachi</u>
(b).	Brief Description of Works Construction of crossing culvert at Islam Chowk near Sarawan Foods UC-19 Orangi Zone, DMC (West).
(C).	Procuring Agency's address: Sector 11-E Shahrah-e-Orangi Karachi
(d).	Estimated Cost: 7,67,432/-+O/R
(e).	Amount of Bid Security: 20,000/-
(f).	Period of Bid Validity (days): 90 Days
(g).	(i). Security Deposit:-(i/c bid security): 02.00% of Contract/Sanction Amount (ii). 8% Retention Money of bill amount will be deducted from Running Bill.
(h).	Percentage, if any, to be deducted from bills : 7.5 % Income Tax
(i).	Deadline for Submission of Bids along with time : 18.10.2017 at 11:30 AM
(j).	Venue, Time and Date of Bid Opening: Office of the Executive Engineer (B&R), Orangi Zone, DMC(West), Karachi, at Sector 11-E Shahrah-e-Orangi, Karachi at 12:00 Noon On:18.10.2017.
(k).	Time for Completion from written order of commence: 45 Days
(1).	Liquidity damages: Rs: 500/- Per Day (0.05 of Estimated Cost or Bid cost per day of delay, but total not exceeding 10%).
(m).	Tender Cost Vide Pay Order No: Dated:
	Amount: Rs: 1000/- (Rupees: One Thousand Only).
(n).	Earnest Money Vide Pay Order No: Dated: Amount:
(0).	Bidding Document issued to: M/S:
	A to

CONTRACTOR

EXECUTIVE ENGINEER(B&R)
ORANGI Zone, DMC(West)
EXECUTIVE ENGINEER
Building and Roads
Orangi Zone DMC (West)


# ANNUAL PROCUREMENT PLAN (DISTRICT MUNICIPAL CORPORATION WEST) FINANCIAL YEAR 2017-2018

S.No:	Name of Scheme	Allocated Funds	Cost of ongoing works (Expenditure already incurred)	Funds earmarked for ongoing works	Cost of New Work (components)	Funds for new works (c-e)	Nature of Procurement	Method of Procurement	Anticipated/ Actual Date of Advertisement	Anticipatec Actual Date of Start
а	D	С	d	e	1	g	h			K
1	Repairing of Rcc Pipe 15" dia Near Taj Muhammad House at Umer Baloch Mohallah UC-22	10,00,000	10,00,000		7,61,727/- +O/R	7,61,727/- +O/R	Works and Services	SPPRA Rule 15(b) & 16	27.09.2017	In due course
2	Rehabilitation of Sewerage System by 15"dia Pipe Near Baba Elementary School, Usmani Mohallah UC-22	10,00,000	10,00,000		7,70,864/- +O/R	7,70,864/- +O/R	Works and Services	SPPRA Rule 15(b) & 16	27.09.2017	In due course
3	Repair of Drain / Slab Near Asra General Stor Masqati Mohallah UC-21	10,00,000	10,00,000		2,18,594/- +O/R	2,18,594/- +O/R	Works and Services	SPPRA Rule 15(b) & 16	27.09.2017	In due course
4	Rehabilitation / Improvement of Drain & Rcc Slab Near UC-21 Office Masqati Mohallah	10,00,000	10,00,000	*******	2,19,219/- +O/R	2,19,219/- +O/R	Works and Services	SPPRA Rule 15(b) & 16	27.09.2017	In due course
5	Repairing of Rcc Pipe and Manholes Qamer House Zia Colony UC-23	10,00,000	10,00,000	******	7,14,484/- +O/R	7,14,484/- +O/R	Works and Services	SPPRA Rule 15(b) & 16	27.09.2017	In due course
6	Rehabilitation of Rcc Pipe 12"dia Near Rehmani Masjd, Rehmani Mohallah, Zia Colony No. 03, UC-23	10,00,000	10,00,000		8,52,022/- +O/R	8,52,022/- +O/R	Works and Services	SPPRA Rule 15(b) & 16	27.09.2017	In due course

7	Repairing of Rcc Pipe and Manhole Rehmania Mohallah and Other Places of UC-23 in Orangi Zone DMC (West)	10,00,000	10,00,000		9,86,900/-	9,86,900/-	Works and Services	SPPRA Rule 15(b) & 16	27.09.2017	In due course
8	Rehabilitation and Construction of Rcc Pipe Line Gali # 05, Ward # 04, in UC-24 Orangi Zone DMC (West)	10,00,000	10,00,000	********	8,15,746/- +O/R	8,15,746/- +O/R	Works and Services	SPPRA Rule 15(b) & 16	27.09.2017	In due course
9	Rehabilitation of Sewerage System in Bunerty Mohallah Hill Area, Other Places of UC-23 in Orangi Zone DMC (West)	10,00,000	10,00,000	*******	9,98,700/-	9,98,700/-	Works and Services	SPPRA Rule 15(b) & 16	27.09.2017	In due course
10	Imp of Rcc Culvert Near Kabady Ground Road & Near Sheel Petrol Pump, Faqeer Colony, in UC-22 Orangi Zone DMC (West)	10,00,000	10,00,000	*******	4,12,645/- +O/R	4,12,645/- +O/R	Works and Services	SPPRA Rule 15(b) & 16	27.09.2017	In due course
11	Improvement of Drain & Rcc Slab in Raheem Shah Colony in UC-25 Orangi Zone DMC (West)	10,00,000	10,00,000	*******	3,06,689/- +O/R	3,06,689/- +O/R	Works and Services	SPPRA Rule 15(b) & 16	27.09.2017	In due course
12	Rehabilitation and Construction of CC Street Raees Amrohi Colony in Gali #9,10,11 Ward 04 in UC-26 Orangi Zone	10,00,000	10,00,000	*******	5,57,614/- +O/R	5,57,614/- +O/R	Works and Services	SPPRA Rule 15(b) & 16	27.09.2017	In due course
13	Imp / Repair of Rcc Pipe & Manhole Near Sector 1/D, Block A in UC-20 Orangi Zone DMC (West)	10,00,000	10,00,000	********	8,20,586/- +O/R	8,20,586/- +O/R	Works and Services	SPPRA Rule 15(b) & 16	27.09.2017	In due course
14	Imp / Repair of Road Carpeting in Sector 5/E in UC-20 Orangi Zone DMC (West)	10,00,000	10,00,000	*******	7,35,201/- +O/R	7,35,201/- +O/R	Works and Services	SPPRA Rule 15(b) & 16	27.09.2017	In due course

15	Repair of Damage Rcc Pipe & Main Hole at Khyber Colony, Gali # 02 and Other Gali UC-23 Orangi Zone	10,00,000	10,00,000	********	8,45,888/- +O/R	8,45,888/- +O/R	Works and Services	SPPRA Rule 15(b) & 16	27.09.2017	In due course
16	Rehabilitation / Imp of CC Street Gali # 1,2 Agror Colony UC-23 Orangi Zone	10,00,000	10,00,000		8,64,658/- +O/R	8,64,658/- +O/R	Works and Services	SPPRA Rule 15(b) & 16	27.09.2017	In due course
17	P/L R.C.C Pipe line in Ward # 01, near Rehmania Masjid, in UC# 38, Surjani Town, DMC (West), Karchi.	10,00,000	10,00,000	*******	8,24,240/- +O/R	8,2,4,240/- +O/R	Works and Services	SPPRA Rule 15(b) & 16	27.09.2017	In due course
18	P/L Rcc Pipe & Sewerage System in Sector 1/A Ward 04 in UC-13 Orangi Zone DMC (West)	10,00,000	10,00,000	******	8,23,327/- +O/R	8,23,327/- +O/R	Works and Services	SPPRA Rule 15(b) & 16	27.09.2017	In due course
19	Repairing of Broken Manhole and Cover / Ring Slab in Ward # 1, 2, 3 & 4 in UC-22 Orangi Zone DMC (West)	10,00,000	10,00,000	*****	5,00,031/- +O/R	5,00,031/- +O/R	Works and Services	SPPRA Rule 15(b) & 16	27.09.2017	In due course
20	Imp of CC Drain Wall in Usmania Mohallah in UC-22 Orangi Zone	10,00,000	10,00,000		9,98,851/-	9,98,851/-	Works and Services	SPPRA Rule 15(b) & 16	27.09.2017	In due course
21	Const of CC Street in Ward#4 Near Noorani Mohallah in UC- 13 Orangi Zone DMC (West)	10,00,000	10,00,000	******	8,30,909/- +O/R	8,30,909/- +O/R	Works and Services	SPPRA Rule 15(b) & 16	27.09.2017	In due course
22	Rehabilitation and Repair of Road Near Ibrahim Ali Bhai Graveyard, Ward # 01 in UC-28 Orangi Zone DMC (West)	10,00,000	10,00,000		6,50,783/- +O/R	6,50,783/- +O/R	Works and Services	SPPRA Rule 15(b) & 16	27.09.2017	In due course

23	Desalting of Nallah Ward # 04 UC.19 Orangi Zone DMC (West)	10,00,000	10,00,000	 6,51,199/- +O/R	6,51,199/- +O/R	Works and Services	SPPRA Rule 15(b) & 16	27.09.2017	In due course
24	Construction of crossing culvert at Islam Chowk near Sarawan Foods U.C # 19 Orangi Zone, DMC (West).	10,00,000	10,00,000	 7,67,432/- +O/R	7,67,432/- +O/R	Works and Services	SPPRA Rule 15(b) & 16	27.09.2017	In due course

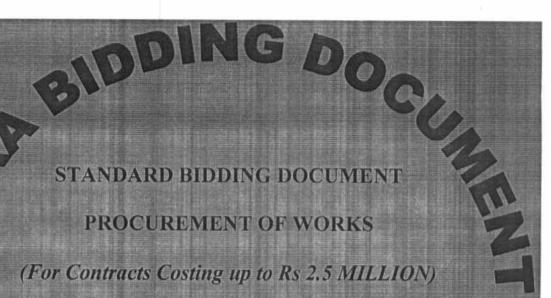

Standard Bidding Document is intended as a model for admeasurements (Percentage Rate/unit price for unit rates in a Bill of Quantities) types of contract. The main text refers to admeasurements contracts.

### Instructions to Bidders/ Procuring Agencies.

#### General Rules and Directions for the Guidance of Contractors.

This section of the bidding documents should provide the information necessary for bidders to prepare responsive bids, in accordance with the requirements of the Procuring Agency. It should also give information on bid submission, opening and evaluation, and on the award of contract.

Matters governing the performance of the Contract or payments under the Contract, or matters affecting the risks, rights, and obligations of the parties under the Contract are included as Conditions of Contract and *Contract Data*.

The *Instructions to Bidders* will not be part of the Contract and will cease to have effect once the contract is signed.

1. All work proposed to be executed by contract shall be notified in a form of Notice Inviting Tender (NIT)/Invitation for Bid (IFB) hoisted on website of Authority and Procuring Agency and also in printed media where ever required as per rules.

NIT must state the description of the work, dates, time and place of issuing, submission, opening of bids, completion time, cost of bidding document and bid security either in lump sum or percentage of Estimated Cost/Bid Cost. The interested bidder must have valid NTN also.

- 2. Content of Bidding Documents must include but not limited to: Conditions of contract, Contract Data, specifications or its reference, Bill of Quantities containing description of items with scheduled/item rates with premium to be filled in form of percentage above/ below or on item rates to be quoted, Form of Agreement and drawings.
- 3. Fixed Price Contracts: The Bid prices and rates are fixed during currency of contract and under no circumstance shall any contractor be entitled to claim enhanced rates for any item in this contract.
- The Procuring Agency shall have right of rejecting all or any of the tenders as per provisions of SPP Rules 2010.
- 5. Conditional Offer: Any person who submits a tender shall fill up the usual printed form stating at what percentage above or below on the rates specified in Bill of Quantities for items of work to be carried out: he is willing to undertake the work and also quote the rates for those items which are based on market rates. Only one rate of such percentage, on all the Scheduled Rates shall be framed. Tenders, which propose any alternative in the works specified in the said form of invitation to tender or in the time

allowed for carrying out the work, or which contain any other conditions, will be liable to rejection. No printed form of tender shall include a tender for more than one work, but if contractor wish to tender for two or more works, they shall submit a separate tender for each.

The envelope containing the tender documents shall refer the name and number of the work.

- All works shall be measured by standard instruments according to the rules.
- 7. Bidders shall provide evidence of their eligibility as and when requested by the Procuring Agency.
- 8. Any bid received by the Agency after the deadline for submission of bids shall be rejected and returned unopened to the bidder.
- **9.**Prior to the detailed evaluation of bids, the Procuring Agency will determine whether the bidder fulfills all codal requirements of eligibility criteria given in the tender notice such as registration with tax authorities, registration with PEC (where applicable), turnover statement, experience statement, and any other condition mentioned in the NIT and bidding document. If the bidder does not fulfill any of these conditions, it shall not be evaluated further.
- 10. Bid without bid security of required amount and prescribed form shall be rejected.
- 11. Bids determined to be substantially responsive shall be checked for any arithmetic errors. Arithmetical errors shall be rectified on the following basis;
  - (A) In case of schedule rates, the amount of percentage quoted above or below will be checked and added or subtracted from amount of bill of quantities to arrive the final bid cost.
  - (B) In case of item rates, .If there is a discrepancy between the unit rate and the total cost that is obtained by multiplying the unit rate and quantity, the unit rate shall prevail and the total cost will be corrected unless in the opinion of the Agency there is an obvious misplacement of the decimal point in the unit rate, in which case the total cost as quoted will govern and the unit rate corrected. If there is a discrepancy between the total bid amount and the sum of total costs, the sum of the total costs shall prevail and the total bid amount shall be corrected.
  - (C) Where there is a discrepancy between the amounts in figures and in words, the amount in words will govern.

### **BIDDING DATA**

(This section should be filled in by the Engineer/Procuring Agency before issuance of the Bidding Documents).
(a). Name of Procuring Agency
(b). Brief Description of Works
(c).Procuring Agency's address:
(d). Estimated Cost:
(e). Amount of Bid Security:(Fill in lump sum amount
or in % age of bid amount /estimated cost, but not exceeding 5%)
(f).Period of Bid Validity (days): (Not more than sixty days).
(g).SecurityDeposit:-(includingbidsecurity):
(in % age of bid amount /estimated cost equal to 10%)
(h). Percentage, if any, to be deducted from bills :
(i). Deadline for Submission of Bids along with time :
j). Venue, Time, and Date of Bid Opening:
(k). Time for Completion from written order of commence:
(L).Liquidity damages:(0.05 of Estimated Cost or Bid cost
per day of delay, but total not exceeding 10%).
m). Deposit Receipt No: Date: Amount: (in words and figures)
(Executive Engineer/Authority issuing bidding document)

### **Conditions of Contract**

Clause – 1:Commencement & Completion Dates of work. The contractor shall not enter upon or commence any portion or work except with the written authority and instructions of the Engineer-in-charge or of in subordinate-in-charge of the work. Failing such authority the contractor shall have no claim to ask for measurements of or payment for work.

The contractor shall proceed with the works with due expedition and without delay and complete the works in the time allowed for carrying out the work as entered in the tender shall be strictly observed by the contractor and shall reckoned from the date on which the order to commence work is given to the contractor. And further to ensure good progress during the execution of the wok, contractor shall be bound, in all in which the time allowed for completion of any work exceeds one month, to achieve progress on the prorate basis.

Clause – 2:Liquidated Damages. The contractor shall pay liquidated damages to the Agency at the rate per day stated in the bidding data for each day that the completion date is later than the Intended completion date; the amount of liquidated damage paid by the contractor to the Agency shall not exceed 10 per cent of the contract price. Agency may deduct liquidated damages from payments due to the contractor. Payment of liquidated damages does not affect the contractor's liabilities.

#### Clause - 3: Termination of the Contract.

- (A) Procuring Agency/Executive Engineer may terminate the contract if either of the following conditions exits:-
  - (i) contractor causes a breach of any clause of the Contract;
  - (ii) the progress of any particular portion of the work is unsatisfactory and notice of 10 days has expired;
  - (iii) in the case of abandonment of the work owing to the serious illness or death of the contractor or any other cause.
  - (iv) contractor can also request for termination of contract if a payment certified by the Engineer is not paid to the contractor within 60 days of the date of the submission of the bill;
- **(B)** The Executive Engineer/Procuring Agency has power to adopt any of the following courses as may deem fit:-
  - (i) to forfeit the security deposit available except conditions mentioned at A (iii) and (iv) above;
  - (ii) to finalize the work by measuring the work done by the contractor.

- (C) In the event of any of the above courses being adopted by the Executive Engineer/Procuring Agency, the contractor shall have:-
  - no claim to compensation for any loss sustained by him by reason of his having purchased or procured any materials, or entered into any engagements, or made any advances on account of, or with a view to the execution of the work or the performance of the contract,
  - (ii) however, the contractor can claim for the work done at site duly certified by the executive engineer in writing regarding the performance of such work and has not been paid.

Procuring Agency/Engineer may invite fresh bids for remaining work.

Clause 4: Possession of the site and claims for compensation for delay. The Engineer shall give possession of all parts of the site to the contractor. If possession of site is not given by the date stated in the contract data, no compensation shall be allowed for any delay caused in starting of the work on account of any acquisition of land, water standing in borrow pits/ compartments or in according sanction to estimates. In such case, either date of commencement will be changed or period of completion is to be extended accordingly.

Clause –5: Extension of Intended Completion Date. The Procuring Agency either at its own initiatives before the date of completion or on desire of the contractor may extend the intended completion date, if an event (which hinders the execution of contract) occurs or a variation order is issued which makes it impossible to complete the work by the intended completion date for such period as he may think necessary or proper. The decision of the Executive Engineer in this matter shall be final; where time has been extended under this or any other clause of this agreement, the date for completion of the work shall be the date fixed by the order giving the extension or by the aggregate of all such orders, made under this agreement.

When time has been extended as aforesaid, it shall continue to be the essence of the contract and all clauses of the contract shall continue to be operative during the extended period.

Clause -6: Specifications. The contractor shall execute the whole and every part of the work in the most substantial and work-man-like manner and both as regards materials and all other matters in strict accordance with the specifications lodged in the office of the Executive Engineer and initialed by the parties, the said specification being a part of the contract. The contractor shall also confirm exactly, fully and faithfully to the designs, drawing, and instructions in writing relating to the work signed by the Engineer-in-charge and lodge in his office and to which the contractor shall be entitled to have access at such office or on the site of work for the purpose of inspection during office hours and the contractor shall, if he so requires, be entitled at his own expense to make or cause to be made copies of the specifications, and of all such designs, drawings, and instructions as aforesaid.

### Clause - 7: Payments.

(A) Interim/Running Bill. A bill shall be submitted by the contractor as frequently as the progress of the work may justify for all work executed and not included in any previous bill at least once in a month and the Engineer-in-charge shall take or cause to be taken the requisite measurements for the purpose of having the same verified and the claim, as for as admissible, adjusted, if possible before the expiry of ten days from the presentation of the bill, at any time depute a subordinate to measure up the said work in the presence of the contractor or his authorized agent, whose countersignature to the measurement list will be sufficient to warrant and the Engineer-in-charge may prepare a bill from such list which shall be binding on the contractor in all respects.

The Engineer /Procuring Agency shall pass/certify the amount to be paid to the contractor, which he considers due and payable in respect thereof, subject to deduction of security deposit, advance payment if any made to him and taxes.

All such intermediate payment shall be regarded as payments by way of advance against the final payment only and not as payments for work actually done and completed, and shall not preclude the Engineer-in-charge from recoveries from final bill and rectification of defects and unsatisfactory items of works pointed out to him during defect liability period.

(B) The Final Bill. A bill shall be submitted by the contractor within one month of the date fixed for the completion of the work otherwise Engineer-in-charge's certificate of the measurements and of the total amount payable for the works shall be final and binding on all parties.

Clause – 8: Reduced Rates. In cases where the items of work are not accepted as so completed, the Engineer-in-charge may make payment on account of such items at such reduced rates as he may consider reasonable in the preparation of final or on running account bills with reasons recorded in writing.

### Clause - 9: Issuance of Variation and Repeat Orders.

- (A) Agency may issue a Variation Order for procurement of works, physical services from the original contractor to cover any increase or decrease in quantities, including the introduction of new work items that are either due to change of plans, design or alignment to suit actual field conditions, within the general scope and physical boundaries of the contract.
- (B) Contractor shall not perform a variation until the Procuring Agency has authorized the variation in writing subject to the limit not exceeding the contract cost by of 15% on the same conditions in all respects on which he agreed to do them in the

- work, and at the same rates, as are specified in the tender for the main work. The contractor has no right to claim for compensation by reason of alterations or curtailment of the work.
- (C) In case the nature of the work in the variation does not correspond with items in the Bill of Quantities, the quotation by the contractor is to be in the form of new rates for the relevant items of work, and if the Engineer-in-charge is satisfied that the rate quoted is within the rate worked out by him on detailed rate analysis, and then only he shall allow him that rate after approval from higher authority.
- (D) The time for the completion of the work shall be extended in the proportion that the additional work bear to the original contact work.
- (E) In case of quantities of work executed result the Initial Contract Price to be xceeded by more than 15%, and then Engineer can adjust the rates for those quantities causing excess the cost of contract beyond 15% after approval of Superintending Engineer.
- (F) Repeat Order: Any cumulative variation, beyond the 15% of initial contract amount, shall be subject of another contract to be tendered out if the works are separable from the original contract.

### Clause-10: Quality Control.

- (A) Identifying Defects: If at any time before the security deposit is refunded to the contractor/during defect liability period mentioned in bid data, the Engineer-in-charge or his subordinate-in-charge of the work may instruct the contractor to uncover and test any part of the works which he considers may have a defect due to use of unsound materials or unskillful workmanship and the contractor has to carry out a test at his own cost irrespective of work already approved or paid.
- (B) Correction of Defects: The contractor shall be bound forthwith to rectify or remove and reconstruct the work so specified in whole or in part, as the case may require. The contractor shall correct the notified defect within the Defects Correction Period mentioned in notice.

### (C) Uncorrected Defects:

(i) In the case of any such failure, the Engineer-in-charge shall give the contractor at least 14 days notice of his intention to use a third party to correct a defect. He may rectify or remove, and re-execute the work or remove and replace the materials or articles complained of as the case may be at the risk and expense in all respects of the contractor. (ii) If the Engineer considers that rectification/correction of a defect is not essential and it may be accepted or made use of; it shall be within his discretion to accept the same at such reduced rates as he may fix therefore.

#### Clause - 11:

- (A) Inspection of Operations. The Engineer and his subordinates, shall at all reasonable times have access to the site for supervision and inspection of works under or in course of execution in pursuance of the contract and the contractor shall afford every facility for and every assistance in obtaining the right to such access.
- (B) Dates for Inspection and Testing. The Engineer shall give the contractor reasonable notice of the intention of the Engineer-in-charge or his subordinate to visit the work shall have been given to the contractor, then he either himself be present to receive orders and instructions, or have a responsible agent duly accredited in writing present for that purpose, orders given to the contractor's duly authorized agent shall be considered to have the same force an effect as if they had been given to the contractor himself.

### Clause - 12: Examination of work before covering up.

- (A) No part of the works shall be covered up or put out of view/beyond the reach without giving notice of not less than five days to the Engineer whenever any such part of the works or foundations is or are ready or about to be ready for examination and the Engineer shall, without delay, unless he considers it unnecessary and advises the contractor accordingly, attend for the purpose of examining and measuring such part of the works or of examining such foundations;
- (B) If any work is covered up or placed beyond the reach of measurement without such notice having been given, the same shall be uncovered at the contractor's expense, and in default thereof no payment or allowance shall be made for such work, or for the materials with which the same was executed.

Clause – 13: Risks. The contractor shall be responsible for all risks of loss of or damage to physical property or facilities or related services at the premises and of personal injury and death which arise during and in consequence of its performance of the contract. if any damage is caused while the work is in progress or become apparent within three months of the grant of the certificate of completion, final or otherwise, the contractor shall make good the same at his own expense, or in default the Engineer may cause the same to be made good by other workmen, and deduct the expenses from retention money lying with the Engineer.

Clause-14: Measures for prevention of fire and safety measures. The contractor shall not set fire to any standing jungle, trees, bush-wood or grass without a written permit from the Executive Engineer. When such permit is given, and also in all cases when destroying, cutting or uprooting trees, bush-wood, grass, etc by fire, the contractor shall take necessary measures to prevent such fire spreading to or otherwise damaging surrounding property. The contractor is responsible for the safety of all its activities including protection of the environment on and off the site. Compensation of all damage done intentionally or unintentionally on or off the site by the contractor's labour shall be paid by him.

Clause-15:Sub-contracting. The contractor shall not subcontract the whole of the works, except where otherwise provided by the contract. The contractor shall not subcontract any part of the works without the prior consent of the Engineer. Any such consent shall not relieve the contractor from any liability or obligation under the contract and he shall be responsible for the acts, defaults and neglects of any subcontractor, his agents, servants or workmen as if these acts, defaults or neglects were those of the contractor, his agents' servants or workmen. The provisions of this contract shall apply to such subcontractor or his employees as if he or it were employees of the contractor.

Clause – 16: Disputes. All disputes arising in connection with the present contract, and which cannot be amicably settled between the parties, , the decision of the Superintending Engineer of the circle/officer/one grade higher to awarding authority shall be final, conclusive and binding on all parties to the contract upon all questions relating to the meaning of the specifications, designs drawings, and instructions, hereinbefore mentioned and as to the quality of workmanship, or materials used on the work or as to any other questions, claim, right, matter, or thing whatsoever in any way arising out of, or relating to the contract design, drawings, specifications, estimates, instructions, orders or these conditions or otherwise concerning the works, or the execution, of failure to execute the same, whether arising, during the progress of the work, or after the completion or abandonment thereof.

Clause -17: Site Clearance. On completion of the work, the contractor shall be furnished with a certificate by the Executive Engineer (hereinafter called the Engineer incharge) of such completion, but neither such certificate shall be given nor shall the work be considered to be complete until the contractor shall have removed all temporary structures and materials brought at site either for use or for operation facilities including cleaning debris and dirt at the site. If the contractor fails to comply with the requirements of this clause then Engineer-in-charge, may at the expense of the contractor remove and dispose of the same as he thinks fit and shall deduct the amount of all expenses so incurred from the contractor's retention money. The contractor shall have no claim in respect of any surplus materials as aforesaid except for any sum actually realized by the sale thereof.

### Clause -18: Financial Assistance /Advance Payment.

- (A) Mobilization advance is not allowed.
- (B) Secured Advance against materials brought at site.
  - (i) Secured Advance may be permitted only against imperishable materials/quantities anticipated to be consumed/utilized on the work within a period of three months from the date of issue of secured advance and definitely not for full quantities of materials for the entire work/contract. The sum payable for such materials on site shall not exceed 75% of the market price of materials;
  - (ii) Recovery of Secured Advance paid to the contractor under the above provisions shall be affected from the monthly payments on actual consumption basis, but not later than period more than three months (even if unutilized).

Clause -19: Recovery as arrears of Land Revenue. Any sum due to the Government by the contractor shall be liable for recovery as arrears of Land Revenue.

Clause -20: Refund of Security Deposit/Retention Money. On completion of the whole of the works (a work should be considered as complete for the purpose of refund of security deposit to a contractor from the last date on which its final measurements are checked by a competent authority, if such check is necessary otherwise from the last date of recording the final measurements), the defects notice period has also passed and the Engineer has certified that all defects notified to the contractor before the end of this period have been corrected, the security deposit lodged by a contractor (in cash or recovered in installments from his bills) shall be refunded to him after the expiry of three months from the date on which the work is completed.

Divisional Accountant

Accountant

(B&R) Orangi Zone

Executive Engineer/Procuring Agency

Contractor



NO.SO-V/(LG)/38-23/2017

GOVERNMENT OF SINDH LOCAL GOVERNMENT DEPARTMEN

Karachi Dated the 19th May,2017

F3046R

Trate 19.5.13

To,

The Municipal Commissioner, District Municipal Corporation (West)

KARACHI

SUBJECT:

APPROVAL FOR CONSTITUTION OF PROCUREMENT COMMITTEE OF DISTRICT MUNICIPAL CORPORATION (WEST) KARACHI

I am directed to refer to your letter No. MC/DMC/W/P.S/55/2017 dated: 09-03-2017, on the subject noted above and to convey the permission / approval in accordance under Rule 7 of Sindh Public Procurement Rules 2010. A procurement committee comprising following officers:-

### DISTRICT MUNICIPAL CORPORATION SITE ZONE:-

1.	Superintending Engineer DMC (West) BS-19	Chairman
2.	Executive Engineer / Director (Concerned) DMC (West) BS-18	Secretary
3.	Executive Engineer (Sewerage) KW&SB BS-18	Member

### DISTRICT MUNICIPAL CORPORATION ORANGI ZONE:-

1.	Superintending Engineer DMC (West) BS-19	Chairman
	Executive Engineer / Director (Concerned) DMC (West) BS-18	Secretary
3.	Assistant Director S.B.C.A BS-18	Member

### DISTRICT MUNICIPAL CORPORATION KEAMARI ZONE:-

1.	Superintending Engineer DMC (West) BS-19	Chairman
2.	Executive Engineer / Director (Concerned) DMC (West) BS-18	Secretary
3.	Executive Engineer (Sewerage) KW&SB BS-18	Member

### DISTRICT MUNICIPAL CORPORATION BALDIA ZONE:-

1.	Superintending Engineer DMC (West) BS-19	Chairman
2.	Executive Engineer / Director (Concerned) DMC (West) BS-18	Secretary
3.	Executive Engineer (Sewerage) KW&SB BS-18	Member

#### DISTRICT MUNICIPAL CORPORATION ORANGI ZONE:-

1.	Superintending Engineer DMC (West) BS-19	Chairman
2.	Executive Engineer / Director (Concerned) DMC (West) BS-18	Secretary
	Assistant Director S.B.C. A'BS-18	Member

The functions and responsibilities of procurement committee shall be as under (Section 7&8 of SPPRA Rule 2010).

- i) Preparing bidding documents
- ii) Carrying out technical as well as financial evaluation of the bids
- iii) Preparing evaluation report as provided in Rules 45
- iv) Making recommendations for the award of contract to the competent authority,
- v) Perform any other function ancillary and incidental to the above

DEPUTY SECRETARY (ADMN)

Copy for information & necessary action to:

- 1. The Director, Sindh Public Procurement Regulatory Authority, Karachi
- 2. The Director, Local Government Department, Govt. of Sindh Karachi
- 3. The P.S. to Secretary Local Government Department, Govt. of Sindh Karachi
- 4. Office order file

DEPUTY SECRETARY (ADMN)



### OFFICE OF THE MUNICIPAL COMMISSIONER

### DISTRICT MUNCIPAL CORPROTION KARACHI WEST

No: M.C/DMC/W/P.S/ 54 /20

Dated: 9 3 13

To,

The Secretary, Local Government Department, Government of Sindh, KARACHI.

### REDRESSAL COMMITTEE 2017

A Complaint redressal committee is hereby constituted with following composition to resolve the greirences & Settlement of disputes and adress the complaints of bidders as per Rule-31 of SPPRA Rules 2010 amended 2013 regarding NIT's of DMC (West) Karachi.

1. Administrator DMC (West) Karachi

Chairman

2. Additional Account Officer AG Sindh Karachi

Member

3. Superintending Engineer DMC (West) Karachi

Member

The terms & Condition of committee are same as mentioned vide rule-31 of SPPRA rule 2010 amended 2013.

Municipal Commissioner
DISTRICT MUNICIPAL CORPORATION
(WEST) KARACHI

#### Copy to: -

- 1. Deputy Director (Enf-I) SPPRA Govt. Karachi
- 2. Superintending Engineer DMC (West)
- 3. Additional Account Officer AG Sindh Karachi