



OFFICE OF THE  
EXECUTIVE ENGINEER  
B&R SADDAR DIVISION  
DISTRICT MUNICIPAL CORPORATION SOUTH KARACHI  
B&R Office Hiralal Ganathara road near Mujhaid Masjid Karachi,  
Phone # 99211429-99211390 Fax # 99213061  
e-mail :dmcsouth123@gmail.com

No: EE/B&R/DMC/South/ as /2018 Dated: 26-03-2018

The Director (ENF-I),  
SPPRA,  
Government of Sindh,  
Karachi.

Subject: No: EE/B&R/SDDMC/South/ 007 /2018 Dated: 26-03-2018 to be Opened on 13-04-2018

Enclosed please find herewith following documents for uploading / hoisting on  
SPPRA website.

- 1- Copy of NIT
- 2- Notification of Procurement Committee
- 3- Notification of Complaint Re dressal committee
- 4- Annual Procurement Plan 2017-18.
- 5- Standard Bidding Documents along with terms and condition

EXECUTIVE ENGINEER  
(B&R) SADDAR  
DMC (SOUTH)

Enclosed: Soft & Hard Copy  
and Pay Oder Rs. 2,000/-

Account Payee Only

# Bank AL Habib Limited

1188 - PAPER MARKET  
MAIN PLOT# 20, SR-8, HASSAN ALI AFFANDI RD, SERAI QUARTERS,  
NEAR PAPER MKT, KHI

Rs 2000 ONLY


Pay to DIRECTOR ( ENF-I) SPPRA

or Order

Rupees PAKISTANI RUPEES TWO THOUSAND ONLY

PAYABLE AT ANY BRANCH IN PAKISTAN

Valid for Twelve Months from the date of Issuance



Please do not write below this line.

B.C. No. 04834521

Stationery/Ref No. 00373209/2018 12

2	6	0	3	1	8
---	---	---	---	---	---

PKR \*\*\*\*\*2,000.00

*[Signature]*

Signatory  
PA/Attorney No

*[Signature]*

Signatory  
PA/Attorney No

*[Signature]*

⑈04834521⑈0238888⑈

⑈020⑈

26 Mar 2019



**OFFICE OF THE EXECUTIVE ENGINEER**  
**B&R SADDAR DIVISION**  
**DISTRICT MUNICIPAL CORPORATION SOUTH KARACHI**  
 B&R Office Hiralal Ganathara road near Mujahid Masjid Karachi,  
 Phone # 99211429-99211390 Fax # 99213061  
 e-mail :dmcsouth123@gmail.com

No: EE/B&R/SD/DMC/South/ 007 /2018 Dated: 26-03-2018

**NOTICE INVITING TENDER**

According to the SPPRA Rule-2010 (Amended 2013) the sealed covers tenders (Single Stage one envelope Method) is invited for the following works from all eligible interested Contractors / Firms / Parties, etc.

Sr.#	NAME OF SCHEME	ESTIMATED COST	BID SECURITY	TENDER COST
1	Improvement of chowked / blockage sewerage line and water line at street # 1,5 and different areas of UC-27, Saddar Division DMC South.	9,97,226/-	2% of Quoted amount	1,000/-
2	Improvement of c.c. flooring i/c sewerage pipe line at Allah Wali Colony ward # 2, UC-28, Saddar Division DMC South.	9,99,646/-	2% of Quoted amount	1,000/-
3	Improvement c.c. flooring i/c sewerage pipe line at Jharro street Qadimi Imam Bargah, Parvati compound & surrounding area, Saddar Division DMC South.	9,99,386/-	2% of Quoted amount	1,000/-
4	Improvement of c.c. flooring i/c sewerage pipe line at Sitla Mandir Bhimpura UC-17, Narian pora UC-22 and Swami Narian Mandir, Saddar Division DMC South.	9,99,777/-	2% of Quoted amount	1,000/-
5	Improvement of c.c. flooring i/c sewerage pipe line at Bilal City ward # 1 Reo G Bao G Compound ward # 1 and Akal Bonga ward # 3, Saddar Division DMC South.	9,99,769/-	2% of Quoted amount	1,000/-
6	Improvement of c.c. flooring i/c sewerage pipe line at Bismillah Compound Veeriji Compound & Surrounding area UC-22, Saddar Division DMC South.	9,99,460/-	2% of Quoted amount	1,000/-
7	Repair / maintenance and painting on footpath in front of Supreme Court i/c P/L water line in Ghari Khatta and laying c.c. flooring City Railway Colony near Bridge, Saddar Division DMC South	9,68,196/- + Open Rate	2% of Quoted amount	1,000/-
8	Repair of footpath by paving block floor near Arts Council in front of Rex Pump Saddar Division DMC South	9,80,818/- + Open Rate	2% of Quoted amount	1,000/-
9	De-Silting /Cleaning of sewerage lines at Marwari Lane, Saddar Division DMC South	9,99,327/-	2% of Quoted amount	1,000/-
10	Cleaning of sewerage / storm water pipe line i/c supplying of RCC pre-cast slab from Jang Press to state Bank Head Office, Saddar Division DMC South	8,85,500/- + Open Rate	2% of Quoted amount	1,000/-
11	Disposal of accumulated rain water and the construction of main hole on the surface of major road in, Saddar Division DMC South	9,04,043/- + Open Rate	2% of Quoted amount	1,000/-
12	Repair of patches on road near Sindh Muslim Law College, Saddar Division DMC South	9,93,920/-	2% of Quoted amount	1,000/-
13	Repair / Maintenance of Primary school No. 54,55 Sector D-2, Hijrat Colony , Saddar Division DMC South	9,94,765/-	2% of Quoted amount	1,000/-
14	Renovation of Boys, Girls Primary & Secondary School No. 28 Police Head Quarter Garden, Saddar Division DMC South	9,72,849/- + Open Rate	2% of Quoted amount	1,000/-
15	Repair / maintenance of DMC South School No.29 at Jehangir Patangi road, Saddar Division DMC South	9,54,846/- + Open Rate	2% of Quoted amount	1,000/-
16	Cleaning & sewerage pipe line by winching machine and disposal of rain storm water drain Jurisdiction of UC-29 Saddar Division DMC South	9,95,933/-	2% of Quoted amount	1,000/-
17	Cleaning / desilting of nallah & storm water drain at KMC head office, Tahir Saifuddin road, Nanakwara, Edhi centre Kharadar & different point of nallah, Saddar Zone DMC South.	2,77,935/- + Open Rate	2% of Quoted amount	1,000/-
18	Cleaning / desilting of nallah & storm water drain at Police head quarter, Light house, M.A Jinnah road & different points of nallah, Saddar Zone DMC South.	2,53,978/- + Open Rate	2% of Quoted amount	1,000/-
19	Providing and fixing speed breaker and winching sewer line at Shahwalliullah road and surrounding area Lyari Zone DMC South.	4,37,920/- + Open Rate	2% of Quoted amount	1,000/-
20	Providing and laying storm drain in front of Hyper Star Khayaban-e-Firdousi Clifton Block. # 4, UC-31 DMC South	9,89,973/-	2% of Quoted amount	1,000/-

21	Providing and laying speed breaker near Agha Khan Maternity Hospital Lyari, winching of sewer line at Chakieara road and surrounding area of Lyari Zone DMC South	4,44,360/- + Open Rate	2% of Quoted amount	1,000/-
22	Providing / laying of PVC and R.C.C Pipe for disposal of Rain water including the cleaning M/H and existing drain line in different area UC-24 & 25 Saddae Zone DMC South	9,97,249/-	2% of Quoted amount	1,000/-
23	De-silting / cleaning of nallah through manually and Mechanical surrounding area of UC-31, Saddar Zone DMC South.	Open Rate	2% of Quoted amount	1,000/-
24	Construction of Public Toilet at Agha Khan III road near Zoological Garden Saddar Division DMC South	9,95,778/-	2% of Quoted amount	1,000/-
25	Repair / maintenance of Boys / Girls Elementary School No. 24/25 Millat Nagar Ramswami UC-20 , Saddar Zone DMC South.	9,74,115/- + Open Rate	2% of Quoted amount	1,000/-
26	Construction of Health centre i/c Boundary wall at Iqbal Hoti road , Saddar Zone DMC South.	9,30,122/- + Open Rate	2% of Quoted amount	1,000/-

**TERMS & CONDITIONS:**

1. Tenders schedule shall be as follows:-

SCHEDULE	DATE & TIME	VENUE
Receiving of Applications and Issuance of Tenders	28-03-2018 To 12-04-2018	Executive Engineer B&R Saddar Division Office, DMC (South) situated at Hiralal Ganathara road near Mujhaid Masjid Karachi
Dropping of Tenders (by hand)	13-04-2018 at 2:00 pm	In the office of the Superintending Engineer DMC (South) situated at KRS Captain road, near Haqani Chowk, Karachi.
Opening of Tenders	13-04-2018 at 2:30 pm	Procurement Committee open the Tender in the office of Superintending Engineer, DMC (South), situated at KRS Captain road, near Haqani Chowk, Karachi.

**SCHEDULE OF 2<sup>ND</sup> TIME**

2. In case of any reasons, if the tenders are not responded on the above date, the next date for submission of bid will be **01-05-2018** up to 2:00 pm and will be opened on same date at 2:30 PM and tender documents will also be available from **16-04-2018** to **30-04-2018** during office hours.

**FUNDS PROVISION:-**

- Provision / availability of Council funds / budget
- The bidding documents will be issued to the interested Firms/Contractors on submission of written request on company / firm letter head i/c on payment of non-refundable tender cost mentioned against each work in shape of pay order from any scheduled Bank on Firm / Company Account in favor of **District Municipal Corporation South, Karachi**, and bidding document can also be downloaded from the SPPRA Website ([www.pprasingh.gov.pk](http://www.pprasingh.gov.pk)) with tender fee mentioned as above by mail or by hand.
- The Bid Security equal to 2% of estimated amount in shape of pay order from any scheduled Bank on Company / Firm Account in favour of **District Municipal Corporation South, Karachi** must be enclosed with tender / bid documents otherwise the tender will be rejected.
- The inserted contractors / proprietor will be showed / provided original current NIC, valid PEC and SRB and also Contractors must mention their complete and correct present/postal address in tender documents and quote the rates both in-words and in-figures. Incomplete / Conditional tenders will not be accepted.
- If any fake documents are found then the tender is liable to be rejected/cancelled without any compensation with penalty as per rules.
- Canvassing in connection of tenders is strictly prohibited and tenders submitted by the contractors who are reported to be involved in canvassing will be liable for rejection.
- All the tenders will be dropped as per above Schedule up to 02:00 pm and will be opened by the Procurement Committee, in the office of the Superintending Engineer, DMC (South) situated at KRS Captain road, near Haqani Chowk, Karachi. at 02:30 pm in presence of the such Contractors / Parties / Firms / Bidders who wish to be present.



10. In case, the date of opening declared as a Public Holiday by the Government OR non-working day due to any reason, the next official working day shall be deemed to be the date for submission and opening of tenders at the same time.
11. The Procuring Agency may reject all or any bids/tenders at any time prior to the acceptance of a bid or proposal, subject to the relevant provision of SPPRA Rules-2010 (Amended 2013).
12. Tenders will not be received / accepted after the schedule date & time.
13. Bid validity period :-90 Days
14. **Eligibility Criteria:-**
  - i) NTN Certificate.
  - ii) Valid professional Tax.
  - iii) Relevant experience (minimum 3 years).
  - iv) Turn-over at least three years.
  - v) Registration with Sindh Revenue Board.



**EXECUTIVE ENGINEER B&R  
SADDAR DIVISION  
DMC SOUTH KARACHI**

**Director (ENF-I) SPPRA, Government of Sindh Karachi**  
with a request to upload on the website of SPPRA

Copy for information:-

1. Chairman, D.M.C. South.
2. Municipal Commissioner, D.M.C. South.
3. Superintending Engineer, D.M.C. South.
4. Accounts Officer, D.M.C. South.
5. Notice Board.



**GOVERNMENT OF SINDH  
LOCAL GOVERNMENT DEPARTMENT**

Karachi, dated the 22<sup>nd</sup> September, 2017

**NOTIFICATION**

**No. SO-V(LG)/36/43/2017:** With the approval of Competent Authority, Procurement Committee consist of following members, under Rule-7 of SPPRA rules 2010 and amended 2013 is hereby constitute procurement of repair maintenance & development works to be executed in the financial year 2017-18 by District Municipal Corporation, (South), Karachi:-

- |      |                                                                                       |           |
|------|---------------------------------------------------------------------------------------|-----------|
| i)   | Superintending Engineer, DMC (South)                                                  | Chairman  |
| ii)  | Executive Engineer (concerned) DMC (South)                                            | Secretary |
| iii) | Assistant Executive Engineer<br>(Mr. Muhammad Nadeem)<br>KW&SB District South Karachi | Member    |

**SECRETARY TO GOVT. OF SINDH**

**NO.SOV(LG)/36-43/2017**

**Karachi dated the 22<sup>nd</sup> September, 2017**

A copy is forwarded for information:-

- 1 The Director, Sindh Public Procurement Regulatory Authority, Karachi
- 2 The Municipal Commissioner, DMC (South), Karachi
- 3 The Superintending Engineer, DMC (South), Karachi
- 4 The Director, Local Fund Audit, Karachi
- 5 P.S to Secretary, Local Government Karachi
- 6 Office order file

**DEPUTY SECRETARY (ADMN)**



**OFFICE OF THE  
CHAIRMAN  
DISTRICT MUNICIPAL CORPORATION  
SOUTH KARACHI**

Address: - KRS Captain road, near Haqani Chowk, Karachi

No: Chairman/PS/DMC/South/054/2017 Dated: 13-07-2017

**NOTIFICATION**

As required under Rule-31 of Sindh Public Procurement Rules, 2010 (Amended 2013) a Committee for Complaint Redressal of Grievances and settlement of disputes is hereby constituted from District Municipal Corporation (South) Karachi for the Financial Year 2017-18 consisting upon following:-

1- Municipal Commissioner,  
DMC (South), Karachi.

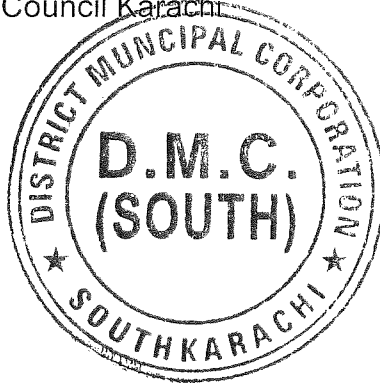
Chairman

2- Accounts Officer,  
DMC (South), Karachi.

Member

3- Assistant Executive Engineer,  
(Mr. Waseem Ahmed)  
District Council Karachi

Member



(Malik Muhammad Fayaz)  
Chairman  
District Municipal Corporation  
South Karachi.

Copy for information to:-

1. The Municipal Commissioner, DMC South
2. The Superintending Engineer, DMC South
3. The Accounts Officer, DMC South
4. Assistant Executive Engineer, District Council Karachi
5. Master File.

**ANNUAL PROCUREMENT PLAN (YEAR 2017-18)**  
**FOR PROCUREMENT OF WORKS UNDER FUNDS OF DMC SOUTH**

ADP / BG No.	Name of scheme	Allocated funds	Cost of ongoing works (exp. Already incurred)	Funds earmarked for ongoing works	Cost of new works (components)	Funds for new works (c-e)	Nature of procurement	Method of procurement	Anticipated / actual date of advertisement	Anticipated / actual date of start	Anticipated / actual date of completion
M04-A-003	Repair/ Maint of walls, Slabs & Nallahs of Saddar Division.	13,000,000	-----	-----	-----	-----	Works and Services	SPPRA Rule 15(b) & 16	In due course	In due course	In due course
	Improvement of chowked / blockage sewerage line and water line at street # 1,5 and different areas of UC-27, Saddar Division DMC South.		-----	-----	997,226	997,226	Works and Services	SPPRA Rule 15(b) & 16	In due course	In due course	In due course
	De-Silting /Cleaning of sewerage lines at Marwari Lane, Saddar Division DMC South				999,327	999,327	Works and Services	SPPRA Rule 15(b) & 16	In due course	In due course	In due course
	Cleaning of sewerage / storm water pipe line i/c supplying of RCC pre-cast slab from Jang Press to state Bank Head Office, Saddar Division DMC South				885,500	885,500	Works and Services	SPPRA Rule 15(b) & 16	In due course	In due course	In due course
	Disposal of accumulated rain water and the construction of main hole on the surface of major road in, Saddar Division DMC South				904,043	904,043	Works and Services	SPPRA Rule 15(b) & 16	In due course	In due course	In due course
	Cleaning & sewerage pipe line by winching machine and disposal of rain storm water drain Jurisdiction of UC-29 Saddar Division DMC South				995,933	995,933	Works and Services	SPPRA Rule 15(b) & 16	In due course	In due course	In due course
	Cleaning / desilting of nallah & storm water drain at KMC head office, Tahir Saifuddin road, Nanakwara, Edhi centre Kharadar & different point of nallah, Saddar Zone DMC South.				277,935	277,935	Works and Services	SPPRA Rule 15(b) & 16	In due course	In due course	In due course

  
 Executive Engineer B&R  
 DMC South


ADP / BG No.	Name of scheme	Allocated funds	Cost of ongoing works (exp. Already incurred	Funds earmarked for ongoing works	Cost of new works (components)	Funds for new works (c-e)	Nature of procurement	Method of procurement	Anticipated / actual date of advertisement	Anticipated / actual date of start	Anticipated / actual date of completion
	Cleaning / desilting of nallah & storm water drain at Police head quarter, Light house, M.A Jinnah road & different points of nallah, Saddar Zone DMC South.				253,978	253,978	Works and Services	SPPRA Rule 15(b) & 16	In due course	In due course	In due course
	Providing and laying storm drain in front of Hyper Star Khayaban-e-Firdousi Clifton Block. # 4, UC-31 DMC South.				989,973	989,973	Works and Services	SPPRA Rule 15(b) & 16	In due course	In due course	In due course
	Providing / laying of PVC and R.C.C Pipe for disposal of Rain water including the cleaning M/H and existing drain line in different area UC-24 & 25 Saddar Zone DMC South				997,249	997,249	Works and Services	SPPRA Rule 15(b) & 16	In due course	In due course	In due course
	De-silting / cleaning of nallah through manually and Mechanical surrounding area of UC-31, Saddar Zone DMC South.				995,000	995,000	Works and Services	SPPRA Rule 15(b) & 16	In due course	In due course	In due course
M-04-A-02	Repair / Maintenance of Roads/streets, Footpath, Drains, Nallahs, water system & other works including purchase of Bitumen & other materials etc.	75,000,000	-----	-----	45,000,000	45,000,000	Works and Services	SPPRA Rule 15(b) & 16	In due course	In due course	In due course
	Repair / maintenance and painting on footpath in front of Supreme Court i/c P/L water line in Ghari Khatta and laying c.c. flooring City Railway Colony near Bridge, Saddar Division DMC South				968,196	968,196	Works and Services	SPPRA Rule 15(b) & 16	In due course	In due course	In due course
	Repair of footpath by paving block floor near Arts Council in front of Rex Pump Saddar Division DMC South				980,818	980,818	Works and Services	SPPRA Rule 15(b) & 16	In due course	In due course	In due course
	Repair of patches on road near Sindh Muslim Law College, Saddar Division DMC South				993,920	993,920	Works and Services	SPPRA Rule 15(b) & 16	In due course	In due course	In due course
	Improvement of c.c. flooring i/c sewerage pipe line at Allah Wali Colony ward # 2, UC-28, Saddar Division DMC South.		-----	-----	999,646	999,646	Works and Services	SPPRA Rule 15(b) & 16	In due course	In due course	In due course

  
 Executive Engineer B&R  
 DMC South

ADP / BG No.	Name of scheme	Allocated funds	Cost of ongoing works (exp. Already incurred)	Funds earmarked for ongoing works	Cost of new works (components)	Funds for new works (c-e)	Nature of procurement	Method of procurement	Anticipated / actual date of advertisement	Anticipated / actual date of start	Anticipated / actual date of completion
	Improvement c.c. flooring i/c sewerage pipe line at Jharro street Qadimi Imam Bargah, Parvati compound & surrounding area, Saddar Division DMC South.		-----	-----	999,386	999,386	Works and Services	SPPRA Rule 15(b) & 16	In due course	In due course	In due course
	Improvement of c.c. flooring i/c sewerage pipe line at Sitla Mandir Bhimpura UC-17, Narian.pora UC-22 and Swami Narian Mandir, Saddar Division DMC South.		-----	-----	999,777	999,777	Works and Services	SPPRA Rule 15(b) & 16	In due course	In due course	In due course
	Improvement of c.c. flooring i/c sewerage pipe line at Bilal City ward # 1 Reo G Bao G Compound ward # 1 and Akal Bonga ward # 3, Saddar Division DMC South.		-----	-----	999,769	999,769	Works and Services	SPPRA Rule 15(b) & 16	In due course	In due course	In due course
	Improvement of c.c. flooring i/c sewerage pipe line at Bismillah Compound Veeriji Compound & Surrounding area UC-22, Saddar Division DMC South.		-----	-----	999,460	999,460	Works and Services	SPPRA Rule 15(b) & 16	In due course	In due course	In due course
M-04-B-03	Repair / Maintenance of Roads/streets, Footpath, Drains, Nallahs, water system & other works including purchase of Bitumen & other materials etc.	45,000,000	-----	-----	45,000,000	45,000,000	Works and Services	SPPRA Rule 15(b) & 16	In due course	In due course	In due course
	Providing and fixing speed breaker and winching sewer line at Shahwalliullah road and surrounding area Lyari Zone DMC South.				437,920	437,920	Works and Services	SPPRA Rule 15(b) & 16	In due course	In due course	In due course
	Providing and laying speed breaker near Agha khan Maternity Hospital Lyari, winching of sewer line at Chakieara road and surrounding area of Lyari Zone DMC South				444,360	444,360	Works and Services	SPPRA Rule 15(b) & 16	In due course	In due course	In due course

  
 Executive Engineer B&R  
 DMC South

ADP / BG No.	Name of scheme	Allocated funds	Cost of ongoing works (exp. Already incurred	Funds earmarked for ongoing works	Cost of new works (components)	Funds for new works (c-e)	Nature of procurement	Method of procurement	Anticipated / actual date of advertisement	Anticipated / actual date of start	Anticipated / actual date of completion
M-04-A-01	Repair / Maintenance of other office & buildings	5,000,000	-----	-----	3,000,000	3,000,000	Works and Services	SPPRA Rule 15(b) & 16	In due course	In due course	In due course
	Construction of Health centre i/c Boundary wall at Iqbal Hoti road , Saddar Zone DMC South.				930,122	930,122	Works and Services	SPPRA Rule 15(b) & 16	In due course	In due course	In due course
	Construction of Public Toilet at Agha Khan III road near Zoological Garden Saddar Division DMC South				995,778	995,778	Works and Services	SPPRA Rule 15(b) & 16	In due course	In due course	In due course
M-04-A-04	Annual Repair /maint. Of School Buildings lyari div	15,000,000	-----	-----	15,000,000	15,000,000	Works and Services	SPPRA Rule 15(b) & 16	In due course	In due course	In due course
	Repair / Maintenance of Primary school No. 54,55 Sector D-2, Hijrat Colony , Saddar Division DMC South				994,765	994,765	Works and Services	SPPRA Rule 15(b) & 16	In due course	In due course	In due course
	Renovation of Boys, Girls Primary & Secondary School No. 28 Police Head Quarter Garden, Saddar Division DMC South				972,849	972,849	Works and Services	SPPRA Rule 15(b) & 16	In due course	In due course	In due course
	Repair / maintenance of DMC South School No.29 at Jehangir Patangi road, Saddar Division DMC South				954,846	954,846	Works and Services	SPPRA Rule 15(b) & 16	In due course	In due course	In due course
	Repair / maintenance of Boys / Girls Elementary School No. 24/25 Millat Nagar Ramswami UC-20 , Saddar Zone DMC South.				974,115	974,115	Works and Services	SPPRA Rule 15(b) & 16	In due course	In due course	In due course

  
 Executive Engineer B&R  
 DMC South

# **SPPRA BIDDING DOCUMENT**

**STANDARD BIDDING DOCUMENT**

**PROCUREMENT OF WORKS**

*(For Contracts Costing up to Rs 2.5 MILLION)*

*Standard Bidding Document* is intended as a model for admeasurements (Percentage Rate/unit price for unit rates in a Bill of Quantities) types of contract. The main text refers to admeasurements contracts.



## **Instructions to Bidders/ Procuring Agencies.**

### **General Rules and Directions for the Guidance of Contractors.**

This section of the bidding documents should provide the information necessary for bidders to prepare responsive bids, in accordance with the requirements of the Procuring Agency. It should also give information on bid submission, opening and evaluation, and on the award of contract.

Matters governing the performance of the Contract or payments under the Contract, or matters affecting the risks, rights, and obligations of the parties under the Contract are included as Conditions of Contract and *Contract Data*.

The *Instructions to Bidders* will not be part of the Contract and will cease to have effect once the contract is signed.

1. All work proposed to be executed by contract shall be notified in a form of Notice Inviting Tender (NIT)/Invitation for Bid (IFB) hoisted on website of Authority and Procuring Agency and also in printed media where ever required as per rules.

NIT must state the description of the work, dates, time and place of issuing, submission, opening of bids, completion time, cost of bidding document and bid security either in lump sum or percentage of Estimated Cost/Bid Cost. The interested bidder must have valid NTN also.

2. Content of Bidding Documents must include but not limited to: Conditions of contract, Contract Data, specifications or its reference, Bill of Quantities containing description of items with scheduled/item rates with premium to be filled in form of percentage above/ below or on item rates to be quoted, Form of Agreement and drawings.

3. **Fixed Price Contracts:** The Bid prices and rates are fixed during currency of contract and under no circumstance shall any contractor be entitled to claim enhanced rates for any item in this contract.

4. The Procuring Agency shall have right of rejecting all or any of the tenders as per provisions of SPP Rules 2010.

5. **Conditional Offer:** Any person who submits a tender shall fill up the usual printed form stating at what percentage above or below on the rates specified in Bill of Quantities for items of work to be carried out: he is willing to undertake the work and also quote the rates for those items which are based on market rates. Only one rate of such percentage, on all the Scheduled Rates shall be framed. Tenders, which propose any alternative in the works specified in the said form of invitation to tender or in the time

allowed for carrying out the work, or which contain any other conditions, will be liable to rejection. No printed form of tender shall include a tender for more than one work, but if contractor wish to tender for two or more works, they shall submit a separate tender for each.

The envelope containing the tender documents shall refer the name and number of the work.

6. All works shall be measured by standard instruments according to the rules.
7. Bidders shall provide evidence of their eligibility as and when requested by the Procuring Agency.
8. Any bid received by the Agency after the deadline for submission of bids shall be rejected and returned unopened to the bidder.
9. Prior to the detailed evaluation of bids, the Procuring Agency will determine whether the bidder fulfills all codal requirements of eligibility criteria given in the tender notice such as registration with tax authorities, registration with PEC (where applicable), turnover statement, experience statement, and any other condition mentioned in the NIT and bidding document. If the bidder does not fulfill any of these conditions, it shall not be evaluated further.
10. Bid without bid security of required amount and prescribed form shall be rejected.
11. Bids determined to be substantially responsive shall be checked for any arithmetic errors. Arithmetical errors shall be rectified on the following basis;
  - (A) **In case of schedule rates**, the amount of percentage quoted above or below will be checked and added or subtracted from amount of bill of quantities to arrive the final bid cost.
  - (B) **In case of item rates**, If there is a discrepancy between the unit rate and the total cost that is obtained by multiplying the unit rate and quantity, the unit rate shall prevail and the total cost will be corrected unless in the opinion of the Agency there is an obvious misplacement of the decimal point in the unit rate, in which case the total cost as quoted will govern and the unit rate corrected. If there is a discrepancy between the total bid amount and the sum of total costs, the sum of the total costs shall prevail and the total bid amount shall be corrected.
  - (C) Where there is a discrepancy between the amounts in figures and in words, the amount in words will govern.

### **Conditions of Contract**

**Clause – 1: Commencement & Completion Dates of work.** The contractor shall not enter upon or commence any portion or work except with the written authority and instructions of the Engineer-in-charge or of in subordinate-in-charge of the work. Failing such authority the contractor shall have no claim to ask for measurements of or payment for work.

The contractor shall proceed with the works with due expedition and without delay and complete the works in the time allowed for carrying out the work as entered in the tender shall be strictly observed by the contractor and shall reckoned from the date on which the order to commence work is given to the contractor. And further to ensure good progress during the execution of the work, contractor shall be bound, in all in which the time allowed for completion of any work exceeds one month, to achieve progress on the prorate basis.

**Clause – 2: Liquidated Damages.** The contractor shall pay liquidated damages to the Agency at the rate per day stated in the bidding data for each day that the completion date is later than the Intended completion date; the amount of liquidated damage paid by the contractor to the Agency shall not exceed 10 per cent of the contract price. Agency may deduct liquidated damages from payments due to the contractor. Payment of liquidated damages does not affect the contractor's liabilities.

### **Clause – 3: Termination of the Contract.**

(A) Procuring Agency/Executive Engineer may terminate the contract if either of the following conditions exists:-

- (i) contractor causes a breach of any clause of the Contract;
- (ii) the progress of any particular portion of the work is unsatisfactory and notice of 10 days has expired;
- (iii) in the case of abandonment of the work owing to the serious illness or death of the contractor or any other cause.
- (iv) contractor can also request for termination of contract if a payment certified by the Engineer is not paid to the contractor within 60 days of the date of the submission of the bill;

(B) The Executive Engineer/Procuring Agency has power to adopt any of the following courses as may deem fit:-

- (i) to forfeit the security deposit available except conditions mentioned at A (iii) and (iv) above;
- (ii) to finalize the work by measuring the work done by the contractor.

(C) In the event of any of the above courses being adopted by the Executive Engineer/Procuring Agency, the contractor shall have:-

- (i) no claim to compensation for any loss sustained by him by reason of his having purchased or procured any materials, or entered into any engagements, or made any advances on account of, or with a view to the execution of the work or the performance of the contract,
- (ii) however, the contractor can claim for the work done at site duly certified by the executive engineer in writing regarding the performance of such work and has not been paid.

Procuring Agency/Engineer may invite fresh bids for remaining work.

**Clause 4: Possession of the site and claims for compensation for delay.** The Engineer shall give possession of all parts of the site to the contractor. If possession of site is not given by the date stated in the contract data, no compensation shall be allowed for any delay caused in starting of the work on account of any acquisition of land, water standing in borrow pits/ compartments or in according sanction to estimates. In such case, either date of commencement will be changed or period of completion is to be extended accordingly.

**Clause -5: Extension of Intended Completion Date.** The Procuring Agency either at its own initiatives before the date of completion or on desire of the contractor may extend the intended completion date, if an event (which hinders the execution of contract) occurs or a variation order is issued which makes it impossible to complete the work by the intended completion date for such period as he may think necessary or proper. The decision of the Executive Engineer in this matter shall be final; where time has been extended under this or any other clause of this agreement, the date for completion of the work shall be the date fixed by the order giving the extension or by the aggregate of all such orders, made under this agreement.

When time has been extended as aforesaid, it shall continue to be the essence of the contract and all clauses of the contract shall continue to be operative during the extended period.

**Clause -6: Specifications.** The contractor shall execute the whole and every part of the work in the most substantial and work-man-like manner and both as regards materials and all other matters in strict accordance with the specifications lodged in the office of the Executive Engineer and initialed by the parties, the said specification being a part of the contract. The contractor shall also confirm exactly, fully and faithfully to the designs, drawing, and instructions in writing relating to the work signed by the Engineer-in-charge and lodge in his office and to which the contractor shall be entitled to have access at such office or on the site of work for the purpose of inspection during office hours and the contractor shall, if he so requires, be entitled at his own expense to make or cause to be made copies of the specifications, and of all such designs, drawings, and instructions as aforesaid.

**Clause – 7: Payments.**

- (A) **Interim/Running Bill.** A bill shall be submitted by the contractor as frequently as the progress of the work may justify for all work executed and not included in any previous bill at least once in a month and the Engineer-in-charge shall take or cause to be taken the requisite measurements for the purpose of having the same verified and the claim, as far as admissible, adjusted, if possible before the expiry of ten days from the presentation of the bill, at any time depute a subordinate to measure up the said work in the presence of the contractor or his authorized agent, whose countersignature to the measurement list will be sufficient to warrant and the Engineer-in-charge may prepare a bill from such list which shall be binding on the contractor in all respects.

The Engineer /Procuring Agency shall pass/certify the amount to be paid to the contractor, which he considers due and payable in respect thereof, subject to deduction of security deposit, advance payment if any made to him and taxes.

All such intermediate payment shall be regarded as payments by way of advance against the final payment only and not as payments for work actually done and completed, and shall not preclude the Engineer-in-charge from recoveries from final bill and rectification of defects and unsatisfactory items of works pointed out to him during defect liability period.

- (B) **The Final Bill.** A bill shall be submitted by the contractor within one month of the date fixed for the completion of the work otherwise Engineer-in-charge's certificate of the measurements and of the total amount payable for the works shall be final and binding on all parties.

**Clause – 8: Reduced Rates.** In cases where the items of work are not accepted as so completed, the Engineer-in-charge may make payment on account of such items at such reduced rates as he may consider reasonable in the preparation of final or on running account bills with reasons recorded in writing.

**Clause – 9: Issuance of Variation and Repeat Orders.**

- (A) Agency may issue a Variation Order for procurement of works, physical services from the original contractor to cover any increase or decrease in quantities, including the introduction of new work items that are either due to change of plans, design or alignment to suit actual field conditions, within the general scope and physical boundaries of the contract.
- (B) Contractor shall not perform a variation until the Procuring Agency has authorized the variation in writing subject to the limit not exceeding the contract cost by of 15% on the same conditions in all respects on which he agreed to do them in the

work, and at the same rates, as are specified in the tender for the main work. The contractor has no right to claim for compensation by reason of alterations or curtailment of the work.

- (C) In case the nature of the work in the variation does not correspond with items in the Bill of Quantities, the quotation by the contractor is to be in the form of new rates for the relevant items of work, and if the Engineer-in-charge is satisfied that the rate quoted is within the rate worked out by him on detailed rate analysis, and then only he shall allow him that rate after approval from higher authority.
- (D) The time for the completion of the work shall be extended in the proportion that the additional work bear to the original contract work.
- (E) In case of quantities of work executed result the Initial Contract Price to be exceeded by more than 15%, and then Engineer can adjust the rates for those quantities causing excess the cost of contract beyond 15% after approval of Superintending Engineer.
- (F) **Repeat Order:** Any cumulative variation, beyond the 15% of initial contract amount, shall be subject of another contract to be tendered out if the works are separable from the original contract.

#### **Clause-10: Quality Control.**

- (A) **Identifying Defects:** If at any time before the security deposit is refunded to the contractor/during defect liability period mentioned in bid data, the Engineer-in-charge or his subordinate-in-charge of the work may instruct the contractor to uncover and test any part of the works which he considers may have a defect due to use of unsound materials or unskillful workmanship and the contractor has to carry out a test at his own cost irrespective of work already approved or paid.
- (B) **Correction of Defects:** The contractor shall be bound forthwith to rectify or remove and reconstruct the work so specified in whole or in part, as the case may require. The contractor shall correct the notified defect within the Defects Correction Period mentioned in notice.
- (C) **Uncorrected Defects:**
  - (i) In the case of any such failure, the Engineer-in-charge shall give the contractor at least 14 days notice of his intention to use a third party to correct a defect. He may rectify or remove, and re-execute the work or remove and replace the materials or articles complained of as the case may be at the risk and expense in all respects of the contractor.

- (ii) If the Engineer considers that rectification/correction of a defect is not essential and it may be accepted or made use of; it shall be within his discretion to accept the same at such reduced rates as he may fix therefore.

**Clause – 11:**

- (A) **Inspection of Operations.** The Engineer and his subordinates, shall at all reasonable times have access to the site for supervision and inspection of works under or in course of execution in pursuance of the contract and the contractor shall afford every facility for and every assistance in obtaining the right to such access.
- (B) **Dates for Inspection and Testing.** The Engineer shall give the contractor reasonable notice of the intention of the Engineer-in-charge or his subordinate to visit the work shall have been given to the contractor, then he either himself be present to receive orders and instructions, or have a responsible agent duly accredited in writing present for that purpose, orders given to the contractor's duly authorized agent shall be considered to have the same force an effect as if they had been given to the contractor himself.

**Clause – 12: Examination of work before covering up.**

- (A) No part of the works shall be covered up or put out of view/beyond the reach without giving notice of not less than five days to the Engineer whenever any such part of the works or foundations is or are ready or about to be ready for examination and the Engineer shall, without delay, unless he considers it unnecessary and advises the contractor accordingly, attend for the purpose of examining and measuring such part of the works or of examining such foundations;
- (B) If any work is covered up or placed beyond the reach of measurement without such notice having been given, the same shall be uncovered at the contractor's expense, and in default thereof no payment or allowance shall be made for such work, or for the materials with which the same was executed.

**Clause – 13: Risks.** The contractor shall be responsible for all risks of loss of or damage to physical property or facilities or related services at the premises and of personal injury and death which arise during and in consequence of its performance of the contract. if any damage is caused while the work is in progress or become apparent within three months of the grant of the certificate of completion, final or otherwise, the contractor shall make good the same at his own expense, or in default the Engineer may cause the same to be made good by other workmen, and deduct the expenses from retention money lying with the Engineer.

**Clause-14: Measures for prevention of fire and safety measures.** The contractor shall not set fire to any standing jungle, trees, bush-wood or grass without a written permit from the Executive Engineer. When such permit is given, and also in all cases when destroying, cutting or uprooting trees, bush-wood, grass, etc by fire, the contractor shall take necessary measures to prevent such fire spreading to or otherwise damaging surrounding property. The contractor is responsible for the safety of all its activities including protection of the environment on and off the site. Compensation of all damage done intentionally or unintentionally on or off the site by the contractor's labour shall be paid by him.

**Clause-15: Sub-contracting.** The contractor shall not subcontract the whole of the works, except where otherwise provided by the contract. The contractor shall not subcontract any part of the works without the prior consent of the Engineer. Any such consent shall not relieve the contractor from any liability or obligation under the contract and he shall be responsible for the acts, defaults and neglects of any subcontractor, his agents, servants or workmen as if these acts, defaults or neglects were those of the contractor, his agents' servants or workmen. The provisions of this contract shall apply to such subcontractor or his employees as if he or it were employees of the contractor.

**Clause – 16: Disputes.** All disputes arising in connection with the present contract, and which cannot be amicably settled between the parties, , the decision of the Superintending Engineer of the circle/officer/one grade higher to awarding authority shall be final, conclusive and binding on all parties to the contract upon all questions relating to the meaning of the specifications, designs drawings, and instructions, hereinbefore mentioned and as to the quality of workmanship, or materials used on the work or as to any other questions, claim, right, matter, or thing whatsoever in any way arising out of, or relating to the contract design, drawings, specifications, estimates, instructions, orders or these conditions or otherwise concerning the works, or the execution, of failure to execute the same, whether arising, during the progress of the work, or after the completion or abandonment thereof.

**Clause –17: Site Clearance.** On completion of the work, the contractor shall be furnished with a certificate by the Executive Engineer (hereinafter called the Engineer in-charge) of such completion, but neither such certificate shall be given nor shall the work be considered to be complete until the contractor shall have removed all temporary structures and materials brought at site either for use or for operation facilities including cleaning debris and dirt at the site. If the contractor fails to comply with the requirements of this clause then Engineer-in-charge, may at the expense of the contractor remove and dispose of the same as he thinks fit and shall deduct the amount of all expenses so incurred from the contractor's retention money. The contractor shall have no claim in respect of any surplus materials as aforesaid except for any sum actually realized by the sale thereof.



**Clause –18: Financial Assistance /Advance Payment.**

- (A) Mobilization advance is not allowed.
- (B) Secured Advance against materials brought at site.
- (i) Secured Advance may be permitted only against imperishable materials/quantities anticipated to be consumed/utilized on the work within a period of three months from the date of issue of secured advance and definitely not for full quantities of materials for the entire work/contract. The sum payable for such materials on site shall not exceed 75% of the market price of materials;
  - (ii) Recovery of Secured Advance paid to the contractor under the above provisions shall be affected from the monthly payments on actual consumption basis, but not later than period more than three months (even if unutilized).

**Clause –19: Recovery as arrears of Land Revenue.** Any sum due to the Government by the contractor shall be liable for recovery as arrears of Land Revenue.

**Clause –20: Refund of Security Deposit/Retention Money.** On completion of the whole of the works (a work should be considered as complete for the purpose of refund of security deposit to a contractor from the last date on which its final measurements are checked by a competent authority, if such check is necessary otherwise from the last date of recording the final measurements), the defects notice period has also passed and the Engineer has certified that all defects notified to the contractor before the end of this period have been corrected, the security deposit lodged by a contractor (in cash or recovered in installments from his bills) shall be refunded to him after the expiry of three months from the date on which the work is completed.

**Divisional Accountant**

**Contractor**

**Executive Engineer/Procuring Agency**

# SPPRA BIDDING DOCUMENT

## STANDARD FORM OF BIDDING DOUCMENT FOR PROCUREMENT OF WORKS

### WORK # 01

#### (SINGLE STAGE ONE ENVELOPE METHOD)

Name of Work: - Improvement of chowked / blockage sewerage line and water line at street # 1,5 and different areas of UC-27, Sæddar Division DMC South.

Estimate Cost : Rs. 9,97,226 /-  
Bid Security : 2% of Quoted Amount  
Tender Cost : Rs. 1,000/-

---

Tender issue M/s. \_\_\_\_\_

PAY ORDER OF TENDER COST

PAY ORDER OF BID SECURITY

P.O. No. \_\_\_\_\_ Date \_\_\_\_\_


P.O. No. \_\_\_\_\_ Date \_\_\_\_\_

Bank \_\_\_\_\_

Bank \_\_\_\_\_

Rs. \_\_\_\_\_


Rs. \_\_\_\_\_

  
Signature & Stamp  
of Issuing Authority

# BIDDING DATA

## Work N0:01

- a) Name of Procuring Agency: - District Municipal Corporation South Karachi
- b) Brief Description of Works: - Improvement of chowked / blockage sewerage line and water line at street # 1,5 and different areas of UC-27, Saddar Division DMC South.
- c) Estimated Cost: - Rs: 9,97,226/-
- d) Amount of Bid Security: - 2% of Quoted Amount
- f) Period of Bid Validity (days):- 90 Days
- g) Security Deposit :-  
(Including bid security):- 10% of total Cost
- h) Percentage, if any,  
to be deducted from bills: - 7.5 % Income Tax
- i) Deadline for Submission of Bids,  
along with time: - Dated: 13-04-2018 2.00 PM
- j) Venue, Time, and Date of Bid Opening: - Executive Engineer DMC (South) office situated at Hiralal Ganatra road near Mujahid Masjid, Karachi. at 2.30 P.M Dated:- 13-04-2018
- k) Time for Completion: - 90 Days
- l) Liquidity damages: - 0.05% of Estimated Cost or Bid cost per day of Delay

  
EXECUTIVE ENGINEER  
DMC (South)

CONTRACTOR'S SIGNATURE

M/s. \_\_\_\_\_

# DISTRICT MUNICIPAL CORPORATION SADDAR ZONE DMC (SOUTH) KARACHI

NAME OF WORK: - Improvement of chowked / blockage sewerage line and water line at street # 1,5 and  
different areas of UC-27, Saddar Division DMC South.

Tender No. (01) / (2017-2018)

## (ITEM BASED ON SCHEDULE RATE)

Sr.#	DESCRIPTION OF WORK	QUANTITY	RATE	UNIT	AMOUNT
<b>PART "A"</b>					
01	Excavation for pipe line in trenches, pits in all kind of soils of murum i/c. trimming and dressing sides to true alignment and shape leveling of beds of trenches to correct level and grade, cutting joint holes and disposal of surplus earth within one chain as directed by Engineer In-charge. Providing fence guards, lights, flags and temporary crossing for non-vehicular traffic where ever required lift upto 5 ft. (1.52m) and lead upto one chain (30.5mm Lift upto 0' to 5'	21000	4650.00	% 0.Cft	97650
02	Providing, Laying & Fixing in trench i/c. fitting, jointing & testing etc. complete in all respect the high Density Polyethylene PE Pipes (HDPE-100) for W/S confirming ISO 4427/DIN8074/8075 B.S 3580 & PSI 3051 (PN-10). 110mm 160mm	600 400	268.00 530.00	P/Rft P/Rft	160800 212000
03	Providing C.I Sluice Valve heavy pattern test pressure 21.0 kg/sq. corner 300 lb/sq. inch (imported). 4" Dia 6" Dia	01 01	5460.00 9360.00	Each Each	5460 9360
04	Fixing of Sluice Valve with 2 cast Iron Tail pieces, one end flanged and other with socket including the cost of nuts bolts and rubber packing, labour etc. complete. 4" Dia 6" Dia	01 01	1532.00 1886.00	Each Each	1532 1886
05	Providing / Fixing M.S Tail piece (Dholki) on A.C pipe fabricated with 1/4" thick M.S plate, having dimensions and weight as mentioned against each item. It includes the cost of labor and" sealing material etc. complete. Weight = 6.290 kg Weight = 8.410 kg	01 01	1098.00 1422.00	Each Each	1098 1422
06	High Density Polyethylene fittings (PE-100) equivalent make (PN-10). <i>Stub End Piece</i> 110mm 160mm	01 01	2020.00 4233.00	Each Each	2020 4233
07	Providing & Fixing M.S Split Collar Tee on PRCC pipe of different sizes having width as mentioned against each item, to suit the size of connection, fabricated with 3/8" thick M.S plate excluding the cost of the neck. It includes the cost of 3/4" thick M.S square bars on both ends, 4 Nos. 3/4" thick M.S flanges, with a total weight as mentioned against each item. It also includes the cost of nuts & bolts, rubber packing, labour and sealing material and all the tools and plants. Weight = 104.860 kg 12" x 12" (2'.0") 18" x 18" (2'.0")	01 01	19037.00 24521.00	Each Each	19037 24521
08	Providing / Fixing 0'-9" long - 3/8" thick M.S Neck to existing M.S pipe or to a split collar tee having a total weight as mentioned against each item. It includes the cost of fabrication and welding to the split collar tee. Weight = 6.666 kg 4" dia Weight = 10.909 kg 6" dia	01 01	1229.00 1984.00	Each Each	1229 1984
09	Full hire charges of pumping set per day inclusive of the wages of driver and assistant, fuel and electric energy platform required for placing the pumps etc, at lower depth with suction and delivery pipes for pumping out water pound at various depth from trenches including the cost of erection and dismantling after completion of job of 10 HP from 10 feet depth.	16	1500.00	PER /Day	24000
10	Refilling the excavated stuff in trenches 6" thick layer i/c. watering ramming to full compaction etc. complete.	21000	2760.00	% 0.Cft	57960
<b>PART "B"</b>					
1	Dismantling of existing asphalt concrete road ice base and sub base disposable of material.	750	773.86	% Cft	5804

Cont: on Page #. 02

2	Excavation for pipe line in trenches and pits in all kind of soil of murum i/c trimming and dressing side to true alignment and shape traveling of beds of trenches to correct level and grade cutting joint holes and disposal of surplus earth within a one chain as directed by Engineer Incharge. Providing fence guard light flags and temporary crossing for non vehicular traffic wherever required left upto 05' and lead up to 01 chain. (v-iii part-iiP.No. 13 S.No.51)Lift 0'-5'	7500	4650.00	%Cft	34875
3	Providing laying RCC pipes with (Rubber Ring Joint and fitting in trench i/c cutting , fitting and jointing with rubber ring i/c testing with water to specified pressure. (v-iv part-vi P.No. 18 Sr.No. B-2) 12" dia	500	367.00	P/Rft	183500
4	Refilling the excavated stuff in trenches 6" thick layer i/c watering ramming to full compaction etc complete.(v-iv part-vi P.No. 77 S.No. 24)	6886	2760.00	%Cft	19005
5	Providing manhole 4 dia (in side) and 5 ft clear depth cost in situ with 1:2:4 c.c. (add 50% extra crushed) in benching ½" thick cement plastering with 1:3 cement motor on all inside wall surface channel and benching i/c making required NOS of main and branch channels ¾ dia M.s footrest @ 12" dia C/C i/c cost of excavation in all kinds of soil backfilling and disposal of exerted stuff etc. complete as per design of the In-charge. ( R/A on Sch:2012)	8	14529.29	Each	116234
6	Add / deduct per ft depth	2	2538.62	P/Feet	5077
7	Cartage of 100 CFT / 5 tons of all material likes one aggregate, spawl, coal, lime, surkhi etc. B.G Rait fastenings points & crossing bridges girders. Pipes, sheets Raits M.S Bars etc. or 1000 Nos brinks 10' x 5' x 3' or 1000 manuds of fuel wood by trucks or any other means owned by the contractors (Lead up to 5/10 Miles etc)	614	1065.04	% Cft	6539
<b>TOTAL OF PART A+B</b>		<b>Rs. 9,97,226/-</b>			

Nomenclature quantities and  
Rates have been checked by me

SUB-ENGINEER  
DMC (SOUTH)

ASST. EX. ENGINEER  
DMC (SOUTH)

EXECUTIVE ENGINEER  
DMC (SOUTH)

I/We hereby quoted as follows.

Item Based on S/R amounting Rs. 9,97,226/- \_\_\_\_\_ % Above / Below of the S/R Rs. \_\_\_\_\_

In figure ( \_\_\_\_\_ )

1. I/ We shall be abide all SPPRA Rules-2010 (Amended-2013)
2. Rate must be quoted on total amount of Schedule rate either Above OR Below not accepted item wise.
3. I/We read the standard bidding documents / TORs available in SPPRA website ([www.pprasindh.govt.pk](http://www.pprasindh.govt.pk)) and agreed to abide all of them and also provide all these documents with our signatures as & when directed.

Signature of the Contractor \_\_\_\_\_

Address: \_\_\_\_\_

# SPPRA BIDDING DOCUMENT

## STANDARD FORM OF BIDDING DOUCMENT FOR PROCUREMENT OF WORKS

### WORK # 02

#### (SINGLE STAGE ONE ENVELOPE METHOD)

Name of Work: - Improvement of c.c. flooring i/c sewerage pipe line at Allah Wali Colony ward # 2, UC-28, Saddar Division DMC South.

Estimate Cost : Rs. 9,99,646/-  
Bid Security : 2% of Quoted Amount  
Tender Cost : Rs. 1,000/-

---

Tender issue M/s. \_\_\_\_\_

#### PAY ORDER OF TENDER COST

#### PAY ORDER OF BID SECURITY

P.O. No. \_\_\_\_\_ Date \_\_\_\_\_

P.O. No. \_\_\_\_\_ Date \_\_\_\_\_

Bank \_\_\_\_\_

Bank \_\_\_\_\_

Rs. \_\_\_\_\_


Rs. \_\_\_\_\_

  
Signature & Stamp  
of Issuing Authority

# BIDDING DATA

## Work N0:02

- a) Name of Procuring Agency: - District Municipal Corporation South Karachi
- b) Brief Description of Works: - Improvement of c.c. flooring i/c sewerage pipe line at Allah Wali Colony ward # 2, UC-28, Saddar Division DMC South
- c) Estimated Cost: - Rs: 9,99,646/-
- d) Amount of Bid Security: - 2% of Quoted Amount
- f) Period of Bid Validity (days):- 90 Days
- g) Security Deposit :-  
(Including bid security):- 10% of total Cost
- h) Percentage, if any,  
to be deducted from bills: - 7.5 % Income Tax
- i) Deadline for Submission of Bids,  
along with time: - Dated: 13-04-2018 2.00 PM
- j) Venue, Time, and Date of Bid Opening: - Executive Engineer DMC (South) office situated at Hiralal Ganatra road near Mujahid Masjid, Karachi. at 2.30 P.M Dated:- 13-04-2018
- k) Time for Completion: - 90 Days
- l) Liquidity damages: - 0.05% of Estimated Cost or Bid cost per day of Delay

  
EXECUTIVE ENGINEER  
DMC (South)

CONTRACTOR'S SIGNATURE

M/s. \_\_\_\_\_

# DISTRICT MUNICIPAL CORPORATION SADDAR ZONE DMC (SOUTH) KARACHI

NAME OF WORK: - Improvement of c.c. flooring i/c sewerage pipe line at Allah Wali Colony ward # 2, UC-28, Saddar  
Division DMC South.

Tender No. (02) / (2017-2018)

(ITEM BASED ON SCHEDULE RATE)

Sr.#	DESCRIPTION OF WORK	QUANTITY	RATE	UNIT	AMOUNT
01	Earth work excavation of road side nails ic forming its banks all putting the same on embankment as directed cold breaking dressing etc. (V-III P-VI P-1/4)	2200	1437.00	% .0	3161
02	Dismantling cements concrete plain 1:2:4. (viii-P-iii-P-P-10/19-C)	190	3327.50	% Cft	6321
03	Excavation for pipe line in trenches etc. complete	6000	3600.00	% .0	21600
04	Providing RCC pipes & Collars of Class "B" and fitting in trench i/c curing, fitting and joining with maxphalt composition and cement mortar (1:1) i/c testing with water to a head of 22.5 meter or 75 ft. A) 9" Dia B) 12" Dia	100 300	142.00 246.00	P/Rft P/Rft	14200 73800
05	Refilling the excavated stuff in trenches 6" thick layer i/c watering remming to full compaction etc. complete.	5686	2760.00	% .0	15352
06	Providing manhole 4 dia (in side) and 5 ft clear depth cost in situ with 1:2:4 c.c. (add 50% extra crushed) in benching 1/2" thick cement plastering with 1:3 cement motor on all inside wall surface channel and benching i/c making required NOS of main and branch channels 3/4 dia M.s footrest @ 12" dia C/C i/c cost of excavation in all kinds of soil backfilling and disposal of exerted stuff etc. complete as per design of the In-charge.	10	14529.29	Each	145293
07	Cartage of 100 CFT / 5 tons of all material like one aggregate, spawl, coal, lime, surkhi etc. B.G Rait fastenings points & crossing bridges girders. Pipes, sheets Raits M.S Bars etc. or 1000 Nos brinks 10' x 5' x 3' or 1000 manuds of fuel wood by trucks or any other means owned by the contractors (Lead up to 15 Miles etc)	2704	1065.04	% Cft	28799
08	P/L Aggregate base course CBR 80% as per (AASHTO) standard specification i/c compacting to the required density by approved mechanical means (Vibratory) roller road packer and smooth wheel roller etc) i/c watering with all lead and lift etc.	1600	5542.24	% Cft	88676
09	P/L 1:4:8 Cement concrete brick or stone ballast 1.5" to 2" gauge etc compt. (V-III P-III P-15/4-B)	700	9416.28	% Cft	65914
10	Providing and laying 2" thick topping cement concert i/c surface finishing and dividing in to panels. 2" thick (V-III-P-III-P-42/16-C)	16380	3275.50	% Sft	536530
<b>TOTAL</b>				<b>Rs. 9,99,646/-</b>	

Nomenclature quantities and Rates have been checked by me

SUB-ENGINEER  
DMC (SOUTH)

ASSTT. EX. ENGINEER  
DMC (SOUTH)

EXECUTIVE ENGINEER  
DMC (SOUTH)

I/We hereby quoted as follows.

Item Based on S/R amounting Rs.9,99,646 /- \_\_\_\_\_ % Above / Below of the S/R Rs. \_\_\_\_\_

In figure ( \_\_\_\_\_ )

- I/ We shall be abide all SPPRA Rules-2010 (Amended-2013)
- Rate must be quoted on total amount of Schedule rate either Above OR Below not accepted item wise.
- I/We read the standard bidding documents / TORs available in SPPRA website ([www.pprasinidh.govt.pk](http://www.pprasinidh.govt.pk)) and agreed to abide all of them and also provide all these documents with our signatures as & when directed.

Signature of the Contractor \_\_\_\_\_

Address: \_\_\_\_\_



# SPPRA BIDDING DOCUMENT

## STANDARD FORM OF BIDDING DOUCMENT FOR PROCUREMENT OF WORKS

### WORK # 03

#### (SINGLE STAGE ONE ENVELOPE METHOD)

Name of Work: - Improvement c.c. flooring i/c sewerage pipe line at Jharro street  
Qadimi Imam Bargah, Parvati compound & surrounding area,  
Saddar Division DMC South.

Estimate Cost : Rs. 9,99,386/-  
Bid Security : 2% of Quoted Amount  
Tender Cost : Rs. 1,000/-

---

Tender issue M/s. \_\_\_\_\_

PAY ORDER OF TENDER COST

PAY ORDER OF BID SECURITY

P.O. No. \_\_\_\_\_ Date \_\_\_\_\_


P.O. No. \_\_\_\_\_ Date \_\_\_\_\_

Bank \_\_\_\_\_

Bank \_\_\_\_\_

Rs. \_\_\_\_\_

Rs. \_\_\_\_\_




Signature & Stamp  
of Issuing Authority

# BIDDING DATA

## Work N0:03

- a) Name of Procuring Agency: - District Municipal Corporation South Karachi
- b) Brief Description of Works: - Improvement c.c. flooring i/c sewerage pipe line at Jharro street Qadimi Imam Bargah, Parvati compound & surrounding area, Saddar Division DMC South
- c) Estimated Cost: - Rs: 9,99,386/-
- d) Amount of Bid Security: - 2% of Quoted Amount
- f) Period of Bid Validity (days):- 90 Days
- g) Security Deposit :-  
(Including bid security):- 10% of total Cost
- h) Percentage, if any,  
to be deducted from bills: - 7.5 % Income Tax
- i) Deadline for Submission of Bids,  
along with time: - Dated: 13-04-2018 2.00 PM
- j) Venue, Time, and Date of Bid Opening: - Executive Engineer DMC (South) office situated at Hiralal Ganatra road near Mujahid Masjid, Karachi. at 2.30 P.M Dated:- 13-04-2018
- k) Time for Completion: - 90 Days
- l) Liquidity damages: - 0.05% of Estimated Cost or Bid cost per day of Delay

  
EXECUTIVE ENGINEER  
DMC (South)

CONTRACTOR'S SIGNATURE

M/s. \_\_\_\_\_

# DISTRICT MUNICIPAL CORPORATION SADDAR ZONE DMC (SOUTH) KARACHI

NAME OF WORK: - Improvement c.c. flooring i/c sewerage pipe line at Jharro street Qadimi Imam Bargah, Parvati compound & surrounding area, Saddar Division DMC South.

Tender No. ( 03 ) / (2017-2018)

(ITEM BASED ON SCHEDULE RATE)

Sr.#	DESCRIPTION OF WORK	QUANTITY	RATE	UNIT	AMOUNT
1	Dismantling cements concrete plain 1:2:4. (viii-P-iii-P-P-10/19-C)	300	3327.50	% Sft	9983
2	Excavation for pipe line in trenches etc. complete	6000	3600.00	%0 Cft	21600
3	Providing RCC pipes & Collars of Class "B" and fitting in trench i/c curing, fitting and joining with maxphalt composition and cement mortar (1:1) i/c testing with water to a head of 22.5 meter or 75 ft. A) 9" Dia B) 12" Dia	100 200	142.00 246.00	P/Rft P/Rft	14200 49200
4	Back filling the earth i/c leveling & dressing etc. complete.	5700	2760.00	%0 Cft	15732
5	Providing manhole 4 dia (in side) and 5 ft clear depth cost in situ with 1:2:4 c.c. (add 50% extra crushed) in benching ½" thick cement plastering with 1:3 cement motor on all inside wall surface channel and benching i/c making required NOS of main and branch channels ¾ dia M.s footrest @ 12" dia C/C i/c cost of excavation in all kinds of soil backfilling and disposal of exerted stuff etc. complete as per design of the In-charge.	8	14529.2 9	Each	116235
6	Cartage of 100 CFT / 5 tons of all material like one aggregate, spawl, coal, lime, surkhi etc. B.G Rait fastenings points & crossing bridges girders. Pipes, sheets Raits M.S Bars etc. or 1000 Nos brinks 10' x 5' x 3' or 1000 manuds of fuel wood by trucks or any other means owned by the contractors (Lead up to 15 Miles etc)	600	1065.04	% Cft	6391
7	P/L Aggregate base course CBR 80% as per (AASHTO) standard specification i/c compacting to the required density by approved mechanical means (Vibratory) roller road packer and smooth wheel roller etc) i/c watering with all lead and lift etc.	3500	5542.24	% Cft	193979
8	Providing and laying 2" thick toping cement concert i/c surface finishing and dividing in to panels. 2" thick (V-III-P-III-P-42/16-C)	17465	3275.50	% Sft	572066
<b>TOTAL</b>				<b>Rs.9,99,386 /-</b>	

Nomenclature quantities and Rates have been checked by me

SUB-ENGINEER  
DMC (SOUTH)

ASSTT. EX. ENGINEER  
DMC (SOUTH)

EXECUTIVE ENGINEER  
DMC (SOUTH)

I/We hereby quoted as follows.

Item Based on S/R amounting Rs.9,99,386 /- \_\_\_\_\_ % Above / Below of the S/R Rs. \_\_\_\_\_

In figure ( \_\_\_\_\_ )

1. I/ We shall be abide all SPPRA Rules-2010 (Amended-2013)
2. Rate must be quoted on total amount of Schedule rate either Above OR Below not accepted item wise.
3. I/We read the standard bidding documents / TORs available in SPPRA website ([www.pprasinidh.govt.pk](http://www.pprasinidh.govt.pk)) and agreed to abide all of them and also provide all these documents with our signatures as & when directed.

Signature of the Contractor \_\_\_\_\_

Address: \_\_\_\_\_

\_\_\_\_\_

# SPPRA BIDDING DOCUMENT

## STANDARD FORM OF BIDDING DOUCMENT FOR PROCUREMENT OF WORKS

### WORK # 04

#### (SINGLE STAGE ONE ENVELOPE METHOD)

Name of Work: - Improvement of c.c. flooring i/c sewerage pipe line at Sitla  
Mandir Bhimpura UC-17, Narian pora UC-22 and Swami  
Narian Mandir, Saddar Division DMC South

Estimate Cost : Rs. 9,99,777/-  
Bid Security : 2% of Quoted Amount  
Tender Cost : Rs. 1,000/-

---

Tender issue M/s. \_\_\_\_\_

PAY ORDER OF TENDER COST

PAY ORDER OF BID SECURITY

P.O. No. \_\_\_\_\_ Date \_\_\_\_\_


P.O. No. \_\_\_\_\_ Date \_\_\_\_\_

Bank \_\_\_\_\_

Bank \_\_\_\_\_

Rs. \_\_\_\_\_

Rs. \_\_\_\_\_




Signature & Stamp  
of Issuing Authority

# BIDDING DATA

## Work N0:04

- a) Name of Procuring Agency: - District Municipal Corporation South Karachi
- b) Brief Description of Works: - Improvement of c.c. flooring i/c sewerage pipe line at Sitla Mandir Bhimpura UC-17, Narian pora UC-22 and Swami Narian Mandir, Saddar Division DMC South
- c) Estimated Cost: - Rs: 9,99,777/-
- d) Amount of Bid Security: - 2% of Quoted Amount
- f) Period of Bid Validity (days):- 90 Days
- g) Security Deposit :-  
(Including bid security):- 10% of total Cost
- h) Percentage, if any,  
to be deducted from bills: - 7.5 % Income Tax
- i) Deadline for Submission of Bids,  
along with time: - Dated: 13-04-2018 2.00 PM
- j) Venue, Time, and Date of Bid Opening: - Executive Engineer DMC (South) office situated at Hiralal Ganatra road near Mujahid Masjid, Karachi. at 2.30 P.M Dated:- 13-04-2018
- k) Time for Completion: - 90 Days
- l) Liquidity damages: - 0.05% of Estimated Cost or Bid cost per day of Delay

  
EXECUTIVE ENGINEER  
DMC (South)

CONTRACTOR'S SIGNATURE

M/s. \_\_\_\_\_

# DISTRICT MUNICIPAL CORPORATION SADDAR ZONE DMC (SOUTH) KARACHI

NAME OF WORK: - Improvement of c.c. flooring i/c sewerage pipe line at Sitla Mandir Bhimpura UC-17, Narian pora UC-22 and Swami Narian Mandir, Saddar Division DMC South.

Tender No. (04) / (2017-2018)

(ITEM BASED ON SCHEDULE RATE)

Sr.#	DESCRIPTION OF WORK	QUANTITY	RATE	UNIT	AMOUNT
1	Earth work excavation of road side nails i/c forming its banks all putting the same on embankment as directed cold breaking dressing etc. (V-III P-VI P-1/4)	1200	1437.00	% .0 Cft	1724
2	Dismantling cements concrete plain 1:2:4. (viii-P-iii-P-P-10/19-C)	160	3327.50	% Sft	5324
3	Excavation for pipe line in trenches etc. complete	6000	3600.00	% .0 Cft	21600
4	Providing RCC pipes & Collars of Class "B" and fitting in trench i/c curing, fitting and joining with maxphalt composition and cement mortar (1:1) i/c testing with water to a head of 22.5 meter or 75 ft. A) 9" Dia B) 12" Dia	100 200	142.00 246.00	P/Rft P/Rft	14200 49200
5	Back filling the earth i/c leveling & dressing etc. complete.	5700	2760.00	% .0 Cft	15732
6	Providing manhole 4 dia (in side) and 5 ft clear depth cost in situ with 1:2:4 c.c. (add 50% extra crushed) in benching 1/2" thick cement plastering with 1:3 cement motor on all inside wall surface channel and benching i/c making required NOS of main and branch channels 3/4 dia M.s footrest @ 12" dia C/C i/c cost of excavation in all kinds of soil backfilling and disposal of exerted stuff etc. complete as per design of the In-charge.	8	14529.29	Each	116235
7	Manufacturing and supplying of R.C.C. ring slab of inside 36" dia outside 7.5 width and 6" thick i/c 3/8" dia tor steel bars two concentric rings with 3/8" did 8 Nos.. cross linked bars welded and two sunk type hooks, casted in a 1:1:1/2:3 conc. With embedded 15 Kg C.I frame in perfect position i/c transportation charges for an average lead of 20 Km. Per trip from casting yard to town offices.(A minimum of 25 slabs per trip will be transported)	5	1906.00	Each	9533
8	Manufacturing and supplying R.C.C. manhole cover cast in 1:2:4 concrete ratio 3 inch deep at center reinforced with 3/8" dia tor steel bars at 4" c/c welded to 1/8" thick 2.5 inch deep M.S plate i/c curing. Stacking and transportation within 10 miles 21" Dia	5	913.63	Each	4568
9	Cartage of 100 CFT / 5 tons of all material likes one aggregate, spawl, coal, lime, surkhi etc. B.G Rait fastenings points & crossing bridges girders. Pipes, sheets Rait M.S Bars etc. or 1000 Nos brinks 10' x 5' x 3' or 1000 manuds of fuel wood by trucks or any other means owned by the contractors (Lead up to 15 Miles etc)	600	1065.04	% Cft	6390
10	P/L Aggregate base course CBR 80% as per (AASHTO) standard specification i/c compacting to the required density by approved mechanical means (Vibratory) roller road packer and smooth wheel roller etc) i/c watering with all lead and lift etc.	800	5542.24	% Cft	44338
11	Cement Concrete brick or stone ballast 1-1/2 to 2" guage (C) ratio 1:4:8 (S.I. No. 4-C/P-14)	1800	9416.28	%Cft	169493
12	Providing and laying 2" thick topping cement concert i/c surface finishing and dividing in to panels. 2" thick (V-III-P-III-P-42/16-C)	16530	3275.50	% Sft	541440
<b>TOTAL</b>				<b>Rs. 9,99,777/-</b>	

Nomenclature quantities and Rates have been checked by me

SUB-ENGINEER  
DMC (SOUTH)

ASSTT. EX. ENGINEER  
DMC (SOUTH)

EXECUTIVE ENGINEER  
DMC (SOUTH)

I/We hereby quoted as follows.

Item Based on S/R amounting Rs.9,99,777/- \_\_\_\_\_ % Above / Below of the S/R Rs. \_\_\_\_\_

In figure ( \_\_\_\_\_ )

- I/ We shall be abide all SPPRA Rules-2010 (Amended-2013)
- Rate must be quoted on total amount of Schedule rate either Above OR Below not accepted item wise.
- I/We read the standard bidding documents / TORs available in SPPRA website ([www.pprasinidh.govt.pk](http://www.pprasinidh.govt.pk)) and agreed to abide all of them and also provide all these documents with our signatures as & when directed.

Signature of the Contractor \_\_\_\_\_

Address: \_\_\_\_\_

# SPPRA BIDDING DOCUMENT

## STANDARD FORM OF BIDDING DOUCMENT FOR PROCUREMENT OF WORKS

### WORK # 05

#### (SINGLE STAGE ONE ENVELOPE METHOD)

Name of Work: - Improvement of c.c. flooring i/c sewerage pipe line at Bilal City ward # 1 Reo G Bao G Compound ward # 1 and Akal Bonga ward # 3, Saddar Division DMC South.

Estimate Cost : Rs. 9,99,769/-  
Bid Security : 2% of Quoted Amount  
Tender Cost : Rs. 1,000/-

---

Tender issue M/s. \_\_\_\_\_

#### PAY ORDER OF TENDER COST

#### PAY ORDER OF BID SECURITY

P.O. No. \_\_\_\_\_ Date \_\_\_\_\_ P.O. No. \_\_\_\_\_ Date \_\_\_\_\_

Bank \_\_\_\_\_ Bank \_\_\_\_\_

Rs. \_\_\_\_\_ Rs. \_\_\_\_\_




Signature & Stamp  
of Issuing Authority

# BIDDING DATA

## Work N0: 05

- a) Name of Procuring Agency: - District Municipal Corporation South Karachi
- b) Brief Description of Works: - Improvement of c.c. flooring i/c sewerage pipe line at Bilal City ward # 1 Reo G Bao G Compound ward # 1 and Akal Bonga ward # 3, Saddar Division DMC South
- c) Estimated Cost: - Rs: 9,99,769/-
- d) Amount of Bid Security: - 2% of Quoted Amount
- f) Period of Bid Validity (days):- 90 Days
- g) Security Deposit :-  
(Including bid security):- 10% of total Cost
- h) Percentage, if any,  
to be deducted from bills: - 7.5 % Income Tax
- i) Deadline for Submission of Bids,  
along with time: - Dated: 13-04-2018 2.00 PM
- j) Venue, Time, and Date of Bid Opening: - Executive Engineer DMC (South) office situated at Hiralal Ganatra road near Mujahid Masjid, Karachi. at 2.30 P.M Dated:- 13-04-2018
- k) Time for Completion: - 90 Days
- l) Liquidity damages: - 0.05% of Estimated Cost or Bid cost per day of Delay

  
EXECUTIVE ENGINEER  
DMC (South)

CONTRACTOR'S SIGNATURE

M/s. \_\_\_\_\_



# DISTRICT MUNICIPAL CORPORATION SADDAR ZONEDMC (SOUTH) KARACHI

NAME OF WORK: - Improvement of c.c. flooring i/c sewerage pipe line at Bilal City ward # 1 Reo G Bao G Compound  
ward # 1 and Akal Bonga ward # 3, Saddar Division DMC South.

Tender No. ( 0 5 ) / (2017-2018)

(ITEM BASED ON SCHEDULE RATE)

Sr.#	DESCRIPTION OF WORK	QUANTITY	RATE	UNIT	AMOUNT
1	Earth work excavation of road side nails ic forming its banks all putting the same on embankment as directed cold breaking dressing etc. (V-III P-VI P-1/4)	1600	1437.00	% .0 Cft	2299
2	Dismantling cements concrete plain 1:2:4. (viii-P-iii-P-P-10/19-C)	184	3327.50	% Sft	6122
3	Excavation for pipe line in trenches etc. complete	6000	3600.00	% .0 Cft	21600
4	Providing RCC pipes & Collars of Class "B" and fitting in trench i/c curing, fitting and joining with maxphalt composition and cement mortar (1:1) i/c testing with water to a head of 22.5 meter or 75 ft. A) 9" Dia B) 12" Dia	100 300	142.00 246.00	P/Rft P/Rft	14200 73800
5	Back filling the earth i/c leveling & dressing etc. complete.	5686	2760.00	% .0 Cft	15693
6	Providing manhole 4 dia (in side) and 5 ft clear depth cost in situ with 1:2:4 c.c. (add 50% extra crushed) in benching 1/2" thick cement plastering with 1:3 cement motor on all inside wall surface channel and benching i/c making required NOS of main and branch channels 3/4 dia M.s footrest @ 12" dia C/C i/c cost of excavation in all kinds of soil backfilling and disposal of exerted stuff etc. complete as per design of the In-charge.	10	14529.29	Each	145293
7	Manufacturing and supplying of R.C.C. ring slab of inside 36" dia outside 7.5 width and 6" thick i/c 3/8" dia tor steel bars two concentric rings with 3/8" did 8 Nos.. cross linked bars welded and two sunk type hooks, casted in a 1:1:1/2:3 conc. With embedded 15 Kg C.I frame in perfect position i/c transportation charges for an average lead of 20 Km. Per trip from casting yard to town offices.(A minimum of 25 slabs per trip will be transported)	4	1906.00	Each	7624
8	Manufacturing and supplying R.C.C. manhole cover cast in 1:2:4 concrete ratio 3 inch deep at center reinforced with 3/8" dia tor steel bars at 4" c/c welded to 1/8" thick 2.5 inch deep M.S plate i/c curing. Stacking and transportation within 10 miles 21" Dia	4	913.63	Each	3655
9	Cartage of 100 CFT / 5 tons of all material likes one aggregate, spawl, coal, lime, surkhi etc. B.G Rait fastenings points & crossing bridges girders. Pipes, sheets Raits M.S Bars etc. or 1000 Nos brinks 10' x 5' x 3' or 1000 manuds of fuel wood by trucks or any other means owned by the contractors (Lead up to 15 Miles etc)	2098	1065.04	% Cft	22345
10	P/L Aggregate base course CBR 80% as per (AASHTO) standard specification i/c compacting to the required density by approved mechanical means (Vibratory) roller road packer and smooth wheel roller etc) i/c watering with all lead and lift etc.	1600	5542.24	% Cft	88676
11	Cement Concrete brick or stone ballast 1-1/2 to 2" guage (C) ratio 1:4:8 (S.I. No. 4-C/P-14)	600	9416.28	%Cft	56498
12	Providing and laying 2" thick toping cement concert i/c surface finishing and dividing in to panels. 2" thick (V-III-P-III-P-42/16-C)	16546	3275.50	% Sft	541964
<b>TOTAL</b>				<b>Rs. 9,99,769/-</b>	

Nomenclature quantities and Rates have been checked by me

SUB-ENGINEER  
DMC (SOUTH)

ASSTT. EX. ENGINEER  
DMC (SOUTH)

EXECUTIVE ENGINEER  
DMC (SOUTH)

I/We hereby quoted as follows.

Item Based on S/R amounting Rs.9,99,769/- \_\_\_\_\_ % Above / Below of the S/R Rs. \_\_\_\_\_

In figure ( \_\_\_\_\_ )

- I/ We shall be abide all SPPRA Rules-2010 (Amended-2013)
- Rate must be quoted on total amount of Schedule rate either Above OR Below not accepted item wise.
- I/We read the standard bidding documents / TORs available in SPPRA website ([www.pprasinhd.govt.pk](http://www.pprasinhd.govt.pk)) and agreed to abide all of them and also provide all these documents with our signatures as & when directed.

Signature of the Contractor \_\_\_\_\_

Address: \_\_\_\_\_

# SPPRA BIDDING DOCUMENT

## STANDARD FORM OF BIDDING DOUCMENT FOR PROCUREMENT OF WORKS

### WORK # 06

#### (SINGLE STAGE ONE ENVELOPE METHOD)

Name of Work: - Improvement of c.c. flooring i/c sewerage pipe line at Bismillah  
Compound Veeriji Compound & Surrounding area UC-22,  
Saddar Division DMC South

Estimate Cost : Rs. 9,99,460/-  
Bid Security : 2% of Quoted Amount  
Tender Cost : Rs. 1,000/-

---

Tender issue M/s. \_\_\_\_\_

PAY ORDER OF TENDER COST

PAY ORDER OF BID SECURITY

P.O. No. \_\_\_\_\_ Date \_\_\_\_\_

P.O. No. \_\_\_\_\_ Date \_\_\_\_\_

Bank \_\_\_\_\_

Bank \_\_\_\_\_

Rs. \_\_\_\_\_

Rs. \_\_\_\_\_




Signature & Stamp  
of Issuing Authority

# BIDDING DATA

## Work N0:06

- a) Name of Procuring Agency: - District Municipal Corporation South Karachi
- b) Brief Description of Works: - Improvement of c.c. flooring i/c sewerage pipe line at Bismillah Compound Veeriji Compound & Surrounding area UC-22, Saddar Division DMC South
- c) Estimated Cost: - Rs: 9,99,460/-
- d) Amount of Bid Security: - 2% of Quoted Amount
- f) Period of Bid Validity (days):- 90 Days
- g) Security Deposit :-  
(Including bid security):- 10% of total Cost
- h) Percentage, if any,  
to be deducted from bills: - 7.5 % Income Tax
- i) Deadline for Submission of Bids,  
along with time: - Dated: 13-04-2018 2.00 PM
- j) Venue, Time, and Date of Bid Opening: - Executive Engineer DMC (South) office situated at Hiralal Ganatra road near Mujahid Masjid, Karachi. at 2.30 P.M Dated:- 13-04-2018
- k) Time for Completion: - 90 Days
- l) Liquidity damages: - 0.05% of Estimated Cost or Bid cost per day of Delay

  
EXECUTIVE ENGINEER  
DMC (South)

CONTRACTOR'S SIGNATURE

M/s. \_\_\_\_\_

# DISTRICT MUNICIPAL CORPORATION SADDAR ZONE DMC (SOUTH) KARACHI

NAME OF WORK: - Improvement of c.c. flooring i/c sewerage pipe line at Bismillah Compound Veeriji Compound & Surrounding area UC-22, Saddar Division DMC South.

Tender No. ( 06 ) / (2017-2018)

(ITEM BASED ON SCHEDULE RATE)

Sr.#	DESCRIPTION OF WORK	QUANTITY	RATE	UNIT	AMOUNT
1	Earth work excavation of road side nails i/c forming its banks all putting the same on embankment as directed cold breaking dressing etc. (V-III P-VI P-1/4)	2200	1437.00	% .0 Cft	3161
2	Dismantling cements concrete plain 1:2:4. (viii-P-iii-P-P-10/19-C)	190	3327.50	% Sft	6321
3	Excavation for pipe line in trenches etc. complete	6000	3600.00	% .0 Cft	21600
4	Providing RCC pipes & Collars of Class "B" and fitting in trench i/c curing, fitting and joining with maxphalt composition and cement mortar (1:1) i/c testing with water to a head of 22.5 meter or 75 ft. A) 9" Dia B) 12" Dia	100 300	142.00 246.00	P/Rft P/Rft	14200 73800
5	Back filling the earth i/c leveling & dressing etc. complete.	5686	2760.00	% .0 Cft	15352
6	Providing manhole 4 dia (in side) and 5 ft clear depth cost in situ with 1:2:4 c.c. (add 50% extra crushed) in benching ½" thick cement plastering with 1:3 cement motor on all inside wall surface channel and benching i/c making required NOS of main and branch channels ¾ dia M.s footrest @ 12" dia C/C i/c cost of excavation in all kinds of soil backfilling and disposal of exerted stuff etc. complete as per design of the In-charge.	10	14529.29	Each	1,45,293
7	Manufacturing and supplying of R.C.C. ring slab of inside 36" dia outside 7.5 width and 6" thick i/c 3/8" dia tor steel bars two concentric rings with 3/8" did 8 Nos.. cross linked bars welded and two sunk type hooks, casted in a 1:1:1/2:3 conc. With embedded 15 Kg C.I frame in perfect position i/c transportation charges for an average lead of 20 Km. Per trip from casting yard to town offices.(A minimum of 25 slabs per trip will be transported)	4	1906.00	Each	7626
8	Manufacturing and supplying R.C.C. manhole cover cast in 1:2:4 concrete ratio 3 inch deep at center reinforced with 3/8" dia tor steel bars at 4" c/c welded to 1/8" thick 2.5 inch deep M.S plate i/c curing. Stacking and transportation within 10 miles 21" Dia	4	913.63	Each	3655
9	Cartage of 100 CFT / 5 tons of all material likes one aggregate, spawl, coal, lime, surkhi etc. B.G Rait fastenings points & crossing bridges girders. Pipes, sheets Raits M.S Bars etc. or 1000 Nos brinks 10' x 5' x 3' or 1000 manuds of fuel wood by trucks or any other means owned by the contractors (Lead up to 15 Miles etc)	2704	1065.04	% Cft	28799
10	P/L Aggregate base course CBR 80% as per (AASHTO) standard specification i/c compacting to the required density by approved mechanical means (Vibratory) roller road packer and smooth wheel roller etc) i/c watering with all lead and lift etc.	1600	5542.24	% Cft	88676
11	Cement Concrete brick or stone ballast 1-1/2 to 2" guage (C) ratio 1:4:8 (S.I. No. 4-C/P-14)	700	9416.28	%Cft	65914
12	Providing and laying 2" thick toping cement concert i/c surface finishing and dividing in to panels. 2" thick (V-III-P-III-P-42/16-C)	16030	3275.50	% Sft	525063
<b>TOTAL</b>					<b>Rs.9,99,460 /-</b>

Nomenclature quantities and Rates have been checked by me

SUB-ENGINEER  
DMC (SOUTH)

ASSTT. EX. ENGINEER  
DMC (SOUTH)

EXECUTIVE ENGINEER  
DMC (SOUTH)

I/We hereby quoted as follows.

Item Based on S/R amounting Rs.9,99,460/- % Above / Below of the S/R Rs. \_\_\_\_\_

In figure ( \_\_\_\_\_ )

1. I/ We shall be abide all SPPRA Rules-2010 (Amended-2013)
2. Rate must be quoted on total amount of Schedule rate either Above OR Below not accepted item wise.
3. I/We read the standard bidding documents / TORs available in SPPRA website ([www.pprasinidh.govt.pk](http://www.pprasinidh.govt.pk)) and agreed to abide all of them and also provide all these documents with our signatures as & when directed

Signature of the Contractor \_\_\_\_\_

Address: \_\_\_\_\_

# SPPRA BIDDING DOCUMENT

## STANDARD FORM OF BIDDING DOUCMENT FOR PROCUREMENT OF WORKS

### WORK # 07

#### (SINGLE STAGE ONE ENVELOPE METHOD)

Name of Work: - Repair / maintenance and painting on footpath in front of Supreme Court i/c P/L water line in Ghari Khatta and laying c.c. flooring City Railway Colony near Bridge, Saddar Division DMC South.

Estimate Cost : Rs. 9,68,196/- + Open Rate  
Bid Security : 2% of Quoted Amount  
Tender Cost : Rs. 1,000/-

---

Tender issue M/s. \_\_\_\_\_

PAY ORDER OF TENDER COST

PAY ORDER OF BID SECURITY

P.O. No. \_\_\_\_\_ Date \_\_\_\_\_

P.O. No. \_\_\_\_\_ Date \_\_\_\_\_

Bank \_\_\_\_\_

Bank \_\_\_\_\_

Rs. \_\_\_\_\_

Rs. \_\_\_\_\_



Signature & Stamp  
of Issuing Authority

# BIDDING DATA

## Work N0:07

- a) Name of Procuring Agency: - District Municipal Corporation South Karachi
- b) Brief Description of Works: - Repair / maintenance and painting on footpath in front of Supreme Court i/c P/L water line in Ghari Khatta and laying c.c. flooring City Railway Colony near Bridge, Saddar Division DMC South
- c) Estimated Cost: - Rs: 9,68,196/- + Open Rate
- d) Amount of Bid Security: - 2% of Quoted Amount
- f) Period of Bid Validity (days):- 90 Days
- g) Security Deposit :-  
(Including bid security):- 10% of total Cost
- h) Percentage, if any,  
to be deducted from bills: - 7.5 % Income Tax
- i) Deadline for Submission of Bids,  
along with time: - Dated: 13-04-2018 2.00 PM
- j) Venue, Time, and Date of Bid Opening: - Executive Engineer DMC (South) office situated at Hiralal Ganatra road near Mujahid Masjid, Karachi. at 2.30 P.M Dated:- 13-04-2018
- k) Time for Completion: - 90 Days
- l) Liquidity damages: - 0.05% of Estimated Cost or Bid cost per day of Delay

  
EXECUTIVE ENGINEER  
DMC (South)

CONTRACTOR'S SIGNATURE

M/s. \_\_\_\_\_

# DISTRICT MUNICIPAL CORPORATION SADDAR ZONE DMC (SOUTH) KARACHI

Name of Work: - Repair / maintenance and painting on footpath in front of Supreme Court i/c P/L water line in Ghari Khatta and laying c.c. flooring City Railway Colony near Bridge, Saddar Division DMC South

Tender No. (07) / (2017-2018)

(ITEM BASED ON SCHEDULE RATE)

SR. #	Description of Item	Qty.	Rate	Unit	Amount
1	Dismantling cements concrete plain 1:2:4. (viii-P-iii-P-P-10/19-C)	21	3327.50	% Cft	699
3	Providing and fixing and paving block flooring having size 197x97x60 mm (Envicrete) of city / Quadra cobble shape with pigmented having strength B/W 5000 to 8500 PSI i/c filling the joint etc.(V-III-P-III-P49/71)	1451	199.77	P/Sft	289866
5	Preparing the surface and painting with enamel paint of approved make i/c rubbing the surface with sand paper, filling the voids with chalk / plaster of paris and then painting etc. complete Two Coats Old surface (V-III-P-III-P-73/31-A+B)	14622	1014.14	% Sft	148287
6	Dismantling of existing asphalt concrete road ice base and sub base disposable of material.	975	773.86	% Sft	7545
7	Excavation for pipe line in trenches and pits in all kind of soil of murum i/c trimming and dressing side to true alignment and shape traveling of beds of trenches to correct level and grade cutting joint holes and disposal of surplus earth within a one chain as directed by Engineer Incharge. Providing fence guard light flags and temporary crossing for non vehicular traffic wherever required left upto 05' and lead up to 01 chain. (v-iii part-iiP.No. 13 S.No. 51) Lift 0'-5'	4875	4650.00	%Cft	22669
8	Providing Laying & fixing in trench i/c fitting jointing & testing etc complete in all respect the high density polyethylene PE pipes (HDPE-100) for W/S confirming ISO 4427/DIN8074/8075 B.S 3580 & PSI 3051. 04"dia Lift 5'-8'	975	5200.00	%Cft	5070
9	Providing / Fixing M.S Tail piece (Dholki) on A.C pipe fabricated with 1/4" thick M.S plate, having dimensions and weight as mentioned against each item. It includes the cost of labor and" sealing material etc. complete.Weight = 6.290 kg	300	268.00	P/Rft	80400
10	Full hire charges of the pumping set per day inclusive of wage of driver and Assistant fuel or electric energy plate forms required for placing pumps etc. at lower depth with suction and delivery pipes for pumping out water found at various depths from trenches i/c the cost of erection and dismantling after completion of the job. Hire charges of pumping set upto 10 Hp pumping out water from 10 ft deep trench. (v-iv part-vi P.No. 76 S.No. 23)	4	1098.00	Each	4392
11	Refilling the excavated stuff in trenches 6" thick layer i/c watering remming to full compaction etc. complete.	4	1500.00	P/Day	6000
12	Cartage of 100 CFT / 5 tons of all material like one aggregate, spawl, coal, lime, surkhi etc. B.G Rait fastenings points & crossing bridges girders. Pipes, sheets Raits M.S Bars etc. or 1000 Nos brinks 10' x 5' x 3' or 1000 manuds of fuel wood by trucks or any other means owned by the contractors (Lead up to 15 Miles etc)	4387	2760.00	%0 Cft	12108
13	P/L Aggregate base course CBR 80% as per (AASHTO) standard specification i/c compacting to the required density by approved mechanical means (Vibratory) roller road packer and smooth wheel roller etc) i/c watering with all lead and lift etc.	2462	1065.04	% Cft	26221
14	Providing and laying 2" thick topping cement concert i/c surface finishing and dividing in to panels. 2" thick (V-III-P-III-P-42/16-C)	2359	5542.24	% Cft	130741
		7150	3275.50	% Sft	234198
<b>Total Amount of Schedule Items</b>				<b>Rs. 9,68,196/-</b>	

## (PART-B: ITEM BASED ON OPEN RATE)

SR. #	Description of Item	Qty.	Rate	Unit	Amount
2	Re-fixing paving block flooring having size 197x97x60 mm (Envicrete) of city / Quadra cobble shape with pigmented having strength B/W 5000 to 8500 PSI i/c filling the joint etc.	299	Open Rate	P/Sft	
4	P/F Machine made Kerb stone 18"x12"x6" in S.R. Cement having a minimum work cube curing strength of 3000 PSI after 28 days with 1;2;4 i/c filling the joint with 1;4 C.M (Approved industrial Made).	72	Open Rate	P/Rft	
Total Amount of Open Rate Item Rs.					

Nomenclature quantities and  
Rates have been checked by me

SUB-ENGINEER  
DMC (SOUTH)

ASST. EX. ENGINEER  
DMC (SOUTH)

EXECUTIVE ENGINEER  
DMC (SOUTH)

**QUOTED BID (SUMMARY)**

I/We hereby quoted as follows. .

1	PART-A (Item Based on S/R amounting Rs. 9,68,196/- _____ % Above / Below of the S/R .	Rs. _____
2	PART-B (Item Based on O/R)	Rs. _____
3	<b>GRAND TOTAL (A+B)</b>	Rs. _____

In figure ( \_\_\_\_\_ )

1. I/ We shall be abide all SPPRA Rules-2010 (Amended-2013)
2. Rate must be quoted on total amount of Schedule rate either Above OR Below not accepted item wise.
3. I/We read the standard bidding documents / TORs available in SPPRA website ([www.pprasindh.govt.pk](http://www.pprasindh.govt.pk)) and agreed to abide all of them and also provide all these documents with our signatures as & when directed

Signature of the Contractor \_\_\_\_\_

Address: \_\_\_\_\_

\_\_\_\_\_



# SPPRA BIDDING DOCUMENT

## STANDARD FORM OF BIDDING DOUCMENT FOR PROCUREMENT OF WORKS

### WORK # 08

#### (SINGLE STAGE ONE ENVELOPE METHOD)

Name of Work: - Repair of footpath by paving block floor near Arts Council in  
front of Rex Pump Saddar Division DMC South

Estimate Cost : Rs. 9,80,818/- + Open Rate  
Bid Security : 2% of Quoted Amount  
Tender Cost : Rs. 1,000/-

Tender issue M/s. \_\_\_\_\_

#### PAY ORDER OF TENDER COST

#### PAY ORDER OF BID SECURITY

P.O. No. \_\_\_\_\_ Date \_\_\_\_\_ P.O. No. \_\_\_\_\_ Date \_\_\_\_\_

Bank \_\_\_\_\_ Bank \_\_\_\_\_


Rs. \_\_\_\_\_ Rs. \_\_\_\_\_

  
Signature & Stamp  
of Issuing Authority

# BIDDING DATA

## Work N0:08

- a) Name of Procuring Agency: - District Municipal Corporation South Karachi
- b) Brief Description of Works: - Repair of footpath by paving block floor near Arts Council in front of Rex Pump Saddar Division DMC South
- c) Estimated Cost: - Rs: 9,80,818/- + Open Rate
- d) Amount of Bid Security: - 2% of Quoted Amount
- f) Period of Bid Validity (days):- 90 Days
- g) Security Deposit :-  
(Including bid security):- 10% of total Cost
- h) Percentage, if any,  
to be deducted from bills: - 7.5 % Income Tax
- i) Deadline for Submission of Bids,  
along with time: - Dated: 13-04-2018 2.00 PM
- j) Venue, Time, and Date of Bid Opening: - Executive Engineer DMC (South) office situated at Hiralal Ganatra road near Mujahid Masjid, Karachi. at 2.30 P.M Dated:- 13-04-2018
- k) Time for Completion: - 90 Days
- l) Liquidity damages: - 0.05% of Estimated Cost or Bid cost per day of Delay

  
EXECUTIVE ENGINEER  
DMC (South)

CONTRACTOR'S SIGNATURE

M/s. \_\_\_\_\_

# DISTRICT MUNICIPAL CORPORATION SADDAR ZONE DMC (SOUTH) KARACHI

Name of Work: - Repair of footpath by paving block floor near Arts Council in front of Rex Pump Saddar Division DMC South.

Tender No. (08) / (2017-2018)

## (ITEM BASED ON SCHEDULE RATE)

SR. #	Description of Item	Qty.	Rate	Unit	Amount
1	Dismantling cements concrete plain 1:2:4. (viii-P-iii-P-P-10/19-C)	261	3327.50	% Cft	8685
3	P/F Machine made Kerb stone 18"x12"x 6" in S.R. Cement having a minimum work cube curing strength of 3750 PSI after 28 days with 1;2;4 i/c filling the joint with 1;4 C.M (Approved industrial Made) .	358	297.01	P/Rft	106330
5	Providing and fixing and paving block flooring having size 197x97x60 mm (Envicrete) of city / Quadra cobble shape with pigmented having strength B/W 5000 to 8500 PSI i/c filling the joint etc.(V-III-P-III-P49/71)	4334	199.77	P/Sft	865803
<b>Total Amount of Schedule Items</b>					<b>Rs. 9,80,818/-</b>

## (PART-B: ITEM BASED ON OPEN RATE)

SR. #	Description of Item	Qty.	Rate	Unit	Amount
2	Re-fixing of kerb block i/c dismantling existing c.c kerb & jointing with 1:4 c.m etc.	55	Open Rate	P/Rft	
4	Re-fixing Of paving block floor i/c leveling dressing & fixing over bed of 2" thick hill sand & compacting etc comp.	524	Open Rate	P/Sft	
<b>Total Amount of Open Rate Item Rs.</b>					

Nomenclature quantities and Rates have been checked by me

SUB-ENGINEER  
DMC (SOUTH)

ASSTT. EX. ENGINEER  
DMC (SOUTH)

EXECUTIVE ENGINEER  
DMC (SOUTH)

## QUOTED BID (SUMMARY)

I/We hereby quoted as follows.

1	PART-A (Item Based on S/R amounting Rs. 9,80,818/- _____ % Above / Below of the S/R .	Rs.
2	PART-B (Item Based on O/R)	Rs.
3	<b>GRAND TOTAL (A+B)</b>	Rs.

- I/ We shall be abide all SPPRA Rules-2010 (Amended-2013)
- Rate must be quoted on total amount of Schedule rate either Above OR Below not accepted item wise.
- I/We read the standard bidding documents / TORs available in SPPRA website ([www.pprasingdh.govt.pk](http://www.pprasingdh.govt.pk)) and agreed to abide all of them and also provide all these documents with our signatures as & when directed

Signature of the Contractor \_\_\_\_\_

Address: \_\_\_\_\_

# SPPRA BIDDING DOCUMENT

## STANDARD FORM OF BIDDING DOUCMENT FOR PROCUREMENT OF WORKS

### WORK # 09

#### (SINGLE STAGE ONE ENVELOPE METHOD)

Name of Work: - De-Silting /Cleaning of sewerage lines at Marwari Lane, Saddar  
Division DMC South

Estimate Cost : Rs. 9,99,327/-  
Bid Security : 2% of Quoted Amount  
Tender Cost : Rs. 1,000/-

Tender issue M/s. \_\_\_\_\_

#### PAY ORDER OF TENDER COST

#### PAY ORDER OF BID SECURITY

P.O. No. \_\_\_\_\_ Date \_\_\_\_\_


P.O. No. \_\_\_\_\_ Date \_\_\_\_\_

Bank \_\_\_\_\_

Bank \_\_\_\_\_

Rs. \_\_\_\_\_

Rs. \_\_\_\_\_




Signature & Stamp  
of Issuing Authority

# BIDDING DATA

## Work N0:09

- a) Name of Procuring Agency: - District Municipal Corporation South Karachi
- b) Brief Description of Works: - De-Silting /Cleaning of sewerage lines at Marwari Lane, Saddar Division DMC South
- c) Estimated Cost: - Rs: 9,99,327/-
- d) Amount of Bid Security: - 2% of Quoted Amount
- f) Period of Bid Validity (days):- 90 Days
- g) Security Deposit :-  
(Including bid security):- 10% of total Cost
- h) Percentage, if any,  
to be deducted from bills: - 7.5 % Income Tax
- i) Deadline for Submission of Bids,  
along with time: - Dated: 13-04-2018 2.00 PM
- j) Venue, Time, and Date of Bid Opening: - Executive Engineer DMC (South) office situated at Hiralal Ganatra road near Mujahid Masjid, Karachi. at 2.30 P.M Dated:- 13-04-2018
- k) Time for Completion: - 90 Days
- l) Liquidity damages: - 0.05% of Estimated Cost or Bid cost per day of Delay

  
EXECUTIVE ENGINEER  
DMC (South)

CONTRACTOR'S SIGNATURE

M/s. \_\_\_\_\_

# DISTRICT MUNICIPAL CORPORATION SADDAR ZONE DMC (SOUTH) KARACHI

Name of Work: - De-Silting /Cleaning of sewerage lines at Marwari Lane, Saddar Division DMC South

Tender No. (09) / (2017-2018)  
(ITEM BASED ON SCHEDULE RATE)

SR. #	Description of Item	Qty.	Rate	Unit	Amount
1	Cleaning inside sewerage lines completely restoring original silt free space. Dia meter of pipe lines by labour and equipment (mechanically electrically driven) ice accessories like pulley's steel rope, bucket. And draggers sizizing from 6" to 18" dia their to and fro pulling action (No of passes (first phase in entire lenth from dawn stream to up stream) bringing dawn pick hours sewerage to flow pipe line ( as free flow) and I entire length ensuring no silt is observed in buckets (6" to 18") except only sewage water and finally passing a steel ball of dia 12" lesser then the diameter of the pipe but not exceeding 48" dia bal even for large dia pipe to ensure perfect cleaning. The job includes all the hire / cost of equipment and accessories of above winching machine / devices along with engienes with winching drum set having rope pulley's mount over it steel bukets for 6" to 18" dia hooks and other protection likes safety barriers, traffic cones ensuring no other puplic property lives and removal of site etc . complete as per full satisfaction of site Engineer.				
	A) 12" dia	2000	80.50	P/Rft	161000
	B) 15" dia	2500	96.60	P/Rft	241500
	C) 18" dia	4000	128.80	P/Rft	515200
	D) 24" dia	390	209.30	P/Rft	81627
<b>Total Amount of Schedule Items</b>					<b>Rs. 9,99,327/-</b>

Nomenclature quantities and Rates have been checked by me

SUB-ENGINEER  
DMC (SOUTH)

ASSTT. ENGINEER  
DMC (SOUTH)

EXECUTIVE ENGINEER  
DMC (SOUTH)

I/We hereby quoted as follows.

Item Based on S/R amounting Rs.9,99,327/- \_\_\_\_\_ % Above / Below of the S/R Rs. \_\_\_\_\_

In figure ( \_\_\_\_\_ )

1. I/ We shall be abide all SPPRA Rules-2010 (Amended-2013)
2. Rate must be quoted on total amount of Schedule rate either Above OR Below not accepted item wise.
3. I/We read the standard bidding documents / TORs available in SPPRA website ([www.pprasinhd.govt.pk](http://www.pprasinhd.govt.pk)) and agreed to abide all of them and also provide all these documents with our signatures as & when directed.

Signature of the Contractor \_\_\_\_\_

Address: \_\_\_\_\_

\_\_\_\_\_

# SPPRA BIDDING DOCUMENT

## STANDARD FORM OF BIDDING DOUCMENT FOR PROCUREMENT OF WORKS

### WORK # 10

#### (SINGLE STAGE ONE ENVELOPE METHOD)

Name of Work: - Cleaning of sewerage / storm water pipe line i/c supplying of  
RCC pre-cast slab from Jang Press to state Bank Head Office,  
Saddar Division DMC South

Estimate Cost : Rs. 8,85,500/- + Open Rate  
Bid Security : 2% of Quoted Amount  
Tender Cost : Rs. 1,000/-

Tender issue M/s. \_\_\_\_\_

#### PAY ORDER OF TENDER COST

#### PAY ORDER OF BID SECURITY

P.O. No. \_\_\_\_\_ Date \_\_\_\_\_


P.O. No. \_\_\_\_\_ Date \_\_\_\_\_

Bank \_\_\_\_\_

Bank \_\_\_\_\_

Rs. \_\_\_\_\_

Rs. \_\_\_\_\_

  
Signature & Stamp  
of Issuing Authority

# BIDDING DATA

## Work N0:10

- a) Name of Procuring Agency: - District Municipal Corporation South Karachi
- b) Brief Description of Works: - Cleaning of sewerage / storm water pipe line i/c supplying of RCC pre-cast slab from Jang Press to state Bank Head Office. Saddar Division DMC South
- c) Estimated Cost: - Rs: 8,85,500/- + Open Rate
- d) Amount of Bid Security: - 2% of Quoted Amount
- f) Period of Bid Validity (days):- 90 Days
- g) Security Deposit :-  
(Including bid security):- 10% of total Cost
- h) Percentage, if any,  
to be deducted from bills: - 7.5 % Income Tax
- i) Deadline for Submission of Bids,  
along with time: - Dated: 13-04-2018 2.00 PM
- j) Venue, Time, and Date of Bid Opening: - Executive Engineer DMC (South) office situated at Hiralal Ganatra road near Mujahid Masjid, Karachi. at 2.30 P.M Dated:- 13-04-2018
- k) Time for Completion: - 90 Days
- l) Liquidity damages: - 0.05% of Estimated Cost or Bid cost per day of Delay

  
EXECUTIVE ENGINEER  
DMC (South)

CONTRACTOR'S SIGNATURE

M/s. \_\_\_\_\_



# DISTRICT MUNICIPAL CORPORATION SADDAR ZONE DMC (SOUTH) KARACHI

Name of Work: - Cleaning of sewerage / storm water pipe line i/c supplying of RCC pre-cast slab from Jang Press to state Bank Head Office, Saddar Division DMC South .

Tender No. (10) / (2017-2018)

## (ITEM BASED ON SCHEDULE RATE)

SR. #	Description of Item	Qty.	Rate	Unit	Amount
1	Cleaning inside sewerage lines completely restoring original silt free space. Dia meter of pipe lines by labour and equipment (mechanically electrically driven) ice accessories like pulley's steel rope, bucket. And draggers sizing from 6" to 18" dia their to and fro pulling action (No of passes (first phase in entire lenth from dawn stream to up stream) bringing dawn pick hours sewerage to flow pipe line ( as free flow) and I entire length ensuring no silt is observed in buckets (6" to 18") except only sewage water and finally passing a steel ball of dia 12" lesser then the diameter of the pipe but not exceeding 48" dia bal even for large dia pipe to ensure perfect cleaning. The job includes all the hire / cost of equipment and accessories of above winching machine / devices along with engines with winching drum set having rope pulley's mount over it steel bukets for 6" to 18" dia hooks and other protection likes safety barriers, traffic cones ensuring no other puplic property lives and removal of site etc . complete as per full satisfaction of site Engineer.				
	12" dia	5000	80.50	P/Rft	402500
	18" dia	500	128.80	P/Rft	64400
	24" dia	2000	209.30	P/Rft	418600
Total Amount of Schedule Items					Rs. 8,85,500/-

## (PART-B: ITEM BASED ON OPEN RATE)

SR. #	Description of Item	Qty.	Rate	Unit	Amount
2	Providig & fixing R.C.C Precast Slab 1:2:4 CC using reinforcement bar 6" both sides of 1/2" dia i/c loading & un loading etc complete. size (4'x2'x5)	20	Open Rate	Each	
Total Amount of Open Rate Item Rs.					

Nomenclature quantities and Rates have been checked by me

SUB-ENGINEER  
DMC (SOUTH)

ASSTT. EX. ENGINEER  
DMC (SOUTH)

EXECUTIVE ENGINEER  
DMC (SOUTH)

## QUOTED BID (SUMMARY)

I/We hereby quoted as follows.

1	PART-A (Item Based on S/R amounting Rs. 8,85,500/- _____ % Above / Below of the S/R .	Rs.
2	PART-B (Item Based on O/R)	Rs.
3		
GRAND TOTAL (A+B)		Rs.

- I/ We shall be abide all SPPRA Rules-2010 (Amended-2013)
- Rate must be quoted on total amount of Schedule rate either Above OR Below not accepted item wise.
- I/We read the standard bidding documents / TORs available in SPPRA website ([www.pprasinidh.govt.pk](http://www.pprasinidh.govt.pk)) and agreed to abide all of them and also provide all these documents with our signatures as & when directed.

Signature of the Contractor \_\_\_\_\_

Address: \_\_\_\_\_

# SPPRA BIDDING DOCUMENT

## STANDARD FORM OF BIDDING DOUCMENT FOR PROCUREMENT OF WORKS

### WORK # 11

#### (SINGLE STAGE ONE ENVELOPE METHOD)

Name of Work: - Disposal of accumulated rain water and the construction of  
main hole on the surface of major road in, Saddar Division  
DMC South

Estimate Cost : Rs. 9,04,043/- + Open Rate  
Bid Security : 2% of Quoted Amount  
Tender Cost : Rs. 1,000/-

---

Tender issue M/s. \_\_\_\_\_

#### PAY ORDER OF TENDER COST

#### PAY ORDER OF BID SECURITY

P.O. No. \_\_\_\_\_ Date \_\_\_\_\_


P.O. No. \_\_\_\_\_ Date \_\_\_\_\_

Bank \_\_\_\_\_

Bank \_\_\_\_\_

Rs. \_\_\_\_\_

Rs. \_\_\_\_\_



Signature & Stamp  
of Issuing Authority

# BIDDING DATA

## Work N0:11

- a) Name of Procuring Agency: - District Municipal Corporation South Karachi
- b) Brief Description of Works: - Disposal of accumulated rain water and the construction of main hole on the surface of major road in, Saddar Division DMC South
- c) Estimated Cost: - Rs: 9,04,043/- + Open Rate
- d) Amount of Bid Security: - 2% of Quoted Amount
- f) Period of Bid Validity (days):- 90 Days
- g) Security Deposit :-  
(Including bid security):- 10% of total Cost
- h) Percentage, if any,  
to be deducted from bills: - 7.5 % Income Tax
- i) Deadline for Submission of Bids,  
along with time: - Dated: 13-04-2018 2.00 PM
- j) Venue, Time, and Date of Bid Opening: - Executive Engineer DMC (South) office situated at Hiralal Ganatra road near Mujahid Masjid, Karachi. at 2.30 P.M Dated:- 13-04-2018
- k) Time for Completion: - 90 Days
- l) Liquidity damages: - 0.05% of Estimated Cost or Bid cost per day of Delay

  
EXECUTIVE ENGINEER  
DMC (South)

CONTRACTOR'S SIGNATURE

M/s. \_\_\_\_\_

# DISTRICT MUNICIPAL CORPORATION SADDAR ZONE DMC (SOUTH) KARACHI

Name of Work: - Disposal of accumulated rain water and the construction of main hole on the surface of major road in,  
Saddar Division DMC South

Tender No. (11) / (2017-2018)

(ITEM BASED ON SCHEDULE RATE)

SR. #	Description of Item	Qty.	Rate	Unit	Amount
1	Dismantling of existing asphalt concrete road ice base and sub base disposable of material.	2100	773.86	% Cft	16251
2	Excavation for pipe line in trenches and pits in all kind of soil of murum i/c trimming and dressing side to true alignment and shape traveling of beds of trenches to correct level and grade cutting joint holes and disposal of surplus earth within a one chain as directed by Engineer Incharge. Providing fence guard light flags and temporary crossing for non vehicular traffic wherever required left upto 05' and lead up to 01 chain. (v-iii part-ii P.No. 13 S.No. 51) Lift 0'-5'	7627	4650.00	%Cft	35466
3	P / L UPVC Pipe of class D I/C cutting Fitting compt. 8" Dia	795	569.00	P/Rft	452355
4	Refilling the excavated stuff in trenches 6" thick layer i/c watering ramming to full compaction etc complete. (v-iv part-vi P.No. 77 S.No. 24)	5720	2760.00	%Cft	15787
5	Carriage of 100 Cft/ 5 Tons of all material like stone, aggregate, spawl, coal lime, surkhi etc B.G Rail fastening points and crossing bridge, girders, pipes, sheets Rail M.S Bars etc or 1000 nos: bricks 10" X 5" X 3" or 1000 Nos: tiles 12" X 6" X 2" or 150 Cft of timber or 100 Maunds of fuel wood by trucks or any other means owned by contractors. 15 Miles.	3482	1065.06	%Cft	37085
6	Providing manhole 4 dia (in side) and 5 ft clear depth cost in situ with 1:2:4 c.c. (add 50% extra crushed) in benching 1/2" thick cement plastering with 1:3 cement motor on all inside wall surface channel and benching i/c making required NOS of main and branch channels 3/4 dia M.s footrest @ 12" dia C/C i/c cost of excavation in all kinds of soil backfilling and disposal of exerted stuff etc. complete as per design of the In-charge. (R/A on Sch:2012)	18	14529.29	Each	261527
7	Add / deduct per ft depth / raising manhole (-)	8	2538.62	P/Feet	20309
8	Preparing sub-base by supplying and spreading well graded pit or bed run gravel having a liquid limit not greater than 25 and plasticity index not greater than 6 in proper camber and grade including watering rolling and compacting in layers, thickness of each compacted layer not exceeding 6" compacted upto 98-100% density as per modified AASHO density (rate i/c all cost of materials T&P and carriage upto 3 chains)	1103	3341.71	%Cft	36859
10	Manufacturing and supplying R.C.C. manhole cover cast in 1:2:4 concrete ratio 3 inch deep at center reinforced with 3/8" dia tor steel bars at 4" c/c welded to 1/8" thick 2.5 inch deep M.S plate i/c curing. Stacking and transportation within 10 mile A) 21" Dia	35	913.63	Each	31977
11	Manufacturing and supplying of R.C.C. ring slab of inside 36" dia outside 7.5 width and 6" thick i/c 3/8" dia tor steel bars two concentric rings with 3/8" dia 8 Nos.. cross linked bars welded and two sunk type hooks, casted in a 1:1:1/2:3 conc. With embedded 15 Kg C.I frame in perfect position i/c transportation charges for an average lead of 20 Km. Per trip from casting yard to town offices. (A minimum of 25 slabs per trip will be transported)	11	1906.60	Each	28599
12	Shifted to the site and fixing of 36" dia Ring Slab in perfect position on damaged manholes ice cutting of damaged portion of manhole in proper shape and laying cement mortar of 2" thickness & disposal of ebris. etc comp.	15	563.09	Each	8446
<b>Total Amount of Schedule Items</b>					<b>Rs. 9,04,043/-</b>

(PART-B: ITEM BASED ON OPEN RATE)

SR. #	Description of Item	Qty.	Rate	Unit	Amount
9	Cleaning of Nallah by manually labour i/c lift up to 5' and lead upto 1 chain.	75	Open Rate	Per Day	
<b>Total Amount of Open Rate Item Rs.</b>					

Nomenclature quantities and Rates have been checked by me

SUB-ENGINEER  
DMC (SOUTH)

ASSTT. EX. ENGINEER  
DMC (SOUTH)

EXECUTIVE ENGINEER  
DMC (SOUTH)

### QUOTED BID (SUMMARY)

I/We hereby quoted as follows.

1	PART-A (Item Based on S/R amounting Rs. 9,04,043/- _____ % Above / Below of the S/R .	Rs. _____
2	PART-B (Item Based on O/R)	Rs. _____
3	<b>GRAND TOTAL (A+B)</b>	Rs. _____

1. I/ We shall be abide all SPPRA Rules-2010 (Amended-2013)
2. I/We read the standard bidding Documents available in SPPRA website ([www.pprasindh.govt.pk](http://www.pprasindh.govt.pk)) and agreed to abide all of them and also provide all these documents with our signatures as & when directed.

Signature of the Contractor \_\_\_\_\_

Address: \_\_\_\_\_

\_\_\_\_\_

# SPPRA BIDDING DOCUMENT

## STANDARD FORM OF BIDDING DOUCMENT FOR PROCUREMENT OF WORKS

### WORK # 12

#### (SINGLE STAGE ONE ENVELOPE METHOD)

Name of Work: - Repair of patches on road near Sindh Muslim Law College,  
Saddar Division DMC South

Estimate Cost : Rs. 9,93,920/-  
Bid Security : 2% of Quoted Amount  
Tender Cost : Rs. 1,000/-

---

Tender issue M/s. \_\_\_\_\_

PAY ORDER OF TENDER COST

PAY ORDER OF BID SECURITY

P.O. No. \_\_\_\_\_ Date \_\_\_\_\_


P.O. No. \_\_\_\_\_ Date \_\_\_\_\_

Bank \_\_\_\_\_

Bank \_\_\_\_\_

Rs. \_\_\_\_\_


Rs. \_\_\_\_\_

  
Signature & Stamp  
of Issuing Authority

# BIDDING DATA

## Work N0:12

- a) Name of Procuring Agency: - District Municipal Corporation South Karachi
- b) Brief Description of Works: - Repair of patches on road near Sindh Muslim Law College, Saddar Division DMC South
- c) Estimated Cost: - Rs: 9,93,920/-
- d) Amount of Bid Security: - 2% of Quoted Amount
- f) Period of Bid Validity (days):- 90 Days
- g) Security Deposit :-  
(Including bid security):- 10% of total Cost
- h) Percentage, if any,  
to be deducted from bills: - 7.5 % Income Tax
- i) Deadline for Submission of Bids,  
along with time: - Dated: 13-04-2018 2.00 PM
- j) Venue, Time, and Date of Bid Opening: - Executive Engineer DMC (South) office situated at Hiralal Ganatra road near Mujahid Masjid, Karachi. at 2.30 P.M Dated:- 13-04-2018
- k) Time for Completion: - 90 Days
- l) Liquidity damages: - 0.05% of Estimated Cost or Bid cost per day of Delay

  
EXECUTIVE ENGINEER  
DMC (South)

CONTRACTOR'S SIGNATURE

M/s. \_\_\_\_\_

# DISTRICT MUNICIPAL CORPORATION SADDAR ZONE DMC (SOUTH) KARACHI

Name of Work: - Repair of patches on road near Sindh Muslim Law College, Saddar Division DMC South

Tender No. (12) / (2017-2018)

(ITEM BASED ON SCHEDULE RATE)

SR. #	Description of Item	Qty.	Rate	Unit	Amount
1	Earth work excavation of road side nails ic forming its banks all putting the same on embankment as directed cold breaking dressing etc. (V-III P-VI P-1/4)	2962	1437.00	% .0 Cft	4256
2	Cartage of 100 CFT / 5 tons of all material likes one aggregate, spawl, coal, lime, surkhi etc. B.G Rait fastenings points & crossing bridges girders. Pipes, sheets Raits M.S Bars etc. or 1000 Nos brinks 10' x 5' x 3' or 1000 manuds of fuel wood by trucks or any other means owned by the contractors (Lead up to 15 Miles etc)	2962	1065.04	% Cft	31547
3	P/L Aggregate base course CBR 80% as per (AASHTO) standard specification i/c compacting to the required density by approved mechanical means (Vibratory) roller road packer and smooth wheel roller etc) i/c watering with all lead and lift etc.	2987	5542.24	% Cft	165547
4	Applying priming coat or tak coat with approved binder at the required rate including cleaning the road surface thoroughly heating to the require departure and spraying the binder with pressure as directed etc complete.	18722	64.96	% Sft	12162
5	Providing 1" thick (consolidation) premix carpet in proper camber and grade including supplying 10 cft: bajri 4cft hill sand (of approved quality and grade) bitumen of 80/100 penetration including mixing in mechanical mixer in required proportion i/c heating materials and cleaning the road surface (Hill sand 2 Cft:s for dusting) (Rate includes all cost of materials T&P and carriage up to 3 chain).	18722	4168.40	% Sft	780408
<b>Total Amount of Schedule Items</b>					<b>Rs. 9,93,920/-</b>

Nomenclature quantities and Rates have been checked by me

SUB-ENGINEER  
DMC (SOUTH)

ASST. EX. ENGINEER  
DMC (SOUTH)

EXECUTIVE ENGINEER  
DMC (SOUTH)

I/We hereby quoted as follows.

Item Based on S/R amounting Rs.9,93,920 /- \_\_\_\_\_ % Above / Below of the S/R Rs. \_\_\_\_\_

In figure ( \_\_\_\_\_ )

4. I/ We shall be abide all SPPRA Rules-2010 (Amended-2013)
5. Rate must be quoted on total amount of Schedule rate either Above OR Below not accepted item wise.
6. I/We read the standard bidding documents / TORs available in SPPRA website ([www.pprasindh.govt.pk](http://www.pprasindh.govt.pk)) and agreed to abide all of them and also provide all these documents with our signatures as & when directed.

Signature of the Contractor \_\_\_\_\_

Address: \_\_\_\_\_

\_\_\_\_\_



# SPPRA BIDDING DOCUMENT

## STANDARD FORM OF BIDDING DOUCMENT FOR PROCUREMENT OF WORKS

### WORK # 13

#### (SINGLE STAGE ONE ENVELOPE METHOD)

Name of Work: Repair / Maintenance of Primary school No. 54,55 Sector D-2,  
Hijrat Colony , Saddar Division DMC South

Estimate Cost : Rs. 9,94,765/-  
Bid Security : 2% of Quoted Amount  
Tender Cost : Rs. 1,000/-

---

Tender issue M/s. \_\_\_\_\_


PAY ORDER OF TENDER COST

PAY ORDER OF BID SECURITY

P.O. No. \_\_\_\_\_ Date \_\_\_\_\_ P.O. No. \_\_\_\_\_ Date \_\_\_\_\_

Bank \_\_\_\_\_ Bank \_\_\_\_\_


Rs. \_\_\_\_\_ Rs. \_\_\_\_\_

  
Signature & Stamp  
of Issuing Authority

# BIDDING DATA

## Work N0:13

- a) Name of Procuring Agency: - District Municipal Corporation South Karachi
- b) Brief Description of Works: - Repair / Maintenance of Primary school No. 54,55 Sector D-2, Hijrat Colony , Saddar Division DMC South
- c) Estimated Cost: - Rs: 9,94,765/-
- d) Amount of Bid Security: - 2% of Quoted Amount
- f) Period of Bid Validity (days):- 90 Days
- g) Security Deposit :-  
(Including bid security):- 10% of total Cost
- h) Percentage, if any,  
to be deducted from bills: - 7.5 % Income Tax
- i) Deadline for Submission of Bids,  
along with time: - Dated: 13-04-2018 2.00 PM
- j) Venue, Time, and Date of Bid Opening: - Executive Engineer DMC (South) office situated at Hiralal Ganatra road near Mujahid Masjid, Karachi. at 2.30 P.M Dated:- 13-04-2018
- k) Time for Completion: - 90 Days
- l) Liquidity damages: - 0.05% of Estimated Cost or Bid cost per day of Delay

  
EXECUTIVE ENGINEER  
DMC (South)

CONTRACTOR'S SIGNATURE

M/s. \_\_\_\_\_

# DISTRICT MUNICIPAL CORPORATION SADDAR ZONE DMC (SOUTH) KARACHI

Name of Work: - Repair / Maintenance of Primary school No. 54,55 Sector D-2, Hijrat Colony , Saddar Division DMC South  
Tender No. (13) / (2017-2018)

(ITEM BASED ON SCHEDULE RATE)

SR. #	Description of Item	Qty.	Rate	Unit	Amount
1	Earth work excavation of road side nails i/c forming its banks all putting the same on embankment as directed cold breaking dressing etc. (V-III P-VI P-1/4)	490	1437.00	% .0 Cft	704
2	Dismantling cements concrete plain 1:2:4. (viii-P-iii-P-P-10/19-C)	201	3327.50	% Cft	6688
3	Cartage of 100 CFT / 5 tons of all material like one aggregate, spawl, coal, lime, surkhi etc. B.G Rait fastenings points & crossing bridges girders. Pipes, sheets Raits M.S Bars etc. or 1000 Nos brinks 10' x 5' x 3' or 1000 manuds of fuel wood by trucks or any other means owned by the contractors (Lead up to 15 Miles etc)	691	1065.04	% Cft	7359
4	Cement concrete plain including placing Compacting finishing curing complete including screening of washing of stone aggregate without shuttling ratio. 1:4:8 (V-III-P-III-P-16-5-F)	271	11288.75	% Cft	30593
5	Providing and fixing and paving block flooring having size 197x97x60 mm (Envicrete) of city / Quadra cobble shape with pigmented having strength B/W 5000 to 8500 PSI i/c filling the joint etc.(V-III-P-III-P-49/71)	2268	199.77	P/Sft	453078
6	Providing and laying 2" thick topping cement concert i/c surface finishing and dividing in to panels. 2" thick (V-III-P-III-P-42/16-C)	474	3275.50	% Sft	15526
7	P/L glazed tile dado over 1:2 camant sand mortar ¾" thick etc comp.	480	28299.30	% Sft	135837
8	P/F in position wooden door of ½" thick teak ply both side i/c chowket and fixing hold fast, tower bolt etc. complete.	131	1077.06	P/Sft	141095
9	P/F iron steel grated door with 1/16" thick sheet ICE angle iron fram 2"X2" etc	84	726.72	P/Sft	61044
10	Scraping Ordinary Distemper, Oil Bound Distemper or paint on walls. (S.I.No.54(a) P-13)	6889	226.88	% Sft	15630
11	Oil bound distemper two coats of approved make & shade etc.	4788	1043.90	% Sft	49982
12	Preparing the surface and painting with enamel paint of approved make i/c rubbing the surface with sand paper, filling the voids with chalk / plaster of paris and then painting etc. complete Two Coats Old surface (V-III-P-III-P-73/31-A+B)	2617	1014.14	% Sft	26540
13	Preparing Surface & painting of Guard bar & gates etc comp.	740	896.39	% Sft	6633
14	P/F iron grill of flate iron etc.	72	180.50	P/Sft	12996
15	Providing & fixing Approved Quality Mortice Lock	7	1786.13	Each	12503
16	P/F lavatory basin of earthen were i/c all necessary fitting & complete with pedestal	1	5192.17	Each	5192
17	P/F W.C Pan of white glazed earthen ware i/c complete with fitting & flushing cistrun etc.	1	5044.60	Each	5045
18	Glazing with pains 160z to 180z etc complete.	72	115.55	P/Sft	8320
<b>Total Amount of Schedule Items</b>					<b>Rs. 9,94,765/-</b>

Nomenclature quantities and Rates have been checked by me

SUB-ENGINEER  
DMC (SOUTH)

ASST. EX. ENGINEER  
DMC (SOUTH)

EXECUTIVE ENGINEER  
DMC (SOUTH)

I/We hereby quoted as follows.

Item Based on S/R amounting Rs.9,94,765 /- \_\_\_\_\_ % Above / Below of the S/R Rs. \_\_\_\_\_

In figure ( \_\_\_\_\_ )

1. I/ We shall be abide all SPPRA Rules-2010 (Amended-2013)
2. Rate must be quoted on total amount of Schedule rate either Above OR Below not accepted item wise.
3. I/We read the standard bidding documents / TORs available in SPPRA website ([www.pprasindh.govt.pk](http://www.pprasindh.govt.pk)) and agreed to abide all of them and also provide all these documents with our signatures as & when directed.

Signature of the Contractor \_\_\_\_\_

Address: \_\_\_\_\_

# SPPRA BIDDING DOCUMENT

## STANDARD FORM OF BIDDING DOUCMENT FOR PROCUREMENT OF WORKS

### WORK # 14

#### (SINGLE STAGE ONE ENVELOPE METHOD)

Name of Work: - Renovation of Boys, Girls Primary & Secondary School No. 28  
Police Head Quarter Garden, Saddar Division DMC South

Estimate Cost : Rs. 9,72,849/- + Open Rate  
Bid Security : 2% of Quoted Amount  
Tender Cost : Rs. 1,000/-

---

Tender issue M/s. \_\_\_\_\_

#### PAY ORDER OF TENDER COST

#### PAY ORDER OF BID SECURITY

P.O. No. \_\_\_\_\_ Date \_\_\_\_\_


P.O. No. \_\_\_\_\_ Date \_\_\_\_\_

Bank \_\_\_\_\_

Bank \_\_\_\_\_

Rs. \_\_\_\_\_

Rs. \_\_\_\_\_

  
Signature & Stamp  
of Issuing Authority

# BIDDING DATA

## Work N0:14

- a) Name of Procuring Agency: - District Municipal Corporation South Karachi
- b) Brief Description of Works: - Renovation of Boys, Girls Primary & Secondary School No. 28 Police Head Quarter Garden, Saddar Division DMC South
- c) Estimated Cost: - Rs: 9,72,849/- + Open Rate
- d) Amount of Bid Security: - 2% of Quoted Amount
- f) Period of Bid Validity (days):- 90 Days
- g) Security Deposit :-  
(Including bid security):- 10% of total Cost
- h) Percentage, if any,  
to be deducted from bills: - 7.5 % Income Tax
- i) Deadline for Submission of Bids,  
along with time: - Dated: 13-04-2018 2.00 PM
- j) Venue, Time, and Date of Bid Opening: - Executive Engineer DMC (South) office situated at Hiralal Ganatra road near Mujahid Masjid, Karachi. at 2.30 P.M Dated:- 13-04-2018
- k) Time for Completion: - 90 Days
- l) Liquidity damages: - 0.05% of Estimated Cost or Bid cost per day of Delay

  
EXECUTIVE ENGINEER  
DMC (South)

CONTRACTOR'S SIGNATURE

M/s. \_\_\_\_\_

# DISTRICT MUNICIPAL CORPORATION SADDAR ZONE DMC (SOUTH) KARACHI

Name of Work: - Renovation of Boys, Girls Primary & Secondary School No. 28 Police Head Quarter Garden, Saddar  
Division DMC South

Tender No. (14) / (2017-2018)

(ITEM BASED ON SCHEDULE RATE)

SR. #	Description of Item	Qty.	Rate	Unit	Amount
1	3/4" thick cement plaster 1:6 cement sand mortar i/c finishing and curing etc. complete	3956	3015.76	% Cft	119303
2	Scraping Ordinary Distemper, Oil Bound Distemper or paint on walls. (S.I.No.54(a) P-13)	17941	226.88	% Sft	40705
3	Oil bound distemper two coats of approved make & shade etc.	16711	1043.90	% Sft	174446
4	Preparing the surface and painting with enamel paint of approved make i/c rubbing the surface with sand paper, filling the voids with chalk / plaster of paris and then painting etc. complete Two Coats Old surface (V-III-P-III-P-73/31-A+B)	6591	1014.14	% Sft	66842
5	Preparing Surface & painting of doors & windows Of any Type Two coats	1540	1489.68	% Sft	22941
6	Preparing Surface & painting of Guard bar & gates etc comp.	1972	896.39	% Sft	17677
7	Preparing the surface weather coat paint (viii-pii c-9-p56/38-A-B)	9341	1948.10	% Sft	181972
8	P/F W.C Pan of white glazed earthen ware i/c complete with fitting & flushing cistern etc.	6	5044.60	Each	30268
9	P/F lavatory basin of earthen ware i/c all necessary fitting & complete with pedestal	4	5192.17	Each	20769
10	Providing & fixing Approved Quality Mortice Lock	10	1786.13	Each	17861
11	P/F UPVC pipe i/c cutting & fitting etc complete 1/2" dia pipe	300	12.00	P/Rft	3600
	3/4" dia pipe	300	19.00	P/Rft	5700
12	S/F in position Bib Cock of superior quality with C.P head 1/2" dia.	10	337.92	Each	3379
13	P/F expanded metal 1/2"x3/4" mesh 16 gauge fixed to chowket without deodor patti	537	60.43	P/Sft	32451
14	Glazing with pains 160z to 180z etc complete.	514	115.55	P/Sft	59393
16	P/L glazed tile dado over 1:2 cement sand mortar 3/4" thick etc comp.	548	28299.30	% Sft	155080
17	P/F beveled edge mirror of 5 mm thick Belgium glass complete with 1/8" thick hard board & C.P screws etc. complete.	4	1711.60	Each	6846
18	P/F Sawan nick tap.	4	877.80	Each	3511
19	P/F Sink S.S.	2	5052.30	Each	10105
<b>Total Amount of Schedule Items</b>					<b>Rs.9,72,849 /-</b>

(PART-B: ITEM BASED ON OPEN RATE)

SR. #	Description of Item	Qty.	Rate	Unit	Amount
15	P/F piston pump with motor H.P i/c all necessary fitting etc complete.	01	Open Rate	P/job	
<b>Total Amount of Open Rate Item Rs.</b>					

Nomenclature quantities and Rates have been checked by me

SUB-ENGINEER  
DMC (SOUTH)

ASST. EX. ENGINEER  
DMC (SOUTH)

EXECUTIVE ENGINEER  
DMC (SOUTH)

### QUOTED BID (SUMMARY)

I/We hereby quoted as follows.

1	PART-A (Item Based on S/R amounting Rs. 9,72,849/- _____ % Above / Below of the S/R .	Rs. _____
2	PART-B (Item Based on O/R)	Rs. _____
3	<b>GRAND TOTAL (A+B)</b>	Rs. _____

1. I/ We shall be abide all SPPRA Rules-2010 (Amended-2013)
2. Rate must be quoted on total amount of Schedule rate either Above OR Below not accepted item wise.
3. I/We read the standard bidding documents / TORs available in SPPRA website ([www.pprasinidh.govt.pk](http://www.pprasinidh.govt.pk)) and agreed to abide all of them and also provide all these documents with our signatures as & when directed.

Signature of the Contractor \_\_\_\_\_

Address: \_\_\_\_\_

\_\_\_\_\_

# SPPRA BIDDING DOCUMENT

## STANDARD FORM OF BIDDING DOUCMENT FOR PROCUREMENT OF WORKS

### WORK # 15

#### (SINGLE STAGE ONE ENVELOPE METHOD)

Name of Work: - Repair / maintenance of DMC South School No.29 at Jehangir  
Patangi road, Saddar Division DMC South

Estimate Cost : Rs. 9,54,846/- + Open Rate  
Bid Security : 2% of Quoted Amount  
Tender Cost : Rs. 1,000/-

---

Tender issue M/s. \_\_\_\_\_

#### PAY ORDER OF TENDER COST

P.O. No. \_\_\_\_\_ Date \_\_\_\_\_

Bank \_\_\_\_\_


Rs. \_\_\_\_\_

#### PAY ORDER OF BID SECURITY

P.O. No. \_\_\_\_\_ Date \_\_\_\_\_

Bank \_\_\_\_\_

Rs. \_\_\_\_\_


  
Signature & Stamp  
of Issuing Authority



# BIDDING DATA

## Work N0:15

- a) Name of Procuring Agency: - District Municipal Corporation South Karachi
- b) Brief Description of Works: - Repair / maintenance of DMC South School No.29 at Jehangir Patangi road, Saddar Division DMC South
- c) Estimated Cost: - Rs: 9,54,846/- + Open Rate
- d) Amount of Bid Security: - 2% of Quoted Amount
- f) Period of Bid Validity (days):- 90 Days
- g) Security Deposit :-  
(Including bid security):- 10% of total Cost
- h) Percentage, if any,  
to be deducted from bills: - 7.5 % Income Tax
- i) Deadline for Submission of Bids,  
along with time: - Dated: 13-04-2018 2.00 PM
- j) Venue, Time, and Date of Bid Opening: - Executive Engineer DMC (South) office situated at Hiralal Ganatra road near Mujahid Masjid, Karachi. at 2.30 P.M Dated:- 13-04-2018
- k) Time for Completion: - 90 Days
- l) Liquidity damages: - 0.05% of Estimated Cost or Bid cost per day of Delay

  
EXECUTIVE ENGINEER  
DMC (South)

CONTRACTOR'S SIGNATURE

M/s. \_\_\_\_\_

# DISTRICT MUNICIPAL CORPORATION SADDAR ZONE DMC (SOUTH) KARACHI

Name of Work: - Repair / maintenance of DMC South School No.29 at Jehangir Patangi road, Saddar Division DMC South

Tender No. (15) / (2017-2018)

## (ITEM BASED ON SCHEDULE RATE)

SR. #	Description of Item	Qty.	Rate	Unit	Amount
1	P/L 1:3:6 cement concrete solid block masonry work 6" & below thickness height upto 2 <sup>nd</sup> floor.	591	16531.04	% Cft	97698
2	P/F in opposition door windows & ventilator of Ist class deader wood frame & 1-1/2" thick teak wood ply shutter of 2 <sup>nd</sup> class deodar wood i/c hold past hinges & tower bolts etc. complete	108	1077.06	P/Sft	116322
3	P/F in position of wooden door 1 1/2" thick of teak ply in both side without chowket etc complete.	319	706.23	P/Sft	225287
4	P/F iron steel grated door with 1/16" thick sheet ICE angle iron fram 2"X2" etc	58	726.72	P/Sft	42150
5	P/F in position iron steel grill 3/4" x 1/4" size flat iron of approved design in/c: painting three coats etc complete (weight not less than 3-7 lbs / sq.ft of finished grill)	104	180.50	P/Sft	18772
7	Cement concrete plain including placing Compacting finishing curing complete including screening of washing of stone aggregate without shuttling ratio. 1:4:8 (V-III-P-III-P-16-5-F)	633	11288.75	% Cft	71458
8	Providing and fixing and paving block flooring having size 197x97x60 mm (Envicrete) of city / Quadra cobble shape with pigmented having strength B/W 5000 to 8500 PSI i/c filling the joint etc.(V-III-P-III-P-49/71)	1918	199.77	P/Sft	383159
<b>Total Amount of Schedule Items</b>					<b>Rs. 9,54,846/-</b>

## (PART-B: ITEM BASED ON OPEN RATE)

SR. #	Description of Item	Qty.	Rate	Unit	Amount
6	Providing & fixing C.C Precast fancy pia height upto 3' as per approved design etc complete.	25	Open Rate	Each	
<b>Total Amount of Open Rate Item Rs.</b>					

Nomenclature quantities and Rates have been checked by me

SUB-ENGINEER  
DMC (SOUTH)

ASSTT. EX. ENGINEER  
DMC (SOUTH)

EXECUTIVE ENGINEER  
DMC (SOUTH)

## QUOTED BID (SUMMARY)

I/We hereby quoted as follows.1

1	PART-A (Item Based on S/R amounting Rs. 9,54,846/- _____ % Above / Below of the S/R .	Rs.
2	PART-B (Item Based on O/R)	Rs.
3	<b>GRAND TOTAL (A+B)</b>	Rs.

- I/ We shall be abide all SPPRA Rules-2010 (Amended-2013)
- Rate must be quoted on total amount of Schedule rate either Above OR Below not accepted item wise.
- I/We read the standard bidding documents / TORs available in SPPRA website ([www.pprasinidh.govt.pk](http://www.pprasinidh.govt.pk)) and agreed to abide all of them and also provide all these documents with our signatures as & when directed.

Signature of the Contractor \_\_\_\_\_

Address: \_\_\_\_\_

# SPPRA BIDDING DOCUMENT

## STANDARD FORM OF BIDDING DOUCMENT FOR PROCUREMENT OF WORKS

### WORK # 16

#### (SINGLE STAGE ONE ENVELOPE METHOD)

Name of Work: - Cleaning & sewerage pipe line by winching machine and disposal of rain storm water drain Jurisdiction of UC-29 Saddar Division DMC South

Estimate Cost : Rs. 9,95,933/-  
Bid Security : 2% of Quoted Amount  
Tender Cost : Rs. 1,000/-

Tender issue M/s. \_\_\_\_\_

#### PAY ORDER OF TENDER COST

P.O. No. \_\_\_\_\_ Date \_\_\_\_\_

Bank \_\_\_\_\_


Rs. \_\_\_\_\_

#### PAY ORDER OF BID SECURITY

P.O. No. \_\_\_\_\_ Date \_\_\_\_\_

Bank \_\_\_\_\_

Rs. \_\_\_\_\_




Signature & Stamp  
of Issuing Authority

# BIDDING DATA

## Work N0: 16

- a) Name of Procuring Agency: - District Municipal Corporation South Karachi
- b) Brief Description of Works: - Cleaning & sewerage pipe line by winching machine and disposal of rain storm water drain Jurisdiction of UC-29 Saddar Division DMC South
- c) Estimated Cost: - Rs: 9,95,933/-
- d) Amount of Bid Security: - 2% of Quoted Amount
- f) Period of Bid Validity (days):- 90 Days
- g) Security Deposit :-  
(Including bid security):- 10% of total Cost
- h) Percentage, if any,  
to be deducted from bills: - 7.5 % Income Tax
- i) Deadline for Submission of Bids,  
along with time: - Dated: 13-04-2018 2.00 PM
- j) Venue, Time, and Date of Bid Opening: - Executive Engineer DMC (South) office situated at Hiralal Ganatra road near Mujahid Masjid, Karachi. at 2.30 P.M Dated:- 13-04-2018
- k) Time for Completion: - 90 Days
- l) Liquidity damages: - 0.05% of Estimated Cost or Bid cost per day of Delay

  
EXECUTIVE ENGINEER  
DMC (South)

CONTRACTOR'S SIGNATURE

M/s. \_\_\_\_\_

# DISTRICT MUNICIPAL CORPORATION SADDAR ZONE DMC (SOUTH) KARACHI

Name of Work: - Cleaning & sewerage pipe line by winching machine and disposal of rain storm water drain Jurisdiction of  
UC-29 Saddar Division DMC South

Tender No. (16) / (2017-2018)  
 (ITEM BASED ON SCHEDULE RATE)

SR. #	Description of Item	Qty.	Rate	Unit	Amount
1	Dismantling of existing asphalt concrete road ice base and sub base disposable of material.	1900	773.86	% Cft	14703
2	Excavation for pipe line in trenches and pits in all kind of soil of murum i/c trimming and dressing side to true alignment and shape traveling of beds of trenches to correct level and grade cutting joint holes and disposal of surplus earth within a one chain as directed by Engineer Incharge. Providing fence guard light flags and temporary crossing for non vehicular traffic wherever required left upto 05' and lead up to 01 chain. (v-iii part-iiP.No. 13 S.No. 51)Lift 0'-5'	5700	4650.00	%Cft	26505
3	P/L PVC Pipe class -B i/c cutting and fixing etc complete.	6" dia 500 8" dia 500 10" dia 200	262.00 402.00 721.00	P/Rft	131000 201000 144200
4	Refilling the excavated stuff in trenches 6" thick layer i/c watering ramming to full compaction etc complete. (v-iv part-vi P.No. 77 S.No. 24)	4275	2760.00	%Cft	11799
5	Carriage of 100 Cft/ 5 Tons of all material like stone, aggregate, spawl, coal lime, surkhi etc B.G Rail fastening points and crossing bridge,girders,pipes,sheets RailM.S Bars etc or 1000 nos: bricks 10" X 5" X 3" or 1000 Nos: tiles 12" X 6" X 2" or 150 Cft of timber or 100 Maunds of fuel wood by trucks or any other means owned by contractors. 15 Miles.	2375	1065.00	%Cft	25295
6	Providing manhole 4 dia (in side) and 5 ft clear depth cost in situ with 1:2:4 c.c. (add 50% extra crushed) in benching 1/2" thick cement plastering with 1:3 cement motor on all inside wall surface channel and benching i/c making required NOS of main and branch channels 3/4 dia M.s footrest @ 12" dia C/C i/c cost of excavation in.all kinds of soil backfilling and disposal of exerted stuff etc. complete as per design of the In-charge. ( R/A on Sch:2012)	20	14529.29	Each	290586
7	Add / deduct per ft depth / raising manhole (-)	40	(-2538.62)	P/Feet	101545
8	Sand haaro or any other source sand of the same modules of the fitness (Hill Sand).	1743	2425.00	% Cft	42268
9	Cleaning inside sewerage lines completely restoring original silt free space. Dia meter of pipe lines by labour and equipment (mechanically electrically driven) ice accessories like pulley's steel rope, bucket. And draggers sizing from 6" to 18" dia their to and fro pulling action (No of passes (first phase in entire lenth from dawn stream to up stream) bringing down pick hours sewerage to flow pipe line ( as free flow) and I entire length ensuring no silt is observed in buckets (6" to 18") except only sewage water and finally passing a steel ball of dia 12" lesser then the diameter of the pipe but not exceeding 48" dia bal even for large dia pipe to ensure perfect cleaning. The job includes all the hire / cost of equipment and accessories of above winching machine / devices along with engines with winching drum set having rope pulley's mount over it steel bukets for 6" to 18" dia hooks and other protection likes safety barriers, traffic cones ensuring no other public property lives and removal of site etc . complete as per full satisfaction of site Engineer. 18" dia	1500	128.80	P/Rft	193200
10	Manufacturing and supplying of R.C.C. ring slab of inside 36" dia outside 7.5 width and 6" thick i/c 3/8" dia tor steel bars two concentric rings with 3/8" dia 8 Nos.. cross linked bars welded and two sunk type hooks, casted in a 1:1:1/2:3 conc. With embedded 15 Kg C.I frame in perfect position i/c transportation charges for an average lead of 20 Km. Per trip from casting yard to town offices.(A minimum of 25 slabs per trip will be transported)	6	1906.60	Each	11440
11	Manufacturing and supplying R.C.C. manhole cover cast in 1:2:4 concrete ratio 3 inch deep at center reinforced with 3/8" dia tor steel bars at 4" c/c welded to 1/8" thick 2.5 inch deep M.S plate i/c curing. Stacking and transportation within 10 miles 21" Dia	6	913.63	Each	5482
<b>Total Amount of Schedule Items</b>				<b>Rs. 9,95,933/-</b>	

Nomenclature quantities and  
 Rates have been checked by me

SUB-ENGINEER  
 DMC (SOUTH)

ASST. EX. ENGINEER  
 DMC (SOUTH)

EXECUTIVE ENGINEER  
 DMC (SOUTH)

I/We hereby quoted as follows.

Item Based on S/R amounting Rs.9,95,933 /- \_\_\_\_\_ % Above / Below of the S/R Rs. \_\_\_\_\_

In figure ( \_\_\_\_\_ )

1. I/ We shall be abide all SPPRA Rules-2010 (Amended-2013)
2. Rate must be quoted on total amount of Schedule rate either Above OR Below not accepted item wise.
3. I/We read the standard bidding documents / TORs available in SPPRA website ([www.pprasinhd.govt.pk](http://www.pprasinhd.govt.pk)) and agreed to abide all of them and also provide all these documents with our signatures as & when directed.

Signature of the Contractor \_\_\_\_\_

Address: \_\_\_\_\_

\_\_\_\_\_

# SPPRA BIDDING DOCUMENT

## STANDARD FORM OF BIDDING DOUCMENT FOR PROCUREMENT OF WORKS

### WORK # 17

#### (SINGLE STAGE ONE ENVELOPE METHOD)

Name of Work: - Cleaning / desilting of nallah & storm water drain at KMC head office, Tahir Saifuddin road, Nanakwara, Edhi centre Kharadar & different point of nallah, Saddar Zone DMC South

Estimate Cost : Rs. 2,77,935/- + Open Rate  
Bid Security : 2% of Quoted Amount  
Tender Cost : Rs. 1,000/-

Tender issue M/s. \_\_\_\_\_

#### PAY ORDER OF TENDER COST

#### PAY ORDER OF BID SECURITY

P.O. No. \_\_\_\_\_ Date \_\_\_\_\_

P.O. No. \_\_\_\_\_ Date \_\_\_\_\_

Bank \_\_\_\_\_

Bank \_\_\_\_\_

Rs. \_\_\_\_\_

Rs. \_\_\_\_\_



Signature & Stamp  
of Issuing Authority

# BIDDING DATA

## Work N0: 17

- a) Name of Procuring Agency: - District Municipal Corporation South Karachi
- b) Brief Description of Works: - Cleaning / desilting of nallah & storm water drain at KMC head office, Tahir Saifuddin road, Nanakwara, Edhi centre Kharadar & different point of nallah, Saddar Zone DMC South
- c) Estimated Cost: - Rs: 2,77,935/- + Open Rate
- d) Amount of Bid Security: - 2% of Quoted Amount
- f) Period of Bid Validity (days):- 90 Days
- g) Security Deposit :-  
(Including bid security):- 10% of total Cost
- h) Percentage, if any,  
to be deducted from bills: - 7.5 % Income Tax
- i) Deadline for Submission of Bids,  
along with time: - Dated: 13-04-2018 2.00 PM
- j) Venue, Time, and Date of Bid Opening: - Executive Engineer DMC (South) office situated at Hiralal Ganatra road near Mujahid Masjid, Karachi. at 2.30 P.M Dated:- 13-04-2018
- k) Time for Completion: - 90 Days
- l) Liquidity damages: - 0.05% of Estimated Cost or Bid cost per day of Delay

  
EXECUTIVE ENGINEER  
DMC (South)

CONTRACTOR'S SIGNATURE

M/s. \_\_\_\_\_



# DISTRICT MUNICIPAL CORPORATION SADDAR ZONE DMC (SOUTH) KARACHI

Name of Work: - Cleaning / desilting of nallah & storm water drain at KMC head office, Tahir Saifuddin road, Nanakwara, Edhi centre Kharadar & different point of nallah, Saddar Zone DMC South.

Tender No. (17) / (2017-2018)

## (ITEM BASED ON SCHEDULE RATE)

SR. #	Description of Item	Qty.	Rate	Unit	Amount
5	Cleaning inside sewerage lines completely restoring original silt free space. Dia meter of pipe lines by labour and equipment (mechanically electrically driven) ice accessories like pulley's steel rope, bucket. And draggers sizing from 6" to 18" dia their to and fro pulling action (No of passes (first phase in entire lenth from dawn stream to up stream) bringing dawn pick hours sewerage to flow pipe line ( as free flow) and I entire length ensuring no silt is observed in buckets (6" to 18") except only sewage water and finally passing a steel ball of dia 12" lesser then the diameter of the pipe but not exceeding 48" dia bal even for large dia pipe to ensure perfect cleaning. The job includes all the hire / cost of equipment and accessories of above winching machine / devices along with engines with winching drum set having rope pulley's mount over it steel bukets for 6" to 18" dia hooks and other protection likes safety barriers, traffic cones ensuring no other puplic property lives and removal of site etc . complete as per full satisfaction of site Engineer.				
	12" dia	755	80.50	P/Rft	60778
	15" dia	600	96.60	P/Rft	57960
	18" dia	586	128.80	P/Rft	75477
	24" dia	400	209.30	P/Rft	83720
<b>Total Amount of Schedule Items</b>					<b>Rs. 2,77,935/-</b>

## (PART-B: ITEM BASED ON OPEN RATE)

SR. #	Description of Item	Qty.	Rate	Unit	Amount
1	Hiring of labour for cleaning of strom water etc complete		Open Rate	Each	
		180			
2	Hiring of excavator with operate helper & fuel etc comp.		Open Rate	P/Hour	
		120			
3	Hiring of Dumper for removal of garbage / debris i/c operator with helper i/c fuel etc complete.		Open Rate	Per Hours	
		60			
4	Hiring of loader with feul operator and helper for loading et comp.		Open Rate	Per Hours	
		40			
<b>Total Amount of Open Rate Item Rs.</b>					

Nomenclature quantities and Rates have been checked by me

SUB-ENGINEER  
DMC (SOUTH)

ASSTT. EX. ENGINEER  
DMC (SOUTH)

EXECUTIVE ENGINEER  
DMC (SOUTH)

**QUOTED BID (SUMMARY)**

I/We hereby quoted as follows.1

1	PART-A (Item Based on S/R amounting Rs. 2,77,935/- _____ % Above / Below of the S/R .	Rs. _____
2	PART-B (Item Based on O/R)	Rs. _____
3	<b>GRAND TOTAL (A+B)</b>	Rs. _____

In figure ( \_\_\_\_\_ )

1. I/ We shall be abide all SPPRA Rules-2010 (Amended-2013)
2. Rate must be quoted on total amount of Schedule rate either Above OR Below not accepted item wise.
3. I/We read the standard bidding documents / TORs available in SPPRA website ([www.pprasingh.govt.pk](http://www.pprasingh.govt.pk)) and agreed to abide all of them and also provide all these documents with our signatures as & when directed.

Signature of the Contractor \_\_\_\_\_

Address: \_\_\_\_\_

\_\_\_\_\_

# SPPRA BIDDING DOCUMENT

## STANDARD FORM OF BIDDING DOUCMENT FOR PROCUREMENT OF WORKS

### WORK # 18

#### (SINGLE STAGE ONE ENVELOPE METHOD)

Name of Work: - Cleaning / desilting of nallah & storm water drain at Police head quarter, Light house, M.A Jinnah road & different points of nallah, Saddar Zone DMC South

Estimate Cost : Rs. 2,53,978/- + Open Rate  
Bid Security : 2% of Quoted Amount  
Tender Cost : Rs. 1,000/-

Tender issue M/s. \_\_\_\_\_

#### PAY ORDER OF TENDER COST

#### PAY ORDER OF BID SECURITY

P.O. No. \_\_\_\_\_ Date \_\_\_\_\_


P.O. No. \_\_\_\_\_ Date \_\_\_\_\_

Bank \_\_\_\_\_

Bank \_\_\_\_\_

Rs. \_\_\_\_\_


Rs. \_\_\_\_\_

  
Signature & Stamp  
of Issuing Authority

# BIDDING DATA

## Work N0:18

- a) Name of Procuring Agency: - District Municipal Corporation South Karachi
- b) Brief Description of Works: - Cleaning / desilting of nallah & storm water drain at Police head quarter, Light house, M.A Jinnah road & different points of nallah, Saddar Zone DMC South
- c) Estimated Cost:- Rs: 2,53,978/- + Open Rate
- d) Amount of Bid Security: - 2% of Quoted Amount
- f) Period of Bid Validity (days):- 90 Days
- g) Security Deposit :-  
(Including bid security):- 10% of total Cost
- h) Percentage, if any,  
to be deducted from bills: - 7.5 % Income Tax
- i) Deadline for Submission of Bids,  
along with time: - Dated: 13-04-2018 2.00 PM
- j) Venue, Time, and Date of Bid Opening: - Executive Engineer DMC (South) office situated at Hiralal Ganatra road near Mujahid Masjid, Karachi. at 2.30 P.M Dated:- 13-04-2018
- k) Time for Completion: - 90 Days
- l) Liquidity damages: - 0.05% of Estimated Cost or Bid cost per day of Delay

  
EXECUTIVE ENGINEER  
DMC (South)

CONTRACTOR'S SIGNATURE

M/s. \_\_\_\_\_

# DISTRICT MUNICIPAL CORPORATION SADDAR ZONEDMC (SOUTH) KARACHI

Name of Work: - Cleaning / desilting of nallah & storm water drain at Police head quarter, Light house, M.A Jinnah road & different points of nallah, Saddar Zone DMC South.

Tender No. (18) / (2017-2018)

(ITEM BASED ON SCHEDULE RATE)

SR. #	Description of Item	Qty.	Rate	Unit	Amount
5	Cleaning inside sewerage lines completely restoring original silt free space. Dia meter of pipe lines by labour and equipment (mechanically electrically driven) ice accessories like pulley's steel rope, bucket. And draggers sizizing from 6" to 18" dia their to and fro pulling action (No of passes (first phase in entire lenth from dawn stream to up stream) bringing dawn pick hours sewerage to flow pipe line ( as free flow) and I entire length ensuring no silt is observed in buckets (6" to 18") except only sewage water and finally passing a steel ball of dia 12" lesser then the diameter of the pipe but not exceeding 48" dia bal even for large dia pipe to ensure perfect cleaning. The job includes all the hire / cost of equipment and accessories of above winching machine / devices along with engienes with winching drum set having rope pulley's mount over it steel bukets for 6" to 18" dia hooks and other protection likes safety barriers, traffic cones ensuring no other puplic property lives and removal of site etc . complete as per full satisfaction of site Engineer.				
	12" dia	755	80.50	P/Rft	60778
	15" dia	600	96.60	P/Rft	57960
	18" dia	400	128.80	P/Rft	51520
	24" dia	400	209.30	P/Rft	83720
<b>Total Amount of Schedule Items</b>					<b>Rs. 2,53,978/-</b>

(PART-B: ITEM BASED ON OPEN RATE)

SR. #	Description of Item	Qty.	Rate	Unit	Amount
1	Hiring of excavator with operate helper & fuel etc comp.	120	Open Rate	Per Hours	
2	Hiring of Dumper for removal of garbage / debris i/c operator with helper i/c fuel etc complete.	60	Open Rate	Per Hours	
3	Hiring of loader with feul operator and helper for loading et comp.	40	Open Rate	Per Hours	
4	Hiring of labour for cleaning of strom water etc complete	200	Open Rate	Each	
<b>Total Amount of Open Rate Item Rs.</b>					

Nomenclature quantities and Rates have been checked by me

SUB-ENGINEER  
DMC (SOUTH)

ASSTT. EX. ENGINEER  
DMC (SOUTH)

EXECUTIVE ENGINEER  
DMC (SOUTH)

**QUOTED BID (SUMMARY)**

I/We hereby quoted as follows.1

1	PART-A (Item Based on S/R amounting Rs. 2,53,978/- _____ % Above / Below of the S/R .	Rs. _____
2	PART-B (Item Based on O/R)	Rs. _____
3	<b>GRAND TOTAL (A+B)</b>	Rs. _____

In figure ( \_\_\_\_\_ )

1. I/ We shall be abide all SPPRA Rules-2010 (Amended-2013)
2. Rate must be quoted on total amount of Schedule rate either Above OR Below not accepted item wise. ,
3. I/We read the standard bidding documents / TORs available in SPPRA website ([www.pprasinhd.govt.pk](http://www.pprasinhd.govt.pk)) and agreed to abide all of them and also provide all these documents with our signatures as & when directed.

Signature of the Contractor \_\_\_\_\_

Address: \_\_\_\_\_

\_\_\_\_\_

# SPPRA BIDDING DOCUMENT

## STANDARD FORM OF BIDDING DOUCMENT FOR PROCUREMENT OF WORKS

### WORK # 19

#### (SINGLE STAGE ONE ENVELOPE METHOD)

Name of Work: - Providing and fixing speed breaker and winching sewer line at  
Shahwalliullah road and surrounding area Lyari Zone DMC  
South

Estimate Cost : Rs. 4,37,920/- + Open Rate  
Bid Security : 2% of Quoted Amount  
Tender Cost : Rs. 1,000/-

---

Tender issue M/s, \_\_\_\_\_

#### PAY ORDER OF TENDER COST

#### PAY ORDER OF BID SECURITY

P.O. No. \_\_\_\_\_ Date \_\_\_\_\_


P.O. No. \_\_\_\_\_ Date \_\_\_\_\_

Bank \_\_\_\_\_

Bank \_\_\_\_\_

Rs. \_\_\_\_\_


Rs. \_\_\_\_\_

  
Signature & Stamp  
of Issuing Authority

# BIDDING DATA

## Work N0: 19

- a) Name of Procuring Agency: - District Municipal Corporation South Karachi
- b) Brief Description of Works: - Providing and fixing speed breaker and winching sewer line at Shah walliullah road and surrounding area Lyari Zone DMC South
- c) Estimated Cost:- Rs: 4,37,920/- + Open Rate
- d) Amount of Bid Security: - 2% of Quoted Amount
- f) Period of Bid Validity (days):- 90 Days
- g) Security Deposit :-  
(Including bid security):- 10% of total Cost
- h) Percentage, if any,  
to be deducted from bills: - 7.5 % Income Tax
- i) Deadline for Submission of Bids,  
along with time: - Dated: 13-04-2018 2.00 PM
- j) Venue, Time, and Date of Bid Opening: - Executive Engineer DMC (South) office situated at Hiralal Ganatra road near Mujahid Masjid, Karachi. at 2.30 P.M Dated:- 13-04-2018
- k) Time for Completion: - 90 Days
- l) Liquidity damages: - 0.05% of Estimated Cost or Bid cost per day of Delay

  
EXECUTIVE ENGINEER  
DMC (South)

CONTRACTOR'S SIGNATURE

M/s. \_\_\_\_\_



# DISTRICT MUNICIPAL CORPORATION SADDAR ZONE DMC (SOUTH) KARACHI

Name of Work: - Providing and fixing speed breaker and winching sewerage line at Shahwalliullah road and surrounding area  
Lyari Zone DMC South.

Tender No. (19) / (2017-2018)  
(ITEM BASED ON SCHEDULE RATE)

SR. #	Description of Item	Qty.	Rate	Unit	Amount
1	Cleaning inside sewerage lines completely restoring original silt free space. Dia meter of pipe lines by labour and equipment (mechanically electrically driven) ice accessories like pulley's steel rope, bucket. And draggers sizing from 6" to 18" dia their to and fro pulling action (No of passes (first phase in entire lenth from dawn stream to up stream) bringing dawn pick hours sewerage to flow pipe line ( as free flow) and I entire length ensuring no silt is observed in buckets (6" to 18") except only sewage water and finally passing a steel ball of dia 12" lesser then the diameter of the pipe but not exceeding 48" dia bal even for large dia pipe to ensure perfect cleaning. The job includes all the hire / cost of equipment and accessories of above winching machine / devices along with engines with winching drum set having rope pulley's mount over it steel bukets for 6" to 18" dia hooks and other protection likes safety barriers, traffic cones ensuring no other puplic property lives and removal of site etc . complete as per full satisfaction of site Engineer.				
	18" dia	3400	128.80	P/Rft	437920
<b>Total Amount of Schedule Items</b>					<b>Rs. 4,37,920/-</b>

(PART-B: ITEM BASED ON OPEN RATE)

SR. #	Description of Item	Qty.	Rate	Unit	Amount
2	P/F Flexo hump speed breaker having size 500mm x 375 x 50mm available in black and yellow combination for grater visibility U.V moisture and temperature resistance module etc complete.	61	Open Rate	P/Mtr	
<b>Total Amount of Open Rate Item Rs.</b>					

Nomenclature quantities and  
Rates have been checked by me

SUB-ENGINEER  
DMC (SOUTH)

ASSTT: EX ENGINEER  
DMC (SOUTH)

EXECUTIVE ENGINEER  
DMC (SOUTH)

## QUOTED BID (SUMMARY)

I/We hereby quoted as follows.1

1	PART-A (Item Based on S/R amounting Rs. 4,37,920/- _____ % Above / Below of the S/R .	Rs.
2	PART-B (Item Based on O/R)	Rs.
3	<b>GRAND TOTAL (A+B)</b>	Rs.

- I/ We shall be abide all SPPRA Rules-2010 (Amended-2013)
- I/We read the standard bidding Documents available in SPPRA website ([www.pprasinhd.govt.pk](http://www.pprasinhd.govt.pk)) and agreed to abide all of them and also provide all these documents with our signatures as & when directed.

Signature of the Contractor \_\_\_\_\_

Address: \_\_\_\_\_

\_\_\_\_\_

# SPPRA BIDDING DOCUMENT

## STANDARD FORM OF BIDDING DOUCMENT FOR PROCUREMENT OF WORKS

### WORK # 20

#### (SINGLE STAGE ONE ENVELOPE METHOD)

Name of Work: - Providing and laying storm drain infront of Hyper Star  
Khayaban-e-Firdousi Clifton Block. # 4, UC-31 DMC South

Estimate Cost : Rs. 9,89,973/-  
Bid Security : 2% of Quoted Amount  
Tender Cost : Rs. 1,000/-

---

Tender issue M/s. \_\_\_\_\_

#### PAY ORDER OF TENDER COST

#### PAY ORDER OF BID SECURITY

P.O. No. \_\_\_\_\_ Date \_\_\_\_\_

P.O. No. \_\_\_\_\_ Date \_\_\_\_\_

Bank \_\_\_\_\_

Bank \_\_\_\_\_

Rs. \_\_\_\_\_

Rs. \_\_\_\_\_




Signature & Stamp  
of Issuing Authority

# BIDDING DATA

## Work N0: 20

- a) Name of Procuring Agency: - District Municipal Corporation South Karachi
- b) Brief Description of Works: - Providing and laying storm drain infront of Hyper Star Khayaban-e-Firdousi Clifton Block. # 4, UC-31 DMC South
- c) Estimated Cost: - Rs: 9,89,973/-
- d) Amount of Bid Security: - 2% of Quoted Amount
- f) Period of Bid Validity (days):- 90 Days
- g) Security Deposit :-  
(Including bid security):- 10% of total Cost
- h) Percentage, if any,  
to be deducted from bills: - 7.5 % Income Tax
- i) Deadline for Submission of Bids,  
along with time: - Dated: 13-04-2018 2.00 PM
- j) Venue, Time, and Date of Bid Opening: - Executive Engineer DMC (South) office situated at Hiralal Ganatra road near Mujahid Masjid, Karachi. at 2.30 P.M Dated:- 13-04-2018
- k) Time for Completion: - 90 Days
- l) Liquidity damages: - 0.05% of Estimated Cost or Bid cost per day of Delay

  
EXECUTIVE ENGINEER .  
DMC (South)

CONTRACTOR'S SIGNATURE

M/s. \_\_\_\_\_

# DISTRICT MUNICIPAL CORPORATION SADDAR ZONE DMC (SOUTH) KARACHI

Name of Work: - Providing and laying storm drain in front of Hyper Star Khayaban-e-FIRDOUSI Clifton Block. # 4, UC-31  
DMC South

Tender No. (20) / (2017-2018)  
(ITEM BASED ON SCHEDULE RATE)

SR. #	Description of Item	Qty.	Rate	Unit	Amount
1	Dismantling cements concrete plain 1:2:4. (viii-P-iii-P-P-10/19-C)	229	3327.50	% Cft	7620
2	Excavation for pipe line in trenches and pits in all kind of soil of murum i/c trimming and dressing side to true alignment and shape traveling of beds of trenches to correct level and grade cutting joint holes and disposal of surplus earth within a one chain as directed by Engineer Incharge. Providing fence guard light flags and temporary crossing for non vehicular traffic wherever required left upto 05' and lead up to 01 chain. (v-iii part-ii P.No. 13 S.No. 51) Lift 0'-5'	11250	4650.00	%Cft	52313
3	Providing laying RCC pipes with (Rubber Ring Joint and fitting in trench i/c cutting, fitting and jointing with rubber ring i/c testing with water to specified pressure. (v-iv part-vi P.No. 18 Sr.No. B-2) 12" dia 8" dia	1000 200	367.00 206.00	P/Rft	367000 41200
4	Refilling the excavated stuff in trenches 6" thick layer i/c watering ramming to full compaction etc complete. (v-iv part-vi P.No. 77 S.No. 24)	10023	2760.00	%Cft	27663
5	Providing manhole 4 dia (in side) and 5 ft clear depth cost in situ with 1:2:4 c.c. (add 50% extra crushed) in benching ½" thick cement plastering with 1:3 cement mortar on all inside wall surface channel and benching i/c making required NOS of main and branch channels ¾ dia M.s footrest @ 12" dia C/C i/c cost of excavation in all kinds of soil backfilling and disposal of exerted stuff etc. complete as per design of the In-charge. (R/A on Sch:2012)	25	14529.29	Each	363232
6	Add / deduct per ft depth	5	2538.62	P/Feet	12693
7	Providing and laying 2" thick topping cement concert i/c surface finishing and dividing in to panels. 2" thick (V-III-P-III-P-42/16-C)	825	3275.50	% Sft	27023
8	Preparing sub-base by supplying and spreading well graded pit or bed run gravel having a liquid limit not greater than 25 and plasticity index not greater than 6 in proper camber and grade including watering rolling and compacting in layers, thickness of each compacted layer not exceeding 6" compacted upto 98-100% density as per modified AASHO density (rate i/c all cost of materials T&P and carriage upto 3 chains)	2730	3341.71	%Cft	91229
<b>Total Amount of Schedule Items</b>					<b>Rs. 9,89,973/-</b>

Nomenclature quantities and  
Rates have been checked by me

SUB-ENGINEER  
DMC (SOUTH)

ASSTT. EX. ENGINEER  
DMC (SOUTH)

EXECUTIVE ENGINEER  
DMC (SOUTH)

I/We hereby quoted as follows.

Item Based on S/R amounting Rs.9,89,973 /- \_\_\_\_\_ % Above / Below of the S/R Rs. \_\_\_\_\_

In figure ( \_\_\_\_\_ )

- I/ We shall be abide all SPPRA Rules-2010 (Amended-2013)
- Rate must be quoted on total amount of Schedule rate either Above OR Below not accepted item wise.
- I/We read the standard bidding documents / TORs available in SPPRA website ([www.pprasinhd.govt.pk](http://www.pprasinhd.govt.pk)) and agreed to abide all of them and also provide all these documents with our signatures as & when directed.

Signature of the Contractor \_\_\_\_\_

Address: \_\_\_\_\_

# SPPRA BIDDING DOCUMENT

## STANDARD FORM OF BIDDING DOUCMENT FOR PROCUREMENT OF WORKS

### WORK # 21

#### (SINGLE STAGE ONE ENVELOPE METHOD)

Name of Work: : Providing and laying speed breaker near Agha khan Maternity Hospital Lyari, winching of sewer line at Chakieara road and surrounding area of Lyari Zone DMC South

Estimate Cost : Rs. 4,44,360/- + Open Rate  
Bid Security : 2% of Quoted Amount  
Tender Cost : Rs. 1,000/-

---

Tender issue M/s. \_\_\_\_\_

#### PAY ORDER OF TENDER COST

#### PAY ORDER OF BID SECURITY

P.O. No. \_\_\_\_\_ Date \_\_\_\_\_


P.O. No. \_\_\_\_\_ Date \_\_\_\_\_

Bank \_\_\_\_\_

Bank \_\_\_\_\_

Rs. \_\_\_\_\_

Rs. \_\_\_\_\_




Signature & Stamp  
of Issuing Authority

# BIDDING DATA

## Work N0: 21

- a) Name of Procuring Agency: - District Municipal Corporation South Karachi
- b) Brief Description of Works: - Providing and laying speed breaker near Agha Khan Maternity Hospital Lyari, winching of sewer line at Chakieara road and surrounding area of Lyari Zone DMC South
- c) Estimated Cost: - Rs: 4,44,360/- + Open Rate
- d) Amount of Bid Security: - 2% of Quoted Amount
- f) Period of Bid Validity (days):- 90 Days
- g) Security Deposit :-  
(Including bid security):- 10% of total Cost
- h) Percentage, if any,  
to be deducted from bills: - 7.5 % Income Tax
- i) Deadline for Submission of Bids,  
along with time: - Dated: 13-04-2018 2.00 PM
- j) Venue, Time, and Date of Bid Opening: - Executive Engineer DMC (South) office situated at Hiralal Ganatra road near Mujahid Masjid, Karachi. at 2.30 P.M Dated:- 13-04-2018
- k) Time for Completion: - 90 Days
- l) Liquidity damages: - 0.05% of Estimated Cost or Bid cost per day of Delay

  
EXECUTIVE ENGINEER  
DMC (South)

CONTRACTOR'S SIGNATURE

M/s. \_\_\_\_\_

# DISTRICT MUNICIPAL CORPORATION SADDAR ZONE DMC (SOUTH) KARACHI

Name of Work: - Providing and laying speed breaker near Agha Khan Maternity Hospital Lyari, winching of sewer line at Chakieara road and surrounding area of Lyari Zone DMC South

Tender No. (21) / (2017-2018)  
(ITEM BASED ON SCHEDULE RATE)

SR. #	Description of Item	Qty.	Rate	Unit	Amount
1	Cleaning inside sewerage lines completely restoring original silt free space. Dia meter of pipe lines by labour and equipment (mechanically electrically driven) ice accessories like pulley's steel rope, bucket. And draggers sizing from 6" to 18" dia their to and fro pulling action (No of passes (first phase in entire lenth from dawn stream to up stream) bringing dawn pick hours sewerage to flow pipe line ( as free flow) and I entire length ensuring no silt is observed in buckets (6" to 18") except only sewage water and finally passing a steel ball of dia 12" lesser then the diameter of the pipe but not exceeding 48" dia bal even for large dia pipe to ensure perfect cleaning. The job includes all the hire / cost of equipment and accessories of above winching machine / devices along with engienes with winching drum set having rope pulley's mount over it steel bukets for 6" to 18" dia hooks and other protection likes safety barriers, traffic cones ensuring no other puplic property lives and removal of site etc . complete as per full satisfaction of site Engineer.				
	36" dia	800	289.80	P/Rft	231840
	48" dia	600	354.20	P/Rft	212520
Total Amount of Schedule Items					Rs. 4,44,360/-

(PART-B: ITEM BASED ON OPEN RATE)

SR. #	Description of Item	Qty.	Rate	Unit	Amount
2	P/F Flexo hump speed breaker having size 500mm x 375 x 50mm available in black and yellow combination for grater visibility U.V moisture and temperature resistance module etc complete.	60	Open Rate	P/Mtr	
Total Amount of Open Rate Item Rs.					

Nomenclature quantities and  
Rates have been checked by me

SUB-ENGINEER  
DMC (SOUTH)

ASSTT. EX. ENGINEER  
DMC (SOUTH)

EXECUTIVE ENGINEER  
DMC (SOUTH)

## QUOTED BID (SUMMARY)

I/We hereby quoted as follows.

1	PART-A (Item Based on S/R amounting Rs. 4,44,360/- _____ % Above / Below of the S/R .	Rs. _____
2	PART-B (Item Based on O/R)	Rs. _____
3	<b>GRAND TOTAL (A+B)</b>	Rs. _____

In figure ( \_\_\_\_\_ )

- I/ We shall be abide all SPPRA Rules-2010 (Amended-2013)
- I/We read the standard bidding Documents available in SPPRA website ([www.pprasindh.govt.pk](http://www.pprasindh.govt.pk)) and agreed to abide all of them and also provide all these documents with our signatures as & when directed.

Signature of the Contractor \_\_\_\_\_

Address: \_\_\_\_\_

# SPPRA BIDDING DOCUMENT

## STANDARD FORM OF BIDDING DOUCMENT FOR PROCUREMENT OF WORKS

### WORK # 22

#### (SINGLE STAGE ONE ENVELOPE METHOD)

Name of Work: - Providing / laying of PVC and R.C.C Pipe for disposal of Rain water including the cleaning M/H and existing drain line in different area UC-24 & 25 Saddae Zone DMC South

Estimate Cost : Rs. 9,97,249/-  
Bid Security : 2% of Quoted Amount  
Tender Cost : Rs. 1,000/-

---

Tender issue M/s. \_\_\_\_\_

PAY ORDER OF TENDER COST

PAY ORDER OF BID SECURITY

P.O. No. \_\_\_\_\_ Date \_\_\_\_\_


P.O. No. \_\_\_\_\_ Date \_\_\_\_\_

Bank \_\_\_\_\_

Bank \_\_\_\_\_

Rs. \_\_\_\_\_

Rs. \_\_\_\_\_

  
Signature & Stamp  
of Issuing Authority



# BIDDING DATA

## Work N0: 22

- a) Name of Procuring Agency: - District Municipal Corporation South Karachi
- b) Brief Description of Works: - Providing / laying of PVC and R.C.C Pipe for disposal of Rain water including the cleaning M/H and existing drain line in different area UC-24 & 25 Saddae Zone DMC South
- c) Estimated Cost: - Rs: 9,97,249/-
- d) Amount of Bid Security: - 2% of Quoted Amount
- f) Period of Bid Validity (days):- 90 Days
- g) Security Deposit :-  
(Including bid security):- 10% of total Cost
- h) Percentage, if any,  
to be deducted from bills: - 7.5 % Income Tax
- i) Deadline for Submission of Bids,  
along with time: - Dated: 13-04-2018 2.00 PM
- j) Venue, Time, and Date of Bid Opening: - Executive Engineer DMC (South) office situated at Hiralal Ganatra road near Mujahid Masjid, Karachi. at 2.30 P.M Dated:- 13-04-2018
- k) Time for Completion: - 90 Days
- l) Liquidity damages: - 0.05% of Estimated Cost or Bid cost per day of Delay

  
EXECUTIVE ENGINEER  
DMC (South)

CONTRACTOR'S SIGNATURE

M/s. \_\_\_\_\_


# DISTRICT MUNICIPAL CORPORATION SADDAR ZONE DMC (SOUTH) KARACHI


Name of Work: - Providing / laying of PVC and R.C.C Pipe for disposal of Rain water including the cleaning M/H and existing drain line in different area UC-24 & 25 Saddae Zone DMC South

Tender No. (22) / (2017-2018)  
(ITEM BASED ON SCHEDULE RATE)

SR. #	Description of Item	Qty.	Rate	Unit	Amount
1	Dismantling of existing asphalt concrete road ice base and sub base disposable of material.	2070	773.86	% Cft	16019
2	Excavation for pipe line in trenches and pits in all kind of soil of murum i/c trimming and dressing side to true alignment and shape traveling of beds of trenches to correct level and grade cutting joint holes and disposal of surplus earth within a one chain as directed by Engineer Incharge. Providing fence guard light flags and temporary crossing for non vehicular traffic wherever required left upto 05' and lead up to 01 chain. (v-iii part-ii P.No. 13 S.No. 51) Lift 0'-5'	5700	4650.00	%Cft	26505
3	P/L PVC Pipe class -B i/c cutting and fixing etc complete.	6" dia 8" dia 10" dia	262.00 402.00 721.00	P/Rft	131000 201000 144200
4	Refilling the excavated stuff in trenches 6" thick layer i/c watering ramming to full compaction etc complete. (v-iv part-vi P.No. 77 S.No. 24)	4275	2760.00	%Cft	11799
5	Carriage of 100 Cft/ 5 Tons of all material like stone, aggregate, spawl, coal lime, surkhi etc B.G Rail fastening points and crossing bridge, girders, pipes, sheets Rail M.S Bars etc or 1000 nos: bricks 10" X 5" X 3" or 1000 Nos: tiles 12" X 6" X 2" or 150 Cft of timber or 100 Maunds of fuel wood by trucks or any other means owned by contractors. 15 Miles.	2375	1065.00	%Cft	25295
6	Providing manhole 4 dia (in side) and 5 ft clear depth cost in situ with 1:2:4 c.c. (add 50% extra crushed) in benching 1/2" thick cement plastering with 1:3 cement motor on all inside wall surface channel and benching i/c making required NOS of main and branch channels 3/4 dia M.s footrest @ 12" dia C/C i/c cost of excavation in all kinds of soil backfilling and disposal of exerted stuff etc. complete as per design of the In-charge. ( R/A on Sch:2012)	20	14529.29	Each	290586
7	Add / deduct per ft depth / raising manhole (-)	40	2538.62	P/Feet	(-) 101545
8	Sand haaro or any other source sand of the same modules of the fitness (Hill Sand).	1743	2425.00	% Cft	42268
9	Cleaning inside sewerage lines completely restoring original silt free space. Dia meter of pipe lines by labour and equipment (mechanically electrically driven) ice accessories like pulley's steel rope, bucket. And draggers sizizing from 6" to 18" dia their to and fro pulling action (No of passes (first phase in entire lenth from dawn stream to up stream) bringing dawn pick hours sewerage to flow pipe line ( as free flow) and I entire length ensuring no silt is observed in buckets (6" to 18") except only sewage water and finally passing a steel ball of dia 12" lesser then the diameter of the pipe but not exceeding 48" dia bal even for large dia pipe to ensure perfect cleaning. The job includes all the hire / cost of equipment and accessories of above winching machine / devices along with engines with winching drum set having rope pulley's mount over it steel bukets for 6" to 18" dia hooks and other protection likes safety barriers, traffic cones ensuring no other pubic property lives and removal of site etc . complete as per full satisfaction of site Engineer. 18" dia	1500	128.80	P/Rft	193200
10	Manufacturing and supplying of R.C.C. ring slab of inside 36" dia outside 7.5 width and 6" thick i/c 3/8" dia tor steel bars two concentric rings with 3/8" did 8 Nos.. cross linked bars welded and two sunk type hooks, casted in a 1:1:1/2:3 conc. With embedded 15 Kg C.I frame in perfect position i/c transportation charges for an average lead of 20 Km. Per trip from casting yard to town offices. (A minimum of 25 slabs per trip will be transported)	6	1906.00	Each	11440
11	Manufacturing and supplying R.C.C. manhole cover cast in 1:2:4 concrete ratio 3 inch deep at center reinforced with 3/8" dia tor steel bars at 4" c/c welded to 1/8" thick 2.5 inch deep M.S plate i/c curing. Stacking and transportation within 10 miles	6	913.63	Each	5482
Total Amount of Schedule Items					Rs. 9,97,249/-

Nomenclature quantities and  
Rates have been checked by me

  
SUB-ENGINEER  
DMC (SOUTH)

  
ASSTT: EX. ENGINEER  
DMC (SOUTH)

  
EXECUTIVE ENGINEER  
DMC (SOUTH)

I/We hereby quoted as follows.

Item Based on S/R amounting Rs.9,97,249 /- \_\_\_\_\_ % Above / Below of the S/R Rs. \_\_\_\_\_

In figure ( \_\_\_\_\_ )

1. I/ We shall be abide all SPPRA Rules-2010 (Amended-2013)
2. Rate must be quoted on total amount of Schedule rate either Above OR Below not accepted item wise.
3. I/We read the standard bidding documents / TORs available in SPPRA website ([www.pprasinhd.govt.pk](http://www.pprasinhd.govt.pk)) and agreed to abide all of them and also provide all these documents with our signatures as & when directed.

Signature of the Contractor \_\_\_\_\_

Address: \_\_\_\_\_

\_\_\_\_\_

# SPPRA BIDDING DOCUMENT

## STANDARD FORM OF BIDDING DOUCMENT FOR PROCUREMENT OF WORKS

### WORK # 23

#### (SINGLE STAGE ONE ENVELOPE METHOD)

Name of Work: - Desilting / cleaning of nallah through manually and Machanical surrounding area of UC-31, Saddar Zone DMC South

Tentative Cost : Rs. 9,95,000/-  
Bid Security : 2% of Quoted Amount  
Tender Cost : Rs. 1,000/-

Tender issue M/s. \_\_\_\_\_

#### PAY ORDER OF TENDER COST

#### PAY ORDER OF BID SECURITY

P.O. No. \_\_\_\_\_ Date \_\_\_\_\_


P.O. No. \_\_\_\_\_ Date \_\_\_\_\_

Bank \_\_\_\_\_

Bank \_\_\_\_\_

Rs. \_\_\_\_\_

Rs. \_\_\_\_\_




Signature & Stamp  
of Issuing Authority

# BIDDING DATA

## Work N0: 23

- a) Name of Procuring Agency: - District Municipal Corporation South Karachi
- b) Brief Description of Works: - De-silting / cleaning of nallah through manually and Mechanical surrounding area of UC-31, Saddar Zone DMC South
- c) Tentative Cost: - Rs: 9,95,000/-
- d) Amount of Bid Security: - 2% of Quoted Amount
- f) Period of Bid Validity (days):- 90 Days
- g) Security Deposit :-  
(Including bid security):- 10% of total Cost
- h) Percentage, if any,  
to be deducted from bills: - 7.5 % Income Tax
- i) Deadline for Submission of Bids,  
along with time: - Dated: 13-04-2018 2.00 PM
- j) Venue, Time, and Date of Bid Opening: - Executive Engineer DMC (South) office situated at Hiralal Ganatra road near Mujahid Masjid, Karachi. at 2.30 P.M Dated:- 13-04-2018
- k) Time for Completion: - 90 Days
- l) Liquidity damages: - 0.05% of Estimated Cost or Bid cost per day of Delay

  
EXECUTIVE ENGINEER  
DMC (South)

CONTRACTOR'S SIGNATURE

M/s. \_\_\_\_\_

# DISTRICT MUNICIPAL CORPORATION SADDAR ZONE DMC (SOUTH) KARACHI

Name of Work: - Desilting / cleaning of nallah through manually and Machanical surrounding area of UC-31, Saddar Zone  
DMC South.

Tender No. (23) / (2017-2018)  
(ITEM BASED ON OPEN RATE)

SR. #	Description of Item	Qty.	Rate	Unit	Amount
1	Hiring of excavator with operate helper & fuel etc comp.	120	Open Rate	Per Hours	
2	Hiring of Dumper for removal of garbäge / debris i/c operator with helper i/c fuel etc complete.	240	Open Rate	Per Hours	
3	Hiring of loader with feul operator and helper for loading et comp.	62	Open Rate	Per Hours	
4	cleaning of nallah by manually i/c lift upto 5' etc complete	90	Open Rate	Per labour	
Total Amount of Open Rate Item Rs.					

Nomenclature quantities and  
Rates have been checked by me

SUB-ENGINEER  
DMC (SOUTH)

ASSTT: EXA ENGINEER  
DMC (SOUTH)

EXECUTIVE ENGINEER  
DMC (SOUTH)

I/We hereby quoted as follows.

Item Based on open rate amounting to Rs. \_\_\_\_\_ In figure ( \_\_\_\_\_ )

1. I/ We shall be abide all SPPRA Rules-2010 (Amended-2013)
2. I/We read the standard bidding Documents available in SPPRA website ([www.pprasingh.govt.pk](http://www.pprasingh.govt.pk)) and agreed to abide all of them and also provide all these documents with our signatures as & when directed.

Signature of the Contractor \_\_\_\_\_

Address: \_\_\_\_\_

\_\_\_\_\_

# SPPRA BIDDING DOCUMENT

## STANDARD FORM OF BIDDING DOUCMENT FOR PROCUREMENT OF WORKS

### WORK # 24

#### (SINGLE STAGE ONE ENVELOPE METHOD)

Name of Work: - Construction of Public Toilet at Agha Khan III road near  
Zoological Garden Saddar Division DMC South.

Estimate Cost : Rs. 9,95,778/-  
Bid Security : 2% of Quoted Amount  
Tender Cost : Rs. 1,000/-

Tender issue M/s. \_\_\_\_\_

#### PAY ORDER OF TENDER COST

#### PAY ORDER OF BID SECURITY

P.O. No. \_\_\_\_\_ Date \_\_\_\_\_

P.O. No. \_\_\_\_\_ Date \_\_\_\_\_

Bank \_\_\_\_\_

Bank \_\_\_\_\_

Rs. \_\_\_\_\_


Rs. \_\_\_\_\_

  
Signature & Stamp  
of Issuing Authority

# BIDDING DATA

## Work N0: 24

- a) Name of Procuring Agency: - District Municipal Corporation South Karachi
- b) Brief Description of Works: - Construction of Public Toilet at Agha Khan III road near Zoological Garden Saddar Division DMC South
- c) Estimated Cost: - Rs: 9,95,778/-
- d) Amount of Bid Security: - 2% of Quoted Amount
- f) Period of Bid Validity (days):- 90 Days
- g) Security Deposit :-  
(Including bid security):- 10% of total Cost
- h) Percentage, if any,  
to be deducted from bills: - 7.5 % Income Tax
- i) Deadline for Submission of Bids,  
along with time: - Dated: 13-04-2018 2.00 PM
- j) Venue, Time, and Date of Bid Opening: - Executive Engineer DMC (South) office situated at Hiralal Ganatra road near Mujahid Masjid, Karachi. at 2.30 P.M Dated:- 13-04-2018
- k) Time for Completion: - 90 Days
- l) Liquidity damages: - 0.05% of Estimated Cost or Bid cost per day of Delay

  
EXECUTIVE ENGINEER  
DMC (South)

CONTRACTOR'S SIGNATURE

M/s. \_\_\_\_\_



# DISTRICT MUNICIPAL CORPORATION SADDAR ZONE DMC (SOUTH) KARACHI

Name of Work: - Construction of Public Toilet at Agha Khan III road near Zoological Garden Saddar Division DMC South

Tender No. (24) / (2017-2018)  
(ITEM BASED ON SCHEDULE RATE)

SR. #	Description of Item	Qty.	Rate	Unit	Amount
1	Dismantling cement concert reinforced spreading reinforce cement for concrete cleaning and straightening the same. (viii-P-iii-P-P-10/20)	155	5445.00	% Cft	8440/=
2	Dismantling cements concrete plain 1:2:4. (viii-P-iii-P-P-10/19-C)	162	3327.50	% Sft	5390/=
3	Dismantling c.c. block masonry work etc. complete	296	1134.38	% Cft	3357/=
4	Earth work excavation and foundation etc comp.	760	3554.38	%0Cft	2701/=
5	Cartage of 100 CFT / 5 tons of all material likes one aggregate, spawl, coal, lime, surkhi etc. B.G Rait fastenings points & crossing bridges girders. Pipes, sheets Raits M.S Bars etc. or 1000 Nos brinks 10' x 5' x 3' or 1000 manuds of fuel wood by trucks or any other means owned by the contractors (Lead up to 5/10 Miles etc)	1221	1065.04	% Cft	13004/=
6	P/L 1:4:8 Cement concrete brick or stone ballast 1.5" to 2" gauge etc compt. (V-III P-III P-15/4-B)	97	9416.28	% Cft	9133/=
7	P/L Rcc 1:2:4 c.c	664	337.00	Cft	223768/=
8	Fabrication of mild steel reinforcement for cement concert i/c cutting beading laying in position making joint and fastening i/c cast of binding wire (Also i/c reinforced of B) using Tor bars. (V-III-P-III-P-17/8-B)	24	5001.70	P/Cwt	120041/=
9	P/L 1:4:8 Cement concrete brick or stone ballast 1.5" to 2" gauge etc compt. (V-III P-III P-15/4-B)	114	11288.75	% Cft	12867/=
10	P/L 136 C/C Solid block masonry Work & Ground Floor S/S	415	15771.01	% Cft	65450/=
11	Cement plaster 1:6 up to 12' high @ 3/4" thick. (V-III-P-III-P-52/13-C)	3043	2590.50	% Sft	78829/=
12	With glazed tile 1/4" thick dado over 1:2 camant sand mortar 3/4" thick	689	28253.61	% Sft	194667/=
13	Providing and laying 2" thick topping cement concert i/c surface finishing and dividing in to panels. 2" thick (V-III-P-III-P-42/16-C)	48	3275.50	% Sft	1572/=
14	P/F WC pan white glazed earth work with flash took i/c all necessary work etc comp.	06	5044.60	Each	30268/=
15	P/F Lavatory basin.	2	5192.17	Each	10374/=
16	P/F UPVC pipe i/c cutting fitting etc comp.				
	a- 1/2" dia	150	12.00	P/Rft	1800/=
	b- 3/4" dia	100	19.00	P/Rft	1900/=
	c- 3" dia	75	107.00	P/Rft	8025/=
	d- 4" dia	120	174.00	P/Rft	20880/=
17	P/F bib cock or stop cock 1/2" dia	12	337.92	Each	4055/=
18	P/F Iron steel door cover with MS 16 Gauge sheet i/c locking arrement etc comp.	198	726.72	P/Sft	143891/=
19	Oil bond distemper.	2986	1043.90	%Sft	31171/=
20	Painting on iron work 3 coat of app make & shade etc comp.	428	977.40	% Sft	4183/=
<b>Total Amount of Schedule Items</b>					<b>Rs. 9,95,778/-</b>

Nomenclature quantities and Rates have been checked by me

SUB-ENGINEER  
DMC (SOUTH)

ASSTT. EX. ENGINEER  
DMC (SOUTH)

EXECUTIVE ENGINEER  
DMC (SOUTH)

I/We hereby quoted as follows.

Item Based on S/R amounting Rs.9,97,249 /- \_\_\_\_\_ % Above / Below of the S/R Rs. \_\_\_\_\_

In figure ( \_\_\_\_\_ )

- I/We shall be abide all SPPRA Rules-2010 (Amended-2013)
- Rate must be quoted on total amount of Schedule rate either Above OR Below not accepted item wise.
- I/We read the standard bidding documents / TORs available in SPPRA website ([www.pprasinhd.govt.pk](http://www.pprasinhd.govt.pk)) and agreed to abide all of them and also provide all these documents with our signatures as & when directed.

Signature of the Contractor \_\_\_\_\_

Address: \_\_\_\_\_

# SPPRA BIDDING DOCUMENT

## STANDARD FORM OF BIDDING DOUCMENT FOR PROCUREMENT OF WORKS

### WORK # 25

#### (SINGLE STAGE ONE ENVELOPE METHOD)

Name of Work: - Repair / maintenance of Boys / Girls Elementary School No.  
24/25 Millat Nagar Ram swami UC-20, Saddar Zone DMC  
South

Estimate Cost : Rs. 9,74,115/- + Open Rate  
Bid Security : 2% of Quoted Amount  
Tender Cost : Rs. 1,000/-

Tender issue M/s. \_\_\_\_\_

#### PAY ORDER OF TENDER COST

#### PAY ORDER OF BID SECURITY

P.O. No. \_\_\_\_\_ Date \_\_\_\_\_

P.O. No. \_\_\_\_\_ Date \_\_\_\_\_

Bank \_\_\_\_\_

Bank \_\_\_\_\_

Rs. \_\_\_\_\_

Rs. \_\_\_\_\_

  
Signature & Stamp  
of Issuing Authority

# BIDDING DATA

## Work N0: 25

- a) Name of Procuring Agency: - District Municipal Corporation South Karachi
- b) Brief Description of Works: - Repair / maintenance of Boys / Girls Elementary School No. 24/25 Millat Nagar Ramswami UC-20 , Saddar Zone DMC South.
- c) Estimated Cost: - Rs: 9,74,115/- + Open Rate
- d) Amount of Bid Security: - 2% of Quoted Amount
- f) Period of Bid Validity (days):- 90 Days
- g) Security Deposit :-  
(Including bid security):- 10% of total Cost
- h) Percentage, if any,  
to be deducted from bills: - 7.5 % Income Tax
- i) Deadline for Submission of Bids,  
along with time: - Dated: 13-04-2018 2.00 PM
- j) Venue, Time, and Date of Bid Opening: - Executive Engineer DMC (South) office situated at Hiralal Ganatra road near Mujahid Masjid, Karachi. at 2.30 P.M Dated:- 13-04-2018
- k) Time for Completion: - 90 Days
- l) Liquidity damages: - 0.05% of Estimated Cost or Bid cost per day of Delay

  
EXECUTIVE ENGINEER  
DMC (South)

CONTRACTOR'S SIGNATURE

M/s. \_\_\_\_\_

# DISTRICT MUNICIPAL CORPORATION SADDAR ZONE DMC (SOUTH) KARACHI

Name of Work: - Repair / maintenance of Boys / Girls Elementary School No. 24/25 Millat Nagar Ramswami UC-20 ,  
Saddar Zone DMC South.

Tender No. (25) / (2017-2018)

(ITEM BASED ON SCHEDULE RATE)

SR. #	Description of Item	Qty.	Rate	Unit	Amount
1	Dismantling c.c. block masonry work etc. complete	18	1134.38	% Cft	204
2	Cement plaster 1:6 up to 12' high @ ¾" thick. (V-III-P-III-P-52/13-C)	862	2590.50	% Sft	22330
3	P/L 1:2:4 C.C flooring ½" thick at 2 <sup>nd</sup> floor i/c finishing & curing etc comp.	2205	3002.05	% Sft	66195
4	Laying floor of approved colour galzed tile ¼" thick etc comp.	1908	27747.06	% Sft	529414
5	P/F Expended matel 3/32 -20 gauge etc comp.	758	60.43	P/Sft	45806
7	P/F Iron frame steel gate heavy type.	61	726.72	P/Sft	44330
8	Scraping oil bond distemper or plastic paint etc comp.	7780	226.88	% Sft	17651
9	Oil bond distemper.	5447	1043.90	%Sft	56861
10	Painting with enamel paint two coats of approved make and shade etc complete.	2803	1402.23	%Sft	39305
11	Preparing the surface weather coat paint (viii-pii c-9-p56/38-A-B)	5293	1948.10	% Sft	103113
12	Preparing Surface & painting of Guard bar & gates etc comp.	1556	896.39	% Sft	13948
13	P/F lavatory basin of earthen were i/c all necessary fitting & complete with pedestal	1	5192.17	Each	5192
14	P/F bib cock 1/2" dia	6	337.92	Each	2028
15	P/F WC pan white glazed earth work with flash took i/c all necessary work etc comp.	1	5044.60	Each	5045
16	P / L PVC Pipe of class C I/C cutting Fitting & Jointing etc. a) 4" Dia b) 3" Dia	80 50	174.00 107.00	P/Rft P/Rft	13920 5350
17	P/F beveled edge mirror of 5 mm thick Belgium glass complete with 1/8" thick hard board & C.P screwe etc. complete.	2	1711.60	Each	3423
<b>Total Amount of Schedule Items</b>					<b>Rs. 9,74,115/-</b>

(PART-B: ITEM BASED ON OPEN RATE)

SR. #	Description of Item	Qty.	Rate	Unit	Amount
5	P/F wall papers of approved design i/c cutting & fixing etc complete and all respect.	319	Open Rate	P/Mtr	
<b>Total Amount of Open Rate Item Rs.</b>					

Nomenclature quantities and Rates have been checked by me

SUB-ENGINEER  
DMC (SOUTH)

ASSTT: EX. ENGINEER  
DMC (SOUTH)

EXECUTIVE ENGINEER  
DMC (SOUTH)

## QUOTED BID (SUMMARY)

I/We hereby quoted as follows.

1	PART-A (Item Based on S/R amounting Rs. 9,74,115/- _____ % Above / Below of the S/R .	Rs. _____
2	PART-B (Item Based on O/R)	Rs. _____
3	<b>GRAND TOTAL (A+B)</b>	Rs. _____

In figure ( \_\_\_\_\_ )

- I/ We shall be abide all SPPRA Rules-2010 (Amended-2013)
- Rate must be quoted on total amount of Schedule rate either Above OR Below not accepted item wise.
- I/We read the standard bidding documents / TORs available in SPPRA website ([www.pprasingh.govt.pk](http://www.pprasingh.govt.pk)) and agreed to abide all of them and also provide all these documents with our signatures as & when directed.

Signature of the Contractor \_\_\_\_\_

Address: \_\_\_\_\_

# SPPRA BIDDING DOCUMENT

## STANDARD FORM OF BIDDING DOUCMENT FOR PROCUREMENT OF WORKS

### WORK # 26

#### (SINGLE STAGE ONE ENVELOPE METHOD)

Name of Work: - Construction of Health centre i/c Boundary wall at Iqbal Hoti road , Saddar Zone DMC South

Estimate Cost : Rs. 9,30,122/- + Open Rate  
Bid Security : 2% of Quoted Amount  
Tender Cost : Rs. 1,000/-

Tender issue M/s. \_\_\_\_\_

#### PAY ORDER OF TENDER COST

#### PAY ORDER OF BID SECURITY

P.O. No. \_\_\_\_\_ Date \_\_\_\_\_


P.O. No. \_\_\_\_\_ Date \_\_\_\_\_

Bank \_\_\_\_\_

Bank \_\_\_\_\_

Rs. \_\_\_\_\_

Rs. \_\_\_\_\_




Signature & Stamp  
of Issuing Authority

# BIDDING DATA

## Work N0: 26

- a) Name of Procuring Agency: - District Municipal Corporation South Karachi
- b) Brief Description of Works: - Construction of Health centre i/c Boundary wall at Iqbal Hoti road, Saddar Zone DMC South
- c) Estimated Cost: - Rs: 9,30,122/- + Open Rate
- d) Amount of Bid Security: - 2% of Quoted Amount
- f) Period of Bid Validity (days):- 90 Days
- g) Security Deposit :-  
(Including bid security):- 10% of total Cost
- h) Percentage, if any,  
to be deducted from bills: - 7.5 % Income Tax
- i) Deadline for Submission of Bids,  
along with time: - Dated: 13-04-2018 2.00 PM
- j) Venue, Time, and Date of Bid Opening: - Executive Engineer DMC (South) office situated at Hiralal Ganatra road near Mujahid Masjid, Karachi. at 2.30 P.M Dated:- 13-04-2018
- k) Time for Completion: - 90 Days
- l) Liquidity damages: - 0.05% of Estimated Cost or Bid cost per day of Delay

  
EXECUTIVE ENGINEER  
DMC (South)

CONTRACTOR'S SIGNATURE

M/s. \_\_\_\_\_

# DISTRICT MUNICIPAL CORPORATION SADDAR ZONE DMC (SOUTH) KARACHI

Name of Work: - Construction of Health centre i/c Boundary wall at Iqbal Hoti road , Saddar Zone DMC South.

Tender No. (26) / (2017-2018)

(ITEM BASED ON SCHEDULE RATE)

SR. #	Description of Item	Qty.	Rate	Unit	Amount
1	Dismantling c.c. block masonry work etc. complete	716	1134.38	% Cft	8122
2	Dismantling cement concert reinforced spreading reinforce cement for concrete cleaning and straightening the same. (viii-P-iii-P-10/20)	164	5445.00	% Cft	8930
3	Earth work excavation and foundation etc comp.	579	3554.38	%0Cft	2058
4	Cartage of 100 CFT / 5 tons of all material likes one aggregate, spawl, coal, lime, surkhi etc. B.G Rait fastenings points & crossing bridges girders. Pipes, sheets Raits M.S Bars etc. or 1000 Nos brinks 10' x 5' x 3' or 1000 manuds of fuel wood by trucks or any other means owned by the contractors (Lead up to 5/10 Miles etc)	2782	1065.04	% Cft	29629
5	P/L 1:4:8 Cement concrete brick or stone ballast 1.5" to 2" gauge etc compt. (V-III P-III P-15/4-B)	176	9416.28	% Cft	16573
6	P/L 136 C/C Solid.block masonry Work & Ground Floor S/S	1842	15771.01	% Cft	290502
7	P/L Rcc 1:2:4 c.c	32	337.00	Cft	10784
8	Fabrication of reinforcement.	1.71	5001.70	Cwt	8553
9	P/F Iron frame steel gate heavy type.	56	726.72	P/Sft	40696
10	Cement plaster 1:6 up to 12' high @ ¾"thick. (V-III-P-III-P-52/13-C)	4244	2590.50	% Sft	109941
12	P/F in opposition door windows & ventilator of Ist class deader wood frame & 1-1/2" thick teak wood ply shutter of 2 <sup>nd</sup> class deodar wood i/c hold past hinges & tower bolts etc. complete	46	1077.06	P/Sft	49545
13	P/F Aluminum work.	60	1647.69	P/Sft	98861
14	P/F Iron grill.	60	180.50	P/Sft	10830
15	P/F WC pan white glazed earth work with flash took i/c all necessary work etc comp.	01	5044.60	Each	5045
16	P/F Lavatory basin.	01	5192.17	Each	5192
17	P/F PVC Pipe i/c cutting fitting and jointing etc comp.				
	A) 6" dia	50	373.00	P/Rft	18650
	B) 4" dia	30	174.00	P/Rft	5220
	C) 3" dia	30	107.00	P/Rft	3210
18	P/F bib cock 1/2" dia	03	337.92	Each	1014
19	P/F Sawan nick tap.	01	877.80	Each	878
20	P/F 24" x 18" beveled edge mirror of Belgium glass complete with 1/8" thick board bard etc.	01	1711.60	Each	1712
21	P/F towel rail of 24"long ¾" dia round or square of standard pattern etc comp.	02	1269.95	Each	2540
22	Construction manhole or inspection chamber for the required diameter of circular sewer and 3'-6" (1067mm) depth with walls of B.B. in centers and mortar 1:3 cement plastered, 1:3 ½" thick inside of walls and 1" (25mm) thick over benching and channel i/c fixing C.I. manhole cover with frame of clear opening 1½' x 1½' (457 x 457mm) of 1.75 Cwt (88.9 Kg) embedded in plain C.C. 1:2:4 and fixing 1" (25mm) dia M.S. steps (150mm) wide projecting 4" (102mm) from the face of walls at 12" (305mm) C.C. duly painted etc complete as per standard specification and drawing.	01	14748.00	Each	14748
23	Prepairing the surface weather coat paint (viii-pii c-9-p56/38-A-B)	3472	1948.10	% Sft	67638
24	Oil bond distemper.	787	1043.90	%Sft	8215
25	Providing and laying* 2" thick topping cement concert i/c surface finishing and dividing in to panels. 2" thick (V-III-P-III-P-42/16-C)	1973	3275.50	% Sft	64625
26	P/L Glazed Tile.	164	28299.30	%Sft	46411
Total Amount of Schedule Items					Rs. 9,30,122/-

(PART-B: ITEM BASED ON OPEN RATE)

SR. #	Description of Item	Qty.	Rate	Unit	Amount
11	P/L R.C.C precast slab with precast gurder over providing laying MS Bar 1/4" dia 10" c/c i/c P/L 2" c.c flooring i/c finishing and curing etc comp..	341	Open Rate	P/Mtr	
Total Amount of Open Rate Item Rs.					

Nomenclature/quantities and  
Rates have been checked by me

SUB-ENGINEER  
DMC (SOUTH)

ASSTT. ENGINEER  
DMC (SOUTH)

EXECUTIVE ENGINEER  
DMC (SOUTH)

**QUOTED BID (SUMMARY)**

I/We hereby quoted as follows.

1	PART-A (Item Based on S/R amounting Rs. 9,30,122/- _____ % Above / Below of the S/R .	Rs. _____
2	PART-B (Item Based on O/R)	Rs. _____
3	<b>GRAND TOTAL (A+B)</b>	Rs. _____

In figure ( \_\_\_\_\_ )

1. I/ We shall be abide all SPPRA Rules-2010 (Amended-2013)
2. Rate must be quoted on total amount of Schedule rate either Above OR Below not accepted item wise.
3. I/We read the standard bidding documents / TORs available in SPPRA website ([www.pprasingh.govt.pk](http://www.pprasingh.govt.pk)) and agreed to abide all of them and also provide all these documents with our signatures as & when directed.

Signature of the Contractor \_\_\_\_\_

Address: \_\_\_\_\_

\_\_\_\_\_