



OFFICE OF CHAIRMAN MUNICIPAL COMMITTEE GAMBAT

NO: MCG/N.I.T/ 185/2018

DATED: 12/04/2018

To,

The Director (CB)
Sindh Public Procurement Regulatory Authority.
Government of Sindh KARACHI.

SUBJECT: TENDER NOTICE FOR THE FINANCIAL YEAR 2017-18

Enclosed here with NIT bearing No: MCG/- 187 dt: 12/04/2018

Duly signed along with the following Documents for hosting on the Government website:

- ✓ Notification of Procurement Committee (Rule-7)
- ✓ Annual Procurement Plan for the Financial year 2017-18 (Rule-11)
- ✓ Notification of (CRC) Complaint Redressal Committee (Rule-31)
- ✓ Complete Set of Bidding documents.
- ✓ Cross Cheque Bearing No: 2335304 dated: 12/04/18 an amounting to
Rs: 2000/= Rupees (Two Thousands) only.

DA/as above

CHAIRMAN
MUNICIPAL COMMITTEE GAMBAT

8271
1728
19-04-2018



OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT

NO: MCG/N.I.T/ 187/2018

Dated: 12/04/2018

NOTICE INVITING TENDER

According to SPPEA rule 2010 (amendment 2013) the sealed covers tenders (single stage one envelope) we are invite for the following development works from all illegible contractors / firms / parties having experience in the relevant field.

DETAIL OF WORKS AS UNDER;-

SR#	NAME OF SCHEMES	E/COST (Million)	BID MONEY UPTO 5%	TENDER FEE	TIME ALLOWED
	Const. of S/Drains CC Block & CC Paver from House of Ummeed Ali to Iqbal Ahmed Ujjan, Ujjan Muhalla.	10,00,000	3%	1500	12 Months
2.	Const. of S/Drains & CC Block from Gh. Akabar Soomro to Nabi Bux Bareecho & Madarsa at Abbasi Mohalla.	10,00,000	3%	1500	12 Months
3.	Const. of S/Drains & CC Block from Gulab Ujjan to sanwal Ujjan, Haji Shah Muhalla.	500,000	3%	800	12 Months
4.	Const. of S/Drains & CC Block from Masjid to Atta Hussain, Haji Juwan Muhalla Gambat	500,000	3%	800	12 Months
5.	Const. of S/Drains & CC Block from Qalandar Bux Sonio to M. Uris Wandiar & Imam Dino Wandiar, Wandiar Muhalla.	10,00,000	3%	1500	12 Months
6.	Const. of S/Drains & CC Block from Arab Ujjan to House Lal Bux Ujjan, Ujjan Muhalla.	500,000	3%	800	12 Months
7.	Const. of S/Drains CC Block & CC Paver from Wapda Office Road to Judges Colony.	10,00,000	3%	1500	12 Months
8.	Const. of S/Drains CC Block & CC Paver from House Kaleem Channa to Khuhra Road.	10,00,000	3%	1500	12 Months
9.	Const. of S/Drains CC Block & CC Paver from Village Wandh Mahar to Village Haji Samar Ujjan.	10,00,000	3%	1500	12 Months
10.	Const. of S/Drains & CC Block from Wahid Bux Ujjan to Ahmed Ujjan, Ujjan Muhalla.	500,000	3%	800	12 Months
11.	Const. of S/Drains & CC Block from Mithal Mahar to Illahi Bux Mahar, Mahar Muhalla Gambat	500,000	3%	800	12 Months
12.	Const. of S/Drains & CC Block from Doctor Nisar Ahmed Shaikh to House of Muhammad Yaqub Ujjan Shaikh Muhalla Gambat	500,000	3%	800	12 Months
13.	Const. of S/Drains CC Block & CC Paver from New Shaikh Muhalla To Jumera Beach.	10,00,000	3%	1500	12 Months
14.	Const. of S/Drains CC Block & CC Paver Kissan Colony House of Raza Narejo to Bakhat Kalloro.	10,00,000	3%	1500	12 Months
15.	Const. of S/Drains CC Block & CC Paver from Sanat Nagar to Pipri Road Gambat	10,00,000	3%	1500	12 Months
16.	Repair of A/C Pressure/P/Pipe Rising main from old Disposal Ranipur Road work to Ronri Canal.	500,000	3%	800	12 Months
17.	Const. of S/Drains CC Block & CC Paver from H/O Noor Muhammad Panhwar to Gul Muhammad Narejo, Farooqi Muhalla Gambat	10,00,000	3%	1500	12 Months

18.	Const. of S/Drains CC Block & CC Paver at Village Haji Bhagyal Junejo to Zahoor Junejo, Juneja Muhalla.	10,00,000	3%	1500	12 Months
19.	Const. of S/Drains CC Block & CC Paver at Bisharat Colony Gambat	10,00,000	3%	1500	12 Months
20.	Const. of S/Drains CC Block & CC Paver from Zufiqar Naqvi Madrasa to H/O Mulan Kalan, Mehran Colony.	10,00,000	3%	1500	12 Months
21.	Const. of S/Drains CC Block & CC Paver from H/O Inayat Phull to House of Ghulam Sarwar Phull, Muhalla.	10,00,000	3%	1500	12 Months
22.	Const. of S/Drains CC Block & CC Paver from H/O Nisar Bhatti to Haji Ameer Ali Bhatti Village Shah Takiyo.	10,00,000	3%	1500	12 Months
23.	Const. of S/Drains CC Block & CC Paver Village Mureed from Abdul Sattar Mari to Muhkumdir Mari.	10,00,000	3%	1500	12 Months
24.	Const. of S/Drains CC Block & CC Paver from Dargah Ghousia Gambat to Abul Waah, Pir Muhalla.	10,00,000	3%	1500	12 Months
25.	Const. of S/Drains CC Block & CC Paver from House of Ghous Ali Shah Bukhari to Ali Muhammad, Sahita Mohalla.	10,00,000	3%	1500	12 Months
26.	Const. of S/Drains CC Block & CC Paver from Haji Shah to Dargah Hafiz Shah, Soomra Muhalla.	10,00,000	3%	1500	12 Months
27.	Const. of S/Drains CC Block & CC Paver from Telephone Exchange Road to Shop of Shabir Mangi, Gharibabad.	10,00,000	3%	1500	12 Months
28.	Const. of S/Drains CC Block & CC Paver from Hakeem Nazir Tunio to House of Iqbal Mallah, Gharibabad.	10,00,000	3%	1500	12 Months
29.	Const. of S/Drains CC Block & CC Paver Behind Press Club Street to House of (Late) Sanauallah Mallah, Muhalla.	10,00,000	3%	1500	12 Months
30.	Const. of S/Drains CC Block & CC Paver Telephone Exchange House of Ali Dino Sarohi to Old Market.	10,00,000	3%	1500	12 Months
31.	Const. of S/Drains CC Block & CC Paver from Hafeez Medical Store to street of Ghulam Haider, Shaikh Muhalla.	10,00,000	3%	1500	12 Months
32.	Const. of S/Drains CC Block & CC Paver from House of Qurban Shaikh to H/O Ustad Nooruddin Panhwar Anaj Mandi Road Gambat.	10,00,000	3%	1500	12 Months
33.	Const. of S/Drains CC Block & CC Paver from Sikandar Sonaro to House of Qurban Shaikh, Shaikh Muhalla.	10,00,000	3%	1500	12 Months
34.	Const. of S/Drains & CC Block from House of Iqbal Junejo to Sharif Sonaro Shop, Memon Muhalla.	500,000	3%	800	12 Months
35.	Const. of S/Drains CC Block & CC Paver from House Shafi Muhammad to Iqbal Junejo, Memon Muhalla.	10,00,000	3%	1500	12 Months
36.	Const. of S/Drains CC Block & CC Paver from House Haji Muneer Memon to Primary School, Memon Muhalla.	10,00,000	3%	1500	12 Months
37.	Construction and Renovation of Compound wall of Memon Mohalla Gambat Graveyard.	500,000	3%	800	12 Months
38.	Const. of S/Drains CC Block & CC Paver from H/O Ustad Atta Muhammad Kalo to Rehmania Madarsa, Muhalla.	10,00,000	3%	1500	12 Months
39.	Const. of S/Drains CC Block & CC Paver from Rehmania Madarsa to H/O Ustad Atta Muhammad Kalo, Kalla Muhalla.	10,00,000	3%	1500	12 Months
40.	Const. of S/Drains CC Block & CC Paver from H/O Abdul Hameed Thebo to Dhani Bux Thebo, Thebo Muhalla.	10,00,000	3%	1500	12 Months
41.	Const. of S/Drains CC Block & CC Paver from H/O Zaheer Siyal to Imdad Siyal, Noor Muhammad Siyal Muhalla.	10,00,000	3%	1500	12 Months
42.	Const. of S/Drains CC Block & CC Paver from H/O Ghulam Hussain Kalhoro to Gh. Qadir, Gh. Sarwar Wandiar	10,00,000	3%	1500	12 Months

43.	Const. of Compound Wall Graveyard of village Mureed Khan Mari.	10,00,000	3%	1500	12 Months
44.	Const. of Car /Taxi Stand Shade, Ranipur Road.	500,000	3%	800	12 Months
45.	Const. of S/Drains CC Block & CC Paver from Advocate Chambers to Session Court.	10,00,000	3%	1500	12 Months
46.	Const. of S/Drains CC Block & CC Paver from Agra Road to Irrigation House Gambat.	10,00,000	3%	1500	12 Months
47.	Const. of S/Drains CC Block & CC Paver from Keenjhar Hotel to Agha Pathan House, Pathan Muhalla.	10,00,000	3%	1500	12 Months
48.	Const. of S/Drains CC Block & CC Paver from National Highway N.5 to House of Sachal Mallah, Mallah Muhalla.	10,00,000	3%	1500	12 Months
49.	Const. of S/Drains CC Block & CC Paver Metal Road to Syed Shafqat Ali Shah Taluka Gambat	10,00,000	3%	1500	12 Months
50.	Const. of S/Drains CC Block & CC Paver from H/O Gh. Nabi Phull to Atta Muhammad Phull, Phull Muhalla.	10,00,000	3%	1500	12 Months
51.	Const. of S/Drains CC Block & CC Paver from House of Zahid Bhatti to Jabbar Abbasi, Abbasi Muhalla.	10,00,000	3%	1500	12 Months
52.	Const. of S/Drains CC Block & CC Paver from Illahi Bux Shaikh to Mukhtiarkar Office Taluka Gambat	10,00,000	3%	1500	12 Months
53.	Const. of compound wall at graveyard of Pir Lolai.	10,00,000	3%	1500	12 Months
54.	Const. of Shade for Garbage Sukkur Machine.	10,00,000	3%	1500	12 Months
55.	Const. of S/Drains CC Block & CC Paver of walking track at Playgraound of Murad High School Gambat.	500,000	3%	800	12 Months
56.	Const. of Bridge / Culvert over Sanhr Waah, Bhatti Muhalla Gambat	500,000	3%	800	12 Months
57.	Const. of S/Drains CC Block & CC Paver @East side of Assembly Ground, Shaikh Muhalla.	10,00,000	3%	1500	12 Months
58.	Const. of S/Drains CC Block & CC Paver @West side of Assembly Ground, Shaikh Muhalla.	10,00,000	3%	1500	12 Months
59.	Const. of S/Drains CC Block & CC Paver from Makka Madarsa to Khuhra Road, Shaikh Muhalla.	10,00,000	3%	1500	12 Months
60.	Const. of S/Drains CC Block & CC Paver from House of Muhammad Ali Sahito to Abdullah, Kanasro Muhalla.	10,00,000	3%	1500	12 Months
61.	Const. of S/Drains CC Block & CC Paver From H/O Qalandar Bux Junejo to Altaf Junejo Floor Mill Agra Road.	10,00,000	3%	1500	12 Months
62.	Const. of S/Drains CC Block & CC Paver at Village Abdul Karim Phull, Phull Mohalla.	10,00,000	3%	1500	12 Months
63.	Const. of S/Drains CC Block & CC Paver from H/O Deen Mohd to Ali Khan, Phull Muhalla.	10,00,000	3%	1500	12 Months
64.	Const. of S/Drains CC Block & CC Paver from H/O Bashir Arain to Ali Mohammad Arain Muhalla.	10,00,000	3%	1500	12 Months
65.	Const. of S/Drains CC Block & CC Paver from H/O Azizullah Shaikh to Ustad Zubair Shaikh, Gulshan- e- Raheem Muhalla.	10,00,000	3%	1500	12 Months
66.	Const. of S/Drains CC Block & CC Paver from H/O Ustad Irshad Gopang to Naseem Gorayo, Bari Muhalla.	10,00,000	3%	1500	12 Months
67.	Const. of S/Drains CC Block & CC Paver from H/O Ustad Bakhat to Umeed Ali Narejo, Kissan Muhalla.	10,00,000	3%	1500	12 Months
68.	Const. of S/Drains CC Block & CC Paver from H/O Sheral Ujjan to Manzoor Shah, Larhi Muhalla.	10,00,000	3%	1500	12 Months
69.	Const. of S/Drains CC Block & CC Paver from H/O Nazar Ujjan to Sheral Ujjan, Larhi Muhalla.	10,00,000	3%	1500	12 Months

70.	Const. of S/Drains CC Block & CC Paver from H/O Masroor Sahito to Rauf Shaikh, Hamza Muhalla.	10,00,000	3%	1500	12 Months
71.	Const. of S/Drains CC Block & CC Paver from H/O Allah Rakhiyo Mari to Allah Dad Mari, Mureed Muhalla.	10,00,000	3%	1500	12 Months
72.	Const. of S/Drains CC Block & CC Paver from H/O Akhtiar Wandiar to Mukhtiar Wandiar, Wandiar Muhalla.	10,00,000	3%	1500	12 Months
73.	Const. of S/Drains CC Block & CC Paver at Muhalla Gharibabad from T&T Office to House of Athar Ali Samo.	10,00,000	3%	1500	12 Months
74.	Const. of S/Drains & CC Block from M. Shareef Phull to Mir Phull, Phull Mohalla	10,00,000	3%	1500	12 Months
75.	Barriers in the Gambat City.	10,00,000	3%	1500	12 Months
76.	Public Toilet at Old Municipal Committee Gambat Park.	500,000	3%	800	12 Months
77.	Renovation of Compound Wall at Government Murad High School Playground Gambat	10,00,000	3%	1500	12 Months
78.	Repairing and Renovation of Shops @ Vegetable Market Gambat City from Shop No.01 to Shop No.05	10,00,000	3%	1500	12 Months
	Repairing and Renovation of Shops @ Vegetable Market Gambat City from Shop No.06 to Shop No.10	10,00,000	3%	1500	12 Months
79.	Const. of S/Drains CC Block & CC Paver from H/O Dr. Nabi Bux Shaikh, Agra Road Gambat	10,00,000	3%	1500	12 Months
80.	Const. of S/Drains CC Block & CC Paver from H/O Inayat Ujjan to Suleman Ujjan, Ujjan Muhalla Gambat	10,00,000	3%	1500	12 Months
81.	Repair and streets lights/ Polls from Agra Road to Ali Bux Ujjan Village Gambat	10,00,000	3%	1500	12 Months
82.	Const. of S/Drains CC Block & CC Paver from H/O of Nooruddin Panhwar to H/ O Bahadur Shaikh, Shaikh Muhalla Gambat	10,00,000	3%	1500	12 Months
83.	Const. of S/Drains CC Block & CC Paver from Govt. Girls High School to Anaaj Mandi.	10,00,000	3%	1500	12 Months
84.	Const. of S/Drains CC Block & CC Paver from Soomra House to main Old market Road, Gharibabad Muhalla.	10,00,000	3%	1500	12 Months
85.	Const. of S/Drains CC Block & CC Paver from H/O Khan Muhammad to Shafi Muhammad Shaikh, Shaikh Muhalla.	10,00,000	3%	1500	12 Months
86.	Dust Bins for garbage removal for ward No.02 to Ward No. 07	10,00,000	3%	1500	12 Months
87.	Dust Bins for garbage removal for ward No.08 to Ward No.13	10,00,000	3%	1500	12 Months

TERMS & CONDITIONS

Tender Schedule shall be as follows: -

1.	1- Receiving of Applications and Issuance of Tenders	20-04-18 to 8-5-18 up to 12:00 PM	Office of The Chairman M.C Gambat
	2- Dropping of Tenders	9-5-18 at 2:30 PM	In the Office of Chairman M.C Gambat
	3- Opening of Tenders	9-5-18 at 3:00 PM	Tender opening Committee in the Office of Chairman M.C Gambat
2.	In case of any reasons if the tender are not responded on the above date, the next date of opening will be and the Tender documents will also be available from to		

3.	The bidding documents will be issued to the interested firms / contractor on submission of written request on the letter head and on payment of refundable cost of tender price mentioned against each work. through pay order from any scheduled bank in favour Municipal Committee Gambat bidding documents can also be downloaded from the SPPRA website www.pprasindh.gov.pk with tender fee mentioned as above by post.
4.	The earnest money equal to 3% schedule items in shape of pay order from any scheduled bank in favour Municipal Committee Gambat must come with tender documents otherwise the tender will be rejected.
5.	The contractor must mentioned there complete & correct postal address in tender documents & quote the rates both in words and figures, incomplete / conditional tenders will not be accepted.
6.	If any fake documents are found then the tender is liable to be rejected-cancelled without any compensation, but penalty will be imposed according to rules.
7.	Canvassing in connection of tenders is strictly prohibited and tender submitted by the contractors who are reported to be in, will liable for rejection.
8.	All the tenders will be dropped on as per above schedule up to 2:30 PM will be opened by the Procurement Committee in the office of Chairman, Municipal Committee Gambat Taluka Gambat Distt: Khairpur Mir's at 3:00 PM in presence of contractors / parties / firms / bidders who wish to be present.
9.	In case, the date of opening declared as a public holiday by the Government, or non working day due to any reason, next official day shall be then to be the date for submission and opening of tenders at the same time
10.	The procuring agency may reject all or any bids / tenders at any time to the acceptance of a bid or proposal, reject to the relevant according a SPPRA rules 2010 amendment 2013.
11.	Tender will not be received after the schedule time.
12.	<p><u>Eligibility / Qualification criteria.</u></p> <p>i) Registration Certificate with Sindh Revenue Board.</p> <p>ii) NTN Certificate</p> <p>iii) Relevant Experience 05 years</p> <p>iv) Turn-over of at least 03 years</p> <p>v) Valid Professional Tax</p>

✓ **Director (CB) SPPRA, Government of Sindh Karachi**
With a request to up load on website of SPPRA (Authority)

CHAIRMAN
MUNICIPAL COMMITTEE GAMBAT

- Copy forwarded with compliments to the Secretary, LGD (GOS) Karachi for kind information.
- Copy forwarded with compliments to the Director, Local Government Sukkur Division Sukkur for kind information.
- Copy forwarded with compliments to the Assistant Director, Local Govt: Khairpur for kind information.
- Copy to Notice Board for Publicity
- Copy to NIT File / Office Record

CHAIRMAN
MUNICIPAL COMMITTEE GAMBAT

ANNUAL PROCUREMENT PLAN

(Works, Goods & Services)


Financial Year 2017-18

Sr.	DESCRIPTION OF PROCUREMENT	QTY (WHERE APPLICABLE)	ESTIMATE UNIT COST (WHERE APPLICABLE)	ESTIMATED TOTAL COST	FUNDS ALLOCATED	SOURCE OF FUNDS (ADP/ NON-ADP)	PROPOSED PROCUREMENT METHOD	TIMING OF PROCUREMENTS			REMARKS
								1 st Qtr.	2 nd Qtr.	3 rd Qtr.	
1.	Const. of S/Drains CC Block & CC Paver from House of Umneed Ali to Iqbal Ahmed Ujjan. Ujjan Muhalla.	----	----	10,00,000	10,00,000	Ovn Source (OZI)	Single Stage one envelope	--	--	--	Subject to of 1
2.	Const. of S/Drains & CC Block from Gh. Akabar Soomro to Nabi Bux Barecho & Madarsa at Abbasi Mohalla.	----	----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--
3.	Const. of S/Drains & CC Block from Gulab Ujjan to sanval Ujjan. Haji Shah Muhalla.	----	----	500,000	500,000	--do--	--do--	--	--	--	--do--
4.	Const. of S/Drains & CC Block from Masjid to Alta Hussain. Haji Juwan Muhalla Gamba	----	----	500,000	500,000	--do--	--do--	--	--	--	--do--
5.	Const. of S/Drains & CC Block from Qalandar Bux Sonio to M. Uris Wandiar & Imam Dino Wandiar. Wandiar Muhalla.	----	----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--
6.	Const. of S/Drains & CC Block from Arab Ujjan to House Lal Bux Ujjan. Ujjan Muhalla.	----	----	500,000	500,000	--do--	--do--	--	--	--	--do--
7.	Const. of S/Drains & CC Block from Madarsa Office Road to Judges Colony.	----	----	10,00,000	10,00,000	do	do	--	--	--	--do--
8.	Const. of S/Drains CC Block & CC Paver from House Kalcem Channa to Khuhra Road.	----	----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--
9.	Const. of S/Drains CC Block & CC Paver from Village Wandh Mahar to Village Haji Saman Ujjan.	----	----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--
10.	Const. of S/Drains & CC Block from Wahid Bux Ujjan to Ahmed Ujjan. Ujjan Muhalla.	----	----	500,000	500,000	--do--	--do--	--	--	--	--do--
11.	Const. of S/Drains & CC Block from Mihal Mahar to Iltahi Bux Mahar. Mahar Muhalla Gamba	----	----	500,000	500,000	--do--	--do--	--	--	--	--do--
12.	Const. of S/Drains & CC Block from Doctor Nisar Ahmed Shaikh to House of Muhammad Yaqoob Ujjan Shaikh Muhalla Gamba	----	----	500,000	500,000	--do--	--do--	--	--	--	--do--
13.	Const. of S/Drains CC Block & CC Paver from New Shaikh Muhalla to Jumeri Beach.	----	----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--

14.	Const. of S/Drains CC Block & CC Paver Kissan Colony House of Raiza Narejo to Bakhat Kalhoro.	-----	-----	10,00,000	10,00,000	Own Source (OZT)	Single Stage one envelope	--	--	--	Subject to A of Fd
15.	Const. of S/Drains CC Block & CC Paver from Sanat Nagar to Pipli Road Gambhat	-----	-----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--
16.	Repair of A/C Pressure/P/Pipe Rising main from old Disposal Ranipur Road work to Kohri Canal.	-----	-----	500,000	500,000	--do--	--do--	--	--	--	--do--
17.	Const. of S/Drains CC Block & CC Paver from H/O Noor Muhammad Panhwar to Gul Muhammad Narejo, Farooqi Muhalla Gambhat	-----	-----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--
18.	Const. of S/Drains CC Block & CC Paver at Village Haji Bhagyal Junejo to Zahoor Junejo, Junjeja Muhalla.	-----	-----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--
19.	Const. of S/Drains CC Block & CC Paver at Bisharat Colony Gambhat	-----	-----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--
20.	Const. of S/D/Drains CC Block & CC Paver from Zulfqar Naqvi Madrasa to H/O Mullan Kalan, Mehran Colony.	-----	-----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--
21.	Const. of S/Drains CC Block & CC Paver from H/O Inayat Phull to House of Ghulam Sarwar Phull Muhalla.	-----	-----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--
22.	Const. of S/Drains CC Block & CC Paver from H/O Nisar Bhatti to Haji Amir Ali Bhatti Village Shah Takyo.	-----	-----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--
23.	Const. of S/Drains CC Block & CC Paver Village Mureed from Abdul Sattar Mari to Mukkumdin Mari.	-----	-----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--
24.	Const. of S/Drains CC Block & CC Paver from Dargah Chousia Gambhat to Abul Waah, Pir Muhalla.	-----	-----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--
25.	Const. of S/Drains CC Block & CC Paver from House of Ghous Ali Shah Bukhari to Ali Muhammad, Sahita Mohalla.	-----	-----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--
26.	Const. of S/Drains CC Block & CC Paver from Haji Shah to Dargah Hafiz Shah, Soomra Muhalla.	-----	-----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--
27.	Const. of S/Drains CC Block & CC Paver from Telephone Exchange Road to Shop of Shabir Mangi, Charhabad.	-----	-----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--
28.	Const. of S/Drains CC Block & CC Paver from Hakeem Wazir Junjo to House of Iqbal Mallah, Charhabad.	-----	-----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--
29.	Const. of S/Drains CC Block & CC Paver Behind Press Club Street to House of (Late) Sanaullah Mallah, Muhalla.	-----	-----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--
30.	Const. of S/Drains CC Block & CC Paver Telephone Exchange House of Ali Dino Sarohi to Old Market.	-----	-----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--
31.	Const. of S/Drains CC Block & CC Paver from Hafiz Medical Store to street of Ghulam Haider, Shaikh Muhalla.	-----	-----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--



32.	Const. of S/Drains CC Block & CC Paver from House of Qurban Shaikh to Anaj Mandi, Shaikh Mughalla.	-----	-----	10,00,000	10,00,000	Own Source (OZT)	Single Stage one envelope	--	--	--	Subject to A of Fin
33.	Const. of S/Drains CC Block & CC Paver from Sikandar Sonaro to House of Qurban Shaikh, Shaikh Mughalla.	-----	-----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--
34.	Const. of S/Drains & CC Block from House of Iqbal Junejo to Sharif Sonaro Shop, Memon Mughalla.	-----	-----	500,000	500,000	--do--	--do--	--	--	--	--do--
35.	Const. of S/Drains CC Block & CC Paver from House Shaif Muhammad to Iqbal Junejo, Memon Mughalla.	-----	-----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--
36.	Const. of S/Drains CC Block & CC Paver from House Haji Munter Memon to Primary School, Memon Mughalla.	-----	-----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--
37.	Construction and Renovation of Compound wall of Memrom Mohalla Gambat Graveyard.	-----	-----	500,000	500,000	--do--	--do--	--	--	--	--do--
38.	Const. of S/Drains CC Block & CC Paver from H/O Ustad Atta Muhammad Kalo to Rehmania Madarsa, Mughalla.	-----	-----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--
39.	Const. of S/Drains CC Block & CC Paver from Rehmania Madarsa to H/O Ustad Atta Muhammad Kalo, Kalla Mughalla.	-----	-----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--
40.	Const. of S/Drains CC Block & CC Paver from H/O Abdul Hameed Thebo to Dhani Bus Thebo, Thebo Mughalla.	-----	-----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--
41.	Const. of S/Drains CC Block & CC Paver from H/O Zaher Siyal to Imdad Siyal, Noor Muhammad Siyal Mughalla.	-----	-----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--
42.	Const. of S/Drains CC Block & CC Paver from H/O Gh. Hussain Kalhoro to Gh. Qadir, Gh. Sarwar, Haji Khuda Bus at Ujjan Mughalla.	-----	-----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--
43.	Const. of Compound Wall around Graveyard of village Muzrod Khan Mari										
44.	Const. of Car/Taxi Stand Shade, Ranipur Road.	-----	-----	500,000	500,000	--do--	--do--	--	--	--	--do--
45.	Const. of S/Drains CC Block & CC Paver from Advocate Chambers to Session Court.	-----	-----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--
46.	Const. of S/Drains CC Block & CC Paver from Agra Road to Irrigation House Giambat.	-----	-----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--
47.	Const. of S/Drains CC Block & CC Paver from Keenhar Hotel to Agha Pathan House, Pathan Mughalla.	-----	-----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--
48.	Const. of S/Drains CC Block & CC Paver from National Highway N.5 to House of Saehal Mallah, Mallah Mughalla.	-----	-----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--
49.	Const. of S/Drains CC Block & CC Paver Metal Road to Syed Sharifqat Ali Shah, Farooqi Mughalla.	-----	-----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--




50.	Const. of S/Drains CC Block & CC Paver from H/O Gh. Nabi Phull to Atta Muhammad Phull, Phull Muhalla.	-----	-----	10,00,000	10,00,000	Own Source (OZT)	Single Stage one envelope	--	--	--	Subject to A of Fu
51.	Const. of S/Drains CC Block & CC Paver from House of Zahid Bhati to Jabbar Abbasi, Abbasi Muhalla.	-----	-----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--
52.	Const. of S/Drains CC Block & CC Paver from Illahi Bux Shaikh to Mukhtarkar Office.	-----	-----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--
53.	Const. of compound wall at graveyard of Pir Lolai.	-----	-----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--
54.	Const. of Shade for Garbage Sukkur Machine.	-----	-----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--
55.	Const. of S/Drains CC Block & CC Paver of walking track at Playground of Murad High School Gambat.	-----	-----	500,000	500,000	--do--	--do--	--	--	--	--do--
56.	Const. of Bridge / Culvert over Santhro Waah, Bhati Muhalla Gambat	-----	-----	500,000	500,000	--do--	--do--	--	--	--	--do--
57.	Const. of S/Drains CC Block & CC Paver at West side of Assembly Ground, Shaikh Muhalla.	-----	-----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--
58.	Const. of S/Drains CC Block & CC Paver at East side of Assembly Ground, Shaikh Muhalla.	-----	-----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--
59.	Const. of S/Drains CC Block & CC Paver from Makka Madarsa to Khuthra Road, Shaikh Muhalla.	-----	-----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--
60.	Const. of S/Drains CC Block & CC Paver from House of Muhammad Ali Sahito to Abdullah, Kanasro Muhalla.	-----	-----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--
61.	Const. of S/Drains CC Block & CC Paver From H/O Qalandar	-----	-----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--
Drains to Akh Tanje, Pless Mill Area Road											
62.	Const. of S/Drains CC Block & CC Paver at Village Abdul Karim Phull, Phull Mohalla.	-----	-----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--
63.	Const. of S/Drains CC Block & CC Paver from H/O Deen Mohd to Ali Khan, Phull Muhalla.	-----	-----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--
64.	Const. of S/Drains CC Block & CC Paver from H/O Bashir Arain to Ali Mohammad Arain Muhalla.	-----	-----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--
65.	Const. of S/Drains CC Block & CC Paver from H/O Azizullah Shaikh to Ustad Zubair Shaikh, Gulshan-e-Rahceem Muhalla.	-----	-----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--
66.	Const. of S/Drains CC Block & CC Paver from H/O Ustad Irshad (opang to Naseem Gorgyo, Bari Muhalla.	-----	-----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--
67.	Const. of S/Drains CC Block & CC Paver from H/O Ustad Bakhat to Limeed Ali Narajo, Kissan Muhalla.	-----	-----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--

68.	Const. of S/Drains CC Block & CC Paver from H/O Sheral Ujjan to Manzoor Shah, Larhi Muhalla.	-----	-----	10,00,000	10,00,000	Own Source (OZI)	Single Stage one envelope	--	--	--	--do--
69.	Const. of S/Drains CC Block & CC Paver from H/O Nazar Ujjan to Sheral Ujjan, Larhi Muhalla.	-----	-----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--
70.	Const. of S/Drains CC Block & CC Paver from H/O Mastoor Sahito to Rauli Shaikh, Hamza Muhalla.	-----	-----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--
71.	Const. of S/Drains CC Block & CC Paver from H/O Allah Rakhio Mari to Allah Dad Mari, Mureed Muhalla.	-----	-----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--
72.	Const. of S/Drains CC Block & CC Paver from H/O Akhtar Wardiar to Mukhtiar Wardiar, Wandiar Muhalla.	-----	-----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--
73.	Const. of S/Drains CC Block & CC Paver at Muhalla Charhabad from T&T Office to House of Athar Ali Samo.	-----	-----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--
74.	Const. of S/Drains & CC Block from M. Shareef Phull to Mir Phull, Phull Mohalla.	-----	-----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--
75.	Barriers in the Gambat City.	-----	-----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--
76.	Public Toilet at Old Municipal Committee Gambat Park.	-----	-----	500,000	500,000	--do--	--do--	--	--	--	--do--
77.	Renovation of Compound Wall at Government Murad High School Playground Gambat	-----	-----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--
78.	a) Repairing and Renovation of Shops @ Vegetable Market Gambat City from Shop No.01 to Shop No.05 b) Repairing and Renovation of Shops @ Vegetable Market Gambat City from Shop No.06 to Shop No.11	-----	-----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--
79.	Const. of S/Drains CC Block & CC Paver from H/O Dr. Nabi Bux Shaikh, Agra Road Gambat	-----	-----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--
80.	Const. of S/Drains CC Block & CC Paver from H/O Inayat Ujjan to Suleman Ujjan, Ujjan Muhalla Gambat	-----	-----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--
81.	Repair and streets lights/ Polls from Agra Road to Ali Bux Ujjan Village Gambat	-----	-----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--
82.	Const. of S/Drains CC Block & CC Paver from H/O of Nooruddin Panhwar to H/O Bataadur Shaikh, Shaikh Muhalla Gambat	-----	-----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--
83.	Const. of S/Drains CC Block & CC Paver from Govt. Girls High School to Aneji Mandi.	-----	-----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--
84.	Const. of S/Drains CC Block & CC Paver from Soomra House to main Old market Road, Charhabad Muhalla.	-----	-----	10,00,000	10,00,000	--do--	--do--	--	--	--	--do--



85.	Const. of S/Drains CC Block & CC Paver from H/O Khan Muhammad to Sahfi Muhammad Shaikh, Shaikh Muhalla.	----	----	10,00,000	10,00,000	Own Source (OZI)	Single Stage one envelope	--	--	--	----
86.	Dust Bins for garbage removal for ward No.02 to Ward No. 07	----	----	10,00,000	10,00,000	Own Source (OZI)	Single Stage one envelope	--	--	--	Subject to of
87.	Dust Bins for garbage removal for ward No.08 to Ward No.13	----	----	10,00,000	10,00,000	Own Source (OZI)	Single Stage one envelope	--	--	--	Subject to of

CHAIRMAN
MUNICIPAL COMMITTEE GAMBAT



No. SOII/(LG)/8-23/2017/SUK
GOVERNMENT OF SINDH
LOCAL GOVERNMENT DEPARTMENT

Karachi dated the 03rd April, 2018

NOTIFICATION

With the approval of Competent Authority, a Procurement Committee is hereby consisted under Rule-7 of SPPRA rules, 2010 of Municipal Committee, Gambat, District Khairpur, during current Financial year 2017-18,

- | | |
|---|----------|
| 1. The Deputy Director,
Local Government Khairpur. | Chairman |
| 2. The Chief Municipal Officer,
Municipal Committee, Gambat. | Member |
| 3. Assistant Engineer,
(P.H.E.D) Sub Division Gambat. | Member |

2. The Function and responsibilities of Procurement Committee shall be as under:-
Rule-7 (Section-8 of SPPRA Rule 2010)

- i) Preparing Bidding Documents.
- ii) Carrying out technical as well as financial evolution of the bids
- iii) Prepare evolution reports as provided in Rule 45.
- iv) Making recommendations for the award of contract to the Competent Authority.
- v) Perform any other function ancillary and incidental to the above.

-SECRETARY TO GOVT: OF SINDH-


Karachi, dated the 03rd April, 2018

NO.SO-II (LG)/8-08/2017/SUK

A copy is forwarded for information and necessary action to:-

1. The Director, Sindh Public Procurement Regularity Authority, Karachi.
2. The Deputy Director, Local Government Khairpur. He is requested to ensure fulfillment of all codal formalities in accordance with rules / policy.
3. The Chairman, Municipal Committee, Gambat, District Khairpur, with reference to your letter No. MCG/-63/2018 dated 09-03-2018.
4. The Chief Municipal Officer, Municipal Committee, Gambat, District Khairpur.
5. The Assistant Engineer, (P.H.E.D) Sub Division Gambat.
6. PS to Secretary, Local Govt. Department, Government of Sindh, Karachi.
7. PS to Additional Secretary, (LCD), Government of Sindh, Karachi.
8. Office order file.


(SYED NAZAR MUHAMMAD SHAH)
SECTION OFFICER-II



No. SOII/(LG)/8-08/2017/SUK
GOVERNMENT OF SINDH
LOCAL GOVERNMENT DEPARTMENT

Karachi dated the 03rd April, 2018

NOTIFICATION

With the approval of Competent Authority, a compliant Redressal Committee is hereby consisted under Rule 31(!) (2) of SPPRA rules, 2010 of Municipal Committee, Gambat, District Khairpur, during current Financial year 2017-18,

- | | |
|--|----------|
| 1. Chairman,
Municipal Committee, Gambat,
District Khairpur. | Chairman |
| 2. Executive Engineer Works &
Services Department
(Highway Sukkur) | Member |
| 3. Assistant Accounts Officer,
Focal Person to District Accounts Officer. | Member |

2. The Function and responsibilities of complaint Redressal Committee shall be as under: - (Section-31(13)(a,b,c,d,e & f) of SPPRA Rule 2010).

-SECRETARY TO GOVT: OF SINDH-

Karachi, dated the 03rd April, 2018

NO.SO-II (LG)/8-08/2017/SUK

A copy is forwarded for information and necessary action to:-

1. The Director, Sindh Public Procurement Regularity Authority, Karachi.
2. The Chairman, Municipal Committee, Gambat, with reference to your letter No. MCG/62/2018 dated 09-03-2018. He is requested to ensure fulfillment of all codal formalities in accordance with rules /policy.
3. The Chief Municipal Officer, Municipal Committee, Gambat, District Kahirpur.
4. The Executive Engineer Works & Services Department (Highway Sukkur).
5. The Assistant Accounts Officer Focal Person to District Accounts Officer.
6. PS to Secretary, Local Govt. Department, Government of Sindh, Karachi.
7. PS to Additional Secretary, (LGD), Government of Sindh, Karachi.
8. Office order file.


(SYED NAZAR MUHAMMAD SHAH)
SECTION OFFICER-II

SPPRA BIDDING DOCUMENT

STANDARD BIDDING DOCUMENT
PROCUREMENT OF WORKS
(For Contracts Costing up to Rs 2.5 MILLION)

Standard Bidding Document is intended as a model for admeasurements (Percentage Rate/unit price for unit rates in a Bill of Quantities) types of contract. The main text refers to admeasurements contracts.

Instructions to Bidders/ Procuring Agencies.

General Rules and Directions for the Guidance of Contractors.

This section of the bidding documents should provide the information necessary for bidders to prepare responsive bids, in accordance with the requirements of the Procuring Agency. It should also give information on bid submission, opening and evaluation, and on the award of contract.

Matters governing the performance of the Contract or payments under the Contract, or matters affecting the risks, rights, and obligations of the parties under the Contract are included as Conditions of Contract and *Contract Data*.

The *Instructions to Bidders* will not be part of the Contract and will cease to have effect once the contract is signed.

1. All work proposed to be executed by contract shall be notified in a form of Notice Inviting Tender (NIT)/Invitation for Bid (IFB) hoisted on website of Authority and Procuring Agency and also in printed media where ever required as per rules.

NIT must state the description of the work, dates, time and place of issuing, submission, opening of bids, completion time, cost of bidding document and bid security either in lump sum or percentage of Estimated Cost/Bid Cost. The interested bidder must have valid NTN also.

2. Content of Bidding Documents must include but not limited to: Conditions of contract, Contract Data, specifications or its reference, Bill of Quantities containing description of items with scheduled/item rates with premium to be filled in form of percentage above/ below or on item rates to be quoted, Form of Agreement and drawings.

3. **Fixed Price Contracts:** The Bid prices and rates are fixed during currency of contract and under no circumstance shall any contractor be entitled to claim enhanced rates for any item in this contract.

4. The Procuring Agency shall have right of rejecting all or any of the tenders as per provisions of SPP Rules 2010.

5. **Conditional Offer:** Any person who submits a tender shall fill up the usual printed form stating at what percentage above or below on the rates specified in Bill of Quantities for items of work to be carried out: he is willing to undertake the work and also quote the rates for those items which are based on market rates. Only one rate of such percentage, on all the Scheduled Rates shall be framed. Tenders, which propose any alternative in the works specified in the said form of invitation to tender or in the time

allowed for carrying out the work, or which contain any other conditions, will be liable to rejection. No printed form of tender shall include a tender for more than one work, but if contractor wish to tender for two or more works, they shall submit a separate tender for each.

The envelope containing the tender documents shall refer the name and number of the work.


6. All works shall be measured by standard instruments according to the rules.
7. Bidders shall provide evidence of their eligibility as and when requested by the Procuring Agency.
8. Any bid received by the Agency after the deadline for submission of bids shall be rejected and returned unopened to the bidder.
9. Prior to the detailed evaluation of bids, the Procuring Agency will determine whether the bidder fulfills all legal requirements of eligibility criteria given in the tender notice such as registration with tax authorities, registration with PEC (where applicable), turnover statement, experience statement, and any other condition mentioned in the NIT and bidding document. If the bidder does not fulfill any of these conditions, it shall not be evaluated further.
10. Bid without bid security of required amount and prescribed form shall be rejected.
11. Bids determined to be substantially responsive shall be checked for any arithmetic errors. Arithmetical errors shall be rectified on the following basis;
 - (A) **In case of schedule rates**, the amount of percentage quoted above or below will be checked and added or subtracted from amount of bill of quantities to arrive the final bid cost.
 - (B) **In case of item rates**, If there is a discrepancy between the unit rate and the total cost that is obtained by multiplying the unit rate and quantity, the unit rate shall prevail and the total cost will be corrected unless in the opinion of the Agency there is an obvious misplacement of the decimal point in the unit rate, in which case the total cost as quoted will govern and the unit rate corrected. If there is a discrepancy between the total bid amount and the sum of total costs, the sum of the total costs shall prevail and the total bid amount shall be corrected.
 - (C) Where there is a discrepancy between the amounts in figures and in words, the amount in words will govern.

BIDDING DATA

(This section should be filled in by the Engineer/Procuring Agency before issuance of the Bidding Documents).

- (a). Name of Procuring Agency _____
- (b). Brief Description of Works _____
- (c). Procuring Agency's address:- _____
- (d). Estimated Cost:- _____
- (e). Amount of Bid Security:- _____ (Fill in lump sum amount
or in % age of bid amount /estimated cost, but not exceeding 5%)
- (f). Period of Bid Validity (days):- _____ (Not more than sixty days).
- (g). Security Deposit:- (including bid security):- _____
(in % age of bid amount /estimated cost equal to 10%)
- (h). Percentage, if any, to be deducted from bills :- _____
- (i). Deadline for Submission of Bids along with time :- _____
- (j). Venue, Time, and Date of Bid Opening:- _____
- (k). Time for Completion from written order of commence: - _____
- (L). Liquidity damages:- _____ (0.05 of Estimated Cost or Bid cost
per day of delay, but total not exceeding 10%).
- (m). Deposit Receipt No: Date: Amount:(in words and figures)

(Executive Engineer/Authority issuing bidding document)

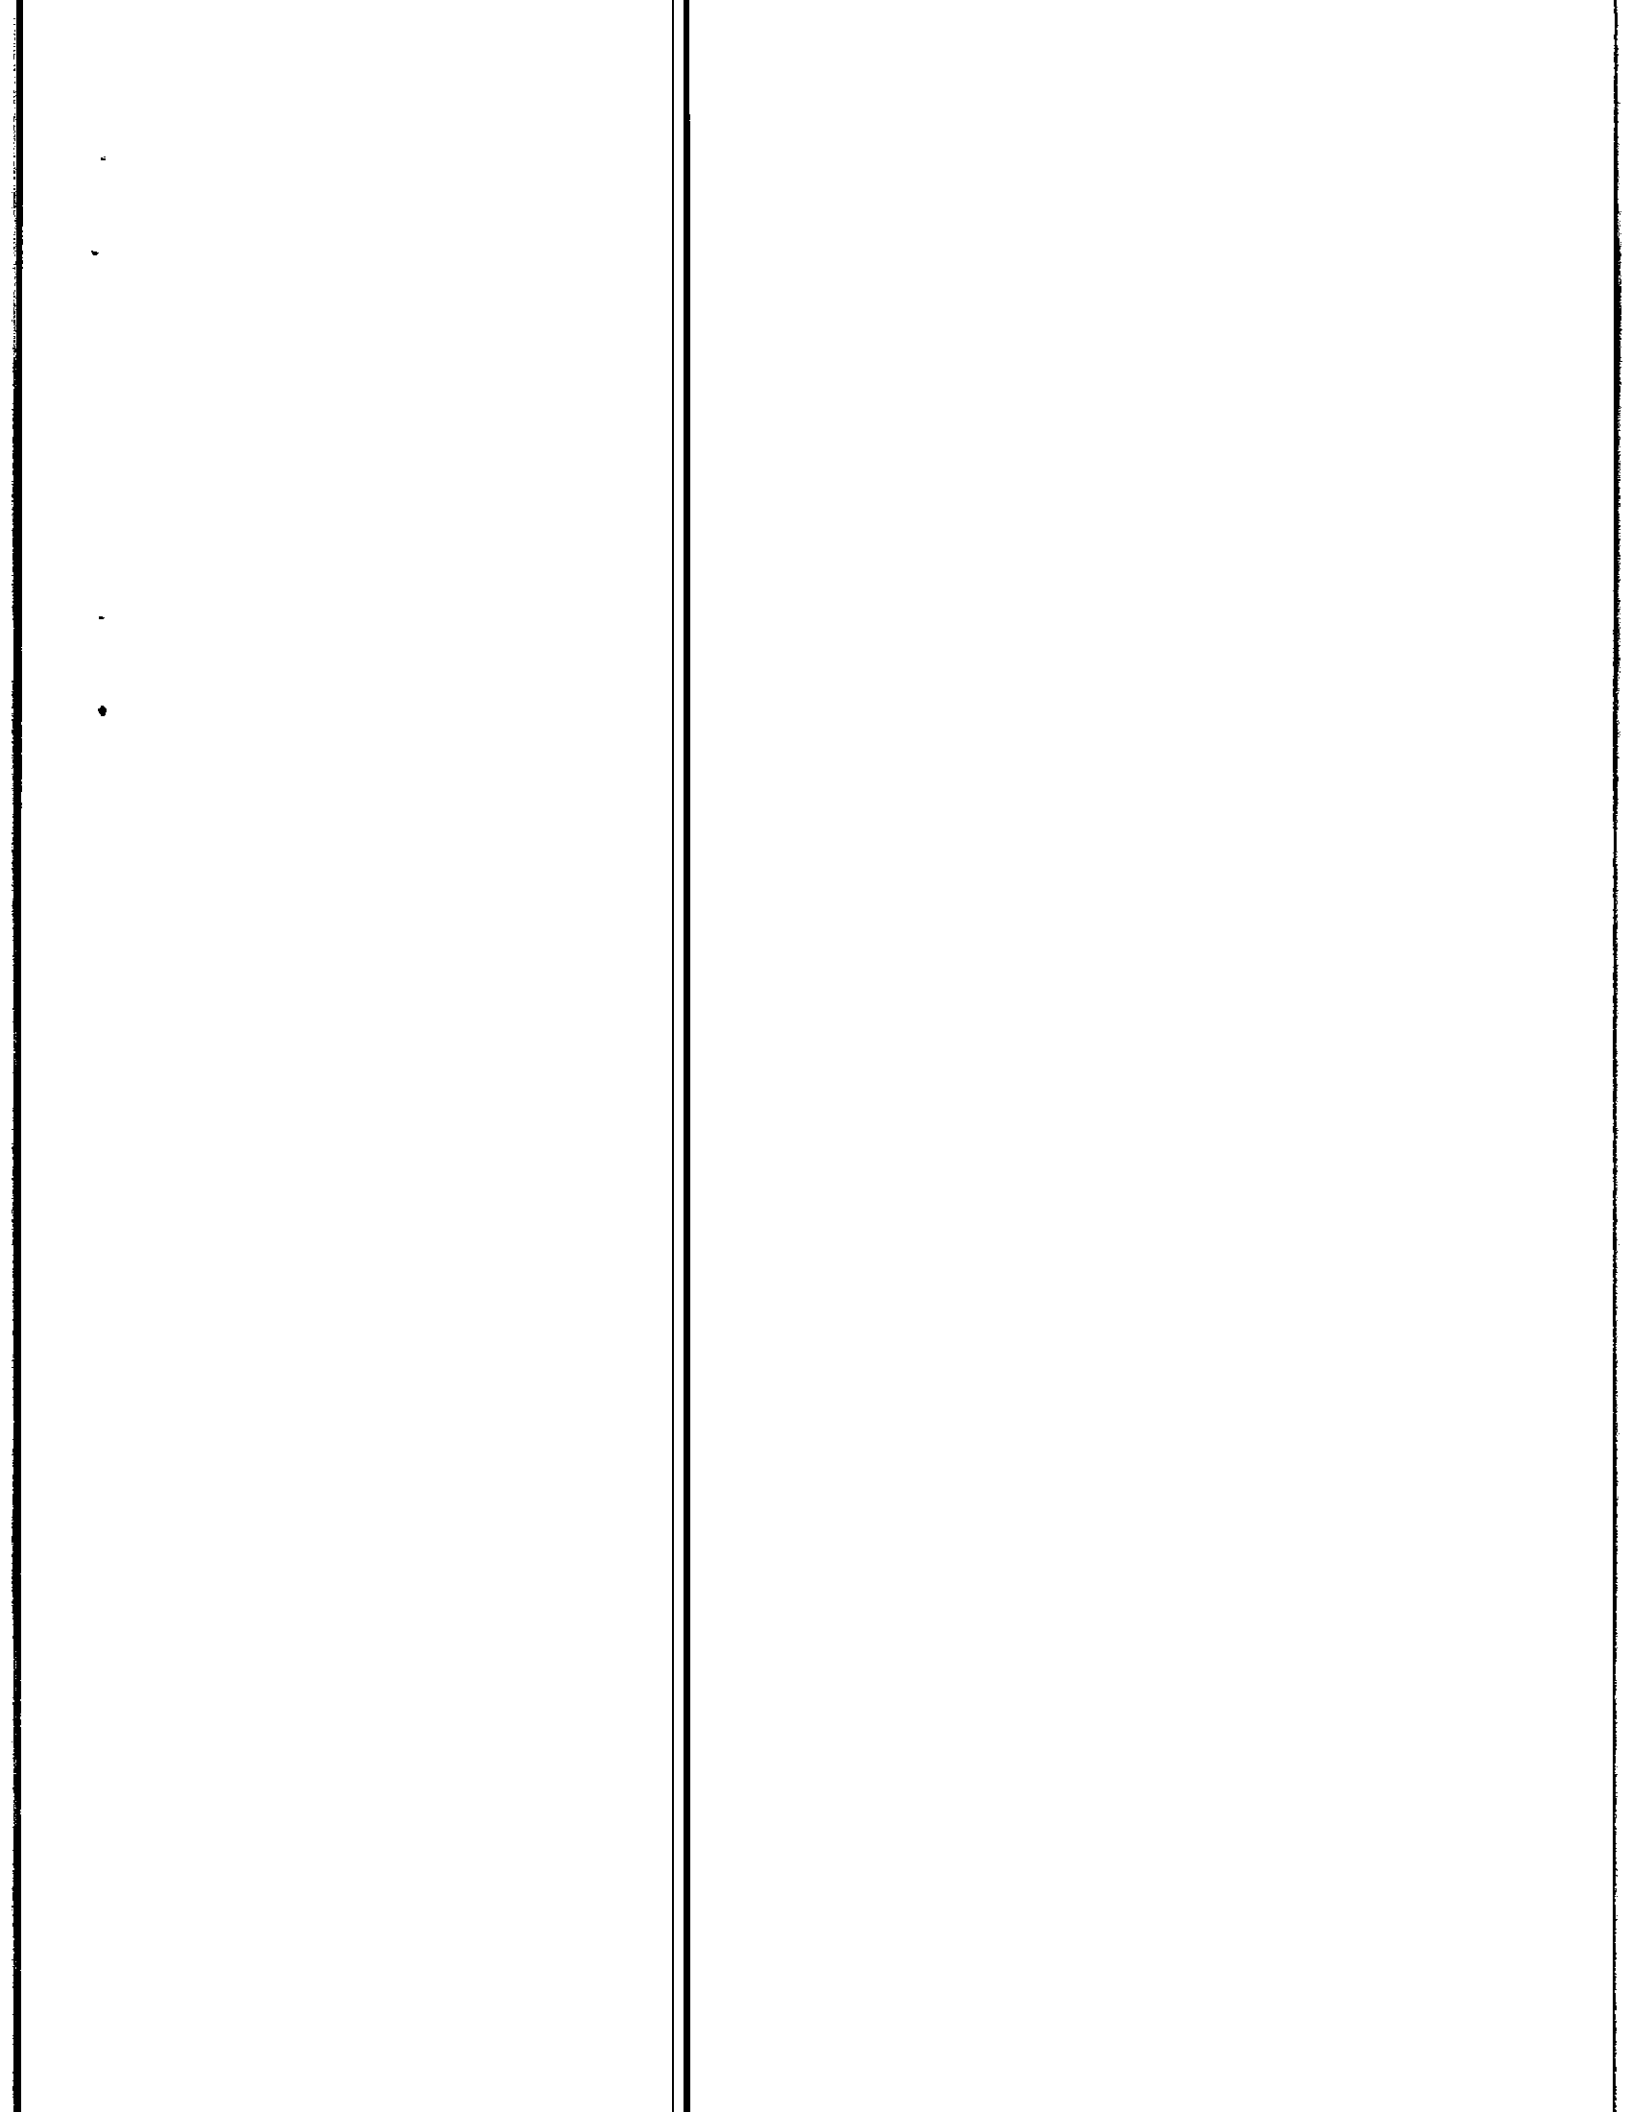

BIDDING DATA

(This section should be filled in by the Engineer/Procuring Agency before issuance of the Bidding Documents).

- (a). Name of Procuring Agency _____
- (b). Brief Description of Works _____
- (c). Procuring Agency's address:- _____
- (d). Estimated Cost:- _____
- (e). Amount of Bid Security:- _____ (Fill in lump sum amount
or in % age of bid amount /estimated cost, but not exceeding 5%)
- (f). Period of Bid Validity (days):- _____ (Not more than sixty days).
- (g). Security Deposit:- (including bid security):- _____
(in % age of bid amount /estimated cost equal to 10%)
- (h). Percentage, if any, to be deducted from bills :- _____
- (i). Deadline for Submission of Bills along with time :- _____
- (j). Venue, Time, and Date of Bid Opening:- _____
- (k). Time for Completion from written order of commence: - _____
- (L). Liquidity damages:- _____ (0.05 of Estimated Cost or Bid cost
per day of delay, but total not exceeding 10%).
- (m). Deposit Receipt No: Date: Amount: (in words and figures)

(Executive Engineer/Authority issuing bidding document)

Conditions of Contract

Clause – 1: Commencement & Completion Dates of work. The contractor shall not enter upon or commence any portion or work except with the written authority and instructions of the Engineer-in-charge or of in subordinate-in-charge of the work. Failing such authority the contractor shall have no claim to ask for measurements of or payment for work.

The contractor shall proceed with the works with due expedition and without delay and complete the works in the time allowed for carrying out the work as entered in the tender shall be strictly observed by the contractor and shall reckoned from the date on which the order to commence work is given to the contractor. And further to ensure good progress during the execution of the work, contractor shall be bound, in all in which the time allowed for completion of any work exceeds one month, to achieve progress on the prorated basis.

Clause – 2: Liquidated Damages. The contractor shall pay liquidated damages to the Agency at the rate per day stated in the bidding data for each day that the completion date is later than the Intended completion date; the amount of liquidated damage paid by the contractor to the Agency shall not exceed 10 per cent of the contract price. Agency may deduct liquidated damages from payments due to the contractor. Payment of liquidated damages does not affect the contractor's liabilities.

Clause – 3: Termination of the Contract.

(A) Procuring Agency/Executive Engineer may terminate the contract if either of the following conditions exists:-

- (i) contractor causes a breach of any clause of the Contract;
- (ii) the progress of any particular portion of the work is unsatisfactory and notice of 10 days has expired;
- (iii) in the case of abandonment of the work owing to the serious illness or death of the contractor or any other cause.
- (iv) contractor can also request for termination of contract if a payment certified by the Engineer is not paid to the contractor within 60 days of the date of the submission of the bill;

(B) The Executive Engineer/Procuring Agency has power to adopt any of the following courses as may deem fit:-

- (i) to forfeit the security deposit available except conditions mentioned at A (iii) and (iv) above;
- (ii) to finalize the work by measuring the work done by the contractor.

(C) In the event of any of the above courses being adopted by the Executive Engineer/Procuring Agency, the contractor shall have:-

- (i) no claim to compensation for any loss sustained by him by reason of his having purchased or procured any materials, or entered into any engagements, or made any advances on account of, or with a view to the execution of the work or the performance of the contract,
- (ii) however, the contractor can claim for the work done at site duly certified by the executive engineer in writing regarding the performance of such work and has not been paid.

Procuring Agency/Engineer may invite fresh bids for remaining work.

Clause 4: Possession of the site and claims for compensation for delay. The Engineer shall give possession of all parts of the site to the contractor. If possession of site is not given by the date stated in the contract data, no compensation shall be allowed for any delay caused in starting of the work on account of any acquisition of land, water standing in borrow pits/ compartments or in accordance with sanction to estimates. In such case, either date of commencement will be changed or period of completion is to be extended accordingly.

Clause -5: Extension of Intended Completion Date. The Procuring Agency either at its own initiatives before the date of completion or on desire of the contractor may extend the intended completion date, if an event (which hinders the execution of contract) occurs or a variation order is issued which makes it impossible to complete the work by the intended completion date for such period as he may think necessary or proper. The decision of the Executive Engineer in this matter shall be final; where time has been extended under this or any other clause of this agreement, the date for completion of the work shall be the date fixed by the order giving the extension or by the aggregate of all such orders, made under this agreement.

When time has been extended as aforesaid, it shall continue to be the essence of the contract and all clauses of the contract shall continue to be operative during the extended period.

Clause -6: Specifications. The contractor shall execute the whole and every part of the work in the most substantial and work-man-like manner and both as regards materials and all other matters in strict accordance with the specifications lodged in the office of the Executive Engineer and initialed by the parties, the said specification being a part of the contract. The contractor shall also confirm exactly, fully and faithfully to the designs, drawing, and instructions in writing relating to the work signed by the Engineer-in-charge and lodge in his office and to which the contractor shall be entitled to have access at such office or on the site of work for the purpose of inspection during office hours and the contractor shall, if he so requires, be entitled at his own expense to make or cause to be made copies of the specifications, and of all such designs, drawings, and instructions as aforesaid.

Clause – 7: Payments.

- (A) **Interim/Running Bill.** A bill shall be submitted by the contractor as frequently as the progress of the work may justify for all work executed and not included in any previous bill at least once in a month and the Engineer-in-charge shall take or cause to be taken the requisite measurements for the purpose of having the same verified and the claim, as far as admissible, adjusted, if possible before the expiry of ten days from the presentation of the bill, at any time depute a subordinate to measure up the said work in the presence of the contractor or his authorized agent, whose countersignature to the measurement list will be sufficient to warrant and the Engineer-in-charge may prepare a bill from such list which shall be binding on the contractor in all respects.

The Engineer /Procuring Agency shall pass/certify the amount to be paid to the contractor, which he considers due and payable in respect thereof, subject to deduction of security deposit, advance payment if any made to him and taxes.

All such intermediate payment shall be regarded as payments by way of advance against the final payment only and not as payments for work actually done and completed, and shall not preclude the Engineer-in-charge from recoveries from final bill and rectification of defects and unsatisfactory items of works pointed out to him during defect liability period.

- (B) **The Final Bill.** A bill shall be submitted by the contractor within one month of the date fixed for the completion of the work otherwise Engineer-in-charge's certificate of the measurements and of the total amount payable for the works shall be final and binding on all parties.

Clause – 8: Reduced Rates. In cases where the items of work are not accepted as so completed, the Engineer-in-charge may make payment on account of such items at such reduced rates as he may consider reasonable in the preparation of final or on running account bills with reasons recorded in writing.

Clause – 9: Issuance of Variation and Repeat Orders.

- (A) Agency may issue a Variation Order for procurement of works, physical services from the original contractor to cover any increase or decrease in quantities, including the introduction of new work items that are either due to change of plans, design or alignment to suit actual field conditions, within the general scope and physical boundaries of the contract.
- (B) Contractor shall not perform a variation until the Procuring Agency has authorized the variation in writing subject to the limit not exceeding the contract cost by of 15% on the same conditions in all respects on which he agreed to do them in the

work, and at the same rates, as are specified in the tender for the main work. The contractor has no right to claim for compensation by reason of alterations or curtailment of the work.

- (C) In case the nature of the work in the variation does not correspond with items in the Bill of Quantities, the quotation by the contractor is to be in the form of new rates for the relevant items of work, and if the Engineer-in-charge is satisfied that the rate quoted is within the rate worked out by him on detailed rate analysis, and then only he shall allow him that rate after approval from higher authority.
- (D) The time for the completion of the work shall be extended in the proportion that the additional work bear to the original contract work.
- (E) In case of quantities of work executed result the Initial Contract Price to be exceeded by more than 15%, and then Engineer can adjust the rates for those quantities causing excess the cost of contract beyond 15% after approval of Superintending Engineer.
- (F) **Repeat Order:** Any cumulative variation, beyond the 15% of initial contract amount, shall be subject of another contract to be tendered out if the works are separable from the original contract.

Clause-10: Quality Control.

- (A) **Identifying Defects:** If at any time before the security deposit is refunded to the contractor/during defect liability period mentioned in bid data, the Engineer-in-charge or his subordinate-in-charge of the work may instruct the contractor to uncover and test any part of the works which he considers may have a defect due to use of unsound materials or unskillful workmanship and the contractor has to carry out a test at his own cost irrespective of work already approved or paid.
- (B) **Correction of Defects:** The contractor shall be bound forthwith to rectify or remove and reconstruct the work so specified in whole or in part, as the case may require. The contractor shall correct the notified defect within the Defects Correction Period mentioned in notice.
- (C) **Uncorrected Defects:**
 - (i) In the case of any such failure, the Engineer-in-charge shall give the contractor at least 14 days notice of his intention to use a third party to correct a defect. He may rectify or remove, and re-execute the work or remove and replace the materials or articles complained of as the case may be at the risk and expense in all respects of the contractor.

- (ii) If the Engineer considers that rectification/correction of a defect is not essential and it may be accepted or made use of; it shall be within his discretion to accept the same at such reduced rates as he may fix therefore.

Clause – 11:

- (A) **Inspection of Operations** The Engineer and his subordinates, shall at all reasonable times have access to the site for supervision and inspection of works under or in course of execution in pursuance of the contract and the contractor shall afford every facility for and every assistance in obtaining the right to such access.
- (B) **Dates for Inspection and Testing.** The Engineer shall give the contractor reasonable notice of the intention of the Engineer-in-charge or his subordinate to visit the work shall have been given to the contractor, then he either himself be present to receive orders and instructions, or have a responsible agent duly accredited in writing present for that purpose, orders given to the contractor's duly authorized agent shall be considered to have the same force an effect as if they had been given to the contractor himself.

Clause – 12: Examination of work before covering up.

- (A) No part of the works shall be covered up or put out of view/beyond the reach without giving notice of not less than five days to the Engineer whenever any such part of the works or foundations is or are ready or about to be ready for examination and the Engineer shall, without delay, unless he considers it unnecessary and advises the contractor accordingly, attend for the purpose of examining and measuring such part of the works or of examining such foundations;
- (B) If any work is covered up or placed beyond the reach of measurement without such notice having been given, the same shall be uncovered at the contractor's expense, and in default thereof no payment or allowance shall be made for such work, or for the materials with which the same was executed.

Clause – 13: Risks. The contractor shall be responsible for all risks of loss of or damage to physical property or facilities or related services at the premises and of personal injury and death which arise during and in consequence of its performance of the contract. if any damage is caused while the work is in progress or become apparent within three months of the grant of the certificate of completion, final or otherwise, the contractor shall make good the same at his own expense, or in default the Engineer may cause the same to be made good by other workmen, and deduct the expenses from retention money lying with the Engineer.

Clause-14: Measures for prevention of fire and safety measures. The contractor shall not set fire to any standing jungle, trees, bush-wood or grass without a written permit from the Executive Engineer. When such permit is given, and also in all cases when destroying, cutting or uprooting trees, bush-wood, grass, etc by fire, the contractor shall take necessary measures to prevent such fire spreading to or otherwise damaging surrounding property. The contractor is responsible for the safety of all its activities including protection of the environment on and off the site. Compensation of all damage done intentionally or unintentionally on or off the site by the contractor's labour shall be paid by him.

Clause-15:Sub-contracting. The contractor shall not subcontract the whole of the works, except where otherwise provided by the contract. The contractor shall not subcontract any part of the works without the prior consent of the Engineer. Any such consent shall not relieve the contractor from any liability or obligation under the contract and he shall be responsible for the acts, defaults and neglects of any subcontractor, his agents, servants or workmen as if these acts, defaults or neglects were those of the contractor, his agents' servants or workmen. The provisions of this contract shall apply to such subcontractor or his employees as if he or it were employees of the contractor.

Clause – 16: Disputes. All disputes arising in connection with the present contract, and which cannot be amicably settled between the parties, , the decision of the Superintending Engineer of the circle/officer/one grade higher to awarding authority shall be final, conclusive and binding on all parties to the contract upon all questions relating to the meaning of the specifications, designs drawings, and instructions, hereinbefore mentioned and as to the quality of workmanship, or materials used on the work or as to any other questions, claim, right, matter, or thing whatsoever in any way arising out of, or relating to the contract design, drawings, specifications, estimates, instructions, orders or these conditions or otherwise concerning the works, or the execution, of failure to execute the same, whether arising, during the progress of the work, or after the completion or abandonment thereof.

Clause –17: Site Clearance. On completion of the work, the contractor shall be furnished with a certificate by the Executive Engineer (hereinafter called the Engineer in-charge) of such completion, but neither such certificate shall be given nor shall the work be considered to be complete until the contractor shall have removed all temporary structures and materials brought a site either for use or for operation facilities including cleaning debris and dirt at the site. If the contractor fails to comply with the requirements of this clause then Engineer-in-charge, may at the expense of the contractor remove and dispose of the same as he thinks fit and shall deduct the amount of all expenses so incurred from the contractor's retention money. The contractor shall have no claim in respect of any surplus materials as aforesaid except for any sum actually realized by the sale thereof.

Clause –18: Financial Assistance Advance Payment.

- (A) **Mobilization advance** is not allowed.
- (B) **Secured Advance against materials brought at site.**
- (i) Secured Advance may be permitted only against imperishable materials/quantities anticipated to be consumed/utilized on the work within a period of three months from the date of issue of secured advance and definitely not for full quantities of materials for the entire work/contract. The sum payable for such materials on site shall not exceed 75% of the market price of materials;
- (ii) Recovery of Secured Advance paid to the contractor under the above provisions shall be affected from the monthly payments on actual consumption basis, but not later than period more than three months (even if unutilized).

Clause –19: Recovery as arrears of Land Revenue. Any sum due to the Government by the contractor shall be liable for recovery as arrears of Land Revenue.

Clause –20: Refund of Security Deposit/Retention Money. On completion of the whole of the works (a work should be considered as complete for the purpose of refund of security deposit to a contractor from the last date on which its final measurements are checked by a competent authority, if such check is necessary otherwise from the last date of recording the final measurements), the defects notice period has also passed and the Engineer has certified that all defects notified to the contractor before the end of this period have been corrected, the security deposit lodged by a contractor (in cash or recovered in installments from his bills) shall be refunded to him after the expiry of three months from the date on which the work is completed.

Divisional Accountant

Contractor

Executive Engineer/Procuring Agency

BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

Item No	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1	2	3	4	5	6

Amount TOTAL (a)

----- % above/below on the rates of CSR.

Amount to be added/deducted on the basis
Of premium quoted. TOTAL (b)

Total (A) = a+b in words & figures:

Contractor

Executive Engineer/Procuring Agency

Summary of Bill of Quantities.

Cost of Bid

Amount

1. (A) Cost based on Composite Schedule of Rates.

2. (B) Cost based on Non/Offered Schedule of Rates.

TOTAL COST OF BID (C) = Total (A) + Total (B)

Contractor

Executive Engineer/Procuring Agency

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT
- b) Brief Description of Works: Const. of S/Drains CC Block & CC Paver at Village Haji Bhagyal Junejo to Zahoor Junejo, Juneja Muhalla.
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10,00000. 00
- e) Amount of Bid Security: 30,000. 00
- f) Period of Bid validity (days): (20-Days) 90 days
- g) Security Deposit: S. Dep: 7%
- h) Percentage, if any, to be deducted from bills: Income Tax 7.5%
- I) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @MUNICIPAL COMMITTEE GAMBAT OFFICE DATED ON _____
- k) Time for completion from written order of commence: 12 Months
- L) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: (in words & figures) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES

(A) Description and rate of based on composite schedule of Rates

ITEM No:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	769.50	Dismantling and removing road metaling (CSI No: 51 Page No: 13)	605.00	P% Cft	4655
2.	271.00	Dismantling Cement concrete Plain (CSI No: 19 (b) Page No: 11)	3327.50	P% Cft	9018
3.	112.50	Dismantling brick work lime or cement mortar (CSI, 13 Page No: 10)	1285.63	P% Cft	1446
4.	1915.08	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	6083
5.	553.85	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	62523
6.	1222.50	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	146069
7.	T-A 490.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	46060
8.	T-B 260.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	45240
9.	1796.60	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b), P.No.53).	2283.93	P% Sft	41033
10.	72.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	24264
11.	2.893	Fabrication of M.S Reinforcement for C.C. i/c cutting bending lying in position making joints and fastening i/c cost of binding wire also i/c removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.20	P. Cwt	14469
PART-02 C.C BLOCKS					
1.	656.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 1(a) P.No: 1)	2117.50	P%0 Cft	1389
2.	656.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	232

Continued.....

3.	656.00	Extra for every 50" ft additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P%0 Cft	3306
4.	216.48	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	20384
5.	164.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P%Cft	23664
6.	41.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI No: 19 Page No: 18)	3127.41	P% Sft	1282
7.	16.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	4144
PART-03 PAVER BLOCKS					
1.	305.00	Hard Marrum or fine powdery Marrum	1800.00	P% Cft	5490
2.	305.00	Laying Earth Work 6" Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (b) P No: 03)	354.00	P%0 Cft	108
3.	402.60	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	37910
4.	1220.00	P&F cement paving block flooring having size of 197x97x80(mm) of city liquid cobble shape with painting having strength b/w 5000 phi filling the joints with hill sand, white powder for dressing and laying in specified manner patter and design i/c L.C etc. complete (SI No: 72 P-49)	199.77	P. Sft.	243719
5.	2532	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.6 P.No.16).Ratio 1:2:4	14429.25	P% Cft	3653
6.	112.50	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	13442
7.	10.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 100mm Pipe 4" dia	136.00	P.Rft	1360
8.	10.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 150mm Pipe 6" dia	259.00	P.Rft	2590
TOTAL S.B					763,533

Amount Total (a)

.....% above / below on the rates of CSR.

Amount to be added / deducted on the basis
Of premium quoted

Total (A) = a + b in words & figure

CONTRACTOR

EXECUTIVE ENGINEER, PROCURING AGENCY

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: CONSTITUTION OF SURFACE DRAINS C.C BLOCK & PAVER BLOCK FROM H/O NOOR MUHAMMAD PANHWAR TO GUL MUHAMMAD NAREJO WARD NO. 04 TALUKA GAMBAT
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10,00,000.00
- e) Amount of Bid Security: 30,000.00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- i) Deadline from submission of bids along with time: _____
- j) Venue, Time & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- l) Liquidity Damages: N/A
- m) Deposit receipt No: Date Amount: (in words & figures) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES**(A) Description and rate of based on composite schedule of Rates**

ITEM No:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	274.63	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	872.00
2.	79.75	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	9003.00
3.	168.75	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	20163.00
4.	T-A 50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	4700.00
5.	T-B 50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	8700.00
6.	242.00	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b). P.No.18).	2283.93	P% Sft	5527.00
7.	24.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	8088.00
8.	0.964	Fabrication of M.S Reinforcement for C.C. i/c cutting bending lying in position making joints and fastening i/c cost of binding wire also i/c removal of rust from bars. (CSI.No. (ii). P.No.20).	4820.20	P. Cwt	4823.00
9.	6.00	Providing laying UPMC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	1554.00
PART-02 C.C BLOCKS					
1.	336.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 3(a) P.No: 1)	2117.50	P%0 Cft	711.00
2.	336.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	119.00

Continued.....

3.	336.00	Extra for every 50" ft additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P% Cft	1693.00
4.	110.88	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P% Cft	10441.00
5.	84.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P% Cft	12121.00
6.	21.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI No: 19 Page No: 18)	3127.41	P% Sft	657.00
7.	24.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	6216.00
PART-03 PAVER BLOCKS					
1.	732.50	Hard Marrum or fine powdery Marrum	1800.00	P% Cft	13185.00
2.	732.50	Laying Earth Work 6" Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (b) P No: 03)	354.00	P% Cft	259.00
3.	966.90	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P% Cft	91046.00
4.	2930.00	P&F cement paving block flooring having size of 197x97x80(mm) of city/quad cobble shape with painting having strength b/w 5000 phi filling the joints with hill sand, white powder for dressing and laying in specified manner patten and design i/c L.C etc. complete (SI No: 72 P-49)	199.77	P. Sft.	585326.00
5.	60.80	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.6 P.No.16).Ratio 1:2:4	14429.25	P% Cft	8773.00
6.	56.25	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	6721.00
7.	20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 100mm Pipe 4" dia	136.00	P.Rft	2720.00
8.	20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 150mm Pipe 6" dia	259.00	P.Rft	5180.00
TOTAL S.B					808,598

Amount Total (a)

.....% above / below on the rates of CSR.

**Amount to be added / deducted on the basis
Of premium quoted**

Total (A) = a + b in words & figure

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT
- b) Brief Description of Works: REPAIR OF A/C PRESSURE/P/PIPE RISING MAIN FROM OLD DISPOSAL RANIPUR ROAD WORK TO ROHRI CANAL.
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 5, 00,000. 00
- e) Amount of Bid Security: 15,000. 00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: Sec/Dep: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- I) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @MUNICIPAL COMMITTEE GAMBAT OFFICE DATED ON _____
- k) Time for completion from written order of commence: 12 Months
- L) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: (in words & figures) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES

(B) DESCRIPTION AND RATE OF ITEMS BASED ON MARKET (OFFERED RATES)

ITEM NO:	QUANTITIES	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
1.	476.00	Supply Pressure Pipe 10" dia	1050.00	Open Rate	499800
TOTAL					4, 99,800

Total (B) in words & figures:

Contractor

Executive Engineer/Procuring Agency

Summary of Bill of Quantities.

Cost of Bid

Amount

1. (A) Cost based on Composite Schedule of Rates.

2. (B) Cost based on Non/Offered Schedule of Rates.

TOTAL COST OF BID (C) = Total (A) + Total (B)

Contractor

Assistant Executive Engineer/Procuring Agency

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: CONSTITUTION OF SURFACE DRAINS C.C BLOCK & PAVER BLOCK FROM SANAT NAGAR TO PIPRI ROAD IN WARD NO: 04 TALUKA GAMBAT
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10,00,000.00
- e) Amount of Bid Security: 30,000.00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- i) Deadline from submission of bids along with time: _____
- j) Venue, Time & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- l) Liquidity Damages: N/A
- m) Deposit receipt No: Date Amount: *(in words & figures)* N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES

(A) Description and rate of based on composite schedule of Rates

ITEM No:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	769.50	Dismantling and removing road metaling (CSI No: 51 Page No: 13)	605.00	P% Cft	4655
2.	271.00	Dismantling Cement concrete Plain (CSI No: 19 (b) Page No: 11)	3327.50	P% Cft	9018
3.	112.50	Dismantling brick work lime or cement mortar (CSI, 13 Page No: 10)	1285.63	P% Cft	1446
4.	1915.08	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	6083
5.	553.85	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	62523
6.	1222.50	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	146069
7.	T-A 490.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	46060
8.	T-B 260.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	45240
9.	1796.60	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b), P.No.58).	2283.93	P% Sft	41033
10.	72.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	24264
11.	2.893	Fabrication of M.S Reinforcement for C.C. I/c cutting bending lying in position making joints and fastening I/c cost of binding wire also i/c removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.20	P. Cwt	14469
PART-02 C.C BLOCKS					
1.	656.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 3(a) P.No: 1)	2117.50	P%0 Cft	1389
2.	656.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	232

Continued.....

3.	656.00	Extra for every 50" ft additional lead or part thereof (CSI No: 8 (a) Page No 03)	5039.00	P%0 Cft	3306
4.	216.48	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	20384
5.	164.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P%Cft	23664
6.	41.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI, No: 19 Page No: 18)	3127.41	P% Sft	1282
7.	16.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	4144
PART-03 PAVER BLOCKS					
1.	305.00	Hard Marrum or fine powdery Marrum	1800.00	P% Cft	5490
2.	305.00	Laying Earth Work 6" Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (b) P No: 03)	354.00	P%0 Cft	108
3.	402.60	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	37910
4.	1220.00	P&F cement paving block flooring having size of 197x97x80(mm) of city/quad cobble shape with painting having strength b/w 5000 phi filling the joints with hill sand, white powder for dressing and laying in specified manner /patter and design i/c L.C etc. complete (SI No: 72 P-49)	199.77	P. Sft.	243719
5.	2532	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.6 P.No.16).Ratio 1:2:4	14429.25	P% Cft	3653
6.	112.50	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	13442
7.	10.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 100mm Pipe 4" dia	136.00	P.Rft	1360
8.	10.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 150mm Pipe 6" dia	259.00	P.Rft	2590
TOTAL S.B					763,533

Amount Total (a)

.....% above / below on the rates of CSR.

**Amount to be added / deducted on the basis
Of premium quoted**

Total (A) = a + b in words & figure

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: CONSTT: OF SURFACE DRAINS C.C BLOCK & PAVER BLOCK @KISSNA COLONY H/O RAZA NAREJO TO H/O BAKHAT KALHORO WARD NO: 03 TALUKA GAMBAT
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10, 00,000. 00
- e) Amount of Bid Security: 30,000. 00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: 7%
- h) Percentage, if any, to be deducted from bills: 1-Tax 7.5%
- I) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- l) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: (in words & figures) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES**(A) Description and rate of based on composite schedule of Rates**

ITEM No:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	769.50	Dismantling and removing road metaling (CSI No: 51 Page No: 13)	605.00	P% Cft	4655
2.	271.00	Dismantling Cement concrete Plain (CSI No: 19 (b) Page No: 11)	3327.50	P% Cft	9018
3.	112.50	Dismantling brick work lime or cement mortar (CSI, 13 Page No: 10)	1285.63	P% Cft	1446
4.	1915.08	Excavation in foundation building bridges and other structures i/c dig bedding dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	6083
5.	553.85	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	62523
6.	1222.50	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	146069
7.	T-A 490.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	46060
8.	T-B 260.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	45240
9.	1796.60	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b), P.No.53).	2283.93	P% Sft	41033
10.	72.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	24264
11.	2.893	Fabrication of M.S Reinforcement for C.C. i/c cutting bending lying in position making joints and fastening i/c cost of binding wire also i/c removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.20	P. Cwt	14469
PART-02 C.C BLOCKS					
1.	656.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 5(a) P.No: 1)	2117.50	P%0 Cft	1389
2.	656.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	232

Continued.....

3.	656.00	Extra for every 50" additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P%0 Cft	3306
4.	216.48	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	20384
5.	164.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P%Cft	23664
6.	41.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI No: 19 Page No: 18)	3127.41	P% Sft	1282
7.	16.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	4144
PART-03 PAVER BLOCKS					
1.	305.00	Hard Marrum or fine powdery Marrum	1800.00	P% Cft	5490
2.	305.00	Laying Earth Work 6" Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (b) P No: 03)	354.00	P%0 Cft	108
3.	402.60	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	37910
4.	1220.00	P&F cement paving block flooring having size of 197x97x80(mm) of city liquid cobble shape with painting having strength b/w 5000psi filling the joints with hill sand, white powder for dressing and laying in specified manner /patter and design i/c L.C etc. complete (SI No: 72 P-49)	199.77	P. Sft.	243719
5.	2532	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.6 P.No.16).Ratio 1:2:4	14429.25	P% Cft	3653
6.	112.50	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	13442
7.	10.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 100mm Pipe 4" dia	136.00	P.Rft	1360
8.	10.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 150mm Pipe 6" dia	259.00	P.Rft	2590
TOTAL S.B					763,533

Amount Total (a)

.....% above / below on the rates of CSR.

**Amount to be added / deducted on the basis
Of premium quoted**

Total (A) = a + b in words & figure

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

Draft Bidding documents for works up to Millions

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: CONSTR: OF SURFACE DRAINS C.C BLOCK & PAVER BLOCK FROM NEW SHAIKH MOHALLA TO JUMERA BEACH WARD NO: 03 TALUKA GAMBAT
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10,00,000.00
- e) Amount of Bid Security: 30,000.00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- I) Deadline from submission of bids along with time: _____
- j) Venue, Time & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- L) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: *(in words & figures)* N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES

(A) Description and rate of based on composite schedule of Rates

ITEM NO:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	274.63	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	872.00
2.	79.75	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P%0 Cft	9003.00
3.	168.75	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	20163.00
4.	T-A 50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	4700.00
5.	T-B 50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	8700.00
6.	242.00	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b), P.No.58).	2283.93	P% Sft	5527.00
7.	24.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	8088.00
8.	0.964	Fabrication of M.S Reinforcement for C.C. I/c cutting bending lying in position making joints and fastening i/c cost of binding wire also i/c removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.20	P. Cwt	4823.00
9.	6.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	1554.00
PART-02 C.C BLOCKS					
1.	336.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 1(a) P.No: 1)	2117.50	P%0 Cft	711.00
2.	336.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	119.00

Continued.....

3.	336.00	Extra for every 50" in additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P%0 Cft	1693.00
4.	110.88	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	10441.00
5.	84.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P%Cft	12121.00
6.	21.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI No: 19 Page No: 18)	3127.41	P% Sft	657.00
7.	24.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	6216.00
PART-03 PAVER BLOCKS					
1.	732.50	Hard Marrum or fine powdery Marrum	1800.00	P% Cft	13185.00
2.	732.50	Laying Earth Work 6" Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (b) P No: 03)	354.00	P%0 Cft	259.00
3.	966.90	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	91046.00
4.	2930.00	P&F cement paving block flooring having size of 197x97x80(mm) of cityquid cobble shape with painting having strength b/w 5000psi filling the joints with hill sand, white powder for dressing and laying in specified manner patter and design i/c L.C etc. complete (SI No: 72 P-49)	199.77	P. Sft.	585326.00
5.	60.80	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.6 P.No.16).Ratio 1:2:4	14429.25	P% Cft	8773.00
6.	56.25	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	6721.00
7.	20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 100mm Pipe 4" dia	136.00	P.Rft	2720.00
8.	20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 150mm Pipe 6" dia	259.00	P.Rft	5180.00
TOTAL S.B					808,598

Amount Total (a)

.....% above / below on the rates of CSR.

**Amount to be added / deducted on the basis
Of premium quoted**

Total (A) = a + b in words & figure

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT
- b) Brief Description of Works: Const. of S/Drains & CC Block from Doctor Nisar Ahmed Shaikh to House of Muhammad Yaqoob Ujjan Shaikh Muhalia Gambat
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10,00000. 00
- e) Amount of Bid Security: 30,000. 00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: S. Dep: 7%
- h) Percentage, if any, to be deducted from bills: Income Tax 7.5%
- i) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @MUNICIPAL COMMITTEE GAMBAT OFFICE DATED ON _____
- k) Time for completion from written order of commence: 12 Months
- L) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: (in words & figures) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES**(A) Description and rate of based on composite schedule of Rates**

ITEM No:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	406.50	Dismantling and removing road metaling (CSI No: 51 Page No: 13)	605.00	P% Cft	2459.00
2.	121.00	Dismantling Cement concrete Plain (CSI No: 19 (b) Page No: 11)	3327.50	P% Cft	4026.00
3.	56.25	Dismantling brick work lime or cement mortar (CSI, 13 Page No: 10)	1285.63	P% Cft	723.00
4.	1420.75	Excavation in foundation building bridges and other structures i/c dig bell dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	4513.00
5.	410.30	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	46318.00
6.	918.75	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	109776.00
7.	T-A 400.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	37600.00
8.	T-B 170.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	29580.00
9.	1361.00	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b), P.No.58).	2283.93	P% Sft	31084.00
10.	48.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	16176.00
11.	1.928	Fabrication of M.S Reinforcement for C.C. I/c cutting bending lying in position making joints and fastening I/c cost of binding wire also I/c removal of rust from bars. (CSI.No. (ii). P.No.20).	5001.70	P. Cwt	9643
PART-02 C.C BLOCKS					
1.	896.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: B(a) P.No: 1)	2117.50	P%0 Cft	1897.00
2.	896.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	317.00

Continued.....

3	896.00	Extra for every 50" of additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P% Cft	4515.00
4.	295.68	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	27842.00
5.	224.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P%Cft	32322.00
6.	56.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI, No: 19 Page No: 18)	3127.41	P% Sft	1751.00
7.	8.00	Providing laying UPMC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	2072.00
TOTAL S.B					392,253

Amount Total (a)

.....% above / below on the rates of CSR.

Amount to be added / deducted on the basis
Of premium quoted

Total (A) = a + b in words & figure

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: CONSTT: OF SURFACE DRAINS & C.C BLOCK FROM MITHAL MAHAR TO ILLAHI BUX MAHAR WARD NO: 03 TALUKA GAMBAT
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 5, 00,000. 00
- e) Amount of Bid Security: 15,000. 00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: S. Dep: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax= 7.5%
- i) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- l) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: (in words & figures) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES**(A) Description and rate of based on composite schedule of Rates**

ITEM No:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	406.50	Dismantling and removing road metaling (CSI No: 51 Page No: 13)	605.00	P% Cft	2459.00
2.	121.00	Dismantling Cement concrete Plain (CSI No: 19 (b) Page No: 11)	3327.50	P% Cft	4026.00
3.	56.25	Dismantling brick work lime or cement mortar (CSI, 13 Page No: 10)	1285.63	P% Cft	723.00
4.	1420.75	Excavation in foundation building bridges and other structures i/c dig bell dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	4513.00
5.	410.30	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	46318.00
6.	918.75	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	109776.00
7.	T-A 400.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1.32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	37600.00
8.	T-B 170.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1.32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	29580.00
9.	1361.00	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b), P.No.18).	2283.93	P% Sft	31084.00
10.	48.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	16176.00
11.	1.928	Fabrication of M.S Reinforcement for C.C. i/c cutting bending lying in position making joints and fastening i/c cost of binding wire also i/c removal of rust from bars. (CSI.No. (ii), P.No.20).	5001.70	P. Cwt	9643
PART-02 C.C BLOCKS					
1.	896.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 3(a) P.No: 1)	2117.50	P%0 Cft	1897.00
2.	896.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	317.00

Continued.....

3.	896.00	Extra for every 50' of additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P%0 Cft	4515.00
4.	295.68	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	27842.00
5.	224.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P%Cft	32322.00
6.	56.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI, No: 19 Page No: 18)	3127.41	P% Sft	1751.00
7.	8.00	Providing laying UPMC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	2072.00
TOTAL S.B					392,253

Amount Total (a)

.....% above / below on the rates of CSR.

**Amount to be added / deducted on the basis
Of premium quoted**

Total (A) = a + b in words & figure

CONTRACTOR


EXECUTIVE ENGINEER / PROCURING AGENCY

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT
- b) Brief Description of Works: Const. of S/Drains & CC Block from Wahid Bux Ujjan to Ahmed Ujjan, Ujjan Muhalla.
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10,00000. 00
- e) Amount of Bid Security: 30,000. 00
- f) Period of Bid validity (days): ~~90 Days~~ (90 days)
- g) Security Deposit: S. Dep: 7%
- h) Percentage, if any, to be deducted from bills: Income Tax 7.5%
- I) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @MUNICIPAL COMMITTEE GAMBAT OFFICE DATED ON _____
- k) Time for completion from written order of commence: 12 Months
- L) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: (in words & figures) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES**(A) Description and rate of based on composite schedule of Rates**

ITEM NO:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	406.50	Dismantling and removing road metaling (CSI No: 51 Page No: 13)	605.00	P% Cft	2459.00
2.	121.00	Dismantling Cement concrete Plain (CSI No: 19 (b) Page No: 11)	3327.50	P% Cft	4026.00
3.	56.25	Dismantling brick work lime or cement mortar (CSI, 13 Page No: 10)	1285.63	P% Cft	723.00
4.	1420.75	Excavation in foundation building bridges and other structures i/c dig bedding dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	4513.00
5.	410.30	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	46318.00
6.	918.75	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	109776.00
7.	T-A 400.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	37600.00
8.	T-B 170.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	29580.00
9.	1361.00	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b), P.No.58).	2283.93	P% Sft	31084.00
10.	48.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	16176.00
11.	1.928	Fabrication of M.S Reinforcement for C.C. I/c cutting bending lying in position making joints and fastening i/c cost of binding wire also i/c removal of rust from bars. (CSI.No. (ii), P.No.20).	5001.70	P. Cwt	9643
PART-02 C.C BLOCKS					
1.	896.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 3(a) P.No: 1)	2117.50	P%0 Cft	1897.00
2.	896.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	317.00

Continued.....

3.	896.00	Extra for every 50" of additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P% Cft	4515.00
4.	295.68	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	27842.00
5.	224.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P%Cft	32322.00
6.	56.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI No: 19 Page No: 18)	3127.41	P% Sft	1751.00
7.	8.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	2072.00
TOTAL S.B					392,253


Amount Total (a)

.....% above / below on the rates of CSR.

**Amount to be added / deducted on the basis
Of premium quoted**

Total (A) = a + b in words & figure

CONTRACTOR

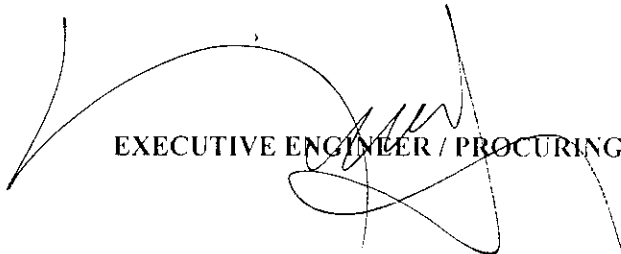
EXECUTIVE ENGINEER / PROCURING AGENCY

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: CONSTT: OF SURFACE DRAINS C.C BLOCK & PAVER BLOCK FROM VILLAGE WANDH MAHAR TO VILLAGE HAJI SAMAN UJJAN ~~WARD No. 04~~ TALUKA GAMBAT
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10, 00,000. 00
- e) Amount of Bid Security: 30,000. 00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- i) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- l) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: (in words & figures) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES**(A) Description and rate of based on composite schedule of Rates**

ITEM No:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	769.50	Dismantling and removing road metaling (CSI No: 51 Page No: 13)	605.00	P% Cft	4655
2.	271.00	Dismantling Cement concrete Plain (CSI No: 19 (b) Page No: 11)	3327.50	P% Cft	9018
3.	112.50	Dismantling brick work lime or cement mortar (CSI. 13 Page No: 10)	1285.63	P% Cft	1446
4.	1915.08	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	6083
5.	553.85	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	62523
6.	1222.50	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	146069
7.	T-A 490.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1:32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	46060
8.	T-B 260.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1:32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	45240
9.	1796.60	Cement plaster (1:4) up to 20' height ½" thick. (CSI.No.11 (b), P.No.53).	2283.93	P% Sft	41033
10.	72.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	24264
11.	2.893	Fabrication of M.S Reinforcement for C.C. i/c cutting bending lying in position making joints and fastening i/c cost of binding wire also i/c removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.20	P. Cwt	14469
PART-02 C.C BLOCKS					
1.	656.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 5(a) P.No: 1)	2117.50	P%0 Cft	1389
2.	656.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	232

Continued.....

3.	656.00	Extra for every 50" ft additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P%0 Cft	3306
4.	216.48	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	20384
5.	164.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P%Cft	23664
6.	41.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI No: 19 Page No: 18)	3127.41	P% Sft	1282
7.	16.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	4144
PART-03 PAVER BLOCKS					
1.	305.00	Hard Marrum or fine powdery Marrum	1800.00	P% Cft	5490
2.	305.00	Laying Earth Work 6" Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (b) P No: 03)	354.00	P%0 Cft	108
3.	402.60	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	37910
4.	1220.00	P&F cement paving block flooring having size of 197x97x80(mm) of city quid cobble shape with painting having strength b/w 5000phi filling the joints with hill sand, white powder for dressing and laying in specified manner patter and design i/c L.C etc. complete (SI No: 72 P-49)	199.77	P. Sft.	243719
5.	2532	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.6 P.No.16).Ratio 1:2:4	14429.25	P% Cft	3653
6.	112.50	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	13442
7.	10.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 100mm Pipe 4" dia	136.00	P.Rft	1360
8.	10.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 150mm Pipe 6" dia	259.00	P.Rft	2590
TOTAL S.B					763,533

Amount Total (a)

.....% above / below on the rates of CSR.

**Amount to be added / deducted on the basis
Of premium quoted**

Total (A) = a + b in words & figure

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: CONSTT: OF SURFACE DRAINS C.C BLOCK & PAVER BLOCK FROM H/O KALEEM CHANNA TO KHUHRA ROAD ~~WARD NO: 02~~ TALUKA GAMBAT
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10, 00,000. 00
- e) Amount of Bid Security: 30,000. 00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- i) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- l) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: *(in words & figures)* N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES

(A) Description and rate of based on composite schedule of Rates

ITEM No:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	769.50	Dismantling and removing road metaling (CSI No: 51 Page No: 13)	605.00	P% Cft	4655
2.	271.00	Dismantling Cement concrete Plain (CSI No: 19 (b) Page No: 11)	3327.50	P% Cft	9018
3.	112.50	Dismantling brick work lime or cement mortar (CSI, 13 Page No: 10)	1285.63	P% Cft	1446
4.	1915.08	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	6083
5.	553.85	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	62523
6.	1222.50	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	146069
7.	T-A 490.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1 3/2" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	46060
8.	T-B 260.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1 3/2" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	45240
9.	1796.60	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b), P.No.58).	2283.93	P% Sft	41033
10.	72.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	24264
11.	2.893	Fabrication of M.S Reinforcement for C.C. I/c cutting bending lying in position making joints and fastening I/c cost of binding wire also I/c removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.20	P. Cwt	14469
PART-02 C.C BLOCKS					
1.	656.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 3(a) P.No: 1)	2117.50	P%0 Cft	1389
2.	656.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	232

Continued.....

3.	656.00	Extra for every 50" of additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P% Cft	3306
4.	216.48	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	20384
5.	164.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P%Cft	23664
6.	41.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI, No: 19 Page No: 18)	3127.41	P% Sft	1282
7.	16.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	4144
PART-03 PAVER BLOCKS					
1.	305.00	Hard Marrum or fine powdery Marrum	1800.00	P% Cft	5490
2.	305.00	Laying Earth Work 6" Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (b) P No: 03)	354.00	P%0 Cft	108
3.	402.60	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	37910
4.	1220.00	P&F cement paving block flooring having size of 197x97x80(mm) of city liquid cobble shape with painting having strength b/w 5000psi filling the joints with hill sand, white powder for dressing and laying in specified manner pater and design i/c L.C etc. complete (SI No: 72 P-49)	199.77	P. Sft.	243719
5.	2532	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.6 P.No.16).Ratio 1:2:4	14429.25	P% Cft	3653
6.	112.50	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	13442
7.	10.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 100mm Pipe 4" dia	136.00	P.Rft	1360
8.	10.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 150mm Pipe 6" dia	259.00	P.Rft	2590
TOTAL S.B					763,533

Amount Total (a)

.....% above / below on the rates of CSR.

**Amount to be added / deducted on the basis
Of premium quoted**

Total (A) = a + b in words & figure

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: CONSTT: OF SURFACE DRAINS C.C BLOCK & PAVER BLOCK FROM WAPDA OFFICE ROAD TO JUDGES COLONY WAR NO: 02 TALUKA GAMBAT
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10, 00,000. 00
- e) Amount of Bid Security: 30,000. 00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- I) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- L) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: *(in words & figures)* N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES**(A) Description and rate of based on composite schedule of Rates**

ITEM No:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	274.63	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	872.00
2.	79.75	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	9003.00
3.	168.75	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	20163.00
4.	T-A 50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1.32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	4700.00
5.	T-B 50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1.32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	8700.00
6.	242.00	Cement plaster (1:4) up to 20' height ½" thick. (CSI.No.11 (b), P.No.18).	2283.93	P% Sft	5527.00
7.	24.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	8088.00
8.	0.964	Fabrication of M.S Reinforcement for C.C. i/c cutting bending lying in position making joints and fastening i/c cost of binding wire also i/c removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.20	P. Cwt	4823.00
9.	6.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	1554.00
PART-02 C.C BLOCKS					
1.	336.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 3(a) P.No: 1)	2117.50	P%0 Cft	711.00
2.	336.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	119.00

Continued.....

3.	336.00	Extra for every 50" ft additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P%0 Cft	1693.00
4.	110.88	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	10441.00
5.	84.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P%Cft	12121.00
6.	21.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI No: 19 Page No: 18)	3127.41	P% Sft	657.00
7.	24.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	6216.00
PART-03 PAVER BLOCKS					
1.	732.50	Hard Marrum or fine powdery Marrum	1800.00	P% Cft	13185.00
2.	732.50	Laying Earth Work 6" Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (b) P No: 03)	354.00	P%0 Cft	259.00
3.	966.90	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	91046.00
4.	2930.00	P&F cement paving block flooring having size of 197x97x80(mm) of city liquid cobble shape with painting having strength b/w 5000phi filling the joints with hill sand, white powder for dressing and laying in specified manner pater and design i/c L.C etc. complete (SI No: 72 P-49)	199.77	P. Sft.	585326.00
5.	60.80	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.6 P.No.16).Ratio 1:2:4	14429.25	P% Cft	8773.00
6.	56.25	Pacea brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	6721.00
7.	20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 100mm Pipe 4" dia	136.00	P.Rft	2720.00
8.	20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 150mm Pipe 6" dia	259.00	P.Rft	5180.00
TOTAL S.B					808,598

Amount Total (a)

.....% above / below on the rates of CSR.

Total (A) = a + b in words & figure

**Amount to be added / deducted on the basis
Of premium quoted**

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: CONSTT: OF SURFACE DRAINS & C.C BLOCK FROM ARAB UJJAN TO H/O LAL UJJAN WARD NO: 01 TALUKA GAMBAT
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 5, 00,000. 00
- e) Amount of Bid Security: 15,000. 00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: S. Dep: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax= 7.5%
- i) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- l) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: *(in words & figures)* N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES**(A) Description and rate of based on composite schedule of Rates**

ITEM NO:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	406.50	Dismantling and removing road metaling (CSI No: 51 Page No: 13)	605.00	P% Cft	2459.00
2.	121.00	Dismantling Cement concrete Plain (CSI No: 19 (b) Page No: 11)	3327.50	P% Cft	4026.00
3.	56.25	Dismantling brick work lime or cement mortar (CSI, 13 Page No: 10)	1285.63	P% Cft	723.00
4.	1420.75	Excavation in foundation building bridges and other structures i/c dig bedding dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	4513.00
5.	410.30	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	46318.00
6.	918.75	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	109776.00
7.	T-A 400.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	37600.00
8.	T-B 170.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	29580.00
9.	1361.00	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b), P.No.53).	2283.93	P% Sft	31084.00
10.	48.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	16176.00
11.	1.928	Fabrication of M.S Reinforcement for C.C. i/c cutting bending lying in position making joints and fastening i/c cost of binding wire also i/c removal of rust from bars. (CSI.No. (ii), P.No.20).	5001.70	P. Cwt	9643
PART-02 C.C BLOCKS					
1.	896.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 3(a) P.No: 1)	2117.50	P%0 Cft	1897.00
2.	896.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	317.00

Continued.....

3.	896.00	Extra for every 50' ft additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P%0 Cft	4515.00
4.	295.68	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	27842.00
5.	224.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P%Cft	32322.00
6.	56.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI. No: 19 Page No: 18)	3127.41	P% Sft	1751.00
7.	8.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	2072.00
TOTAL S.B					392,253

Amount Total (a)

.....% above / below on the rates of CSR.

**Amount to be added / deducted on the basis
Of premium quoted**

Total (A) = a + b in words & figure

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: CONST. OF S/DRAINS & CC BLOCK FROM QALANDAR BUX SONIO TO MUHAMMAD URIS WANDIAR & IMAM DINO WANDIAR, WANDIAR MUHALLA.
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10,00,000.00
- e) Amount of Bid Security: 30,000.00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: S. Dep: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- I) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- L) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: (in words & figures) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES

(A) Description and rate of based on composite schedule of Rates

ITEM NO:	QTY:	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	769.50	Dismantling and removing road metaling (CSI No: 51 Page No: 13)	605.00	P% Cft	4655
2.	271.00	Dismantling Cement concrete Plain (CSI No: 19 (b) Page No: 11)	3327.50	P% Cft	9018
3.	112.50	Dismantling brick work lime or cement mortar (CSI, 13 Page No: 10)	1285.63	P% Cft	1446
4.	1915.08	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	6083
5.	553.85	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	62523
6.	1222.50	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	146069
7.	T-A 490.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No; 44)	94.00	P. Rft	46060
8.	T-B 260.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No; 44)	174.00	P. Rft	45240
9.	1796.60	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b), P.No.58).	2283.93	P% Sft	41033
10.	72.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	24264
11.	2.893	Fabrication of M.S Reinforcement for C.C. I/c cutting bending lying in position making joints and fastening I/c cost of binding wire also I/c removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.20	P. Cwt	14469
PART-02 C.C BLOCKS					
1.	656.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 3(a) P.No: 1)	2117.50	P%0 Cft	1389
2.	656.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	232

Continued.....

3.	656.00	Extra for every 50" for additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P%0 Cft	3306
4.	216.48	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%0Cft	20384
5.	164.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P%0Cft	23664
6.	41.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI. No: 19 Page No: 18)	3127.41	P% Sft	1282
7.	16.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	4144
PART-03 PAVER BLOCKS					
1.	305.00	Hard Marrum or fine powdery Marrum	1800.00	P% Cft	5490
2.	305.00	Laying Earth Work 6" Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (b) P No: 03)	354.00	P%0 Cft	108
3.	402.60	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%0Cft	37910
4.	1220.00	P&F cement paving block flooring having size of 197x97x80(mm) of city/quad cobble shape with painting having strength b/w 5000psi filling the joints with hill sand, white powder for dressing and laying in specified manner pater and design i/c L.C etc. complete (SI No: 72 P-49)	199.77	P. Sft.	243719
5.	2532	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.6 P.No.16).Ratio 1:2:4	14429.25	P% Cft	3653
6.	112.50	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	13442
7.	10.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 100mm Pipe 4" dia	136.00	P.Rft	1360
8.	10.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 150mm Pipe 6" dia	259.00	P.Rft	2590
TOTAL S.B					763,533

Amount Total (a)

.....% above / below on the rates of CSR.

**Amount to be added / deducted on the basis
Of premium quoted**

Total (A) = a + b in words & figure

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: Const. Of S/Drains & CC Block from Masjid to Atta Hussain, Haji Juwan Muhalla
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 500,000. 00
- e) Amount of Bid Security: 15,000. 00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: Sec. Dep: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- I) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- L) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: (*in words & figures*) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES

(A) Description and rate of based on composite schedule of Rates

ITEM No:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	406.50	Dismantling and removing road metaling. (CS I No:51 P.No:13)	605.00	P% Cft	2459
2.	121.00	Dismantling Cement Concrete Plain (CS I No:19 B P.No:11) Ratio 1:2:4	3327.50	P% Cft	4026
3.	56.25	Dismantling brick work lime or cement mortar(CS I No:13 P.No:10)	1285.63	P% Cft	723
4.	1420.75	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	4513
5.	410.30	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	46318
6.	918.75	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	109776
7.	400.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	37600
8.	170.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	29580
9.	1361.00	Cement plaster (1:4) up to 20' height ½" thick. (CSI.No.11 (b), P.No.58).	2283.93	P% Sft	31084
10.	48.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	16176
11.	1.928	Fabrication of M.S Reinforcement for C.C. I/c cutting bending lying in position making joints and fastening I/c cost of binding wire also I/c removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.20	P. Cwt	9643
TOTAL					291898
PART-02 C.C BLOCKS					
1.	896.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 3 (a) P.No: 1)	2117.50	P%0 Cft	1897
2.	896.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	317

Continued.....

3.	896.00	Extra for every 50" ft additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P%0 Cft	4515
4.	295.68	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	27842
5.	224.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P%Cft	32322
6.	56.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI, No: 19 Page No: 18)	3127.41	P% Sft	1751
7.	8.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	2072
TOTAL S.B					70716

Amount Total (a)

.....% above / below on the rates of CSR.

Amount to be added / deducted on the basis
Of premium quoted

Total (A) = a + b in words & figure

Part-I (Surface Drains) Rs: 291898/=

Part-II (C.C Blocks) Rs: 70716/=

TOTAL S.B Rs: 362614/=

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT
- b) Brief Description of Works: Const. of S/Drains & CC Block from Gulab Ujjan to sanwal Ujjan, Haji Shah Muhalla.
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10,00000. 00
- e) Amount of Bid Security: 30,000. 00
- f) Period of Bid validity (days): 90 Days) Ninety days
- g) Security Deposit: S. Dep: 7%
- h) Percentage, if any, to be deducted from bills: Income Tax 7.5%
- i) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @MUNICIPAL COMMITTEE GAMBAT OFFICE DATED ON _____
- k) Time for completion from written order of commence: 12 Months
- L) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: (*In words & figures*) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES

(A) Description and rate of based on composite schedule of Rates

ITEM NO:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	406.50	Dismantling and removing road metaling (CSI No: 51 Page No: 13)	605.00	P% Cft	2459.00
2.	121.00	Dismantling Cement concrete Plain (CSI No: 19 (b) Page No: 11)	3327.50	P% Cft	4026.00
3.	56.25	Dismantling brick work lime or cement mortar (CSI, 13 Page No: 10)	1285.63	P% Cft	723.00
4.	1420.75	Excavation in foundation building bridges and other structures i/c dig bell dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	4513.00
5.	410.30	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	46318.00
6.	918.75	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	109776.00
7.	T-A 400.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	37600.00
8.	T-B 170.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	29580.00
9.	1361.00	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b), P.No.58).	2283.93	P% Sft	31084.00
10.	48.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	16176.00
11.	1.928	Fabrication of M.S Reinforcement for C.C. I/c cutting bending lying in position making joints and fastening I/c cost of binding wire also I/c removal of rust from bars. (CSI.No. (ii), P.No.20).	5001.70	P. Cwt	9643
PART-02 C.C BLOCKS					
1.	896.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 3(a) P.No: 1)	2117.50	P%0 Cft	1897.00
2.	896.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	317.00

Continued.....

3.	896.00	Extra for every 50" ft additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P%0 Cft	4515.00
4.	295.68	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	27842.00
5.	224.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P%Cft	32322.00
6.	56.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI No: 19 Page No: 18)	3127.41	P% Sft	1751.00
7.	8.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	2072.00
TOTAL S.B					392,253

Amount Total (a)


.....% above / below on the rates of CSR.

**Amount to be added / deducted on the basis
Of premium quoted**

Total (A) = a + b in words & figure

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

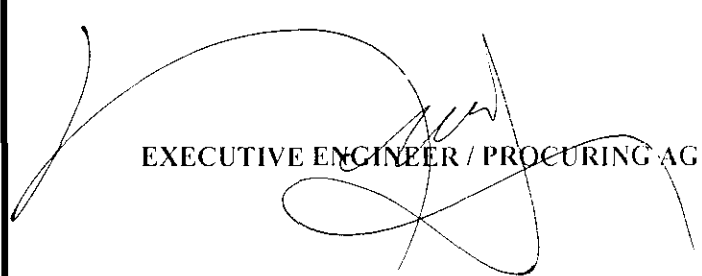

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT
- b) Brief Description of Works: Const. of S/Drains & CC Block from Gh. Akabar Soomro to Nabi Bux Bareecho & Madarsa at Abbasi Mohalla.
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10,00000. 00
- e) Amount of Bid Security: 30,000. 00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: S. Dep: 7%
- h) Percentage, if any, to be deducted from bills: Income Tax 7.5%
- I) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @MUNICIPAL COMMITTEE GAMBAT OFFICE DATED ON _____
- k) Time for completion from written order of commence: 12 Months
- L) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: (*in words & figures*) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES

(A) Description and rate of based on composite schedule of Rates

ITEM No:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	406.50	Dismantling and removing road metaling (CSI No: 51 Page No: 13)	605.00	P% Cft	2459.00
2.	121.00	Dismantling Cement concrete Plain (CSI No: 19 (b) Page No: 11)	3327.50	P% Cft	4026.00
3.	56.25	Dismantling brick work lime or cement mortar (CSI, 13 Page No: 10)	1285.63	P% Cft	723.00
4.	1420.75	Excavation in foundation building bridges and other structures i/c dig bedding dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	4513.00
5.	410.30	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	46318.00
6.	918.75	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	109776.00
7.	T-A 400.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	37600.00
8.	T-B 170.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1.32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	29580.00
9.	1361.00	Cement plaster (1:4) up to 20' height ½" thick. (CSI.No.11 (b), P.No.54).	2283.93	P% Sft	31084.00
10.	48.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	16176.00
11.	1.928	Fabrication of M.S Reinforcement for C.C. I/c cutting bending lying in position making joints and fastening I/c cost of binding wire also I/c removal of rust from bars. (CSI.No. (ii), P.No.20).	5001.70	P. Cwt	9643
PART-02 C.C BLOCKS					
1.	896.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 3(a) P.No: 1)	2117.50	P%0 Cft	1897.00
2.	896.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	317.00

Continued.....

3.	896.00	Extra for every 50" of additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P%0 Cft	4515.00
4.	295.68	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	27842.00
5.	224.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P%Cft	32322.00
6.	56.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI, No: 19 Page No: 18)	3127.41	P%Sft	1751.00
7.	8.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	2072.00
TOTAL S.B					392,253

Amount Total (a)

.....% above / below on the rates of CSR.

**Amount to be added / deducted on the basis
Of premium quoted**

Total (A) = a + b in words & figure

CONTRACTOR


EXECUTIVE ENGINEER / PROCURING AGENCY

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: CONSTT: OF SURFACE DRAINS C.C BLOCK & PAVER BLOCK FROM H/O UMMEED ALI TO IQBAL AHMED UJJAN WAR NO. 01 TALUKA GAMBAT
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10,00,000.00
- e) Amount of Bid Security: 30,000.00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- i) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- l) Liquidity Damages: N/A
- m) Deposit receipt No: Date Amount: (In words & figures) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES

(A) Description and rate of based on composite schedule of Rates

ITEM No:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	274.63	Excavation in foundation building bridges and other structures i/c dig bell dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	872.00
2.	79.75	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	9003.00
3.	168.75	Pacca brick work in foundation and plinth in cement Mortar 1:6 (C.SI.No.4 P.No.25).	11948.36	P% Cft	20163.00
4.	T-A 50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	4700.00
5.	T-B 50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	8700.00
6.	242.00	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b), P.No.53).	2283.93	P% Sft	5527.00
7.	24.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	8088.00
8.	0.964	Fabrication of M.S Reinforcement for C.C. I/c cutting bending lying in position making joints and fastening i/c cost of binding wire also I/c removal of rust from bars. (CSI.No. (ii). P.No.20).	4820.20	P. Cwt	4823.00
9.	6.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	1554.00
PART-02 C.C BLOCKS					
1.	336.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 1(a) P.No: 1)	2117.50	P%0 Cft	711.00
2.	336.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	119.00

Continued.....

3.	336.00	Extra for every 50" ft additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P% Cft	1693.00
4.	110.88	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P% Cft	10441.00
5.	84.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P% Cft	12121.00
6.	21.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI No: 19 Page No: 18)	3127.41	P% Sft	657.00
7.	24.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	6216.00
PART-03 PAVER BLOCKS					
1.	732.50	Hard Marrum or fine powdery Marrum	1800.00	P% Cft	13185.00
2.	732.50	Laying Earth Work 6" Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (b) P No: 03)	354.00	P% Cft	259.00
3.	966.90	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P% Cft	91046.00
4.	2930.00	P&F cement paving block flooring having size of 197x97x80(mm) of city liquid cobble shape with painting having strength b/w 5000psi filling the joints with hill sand, white powder for dressing and laying in specified manner /patter and design i/c L.C etc. complete (SI No: 72 P-49)	199.77	P. Sft.	585326.00
5.	60.80	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.6 P.No.16).Ratio 1:2:4	14429.25	P% Cft	8773.00
6.	56.25	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	6721.00
7.	20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 100mm Pipe 4" dia	136.00	P.Rft	2720.00
8.	20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 150mm Pipe 6" dia	259.00	P.Rft	5180.00
TOTAL S.B					808,598

Amount Total (a)

.....% above / below on the rates of CSR.

Total (A) = a + b in words & figure

Amount to be added / deducted on the basis
Of premium quoted

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: DUST BINS FOR GARBAGE REMOVAL FOR WARD NO.08 TO WARD NO.13 OF M.C GAMBAT
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10,00,000. 00
- e) Amount of Bid Security: 30,000. 00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: S.Dep: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- i) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- L) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: (*in words & figures*) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES (NON-SCHEDULE)

(B) DESCRIPTION AND RATE OF ITEMS BASED ON MARKET (OFFERED RATES)

ITEM NO:	QUANTITIES	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
1.	42.00	Supply and fixing Dustbin for Garbage with foundation etc complete	14350.00	Per Job	602700
2.	34.00	Supply and Fixing Fiber Glass dustbin for garbage etc complete	11650.00	Per Job	396100
TOTAL					998800

Cost of Bid

Amount

1. (A) Cost based on Composite Schedule of Rates.

Rs: Nil

2. (B) Cost based on Non/Offered Schedule of Rates.

Rs: 998800/=

Total A+ B Rs: 998,800/=

TOTAL COST OF BID (C) = Total (A) + Total (B)

Contractor

Assistant Executive Engineer/Procuring Agency

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: DUST BINS FOR GARBAGE REMOVAL FOR WARD NO.02 TO WARD NO. 07 OF M.C GAMBAT
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10,00,000. 00
- e) Amount of Bid Security: 30,000. 00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: S.Dep: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- I) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- L) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: (*in words & figures*) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES (NON-SCHEDULE)

(B) DESCRIPTION AND RATE OF ITEMS BASED ON MARKET (OFFERED RATES)

ITEM NO:	QUANTITIES	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
1.	42.00	Supply and fixing Dustbin for Garbage with foundation etc complete	14350.00	Per Job	602700
2.	34.00	Supply and Fixing Fiber Glass dustbin for garbage etc complete	11650.00	Per Job	396100
TOTAL					998800

Cost of Bid

Amount

1. (A) Cost based on Composite Schedule of Rates.

Rs: Nil

2. (B) Cost based on Non/Offered Schedule of Rates.

Rs: 998800/=

Total A+ B Rs: 998,800/=

TOTAL COST OF BID (C) = Total (A) + Total (B)

Contractor

Assistant Executive Engineer/Procuring Agency

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: CONST. OF S/DRAINS CC BLOCK & CC PAVER FROM H/O KHAN MUHAMMAD SHAIKH TO SAIFI MUHAMMAD SHAIKH, SHAIKH MUHALLA.
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10, 00,000. 00
- e) Amount of Bid Security: 30,000. 00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: Sec. Deposit 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- l) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- L) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: *(in words & figures)* N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES

(A) Description and rate of based on composite schedule of Rates

ITEM No:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	274.63	Excavation in foundation building bridges and other structures i/c dig bell dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	872
2.	79.75	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	9003
3.	168.75	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	20163
4.	50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	4700
5.	50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	8700
6.	242.00	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b), P.No.58).	2283.93	P% Sft	5527
7.	24.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	8088
8.	0.964	Fabrication of M.S Reinforcement for C.C. I/c cutting bending lying in position making joints and fastening I/c cost of binding wire also I/c removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.20	P. Cwt	4822
9.	6.00	Providing and Fixing UPC Pipe of Class "B" fixing in trench i/c cutting, fitting and jointing i/c testing of water to a head of 61 meter of 200ft. (CSI, 04 P/23) PIPE 6" DIA	259.00	P. Rft	1554
PART-02 C.C BLOCKS					
1.	336.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: B(a) P.No: 1)	2117.50	P%0 Cft	711
2.	336.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	119

Continued.....

3.	336.00	Extra for every 50" ft additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P% Cft	1693
4.	110.88	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P% Cft	10441
5.	84.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P% Cft	12121
6.	21.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI No: 19 Page No: 18)	3127.41	P% Sft	657
7.	24.00	Providing and Fixing UPC Pipe of Class "B" fixing in trench i/c cutting, fitting and jointing i/c testing of water to a head of 61 meter of 200ft. (CSI, 04 P/23) PIPE 6" DIA	259.00	P. Rft	6216
PART-03 PAVER BLOCKS					
1.	732.50	Hard Marrum or fine powdery Marrum	1800.00	P% Cft	13185
2.	732.50	Laying Earth Work 6" Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (b) P No: 03)	354.00	P% Cft	259
3.	966.90	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P% Cft	91046
4.	2930.00	P&F cement paving block flooring having size of 197x97x80(mm) of cityquid cobble shape with painting having strength b/w 5000psi filling the joints with hill sand, white powder for dressing and laying in specified manner /patter and design i/c L.C etc. complete (SI No: 72 P-49)	199.77	P. Sft.	585326
5.	80.80	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.6 P.No.16).Ratio 1:2:4	14429.25	P% Cft	8773
6.	56.25	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	6721
7.	20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 100mm Pipe 4" dia	136.00	P.Rft	2720
8.	20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 150mm Pipe 6" dia	259.00	P.Rft	5180
TOTAL S.B					808,597

Amount Total (a)

.....% above / below on the rates of CSR.

Total (A) = a + b in words & figure

**Amount to be added / deducted on the basis
Of premium quoted**

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: Const. of S/Drains CC Block & CC Paver from Soomra House to main Old market Road, Gharibabad Muhalla.
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10,00,000/=
- e) Amount of Bid Security: 30,000/=
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: S.Dep: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- l) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- L) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: (in words & figures) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES**(A) Description and rate of based on composite schedule of Rates**

ITEM No:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	274.63	Excavation in foundation building bridges and other structures i/c dig bedding dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	872
2.	79.75	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P%0 Cft	9003
3.	168.75	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	20163
4.	50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	4700
5.	50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	8700
6.	242.00	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b), P.No.58).	2283.93	P% Sft	5527
7.	24.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	8088
8.	0.964	Fabrication of M.S Reinforcement for C.C. i/c cutting bending lying in position making joints and fastening i/c cost of binding wire also i/c removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.20	P. Cwt	4822
9.	6.00	Providing and Fixing U/C Pipe of Class "B" fixing in trench i/c cutting, fitting and jointing i/c testing of water to a head of 61 meter of 200ft. (CSI, 04 P/23) PIPE 6" DIA	259.00	P. Rft	1554
PART-02 C.C BLOCKS					
1.	336.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 3(a) P.No: 1)	2117.50	P%0 Cft	711
2.	336.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	119

Continued.....

3.	336.00	Extra for every 50" of additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P% Cft	1693
4.	110.88	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P% Cft	10441
5.	84.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P% Cft	12121
6.	21.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI No: 19 Page No: 18)	3127.41	P% Sft	657
7.	24.00	Providing and Fixing UPC Pipe of Class "B" fixing in trench i/c cutting, fitting and jointing i/c testing of water to a head of 61 meter of 200ft. (CSI, 04 P/23) PIPE 6" DIA	259.00	P. Rft	6216
PART-03 PAVER BLOCKS					
1.	732.50	Hard Marrum or fine powdery Marrum	1800.00	P% Cft	13185
2.	732.50	Laying Earth Work (1) Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (b) P No: 03)	354.00	P%0 Cft	259
3.	966.90	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P% Cft	91046
4.	2930.00	P&F cement paving block flooring having size of 197x97x80(mm) of city/liquid cobble shape with painting having strength b/w 5000psi filling the joints with hill sand, white powder for dressing and laying in specified manner (patter and design i/c L.C etc. complete (SI No: 72 P-49)	199.77	P. Sft.	585326
5.	60.80	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.16).Ratio 1:2:4	14429.25	P% Cft	8773
6.	56.25	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	6721
7.	20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 100mm Pipe 4" dia	136.00	P.Rft	2720
8.	20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 150mm Pipe 6" dia	259.00	P.Rft	5180
TOTAL S.B					808,597

Amount Total (a)

.....% above / below on the rates of CSR.

**Amount to be added / deducted on the basis
Of premium quoted**

Total (A) = a + b in words & figure

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: CONST. OF S/DRAINS CC BLOCK & CC PAVER FROM GOVT. GIRLS HIGH SCHOOL TO ANAAJ MANDI.
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10, 00,000. 00
- e) Amount of Bid Security: 30,000. 00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: Sec. Deposit 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- i) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- L) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: *(in words & figures)* N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES

(A) Description and rate of based on composite schedule of Rates

ITEM NO:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	274.63	Excavation in foundation building bridges and other structures i/c dig bedding dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	872
2.	79.75	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	9003
3.	168.75	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	20163
4.	50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	4700
5.	50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	8700
6.	242.00	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b), P.No.58).	2283.93	P% Sft	5527
7.	24.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	8088
8.	0.964	Fabrication of M.S Reinforcement for C.C. I/c cutting bending lying in position making joints and fastening I/c cost of binding wire also I/c removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.20	P. Cwt	4822
9.	6.00	Providing and Fixing UPC Pipe of Class "B" fixing in trench i/c cutting, fitting and jointing i/c testing of water to a head of 61 meter of 200ft. (CSI, 04 P/23) PIPE 6" DIA	259.00	P. Rft	1554
PART-02 C.C BLOCKS					
1.	336.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 3(a) P.No: 1)	2117.50	P%0 Cft	711
2.	336.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	119

Continued.....

3.	336.00	Extra for every 50" ft additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P%0 Cft	1693
4.	110.88	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P% Cft	10441
5.	84.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P% Cft	12121
6.	21.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI, No: 19 Page No: 18)	3127.41	P% Sft	657
7.	24.00	Providing and Fixing UPC Pipe of Class "B" fixing in trench i/c cutting, fitting and jointing i/c testing of water to a head of 61 meter of 200ft. (CSI, 04 P/23) PIPE 6" DIA	259.00	P. Rft	6216
PART-03 PAVER BLOCKS					
1.	732.50	Hard Marrum or fine powdery Marrum	1800.00	P% Cft	13185
2.	732.50	Laying Earth Work 6" Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (b) P No: 03)	354.00	P%0 Cft	259
3.	966.90	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P% Cft	91046
4.	2930.00	P&F cement paving block flooring having size of 197x97x80(mm) of city liquid cobble shape with painting having strength b/w 5000psi filling the joints with hill sand, white powder for dressing and laying in specified manner patter and design i/c L.C etc. complete (SI No: 72 P-49)	199.77	P. Sft.	585326
5.	60.80	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.6 P.No.16).Ratio 1:2:4	14429.25	P% Cft	8773
6.	56.25	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	6721
7.	20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 100mm Pipe 4" dia	136.00	P.Rft	2720
8.	20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 150mm Pipe 6" dia	259.00	P.Rft	5180
TOTAL S.B					808,597

Amount Total (a)

.....% above / below on the rates of CSR.

Amount to be added / deducted on the basis
Of premium quoted

Total (A) = a + b in words & figure

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

Draft Bidding documents for works up to Millions

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: CONST. OF S/DRAINS CC BLOCK & CC PAVER From H/O OF NOORUDDIN PANHWAR TO H/ O BAHADUR SHAIKH, SHAIKH MUHALLA GAMBAT
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10, 00,000. 00
- e) Amount of Bid Security: 30,000. 00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: Sec. Deposit 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- I) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- L) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: (in words & figures) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES

(A) Description and rate of based on composite schedule of Rates

ITEM NO:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	274.63	Excavation in foundation building bridges and other structures i/c dig bell dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	872
2.	79.75	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	9003
3.	168.75	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	20163
4.	50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	4700
5.	50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	8700
6.	242.00	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b), P.No.58).	2283.93	P% Sft	5527
7.	24.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	8088
8.	0.964	Fabrication of M.S Reinforcement for C.C. I/c cutting bending lying in position making joints and fastening i/c cost of binding wire also i/c removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.20	P. Cwt	4822
9.	6.00	Providing and Fixing UPC Pipe of Class "B" fixing in trench i/c cutting, fitting and jointing i/c testing of water to a head of 61 meter of 200ft. (CSI, 04 P/23) PIPE 6" DIA	259.00	P. Rft	1554
PART-02 C.C BLOCKS					
1.	336.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 3(a) P.No: 1)	2117.50	P%0 Cft	711
2.	336.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	119

Continued.....

3.	336.00	Extra for every 50" of additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P%0 Cft	1693
4.	110.88	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	10441
5.	84.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P%Cft	12121
6.	21.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI, No: 19 Page No: 18)	3127.41	P% Sft	657
7.	24.00	Providing and Fixing UPC Pipe of Class "B" fixing in trench i/c cutting, fitting and jointing i/c testing of water to a head of 61 meter of 200ft. (CSI, 04 P/23) PIPE 6" DIA	259.00	P. Rft	6216
PART-03 PAVER BLOCKS					
1.	732.50	Hard Marrum or fine powdery Marrum	1800.00	P% Cft	13185
2.	732.50	Laying Earth Work 6" Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (b) P No: 03)	354.00	P%0 Cft	259
3.	966.90	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	91046
4.	2930.00	P&F cement paving block flooring having size of 197x97x80(mm) of city liquid cobble shape with painting having strength b/w 5000psi filling the joints with hill sand, white powder for dressing and laying in specified manner /patter and design i/c L.C etc. complete (SI No: 72 P-49)	199.77	P. Sft.	585326
5.	60.80	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.6 P.No.16).Ratio 1:2:4	14429.25	P% Cft	8773
6.	56.25	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	6721
7.	20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 100mm Pipe 4" dia	136.00	P.Rft	2720
8.	20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 150mm Pipe 6" dia	259.00	P.Rft	5180
TOTAL S.B					808,597

Amount Total (a)

.....% above / below on the rates of CSR.

**Amount to be added / deducted on the basis
Of premium quoted**

Total (A) = a + b in words & figure

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

Draft Biding documents for works up to Millions

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: Repair and streets lights/ Polls from Agra Road to Ali Bux Ujjan Village Gambat
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10,00,000. 00
- e) Amount of Bid Security: 30,000. 00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: S.Dep: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- I) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- L) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: (*n words & figures*) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES (NON-SCHEDULE)**(B) DESCRIPTION AND RATE OF ITEMS BASED ON MARKET (OFFERED RATES)**

ITEM NO:	QUANTITIES	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
1.	30.00	Supply and fixing fancy light in round shape and Energy LED light 45watts	4268.00	Each	128040
2.	20.00	Supply and fixing Lawn Light poles of 10' long 5"x13"x2" complete with socket	8500.00	Each	170000
3.	20.00	Cement concrete foundation of lawn light poles 15"x15" with 4" Ratio 1:2:4	3150.00	Each	63000
4.	50.00	Supply and Fixing anchor bolts of fixing C.C foundation for Poles	250.00	Each	12500
5.	40.00	Paint for poles	600.00	Each	24000
6.	10.00	PVC Coil 7/52	8000.00	Each	80000
7.	100.00	LED Light 40watts	1300.00	Each	130000
8.	200.00	Sewers 45Watts (Standard Quality)	750.00	Each	150000
9.	104.00	Sewer 85 Watts (Standard Quality)	1250.00	Each	130000
10.	10.00	Wire 3/29 Single	1750.00	Each	17500
11.	15.00	Wire 7/29 Copper Single	3200.00	Each	48000
12.	300.00	Holder	150.00	Each	45000
TOTAL					998040

Cost of Bid**Amount**

1. (A) Cost based on Composite Schedule of Rates.

Rs: Nil

2. (B) Cost based on Non/Offered Schedule of Rates.

Rs: 998040/=

Total A+ B Rs: 998,040/=

TOTAL COST OF BID (C) = Total (A) + Total (B)

Contractor

Assistant Executive Engineer/Procuring Agency

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: CONST. OF S/DRAINS CC BLOCK & CC PAVER FROM H/O INAYAT UJJAN TO SULEMAN UJJAN, UJJAN MUHALLA.
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10, 00,000. 00
- e) Amount of Bid Security: 30,000. 00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: Sec. Deposit 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- I) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- L) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: *(in words & figures)* N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES**(A) Description and rate of based on composite schedule of Rates**

ITEM NO:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	274.63	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	872
2.	79.75	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P%0 Cft	9003
3.	168.75	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	20163
4.	50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	4700
5.	50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	8700
6.	242.00	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b), P.No.58).	2283.93	P%0 Sft	5527
7.	24.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	8088
8.	0.964	Fabrication of M.S Reinforcement for C.C. I/c cutting bending lying in position making joints and fastening I/c cost of binding wire also I/c removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.20	P. Cwt	4822
9.	6.00	Providing and Fixing UPC Pipe of Class "B" fixing in trench i/c cutting, fitting and jointing i/c testing of water to a head of 61 meter of 200ft. (CSI, 04 P/23) PIPE 6" DIA	259.00	P. Rft	1554
PART-02 C.C BLOCKS					
1.	336.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 3(a) P.No: 1)	2117.50	P%0 Cft	711
2.	336.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	119

Continued.....

3.	336.00	Extra for every 50" of additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P% Cft	1693
4.	110.88	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P% Cft	10441
5.	84.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P% Cft	12121
6.	21.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI, No: 19 Page No: 18)	3127.41	P% Sft	657
7.	24.00	Providing and Fixing UPC Pipe of Class "B" fixing in trench i/c cutting, fitting and jointing i/c testing of water to a head of 61 meter of 200ft. (CSI, 04 P/23) PIPE 6" DIA	259.00	P. Rft	6216
PART-03 PAVER BLOCKS					
1.	732.50	Hard Marrum or fine powdery Marrum	1800.00	P% Cft	13185
2.	732.50	Laying Earth Work 6" Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (b) P No: 03)	354.00	P% Cft	259
3.	966.90	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P% Cft	91046
4.	2930.00	P&F cement paving block flooring having size of 197x97x80(mm) of city liquid cobble shape with painting having strength b/w 5000psi filling the joints with hill sand, white powder for dressing and laying in specified manner /patter and design i/c L.C etc. complete (SI No: 72 P-49)	199.77	P. Sft.	585326
5.	60.80	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.6 P.No.16).Ratio 1:2:4	14429.25	P% Cft	8773
6.	56.25	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	6721
7.	20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 100mm Pipe 4" dia	136.00	P.Rft	2720
8.	20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 150mm Pipe 6" dia	259.00	P.Rft	5180
TOTAL S.B					808,597

Amount Total (a)

.....% above / below on the rates of CSR.

**Amount to be added / deducted on the basis
Of premium quoted**

Total (A) = a + b in words & figure

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: CONST. OF S/DRAINS CC BLOCK & CC PAVER FROM H/O DR. NABI BUX SHAIKH, AGRA ROAD GAMBAT
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10, 00,000. 00
- e) Amount of Bid Security: 30,000. 00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- I) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- L) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: (in words & figures) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES**(A) Description and rate of based on composite schedule of Rates**

ITEM NO:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	274.63	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	872.00
2.	79.75	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	9003.00
3.	168.75	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	20163.00
4.	T-A 50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	4700.00
5.	T-B 50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	8700.00
6.	242.00	Cement plaster (1:4) up to 20' height ½" thick. (CSI.No.11 (b), P.No.53).	2283.93	P% Sft	5527.00
7.	24.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	8088.00
8.	0.964	Fabrication of M.S Reinforcement for C.C. I/c cutting bending lying in position making joints and fastening I/c cost of binding wire also I/c removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.20	P. Cwt	4823.00
9.	6.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	1554.00
PART-02 C.C BLOCKS					
1.	336.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 3(a) P.No: 1)	2117.50	P%0 Cft	711.00
2.	336.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	119.00

Continued.....


3.	336.00	Extra for every 50" ft additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P%0 Cft	1693.00
4.	110.88	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No. 7).Ratio 1:4:8	9416.28	P%Cft	10441.00
5.	84.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P%Cft	12121.00
6.	21.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI, No: 19 Page No: 18)	3127.41	P% Sft	657.00
7.	24.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	6216.00
PART-03 PAVER BLOCKS					
1.	732.50	Hard Marrum or fine powdery Marrum	1800.00	P% Cft	13185.00
2.	732.50	Laying Earth Work 6" Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (b) P No: 03)	354.00	P%0 Cft	259.00
3.	966.90	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No. 7).Ratio 1:4:8	9416.28	P%Cft	91046.00
4.	2930.00	P&F cement paving block flooring having size of 197x97x80(mm) of city/liquid cobble shape with painting having strength b/w 5000psi filling the joints with hill sand. white powder for dressing and laying in specified manner /patter and design i/c L.C etc. complete (SI No: 72 P-49)	199.77	P. Sft.	585326.00
5.	60.80	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.6 P.No.16).Ratio 1:2:4	14429.25	P% Cft	8773.00
6.	56.25	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	6721.00
7.	20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 100mm Pipe 4" dia	136.00	P.Rft	2720.00
8.	20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 150mm Pipe 6" dia	259.00	P.Rft	5180.00
TOTAL S.B					808,598

Amount Total (a)

.....% above / below on the rates of CSR.

Total (A) = a + b in words & figure

**Amount to be added / deducted on the basis
Of premium quoted**



Draft Bidding documents for works up to _____ Millions

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: RENOVATION OF VEGETABLE MARKET SHOPS OF M.C GAMBAT SHEPINO: ct 6 to
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 100,000. 00
- e) Amount of Bid Security: 30,000. 00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: S.Dep: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- i) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- l) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: (in words & figures) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES**(A) Description and rate of based on composite schedule of Rates**

ITEM No.	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
RENOVATION OF VEGETABLE MARKET					
1.	792.00	Dismantling brick work lime or cement mortar (CSI. 13 Page No: 10)	1285.63	P% Cft	10182.00
2.	22.41	Dismantling Cement concrete Plain (CSI No: 19 (b) Page No: 11)	5445.00	P% Cft	1220.00
3.	504.00	Removing Cement or Lime plaster (CSI. 53 P-13)	121.00	P% Cft	610.00
4.	331.50	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18.P.No.4)	3176.25	P%0 Cft	1053.00
5.	82.87	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	7803.00
6.	287.17	Pacea brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	34312.00
7.	96.18	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a). P.No.19).	337.00	P. Cft	32413.00
8.	3.86	Fabrication of M.S Reinforcement for C.C. I/c cutting bending lying in position making joints and fastening I/c cost of binding wire also I/c removal of rust from bars. (CSI.No. (ii). P.No.20).	5001.70	P. Cwt	19307.00
9.	1082.80	Pacea brick work in ground floor cement Mortar 1:6 (CSI.No.6 P.No.25).	12674.36	P%Cft	137238.00
10.	42.48	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a). P.No.19).	337.00	P. Cft	14316.00
11.	1.70	Fabrication of M.S Reinforcement for C.C. I/c cutting bending lying in position making joints and fastening I/c cost of binding wire also I/c removal of rust from bars. (CSI.No. (ii). P.No.20).	5001.70	P. Cwt	8503.00
12.	111.07	Pacea brick work in ground floor cement Mortar 1:6 (CSI.No.6 P.No.25).	12674.36	P%Cft	14077.00
13.	6.74	Providing and fixing guarder 4x8 of approved quality (SRM NO: 140 (a) P-57)	3850.00	P. Cwt	25949.00

Continued.....

14.	16.86	Providing and fixing Tiles of approved quality (SRMI NO: 144 P-10)	3575.00	P. Cwt	60275.00
15.	793.12	Second class tiles roofing consisting of 4" earth and 1" mud plaster with Goble plaster over 1/2" thick cement plaster 1:6 with 34 lbs of hot bitumen coating sand blinded providing over one layer of 12" x 6" x 2" tiles laid in 1:6 cement mortar including (1:2) curing complete. (CSI. NO: 02 P-33)	7607.25	P% Sft	60335.00
16.	360.00	Supplying and Filling under floor and plugging in well (CSI No:05 P.No:30)	1141.25	P% Cft	4109.00
17.	360.00	Extra additional lead for every 50' ft	5039.00	P% Cft	1814.00
18.	90.00	Cement concrete Bricks or stone ballast (CSI.No.5 P.No.18).Ratio 1:4:8	9416.48	P% Cft	8475.00
19.	165.42	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.4 P.No.18).Ratio 1:2:4	14429.25	P% Cft	23869.00
20.	2556.00	Cement plaster (1:6) up to 20' height 1/2" thick. (CSI.No. P.No.)	2122.72	P% Sft	54257.00
21.	2556.00	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No. P.No.)	2283.93	P% Sft	58377.00
22.	230.25	Providing laying glazed tile (CSI No: 60 Page No: 47)	30509.77	P% Sft	70249.00
23.	324.00	Laying White marble flooring fine dressed white on the surface 3/4" thick (CSI. No: 28 P-43)	302.00	P. Sft	206568.00
24.	2556.00	White Wash 2Coats	425.84	P% Sft.	10884.00
25.	2556.00	Distempering with two coats (CSI. No: 24 P-54)	1043.90	P% Sft.	26682.00
26.	50.00	Providing and fixing GI Sheet rolling shelter (CSI. No: 33 P-94)	264.96	P% Sft.	14838.00
				TOTAL S.B	907,715

Amount Total (a)

.....% above / below on the rates of CSR.

**Amount to be added / deducted on the basis
Of premium quoted**

Total (A) + (b) in words & figure

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

Draft Biding documents for works up to Millions

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: CONST: OF SHOPS OF VEGETABLE MARKET OF MUNICIPAL COMMITTEE GAMBAT SHOP No 1 16-05
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: ~~100,000.00~~ 10,00,000/-
- e) Amount of Bid Security: 30,000.00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: S.Dep: 7%
- h) Percentage, if any, to be deducted from bills: 1-Tax 7.5%
- i) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- l) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: (in words & figures) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES

(A) Description and rate of based on composite schedule of Rates

ITEM No.	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
CONSTT: OF SHOPS					
1.	725.18	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSL.No.18.P.No.4)	3176.25	P% Cft	2300
2.	217.56	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSL.No.4 P.No.17).Ratio 1:4:8	9416.28	P% Cft	20487
3.	541.81	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSL.No.4 P.No.25).	11948.36	P% Cft	64777
4.	183.83	RCC work in roof slab beams columns ralis lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSL.No.6 (a). P.No.19).	337.00	P. Cft	61951
5.	7.38	Fabrication of M.S Reinforcement for C.C. i/c cutting bending lying in position making joints and fastening i/c cost of binding wire also i/c removal of rust from bars. (CSL.No. (ii). P.No.20).	5001.70	P. Cwt	36971
6.	789.45	Pacca brick work in ground floor cement Mortar 1:6 (CSL.No.6 P.No.25).	12674.36	P% Cft	100058
7.	39.12	RCC work in roof slab beams columns ralis lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSL.No.6 (a). P.No.19).	337.00	P. Cft	13151
8.	1.58	Fabrication of M.S Reinforcement for C.C. i/c cutting bending lying in position making joints and fastening i/c cost of binding wire also i/c removal of rust from bars. (CSL.No. (ii). P.No.20).	5001.70	P. Cwt	7903
9.	102.07	Pacca brick work in ground floor cement Mortar 1:6 (CSL.No.6 P.No.25).	12674.36	P% Cft	13065
10.	5.46	Providing and fixing guarder 4x8 of approved quality (SRMI NO: 140 (a) P-57)	3850.00	P. Cwt	21021
11.	12.32	Providing and fixing T-iron of approved quality (SRMI NO: 144 P-10)	3575.00	P. Cwt	44044
12.	586.50	Second class tiles roofing consisting of 4" earth and 1" mud plaster with Gobri leaping over 1/2" thick cement plaster 1:6 with 34 lbs of hot bitumen coating sand blinded providing over one layer of 12" x 6" x 2" tiles laid in 1:6 cement mortar including (1:2) curing complete. (CSL NO: 02 P-33)	7607.25	P% Sft	44617
13.	720.00	Supplying and Filling under floor and plugging in well (CSL No:05 P.No:30)	1141.25	P% Cft	8217
14.	720.00	Extra additional lead for every 50' ft	5039.00	P% Cft	3628
15.	180.00	Cement concrete Bricks or stone ballast (CSL.No.5 P.No.18).Ratio 1:4:8	9416.48	P% Cft	16959

(Continued)

16.	189.70	Cement concrete plain concrete placing compacting finishing and curing complete including screening and washing of stone aggregate without Shuttering. (CSI.No.4 P.No.18).Ratio 1:2:4	14429.25	P% Cft	27372
17.	3252.00	Cement plaster (1:6) up to 20' height 1/2" thick. (CSI.No. P.No.)	2122.72	P% Sft	69031
18.	3252.00	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No. P.No.)	2283.93	P% Sft	74273
19.	53.11	Pucca brick work in other than buildings cement Mortar 1:6 (CSI.No.6 P.No.25).	12346.65	P%Cft	6557
20.	360.00	Providing laying glazed tile (CSI.No: 60 Page No: 47)	30509.77	P% Sft	109835
21.	300.00	White glazed tile 3/4" thick dado jointed in cement and laid over 1:2 cement sand mortar 3/4" thick including finishing (CSI. No: 37 P-44)	28299.30	P. Sft	84898
22.	3252.00	White Wash one Coat	425.84	P. Sft	13848
23.	3252.00	Distempering with two coats (CSI. No: 24 P-54)	1043.90	P. Sft	33948
TOTAL S.B					878,939

Amount Total (a)

.....% above / below on the rates of CSR.

Amount to be added / deducted on the basis
Of premium quoted

Total (A) = a + b in words & figure

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: RENOVATION OF COMPOUND WALL AT GOVERNMENT MURAD HIGH SCHOOL PLAYGROUND GAMBAT
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10,00,000. 00
- e) Amount of Bid Security: 30,000. 00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- I) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- L) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: *(in words & figures)* N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES**(A) Description and rate of based on composite schedule of Rates**

ITEM NO:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
COMPOUND WALL					
1.	837.22	Dismantling brick work lime or cement mortar (CSI, 13 Page No: 10)	1285.63	P% Cft	10764.00
2.	279.00	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	886.00
3.	84.00	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	7910.00
4.	650.08	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	77674.00
5.	713.43	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	240426.00
6.	28.660	Fabrication of M.S Reinforcement for C.C. I/c cutting bending lying in position making joints and fastening I/c cost of binding wire also I/c removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.20	P. Cwt	138147.00
7.	960.00	Providing and fixing in position iron / steel grill of 3/4" into 1/4" size flat iron of approved etc (CSI, 26 P-93)	180.50	P. Cwt	173280.00
8.	176.00	Providing and fixing steel grill door etc (CSI, No: 31 P/94)	231.60	P. Cwt	40762.00
9.	1499.38	Cement Plaster (1:4) up to 20' height 3/8" thick (CSI, No: 11 (a) page No: 52)	2283.93	P% Sft	34245.00
10.	212.50	Providing laying Tile Glazed 6"x6"x1/4" on floor or wall facing in required color and pattern of STILE specification jointed in white cement and pigment in desired shape with finishing cleaning and cost of wax polish etc. complete i/c cutting tiles to proper profile (CSI No: 60 Page-53) (Halla)	47651.56	P% Sft	101260.00
11.	1136.00	Preparing surface painting doors and windows any type i/c edge (CSI, No: 05 P/69)	686.95	P% Sft	7804.00
12.	1499.38	White Washing one Coat (CSI, No: 25 Page-54)	416.63	P Sft	6247.00

Continued.....

13.	1499.40	Color Washing Two Coats (CSI, No: 25 (a) Page-60)	859.90	P Sft	12893.00
				TOTAL S.B	852,298


Amount Total (a)

.....% above / below on the rates of CSR.

**Amount to be added / deducted on the basis
Of premium quoted**

Total (A) = a + b in words & figure

CONTRACTOR

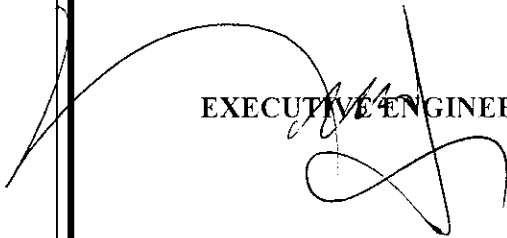

EXECUTIVE ENGINEER / PROCURING AGENCY

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT
- b) Brief Description of Works: PUBLIC TOILET AT OLD MUNICIPAL COMMITTEE GAMBAT PARK.
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT TALUKA GAMBAT DISTT: KHAIRPUR MIR'S
- d) Estimated Cost: 500,000. 00
- e) Amount of Bid Security: 15,000. 00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: S.Dep: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- I) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @MUNICIPAL COMMITTEE GAMBAT OFFICE DATED ON _____
- k) Time for completion from written order of commence: 12 Months
- L) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: *(in words & figures)* N/A

(Assistant Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES**(A) Description and rate of based on composite schedule of Rates**

ITEM NO:	QUANTITIES	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
1.	255.00	Excavation in foundation building bridges and other structures i/c dig bell dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18.P.No.4)	3176.25	P% Cft	810
2.	63.75	Cement concrete brick or stone ballast 1-1/2" 2" gauge (CSI No: 04 P/ 7) Ratio 1:4:8	9416.28	P% Cft	6003
3.	187.00	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	22343
4.	38.25	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P.Cft	12890
5.	1.53	Fabrication of M.S Reinforcement for C.C. i/c cutting bending lying in position making joints and fastening i/c cost of binding wire also i/c removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.20	P. Cwt	7375
6.	80.00	Supplying and Filling under floor and plugging in walls (CSI No:29 P.No:26)	1141.25	P% Cft	913
7.	80.00	Extra Lead up to 03 Miles	579.41	P% Cft	464
8.	178.50	Pacca brick work in ground floor in cement Mortar 1:6 (CSI.No.4 P.No.25).	12674.36	P% Cft	22624
9.	6.19	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P.Cft	2086
10.	0.24	Fabrication of M.S Reinforcement for C.C. i/c cutting bending lying in position making joints and fastening i/c cost of binding wire also i/c removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.20	P. Cwt	1157
11.	70.31	Pacca brick work in ground floor in cement Mortar 1:6 (CSI.No.4 P.No.25).	12674.36	P% Cft	8911
12.	13.20	Cement concrete brick or stone ballast 1-1/2" 2" gauge (CSI No: 04 P/ 7) Ratio 1:4:8	9416.28	P% Cft	1243
13.	10.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.4 P.No.16). Ratio 1:2:4	14429.25	P% Cft	1443
14.	440.00	Cement plaster (1:6) up to 20' height 1/2" thick. (CSI.No.11 (b), P.No.58)	2283.93	P% Sft	10049
15.	1.50	Providing and fixing guarder 4x8 of approved quality (SRMI NO: 140 (a) P-57)	3850.00	P. Cwt	5775
16.	1.67	Providing and fixing T-iron of approved quality (SRMI NO: 144 P-10).	3575.00	P. Cwt	5970
17.	76.00	Laying floor of approved with glazed tile 1/4" thick in white cement 1:2 over 3/4" thick cement mortar 1:2 complete (CSI, No: 24 P-42)	27678.86	P% Sft	21036
18.	2.00	W.C Pan 23" and low level earthen ware flush tank 3 gallons (CSI, No: 2 (a) P-1 / Ch-01)	5728.80	Each	11458

Continued.....

19.	42.00	Making and fixing steel grated door complete with locking arrangement angle iron frame 2" into 2" 3.8" & 3.4" square bars 4" centre to centre (CSI, No: 23 P-92)	594.57	P. Sft	24972
20.	228.00	White washing two coat (CSI, No: 26 (a) P-54)	442.75	P% Sft	1009
21.	228.00	Distemping with two coats (CSI, No: 24 P-54)	1043.90	P% Sft	2380
22.	2.00	Reinforcement cement concrete spout etc complete (CSI No: P/)	423.13	P. No	846
23.	16.50	Rec Pipe Class B 9" dia (SSI No: 2 P/24)	250.60	P. Rft	4135
24.	2.00	Fixing acquitting type W.C pan set consisting flashing cutting etc complete (SSI No: 1 Part B P/26)	810.70	P. No	1621
TOTAL					177,513

02 Nos. Toilets x 177513 = 355,026/=

Amount Total (a)

.....% above / below on the rates of CSR.

**Amount to be added / deducted on the basis
OF premium quoted**

Total (A) = a + b in words & figure Rs: 355026/= Schedule "B" of 02 Nos. Toilets

CONTRACTOR

ASSISTANT EXECUTIVE ENGINEER / PROCURING AGENCY

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: BARRIERS IN THE GAMBAT CITY.
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10,00,000. 00
- e) Amount of Bid Security: 30,000. 00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: S.Dep: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- I) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- L) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: (in words & figures) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES (NON-SCHEDULE)

(B) DESCRIPTION AND RATE OF ITEMS BASED ON MARKET (OFFERED RATES)

ITEM NO:	QUANTITIES	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
1.	700.00	Supply and fixing Guarder 4x8 with foundation etc complete	610.00	Open Rate	427000
2.	400.00	Supply and fixing Steel Sheet	700.00	Open Rate	280000
3.	658.00	Iron angle / Patti for shade etc complete	445.00	P. Sft	292810
TOTAL					999810

Cost of Bid

Amount

1. (A) Cost based on Composite Schedule of Rates.

Rs: Nil

2. (B) Cost based on Non/Offered Schedule of Rates.

Rs: 99810/=

Total A+ B Rs: 999,810/=

TOTAL COST OF BID (C) = Total (A) + Total (B)

Contractor

Assistant Executive Engineer/Procuring Agency

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: Const. of S/Drains & CC Block from M. Shareef Phull to Mir Phull, Phull Mohalla
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10,00,000.00
- e) Amount of Bid Security: 30,000.00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: S. Dep: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- I) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- L) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: *(in words & figures)* N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES

(A) Description and rate of based on composite schedule of Rates

ITEM NO:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	769.50	Dismantling and removing road metaling (CSI No: 51 Page No: 13)	605.00	P% Cft	4655
2.	271.00	Dismantling Cement concrete Plain (CSI No: 19 (b) Page No: 11)	3327.50	P% Cft	9018
3.	112.50	Dismantling brick work lime or cement mortar (CSI, 13 Page No: 10)	1285.63	P% Cft	1446
4.	1915.08	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	6083
5.	553.85	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	62523
6.	1222.50	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	146069
7.	T-A 490.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	46060
8.	T-B 260.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	45240
9.	1796.60	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b), P.No.58).	2283.93	P% Sft	41033
10.	72.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	24264
11.	2.893	Fabrication of M.S Reinforcement for C.C. I/c cutting bending lying in position making joints and fastening I/c cost of binding wire also I/c removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.20	P. Cwt	14469
PART-02 C.C BLOCKS					
1.	656.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 3(a) P.No: 1)	2117.50	P%0 Cft	1389
2.	656.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	232

Continued.....

3.	656.00	Extra for every 50" ft additional lead or part thereof (CSI No: 8 (a) Page No 03)	5039.00	P%0 Cft	3306
4.	216.48	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	20384
5.	164.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P%Cft	23664
6.	41.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI, No: 19 Page No: 18)	3127.41	P% Sft	1282
7.	16.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	4144
PART-03 PAVER BLOCKS					
1.	305.00	Hard Marrum or fine powdery Marrum	1800.00	P% Cft	5490
2.	305.00	Laying Earth Work 6" Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (b) P No: 03)	354.00	P%0 Cft	108
3.	402.60	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	37910
4.	1220.00	P&F cement paving block flooring having size of 197x97x80(mm) of city/liquid cobble shape with painting having strength b/w 5000psi filling the joints with hill sand, white powder for dressing and laying in specified manner /patter and design i/c L.C etc. complete (SI No: 72 P-49)	199.77	P. Sft.	243719
5.	2532	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No 6 P.No.16).Ratio 1:2:4	14429.25	P% Cft	3653
6.	112.50	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	13442
7.	10.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 100mm Pipe 4" dia	136.00	P.Rft	1360
8.	10.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 150mm Pipe 6" dia	259.00	P.Rft	2590
TOTAL S.B					763,533

Amount Total (a)

.....% above / below on the rates of CSR.

**Amount to be added / deducted on the basis
Of premium quoted**

Total (A) = a + b in words & figure

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: Const. of S/Drains CC Block & CC Paver at Muhalla Gharibabad from T&T Office to House of Athar Ali Samo.
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10, 00,000. 00
- e) Amount of Bid Security: 30,000. 00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: S. Dep: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- i) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- l) Liquidity Damages: N/A
- m) Deposit receipt No: Date Amount: (in words & figures) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES**(A) Description and rate of based on composite schedule of Rates**

ITEM No:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	769.50	Dismantling and removing road metaling (CSI No: 51 Page No: 13)	605.00	P ⁰⁰ % Cft	4655
2.	271.00	Dismantling Cement concrete Plain (CSI No: 19 (b) Page No: 11)	3327.50	P ⁰⁰ % Cft	9018
3.	112.50	Dismantling brick work lime or cement mortar (CSI, 13 Page No: 10)	1285.63	P ⁰⁰ % Cft	1446
4.	1915.08	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P ⁰⁰ % Cft	6083
5.	553.85	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P ⁰⁰ % Cft	62523
6.	1222.50	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P ⁰⁰ % Cft	146069
7.	T-A 490.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	46060
8.	T-B 260.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	45240
9.	1796.60	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b), P.No.18).	2283.93	P ⁰⁰ % Sft	41033
10.	72.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	24264
11.	2.893	Fabrication of M.S Reinforcement for C.C. i/c cutting bending lying in position making joints and fastening i/c cost of binding wire also i/c removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.20	P. Cwt	14469
PART-02 C.C BLOCKS					
1.	656.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 3(a) P.No: 1)	2117.50	P ⁰⁰ % Cft	1389
2.	656.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P ⁰⁰ % Cft	232

Continued.....

3.	656.00	Extra for every 50" additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P%0 Cft	3306
4.	216.48	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	20384
5.	164.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P%0Cft	23664
6.	41.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI No: 19 Page No: 18)	3127.41	P% Sft	1282
7.	16.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	4144
PART-03 PAVER BLOCKS					
1.	305.00	Hard Marrum or fine powdery Marrum	1800.00	P% Cft	5490
2.	305.00	Laying Earth Work C" Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (b) P No: 03)	354.00	P%0 Cft	108
3.	402.60	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%0Cft	37910
4.	1220.00	P&F cement paving block flooring having size of 197x97x80(mm) of city/quid cobble shape with painting having strength b/w 500phi filling the joints with hill sand, white powder for dressing and laying in specified manner /patter and design i/c L.C etc. complete (SI No: 72 P-49)	199.77	P. Sft.	243719
5.	2532	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.6 P.No.16).Ratio 1:2:4	14429.25	P% Cft	3653
6.	112.50	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	13442
7.	10.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 100mm Pipe 4" dia	136.00	P.Rft	1360
8.	10.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 150mm Pipe 6" dia	259.00	P.Rft	2590
TOTAL S.B					763,533

Amount Total (a)

.....% above / below on the rates of CSR.

**Amount to be added / deducted on the basis
Of premium quoted**

Total (A) = a + b in words & figure

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: Const. of S/Drains CC Block & CC Paver from H/O Akhtiar Wandiar to Mukhtiar Wandiar, Wandiar Muhalla.
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10, 00,000. 00
- e) Amount of Bid Security: 30,000. 00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: S. Dep: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- i) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- l) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: *(in words & figures)* N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES**(A) Description and rate of based on composite schedule of Rates**

ITEM No:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	769.50	Dismantling and removing road metaling (CSI No: 51 Page No: 13)	605.00	P% Cft	4655
2.	271.00	Dismantling Cement concrete Plain (CSI No: 19 (b) Page No: 11)	3327.50	P% Cft	9018
3.	112.50	Dismantling brick work lime or cement mortar (CSI, 13 Page No: 10)	1285.63	P% Cft	1446
4.	1915.08	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	6083
5.	553.85	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	62523
6.	1222.50	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	146069
7.	T-A 490.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	46060
8.	T-B 260.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	45240
9.	1796.60	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b). P.No.58).	2283.93	P% Sft	41033
10.	72.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	24264
11.	2.893	Fabrication of M.S Reinforcement for C.C. i/c cutting bending lying in position making joints and fastening i/c cost of binding wire also i/c removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.20	P. Cwt	14469
PART-02 C.C BLOCKS					
1.	656.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 3(a) P.No: 1)	2117.50	P%0 Cft	1389
2.	656.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	232

Continued.....

3.	656.00	Extra for every 50" ft additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P% Cft	3306
4.	216.48	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P% Cft	20384
5.	164.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P% Cft	23664
6.	41.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI No: 19 Page No: 18)	3127.41	P% Sft	1282
7.	16.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	4144
PART-03 PAVER BLOCKS					
1.	305.00	Hard Marrum or fine powdery Marrum	1800.00	P% Cft	5490
2.	305.00	Laying Earth Work (C) Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (b) P No: 03)	354.00	P% Cft	108
3.	402.60	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P% Cft	37910
4.	1220.00	P&F cement paving block flooring having size of 197x97x80(mm) of city/quid cobble shape with painting having strength b/w 500 phi filling the joints with hill sand, white powder for dressing and laying in specified manner /patter and design i/c L.C etc. complete (SI No: 72 P-49)	199.77	P. Sft.	243719
5.	2532	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.6 P.No.16).Ratio 1:2:4	14429.25	P% Cft	3653
6.	112.50	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	13442
7.	10.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 100mm Pipe 4" dia	136.00	P.Rft	1360
8.	10.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 150mm Pipe 6" dia	259.00	P.Rft	2590
TOTAL S.B					763,533

Amount Total (a)

.....% above / below on the rates of CSR.

**Amount to be added / deducted on the basis
Of premium quoted**

Total (A) = a + b in words & figure

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: Const. of S/Drains CC Block & CC Paver from H/O Allah Rakhiyo Mari to Allah Dad Mari, Mureed Muhalla.
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10, 00,000. 00
- e) Amount of Bid Security: 30,000. 00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: S. Dep: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- i) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- l) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: (in words & figures) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES**(A) Description and rate of based on composite schedule of Rates**

ITEM NO:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	769.50	Dismantling and removing road metaling (CSI No: 51 Page No: 13)	605.00	P% Cft	4655
2.	271.00	Dismantling Cement concrete Plain (CSI No: 19 (b) Page No: 11)	3327.50	P% Cft	9018
3.	112.50	Dismantling brick work lime or cement mortar (CSI, 13 Page No: 10)	1285.63	P% Cft	1446
4.	1915.08	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	6083
5.	553.85	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	62523
6.	1222.50	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	146069
7.	T-A 490.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	46060
8.	T-B 260.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	45240
9.	1796.60	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b), P.No.58).	2283.93	P% Sft	41033
10.	72.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	24264
11.	2.893	Fabrication of M.S Reinforcement for C.C. i/c cutting bending lying in position making joints and fastening i/c cost of binding wire also i/c removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.20	P. Cwt	14469
PART-02 C.C BLOCKS					
1.	656.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 3 (a) P.No: 1)	2117.50	P%0 Cft	1389
2.	656.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	232

Continued.....

3.	656.00	Extra for every 50" additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P% Cft	3306
4.	216.48	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P% Cft	20384
5.	164.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P% Cft	23664
6.	41.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI No: 19 Page No: 18)	3127.41	P% Sft	1282
7.	16.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	4144
PART-03 PAVER BLOCKS					
1.	305.00	Hard Marrum or fine powdery Marrum	1800.00	P% Cft	5490
2.	305.00	Laying Earth Work 6" Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (b) P No: 03)	354.00	P% Cft	108
3.	402.60	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P% Cft	37910
4.	1220.00	P&F cement paving block flooring having size of 197x97x80(mm) of cityquid cobble shape with painting having strength b/w 5000phi filling the joints with hill sand, white powder for dressing and laying in specified manner patter and design i/c L.C etc. complete (SI No: 72 P-49)	199.77	P. Sft.	243719
5.	2532	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.6 P.No.16).Ratio 1:2:4	14429.25	P% Cft	3653
6.	112.50	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	13442
7.	10.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 100mm Pipe 4" dia	136.00	P. Rft	1360
8.	10.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 150mm Pipe 6" dia	259.00	P. Rft	2590
TOTAL S.B					763,533

Amount Total (a)

.....% above / below on the rates of CSR.

**Amount to be added / deducted on the basis
Of premium quoted**

Total (A) = a + b in words & figure

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: Const. of S/Drains CC Block & CC Paver from H/O Masroor Sahito to Rauf Shaikh, Hamza Muhalla.
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10, 00,000. 00
- e) Amount of Bid Security: 30,000. 00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: S. Dep: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- i) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- l) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: *(in words & figures)* N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES**(A) Description and rate of based on composite schedule of Rates**

ITEM No:	QTY:	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	769.50	Dismantling and removing road metaling (CSI No: 51 Page No: 13)	605.00	P ⁰⁰ Cft	4655
2.	271.00	Dismantling Cement concrete Plain (CSI No: 19 (b) Page No: 11)	3327.50	P ⁰⁰ Cft	9018
3.	112.50	Dismantling brick work lime or cement mortar (CSI, 13 Page No: 10)	1285.63	P ⁰⁰ Cft	1446
4.	1915.08	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P ⁰⁰ Cft	6083
5.	553.85	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P ⁰⁰ Cft	62523
6.	1222.50	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P ⁰⁰ Cft	146069
7.	T-A 490.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	46060
8.	T-B 260.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	45240
9.	1796.60	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b), P.No.58).	2283.93	P ⁰⁰ Sft	41033
10.	72.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	24264
11.	2.893	Fabrication of M.S Reinforcement for C.C. i/c cutting bending lying in position making joints and fastening i/c cost of binding wire also i/c removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.20	P. Cwt	14469
PART-02 C.C BLOCKS					
1.	656.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: (a) P.No: 1)	2117.50	P ⁰⁰ Cft	1389
2.	656.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P ⁰⁰ Cft	232

Continued.....

3.	656.00	Extra for every 50" ft additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P% Cft	3306
4.	216.48	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P% Cft	20384
5.	164.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P% Cft	23664
6.	41.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI No: 19 Page No: 18)	3127.41	P% Sft	1282
7.	16.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	4144
PART-03 PAVER BLOCKS					
1.	305.00	Hard Marrum or fine powdery Marrum	1800.00	P% Cft	5490
2.	305.00	Laying Earth Work of Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (b) P No: 03)	354.00	P% Cft	108
3.	402.60	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P% Cft	37910
4.	1220.00	P&F cement paving block flooring having size of 197x97x80(mm) of city/quid cobble shape with painting having strength b/w 5000 phi filling the joints with hill sand, white powder for dressing and laying in specified manner /patter and design i/c L.C etc. complete (SI No: 72 P-49)	199.77	P. Sft.	243719
5.	2532	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.6 P.No.16).Ratio 1:2:4	14429.25	P% Cft	3653
6.	112.50	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	13442
7.	10.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 100mm Pipe 4" dia	136.00	P.Rft	1360
8.	10.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 150mm Pipe 6" dia	259.00	P.Rft	2590
TOTAL S.B					763,533

Amount Total (a)

.....% above / below on the rates of CSR.

**Amount to be added / deducted on the basis
Of premium quoted**

Total (A) = a + b in words & figure

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: Const. of S/Drains CC Block & CC Paver from H/O Nazar Ujjan to Sheral Ujjan, Larhi Muhalla.
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10, 00,000. 00
- e) Amount of Bid Security: 30,000. 00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: S. Dep: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- I) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- L) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: *(in words & figures)* N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES**(A) Description and rate of based on composite schedule of Rates**

ITEM NO:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	769.50	Dismantling and removing road metaling (CSI No: 51 Page No: 13)	605.00	P% Cft	4655
2.	271.00	Dismantling Cement concrete Plain (CSI No: 19 (b) Page No: 11)	3327.50	P% Cft	9018
3.	112.50	Dismantling brick work lime or cement mortar (CSI, 13 Page No: 10)	1285.63	P% Cft	1446
4.	1915.08	Excavation in foundation building bridges and other structures i/c dig bellling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	6083
5.	553.85	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	62523
6.	1222.50	Pacea brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	146069
7.	T-A 490.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	46060
8.	T-B 260.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	45240
9.	1796.60	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b), P.No.58).	2283.93	P% Sft	41033
10.	72.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	24264
11.	2.893	Fabrication of M.S Reinforcement for C.C. i/c cutting bending lying in position making joints and fastening i/c cost of binding wire also i/c removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.20	P. Cwt	14469
PART-02 C.C BLOCKS					
1.	656.00	Barrow pit excavation dressed lead up to 100ft: in ordinary soil (CSI No: 3 (a) P.No: 1)	2117.50	P%0 Cft	1389
2.	656.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	232

Continued.....

3.	656.00	Extra for every 50" ft additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P%0 Cft	3306
4.	216.48	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%0Cft	20384
5.	164.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P%0Cft	23664
6.	41.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI No: 19 Page No: 18)	3127.41	P%0 Sft	1282
7.	16.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	4144
PART-03 PAVER BLOCKS					
1.	305.00	Hard Marrum or fine powdery Marrum	1800.00	P%0 Cft	5490
2.	305.00	Laying Earth Work of Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (b) P No: 03)	354.00	P%0 Cft	108
3.	402.60	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%0Cft	37910
4.	1220.00	P&F cement paving block flooring having size of 197x97x80(mm) of city quid cobble shape with painting having strength b/w 5000psi filling the joints with hill sand, white powder for dressing and laying in specified manner patter and design i/c L.C etc. complete (SI No: 72 P-49)	199.77	P. Sft.	243719
5.	2532	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.6 P.No.16).Ratio 1:2:4	14429.25	P%0 Cft	3653
6.	112.50	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P%0 Cft	13442
7.	10.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 100mm Pipe 4" dia	136.00	P.Rft	1360
8.	10.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 150mm Pipe 6" dia	259.00	P.Rft	2590
TOTAL S.B					763,533

Amount Total (a)

.....% above / below on the rates of CSR.

**Amount to be added / deducted on the basis
Of premium quoted**

Total (A) = a + b in words & figure

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: Const. of S/Drains CC Block & CC Paver from H/O Sheral Ujjan to Manzoor Shah, Larhi Muhalla.
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10, 00,000. 00
- e) Amount of Bid Security: 30,000. 00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: S. Dep: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- i) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- l) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: *in words & figures* N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES**(A) Description and rate of based on composite schedule of Rates**

ITEM No:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	769.50	Dismantling and removing road metaling (CSI No: 51 Page No: 13)	605.00	P ⁰⁰ Cft	4655
2.	271.00	Dismantling Cement concrete Plain (CSI No: 19 (b) Page No: 11)	3327.50	P ⁰⁰ Cft	9018
3.	112.50	Dismantling brick work lime or cement mortar (CSI, 13 Page No: 10)	1285.63	P ⁰⁰ Cft	1446
4.	1915.08	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P ⁰⁰ Cft	6083
5.	553.85	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P ⁰⁰ Cft	62523
6.	1222.50	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P ⁰⁰ Cft	146069
7.	T-A 490.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	46060
8.	T-B 260.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	45240
9.	1796.60	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b), P.No.58).	2283.93	P ⁰⁰ Sft	41033
10.	72.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	24264
11.	2.893	Fabrication of M.S Reinforcement for C.C. I/c cutting bending lying in position making joints and fastening i/c cost of binding wire also i/c removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.20	P. Cwt	14469
PART-02 C.C BLOCKS					
1.	656.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 3(a) P.No: 1)	2117.50	P ⁰⁰ Cft	1389
2.	656.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P ⁰⁰ Cft	232

Continued.....

3.	656.00	Extra for every 50" for additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P% Cft	3306
4.	216.48	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P% Cft	20384
5.	164.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P% Cft	23664
6.	41.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI, No: 19 Page No: 18)	3127.41	P% Sft	1282
7.	16.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	4144
PART-03 PAVER BLOCKS					
1.	305.00	Hard Marrum or fine powdery Marrum	1800.00	P% Cft	5490
2.	305.00	Laying Earth Work 6" Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (b) P No: 03)	354.00	P% Cft	108
3.	402.60	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P% Cft	37910
4.	1220.00	P&F cement paving block flooring having size of 197x97x80(mm) of city/quid cobble shape with painting having strength b/w 5000 phi filling the joints with hill sand, white powder for dressing and laying in specified manner /patter and design i/c L.C etc. complete (SI No: 72 P-49)	199.77	P. Sft.	243719
5.	2532	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.6 P.No.16).Ratio 1:2:4	14429.25	P% Cft	3653
6.	112.50	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	13442
7.	10.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 100mm Pipe 4" dia	136.00	P. Rft	1360
8.	10.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 150mm Pipe 6" dia	259.00	P. Rft	2590
TOTAL S.B					763,533

Amount Total (a)

.....% above / below on the rates of CSR.

Amount to be added / deducted on the basis
Of premium quoted

Total (A) = a + b in words & figure

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: CONST. OF S/DRAINS CC BLOCK & CC PAVER FROM H/O USTAD BAKHAT To UMEED ALI NAREJO, KISSAN MUHALLA M.C GAMBAT
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10, 00,000. 00
- e) Amount of Bid Security: 30,000. 00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: S. Dep: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- I) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- L) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: *(in words & figures)* N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES

(A) Description and rate of based on composite schedule of Rates

ITEM No:	QTY:	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	769.50	Dismantling and removing road metaling (CSI No: 51 Page No: 13)	605.00	P% Cft	4655
2.	271.00	Dismantling Cement concrete Plain (CSI No: 19 (b) Page No: 11)	3327.50	P% Cft	9018
3.	112.50	Dismantling brick work lime or cement mortar (CSI, 13 Page No: 10)	1285.63	P% Cft	1446
4.	1915.08	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	6083
5.	553.85	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	62523
6.	1222.50	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	146069
7.	T-A 490.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	46060
8.	T-B 260.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	45240
9.	1796.60	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b), P.No.18).	2283.93	P% Sft	41033
10.	72.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	24264
11.	2.893	Fabrication of M.S Reinforcement for C.C. I/c cutting bending lying in position making joints and fastening I/c cost of binding wire also I/c removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.20	P. Cwt	14469
PART-02 C.C BLOCKS					
1.	656.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 3(a) P.No: 1)	2117.50	P%0 Cft	1389
2.	656.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	232

Continued.....

3.	656.00	Extra for every 50" to additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P% Cft	3306
4.	216.48	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P% Cft	20384
5.	164.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P% Cft	23664
6.	41.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI No: 19 Page No: 18)	3127.41	P% Sft	1282
7.	16.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	4144
PART-03 PAVER BLOCKS					
1.	305.00	Hard Marrum or fine powdery Marrum	1800.00	P% Cft	5490
2.	305.00	Laying Earth Work (C) Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (b) P No: 03)	354.00	P% Cft	108
3.	402.60	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P% Cft	37910
4.	1220.00	P&F cement paving block flooring having size of 197x97x80(mm) of city/quid cobble shape with painting having strength b/w 5000psi filling the joints with hill sand, white powder for dressing and laying in specified manner /patter and design i/c L.C etc. complete (SI No: 72 P-49)	199.77	P. Sft.	243719
5.	2532	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.6 P.No.16).Ratio 1:2:4	14429.25	P% Cft	3653
6.	112.50	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	13442
7.	10.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 90mm Pipe 4" dia	136.00	P.Rft	1360
8.	10.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 150mm Pipe 6" dia	259.00	P.Rft	2590
TOTAL S.B					763,533

Amount Total (a)

.....% above / below on the rates of CSR.

Total (A) = a + b in words & figure

**Amount to be added / deducted on the basis
Of premium quoted**

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

BIDDING DATA

(This form should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Document)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MUR
- b) Brief Description of Works: Const. of S-Drains CC Block & CC Paver from 1st Irshad Gopang to Naseem Gonyo, Bari Mahalla.
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MUR
- d) Estimated cost: 10,00,000.00
- e) Amount of Bid Security: 30,000.00
- f) Period of Bid Validity (days): 90 (days)
- g) Security Deposit: S. Dep: 7%
- h) Percentage/Tax, to be deducted from bills: I-Tax 7.5%
- i) Deadline for submission of bids along with time: _____
- j) Venue, Place & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- l) Liquidated Damages: N/A
- m) Dep. Receipt No: Date Amount: *(in words & figures)* N/A

(Executive Engineer / Authority issuing Bidding Documents)

BILL OF QUANTITIES

Description in accordance of based on composite schedule of Rates

ITEM No.	DESCRIPTION OF ITEM	QTY TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT
PART-01 MADE DRAINS					
1.	Dismantling and removing road metaling (CSI No: 51 Page No: 3)		602.00	Sq. ft	00
2.	Dismantling Cement concrete Plain (CSI No: 19 (b) Page No: 11)		3327.80	Sq. ft	00
3.	Dismantling brick work lime or cement mortar (CSI No: 13 Page No: 10)		1235.03	Sq. ft	00
4.	Excavation in foundation building bridges and other structures i.e. digging dressing refilling around structure with excavated earth watering rimming lead up to or chain or 1/2 ft up to 5' ft. (CSI No. 18, P.No. 4)		313.25	Sq. ft	00
5.	Cement concrete plain i.e. placing compacting finishing and curing complete i.e. screening and washing of stone aggregate without Shuttering. (CSI No. 5 P.No. 10 Rate 1:4:8)		11788.75	Sq. ft	00
6.	Brick work in foundation and plinth in cement Mortar 1:1 (CSI No. 11, No. 25).		11058.70	Sq. ft	00
7.	Construction of Standard of open Drain: curette block of cement concrete 1:1 in situ to design to profile i.e. cost of mould as per drawing applying floating coat of cement 1/2" thick to the exposed face finished smooth curing etc complete as per detail drawing (P.H.S.I No: DP No: 44)		973.00	Sq. ft	00
8.	Construction of Standard of open Drain: curette block of cement concrete 1:1 in situ to design to profile i.e. cost of mould as per drawing applying floating coat of cement 1/2" thick to the exposed face finished smooth curing etc complete as per detail drawing (P.H.S.I No: DP No: 44)		1732.00	Sq. ft	00
9.	Cement plaster 1:1 up to 20' height: 1/2" thick. (CSI No. 1 (b), P. No. 58).		2283.03	Sq. ft	00
10.	Brick work in roof slab beams columns rafters lintels and other structural members laid in situ or pre-cast laid in position complete in all respect. (CSI No. 6 (a), P.No. 19).		313.00	Sq. ft	00
11.	Fabrication of Metal reinforcement for C.C. i.e. cutting bending tying in position making joints and fastening i.e. cost of binding wire also i.e. removal of rust from bars. (CSI No. 11, P.No. 20).		4800.20	Sq. ft	00
PART-02 WORKS					
1.	Barrow for excavation and dressed lead up to 100 ft in ordinary soil (CSI No: 5 (a) P.No: 3)		2137.00	Sq. ft	00
2.	Earth Work completion (soil ordinary or hard soil) i.e. laying earth in of 1/2" and dressing etc complete (CSI No. 13 Page No: 10)		384.00	Sq. ft	00

3.	Extra for every 50' ft additional lead or part thereof (CSI No. 10 Page No. 03)	56.9700	P% CH	58
4.	Cement concrete Bricks or Stone Ballast 1-1.2" 2" Gauge (CSI No. 4 P.No. 7). Ratio 1:4:8 Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI No. 5 P.No. 11) Ratio 1:2:4	94.5200	P% CH	59
5.	Erection and removal of centering for RCC of Plain C.C. part. Wool (CSI No: 19 Page No: 18)	14429.25	P% CH	60
6.	Providing laying of PVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI No. 04 P.No. 23)	25.0000	P% CH	61
7.	Pipe 2" dia			

PART-G FLAYER BLOCKS

1.	Lead Marum or fine powdery Marum	1800.00	P% CH	62
2.	Finishing Earth Work 6" Layer leveling dressings and covering for construction etc complete (CSI NO : 15 P.No. 03)	37.0000	P% CH	63
3.	Cement concrete Bricks or Stone ballast 1-1.2" 2" Gauge (CSI No. 4 P.No. 7). Ratio 1:4:8 Cement concrete paving block flooring having size of 197x97x80mm of city liquid cobble shape with painting having strength by 7000 psi filling the joints with hill sand white powder for the size and laying in specified manner according design etc. etc. complete (SI No: 72 P-10)	94.5200	P% CH	64
4.	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI No. 6 P.No. 16) Ratio 1:2:4	14429.25	P% CH	65
5.	Brick work for foundation and plinth in cement mortar 1:4 (CSI No. 25 P.No. 25)	14429.25	P% CH	66
6.	Providing laying of PVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI No. 04 P.No. 23) 100mm Pipe 4" dia	25.0000	P% CH	67
7.	Providing laying of PVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI No. 04 P.No. 23) 150mm Pipe 6" dia	25.0000	P% CH	68
8.				

TOTAL S.B

Amount to be paid

..... above / below on the rates of CSR.

Amount to be paid / collected on account of premium quoted

Total of Rs. figure

CONT



EXECUTIVE ENGINEER PROJECTS

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: Const. Of S/Drains CC Block & CC Paver from H/O Azizullah Shaikh to Ustad Zubair Shaikh, Gulshan- e- Raheem Muhalla.
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10, 00,000. 00
- e) Amount of Bid Security: 30,000. 00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: Sec. Deposit 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- i) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- L) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: (In words & figures) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES

(A) Description and rate of based on composite schedule of Rates

ITEM No:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	274.63	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	872
2.	79.75	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	9003
3.	168.75	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	20163
4.	50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	4700
5.	50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	8700
6.	242.00	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b), P.No.38).	2283.93	P% Sft	5527
7.	24.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	8088
8.	0.964	Fabrication of M.S Reinforcement for C.C. I/c cutting bending lying in position making joints and fastening I/c cost of binding wire also I/c removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.20	P. Cwt	4822
9.	6.00	Providing and Fixing DPC Pipe of Class "B" fixing in trench i/c cutting, fitting and jointing i/c testing of water to a head of 61 meter of 200ft. (CSI, 04 P/23) PIPE 6" DIA	259.00	P. Rft	1554
PART-02 C.C BLOCKS					
1.	336.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 3(a) P.No: 1)	2117.50	P%0 Cft	711
2.	336.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	119

Continued.....

3.	336.00	Extra for every 50" ft additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P%0 Cft	1693
4.	110.88	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%0Cft	10441
5.	84.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P%0Cft	12121
6.	21.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI, No: 19 Page No: 18)	3127.41	P%0 Sft	657
7.	24.00	Providing and Fixing UPC Pipe of Class "B" fixing in trench i/c cutting, fitting and jointing i/c testing of water to a head of 61 meter of 200ft. (CSI, 04 P/23) PIPE 6" DIA	259.00	P. Rft	6216
PART-03 PAVER BLOCKS					
1.	732.50	Hard Marrum or fine powdery Marrum	1800.00	P%0 Cft	13185
2.	732.50	Laying Earth Work 6" Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (b) P No: 03)	354.00	P%0 Cft	259
3.	966.90	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%0Cft	91046
4.	2930.00	P&F cement paving block flooring having size of 197x97x80(mm) of city/ fluid cobble shape with painting having strength b/w 5000psi filling the joints with hill sand, white powder for dressing and laying in specified manner /patter and design i/c L.C etc. complete (SI No: 72 P-49)	199.77	P. Sft.	585326
5.	60.80	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.16).Ratio 1:2:4	14429.25	P%0 Cft	8773
6.	56.25	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P%0 Cft	6721
7.	20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 100mm Pipe 4" dia	136.00	P.Rft	2720
8.	20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 150mm Pipe 6" dia	259.00	P.Rft	5180
TOTAL S.B					808,597

Amount Total (a)

.....% above / below on the rates of CSR.

**Amount to be added / deducted on the basis
Of premium quoted**

Total (A) = a + b in words & figure

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

Draft Bid Price (est.) for work up to _____ Millions

BIDDING DATA

(This form should be filled in by the Engineer/Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MITHAN
- b) Brief Description of Works: CONST. OF S/DRAINS CC BLOCK & CC PAVEMENT FROM BASHIR ARAIN TO ALI MOHAMMAD ARAIN MITHAN
- c) Procuring Agency's address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MITHAN
- d) Estimated cost: 10,00,000.00
- e) Amount of Bid Security: 30,000.00
- f) Period of bid validity (days): (90 Days)
- g) Security deposit: S. Dep: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- i) Deadline from submission of bids along with time: _____
- j) Venue, Time & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- l) Liquidated Damages: N/A
- m) Dep. Receipt No: Date Amount: (in words & figures) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES

(a) Description and rate of based on composite schedule of Rates

ITEM NO:	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT
PART-01				
OPEN DRAINS				
1.	Dismantling and removing road metaling (CSI No: 51 Page No: 13)	605.00	P% Cft	46
2.	Dismantling Cement concrete Plain (CSI No: 19 (b) Page No: 11)	3317.50	P% Cft	1
3.	Dismantling brick work lime or cement mortar (CSI 13 Page No: 10)	1285.63	P% Cft	14
4.	Excavation in foundation building bridges and other structures i.e dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and fill up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P% Cft	11
5.	Cement concrete plain i.e placing compacting finishing and curing complete i/e screening and washing of stone aggregate without Shuttering. (CSI.No.8 P.No.18)Rate 1:4:8	11288.75	P% Cft	625
6.	Layer brick work in foundation and plinth in cement mortar 1:3 (CSI.No.14 P.No.15)	11948.36	P% Cft	1
7.	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/e cost of mould as per drawing i/e applying floating coat of cement 1:3:27 thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	10
8.	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/e cost of mould as per drawing i/e applying floating coat of cement 1:3:27 thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	28
9.	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b) P.No.58)	2233.93	P% Sft	1
10.	Boards and in roof sables beams columns rafters lintels and other structural members laid in site or precast laid in position complete in all respect. (CSI.No.6 (a), P.No.19)	337.00	P. Cft	11
11.	Fabrication of M.S. Reinforcement for C.C. i/e cutting bending lying in position making joints and fastening i/e cost of binding wire also i/e removal of rust from bars. (CSI.No. (ii), P.No.20)	480.20	P. Cwt	1
PART-02				
WORK BLOCKS				
1.	Barrow pit excavation undressed lead up to 100ft; in ordinary soil (CSI No: 30) P.No: 1)	2117.50	P% Cft	13
2.	Earth Work completion (soft or ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P% Cft	1

Continued

3.	0.01	Extra for every 50' of additional lead or part thereof (CSI No. 3 (a) Page No. 03)	5039.00	P% CH	33
4.	0.3	Cement Concrete Bricks or Stone ballast 1-1/2" x 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P% CH	34
5.	0.01	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI No. 6 P.No.16) Ratio 1:2:4	14429.25	P% CH	35
6.	0.01	Erection and removal of centering for RCC of Plain dia portal Wood (CSI No: 19 Page No: 18)	3127.41	P% SB	36
7.	0.01	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI No. 04 P.No. 23) Pipe 8" dia	259.00	P.RH	37

PART-G: PAVEMENT BLOCKS

1.	5.0	Hard Marrum or fine powdery Marrum	1800.00	P% CH	38
2.	3.0	Laying Earth Work (1) Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (b) P.No: 03)	354.00	P% CH	39
3.	2.0	Cement Concrete Bricks or Stone ballast 1-1/2" x 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P% CH	40
4.	0.01	RCC cement paving block flooring having size of 150x90x80 mm of city grid cobble shape with painting having strength i/c 500 psi filling the joints with hill sand, white powder for ch. sign and laying in specified manner pattern and design i/c L.C etc. complete (SI No: 72 P-19)	199.77	P. Sft.	41
5.	0.01	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without shuttering. (CSI.No.6 P.No.16).Ratio 1:2:4	14429.25	P% CH	42
6.	0.01	Brick work in foundation and plinth in cement mortar 1:5 (CSI.No.11 P.No.25)	11948.36	P% CH	43
7.	0.01	Providing laying U.P.V.C Pipe of class "E" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 100 mm Pipe 4" dia	135.00	P.RH	44
8.	0.01	Providing laying U.P.V.C Pipe of class "E" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 150 mm Pipe 6" dia	259.00	P.RH	45

TOTAL S.B 7.13

Amount

.....% above / below on the rates of CSR.

Amount to be added / deducted on the basis of premium quoted

Total (Rs) in words & figure

CONTRACTOR

EXECUTIVE ENGINEER (PROCURING AGENCY)

Draft Biding documents for works up to Millions

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: CONST. OF S/DRAINS CC BLOCK & CC PAVER FROM H/O DEEN MOHD TO ALI KHAN, PHULL MUHALLA.
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10, 00,000. 00
- e) Amount of Bid Security: 30,000. 00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: S. Dep: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- I) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- L) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: *(in words & figures)* N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES

(A) Description and rate of based on composite schedule of Rates

ITEM NO:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	769.50	Dismantling and removing road metaling (CSI No: 51 Page No: 13)	605.00	P% Cft	4655
2.	271.00	Dismantling Cement concrete Plain (CSI No: 19 (b) Page No: 11)	3327.50	P% Cft	9018
3.	112.50	Dismantling brick work lime or cement mortar (CSI, 13 Page No: 10)	1285.63	P% Cft	1446
4.	1915.08	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	6083
5.	553.85	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	62523
6.	1222.50	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	146069
7.	T-A 490.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	46060
8.	T-B 260.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	45240
9.	1796.60	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b), P.No.58).	2283.93	P% Sft	41033
10.	72.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	24264
11.	2.893	Fabrication of M.S Reinforcement for C.C. I/c cutting bending lying in position making joints and fastening I/c cost of binding wire also I/c removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.20	P. Cwt	14469
PART-02 C.C BLOCKS					
1.	656.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 3(a) P.No: 1)	2117.50	P%0 Cft	1389
2.	656.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	232

Continued.....

3.	656.00	Extra for every 50" ft additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P%0 Cft	3306
4.	216.48	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	20384
5.	164.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P%Cft	23664
6.	41.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI, No: 19 Page No: 18)	3127.41	P% Sft	1282
7.	16.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	4144
PART-03 PAVER BLOCKS					
1.	305.00	Hard Marrum or fine powdery Marrum	1800.00	P% Cft	5490
2.	305.00	Laying Earth Work 6" Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (b) P No: 03)	354.00	P%0 Cft	108
3.	402.60	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	37910
4.	1220.00	P&F cement paving block flooring having size of 197x97x80(mm) of city/quid cobble shape with painting having strength b/w 5000phi filling the joints with hill sand, white powder for dressing and laying in specified manner /patter and design i/c L.C etc. complete (SI No: 72 P-49)	199.77	P. Sft.	243719
5.	2532	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.6 P.No.16).Ratio 1:2:4	14429.25	P% Cft	3653
6.	112.50	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	13442
7.	10.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 100mm Pipe 4" dia	136.00	P.Rft	1560
8.	10.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 150mm Pipe 6" dia	259.00	P.Rft	2590
TOTAL S.B					763,533

Amount Total (a)

.....% above / below on the rates of CSR.

Total (A) = a + b in words & figure

Amount to be added / deducted on the basis
Of premium quoted

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Document)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUKHUR
- b) Brief Description of Works: CONST. OF S/DRAINS CC BLOCK & CC PAVEMENT VILLAGE ABDUL KARIM PHULL, PHULL MOHALLA
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUKHUR
- d) Estimated Cost: 10,00,000.00
- e) Amount of Bid Security: 30,000.00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: S. Dep: 7%
- h) Percentage, if any, to be deducted from bills: 1-Tax 7.5%
- i) Deadline from submission of bids along with time: _____
- j) Venue, time & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- l) Liquidated Damages: N/A
- m) Deposit receipt No: Date Amount: (in words & figures) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES

(A) Description and rate of based on composite schedule of Rates

ITEM No.	QTY	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT
PART-01 SITE & E DRAINS					
1.	779.00	Dismantling and removing road metaling (CSI No: 51 Page No: 13)	605.00	P% Cft	471315.00
2.	271.00	Dismantling Cement concrete Plain (CSI No: 19 (b) Page No: 11)	3327.50	P% Cft	902752.50
3.	772.00	Dismantling brick work lime or cement mortar (CSI 13 Page No: 10)	1285.63	P% Cft	992508.36
4.	1945.98	Excavation in foundation building bridges and other structures i.e dig, belling dressing refilling around structures with excavated earth watering rinning lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	6139000.25
5.	273.00	Cement concrete plain i.e placing compacting finishing and curing complete i/e screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18) Ratio 1:4:8	11288.75	P% CR	3081817.50
6.	1172.00	Brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25)	11948.36	P% Cft	13990000.32
7.	40.00	Construction of Standard of open Drains eurette block of cement concrete 1:2:4 in situ to design to profile i.e cost of mould as per drawing i/e applying floating coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PISI No: DP No: 41)	94.00	P. RR	3760.00
8.	170.00	Construction of Standard of open Drains eurette block of cement concrete 1:2:4 in situ to design to profile i.e cost of mould as per drawing i/e applying floating coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PISI No: DP No: 41)	174.00	P. RR	29580.00
9.	2283.93	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b), P.No.58).	2283.93	P% Sft	5212500.00
10.	337.00	R.C. work in roof slab beams columns rafters lintels and other structural members laid in site or precast laid in position complete in all respect. (CSI.No.6 (a), P.No.19)	337.00	P. Cft	113549.00
11.	4820.20	Fabrication of M.S Reinforcement for R.C. i.e cutting bending lying in position making joints and fastening i.e cost of binding wire also i.e removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.20	P. Cwt	23233364.00
PART-02 EARTH BLOCKS					
1.	617.50	Narrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 3(a) P.No: 1)	2117.50	P%0 Cft	13076375.00
2.	617.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 17 Page No: 03)	354.00	P%0 Cft	218418.00

3.		Additional lead of part meter (CSI No. 8 (a) Page No. 63)	5039.00	P% CR	3
4.		Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P% CR	
5.		Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.6 P.No.17).Ratio 1:2:4	14429.25	P% CR	130
6.		Erection and removal of centering for RCC of Plain C.C panel Wool (CSI. No. 19 Page No. 18)	3127.41	P% CR	
7.		Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 4" dia	259.00	P. RR	11
PART-G					
1.		Hard Murrum or fine powdery Murrum	1800.00	P% CR	31
2.		Laying Earth Work 6" Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (a) P.No: 13)	354.00	P% CR	3
3.		Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P% CR	3
4.	170.00	8x8 cement paving block flooring having size of 197x97x80mm of city quid cobble shape with painting having strength b/w 5000phi filling the joints with fill sand, white powder for dressing and laying in specified manner pattern and design i/c L.C etc. complete (SI No: 72 P-19)	199.77	P. Sft.	243
5.		Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.6 P.No. 17)ratio 1:2:4	14429.25	P% CR	130
6.		Brick work in foundation and plinth in cement Mortar 1:3 (CSI.No.4 P.No.25)	11918.36	P% CR	130
7.		Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 100mm Pipe 4" dia	136.00	P. RR	
8.		Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 150mm Pipe 6" dia	259.00	P. RR	25
			TOTAL S.B		753


Amount (in words)

..... (above / below) on the rates of CSR.

Amount to be added / deducted on
Of premium quoted

Total (in words i/c figure)

CONT...

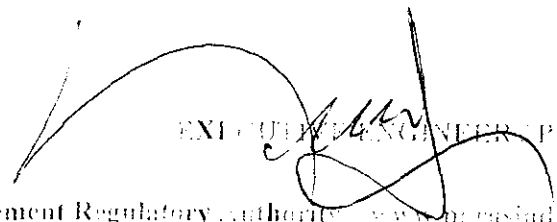

EXECUTIVE ENGINEER (PROCUREMENT)

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIRS

b) Brief Description of Works: CONST: OF SURFACE DRAINS C.C BLOCK & PAVER BLOCK FROM H/O QALANDAR BUX JUNEJO TO ALTAJ JUNEJO FLOOR MILL AGRA ROAD (M.P) TALUKA GAMBAT

c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIRS

d) Estimated Cost: 10,00,000.00

e) Amount of Bid Security: 30,000.00

f) Period of Bid validity (days): (90 Days)

g) Security Deposit: 7%

h) Percentage, if any, to be deducted from bills: 1-Tax 7.5%

i) Deadline from submission of bids along with time: _____

j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE

k) Time for completion from written order of commence: 12 Months

l) Liquidity Damages: N/A

m) Deposit receipt No: Date Amount: (in words & figures) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES

(A) Description and rate of based on composite schedule of Rates

ITEM NO:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	274.63	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	872.00
2.	79.75	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	9003.00
3.	168.75	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	20163.00
4.	T-A 50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	4700.00
5.	T-B 50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	8700.00
6.	242.00	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b), P.No.58).	2283.93	P% Sft	5527.00
7.	24.00	RCC work in roof slab beams columns raftis lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	8088.00
8.	0.964	Fabrication of M.S Reinforcement for C.C. i/c cutting bending lying in position making joints and fastening i/c cost of binding wire also i/c removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.20	P. Cwt	4823.00
9.	6.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	1554.00
PART-02 C.C BLOCKS					
1.	336.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 3(a) P.No: 1)	2117.50	P%0 Cft	711.00
2.	336.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	119.00

Continued.....

3.	336.00	Extra for every 50" ft additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P%0 Cft	1693.00
4.	110.88	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	10441.00
5.	84.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P%Cft	12121.00
6.	21.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI, No: 19 Page No: 18)	3127.41	P% Sft	657.00
7.	24.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	6216.00
PART-03 PAVER BLOCKS					
1.	732.50	Hard Marrum or fine powdery Marrum	1800.00	P% Cft	13185.00
2.	732.50	Laying Earth Work 6" Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (b) P No: 03)	354.00	P%0 Cft	259.00
3.	966.90	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	91046.00
4.	2930.00	P&F cement paving block flooring having size of 197x97x80(mm) of city/quid cobble shape with painting having strength b/w 5000phi filling the joints with hill sand, white powder for dressing and laying in specified manner pater and design i/c L.C etc. complete (SI No: 72 P-49)	199.77	P. Sft.	585326.00
5.	60.80	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.6 P.No.16).Ratio 1:2:4	14429.25	P% Cft	8773.00
6.	56.25	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	6721.00
7.	20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 100mm Pipe 4" dia	136.00	P.Rft	2720.00
8.	20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 150mm Pipe 6" dia	259.00	P.Rft	5180.00
TOTAL S.B					808,598

Amount Total (a)

.....% above / below on the rates of CSR.

**Amount to be added / deducted on the basis
Of premium quoted**

Total (A) = a + b in words & figure

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: CONSTT: OF SURFACE DRAINS C.C BLOCK & PAVER BLOCK FROM H/O MUHAMMAD ALI WANDIAR TO H/O ABDULLAH KANASIRO (MEGA PROJECT) TALUKA GAMBAT
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10, 00,000. 00
- e) Amount of Bid Security: 30,000. 00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- I) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- L) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: (in words & figures) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES

(A) Description and rate of based on composite schedule of Rates

ITEM NO:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	769.50	Dismantling and removing road metaling (CSI No: 51 Page No: 13)	605.00	P% Cft	4655
2.	271.00	Dismantling Cement concrete Plain (CSI No: 19 (b) Page No: 11)	3327.50	P% Cft	9018
3.	112.50	Dismantling brick work lime or cement mortar (CSI, 13 Page No: 10)	1285.63	P% Cft	1446
4.	1915.08	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18.P.No.4)	3176.25	P%0 Cft	6083
5.	553.85	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	62523
6.	1222.50	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	146069
7.	T-A 490.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	46060
8.	T-B 260.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	45240
9.	1796.60	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b), P.No.58).	2283.93	P% Sft	41033
10.	72.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	24264
11.	2.893	Fabrication of M.S Reinforcement for C.C. i/c cutting bending lying in position making joints and fastening i/c cost of binding wire also i/c removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.20	P. Cwt	14469
PART-02 C.C BLOCKS					
1.	656.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 3(a) P.No: 1)	2117.50	P%0 Cft	1389
2.	656.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	232

Continued.....

3.	656.00	Extra for every 50" ft additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P%0 Cft	3306
4.	216.48	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	20384
5.	164.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P%Cft	23664
6.	41.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI. No: 19 Page No: 18)	3127.41	P% Sft	1282
7.	16.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	4144
PART-03 PAVER BLOCKS					
1.	305.00	Hard Marrum or fine powdery Marrum	1800.00	P% Cft	5490
2.	305.00	Laying Earth Work 6" Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (b) P No: 03)	354.00	P%0 Cft	108
3.	402.60	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	37910
4.	1220.00	P&F cement paving block flooring having size of 197x97x80(mm) of city/quid cobble shape with painting having strength b/w 5000phi filling the joints with hill sand, white powder for dressing and laying in specified manner /patter and design i/c L.C etc. complete (SI No: 72 P-49)	199.77	P. Sft.	243719
5.	2532	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.6 P.No.16).Ratio 1:2:4	14429.25	P% Cft	3653
6.	112.50	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	13442
7.	10.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 100mm Pipe 4" dia	136.00	P.Rft	1360
8.	10.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 150mm Pipe 6" dia	259.00	P.Rft	2590
TOTAL S.B					763,533

Amount Total (a)

.....% above / below on the rates of CSR.

**Amount to be added / deducted on the basis
Of premium quoted**

Total (A) = a + b in words & figure

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: CONSTT: OF SURFACE DRAINS C.C BLOCK & PAVER BLOCK FROM MAKKH MADERSA TO KHUHRA ROAD (~~M.P~~) TALUKA GAMBAT
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10, 00,000. 00
- e) Amount of Bid Security: 30,000. 00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- I) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- L) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: (in words & figures) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES**(A) Description and rate of based on composite schedule of Rates**

ITEM NO:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	274.63	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	872.00
2.	79.75	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	9003.00
3.	168.75	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	20163.00
4.	T-A 50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	4700.00
5.	T-B 50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	8700.00
6.	242.00	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b), P.No.58).	2283.93	P% Sft	5527.00
7.	24.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	8088.00
8.	0.964	Fabrication of M.S Reinforcement for C.C. I/c cutting bending lying in position making joints and fastening i/c cost of binding wire also i/c removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.20	P. Cwt	4823.00
9.	6.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	1554.00
PART-02 C.C BLOCKS					
1.	336.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 3(a) P.No: 1)	2117.50	P%0 Cft	711.00
2.	336.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	119.00

Continued.....

3.	336.00	Extra for every 50" ft additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P% Cft	1693.00
4.	110.88	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	10441.00
5.	84.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P%Cft	12121.00
6.	21.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI, No: 19 Page No: 18)	3127.41	P% Sft	657.00
7.	24.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	6216.00
PART-03 PAVER BLOCKS					
1.	732.50	Hard Marrum or fine powdery Marrum	1800.00	P% Cft	13185.00
2.	732.50	Laying Earth Work 6" Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (b) P No: 03)	354.00	P%0 Cft	259.00
3.	966.90	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	91046.00
4.	2930.00	P&F cement paving block flooring having size of 197x97x80(mm) of city/quid cobble shape with painting having strength b/w 5000phi filling the joints with hill sand, white powder for dressing and laying in specified manner patter and design i/c L.C etc. complete (SI No: 72 P-49)	199.77	P. Sft.	585326.00
5.	60.80	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.6 P.No.16).Ratio 1:2:4	14429.25	P% Cft	8773.00
6.	56.25	Pacea brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	6721.00
7.	20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 100mm Pipe 4" dia	136.00	P.Rft	2720.00
8.	20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 150mm Pipe 6" dia	259.00	P.Rft	5180.00
TOTAL S.B					808,598

Amount Total (a)

.....% above / below on the rates of CSR.

**Amount to be added / deducted on the basis
Of premium quoted**

Total (A) = a - b in words & figure

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: CONSTT: OF SURFACE DRAINS C.C BLOCK & PAVER BLOCK @WEST SIDE OF ASSEMBLY GROUND (M.P) TALUKA GAMBAT
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10, 00,000. 00
- e) Amount of Bid Security: 30,000. 00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- i) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- L) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: (in words & figures) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES**(A) Description and rate of based on composite schedule of Rates**

ITEM No:	QTY:	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	274.63	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	872.00
2.	79.75	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	9003.00
3.	168.75	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	20163.00
4.	T-A 50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	4700.00
5.	T-B 50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	8700.00
6.	242.00	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b), P.No.58).	2283.93	P% Sft	5527.00
7.	24.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	8088.00
8.	0.964	Fabrication of M.S Reinforcement for C.C. I/c cutting bending lying in position making joints and fastening I/c cost of binding wire also I/c removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.20	P. Cwt	4823.00
9.	6.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	1554.00
PART-02 C.C BLOCKS					
1.	336.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 3(a) P.No: 1)	2117.50	P%0 Cft	711.00
2.	336.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	119.00

Continued.....

3.	336.00	Extra for every 50" ft additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P%0 Cft	1693.00
4.	110.88	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	10441.00
5.	84.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P%Cft	12121.00
6.	21.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI.No: 19 Page No: 18)	3127.41	P% Sft	657.00
7.	24.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	6216.00
PART-03 PAVER BLOCKS					
1.	732.50	Hard Marrum or fine powdery Marrum	1800.00	P% Cft	13185.00
2.	732.50	Laying Earth Work 6" Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (b) P No: 03)	354.00	P%0 Cft	259.00
3.	966.90	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	91046.00
4.	2930.00	P&F cement paving block flooring having size of 197x97x80(mm) of city/quid cobble shape with painting having strength b/w 5000phi filling the joints with hill sand, white powder for dressing and laying in specified manner patter and design i/c L.C etc. complete (SI No: 72 P-49)	199.77	P. Sft.	585326.00
5.	60.80	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.6 P.No.16).Ratio 1:2:4	14429.25	P% Cft	8773.00
6.	56.25	Paeca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	6721.00
7.	20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 100mm Pipe 4" dia	136.00	P.Rft	2720.00
8.	20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 150mm Pipe 6" dia	259.00	P.Rft	5180.00
TOTAL S.B					808,598

Amount Total (a)

.....% above / below on the rates of CSR.

**Amount to be added / deducted on the basis
Of premium quoted**

Total (A) = a + b in words & figure

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

Draft Bidding documents for works up to _____ Millions

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: CONSTT: OF SURFACE DRAINS C.C BLOCK & PAVER BLOCK @EAST SIDE OF ASSEMBLY GROUND (M.P) TALUKA GAMBAT
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10, 00,000. 00
- e) Amount of Bid Security: 30,000. 00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- i) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- l) Liquidity Damages: N/A
- m) Deposit receipt No: Date Amount: *(in words & figures)* N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES

(A) Description and rate of based on composite schedule of Rates

ITEM NO:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	274.63	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	872.00
2.	79.75	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	9003.00
3.	168.75	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	20163.00
4.	T-A 50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	4700.00
5.	T-B 50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	8700.00
6.	242.00	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b), P.No.58).	2283.93	P% Sft	5527.00
7.	24.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	8088.00
8.	0.964	Fabrication of M.S Reinforcement for C.C. I/c cutting bending lying in position making joints and fastening i/c cost of binding wire also i/c removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.20	P. Cwt	4823.00
9.	6.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	1554.00
PART-02 C.C BLOCKS					
1.	336.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 3(a) P.No: 1)	2117.50	P%0 Cft	711.00
2.	336.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	119.00

Continued.....

3.	336.00	Extra for every 50" of additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P% Cft	1693.00
4.	110.88	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P% Cft	10441.00
5.	84.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P% Cft	12121.00
6.	21.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI, No: 19 Page No: 18)	3127.41	P% Sft	657.00
7.	24.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	6216.00
PART-03 PAVER BLOCKS					
1.	732.50	Hard Marrum or fine powdery Marrum	1800.00	P% Cft	13185.00
2.	732.50	Laying Earth Work 6" Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (b) P No: 03)	354.00	P% Cft	259.00
3.	966.90	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P% Cft	91046.00
4.	2930.00	P&F cement paving block flooring having size of 197x97x80(mm) of city/quid cobble shape with painting having strength b/w 5000phi filling the joints with hill sand, white powder for dressing and laying in specified manner (patter and design i/c L.C etc. complete (SI No: 72 P-49)	199.77	P. Sft.	585326.00
5.	60.80	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.6 P.No.16).Ratio 1:2:4	14429.25	P% Cft	8773.00
6.	56.25	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	6721.00
7.	20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 100mm Pipe 4" dia	136.00	P.Rft	2720.00
8.	20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 150mm Pipe 6" dia	259.00	P.Rft	5180.00
TOTAL S.B					808,598

Amount Total (a)

.....% above / below on the rates of CSR.

**Amount to be added / deducted on the basis
Of premium quoted**

Total (A) = a + b in words & figure

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

Draft Biding documents for works up to Millions

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: CONST. OF BRIDGE / CULVERT OVER SANIRO WAAH, BHATTI MUHALLA GAMBAT
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 5,00,000. 00
- e) Amount of Bid Security: 15,000. 00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: Sec. Dep: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- I) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- L) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: (in words & figures) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES

(A) Description and rate of based on composite schedule of Rates

ITEM NO:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
1.	1305.00	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P% Cft.	4145
2.	346.50	Cement concrete brick or stone ballast 1 1/2" guage (CSI.No. 04P.No.15).Ratio 1:4:8	9416.28	P% Cft	32628
3.	883.01	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	105505
4.	47.25	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.4 P.No.18).Ratio 1:2:4	14429.25	P% Cft	6818
5.	152.00	Cement plaster (1:6) up to 12' height 3.8" thick. (CSI.No.13 (b), P.No.52).	2122.12	P% Sft	5348
6.	152.00	Cement plaster (1:4 up to 12' height 1/2" thick. (CSI.No.11 (b), P.No.52).	2283.93	P% Sft	5756
7.	388.50	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	130925
8.	27.75	Fabrication of M.S Reinforcement for C.C. I/c cutting bending lying in position making joints and fastening I/c cost of binding wire also I/c removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.00	P.Cwt	133761
				TOTAL	424,886

Amount Total (a)

.....% above / below on the rates of CSR.

**Amount to be added / deducted on the basis
Of premium quoted**

Total (A) = a + b in words & figure

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: CONST. OF S/DRAINS CC BLOCK & CC PAVER OF WALKING TRACK AT PLAYGROUND OF MURAD HIGH SCHOOL GAMBAT.
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 500,000. 00
- e) Amount of Bid Security: 15,000. 00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: Sec. Dep: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- i) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- l) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: (in words & figures) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES**(A) Description and rate of based on composite schedule of Rates**

ITEM NO:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	406.50	Dismantling and removing road metaling. (CS I No:51 P.No:13)	605.00	P% Cft	2459
2.	121.00	Dismantling Cement Concrete Plain (CS I No:19 B P.No:11) Ratio 1:2:4	3327.50	P% Cft	4026
3.	56.25	Dismantling brick work lime or cement mortar(CS I No:13 P.No:10)	1285.63	P% Cft	723
4.	1420.75	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	4513
5.	410.30	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	46318
6.	918.75	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	109776
7.	400.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	37600
8.	170.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	29580
9.	1361.00	Cement plaster (1:4) up to 20' height ½" thick. (CSI.No.11 (b), P.No.58).	2283.93	P% Sft	31084
10.	48.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	16176
11.	1.928	Fabrication of M.S Reinforcement for C.C. i/c cutting bending lying in position making joints and fastening i/c cost of binding wire also i/c removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.20	P. Cwt	9643
TOTAL					291898
PART-02 C.C BLOCKS / PAVER					
1.	896.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 3(a) P.No: 1)	2117.50	P%0 Cft	1897
2.	896.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	317

3.	896.00	Extra for every 50" ft additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P%0 Cft	4515
4.	295.68	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	27842
5.	224.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P%Cft	32322
6.	56.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI, No: 19 Page No: 18)	3127.41	P% Sft	1751
7.	8.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No.04 P.No. 23) Pipe 6" dia	259.00	P. Rft	2072
TOTAL S.B					70716

Amount Total (a)

.....% above / below on the rates of CSR.

**Amount to be added / deducted on the basis
Of premium quoted**

Total (A) = a + b in words & figure

Part-I (Surface Drains) Rs: 291898/=

Part-II (C.C Blocks / Paver) Rs: 70716/=

TOTAL S.B Rs: 362614/=

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: CONST. OF SHADE FOR GARBAGE SUKKUR MACHINE.
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10,00,000. 00
- e) Amount of Bid Security: 30,000. 00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: Sec. Dep: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- I) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- L) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: (in words & figures) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES**(A) Description and rate of based on composite schedule of Rates**

ITEM NO:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
1.	576.00	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P% Cft.	1828
2.	2330.76	Cement concrete Bricks or stone ballast without Shuttering. (CSI.No.8 P.No.18).Ratio 1:4:8	9416.28	P% Cft.	219472
3.	224.20	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft.	26788
4.	1966.04	Cement concrete without Shuttering. (CSI.No.8 P.No.18).Ratio 1:2:4	14429.25	P% Cft.	283108
5.	1200.00	Pacca brick work in Ground floor Mortar 1:6 (CSI.No.4 P.No.25).	12674.36	P% Cft.	152092
6.	144.00	Providing and fixing UPVC Pipe 4" dia	136.00	P% Sft	19584
7.	64.00	Providing and fixing UPVC Pipe 6" dia	259.00	P% Sft	16576
8.	263.16	Cement concrete without Shuttering. (CSI.No.8 P.No.18).Ratio 1:2:4	14429.25	P% Cft.	37972
TOTAL					757420

Amount Total (a)

.....% above / below on the rates of CSR.

**Amount to be added / deducted on the basis
Of premium quoted**

Total (A) = a + b in words & figure

CONTRACTOR

ASSISTANT EXECUTIVE ENGINEER / PROCURING AGENCY

Draft Bidding documents for works up to Millions

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: CONST. OF COMPOUND WALL AT GRAVEYARD OF PIR LOLAL
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10,00,000. 00
- e) Amount of Bid Security: 30,000. 00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- i) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- L) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: (in words & figures) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES

(A) Description and rate of based on composite schedule of Rates

ITEM No:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
COMPOUND WALL					
1.	837.22	Dismantling brick work lime or cement mortar (CSI, 13 Page No: 10)	1285.63	P% Cft	10764.00
2.	279.00	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18.P.No.4)	3176.25	P%0 Cft	886.00
3.	84.00	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	7910.00
4.	650.08	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	77674.00
5.	713.43	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	240426.00
6.	28.660	Fabrication of M.S Reinforcement for C.C. I/c cutting bending lying in position making joints and fastening I/c cost of binding wire also I/c removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.20	P. Cwt	138147.00
7.	960.00	Providing and fixing in position iron / steel grill of 3/4" into 1/4" size flat iron of approved etc (CSI, 26 P-93)	180.50	P. Cwt	173280.00
8.	176.00	Providing and fixing steel grill door etc (CSI, No: 31 P/94)	231.60	P. Cwt	40762.00
9.	1499.38	Cement Plaster (1:4) up to 20' height 3/8" thick (CSI. No: 11 (a) page No: 52)	2283.93	P% Sft	34248.00
10.	212.50	Providing laying Tile Glazed 6"x6"x1/4" on floor or wall facing in required color and pattern of STILE specification jointed in white cement and pigment in desired shape with finishing cleaning and cost of wax polish etc. complete i/c cutting tiles to proper profile (CSI No: 60 Page-53) (Halla)	47651.56	P% Sft	101260.00
11.	1136.00	Preparing surface painting doors and windows any type i/c edge (CSI, No: 05 P/69)	686.95	P% Sft	7804.00
12.	1499.38	White Washing one Coat (CSI. No: 25 Page-54)	416.63	P Sft	6247.00

Continued.....

13.	1499.40	Color Washing Two Coats (CSI, No: 25 (a) Page-60)	859.90	P Sft	12893.00
				TOTAL S.B	852,298


Amount Total (a)

.....% above / below on the rates of CSR.

**Amount to be added / deducted on the basis
Of premium quoted**

Total (A) = a + b in words & figure

CONTRACTOR

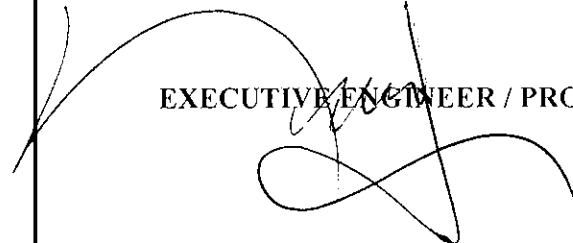

EXECUTIVE ENGINEER / PROCURING AGENCY

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: CONSTITUTION OF SURFACE DRAINS C.C BLOCK & PAVER BLOCK FROM SHOP OF ILLAHI BUX SHAIKH TO MUKHTIARKAR OFFICE TALUKA GAMBAT
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10,00,000.00
- e) Amount of Bid Security: 30,000.00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- i) Deadline from submission of bids along with time: _____
- j) Venue, Time & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- l) Liquidity Damages: N/A
- m) Deposit receipt No: Date Amount: (in words & figures) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES

(A) Description and rate of based on composite schedule of Rates

ITEM NO:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	274.63	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	872.00
2.	79.75	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	9003.00
3.	168.75	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	20163.00
4.	T-A 50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	4700.00
5.	T-B 50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	8700.00
6.	242.00	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b), P.No.58).	2283.93	P% Sft	5527.00
7.	24.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	8088.00
8.	0.964	Fabrication of M.S Reinforcement for C.C. I/c cutting bending lying in position making joints and fastening I/c cost of binding wire also I/c removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.20	P. Cwt	4823.00
9.	6.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	1554.00
PART-02 C.C BLOCKS					
1.	336.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 3(a) P.No: 1)	2117.50	P%0 Cft	711.00
2.	336.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	119.00

Continued.....

336.00	Extra for every 50" ft additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P%0 Cft	1693.00
4. 110.88	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	10441.00
5. 84.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P%Cft	12121.00
6. 21.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI.No: 19 Page No: 18)	3127.41	P% Sft	657.00
7. 24.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	6216.00
PART-03 PAVER BLOCKS				
1. 732.50	Hard Marrum or fine powdery Marrum	1800.00	P% Cft	13185.00
2. 732.50	Laying Earth Work 6" Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (b) P No: 03)	354.00	P%0 Cft	259.00
3. 966.90	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	91046.00
4. 2930.00	P&F cement paving block flooring having size of 197x97x80(mm) of city/quid cobble shape with painting having strength b/w 5000phi filling the joints with hill sand, white powder for dressing and laying in specified manner patter and design i/c L.C etc. complete (SI No: 72 P-49)	199.77	P. Sft.	585326.00
5. 60.80	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.6 P.No.16).Ratio 1:2:4	14429.25	P% Cft	8773.00
6. 56.25	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	6721.00
7. 20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 100mm Pipe 4" dia	136.00	P.Rft	2720.00
8. 20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 150mm Pipe 6" dia	259.00	P.Rft	5180.00
TOTAL S.B				808,598

Amount Total (a)

.....% above / below on the rates of CSR.

**Amount to be added / deducted on the basis
Of premium quoted**

Total (A) = a + b in words & figure

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

Draft Bidding documents for works up to Millions

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: CONSTT: OF SURFACE DRAINS C.C BLOCK & PAVER BLOCK FROM H/O ZAHID BIHATTI TO JABBAR ABBASI (M.P) TALUKA GAMBAT
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10, 00,000. 00
- e) Amount of Bid Security: 30,000. 00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- i) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- l) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: (in words & figures) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES**(A) Description and rate of based on composite schedule of Rates**

ITEM NO:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	769.50	Dismantling and removing road metaling (CSI No: 51 Page No: 13)	605.00	P% Cft	4655
2.	271.00	Dismantling Cement concrete Plain (CSI No: 19 (b) Page No: 11)	3327.50	P% Cft	9018
3.	112.50	Dismantling brick work lime or cement mortar (CSI, 13 Page No: 10)	1285.63	P% Cft	1446
4.	1915.08	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	6083
5.	553.85	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	62523
6.	1222.50	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	146069
7.	T-A 490.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	46060
8.	T-B 260.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	45240
9.	1796.60	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b), P.No.53).	2283.93	P% Sft	41033
10.	72.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	24264
11.	2.893	Fabrication of M.S Reinforcement for C.C. i/c cutting bending lying in position making joints and fastening i/c cost of binding wire also i/c removal of rust from bars. (CSI.No. (ii). P.No.20).	4820.20	P. Cwt	14469
PART-02 C.C BLOCKS					
1.	656.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 3(a) P.No: 1)	2117.50	P%0 Cft	1389
2.	656.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	232

Continued.....

3.	656.00	Extra for every 50" ft additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P% Cft	3306
4.	216.48	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P% Cft	20384
5.	164.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P% Cft	23664
6.	41.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI, No: 19 Page No: 18)	3127.41	P% Sft	1282
7.	16.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	4144
PART-03 PAVER BLOCKS					
1.	305.00	Hard Marrum or fine powdery Marrum	1800.00	P% Cft	5490
2.	305.00	Laying Earth Work 6" Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (b) P No: 03)	354.00	P% Cft	108
3.	402.60	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P% Cft	37910
4.	1220.00	P&F cement paving block flooring having size of 197x97x80(mm) of cityquid cobble shape with painting having strength b/w 5000phi filling the joints with hill sand, white powder for dressing and laying in specified manner patter and design i/c L.C etc. complete (SI No: 72 P-49)	199.77	P. Sft.	243719
5.	2532	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.6 P.No.16).Ratio 1:2:4	14429.25	P% Cft	3653
6.	112.50	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	13442
7.	10.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 100mm Pipe 4" dia	136.00	P.Rft	1360
8.	10.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 150mm Pipe 6" dia	259.00	P.Rft	2590
TOTAL S.B					763,533

Amount Total (a)

.....% above / below on the rates of CSR.

Total (A) = a + b in words & figure

**Amount to be added / deducted on the basis
Of premium quoted**

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

Draft Bidding documents for works up to Millions

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: CONSTT: OF SURFACE DRAINS C.C BLOCK & PAVER BLOCK FROM H/O GHULAM NABI PHUL TO ATTA MUHAMMAD PHUL (M.P) TALUKA GAMBAT
Prud M Challa
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10,00,000.00
- e) Amount of Bid Security: 30,000.00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- I) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- l) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: (in words & figures) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

3.	336.00	Extra for every 50" ft additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P%0 Cft	1693.00
4.	110.88	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	10441.00
5.	84.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P%Cft	12121.00
6.	21.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI No: 19 Page No: 18)	3127.41	P% Sft	657.00
7.	24.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	6216.00
PART-03 PAVER BLOCKS					
1.	732.50	Hard Marrum or fine powdery Marrum	1800.00	P% Cft	13185.00
2.	732.50	Laying Earth Work 6" Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (b) P No: 03)	354.00	P%0 Cft	259.00
3.	966.90	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	91046.00
4.	2930.00	P&F cement paving block flooring having size of 197x97x80(mm) of city/quid cobble shape with painting having strength b/w 5000phi filling the joints with hill sand, white powder for dressing and laying in specified manner patter and design i/c L.C etc. complete (SI No: 72 P-49)	199.77	P. Sft.	585326.00
5.	60.80	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.6 P.No.16).Ratio 1:2:4	14429.25	P% Cft	8773.00
6.	56.25	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	6721.00
7.	20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 100mm Pipe 4" dia	136.00	P.Rft	2720.00
8.	20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 150mm Pipe 6" dia	259.00	P.Rft	5180.00
TOTAL S.B					808,598

Amount Total (a)

.....% above / below on the rates of CSR.

Total (A) = a + b in words & figure

Amount to be added / deducted on the basis
Of premium quoted

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

BILL OF QUANTITIES**(A) Description and rate of based on composite schedule of Rates**

ITEM No:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	274.63	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18.P.No.4)	3176.25	P%0 Cft	872.00
2.	79.75	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	9003.00
3.	168.75	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	20163.00
4.	T-A 50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	4700.00
5.	T-B 50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	8700.00
6.	242.00	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b), P.No.58).	2283.93	P% Sft	5527.00
7.	24.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	8088.00
8.	0.964	Fabrication of M.S Reinforcement for C.C. I/c cutting bending lying in position making joints and fastening I/c cost of binding wire also I/c removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.20	P. Cwt	4823.00
9.	6.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	1554.00
PART-02 C.C BLOCKS					
1.	336.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 3(a) P.No: 1)	2117.50	P%0 Cft	711.00
2.	336.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	119.00

Continued.....

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: CONSTT: OF SURFACE DRAINS C.C BLOCK & PAVER BLOCK FROM METAL ROAD TO H/O SYED SHAFQAT ALI SHAH (M.P) TALUKA GAMBAT
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10, 00,000. 00
- e) Amount of Bid Security: 30,000. 00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- I) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- L) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: (in words & figures) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES

(A) Description and rate of based on composite schedule of Rates

ITEM No:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	769.50	Dismantling and removing road metaling (CSI No: 51 Page No: 13)	605.00	P% Cft	4655
2.	271.00	Dismantling Cement concrete Plain (CSI No: 19 (b) Page No: 11)	3327.50	P% Cft	9018
3.	112.50	Dismantling brick work lime or cement mortar (CSI, 13 Page No: 10)	1285.63	P% Cft	1446
4.	1915.08	Excavation in foundation building bridges and other structures i.e dig bell digging dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	6083
5.	553.85	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	62523
6.	1222.50	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	146069
7.	T-A 490.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	46060
8.	T-B 260.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	45240
9.	1796.60	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b). P.No.58).	2283.93	P% Sft	41033
10.	72.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	24264
11.	2.893	Fabrication of M.S Reinforcement for C.C. I/c cutting bending lying in position making joints and fastening i/c cost of binding wire also i/c removal of rust from bars. (CSI.No. (ii). P.No.20).	4820.20	P. Cwt	14469
PART-02 C.C BLOCKS					
1.	656.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 3(a) P.No: 1)	2117.50	P%0 Cft	1389
2.	656.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	232

Continued.....

3	656.00	Extra for every 50" ft additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P% Cft	3306
4	216.48	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P% Cft	20384
5	164.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P% Cft	23664
6	41.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI.No: 19 Page No: 18)	3127.41	P% Sft	1282
7	16.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	4144
PART-03 PAYER BLOCKS					
1.	305.00	Hard Marrum or fine powdery Marrum	1800.00	P% Cft	5490
2.	305.00	Laying Earth Work 6" Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (b) P No: 03)	354.00	P%0 Cft	108
3.	402.60	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P% Cft	37910
4.	1220.00	P&F cement paving block flooring having size of 197x97x80(mm) of cityquid cobble shape with painting having strength b/w 5000phi filling the joints with hill sand, white powder for dressing and laying in specified manner patter and design i/c L.C etc. complete (SI No: 72 P-49)	199.77	P. Sft.	243719
5.	2532	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.6 P.No.16).Ratio 1:2:4	14429.25	P% Cft	3653
6.	112.50	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	13442
7.	10.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 100mm Pipe 4" dia	136.00	P.Rft	1360
8.	10.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 150mm Pipe 6" dia	259.00	P.Rft	2590
TOTAL S.B					763,533

Amount Total (a)

.....% above / below on the rates of CSR.

Amount to be added / deducted on the basis
Of premium quoted

Total (A) = a + b in words & figure

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: CONSTT: OF SURFACE DRAINS C.C BLOCK & PAVER BLOCK FROM NATIONAL HIGHWAY N-5 TO H/O SACHAL MALLAH (~~MLP~~) TALUKA GAMBAT
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10, 00,000. 00
- e) Amount of Bid Security: 30,000. 00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- I) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- L) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: (*in words & figures*) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES

(A) Description and rate of based on composite schedule of Rates

ITEM NO:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	274.63	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	872.00
2.	79.75	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	9003.00
3.	168.75	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	20163.00
4.	T-A 50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	4700.00
5.	T-B 50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	8700.00
6.	242.00	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b), P.No.58).	2283.93	P% Sft	5527.00
7.	24.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	8088.00
8.	0.964	Fabrication of M.S Reinforcement for C.C. i/c cutting bending lying in position making joints and fastening i/c cost of binding wire also i/c removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.20	P. Cwt	4823.00
9.	6.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	1554.00
PART-02 C.C BLOCKS					
1.	336.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 3(a) P.No: 1)	2117.50	P%0 Cft	711.00
2.	336.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	119.00

Continued.....

3.	336.00	Extra for every 50" ft additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P%0 Cft	1693.00
4.	110.88	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	10441.00
5.	84.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P%Cft	12121.00
6.	21.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI. No: 19 Page No: 18)	3127.41	P% Sft	657.00
7.	24.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	6216.00
PART-03 PAVER BLOCKS					
1.	732.50	Hard Marrum or fine powdery Marrum	1800.00	P% Cft	13185.00
2.	732.50	Laying Earth Work 6" Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (b) P No: 03)	354.00	P%0 Cft	259.00
3.	966.90	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	91046.00
4.	2930.00	P&F cement paving block flooring having size of 197x97x80(mm) of city/quid cobble shape with painting having strength b/w 5000phi filling the joints with hill sand, white powder for dressing and laying in specified manner patter and design i/c L.C etc. complete (SI No: 72 P-49)	199.77	P. Sft.	585326.00
5.	60.80	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.6 P.No.16).Ratio 1:2:4	14429.25	P% Cft	8773.00
6.	56.25	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	6721.00
7.	20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 100mm Pipe 4" dia	136.00	P.Rft	2720.00
8.	20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 150mm Pipe 6" dia	259.00	P.Rft	5180.00
TOTAL S.B					808,598

Amount Total (a)

.....% above / below on the rates of CSR.

**Amount to be added / deducted on the basis
Of premium quoted**

Total (A) = a + b in words & figure

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: CONSTT: OF SURFACE DRAINS C.C BLOCK & PAVER BLOCK FROM KEENJHAR HOTEL TO AGHA PATHAN HOUSE ~~(72.27)~~ TALUKA GAMBAT
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10, 00,000. 00
- e) Amount of Bid Security: 30,000. 00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- i) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- l) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: (in words & figures) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES**(A) Description and rate of based on composite schedule of Rates**

ITEM No:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	769.50	Dismantling and removing road metaling (CSI No: 51 Page No: 13)	605.00	P% Cft	4655
2.	271.00	Dismantling Cement concrete Plain (CSI No: 19 (b) Page No: 11)	3327.50	P% Cft	9018
3.	112.50	Dismantling brick work lime or cement mortar (CSI, 13 Page No: 10)	1285.63	P% Cft	1446
4.	1915.08	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	6083
5.	553.85	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	62523
6.	1222.50	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	146069
7.	T-A 490.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	46060
8.	T-B 260.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	45240
9.	1796.60	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b), P.No.58).	2283.93	P% Sft	41033
10.	72.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	24264
11.	2.893	Fabrication of M.S Reinforcement for C.C. i/c cutting bending lying in position making joints and fastening i/c cost of binding wire also i/c removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.20	P. Cwt	14469
PART-02 C.C BLOCKS					
1.	656.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 3(a) P.No: 1)	2117.50	P%0 Cft	1389
2.	656.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	232

Continued.....

3.	656.00	Extra for every 50" ft additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P% Cft	3306
4.	216.48	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P% Cft	20384
5.	164.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P% Cft	23664
6.	41.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI. No: 19 Page No: 18)	3127.41	P% Sft	1282
7.	16.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	4144
PART-03 PAVER BLOCKS					
1.	305.00	Hard Marrum or fine powdery Marrum	1800.00	P% Cft	5490
2.	305.00	Laying Earth Work 6" Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (b) P No: 03)	354.00	P%0 Cft	108
3.	402.60	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P% Cft	37910
4.	1220.00	P&F cement paving block flooring having size of 197x97x80(mm) of city liquid cobble shape with painting having strength b/w 5000psi filling the joints with hill sand, white powder for dressing and laying in specified manner /patter and design i/c L.C etc. complete (SI No: 72 P-49)	199.77	P. Sft.	243719
5.	2532	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.6 P.No.16).Ratio 1:2:4	14429.25	P% Cft	3653
6.	112.50	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	13442
7.	10.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 100mm Pipe 4" dia	136.00	P.Rft	1360
8.	10.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 150mm Pipe 6" dia	259.00	P.Rft	2590
TOTAL S.B					763,533

Amount Total (a)

.....% above / below on the rates of CSR.

**Amount to be added / deducted on the basis
Of premium quoted**

Total (A) = a + b in words & figure

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

Draft Bidding documents for works up to Millions

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: CONSTITUTION OF SURFACE DRAINS C.C BLOCK & PAVER BLOCK FROM AGRA ROAD TO IRRIGATION HOUSE (R.P) TALUKA GAMBAT
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10,00,000.00
- e) Amount of Bid Security: 30,000.00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- i) Deadline from submission of bids along with time: _____
- j) Venue, Time & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- l) Liquidity Damages: N/A
- m) Deposit receipt No: Date Amount: (in words & figures) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES

(A) Description and rate of based on composite schedule of Rates

ITEM No:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	274.63	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	872.00
2.	79.75	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	9003.00
3.	168.75	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	20163.00
4.	T-A 50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	4700.00
5.	T-B 50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	8700.00
6.	242.00	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b), P.No.58).	2283.93	P% Sft	5527.00
7.	24.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	8088.00
8.	0.964	Fabrication of M.S Reinforcement for C.C. I/c cutting bending lying in position making joints and fastening i/c cost of binding wire also i/c removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.20	P. Cwt	4823.00
9.	6.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	1554.00
PART-02 C.C BLOCKS					
1.	336.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: B(a) P.No: 1)	2117.50	P%0 Cft	711.00
2.	336.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	119.00

Continued.....

3.	336.00	Extra for every 50" ft additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P%0 Cft	1693.00
4.	110.88	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	10441.00
5.	84.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P%Cft	12121.00
6.	21.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI No: 19 Page No: 18)	3127.41	P% Sft	657.00
7.	24.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	6216.00
PART-03 PAVER BLOCKS					
1.	732.50	Hard Marrum or fine powdery Marrum	1800.00	P% Cft	13185.00
2.	732.50	Laying Earth Work 6" Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (b) P No: 03)	354.00	P%0 Cft	259.00
3.	966.90	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	91046.00
4.	2930.00	P&F cement paving block flooring having size of 197x97x80(mm) of city/quid cobble shape with painting having strength b/w 5000phi filling the joints with hill sand, white powder for dressing and laying in specified manner patter and design i/c L.C etc. complete (SI No: 72 P-49)	199.77	P. Sft.	585326.00
5.	60.80	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.6 P.No.16).Ratio 1:2:4	14429.25	P% Cft	8773.00
6.	56.25	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	6721.00
7.	20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 100mm Pipe 4" dia	136.00	P.Rft	2720.00
8.	20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 150mm Pipe 6" dia	259.00	P.Rft	5180.00
TOTAL S.B					808,598

Amount Total (a)

.....% above / below on the rates of CSR.

Total (A) = a + b in words & figure

Amount to be added / deducted on the basis
Of premium quoted

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

5
Draft Bidding documents for works up to Millions

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: CONST: OF SURFACE DRAINS C.C BLOCK & PAVER BLOCK FROM ADVOCATE CHAMBERS TO SESSION COURT (352) TALUKA GAMBAT
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10, 00,000. 00
- e) Amount of Bid Security: 30,000. 00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- I) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- L) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: (in words & figures) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES

(A) Description and rate of based on composite schedule of Rates

ITEM NO:	QTY:	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	274.63	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	872.00
2.	79.75	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	9003.00
3.	168.75	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	20163.00
4.	T-A 50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	4700.00
5.	T-B 50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	8700.00
6.	242.00	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b), P.No.58).	2283.93	P% Sft	5527.00
7.	24.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	8088.00
8.	0.964	Fabrication of M.S Reinforcement for C.C. i/c cutting bending lying in position making joints and fastening i/c cost of binding wire also i/c removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.20	P. Cwt	4823.00
9.	6.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No.04 P.No. 23) Pipe 6" dia	259.00	P. Rft	1554.00
PART-02 C.C BLOCKS					
1.	336.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 3(a) P.No: 1)	2117.50	P%0 Cft	711.00
2.	336.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	119.00

Continued.....

3.	336.00	Extra for every 50" ft additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P%0 Cft	1693.00
4.	110.88	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%0Cft	10441.00
5.	84.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P%0Cft	12121.00
6.	21.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI No: 19 Page No: 18)	3127.41	P% Sft	657.00
7.	24.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	6216.00
PART-03 PAVER BLOCKS					
1.	732.50	Hard Marrum or fine powdery Marrum	1800.00	P% Cft	13185.00
2.	732.50	Laying Earth Work 6" Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (b) P No: 03)	354.00	P%0 Cft	259.00
3.	966.90	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%0Cft	91046.00
4.	2930.00	P&F cement paving block flooring having size of 197x97x80(mm) of city/quid cobble shape with painting having strength b/w 5000psi filling the joints with hill sand, white powder for dressing and laying in specified manner pater and design i/c L.C etc. complete (SI No: 72 P-49)	199.77	P. Sft.	585326.00
5.	60.80	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.6 P.No.16).Ratio 1:2:4	14429.25	P% Cft	8773.00
6.	56.25	Pacea brick work in foundation and plinth in cement mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	6721.00
7.	20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 100mm Pipe 4" dia	136.00	P.Rft	2720.00
8.	20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 150mm Pipe 6" dia	259.00	P.Rft	5180.00
TOTAL S.B					808,598

Amount Total (a)

.....% above / below on the rates of CSR.

**Amount to be added / deducted on the basis
Of premium quoted**

Total (A) = a + b in words & figure

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT
- b) Brief Description of Works: CONST. OF CAR /TAXI STAND SHADE, RANIPUR ROAD TALUKA GAMBAT
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 500,000. 00
- e) Amount of Bid Security: 15,000. 00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: Sec; Dep: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- I) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @MUNICIPAL COMMITTEE GAMBAT OFFICE DATED ON _____
- k) Time for completion from written order of commence: 12 Months
- L) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: (*in words & figures*) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES

(A) Description and rate of based on composite schedule of Rates

ITEM No:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
1.	288.00	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P% Cft.	914
2.	1165.38	Cement concrete Bricks or stone ballast without Shuttering. (CSI.No.8 P.No.18).Ratio 1:4:8	9416.28	P% Cft.	109736
3.	112.10	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	13394
4.	983.02	Cement concrete without Shuttering. (CSI.No.8 P.No.18).Ratio 1:2:4	14429.25	P% Cft.	141554
5.	600.00	Pacca brick work in Ground floor Mortar 1:6 (CSI.No.4 P.No.25).	12674.36	P% Cft	76046
6.	72.00	Providing and fixing UPVC Pipe 4" dia	136.00	P% Sft	9792
7.	32.00	Providing and fixing UPVC Pipe 6" dia	259.00	P% Sft	8288
8.	131.58	Cement concrete without Shuttering. (CSI.No.8 P.No.18).Ratio 1:2:4	14429.25	P% Cft.	18986
TOTAL					378,710

Amount Total (a)


.....% above / below on the rates of CSR.

Total (A) = a + b in words & figure

**Amount to be added / deducted on the basis
Of premium quoted**

CONTRACTOR

ASSISTANT EXECUTIVE ENGINEER / PROCURING AGENCY

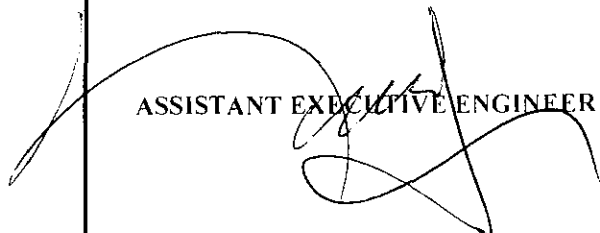

Draft Bidding documents for works up to Millions

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: CONSTT: OF COMPOUND WALL GRAVEYARD OF VILLAGE MUREED KHAN MARI ~~(R/R)~~ TALUKA GAMBAT
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10,00,000. 00
- e) Amount of Bid Security: 30,000. 00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- l) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- l) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: (in words & figures) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES**(A) Description and rate of based on composite schedule of Rates**

ITEM NO:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
COMPOUND WALL					
1.	1345.00	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	4272.00
2.	338.50	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	31874.00
3.	756.25	Random rubble masonry (un-Coursed) in foundation and plinth in cement sand mortar Ration 1:6 (CSI No: 01 (d) Page No: 27)	17723.00	P%Cft	134030.00
4.	625.38	Coursed rubble masonry i/c hammer dressing in cement sand mortar Ration 1:6 (CSI No: 02 P-27)	25321	P%Sft	158351.00
5.	203.13	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	68453.00
6.	8.161	Fabrication of M.S Reinforcement for C.C. i/c cutting bending lying in position making joints and fastening i/c cost of binding wire also i/c removal of rust from bars. (CSI.No. 7(ii), P.No.20).	5001.70	P. Cwt	40820.00
7.	1258.73	Pacca brick work in other then building i/c strictly of joint 20' height in cement sand mortar 1:6 (CSI.No.4 P.No.20).	12346.65	P% Cft	155412.00
8.	2151.00	Aster Cement Plaster (1:4) up to 20' height 3/8" thick (CSI. No: 11 (a) page No: 52)	2197.52	P% Sft	47269.00
9.	2235.00	Cement Plaster (1:4) up to 20' height 1/2" thick (CSI, No: 11 (a) page No: 52)	2283.93	P% Sft	68453.00
10.	1462.50	Cement pointing raised on stone work on raised (ii) in cement mortar 1:3 (CSI, 11 (a) P-52)	1758.08	P% Cft	25712.00
11.	2235.00	White Washing one Coat (CSI. No: 25 Page-54)	416.63	P Sft	9312.00
12.	2235.00	Color Washing Two Coats (CSI. No: 25 (a) Page-60)	859.90	P Sft	19219.00
13.	72.00	Making and fixing steel grouted door with 1/16" thick sheeting i/c iron frame 2x2" 3/8" and 3/4" square bars 4" with locking arrangement (CSI, No: 24 P-92)	726.72	P% Sft	52324.00

Continued.....

14.	144.00	Preparing surface painting doors and windows any type i/c edge (CSI. No: 05 P/69)	977.40	P% Sft	1407
				TOTAL S.B	799,501

Amount Total (a)


.....% above / below on the rates of CSR.

**Amount to be added / deducted on the basis
Of premium quoted**

Total (A) = a + b in words & figure

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

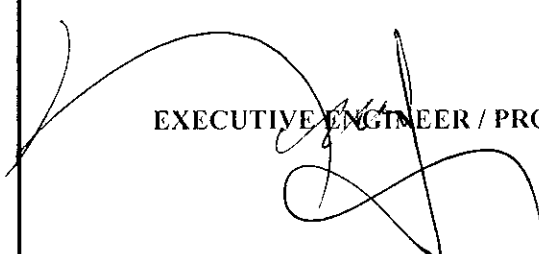

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: CONSTR: OF SURFACE DRAINS C.C BLOCK & PAVEMENT BLOCK FROM H/O GHULAM HUSSAIN KALHORO TO H/O GHULAM QADIR AND GHULAM SARWAR WANDIAR WARD NO: 13 TALUKA GAMBAT
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10,00,000.00
- e) Amount of Bid Security: 30,000.00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- I) Deadline from submission of bids along with time: _____
- j) Venue, Time & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commencement: 12 Months
- L) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: (in words & figures) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES

(A) Description and rate of based on composite schedule of Rates

ITEM No:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	769.50	Dismantling and removing road metaling (CSI No: 51 Page No: 13)	605.00	P% Cft	4655
2.	271.00	Dismantling Cement concrete Plain (CSI No: 19 (b) Page No: 11)	3327.50	P% Cft	9018
3.	112.50	Dismantling brick work lime or cement mortar (CSI, 13 Page No: 10)	1285.63	P% Cft	1446
4.	1915.08	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	6083
5.	553.85	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	62523
6.	1222.50	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	146069
7.	T-A 490.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	46060
8.	T-B 260.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	45240
9.	1796.60	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b), P.No.58).	2283.93	P% Sft	41033
10.	72.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	24264
11.	2.893	Fabrication of M.S Reinforcement for C.C. i/c cutting bending lying in position making joints and fastening i/c cost of binding wire also i/c removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.20	P. Cwt	14469
PART-02 C.C BLOCKS					
1.	656.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 3(a) P.No: 1)	2117.50	P%0 Cft	1389
2.	656.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	232

Continued.....

3.	656.00	Extra for every 50" of additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P% Cft	3306
4.	216.48	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P% Cft	20384
5.	164.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P% Cft	23664
6.	41.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI.No: 19 Page No: 18)	3127.41	P% Sft	1282
7.	16.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	4144
PART-03 PAVER BLOCKS					
1.	305.00	Hard Marrum or fine powdery Marrum	1800.00	P% Cft	5490
2.	305.00	Laying Earth Work 6" Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (b) P No: 03)	354.00	P%0 Cft	108
3.	402.60	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P% Cft	37910
4.	1220.00	P&F cement paving block flooring having size of 197x97x80(mm) of city/quid cobble shape with painting having strength b/w 5000psi filling the joints with hill sand, white powder for dressing and laying in specified manner patter and design i/c L.C etc. complete (SI No: 72 P-49)	199.77	P. Sft.	243719
5.	2532	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.6 P.No.16).Ratio 1:2:4	14429.25	P% Cft	3653
6.	112.50	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	13442
7.	10.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 100mm Pipe 4" dia	136.00	P.Rft	1360
8.	10.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 150mm Pipe 6" dia	259.00	P.Rft	2590
TOTAL S.B					763,533

Amount Total (a)

.....% above / below on the rates of CSR.

Amount to be added / deducted on the basis
Of premium quoted

Total (A) = a + b in words & figure

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

Draft Biding documents for works up to Millions

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT
- b) Brief Description of Works: CONST. OF S/DRAINS CC BLOCK & CC PAVER FROM H/O ZAHEER SIYAL TO IMDAD SIYAL, NOOR MUHAMMAD SIYAL MUHALLA.
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10,00000. 00
- e) Amount of Bid Security: 30,000. 00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: S. Dep: 7%
- h) Percentage, if any, to be deducted from bills: Income Tax 7.5%
- I) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @MUNICIPAL COMMITTEE GAMBAT OFFICE DATED ON _____
- k) Time for completion from written order of commence: 12 Months
- L) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: (in words & figures) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES

(A) Description and rate of based on composite schedule of Rates

ITEM No:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	274.63	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P ⁰⁰ Cft	872
2.	79.75	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	9003
3.	168.75	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P ⁰⁰ Cft	20163
4.	50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	4700
5.	50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	8700
6.	242.00	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b), P.No.38).	2283.93	P% Sft	5527
7.	24.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	8088
8.	0.964	Fabrication of M.S Reinforcement for C.C. i/c cutting bending lying in position making joints and fastening i/c cost of binding wire also i/c removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.20	P. Cwt	4822
9.	6.00	Providing and Fixing JPC Pipe of Class "B" fixing in trench i/c cutting, fitting and jointing i/c testing of water to a head of 61 meter of 200ft. (CSI, 04 P/23) PIPE 6" DIA	259.00	P. Rft	1554
PART-02 C.C BLOCKS					
1.	336.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 3(a) P.No: 1)	2117.50	P ⁰⁰ C ft	711
2.	336.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P ⁰⁰ Cft	119

Continued.....

3.	336.00	Extra for every 50" of additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P%0 Cft	1693
4.	110.88	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%0Cft	10441
5.	84.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P%0Cft	12121
6.	21.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI. No: 19 Page No: 18)	3127.41	P%0 Sft	657
7.	24.00	Providing and Fixing UPC Pipe of Class "B" fixing in trench i/c cutting, fitting and jointing i/c testing of water to a head of 61 meter of 200ft. (CSI, 04 P/23) PIPE 6" DIA	259.00	P. Rft	6216
PART-03 PAVER BLOCKS					
1.	732.50	Hard Marrum or fine powdery Marrum	1800.00	P%0 Cft	13185
2.	732.50	Laying Earth Work 6" Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (b) P No: 03)	354.00	P%0 Cft	259
3.	966.90	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%0Cft	91046
4.	2930.00	P&F cement paving block flooring having size of 197x97x80(mm) of cityquid cobble shape with painting having strength b/w 5000psi filling the joints with hill sand, white powder for dressing and laying in specified manner patter and design i/c L.C etc. complete (SI No: 72 P-49)	199.77	P. Sft.	585326
5.	60.80	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.6 P.No.16).Ratio 1:2:4	14429.25	P%0 Cft	8773
6.	56.25	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P%0 Cft	6721
7.	20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 100mm Pipe 4" dia	136.00	P.Rft	2720
8.	20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 150mm Pipe 6" dia	259.00	P.Rft	5180
TOTAL S.B					808,597

Amount Total (a)

.....% above / below on the rates of CSR.

Amount to be added / deducted on the basis
Of premium quoted

Total (A) = a + b in words & figure

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: CONSTITUTION OF SURFACE DRAINS C.C BLOCK & PAVEMENT BLOCK FROM H/O ABDUL HAMEED THEBO TO H/O DHANI BUX THEBO WARD NO: 13 TALUKA GAMBAT
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10,00,000.00
- e) Amount of Bid Security: 30,000.00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- i) Deadline from submission of bids along with time: _____
- j) Venue, Time & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commencement: 12 Months
- l) Liquidity Damages: N/A
- m) Deposit receipt No: Date Amount: (in words & figures) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES**(A) Description and rate of based on composite schedule of Rates**

ITEM NO:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	769.50	Dismantling and removing road metaling (CSI No: 51 Page No: 13)	605.00	P% Cft	4655
2.	271.00	Dismantling Cement concrete Plain (CSI No: 19 (b) Page No: 11)	3327.50	P% Cft	9018
3.	112.50	Dismantling brick work lime or cement mortar (CSI, 13 Page No: 10)	1285.63	P% Cft	1446
4.	1915.08	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	6083
5.	553.85	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	62523
6.	1222.50	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	146069
7.	T-A 490.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	46060
8.	T-B 260.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	45240
9.	1796.60	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b). P.No.38).	2283.93	P% Sft	41033
10.	72.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	24264
11.	2.893	Fabrication of M.S Reinforcement for C.C. I/c cutting bending lying in position making joints and fastening i/c cost of binding wire also I/c removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.20	P. Cwt	14469
PART-02 C.C BLOCKS					
1.	656.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 3(a) P.No: 1)	2117.50	P%0 Cft	1389
2.	656.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	232

Continued.....

3.	656.00	Extra for every 50" ft additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P% Cft	3306
4.	216.48	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P% Cft	20384
5.	164.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P% Cft	23664
6.	41.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI, No: 19 Page No: 18)	3127.41	P% Sft	1282
7.	16.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	4144
PART-03 PAVER BLOCKS					
1.	305.00	Hard Marrum or fine powdery Marrum	1800.00	P% Cft	5490
2.	305.00	Laying Earth Work 6" Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (b) P No: 03)	354.00	P% Cft	108
3.	402.60	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P% Cft	37910
4.	1220.00	P&F cement paving block flooring having size of 197x97x80(mm) of city/quad cobble shape with painting having strength b/w 5000psi filling the joints with hill sand, white powder for dressing and laying in specified manner patter and design i/c L.C etc. complete (SI No: 72 P-49)	199.77	P. Sft.	243719
5.	2532	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.6 P.No.16).Ratio 1:2:4	14429.25	P% Cft	3653
6.	112.50	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	13442
7.	10.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 100mm Pipe 4" dia	136.00	P.Rft	1360
8.	10.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 150mm Pipe 6" dia	259.00	P.Rft	2590
TOTAL S.B					763,533

Amount Total (a)

.....% above / below on the rates of CSR.

**Amount to be added / deducted on the basis
Of premium quoted**

Total (A) = a + b in words & figure

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: CONST: OF SURFACE DRAINS C.C BLOCK & PAVER BLOCK FROM REHMANIA MADERSA TO H/O USTAD ATTA MUHAMMAD KALLO WARD NO: 12 TALUKA GAMBAT (P-B)
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10,00,000.00
- e) Amount of Bid Security: 30,000.00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- I) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- l) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: (in words & figures) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES**(A) Description and rate of based on composite schedule of Rates**

ITEM No:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	274.63	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	872.00
2.	79.75	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	9003.00
3.	168.75	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	20163.00
4.	T-A 50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	4700.00
5.	T-B 50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1.32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	8700.00
6.	242.00	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b), P.No.58).	2283.93	P% Sft	5527.00
7.	24.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	8088.00
8.	0.964	Fabrication of M.S Reinforcement for C.C. i/c cutting bending lying in position making joints and fastening i/c cost of binding wire also i/c removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.20	P. Cwt	4823.00
9.	6.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	1554.00
PART-02 C.C BLOCKS					
1.	336.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 3(a) P.No: 1)	2117.50	P%0 Cft	711.00
2.	336.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	119.00

Continued.....

3.	336.00	Extra for every 50" ft additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P%0 Cft	1693.00
4.	110.88	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	10441.00
5.	84.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P%Cft	12121.00
6.	21.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI.No: 19 Page No: 18)	3127.41	P% Sft	657.00
7.	24.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	6216.00
PART-03 PAVER BLOCKS					
1.	732.50	Hard Marrum or fine powdery Marrum	1800.00	P% Cft	13185.00
2.	732.50	Laying Earth Work 6" Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (b) P No: 03)	354.00	P%0 Cft	259.00
3.	966.90	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	91046.00
4.	2930.00	P&F cement paving block flooring having size of 197x97x80(mm) of city/quid cobble shape with painting having strength b/w 5000phi filling the joints with hill sand, white powder for dressing and laying in specified manner patter and design i/c L.C etc. complete (SI No: 72 P-49)	199.77	P. Sft.	585326.00
5.	60.80	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.6 P.No.16).Ratio 1:2:4	14429.25	P% Cft	8773.00
6.	56.25	Paeca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	6721.00
7.	20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 100mm Pipe 4" dia	136.00	P.Rft	2720.00
8.	20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 150mm Pipe 6" dia	259.00	P.Rft	5180.00
TOTAL S.B					808,598

Amount Total (a)

.....% above / below on the rates of CSR.

**Amount to be added / deducted on the basis
Of premium quoted**

Total (A) = a + b in words & figure

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: CONSTT: OF SURFACE DRAINS C.C BLOCK & PAVER BLOCK FROM H/O USTAD ATTA MUHAMMAD KALLO TO REHMANIA MADERSA WARD NO: 12 TALUKA GAMBAT (P-A)
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10, 00,000. 00
- e) Amount of Bid Security: 30,000. 00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- i) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- l) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: *(in words & figures)* N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES**(A) Description and rate of based on composite schedule of Rates**

ITEM NO:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	274.63	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	872.00
2.	79.75	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	9003.00
3.	168.75	Pacea brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	20163.00
4.	T-A 50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	4700.00
5.	T-B 50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	8700.00
6.	242.00	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b), P.No.58).	2283.93	P% Sft	5527.00
7.	24.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	8088.00
8.	0.964	Fabrication of M.S Reinforcement for C.C. i/c cutting bending lying in position making joints and fastening i/c cost of binding wire also i/c removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.20	P. Cwt	4823.00
9.	6.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	1554.00
PART-02 C.C BLOCKS					
1.	336.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 3(a) P.No: 1)	2117.50	P%0 Cft	711.00
2.	336.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	119.00

Continued.....

3.	336.00	Extra for every 50" ft additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P%0 Cft	1693.00
4.	110.88	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	10441.00
5.	84.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P%Cft	12121.00
6.	21.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI. No: 19 Page No: 18)	3127.41	P% Sft	657.00
7.	24.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	6216.00
PART-03 PAVER BLOCKS					
1.	732.50	Hard Marrum or fine powdery Marrum	1800.00	P% Cft	13185.00
2.	732.50	Laying Earth Work 6" Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (b) P No: 03)	354.00	P%0 Cft	259.00
3.	966.90	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	91046.00
4.	2930.00	P&F cement paving block flooring having size of 197x97x80(mm) of city/quid cobble shape with painting having strength b/w 5000phi filling the joints with hill sand, white powder for dressing and laying in specified manner patter and design i/c L.C etc. complete (SI No: 72 P-49)	199.77	P. Sft.	585326.00
5.	60.80	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.6 P.No.16).Ratio 1:2:4	14429.25	P% Cft	8773.00
6.	56.25	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	6721.00
7.	20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 100mm Pipe 4" dia	136.00	P. Rft	2720.00
8.	20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 50mm Pipe 6" dia	259.00	P. Rft	5180.00
TOTAL S.B					808,598

Amount Total (a)

.....% above / below on the rates of CSR.

**Amount to be added / deducted on the basis
Of premium quoted**

Total (A) = a + b in words & figure

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT
- b) Brief Description of Works: CONSTRUCTION AND RENOVATION OF COMPOUND WALL OF MEMOM MOHALLA GAMBAT GRAVEYARD.
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 5,00000. 00
- e) Amount of Bid Security: 15,000. 00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: S. Dep: 7%
- h) Percentage, if any, to be deducted from bills: Income Tax 7.5%
- I) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @MUNICIPAL COMMITTEE GAMBAT OFFICE DATED ON _____
- k) Time for completion from written order of commence: 12 Months
- L) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: (in words & figures) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES**(A) Description and rate of based on composite schedule of Rates**

ITEM No:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
COMPOUND WALL.					
1.	565.00	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	1795.00
2.	143.50	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	13512.00
3.	317.50	Random rubble masonry (un-Coursed) in foundation and plinth in cement sand mortar Ration 1:6 (CSI No: 01 (d) Page No: 27)	17723.00	P%Cft	56271.00
4.	259.75	Coursed rubble masonry i/c hammer dressing in cement sand mortar Ration 1:6 (CSI No: 02 P-27)	25321	P%Sft	65771.00
5.	81.25	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	27381.00
6.	3.265	Fabrication of M.S Reinforcement for C.C. I/c cutting bending lying in position making joints and fastening I/c cost of binding wire also I/c removal of rust from bars. (CSI.No. 7(ii), P.No.20).	5001.70	P. Cwt	16328.00
7.	736.03	Pacca brick work in other then building i/c strictly of joint 20' height in cement sand mortar 1:6 (CSI.No.4 P.No.20).	12346.65	P% Cft	90875.00
8.	1192.50	Aster Cement Plaster (1:4) up to 20' height 3/8" thick (CSI. No: 11 (a) page No: 52)	2197.52	P% Sft	26205.00
9.	1276.50	Cement Plaster (1:4) up to 20' height 1/2" thick (CSI, No: 11 (a) page No: 52)	2283.93	P% Sft	29154.00
10.	585.00	Cement pointing raised on stone work on raised (ii) in cement mortar 1:3 (CSI. 11 (a) P-52)	1758.08	P% Cft	10285.00
11.	1276.50	White Washing one Coat (CSI. No: 25 Page-54)	416.63	P Sft	5318.00
12.	1276.50	Color Washing Two Coats (CSI. No: 25 (a) Page-60)	859.90	P Sft	10977.00
13.	72.00	Making and fixing steel grouted door with 1/16" thick sheeting i/c iron frame 2x2" 3/8" and 3/4" square bars 4" with locking arrangement (CSI. No: 24 P-92)	726.72	P% Sft	52324.00

Continued.....

14.	144.00	Preparing surface painting doors and windows any type i/c edge (CSI. No: 05 P/69)	977.40	P% Sft	1407
				TOTAL S.B	407,604/=

Amount Total (a)


.....% above / below on the rates of CSR.

**Amount to be added / deducted on the basis
Of premium quoted**

Total (A) = a + b in words & figure

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

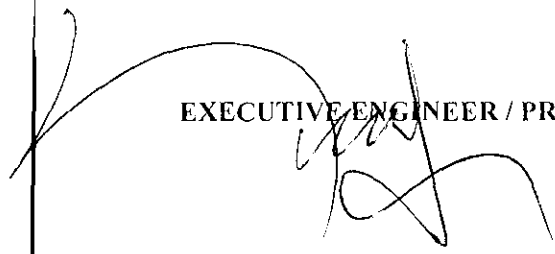

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: CONST. OF S/DRAINS CC BLOCK & CC PAVER FROM HOUSE HAJI MUNEER MEMON TO PRIMARY SCHOOL, MEMON MUHALLA.
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10,00,000.00
- e) Amount of Bid Security: 30,000.00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: S. Dep: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- i) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- L) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: *(in words & figures)* N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES

(A) Description and rate of based on composite schedule of Rates

ITEM NO:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	769.50	Dismantling and removing road metaling (CSI No: 51 Page No: 13)	605.00	P% Cft	4655
2.	271.00	Dismantling Cement concrete Plain (CSI No: 19 (b) Page No: 11)	3327.50	P% Cft	9018
3.	112.50	Dismantling brick work lime or cement mortar (CSI, 13 Page No: 10)	1285.63	P% Cft	1446
4.	1915.08	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18.P.No.4)	3176.25	P%0 Cft	6083
5.	553.85	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	62523
6.	1222.50	Paeca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	146069
7.	T-A 490.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	46060
8.	T-B 260.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	45240
9.	1796.60	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b), P.No.58).	2283.93	P% Sft	41033
10.	72.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	24264
11.	2.893	Fabrication of M.S Reinforcement for C.C. i/c cutting bending lying in position making joints and fastening i/c cost of binding wire also i/c removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.20	P. Cwt	14469
PART-02 C.C BLOCKS					
1.	656.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 3(a) P.No: 1)	2117.50	P%0 Cft	1389
2.	656.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	232

Continued.....

3.	656.00	Extra for every 50" ft additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P% Cft	3306
4.	216.48	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P% Cft	20384
5.	164.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P% Cft	23664
6.	41.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI, No: 19 Page No: 18)	3127.41	P% Sft	1282
7.	16.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	4144
PART-03 PAVER BLOCKS					
1.	305.00	Hard Marrum or fine powdery Marrum	1800.00	P% Cft	5490
2.	305.00	Laying Earth Work 6" Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (b) P No: 03)	354.00	P% Cft	108
3.	402.60	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P% Cft	37910
4.	1220.00	P&F cement paving block flooring having size of 197x97x80(mm) of city/quid cobble shape with painting having strength b/w 5000phi filling the joints with hill sand, white powder for dressing and laying in specified manner /patter and design i/c L.C etc. complete (SI No: 72 P-49)	199.77	P. Sft.	243719
5.	2532	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.6 P.No.16).Ratio 1:2:4	14429.25	P% Cft	3653
6.	112.50	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	13442
7.	10.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 100mm Pipe 4" dia	136.00	P.Rft	1360
8.	10.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 150mm Pipe 6" dia	259.00	P.Rft	2590
TOTAL S.B					763,533

Amount Total (a)

.....% above / below on the rates of CSR.

Amount to be added / deducted on the basis
Of premium quoted

Total (A) = a + b in words & figure

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: CONSTT: OF SURFACE DRAINS C.C BLOCK & PAVER BLOCK FROM H/O SHAFI MUHAMMAD TO IQBAL JUNEJO WARD NO: 11 TALUKA GAMBAT
Munim Mohalla
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10, 00,000. 00
- e) Amount of Bid Security: 30,000. 00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- i) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- l) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: (in words & figures) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES**(A) Description and rate of based on composite schedule of Rates**

ITEM No:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	274.63	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	872.00
2.	79.75	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	9003.00
3.	168.75	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	20163.00
4.	T-A 50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	4700.00
5.	T-B 50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	8700.00
6.	242.00	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b), P.No.38).	2283.93	P% Sft	5527.00
7.	24.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	8088.00
8.	0.964	Fabrication of M.S Reinforcement for C.C. i/c cutting bending lying in position making joints and fastening i/c cost of binding wire also i/c removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.20	P. Cwt	4823.00
9.	6.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	1554.00
PART-02 C.C BLOCKS					
1.	336.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 3(a) P.No: 1)	2117.50	P%0 Cft	711.00
2.	336.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	119.00

Continued.....

3.	336.00	Extra for every 50" ft additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P% Cft	1693.00
4.	110.88	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	10441.00
5.	84.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P%Cft	12121.00
6.	21.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI No: 19 Page No: 18)	3127.41	P% Sft	657.00
7.	24.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	6216.00
PART-03 PAVER BLOCKS					
1.	732.50	Hard Marrum or fine powdery Marrum	1800.00	P% Cft	13185.00
2.	732.50	Laying Earth Work 6" Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (b) P No: 03)	354.00	P%0 Cft	259.00
3.	966.90	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	91046.00
4.	2930.00	P&F cement paving block flooring having size of 197x97x80(mm) of city/cubid cobble shape with painting having strength b/w 5000phi filling the joints with hill sand, white powder for dressing and laying in specified manner patter and design i/c L.C etc. complete (SI No: 72 P-49)	199.77	P. Sft.	585326.00
5.	60.80	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.6 P.No.16).Ratio 1:2:4	14429.25	P% Cft	8773.00
6.	56.25	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	6721.00
7.	20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 100mm Pipe 4" dia	136.00	P.Rft	2720.00
8.	20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 150mm Pipe 6" dia	259.00	P.Rft	5180.00
TOTAL S.B					808,598

Amount Total (a)

.....% above / below on the rates of CSR.

**Amount to be added / deducted on the basis
Of premium quoted**

Total (A) = a + b in words & figure

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

Draft Bidding documents for works up to Millions

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: CONSTT: OF SURFACE DRAINS & C.C BLOCK FROM H/O IQBAL JUNEJO TO SHARIF SONARO SHOP WARD NO: 11 TALUKA GAMBAT
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 5,00,000.00
- e) Amount of Bid Security: 15,000.00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: S. Dep: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax= 7.5%
- I) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- L) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: (in words & figures) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES**(A) Description and rate of based on composite schedule of Rates**

ITEM No:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	406.50	Dismantling and removing road metaling (CSI No: 51 Page No: 13)	605.00	P% Cft	2459.00
2.	121.00	Dismantling Cement concrete Plain (CSI No: 19 (b) Page No: 11)	3327.50	P% Cft	4026.00
3.	56.25	Dismantling brick work lime or cement mortar (CSI, 13 Page No: 10)	1285.63	P% Cft	723.00
4.	1420.75	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	4513.00
5.	410.30	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	46318.00
6.	918.75	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	109776.00
7.	T-A 400.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	37600.00
8.	T-B 170.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	29580.00
9.	1361.00	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b), P.No.38).	2283.93	P% Sft	31084.00
10.	48.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	16176.00
11.	1.928	Fabrication of M.S Reinforcement for C.C. I/c cutting bending lying in position making joints and fastening I/c cost of binding wire also I/c removal of rust from bars. (CSI.No. (ii), P.No.20).	5001.70	P. Cwt	9643
PART-02 C.C BLOCKS					
1.	896.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 3(a) P.No: 1)	2117.50	P%0 Cft	1897.00
2.	896.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	317.00

Continued.....

3.	896.00	Extra for every 50' ft additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P%0 Cft	4515.00
4.	295.68	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	27842.00
5.	224.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P%Cft	32322.00
6.	56.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI No: 19 Page No: 18)	3127.41	P%Sft	1751.00
7.	8.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P.Rft	2072.00
TOTAL S.B					392,253

Amount Total (a)

.....% above / below on the rates of CSR.

**Amount to be added / deducted on the basis
Of premium quoted**

Total (A) = a + b in words & figure

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

Draft Biding documents for works up to Millions

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: CONSTT: OF SURFACE DRAINS C.C BLOCK & PAVER BLOCK FROM H/O SIKANDAR SONARO TO H/O QURBAN SHAIKH WARD NO: 10 TALUKA GAMBAT
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10, 00,000. 00
- e) Amount of Bid Security: 30,000. 00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- I) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- l) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: (in words & figures) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES

(A) Description and rate of based on composite schedule of Rates

ITEM NO:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	274.63	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	872.00
2.	79.75	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	9003.00
3.	168.75	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	20163.00
4.	T-A 50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	4700.00
5.	T-B 50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	8700.00
6.	242.00	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b), P.No.58).	2283.93	P% Sft	5527.00
7.	24.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	8088.00
8.	0.964	Fabrication of M.S Reinforcement for C.C. I/c cutting bending lying in position making joints and fastening I/c cost of binding wire also I/c removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.20	P. Cwt	4823.00
9.	6.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	1554.00
PART-02 C.C BLOCKS					
1.	336.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 3(a) P.No: 1)	2117.50	P%0 Cft	711.00
2.	336.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	119.00

Continued.....

3.	336.00	Extra for every 50" ft additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P%0 Cft	1693.00
4.	110.88	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	10441.00
5.	84.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P%Cft	12121.00
6.	21.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI No: 19 Page No: 18)	3127.41	P% Sft	657.00
7.	24.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	6216.00
PART-03 PAVER BLOCKS					
1.	732.50	Hard Marrum or fine powdery Marrum	1800.00	P% Cft	13185.00
2.	732.50	Laying Earth Work 6" Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (b) P No: 03)	354.00	P%0 Cft	259.00
3.	966.90	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	91046.00
4.	2930.00	P&F cement paving block flooring having size of 197x97x80(mm) of city/quid cobble shape with painting having strength b/w 5000phi filling the joints with hill sand, white powder for dressing and laying in specified manner /patter and design i/c L.C etc. complete (SI No: 72 P-49)	199.77	P. Sft.	585326.00
5.	60.80	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.6 P.No.16).Ratio 1:2:4	14429.25	P% Cft	8773.00
6.	56.25	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	6721.00
7.	20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 100mm Pipe 4" dia	136.00	P.Rft	2720.00
8.	20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 150mm Pipe 6" dia	259.00	P.Rft	5180.00
TOTAL S.B					808,598

Amount Total (a)

.....% above / below on the rates of CSR.

**Amount to be added / deducted on the basis
Of premium quoted**

Total (A) = a + b in words & figure

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT
- b) Brief Description of Works: Const. of S/Drains CC Block & CC Paver from House of Qurban Shaikh to H/O Ustad Nooruddin Panhwar Anaj Mandi Road Gambat.
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10,00000. 00
- e) Amount of Bid Security: 30,000. 00
- f) Period of Bid validity (days): (20 Days) (90 days)
- g) Security Deposit: S. Dep: 7%
- h) Percentage, if any, to be deducted from bills: Income Tax 7.5%
- I) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @MUNICIPAL COMMITTEE GAMBAT OFFICE DATED ON _____
- k) Time for completion from written order of commence: 12 Months
- L) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: (in words & figures) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES

(A) Description and rate of based on composite schedule of Rates

ITEM NO:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	274.63	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	872.00
2.	79.75	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	9003.00
3.	168.75	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	20163.00
4.	T-A 50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	4700.00
5.	T-B 50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	8700.00
6.	242.00	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b), P.No.58).	2283.93	P% Sit	5527.00
7.	24.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	8088.00
8.	0.964	Fabrication of M.S Reinforcement for C.C. I/c cutting bending lying in position making joints and fastening i/c cost of binding wire also i/c removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.20	P. Cwt	4823.00
9.	6.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	1554.00
PART-02 C.C BLOCKS					
1.	336.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: B(a) P.No: 1)	2117.50	P%0 Cft	711.00
2.	336.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	119.00

Continued.....

3.	336.00	Extra for every 50" ft additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P%0 Cft	1693.00
4.	110.88	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	10441.00
5.	84.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P%Cft	12121.00
6.	21.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI.No: 19 Page No: 18)	3127.41	P% Sft	657.00
7.	24.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	6216.00
PART-03 PAVER BLOCKS					
1.	732.50	Hard Marrum or fine powdery Marrum	1800.00	P% Cft	13185.00
2.	732.50	Laying Earth Work 6" Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (b) P No: 03)	354.00	P%0 Cft	259.00
3.	966.90	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	91046.00
4.	2930.00	P&F cement paving block flooring having size of 197x97x80(mm) of city/quid cobble shape with painting having strength b/w 5000phi filling the joints with hill sand, white powder for dressing and laying in specified manner patter and design i/c L.C etc. complete (SI No: 72 P-49)	199.77	P. Sft.	585326.00
5.	60.80	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.6 P.No.16).Ratio 1:2:4	14429.25	P% Cft	8773.00
6.	56.25	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	6721.00
7.	20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 100mm Pipe 4" dia	136.00	P.Rft	2720.00
8.	20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 150mm Pipe 6" dia	259.00	P.Rft	5180.00
TOTAL S.B					808,598

Amount Total (a)

.....% above / below on the rates of CSR.

**Amount to be added / deducted on the basis
Of premium quoted**

Total (A) = a + b in words & figure

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: CONST: OF SURFACE DRAINS C.C BLOCK & PAVER BLOCK FROM HAFEEZ MEDICAL STORE TO STREET OF GHULAM HYDER WARD NO: 10 TALUKA GAMBAT
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10, 00,000. 00
- e) Amount of Bid Security: 30,000. 00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- i) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- l) Liquidity Damages: N/A
- m) Deposit receipt No: Date Amount: (in words & figures) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES**(A) Description and rate of based on composite schedule of Rates**

ITEM NO:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	274.63	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	872.00
2.	79.75	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	9003.00
3.	168.75	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	20163.00
4.	T-A 50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	4700.00
5.	T-B 50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	8700.00
6.	242.00	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b), P.No.58).	2283.93	P% Sft	5527.00
7.	24.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	8088.00
8.	0.964	Fabrication of M.S Reinforcement for C.C. I/c cutting bending lying in position making joints and fastening i/c cost of binding wire also i/c removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.20	P. Cwt	4823.00
9.	6.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	1554.00
PART-02 C.C BLOCKS					
1.	336.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 3(a) P.No: 1)	2117.50	P%0 Cft	711.00
2.	336.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	119.00

Continued.....

3.	336.00	Extra for every 50" ft additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P% Cft	1693.00
4.	110.88	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P% Cft	10441.00
5.	84.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P% Cft	12121.00
6.	21.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI. No: 19 Page No: 18)	3127.41	P% Sft	657.00
7.	24.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	6216.00
PART-03 PAVER BLOCKS					
1.	732.50	Hard Marrum or fine powdery Marrum	1800.00	P% Cft	13185.00
2.	732.50	Laying Earth Work 6" Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (b) P No: 03)	354.00	P%0 Cft	259.00
3.	966.90	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P% Cft	91046.00
4.	2930.00	P&F cement paving block flooring having size of 197x97x80(mm) of city/quid cobble shape with painting having strength b/w 5000phi filling the joints with hill sand, white powder for dressing and laying in specified manner patter and design i/c L.C etc. complete (SI No: 72 P-49)	199.77	P. Sft.	585326.00
5.	60.80	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.6 P.No.16).Ratio 1:2:4	14429.25	P% Cft	8773.00
6.	56.25	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	6721.00
7.	20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 100mm Pipe 4" dia	136.00	P.Rft	2720.00
8.	20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 150mm Pipe 6" dia	259.00	P.Rft	5180.00
TOTAL S.B					808,598

Amount Total (a)

.....% above / below on the rates of CSR.

**Amount to be added / deducted on the basis
Of premium quoted**

Total (A) = a + b in words & figure

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

Draft Bidding documents for works up to Millions

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: CONSTT: OF SURFACE DRAINS C.C BLOCK & PAVER BLOCK NEAR TELEPHONE EXCHANGE II/O ALI DINO SAROHI TO OLD MARKET WARD NO: 09 TALUKA GAMBAT
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10,00,000.00
- e) Amount of Bid Security: 30,000.00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- I) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- L) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: (in words & figures) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES**(A) Description and rate of based on composite schedule of Rates**

ITEM NO:	QTY:	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	274.63	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	872.00
2.	79.75	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	9003.00
3.	168.75	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	20163.00
4.	T-A 50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	4700.00
5.	T-B 50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	8700.00
6.	242.00	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b). P.No.58).	2283.93	P% Sft	5527.00
7.	24.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	8088.00
8.	0.964	Fabrication of M.S Reinforcement for C.C. I/c cutting bending lying in position making joints and fastening i/c cost of binding wire also i/c removal of rust from bars. (CSI.No. (ii). P.No.20).	4820.20	P. Cwt	4823.00
9.	6.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	1554.00
PART-02 C.C BLOCKS					
1.	336.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 3 (a) P.No: 1)	2117.50	P%0 Cft	711.00
2.	336.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	119.00

Continued.....

3.	336.00	Extra for every 50" ft additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P%0 Cft	1693.00
4.	110.88	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%0Cft	10441.00
5.	84.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P%0Cft	12121.00
6.	21.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI, No: 19 Page No: 18)	3127.41	P%0 Sft	657.00
7.	24.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	6216.00
PART-03 PAVER BLOCKS					
1.	732.50	Hard Marrum or fine powdery Marrum	1800.00	P% Cft	13185.00
2.	732.50	Laying Earth Work 6" Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (b) P No: 03)	354.00	P%0 Cft	259.00
3.	966.90	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%0Cft	91046.00
4.	2930.00	P&F cement paving block flooring having size of 197x97x80(mm) of cityquid cobble shape with painting having strength b/w 5000phi filling the joints with hill sand, white powder for dressing and laying in specified manner pater and design i/c L.C etc. complete (SI No: 72 P-49)	199.77	P. Sft.	585326.00
5.	60.80	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.6 P.No.16).Ratio 1:2:4	14429.25	P% Cft	8773.00
6.	56.25	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	6721.00
7.	20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 100mm Pipe 4" dia	136.00	P.Rft	2720.00
8.	20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 150mm Pipe 6" dia	259.00	P.Rft	5180.00
TOTAL S.B					808,598

Amount Total (a)

.....% above / below on the rates of CSR.

**Amount to be added / deducted on the basis
Of premium quoted**

Total (A) = a + b in words & figure

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: CONSTITUTION OF SURFACE DRAINS C.C BLOCK & PAVER BLOCK BEHIND PRESS CLUB STREET TO H/O LATE SANAULLAH MALLAH WARD NO: 09 TALUKA GAMBAT
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10,00,000.00
- e) Amount of Bid Security: 30,000.00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- i) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- l) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: (in words & figures) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES

(A) Description and rate of based on composite schedule of Rates

ITEM NO:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	274.63	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	872.00
2.	79.75	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	9003.00
3.	168.75	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	20163.00
4.	T-A 50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	4700.00
5.	T-B 50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	8700.00
6.	242.00	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b), P.No.58).	2283.93	P% Sft	5527.00
7.	24.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	8088.00
8.	0.964	Fabrication of M.S Reinforcement for C.C. I/c cutting bending lying in position making joints and fastening I/c cost of binding wire also I/c removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.20	P. Cwt	4823.00
9.	6.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	1554.00
PART-02 C.C BLOCKS					
1.	336.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 3(a) P.No: 1)	2117.50	P%0 Cft	711.00
2.	336.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	119.00

Continued.....

3.	336.00	Extra for every 50" ft additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P% Cft	1693.00
4.	110.88	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P% Cft	10441.00
5.	84.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P% Cft	12121.00
6.	21.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI. No: 19 Page No: 18)	3127.41	P% Sft	657.00
7.	24.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	6216.00
PART-03 PAVER BLOCKS					
1.	732.50	Hard Marrum or fine powdery Marrum	1800.00	P% Cft	13185.00
2.	732.50	Laying Earth Work 6" Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (b) P No: 03)	354.00	P%0 Cft	259.00
3.	966.90	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P% Cft	91046.00
4.	2930.00	P&F cement paving block flooring having size of 197x97x80(mm) of city quid cobble shape with painting having strength b/w 5000phi filling the joints with hill sand, white powder for dressing and laying in specified manner /patter and design i/c L.C etc. complete (SI No: 72 P-49)	199.77	P. Sft.	585326.00
5.	60.80	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.6 P.No.16).Ratio 1:2:4	14429.25	P% Cft	8773.00
6.	56.25	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	6721.00
7.	20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 100mm Pipe 4" dia	136.00	P. Rft	2720.00
8.	20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 150mm Pipe 6" dia	259.00	P. Rft	5180.00
TOTAL S.B					808,598

Amount Total (a)

.....% above / below on the rates of CSR.

**Amount to be added / deducted on the basis
Of premium quoted**

Total (A) = a + b in words & figure

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

Draft Bidding documents for works up to Millions

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: CONSTT: OF SURFACE DRAINS C.C BLOCK & PAVER BLOCK FROM HAKEEM NAZEER TUNIO TO H/O IQBAL MALLAH WARD NO: 08 TALUKA GAMBAT
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10, 00,000. 00
- e) Amount of Bid Security: 30,000. 00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- i) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- l) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: (in words & figures) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES**(A) Description and rate of based on composite schedule of Rates**

ITEM NO:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	769.50	Dismantling and removing road metaling (CSI No: 51 Page No: 13)	605.00	P% Cft	4655
2.	271.00	Dismantling Cement concrete Plain (CSI No: 19 (b) Page No: 11)	3327.50	P% Cft	9018
3.	112.50	Dismantling brick work lime or cement mortar (CSI, 13 Page No: 10)	1285.63	P% Cft	1446
4.	1915.08	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	6083
5.	553.85	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	62523
6.	1222.50	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	146069
7.	T-A 490.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	46060
8.	T-B 260.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	45240
9.	1796.60	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b), P.No.38).	2283.93	P% Sft	41033
10.	72.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	24264
11.	2.893	Fabrication of M.S Reinforcement for C.C. I/c cutting bending lying in position making joints and fastening I/c cost of binding wire also I/c removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.20	P. Cwt	14469
PART-02 C.C BLOCKS					
1.	656.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 3(a) P.No: 1)	2117.50	P%0 Cft	1389
2.	656.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	232

Continued.....

3.	656.00	Extra for every 50" ft additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P%0 Cft	3306
4.	216.48	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	20384
5.	164.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P%Cft	23664
6.	41.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI, No: 19 Page No: 18)	3127.41	P% Sft	1282
7.	16.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	4144
PART-03 PAVER BLOCKS					
1.	305.00	Hard Marrum or fine powdery Marrum	1800.00	P% Cft	5490
2.	305.00	Laying Earth Work 6" Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (b) P No: 03)	354.00	P%0 Cft	108
3.	402.60	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	37910
4.	1220.00	P&F cement paving block flooring having size of 197x97x80(mm) of city/quid cobble shape with painting having strength b/w 500phi filling the joints with hill sand, white powder for dressing and laying in specified manner /patter and design i/c L.C etc. complete (SI No: 72 P-49)	199.77	P. Sft.	243719
5.	2532	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.6 P.No.16).Ratio 1:2:4	14429.25	P% Cft	3653
6.	112.50	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	13442
7.	10.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 100mm Pipe 4" dia	136.00	P.Rft	1360
8.	10.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 150mm Pipe 6" dia	259.00	P.Rft	2590
TOTAL S.B					763,533

Amount Total (a)

.....% above / below on the rates of CSR.

**Amount to be added / deducted on the basis
Of premium quoted**

Total (A) = a + b in words & figure

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

Draft Bidding documents for works up to Millions

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: CONSTT: OF SURFACE DRAINS C.C BLOCK & PAVER BLOCK FROM TELEPHONE EXCHANGE ROAD TO SHOP OF SHABIR MANGI WARD NO: 08 TALUKA GAMBAT
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10, 00,000. 00
- e) Amount of Bid Security: 30,000. 00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- i) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- l) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: (in words & figures) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES**(A) Description and rate of based on composite schedule of Rates**

ITEM NO:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	274.63	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	872.00
2.	79.75	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	9003.00
3.	168.75	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	20163.00
4.	T-A 50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	4700.00
5.	T-B 50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	8700.00
6.	242.00	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b), P.No.58).	2283.93	P% Sft	5527.00
7.	24.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	8088.00
8.	0.964	Fabrication of M.S Reinforcement for C.C. I/c cutting bending lying in position making joints and fastening i/c cost of binding wire also i/c removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.20	P. Cwt	4823.00
9.	6.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	1554.00
PART-02 C.C BLOCKS					
1.	336.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 3(a) P.No: 1)	2117.50	P%0 Cft	711.00
2.	336.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	119.00

Continued.....

3.	336.00	Extra for every 50" ft additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P%0 Cft	1693.00
4.	110.88	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	10441.00
5.	84.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P%Cft	12121.00
6.	21.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI, No: 19 Page No: 18)	3127.41	P% Sft	657.00
7.	24.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	6216.00
PART-03 PAVER BLOCKS					
1.	732.50	Hard Marrum or fine powdery Marrum	1800.00	P% Cft	13185.00
2.	732.50	Laying Earth Work 6" Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (b) P No: 03)	354.00	P%0 Cft	259.00
3.	966.90	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	91046.00
4.	2930.00	P&F cement paving block flooring having size of 197x97x80(mm) of city/quid cobble shape with painting having strength b/w 5000phi filling the joints with hill sand, white powder for dressing and laying in specified manner patter and design i/c L.C etc. complete (SI No: 72 P-49)	199.77	P. Sft.	585326.00
5.	60.80	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.6 P.No.16).Ratio 1:2:4	14429.25	P% Cft	8773.00
6.	56.25	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	6721.00
7.	20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 100mm Pipe 4" dia	136.00	P.Rft	2720.00
8.	20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 150mm Pipe 6" dia	259.00	P.Rft	5180.00
TOTAL S.B					808,598

Amount Total (a)

.....% above / below on the rates of CSR.

Amount to be added / deducted on the basis
Of premium quoted

Total (A) = a + b in words & figure

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: CONSTT: OF SURFACE DRAINS C.C BLOCK & PAVER BLOCK FROM HAJI SHAH TO DARGAH HAFIZ SHAH ~~WARD NO=07~~ TALUKA GAMBAT
Soomra mohalla
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10, 00,000. 00
- e) Amount of Bid Security: 30,000. 00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- i) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- L) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: (in words & figures) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES

(A) Description and rate of based on composite schedule of Rates

ITEM NO:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	274.63	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	872.00
2.	79.75	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	9003.00
3.	168.75	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	20163.00
4.	T-A 50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	4700.00
5.	T-B 50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	8700.00
6.	242.00	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b), P.No.58).	2283.93	P% Sft	5527.00
7.	24.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	8088.00
8.	0.964	Fabrication of M.S Reinforcement for C.C. I/c cutting bending lying in position making joints and fastening I/c cost of binding wire also I/c removal of rust from bars. (CSI.No. (ii). P.No.20).	4820.20	P. Cwt	4823.00
9.	6.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	1554.00
PART-02 C.C BLOCKS					
1.	336.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 3(a) P.No: 1)	2117.50	P%0 Cft	711.00
2.	336.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	119.00

Continued.....

3.	336.00	Extra for every 50" ft additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P% Cft	1693.00
4.	110.88	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P% Cft	10441.00
5.	84.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P% Cft	12121.00
6.	21.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI. No: 19 Page No: 18)	3127.41	P% Sft	657.00
7.	24.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	6216.00
PART-03 PAYER BLOCKS					
1.	732.50	Hard Marrum or fine powdery Marrum	1800.00	P% Cft	13185.00
2.	732.50	Laying Earth Work 6" Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (b) P No: 03)	354.00	P%0 Cft	259.00
3.	966.90	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P% Cft	91046.00
4.	2930.00	P&F cement paving block flooring having size of 197x97x80(mm) of city/quid cobble shape with painting having strength b/w 5000psi filling the joints with hill sand, white powder for dressing and laying in specified manner patter and design i/c L.C etc. complete (SI No: 72 P-49)	199.77	P. Sft.	585326.00
5.	60.80	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.6 P.No.16).Ratio 1:2:4	14429.25	P% Cft	8773.00
6.	56.25	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	6721.00
7.	20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 100mm Pipe 4" dia	136.00	P.Rft	2720.00
8.	20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 150mm Pipe 6" dia	259.00	P.Rft	5180.00
TOTAL S.B					808,598

Amount Total (a)

.....% above / below on the rates of CSR.

**Amount to be added / deducted on the basis
Of premium quoted**

Total (A) = a + b in words & figure

CONTRACTOR

EXECUTIVE ENGINEER A PROCURING AGENCY

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: CONSTT: OF SURFACE DRAINS C.C BLOCK & PAVER BLOCK FROM H/O GHOUS ALI SHAH BUKHARI TO ALI MUHAMMAD SAHITO WARD NO: 06 TALUKA GAMBAT
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10, 00,000. 00
- e) Amount of Bid Security: 30,000. 00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: 7%
- h) Percentage, if any, to be deducted from bills: 1-Tax 7.5%
- i) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- l) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: (in words & figures) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES**(A) Description and rate of based on composite schedule of Rates**

ITEM NO:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	769.50	Dismantling and removing road metaling (CSI No: 51 Page No: 13)	605.00	P% Cft	4655
2.	271.00	Dismantling Cement concrete Plain (CSI No: 19 (b) Page No: 11)	3327.50	P% Cft	9018
3.	112.50	Dismantling brick work lime or cement mortar (CSI, 13 Page No: 10)	1285.63	P% Cft	1446
4.	1915.08	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	6083
5.	553.85	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	62523
6.	1222.50	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	146069
7.	T-A 490.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	46060
8.	T-B 260.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	45240
9.	1796.60	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b), P.No.58).	2283.93	P% Sft	41033
10.	72.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	24264
11.	2.893	Fabrication of M.S Reinforcement for C.C. i/c cutting bending lying in position making joints and fastening i/c cost of binding wire also i/c removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.20	P. Cwt	14469
PART-02 C.C BLOCKS					
1.	656.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 3(a) P.No: 1)	2117.50	P%0 Cft	1389
2.	656.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	232

Continued.....

3.	656.00	Extra for every 50" ft additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P%0 Cft	3306
4.	216.48	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	20384
5.	164.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P%Cft	23664
6.	41.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI, No: 19 Page No: 18)	3127.41	P% Sft	1282
7.	16.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	4144
PART-03 PAVER BLOCKS					
1.	305.00	Hard Marrum or fine powdery Marrum	1800.00	P% Cft	5490
2.	305.00	Laying Earth Work 6" Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (b) P No: 03)	354.00	P%0 Cft	108
3.	402.60	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	37910
4.	1220.00	P&F cement paving block flooring having size of 197x97x80(mm) of city/quid cobble shape with painting having strength b/w 5000phi filling the joints with hill sand, white powder for dressing and laying in specified manner patter and design i/c L.C etc. complete (SI No: 72 P-49)	199.77	P. Sft.	243719
5.	2532	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.6 P.No.16).Ratio 1:2:4	14429.25	P% Cft	3653
6.	112.50	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	13442
7.	10.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 100mm Pipe 4" dia	136.00	P.Rft	1360
8.	10.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 150mm Pipe 6" dia	259.00	P.Rft	2590
TOTAL S.B					763,533

Amount Total (a)

.....% above / below on the rates of CSR.

**Amount to be added / deducted on the basis
Of premium quoted**

Total (A) = a - b in words & figure

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

Sindh Public Procurement Regulatory Authority www.pprasindh.gov.pk

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: CONSTT: OF SURFACE DRAINS C.C BLOCK & PAVER BLOCK FROM DARGAH GHIOUSAIA GAMBAT TO ABUL WAH WARD NO: 07 TALUKA GAMBAT
Peer Muhalla
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10, 00,000. 00
- e) Amount of Bid Security: 30,000. 00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- I) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- L) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: (in words & figures) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES**(A) Description and rate of based on composite schedule of Rates**

ITEM NO:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	274.63	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	872.00
2.	79.75	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	9003.00
3.	168.75	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	20163.00
4.	T-A 50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	4700.00
5.	T-B 50.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	8700.00
6.	242.00	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b), P.No.58).	2283.93	P% Sft	5527.00
7.	24.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	8088.00
8.	0.964	Fabrication of M.S Reinforcement for C.C. I/c cutting bending lying in position making joints and fastening i/c cost of binding wire also i/c removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.20	P. Cwt	4823.00
9.	6.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	1554.00
PART-02 C.C BLOCKS					
1.	336.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 3(a) P.No: 1)	2117.50	P%0 Cft	711.00
2.	336.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	119.00

Continued.....

3.	336.00	Extra for every 50" ft additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P%0 Cft	1693.00
4.	110.88	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	10441.00
5.	84.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P%Cft	12121.00
6.	21.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI, No: 19 Page No: 18)	3127.41	P% Sft	657.00
7.	24.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	6216.00
PART-03 PAVER BLOCKS					
1.	732.50	Hard Marrum or fine powdery Marrum	1800.00	P% Cft	13185.00
2.	732.50	Laying Earth Work 6" Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (b) P No: 03)	354.00	P%0 Cft	259.00
3.	966.90	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	91046.00
4.	2930.00	P&F cement paving block flooring having size of 197x97x80(mm) of city/quid cobble shape with painting having strength b/w 5000phi filling the joints with hill sand, white powder for dressing and laying in specified manner patter and design i/c L.C etc. complete (SI No: 72 P-49)	199.77	P. Sft.	585326.00
5.	60.80	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.6 P.No.16).Ratio 1:2:4	14429.25	P% Cft	8773.00
6.	56.25	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	6721.00
7.	20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 100mm Pipe 4" dia	136.00	P.Rft	2720.00
8.	20.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 150mm Pipe 6" dia	259.00	P.Rft	5180.00
TOTAL S.B					808,598

Amount Total (a)

.....% above / below on the rates of CSR.

Amount to be added / deducted on the basis
Of premium quoted

Total (A) = a + b in words & figure

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: CONSTT: OF SURFACE DRAINS C.C BLOCK & PAVER BLOCK FROM ABDUL SATTAR MARI TO MUHKUMDIN MARI ~~XARB-20-200~~ TALUKA GAMBAT DISTT; KHAIRPUR
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10, 00,000. 00
- e) Amount of Bid Security: 30,000. 00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- I) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- l) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: (in words & figures) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES

(A) Description and rate of based on composite schedule of Rates

ITEM NO:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	769.50	Dismantling and removing road metaling (CSI No: 51 Page No: 13)	605.00	P% Cft	4655
2.	271.00	Dismantling Cement concrete Plain (CSI No: 19 (b) Page No: 11)	3327.50	P% Cft	9018
3.	112.50	Dismantling brick work lime or cement mortar (CSI, 13 Page No: 10)	1285.63	P% Cft	1446
4.	1915.08	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	6083
5.	553.85	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	62523
6.	1222.50	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	146069
7.	T-A 490.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	46060
8.	T-B 260.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	45240
9.	1796.60	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b), P.No.58).	2283.93	P% Sft	41033
10.	72.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	24264
11.	2.893	Fabrication of M.S Reinforcement for C.C. I/c cutting bending lying in position making joints and fastening i/c cost of binding wire also i/c removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.20	P. Cwt	14469
PART-02 C.C BLOCKS					
1.	656.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 3(a) P.No: 1)	2117.50	P%0 Cft	1389
2.	656.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	232

Continued.....

31 *	656.00	Extra for every 50" ft additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P%0 Cft	3306
4.	216.48	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	20384
5.	164.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P%Cft	23664
6.	41.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI, No: 19 Page No: 18)	3127.41	P% Sft	1282
7.	16.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	4144
PART-03 PAVER BLOCKS					
1.	305.00	Hard Marrum or fine powdery Marrum	1800.00	P% Cft	5490
2.	305.00	Laying Earth Work 6" Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (b) P No: 03)	354.00	P%0 Cft	108
3.	402.60	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	37910
4.	1220.00	P&F cement paving block flooring having size of 197x97x80(mm) of city/quid cobble shape with painting having strength b/w 5000phi filling the joints with hill sand, white powder for dressing and laying in specified manner patter and design i/c L.C etc. complete (SI No: 72 P-49)	199.77	P. Sft.	243719
5.	2532	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.6 P.No.16).Ratio 1:2:4	14429.25	P% Cft	3653
6.	112.50	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	13442
7.	10.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 100mm Pipe 4" dia	136.00	P.Rft	1360
8.	10.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 150mm Pipe 6" dia	259.00	P.Rft	2590
TOTAL S.B					763,533

Amount Total (a)

.....% above / below on the rates of CSR.

**Amount to be added / deducted on the basis
Of premium quoted**

Total (A) = a + b in words & figure

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: CONSTT: OF SURFACE DRAINS C.C BLOCK & PAVER BLOCK FROM NISAR BHATTI TO HAJI AMEER ALI BHATTI VILLAGE SHAH TAKIYO WARD NO: 06 TALUKA GAMBAT
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10, 00,000. 00
- e) Amount of Bid Security: 30,000. 00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- i) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- l) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: (in words & figures) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES

(A) Description and rate of based on composite schedule of Rates

ITEM NO:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	769.50	Dismantling and removing road metaling (CSI No: 51 Page No: 13)	605.00	P% Cft	4655
2.	271.00	Dismantling Cement concrete Plain (CSI No: 19 (b) Page No: 11)	3327.50	P% Cft	9018
3.	112.50	Dismantling brick work lime or cement mortar (CSI, 13 Page No: 10)	1285.63	P% Cft	1446
4.	1915.08	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	6083
5.	553.85	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P%0 Cft	62523
6.	1222.50	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	146069
7.	T-A 490.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	46060
8.	T-B 260.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	45240
9.	1796.60	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b), P.No.58).	2283.93	P% Sft	41033
10.	72.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	24264
11.	2.893	Fabrication of M.S Reinforcement for C.C. i/c cutting bending lying in position making joints and fastening i/c cost of binding wire also i/c removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.20	P. Cwt	14469
PART-02 C.C BLOCKS					
1.	656.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 3(a) P.No: 1)	2117.50	P%0 Cft	1389
2.	656.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	232

Continued.....

	656.00	Extra for every 50" ft additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P%0 Cft	3306
4.	216.48	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	20384
5.	164.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P%Cft	23664
6.	41.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI, No: 19 Page No: 18)	3127.41	P% Sft	1282
7.	16.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	4144
PART-03 PAVER BLOCKS					
1.	305.00	Hard Marrum or fine powdery Marrum	1800.00	P% Cft	5490
2.	305.00	Laying Earth Work 6" Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (b) P No: 03)	354.00	P%0 Cft	108
3.	402.60	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	37910
4.	1220.00	P&F cement paving block flooring having size of 197x97x80(mm) of city/quid cobble shape with painting having strength b/w 5000phi filling the joints with hill sand, white powder for dressing and laying in specified manner patter and design i/c L.C etc. complete (SI No: 72 P-49)	199.77	P. Sft.	243719
5.	2532	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.6 P.No.16).Ratio 1:2:4	14429.25	P% Cft	3653
6.	112.50	Pacea brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	13442
7.	10.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 100mm Pipe 4" dia	136.00	P.Rft	1360
8.	10.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 150mm Pipe 6" dia	259.00	P.Rft	2590
TOTAL S.B					763,533

Amount Total (a)

.....% above / below on the rates of CSR.

**Amount to be added / deducted on the basis
Of premium quoted**

Total (A) = a + b in words & figure

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

Sindh Public Procurement Regulatory Authority www.pprasinhd.gov.pk

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: CONSTT: OF SURFACE DRAINS C.C BLOCK & PAVER BLOCK FROM ZULFIQUAR NAQVI MADERSA TO H/O MULAN KALAN MEHRAN COLONY WARD NO: 05 TALUKA GAMBAT
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10,00,000.00
- e) Amount of Bid Security: 30,000.00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- i) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- l) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: (in words & figures) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES

(A) Description and rate of based on composite schedule of Rates

ITEM NO:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	769.50	Dismantling and removing road metaling (CSI No: 51 Page No: 13)	605.00	P% Cft	4655
2.	271.00	Dismantling Cement concrete Plain (CSI No: 19 (b) Page No: 11)	3327.50	P% Cft	9018
3.	112.50	Dismantling brick work lime or cement mortar (CSI, 13 Page No: 10)	1285.63	P% Cft	1446
4.	1915.08	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	6083
5.	553.85	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	62523
6.	1222.50	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	146069
7.	T-A 490.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	46060
8.	T-B 260.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	45240
9.	1796.60	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b), P.No.58).	2283.93	P% Sft	41033
10.	72.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	24264
11.	2.893	Fabrication of M.S Reinforcement for C.C. i/c cutting bending lying in position making joints and fastening i/c cost of binding wire also i/c removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.20	P. Cwt	14469
PART-02 C.C BLOCKS					
1.	656.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 3(a) P.No: 1)	2117.50	P%0 Cft	1389
2.	656.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	232

Continued.....

3.	656.00	Extra for every 50" ft additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P%0 Cft	3306
4.	216.48	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	20384
5.	164.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P%Cft	23664
6.	41.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI, No: 19 Page No: 18)	3127.41	P% Sft	1282
7.	16.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	4144
PART-03 PAVER BLOCKS					
1.	305.00	Hard Marrum or fine powdery Marrum	1800.00	P% Cft	5490
2.	305.00	Laying Earth Work 6" Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (b) P No: 03)	354.00	P%0 Cft	108
3.	402.60	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	37910
4.	1220.00	P&F cement paving block flooring having size of 197x97x80(mm) of city/quid cobble shape with painting having strength b/w 5000phi filling the joints with hill sand, white powder for dressing and laying in specified manner patter and design i/c L.C etc. complete (SI No: 72 P-49)	199.77	P. Sft.	243719
5.	2532	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.6 P.No.16).Ratio 1:2:4	14429.25	P% Cft	3653
6.	112.50	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	13442
7.	10.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 100mm Pipe 4" dia	136.00	P.Rft	1360
8.	10.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 150mm Pipe 6" dia	259.00	P.Rft	2590
TOTAL S.B					763,533

Amount Total (a)

.....% above / below on the rates of CSR.

**Amount to be added / deducted on the basis
Of premium quoted**

Total (A) = a + b in words & figure

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: CONSTT: OF SURFACE DRAINS C.C BLOCK & PAVER BLOCK FROM H/O INAYAT PHUL TO H/O GHULAM SARWAR PHUL ~~WBRP AC-200~~ TALUKA GAMBAT
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10, 00,000. 00
- e) Amount of Bid Security: 30,000. 00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- i) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- l) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: (in words & figures) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES

(A) Description and rate of based on composite schedule of Rates

ITEM No:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	769.50	Dismantling and removing road metaling (CSI No: 51 Page No: 13)	605.00	P% Cft	4655
2.	271.00	Dismantling Cement concrete Plain (CSI No: 19 (b) Page No: 11)	3327.50	P% Cft	9018
3.	112.50	Dismantling brick work lime or cement mortar (CSI, 13 Page No: 10)	1285.63	P% Cft	1446
4.	1915.08	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	6083
5.	553.85	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	62523
6.	1222.50	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	146069
7.	T-A 490.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	46060
8.	T-B 260.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	45240
9.	1796.60	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b), P.No.58).	2283.93	P% Sft	41033
10.	72.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	24264
11.	2.893	Fabrication of M.S Reinforcement for C.C. i/c cutting bending lying in position making joints and fastening i/c cost of binding wire also i/c removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.20	P. Cwt	14469
PART-02 C.C BLOCKS					
1.	656.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 3(a) P.No: 1)	2117.50	P%0 Cft	1389
2.	656.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	232

Continued.....

3.	656.00	Extra for every 50" ft additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P%0 Cft	3306
4.	216.48	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	20384
5.	164.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P%Cft	23664
6.	41.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI. No: 19 Page No: 18)	3127.41	P% Sft	1282
7.	16.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	4144
PART-03 PAVER BLOCKS					
1.	305.00	Hard Marrum or fine powdery Marrum	1800.00	P% Cft	5490
2.	305.00	Laying Earth Work 6" Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (b) P No: 03)	354.00	P%0 Cft	108
3.	402.60	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	37910
4.	1220.00	P&F cement paving block flooring having size of 197x97x80(mm) of city/quid cobble shape with painting having strength b/w 5000phi filling the joints with hill sand, white powder for dressing and laying in specified manner /patter and design i/c L.C etc. complete (SI No: 72 P-49)	199.77	P. Sft.	243719
5.	2532	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.6 P.No.16).Ratio 1:2:4	14429.25	P% Cft	3653
6.	112.50	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	13442
7.	10.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 100mm Pipe 4" dia	136.00	P.Rft	1360
8.	10.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 150mm Pipe 6" dia	259.00	P.Rft	2590
TOTAL S.B					763,533

Amount Total (a)

.....% above / below on the rates of CSR.

**Amount to be added / deducted on the basis
Of premium quoted**

Total (A) = a + b in words & figure

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

BIDDING DATA

(This section should be filled in by the Engineer / Procuring Agency before issuance of the Bidding Documents)

- a) Name of Procuring Agency: MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- b) Brief Description of Works: CONSTT: OF SURFACE DRAINS C.C BLOCK & PAVER BLOCK @BISHARAT COLONY WARD NO: 05 TALUKA GAMBAT
- c) Procuring Agencies Address: OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT DISTRICT KHAIRPUR MIR'S
- d) Estimated Cost: 10,00,000.00
- e) Amount of Bid Security: 30,000.00
- f) Period of Bid validity (days): (90 Days)
- g) Security Deposit: 7%
- h) Percentage, if any, to be deducted from bills: I-Tax 7.5%
- I) Deadline from submission of bids along with time: _____
- j) Venue, Tim & date of Bid Opening: @OFFICE OF THE CHAIRMAN MUNICIPAL COMMITTEE GAMBAT OFFICE
- k) Time for completion from written order of commence: 12 Months
- L) Liquidity Damages: N/A
- M) Deposit receipt No: Date Amount: (in words & figures) N/A

(Executive Engineer / Authority Issuing Bidding Documents)

BILL OF QUANTITIES

(A) Description and rate of based on composite schedule of Rates

ITEM NO:	QTY.	DESCRIPTION OF ITEM TO BE EXECUTED AT SITE AT SITE	RATE	UNIT	AMOUNT IN RUPEES
PART-01 SURFACE DRAINS					
1.	769.50	Dismantling and removing road metaling (CSI No: 51 Page No: 13)	605.00	P% Cft	4655
2.	271.00	Dismantling Cement concrete Plain (CSI No: 19 (b) Page No: 11)	3327.50	P% Cft	9018
3.	112.50	Dismantling brick work lime or cement mortar (CSI, 13 Page No: 10)	1285.63	P% Cft	1446
4.	1915.08	Excavation in foundation building bridges and other structures i/c dig belling dressing refilling around structures with excavated earth watering rimming lead up to on chain and lift up to 5' ft. (CSI.No.18,P.No.4)	3176.25	P%0 Cft	6083
5.	553.85	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.18).Ratio 1:4:8	11288.75	P% Cft	62523
6.	1222.50	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	146069
7.	T-A 490.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	94.00	P. Rft	46060
8.	T-B 260.00	Construction of Standard of open Drains curette block of cement concrete 1:2:4 in situ to design to profile i/c cost of mould as per drawing i/c applying flouting coat of cement 1/32" thick to the exposed face finished smooth curing etc complete as per detail drawing (PHSI No: DP No: 44)	174.00	P. Rft	45240
9.	1796.60	Cement plaster (1:4) up to 20' height 1/2" thick. (CSI.No.11 (b), P.No.58).	2283.93	P% Sft	41033
10.	72.00	RCC work in roof slab beams columns rafts lintels and other structural members laid in site or precuts laid in position complete in all respect. (CSI.No.6 (a), P.No.19).	337.00	P. Cft	24264
11.	2.893	Fabrication of M.S Reinforcement for C.C. I/c cutting bending lying in position making joints and fastening I/c cost of binding wire also I/c removal of rust from bars. (CSI.No. (ii), P.No.20).	4820.20	P. Cwt	14469
PART-02 C.C BLOCKS					
1.	656.00	Barrow pit excavation undressed lead up to 100ft: in ordinary soil (CSI No: 3(a) P.No: 1)	2117.50	P%0 Cft	1389
2.	656.00	Earth Work compaction (soft ordinary or hard soil) laying earth in 6" layer and dressing etc complete (CSI No: 13 Page No: 03)	354.00	P%0 Cft	232

Continued.....

3.	656.00	Extra for every 50" ft additional lead or part thereof (CSI No: 8 (a) Page No: 03)	5039.00	P%0 Cft	3306
4.	216.48	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	20384
5.	164.00	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.5 P.No.17).Ratio 1:2:4	14429.25	P%Cft	23664
6.	41.00	Erection and removal of centering for RCC of Plain C.C portal Wool (CSI, No: 19 Page No: 18)	3127.41	P% Sft	1282
7.	16.00	Providing laying UPVC Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) Pipe 6" dia	259.00	P. Rft	4144
PART-03 PAVER BLOCKS					
1.	305.00	Hard Marrum or fine powdery Marrum	1800.00	P% Cft	5490
2.	305.00	Laying Earth Work 6" Layer leveling dressings and watering for compression etc complete (CSI NO : 13 (b) P No: 03)	354.00	P%0 Cft	108
3.	402.60	Cement Concrete Bricks or Stone ballast 1-1/2" 2" Gauge (CSI.No.4 P.No.17).Ratio 1:4:8	9416.28	P%Cft	37910
4.	1220.00	P&F cement paving block flooring having size of 197x97x80(mm) of city/quid cobble shape with painting having strength b/w 5000phi filling the joints with hill sand, white powder for dressing and laying in specified manner patter and design i/c L.C etc. complete (SI No: 72 P-49)	199.77	P. Sft.	243719
5.	2532	Cement concrete plain i/c placing compacting finishing and curing complete i/c screening and washing of stone aggregate without Shuttering. (CSI.No.6 P.No.16).Ratio 1:2:4	14429.25	P% Cft	3653
6.	112.50	Pacca brick work in foundation and plinth in cement Mortar 1:6 (CSI.No.4 P.No.25).	11948.36	P% Cft	13442
7.	10.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 100mm Pipe 4" dia	136.00	P.Rft	1360
8.	10.00	Providing laying U.P.V.C Pipe of class "B" fixing in trench including cutting, fitting and jointing with solvent cement i/c testing with water to a head of 61 meter of 200ft. (CSI.No. 04 P.No. 23) 150mm Pipe 6" dia	259.00	P.Rft	2590
TOTAL S.B					763,533

Amount Total (a)

.....% above / below on the rates of CSR.

**Amount to be added / deducted on the basis
Of premium quoted**

Total (A) = a + b in words & figure

CONTRACTOR

EXECUTIVE ENGINEER / PROCURING AGENCY

Sindh Public Procurement Regulatory Authority www.pprasingh.gov.pk