



NO.XEN/MA/TC/SINDH 458

GOVERNMENT OF SINDH

OFFICE OF THE EXECUTIVE ENGINEER, SINDH

Barrack No 12 Sindh Secretariats 4A, Karachi

Karachi dated: 21-5-2018

NOTICE INVITING TERDER

Sealed Bid in single envelopes method from all the interested Bidders under SPPRA Rules 2010 who meet the following qualification criteria:

- i. List of similar assignments with cost (at least three) under-taken over the past 2 years.
- ii. Details of machinery and equipments to carry out the work owned by the Bidders.
- iii. Financial statements (summary) and income tax return for the last 2 years.
- iv. List of litigation (if any) and nature of litigation.
- v. Affidavit that the firm has never been black listed.
- vi. In case of PEC registration, only PEC certificate and NTN are required.
- vii. Electrical License is required.
- viii. SRB Registration is required.

The tender documents should accompany the 2% earnest money of the estimated cost mentioned in the list in the shape of pay order or call deposit form any of the scheduled Banks duly pledged to the undersigned.

The estimates, drawing, design and specifications can be seen /obtained on any working day during the office hours.

Bank tender documents can be obtained from the office of the undersigned on payment of cost of tender (not refundable) via pay order as mentioned in the list on any working day during the office hours up to from date 21-05-2018 up to (11.00 AM) up to 06-06-2018. The same will be received back in sealed envelope on dated 06 - 06 -2018 up to (12:30 PM) and the same will be opened on the same day at 02:00(P.M) in presence of the intending contractors or their authorized representative who may like to be present. The un-responded tenders will be issued on 09-06-2018 up to 25-06-2018 up to (11.00 AM) received and open at 25-06-2018 at 1.30pm respectively.

Contractors are bound to quote workable rates, failing which they will be blacklisted in future tendering.

The conditional tenders will not be accepted and the procuring Agency may reject all if any bids subject to the relevant provisions of the SPPRA Rules.

The successful contractors whose tenders are accepted will have to obtain adhesive stamps from Assistant Superintendent Stamps, Government of Sindh, and Karachi on payment of Stamps fees according to Schedule prescribed in the Sixth Finance Act 1996 amended rule 2003 and sign the agreement.

S.No	Name of Work	Estt Cost	Tender Fee	Complication Time
1	Construction/Rasing of Compound Wall, flooring, Satsang Hall (2 Nos), lavatory Block, Underground Tank at Dargha Pir Pithoro sahib Taluka pir pithoro at umerkot (Electric Work)	1.00	1000/-	15 days after completion of civil work
2	Construction of flooring, lavatory Blocks, Electrification at Rama peer Mandir @ Tando Allahyar City.(Electric work)	1.00	1000/-	-Do-
3	Construction of Jain DharamMandir Village Godi Taluka Nagarparkar District Tharpakar (Conservation) .(Electric work)	1.00	1000/-	-Do-
4	Construction of Satsang Hall (2 Nos) 8 Nos Lavatory Block resing of Compound Wall and Drainage of Khaan .(Electric work)	1.00	1000/-	-Do-
5	Construction of Monument including shed washroom for Male/ Female and Envicrete Flooraing at Bearer Place of Umer Rooplo Kolhi at Nangarparkar (Electric Work)	1.00	1000/-	-Do-

SPPRA INWARD DIARY

NO :

DATED :

9229
21-05-2018

6	Construction of Satsang Hall and compound wall at Pooj Shri Mami Dev (Mitho Pir) at Makli.(Electric work)	1.00	1000/	-Do-
7	Construction of Satsang Hall in Kandyari .(Electric work)	1.00	1000/	-Do-
8	Repair /Renovation re- Construction of Satsang Hall Shed Lavatory Block and wall and Flooring Filling etc of Bhagat Hardas Astan Taluka Mithi and Construction of Satsang Hall at Mehraj paro village Chelhar Taluka Mithi (Electric Work)	1.00	1000/	-Do-
9	Renovation of Guru Balpuri Astan near Thana Ahmed Khan Taluka Thana Bula Khan District Jamshoro (Part A Hall (Electric Work)	1.00	1000/	-Do-
10	Renovation of Guru Balpuri Aastan near Thana Ahmed Taluka Thana Bula Khan District Jamshoro (Part B External Development)	1.00	1000/	-Do-
11	Renovation of Guru Balpuri Aastan near Thana Ahmed Taluka Thana Bula Khan District Jamshoro (Part C Bath Room)	1.00	1000/	-Do-
12	Renovation & External Development of shri Mangal Gir Ashram Thana Bula khan District Jamshoro	1.00	1000/	-Do-
13	Repair/Renovation & Construction of Anand Nawaz Darbar Thana Bula Khan City	1.00	1000/	-Do-
14	Reconstruction of Hindu Panchati Hall @ Ratedero District Larkana	1.00	1000/	-Do-
15	Repair/Renovation & Reconstruction of Akshan Satsang Hall @ District Sanghar	1.00	1000/	-Do-
16	Construction of Satsang Hall at Wado Hasabo UC Thana Ahmed Khan District Jamshoro	1.00	1000/	-Do-
17	Construction of Lavatory Blocks for yatrics @ Shr Duga Devi Mandir Near Abdullah Shah Ashabi Dargah Thatta	1.00	1000/	-Do-
18	Construction of Satsang Hall at Mandir Odero lal d\station District Matiari	1.00	1000/	-Do-
19	Construction of Satsang Hall wisham Das Darbar @ Babarloi City Taluka Khairpus Mir's	1.00	1000/	-Do-
20	Repair/Renovation/Reconstruction of satsang Hall @ Naserabad Larkana	1.00	1000/	-Do-
21	Construction of Compound wall @ Maloo pir Dargah Taluka Thana Bula Khan District Jamshoro	1.00	1000/	-Do-
22	Construction of Maharaj vikram Sharma & Repair of saint swami at Taluka Thana Bula khan District Jamshoro	1.00	1000/	-Do-
23	Repair/Renovation/Reconstruction of Gaushalla Larkana	1.00	1000/	-Do-
24	Repair/Renovation/Reconstruction of Shamshan Ghat (Massan) @ Larkana	1.00	1000/	-Do-


 EXECUTIVE ENGINEER
 MINORITIES AFFAIRS, SINDH

**GOVERNMENT OF SINDH
MINORITIES AFFAIRS DEPARTMENT**

Karachi dated 27 February, 2018

NOTIFICATION

No.SO(G)MA//2018: 785 In pursuance of Rule-7, SPPR 2010, a Procurement Committee comprising of the following officers is hereby constituted to open the tenders in respect of Development Schemes of this department out of Annual Development Program and other development works to be undertaken out of Grant-in-Aid for conservation and procurement of physical assets of Minorities Affairs Department during current financial year 2017-18.

- | | |
|---|--------|
| 1. Executive Engineer, Minorities Affairs, Sindh. | Head |
| 2. Assistant Engineer (Headquarters) | Member |
| 3. Assistant Engineer Civil (South)
Karachi Metropolitan Corporation | Member |

The Functions and responsibilities of the Committee:

1. Preparing Bidding documents
2. Carrying out Technical as well as financial evaluation of the bids
3. Preparing evaluation report as provided in rule 45.
4. Making recommendations of the award of contract to the competent authority.
5. Perform any other function ancillary and incidental to the above.

**TAMEEZUDDIN KHERO
SECRETARY**

C c:

1. The M.D Sindh Public Procurement Regulatory Authority, Karachi
2. The Municipal Commissioner, K.M.C., Karachi.
3. The Director, Minorities Affairs Sindh, Karachi.
- ✓ 4. The P.S to Special Assistant to Chief Minister Sindh for Minorities Affairs, Karachi.
- ✓ 5. The P.S to Secretary Minorities Affairs Department, Govt. of Sindh, Karachi.
6. The office record/file.

Hajir
Section Officer (General) 27/2/18

ANNUAL PROCUREMENT PLAN FOR THE YEAR 2017-18(2. QUARTERS)

(WORKS, GOODS & SERVICE)


DEPARTMENT NAME:-

EXECUTIVE ENGINEER, MINORITIES AFFAIRS DEPARTMENT GOVERNMENT OF SINDH

S.No	Description of procurement	Quantity where Applicable	Estimated Unit Cost (Where Applicable in Million)	Fund Allocated (1000) Million	source of funds (ADP/ NON ADP)	Proposed Procurement Method	Timing of procurement				Remarks
							1st Qtr	2nd Qtr	3rd Qtr	4th Qtr	
1	Construction/Rasing of Compound Wall, flooring, Satsang Hall (2 Nos), lavatory Block, Underground Tank at Dargha Pir Pithoro sahib Taluka pir pithoro at umerkot (Electric Work)		1.000	300.000	ADP	Single Stage-one envelop	✓	✓	✓	✓	
2	Construction of flooring, lavatory Blocks, Electrification at Rana peer Mandir @ Tando Allahyar City.(Electric work)		1.000		-D0-	-D0-					
3	Construction of Jain DharamMandir Village Godi Taluka Nagarparkar District Tharpakar (Conservation) .(Electric work)		1.000		-D0-	-D0-					
4	Construction of Satsang Hall (2 Nos) 8 Nos Lavatory Block resing of Compound Wall and Drainage of Khaan .(Electric work)		1.000		-D0-	-D0-					
5	Construction of Monument including shed washroom for Male/ Female and Envicrete Flooring at Bearer Place of Umer Rooplo Kolhi at Nangarparkar (Electric Work)		1.000		-D0-	-D0-					
6	Construction of Satsang Hall and compound wall at Pooj Shri Mami Dev (Mitho Pir) at Makli.(Electric work)		1.000		-D0-	-D0-					
7	Construction of Satsang Hall in Kandiyari .(Electric work)		1.000		-D0-	-D0-					

8	Repair /Renovation re- Construction of Satsang Hall Shed Lavatory Block and wall and Flooring Filling etc of Bhagat Hardas Aastan Taluka Mithi and Construction of Satsang Hall at Mehraj paro village Chelhar Taluka Mithi (Electric Work)		1.000		-Do-	-Do-								
9	Renovation of Guru Balpuri Aastan near Thana Ahmed Khan Taluka Thana Bula Khan District Jamshoro (Part A Hall (Electric Work)		1.000		-Do-	-Do-								
10	Renovation of Guru Balpuri Aastan near Thana Ahmed Taluka Thana Bula Khan District Jamshoro (Part B External Development)		1.000		-Do-	-Do-								
11	Renovation of Guru Balpuri Aastan near Thana Ahmed Taluka Thana Bula Khan District Jamshoro (Part C Bath Room)		1.000		-Do-	-Do-								
12	Renovation & External Development of shri Mangal Gir Ashram Thana Bula Khan District Jamshoro		1.000		-Do-	-Do-								
13	Repair/Renovation & Construction of Anand Nawaz Darbar Thana Bula Khan City		1.000		-Do-	-Do-								
14	Reconstruction of Hindu Panchati Hall @ Ratero District Larkana		1.000		-Do-	-Do-								
15	Repair/Renovation & Reconstruction of Akshan Satsang Hall @ District Sanghar		1.000		-Do-	-Do-								
16	Construction of Satsang Hall at Wado Hasabo UC Thana Ahmed Khan District Jamshoro		1.000		-Do-	-Do-								
17	Construction of Lavatory Blocks for yatries @ Shr Duga Devi Mandir Near Abdallah Shah Ashabi Dargah Thatta		1.000		-Do-	-Do-								
18	Construction of Satsang Hall at Mandir Odera lal distation District Matiari		1.000		-Do-	-Do-								

19	Construction of Satsang Hall wisham Das Darbar @ Babarloi City Taluka Khairpus Mir's		1.000		-Do-	-Do-				
20	Repair/Renovation/Reconstruction of satsang Hall @ Naserabad Larkana		1.000		-Do-	-Do-				
21	Construction of Compound wall @ Maloo pir Dargah Taluka Thana Bula Khan District Jamshoro		1.000		-Do-	-Do-				
22	Construction of Maharaj vikram Sharma & Repair of saint swami at Taluka Thana Bula khan District Jamshoro		1.000		-Do-	-Do-				
23	Repair/Renovation/Reconstruction of Gausshalla Larkana		1.000		-Do-	-Do-				
24	Repair/Renovation/Reconstruction of Shamsan Ghat (Massan) @ Larkana		1.000		-Do-	-Do-				


EXECUTIVE ENGINEER
MINORITIES AFFAIRS DEPARTMENT
GOVERNMENT OF SINDH

GOVERNMENT OF SINDH
MINORITIES AFFAIRS DEPARTMENT
Karachi dated 27 February, 2018

NOTIFICATION

No.SO(G)MA/2018: 786 In pursuance of Rule-31(1) of SPPR 2010, a Grievances Redressal Committee is hereby constituted to redress the complaints with regard to procurements in respect of Development Schemes of this department out of Annual Development Program and development works to be undertaken out of Grant-in-aid for conservation and procurement of physical assets of Minorities Affairs Department during the current financial year 2017-18.

- | | |
|--|--------|
| 1. Director, Minorities Affairs Sindh, Hyderabad | Head |
| 2. Divisional Accountant, Minorities Affairs Division,
a representative of Accountant General Sindh | Member |
| 3. Assistant Engineer Civil (South)
Sindh Small Industries Corporation | Member |

TORs of the Committee are as provided under Rule-31, Sindh Public Procurement Rules, 2010. The Committee shall also perform any other function ancillary and incidental to the above.

TAMEEZUDDIN KHERO
SECRETARY

Cc:

1. The Accountant General Sindh Karachi.
2. The M.D Sindh Public Procurement Regulatory Authority, Karachi
3. The Director, Minorities Affairs Sindh, Karachi.
4. the M.D, Sindh Small Industries Corporation.
- ✓ 5. The Executive Engineer, Minorities Affairs Sindh, Karachi.
6. The P.S to Special Assistant to Chief Minister Sindh for Minorities Affairs, Karachi.
7. The P.S to Secretary Minorities Affairs Department, Govt. of Sindh, Karachi.
8. The office record/file.

Hajir
27/2/2018
Section Officer (General)

STANDARD BIDDING DOCUMENTS

FOR

Construction/Rasing of Compound Wall, flooring, Satsang Hall (2 Nos), lavartory Block, Underground Tank at Dargha Pir Pithoro sahib Taluka pir pithoro at umerkot (Electric Work)

1.00 (M)

BIDDING DATA

(This section should be filled in by the Engineer/Procuring Agency before issuance of the Bidding Documents).

(a). **Name of Procuring Agency:-** Executive Engineer, Minorities Affairs Sindh

(b). **Brief Description of Works: 01-** Construction/Rasing of Compound Wall, flooring, Satsang Hall (2 Nos), lavatory Block, Underground Tank at Dargha Pir Pithoro sahib Taluka pir pithoro at umerkot (Electric Work)

(c). **Procuring Agency's address:-** Barrack No. 12, Block 4-A, Sindh Secretariat Karachi .

(d). **Estimated Cost:** 1.00 (Million)

(e). **Amount of Bid Security:-** 2% (Fill in lump sum amount or in % age of bid amount /estimated cost, but not exceeding 5%)

):- 15 days after the completion

(f). **Period of Bid Validity: (15 days** of Civil/ Building work (Not more than sixty days).

(g). **Security Deposit :- (including bid security:-** 10%
(in % age of bid amount /estimated cost equal to 10%)

(h). **Percentage, if any, to be deducted from bills-** 8%

(i). **Deadline for Submission of Bids along with time:** 06-06-2018 upto 12:30 p.m.

(j). **Venue, Time, and Date of Bid Opening:-** Office of the Executive Engineer, Minorities Affairs Sindh Barrack No.12, Block 4-A, Sindh Secretariat on 06-06-2018 at 12:30 p.m.

(k). **Time for Completion from written order of commence: -** 15 days after the completion of Civil/ Building work

(L). **Liquidity damages:-** 0.05% per day (0.05 of Estimated Cost or Bid cost per day of delay, but total not exceeding 10%).

(m). **Deposit Receipt No: Date: Amount:(in words and figures)**

(Executive Engineer/ Authority issuing bidding documents)


Executive Engineer
Minorities Affairs Department
Government of Sindh

" Schedule B."

Name of Work:- Construction/Raising of Compound Wall, flooring, Satsang Hall (2 Nos), lavatory Block, Underground Tank at Dargha Pir Pithoro sahib Taluka pir pithoro at umerkot (Electric Work)

S.No 1

Lashaari nit 2018

S.No	Item of Work	Quantity.	Rate	Unit	Amount.
1	Wiring for light or fan point with 3/.029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required.(S.I.No. 124, Page No. 15).	34 Pts.	1130.00	P.Pt.	38420.00
2	Wiring for plug point with 3/.029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required. (S.I.No. 126 Page No. 15).	4 Pts.	985.00	P.Pt.	3940.00
3	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.029 copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 10 Page No. 2).	55.0 Mtrs.	222.00	P.Mtr.	12210.00
4	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.036 copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 11 Page No. 2).	25.00 Mtrs.	252.00	P.Mtr.	6300.00
5	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.044 (6mm ²) copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 12 Page No. 2).	20.0 Mtrs.	341.00	P.Mtr.	6820.00
6	Providing and laying (Main or sub Main)PVC insulated with size 4-7/.064 (16mm ²) copper conductor in 1-1/2" dia PVC conduit recessed in the wall or column as required. (S.I.No. 42 Page No. 2).	25.0 Mtrs.	1213.00	P.Mtr.	30325.00
7	Providing and fixing Circuit Breaker 6,10,15,20,30,40,50 & 63 Amps: SP (TB-5S) on prepared board as required.(S.I.No. 203, Page No. 31).	8 Nos	916.00	Each.	7328.00
8	Providing and fixing Circuit Breaker 3,5,10,15,20 & 30 Amps: TP (XS-30NS[NB]) on prepared board as required.(S.I.No. 205, Page No. 31).	1 Nos	5301.00	Each.	5301.00
9	Providing and fixing Circuit Breaker 3,5,10,15,20 , 30,40,50 & 60 Amps: TP (XS-30NS[NB]) on prepared board as required.(S.I.No. 206, Page No. 31).	1 Nos	5521.00	Each.	5521.00
10	P/F Circuit breaker 15,20,30,40,50,60,75 & 100 Amps: T.P. (XS-100NS) on prepared board as required.(S.I.No. 206, Page No. 31)	1 No	9261.00	Each.	9261.00
11	Providing & fixing Bakelite ceiling rose with two terminals. (S.I.No. 228, Page No. 33)	10 Nos	72.00	Each	720.00
12	Providing and Fixing Brass Battern Holder. (S.I.No. 232, Page No. 33)	10 Nos	70.00	Each	700.00
Total					126846.00
Add					% Above/Below
Total					"A"

PART "B" NON SCHEDULE ITEMS.

1	P/F Switch 5 Amps: imported Make i/c plastic board imported make etc complete.	34 Nos.		Each	
2	P/F 2 Pin 5 Amps:plug socket imported Make i/c plastic board with necessary electric connection etc complete.	4 Nos.		Each	
3	P/F fancy type 3 pin 5 Amps: S.P. plug socket switch & shoe unit imported Make with board i/c necessary connection and recessed in the wall etc, complete.	12 Nos.		Each	
4	P/F fancy type 3 pin 15 Amps: S.P. plug socket switch & shoe unit imported Make with board i/c necessary connection and recessed in the wall etc, complete.	6 Nos.		Each.	
5	P/F Fan dimmer fancy type Imported make with necessary connection.	10 Nos.		Each.	
6	P/F Ceiling Fan 56" sweep imported make with necessary electric connection etc, complete.	10 Nos.		Each	
7	P/F Ceiling Light LED 18 watt Imported make with Metal Base i/c necessary connection etc, complete.	30 Nos.		Each	


8	P/F Wall Bracket 18" sweep imported make or equivalent quality i/c necessary electric connection etc, complete.	6 Nos.	Each
9	P/F distribution board 18 SWG double shutter to accommodate circuit breakers i/c painting with enamelled paint and for other similar jobs etc complete	6.00 Sft	P.Sft
10	P/F Earthing set with 1-1/2x1-1/2"x1/4" GI plate buried in the ground at depth of 12-ft: water comes out from the ground level with salt and charcoal etc i/c providing GI pipe and copper wire 8-SWG etc complete.	1 Sets	Each
11	Providing & fixing Energy Saver 18 to 24 Watts approved quality etc, complete.	24 Nos.	Each
12	P/F Sollar Pannel 100x2= 200 watts German make or equivalent it complete with G.I Breaket fixed in position i/c necessary connection with Battery, sensor with pannel testing taping etc complete	5 Nos.	Each
13	P/F Dry battery 200 amps fixed with proper it matlic box i/c cooling arangement with thermopole sheet to protect to sun heat complete with G.I Breaket fixed in position i/c necessary connection with sensor, pannel testing taping etc complete	2 Nos.	Each.
14	P/F Automatic sencer suitable for 200 amps pannel fixed in matlic box fixed in position i/c necessary connection with sensor, pannel testing taping etc complete	2 Nos.	Each.
15	P/F Ceiling Light LED 7 to 11 watts Imported make with Metal Base holder screw type i/c necessary connection etc, complete.	17 Nos.	Each
16	P/F Wall Bracket 16" sweep D.C type suitable for sollar energy imported make i/c necessary electric connection etc, complete.	1 Nos.	Each
17	P/F Ceiling fan 56" sweep D.C type suitable for sollar energy imported make i/c necessary electric connection etc, complete.	4 Nos.	Each
18	Provision of Solar Light all in one Solar Street Light integrated design Easy installation invironmental friendly Model No LRC 80 w LED Brand leadray LED power 70, 80 watts Solar panel power 36V 110 watts infared senor Availabe. Color Silver , imported make or equivalent it as approved by E.I in/c fitted on existing pole or wall etc complete	1 Nos.	Each
19	P/F Steel Tubler Pole 25'ft long (20"x5" +5"x4") with required size angle iron for search light in/c excavation of earth for fixing the pole 4'ft depth at ground level and making C.C foundation ratio 1:3:6 and coller 3 coats etc as required	1 Nos.	Each

Total B	_____
Total A	_____
Grand Total A+B	_____

CONDITIONS.

- 1 Any typographical errors in the Schedule "B" are subject to correction with the reference in the Schedule of Rates General 2012, inforced from 12.07.2012 as approved by the SRC karachi Sindh
- 2 Arbitration Clause stands from the Agreement.
- 3 No premium shall be paid on Non Schedule items
- 4 No cartage of any item of material either supplied by department of arrange by the contractor shall be paid
- 5 The contractor squoting exorbitant will be required to submit Rate Analysis to justify their rates within specified time other wise the concerned contrator shall be treated as aquality of misconduct and he shass be liable to face punitive action under the rules as per EDO (W&S) department letter No EDO/W&S/CDGK/565 dated 29-09-2004

CONTRACTOR


EXECUTIVE ENGINEER
MINORITIES AFFAIRS DEPARTMENT
GOVERNMENT OF SINDH

STANDARD BIDDING DOCUMENTS

FOR

**Construction of flooring, lavatory Blocks, Electrification at
Rama peer Mandir @ Tando Allahyar City.(Electric work)**

1.00 (M)

BIDDING DATA

(This section should be filled in by the Engineer/Procuring Agency before issuance of the Bidding Documents).

(a). **Name of Procuring Agency:-** Executive Engineer, Minorities Affairs Sindh

(b). **Brief Description of Works: 02-** Construction of flooring, lavatory Blocks, Electrification at Rama peer Mandir @ Tando Allahyar City.(Electric work)

(c). **Procuring Agency's address:-** Barrack No. 12, Block 4-A, Sindh Secretariat Karachi .

(d). **Estimated Cost:** 1.00 (Million)

(e). **Amount of Bid Security:-** 2% (Fill in lump sum amount or in % age of bid amount /estimated cost, but not exceeding 5%)

):- 15 days after the completion

(f). **Period of Bid Validity:** (15 days of Civil/ Building work (Not more than sixty days).

(g). **Security Deposit :- (including bid security:-** 10%
(in % age of bid amount /estimated cost equal to 10%)

(h). **Percentage, if any, to be deducted from bills-** 8%

(i). **Deadline for Submission of Bids along with time:** 06-06-2018 upto 12:30 p.m.

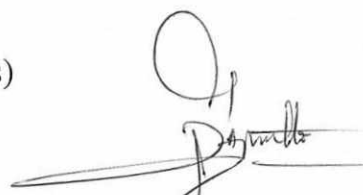
(j). **Venue, Time, and Date of Bid Opening:-** Office of the Executive Engineer, Minorities Affairs Sindh Barrack No.12, Block 4-A, Sindh Secretariat on 06-06-2018 at 12:30 p.m.

(k). **Time for Completion from written order of commence:** - 15 days after the completion of Civil/ Building work

(L). **Liquidity damages:-** 0.05% per day (0.05 of Estimated Cost or Bid cost per day of delay, but total not exceeding 10%).

(m). **Deposit Receipt No: Date: Amount:**(in words and figures)

(Executive Engineer/ Authority issuing bidding documents)


Executive Engineer
Minorities Affairs Department
Government of Sindh

" Schedule B."

Name of Work:- Construction of flooring, lavatory Blocks, Electrification at Rama peer Mandir @ Tando Allahyar City.(Electric work)S.No 2

Lashaari nit 2018

S.No	Item of Work	Quantity.	Rate	Unit	Amount.
1	Wiring for light or fan point with 3/.029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required.(S.I.No. 124, Page No. 15).	34 Pts.	1130.00	P.Pt.	38420.00
2	Wiring for plug point with 3/.029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required. (S.I.No. 126 Page No. 15).	4 Pts.	985.00	P.Pt.	3940.00
3	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.029 copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 10 Page No. 2).	55.0 Mtrs.	222.00	P.Mtr.	12210.00
4	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.036 copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 11 Page No. 2).	25.00 Mtrs.	252.00	P.Mtr.	6300.00
5	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.044 (6mm ²) copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 12 Page No. 2).	20.0 Mtrs.	341.00	P.Mtr.	6820.00
6	Providing and laying (Main or sub Main)PVC insulated with size 4-7/.064 (16mm ²) copper conductor in 1-1/2" dia PVC conduit recessed in the wall or column as required. (S.I.No. 42 Page No. 2).	25.0 Mtrs.	1213.00	P.Mtr.	30325.00
7	Providing and fixing Circuit Breaker 6,10,15,20,30,40,50 & 63 Amps: SP (TB-5S) on prepared board as required.(S.I.No. 203, Page No. 31).	8 Nos	916.00	Each.	7328.00
8	Providing and fixing Circuit Breaker 3,5,10,15,20 & 30 Amps: TP (XS-30NS[NB]) on prepared board as required.(S.I.No. 205, Page No. 31).	1 Nos	5301.00	Each.	5301.00
9	Providing and fixing Circuit Breaker 3,5,10,15,20 , 30,40,50 & 60 Amps: TP (XS-30NS[NB]) on prepared board as required.(S.I.No. 206, Page No. 31).	1 Nos	5521.00	Each.	5521.00
10	P/F Circuit breaker 15,20,30,40,50,60,75 & 100 Amps: T.P. (XS-100NS) on prepared board as required.(S.I.No. 206, Page No. 31)	1 No	9261.00	Each.	9261.00
11	Providing & fixing Bakelite ceiling rose with two terminals. (S.I.No. 228, Page No. 33)	10 Nos	72.00	Each	720.00
12	Providing and Fixing Brass Battern Holder. (S.I.No. 232, Page No. 33)	10 Nos	70.00	Each	700.00
				Total	126846.00
				Add	% Above/Below
				Total	"A"

PART "B" NON SCHEDULE ITEMS.

1	P/F Switch 5 Amps: imported Make i/c plastic board imported make etc complete.	34 Nos.		Each	
2	P/F 2 Pin 5 Amps:plug socket imported Make i/c plastic board with necessary electric connection etc complete.	4 Nos.		Each	
3	P/F fancy type 3 pin 5 Amps: S.P. plug socket switch & shoe unit imported Make with board i/c necessary connection and recessed in the wall etc, complete.	12 Nos.		Each	
4	P/F fancy type 3 pin 15 Amps: S.P. plug socket switch & shoe unit imported Make with board i/c necessary connection and recessed in the wall etc, complete.	6 Nos.		Each.	
5	P/F Fan dimmer fancy type Imported make with necessary connection.	10 Nos.		Each.	
6	P/F Ceiling Fan 56" sweep imported make with necessary electric connection etc, complete.	10 Nos.		Each	
7	P/F Ceiling Light LED 18 watt Imported make with Metal Base i/c necessary connection etc, complete.	30 Nos.		Each	

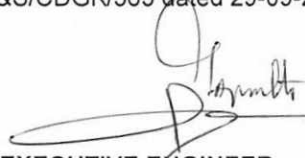
8	P/F Wall Bracket 18" sweep imported make or equivalent quality i/c necessary electric connection etc, complete.	6 Nos.	Each
9	P/F distribution board 18 SWG double shutter to accommodate circuit breakers i/c painting with enamelled paint and for other similar jobs etc complete	6.00 Sft	P.Sft
10	P/F Earthing set with 1-1/2x1-1/2"x1/4" GI plate buried in the ground at depth of 12-ft: water comes out from the ground level with salt and charcoal etc i/c providing GI pipe and copper wire 8-SWG etc complete.	1 Sets	Each
11	Providing & fixing Energy Saver 18 to 24 Watts approved quality etc, complete.	24 Nos.	Each
12	P/F Sollar Pannel 100x2= 200 watts German make or equivalent it complete with G.I Bracket fixed in position i/c necessary connection with Battery, sensor with pannel testing taping etc complete	5 Nos.	Each
13	P/F Dry battery 200 amps fixed with proper it matlic box i/c cooling arangement with thermopole sheet to protect to sun heat complete with G.I Bracket fixed in position i/c necessary connection with sensor, pannel testing taping etc complete	2 Nos.	Each.
14	P/F Automatic sencer suitable for 200 amps pannel fixed in matlic box fixed in position i/c necessary connection with sensor, pannel testing taping etc complete	2 Nos.	Each.
15	P/F Ceiling Light LED 7 to 11 watts Imported make with Metal Base holder screw type i/c necessary connection etc, complete.	17 Nos.	Each
16	P/F Wall Bracket 16" sweep D.C type suitable for sollar energy imported make i/c necessary electric connection etc, complete.	1 Nos.	Each
17	P/F Ceiling fan 56" sweep D.C type suitable for sollar energy imported make i/c necessary electric connection etc, complete.	4 Nos.	Each
18	Provision of Solar Light compact all in one Solar Street Light integrated design Easy installation invironmental friendly Model No LRC 80 w LED Brand leadray LED power 70, 80 watts Solar panel power 36V 110 watts infared sensor Availabe. Color Silver , imported make in/c fitted on existing pole or wall etc complete	1 Nos.	Each
19	P/F Steel Tubler Pole 25'ft long (20"x5" +5'x4") with required size angle iron for search light in/c excavation of earth for fixing the pole 4'ft depth at ground level and making C.C foundation ratio 1:3:6 and collar 3 coats etc as required	1 Nos.	Each

Each _____
Total B _____
Total A _____
Grand Total A+B _____

CONDITIONS.

- 1 Any typographical errors in the Schedule "B" are subject to correction with the reference in the Schedule of Rates General 2012, inforced from 12.07.2012 as approved by the SRC karachi Sindh
- 2 Arbitration Clause stands from the Agreement.
- 3 No premium shall be paid on Non Schedule items
- 4 No cartage of any item of material either supplied by department of arrange by the contractor shall be paid
- 5 The contractor squoting exorbitant will be required to submit Rate Analysis to justify their rates within specified time other wise the concerned contractor shall be treated as aquality of misconduct and he shass be liable to face punitive action under the rules as per EDO (W&S) department letter No EDO/W&S/CDGK/565 dated 29-09-2004

CONTRACTOR


EXECUTIVE ENGINEER
MINORITIES AFFAIRS DEPARTMENT
GOVERNMENT OF SINDH

STANDARD BIDDING DOCUMENTS

FOR

**Construction of Jain DharamMandir Village Godi Taluka
Nagarparkar District Tharpakar (Conservation) .(Electric
work)**

1.00 (M)

BIDDING DATA

(This section should be filled in by the Engineer/Procuring Agency before issuance of the Bidding Documents).

(a). **Name of Procuring Agency:-** Executive Engineer, Minorities Affairs Sindh

(b). **Brief Description of Works: 03-** Construction of Jain DharamMandir Village Godi Taluka Nagarparkar District Tharpakar (Conservation) .(Electric work)

(c). **Procuring Agency's address:-** Barrack No. 12, Block 4-A, Sindh Secretariat Karachi .

(d). **Estimated Cost:** 1.00 (Million)

(e). **Amount of Bid Security:-** 2% (Fill in lump sum amount or in % age of bid amount /estimated cost, but not exceeding 5%)

):- 15 days after the completion

(f). **Period of Bid Validity: (15 days of Civil/ Building work** (Not more than sixty days).

(g). **Security Deposit :- (including bid security:-** 10% .
(in % age of bid amount /estimated cost equal to 10%)

(h). **Percentage, if any, to be deducted from bills-** 8% .

(i). **Deadline for Submission of Bids along with time:** 06-06-2018 upto 12:30 p.m.


(j). **Venue, Time, and Date of Bid Opening:-** Office of the Executive Engineer, Minorities Affairs Sindh Barrack No.12, Block 4-A, Sindh Secretariat on 06-06-2018 at 12:30 p.m.

(k). **Time for Completion from written order of commence: -** 15 days after the completion of Civil/ Building work

(L). **Liquidity damages:-** 0.05% per day (0.05 of Estimated Cost or Bid cost per day of delay, but total not exceeding 10%).

(m). **Deposit Receipt No: Date: Amount:(in words and figures)**

(Executive Engineer/ Authority issuing bidding documents)


Executive Engineer
Minorities Affairs Department
Government of Sindh

" Schedule B."

**Name of Work:- Construction of Jain DharamMandir Village Godi Taluka Nagarparkar District
Tharpakar (Conservation) .(Electric work) S.No 3**

Lashaari nit 2018

S.No	Item of Work	Quantity.	Rate	Unit	Amount.
1	Wiring for light or fan point with 3/.029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required.(S.I.No. 124, Page No. 15).	34 Pts.	1130.00	P.Pt.	38420.00
2	Wiring for plug point with 3/.029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required. (S.I.No. 126 Page No. 15).	4 Pts.	985.00	P.Pt.	3940.00
3	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.029 copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 10 Page No. 2).	55.0 Mtrs.	222.00	P.Mtr.	12210.00
4	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.036 copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 11 Page No. 2).	25.00 Mtrs.	252.00	P.Mtr.	6300.00
5	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.044 (6mm ²) copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 12 Page No. 2).	20.0 Mtrs.	341.00	P.Mtr.	6820.00
6	Providing and laying (Main or sub Main)PVC insulated with size 4-7/.064 (16mm ²) copper conductor in 1-1/2" dia PVC conduit recessed in the wall or column as required. (S.I.No. 42 Page No. 31).	25.0 Mtrs.	1213.00	P.Mtr.	30325.00
7	Providing and fixing Circuit Breaker 6,10,15,20,30,40,50 & 63 Amps: SP (TB-5S) on prepared board as required.(S.I.No. 203, Page No. 31).	8 Nos	916.00	Each.	7328.00
8	Providing and fixing Circuit Breaker 3,5,10,15,20 & 30 Amps: TP (XS-30NS[NB]) on prepared board as required.(S.I.No. 205, Page No. 31).	1 Nos	5301.00	Each.	5301.00
9	Providing and fixing Circuit Breaker 3,5,10,15,20 , 30,40,50 & 60 Amps: TP (XS-30NS[NB]) on prepared board as required.(S.I.No. 206, Page No. 31).	1 Nos	5521.00	Each.	5521.00
10	P/F Circuit breaker 15,20,30,40,50,60,75 & 100 Amps: T.P. (XS-100NS) on prepared board as required.(S.I.No. 206, Page No. 31)	1 No	9261.00	Each.	9261.00
11	Providing & fixing Bakelite ceiling rose with two terminals. (S.I.No. 228, Page No. 33)	10 Nos	72.00	Each	720.00
12	Providing and Fixing Brass Battern Holder. (S.I.No. 232, Page No. 33)	10 Nos	70.00	Each	700.00
				Total	126846.00
				Add	% Above/Below
				Total	"A"

PART "B" NON SCHEDULE ITEMS.

1	P/F Switch 5 Amps: imported Make i/c plastic board imported make etc complete.	34 Nos.		Each	
2	P/F 2 Pin 5 Amps:plug socket imported Make i/c plastic board with necessary electric connection etc complete.	4 Nos.		Each	
3	P/F fancy type 3 pin 5 Amps: S.P. plug socket switch & shoe unit imported Make with board i/c necessary connection and recessed in the wall etc, complete.	12 Nos.		Each	
4	P/F fancy type 3 pin 15 Amps: S.P. plug socket switch & shoe unit imported Make with board i/c necessary connection and cessed in the wall etc, complete.	6 Nos.		Each.	
5	P/F Fan dimmer fancy type Imported make with necessary connection.	10 Nos.		Each.	
6	P/F Ceiling Fan 56" sweep imported make with necessary electric connection etc, complete.	10 Nos.		Each	
7	P/F Ceiling Light LED 18 watt Imported make with Metal Base i/c necessary connection etc, complete.	30 Nos.		Each	

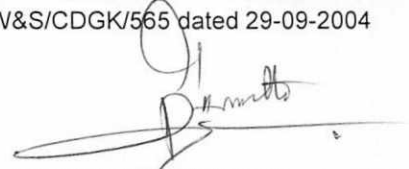
8	P/F Wall Bracket 18" sweep imported make or equal quality i/c necessary electric connection etc, complete.	6 Nos.	Each
9	P/F distribution board 18 SWG double shutter to accommodate circuit breakers i/c painting with enamelled paint and for other similar jobs etc complete	6.00 Sft	P.Sft
10	P/F Earthing set with 1-1/2x1-1/2"x1/4" GI plate buried in the ground at depth of 12-ft: water comes out from the ground level with salt and charcoal etc i/c providing GI pipe and copper wire 8-SWG etc complete.	1 Sets	Each
11	Providing & fixing Energy Saver 18 to 24 Watts approved quality etc, complete.	24 Nos.	Each
12	P/F Sollar Pannel 100x2= 200 watts German make or equilent it complete with G.I Bracket fixed in position i/c necessary connection with Battery, sensor with pannel testing taping etc complete	5 Nos.	Each
13	P/F Dry battery 200 amps fixed with proper it matlic box i/c coolingo arangement with thermopole sheet to protect to sun heat complete with G.I Bracket fixed in position i/c necessary connection with sensor, pannel testing taping etc complete	2 Nos.	Each.
14	P/F Automatic sencer suitable for 200 amps pannel fixed in matlic box fixed in position i/c necessary connection with sensor, pannel testing taping etc complete	2 Nos.	Each.
15	P/F Ceiling Light LED 7 to 11 watts Imported make with Metal Base holder screw type i/c necessary connection etc, complete.	17 Nos.	Each
16	P/F Wall Bracket 16" sweep D.C type suitable for sollar energy imported make i/c necessary electric connection etc, complete.	1 Nos.	Each
17	P/F Ceiling fan 56" sweep D.C type suitable for sollar energy imported make i/c necessary electric connection etc, complete.	4 Nos.	Each
18	Provision of Solar Light compact all in one Solar Street Light integrated design Easy installation invironmental friendly Model No LRC 80 w LED Brand leadray LED power 70, 80 watts Solar panel power 36V 110 watts infared senor Availabe. Color Silver , imported make in/c fitted on existing pole or wall etc complete	1 Nos.	Each
19	P/F Steel Tubler Pole 25'ft long (20"x5" +5'x4") with required size angle iron for search light in/c excavation of earth for fixing the pole 4'ft depth at ground level and making C.C foundation ratio 1:3:6 and coller 3 coats etc as required	1 Nos.	Each

Each _____
Total B _____
Total A _____
Grand Total A+B _____

CONDITIONS.

- 1 Any typographical errors in the Schedule "B" are subject to correction with the reference in the Schedule of Rates General 2012, inforced from 12.07.2012 as approved by the SRC karachi Sindh
- 2 Arbitration Clause stands from the Agreement.
- 3 No premium shall be paid on Non Schedule items
- 4 No cartage of any item of material either supplied by department of arrange by the contractor shall be paid
- 5 The contractor squoting exorbitant will be required to submit Rate Analysis to justify their rates within specified time other wise the concerned contractor shall be treated as aquality of misconduct and he shass be liable to face punitive action under the rules as per EDO (W&S) department letter No EDO/W&S/CDGK/565 dated 29-09-2004

CONTRACTOR


EXECUTIVE ENGINEER
MINORITIES AFFAIRS DEPARTMENT
GOVERNMENT OF SINDH

STANDARD BIDDING DOCUMENTS

FOR

**Construction of Satsang Hall (2 Nos) 8 Nos Lavatory Block
resing of Compound Wall and Drainage of Khaan .(Electric
work)**

1.00 (M)

BIDDING DATA

(This section should be filled in by the Engineer/Procuring Agency before issuance of the Bidding Documents).

(a). **Name of Procuring Agency:-** Executive Engineer, Minorities Affairs Sindh

(b). **Brief Description of Works: 04-** Construction of Satsang Hall (2 Nos) 8 Nos Lavatory Block resing of Compound Wall and Drainage of Khaan .(Electric work)

(c). **Procuring Agency's address:-** Barrack No. 12, Block 4-A, Sindh Secretariat Karachi .

(d). **Estimated Cost:** 1.00 (Million)

(e). **Amount of Bid Security:-** 2% (Fill in lump sum amount or in % age of bid amount /estimated cost, but not exceeding 5%)

):- 15 days after the completion

(f). **Period of Bid Validity: (15 days of Civil/ Building work** (Not more than sixty days).

(g). **Security Deposit :- (including bid security:-** 10%
(in % age of bid amount /estimated cost equal to 10%)

(h). **Percentage, if any, to be deducted from bills-** 8%

(i). **Deadline for Submission of Bids along with time:**06-06-2018 upto 12:30 p.m.

(j). **Venue, Time, and Date of Bid Opening:-** Office of the Executive Engineer, Minorities Affairs Sindh Barrack No.12, Block 4-A, Sindh Secretariat on 06-06-2018 at 12:30 p.m.

(k). **Time for Completion from written order of commence: -** 15 days after the completion of Civil/ Building work

(L). **Liquidity damages:-** 0.05% per day (0.05 of Estimated Cost or Bid cost per day of delay, but total not exceeding 10%).

(m). **Deposit Receipt No: Date: Amount:(in words and figures)**

(Executive Engineer/ Authority issuing bidding documents)


Executive Engineer
Minorities Affairs Department
Government of Sindh

" Schedule B."

Name of Work:-Construction of Satsang Hall (2 Nos) 8 Nos Lavatory Block resing of Compound Wall and Drainage of Khaan .(Electric woKs) S.No 4

Lashaari nit 2018

S.No	Item of Work	Quantity.	Rate	Unit	Amount.
1	Wiring for light or fan point with 3/.029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required.(S.I.No. 124, Page No. 15).	34 Pts.	1130.00	P.Pt.	38420.00
2	Wiring for plug point with 3/.029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required. (S.I.No. 126 Page No. 15).	4 Pts.	985.00	P.Pt.	3940.00
3	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.029 copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 10 Page No. 2).	55.0 Mtrs.	222.00	P.Mtr.	12210.00
4	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.036 copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 11 Page No. 2).	25.00 Mtrs.	252.00	P.Mtr.	6300.00
5	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.044 (6mm2) copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 12 Page No. 2).	20.0 Mtrs.	341.00	P.Mtr.	6820.00
6	Providing and laying (Main or sub Main)PVC insulated with size 4-7/.064 (16mm2) copper conductor in 1-1/2" dia PVC conduit recessed in the wall or column as required. (S.I.No. 42 Page No. 2).	25.0 Mtrs.	1213.00	P.Mtr.	30325.00
7	Providing and fixing Circuit Breaker 6,10,15,20,30,40,50 & 63 Amps: SP (TB-5S) on prepared board as required.(S.I.No. 203, Page No. 31).	8 Nos	916.00	Each.	7328.00
8	Providing and fixing Circuit Breaker 3,5,10,15,20 & 30 Amps: TP (XS-30NS[NB]) on prepared board as required.(S.I.No. 205, Page No. 31).	1 Nos	5301.00	Each.	5301.00
9	Providing and fixing Circuit Breaker 3,5,10,15,20 , 30,40,50 & 60 Amps: TP (XS-30NS[NB]) on prepared board as required.(S.I.No. 206, Page No. 31).	1 Nos	5521.00	Each.	5521.00
10	P/F Circuit breaker 15,20,30,40,50,60,75 & 100 Amps: T.P. (XS-100NS) on prepared board as required.(S.I.No. 206, Page No. 31)	1 No	9261.00	Each.	9261.00
11	Providing & fixing Bakelite ceiling rose with two terminals. (S.I.No. 228, Page No. 33)	10 Nos	72.00	Each	720.00
12	Providing and Fixing Brass Battern Holder. (S.I.No. 232, Page No. 33)	10 Nos	70.00	Each	700.00
Total					126846.00
Add					% Above/Below
Total					"A"

PART "B" NON SCHEDULE ITEMS.

1	P/F Switch 5 Amps: imporated Make i/c plastic board imported make etc complete.	34 Nos.		Each	
2	P/F 2 Pin 5 Amps:plug socket imporated Make i/c plastic board with necessary electric connection etc complete.	4 Nos.		Each	
3	P/F fancy type 3 pin 5 Amps: S.P. plug socket switch & shoe unit mporated Make with board i/c necessary connection and recessed in the wall etc, complete.	12 Nos.		Each	
4	P/F fancy type 3 pin 15 Amps: S.P. plug socket switch & shoe unit mporated Make with board i/cnecessary connection and cessed in the wall etc, complete.	6 Nos.		Each.	
5	P/F Fan dimmer fancy type Imported make with necessary connection.	10 Nos.		Each.	
6	P/F Ceiling Fan 56" sweep imporated make with necessary electric connection etc, complete.	10 Nos.		Each	
7	P/F Ceiling Light LED 18 watt Imported make with Metal Base i/c necessary connection etc, complete.	30 Nos.		Each	
8	P/F Wall Bracket 18" sweep imporated make or equalent quality i/c necessary electric connection etc, complete.	6 Nos.		Each	

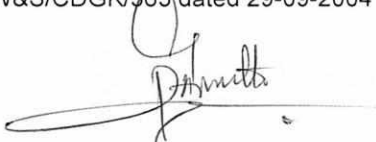
9	P/F distribution board 18 SWG double shutter to accommodate circuit breakers i/c painting with enamelled paint and for other similar jobs etc complete	6.00 Sft	P.Sft
10	P/F Earthing set with 1-1/2x1-1/2"x1/4" GI plate buried in the ground at depth of 12-ft: water comes out from the ground level with salt and charcoal etc i/c providing GI pipe and copper wire 8-SWG etc complete.	1 Sets	Each
11	Providing & fixing Energy Saver 18 to 24 Watts approved quality etc, complete.	24 Nos.	Each
12	P/F Sollar Pannel 100x2= 200 watts German make or equilent it complete with G.I Breaket fixed in position i/c necessary connection with Battery, sensor with pannel testing taping etc complete	5 Nos.	Each
13	P/F Dry battery 200 amps fixed with proper it matlic box i/c cooling arangment with thermopole sheet to protect to sun heat complete with G.I Breaket fixed in position i/c necessary connection with sensor, pannel testing taping etc complete	2 Nos.	Each.
14	P/F Automatic sencer suitable for 200 amps pannel fixed in matlic box fixed in position i/c necessary connection with sensor, pannel testing taping etc complete	2 Nos.	Each.
15	P/F Ceiling Light LED 7 to 11 watts Imported make with Metal Base holder screw type i/c necessary connection etc, complete.	17 Nos.	Each
16	P/F Wall Bracket 16" sweep D.C type suitable for sollar energy imporated make i/c necessary electric connection etc, complete.	1 Nos.	Each
17	P/F Ceiling fan 56" sweep D.C type suitable for sollar energy imporated make i/c necessary electric connection etc, complete.	4 Nos.	Each
18	Provision of Solar Light compact all in one Solar Street Light integrated design Easy installation invironmental friendly Model No LRC 80 w LED Brand leadray LED power 70, 80 watts Solar panel power 36V 110 watts infared senor Availabe. Color Silver , imporated make in/c fitted on existing pole or wall etc complete	1 Nos.	Each
19	P/F Steel Tubler Pole 25'ft long (20"x5" +5'x4") with required size angle iron for search light in/c excavation of earth for fixing the pole 4'ft depth at ground level and making C.C foundation ratio 1:3:6 and coller 3 coats etc as required	1 Nos.	Each

Each _____
Total B _____
Total A _____
Grand Total A+B _____

CONDITIONS.

- 1 Any typographical errors in the Schedule "B" are subject to correction with the reference in the Schedule of Rates General 2012, inforced from 12.07.2012 as approved by the SRC karachi Sindh
- 2 Arbitration Clause stands from the Agreement.
- 3 No premium shall be paid on Non Schedule items
- 4 No cartage of any item of material either supplied by department of arrange by the contractor shall be paid
- 5 The contractor squoting exorbitant will be required to submit Rate Analysis to justyfy their rates within specified time other wise the concerned contrator shall be treated as aquality of misconduct and he shass be liable to face punitive action under the rules as per EDO (W&S) department letter No EDOW&S/CDGK/565 dated 29-09-2004

CONTRACTOR


EXECUTIVE ENGINEER
MINORITIES AFFAIRS DEPARTMENT
GOVERNMENT OF SINDH

STANDARD BIDDING DOCUMENTS

FOR

**Construction of Monument including shed washroom for
Male/ Female and Envicrete Flooraing at Bearer Place of
Umer Rooplo Kolhi at Nangarparkar (Electric Work)**

1.00 (M)

BIDDING DATA

(This section should be filled in by the Engineer/Procuring Agency before issuance of the Bidding Documents).

(a). **Name of Procuring Agency:-** Executive Engineer, Minorities Affairs Sindh

(b). **Brief Description of Works: 05-** Construction of Monument including shed washroom for Male/ Female and Envicrete Flooraing at Bearer Place of Umer Rooplo Kolhi at Nangarparkar (Electric Work)

(c). **Procuring Agency's address:-** Barrack No. 12, Block 4-A, Sindh Secretariat Karachi.

(d). **Estimated Cost:** 1.00 (Million)

(e). **Amount of Bid Security:-** 2% (Fill in lump sum amount or in % age of bid amount /estimated cost, but not exceeding 5%)

):- 15 days after the completion

(f). **Period of Bid Validity: (15 days of Civil/ Building work** (Not more than sixty days).

(g). **Security Deposit :- (including bid security:-** 10% .
(in % age of bid amount /estimated cost equal to 10%)

(h). **Percentage, if any, to be deducted from bills-** 8% .

(i). **Deadline for Submission of Bids along with time:** 06-06-2018 upto 12:30 p.m.

(j). **Venue, Time, and Date of Bid Opening:-** Office of the Executive Engineer, Minorities Affairs Sindh Barrack No.12, Block 4-A, Sindh Secretariat on 06-06-2018 at 12:30 p.m.

(k). **Time for Completion from written order of commence: -** 15 days after the completion of Civil/ Building work

(L). **Liquidity damages:-** 0.05% per day (0.05 of Estimated Cost or Bid cost per day of delay, but total not exceeding 10%).

(m). **Deposit Receipt No: Date: Amount:(in words and figures)**

(Executive Engineer/ Authority issuing bidding documents)


Executive Engineer
Minorities Affairs Department
Government of Sindh

" Schedule B."

**Name of Work:- Construction of Monument including shed washroom for Male/ Female and Envicrete
Flooring at Bearer Place of Umer Rooplo Kolhi at Nangarparkar (Electric Work) S.No 5**

Lashaari nit 2018

S.No	Item of Work	Quantity.	Rate	Unit	Amount.
1	Wiring for light or fan point with 3/.029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required.(S.I.No. 124, Page No. 15).	34 Pts.	1130.00	P.Pt.	38420.00
2	Wiring for plug point with 3/.029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required. (S.I.No. 126 Page No. 15).	4 Pts.	985.00	P.Pt.	3940.00
3	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.029 copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 10 Page No. 2).	55.0 Mtrs.	222.00	P.Mtr.	12210.00
4	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.036 copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 11 Page No. 2).	25.00 Mtrs.	252.00	P.Mtr.	6300.00
5	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.044 (6mm2) copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 12 Page No. 2).	20.0 Mtrs.	341.00	P.Mtr.	6820.00
6	Providing and laying (Main or sub Main)PVC insulated with size 4-7/.064 (16mm2) copper conductor in 1-1/2" dia PVC conduit recessed in the wall or column as required. (S.I.No. 42 Page No. 2).	25.0 Mtrs.	1213.00	P.Mtr.	30325.00
7	Providing and fixing Circuit Breaker 6,10,15,20,30,40,50 & 63 Amps: SP (TB-5S) on prepared board as required.(S.I.No. 203, Page No. 31).	8 Nos	916.00	Each.	7328.00
8	Providing and fixing Circuit Breaker 3,5,10,15,20 & 30 Amps: TP (XS-30NS[NB]) on prepared board as required.(S.I.No. 205, Page No. 31).	1 Nos	5301.00	Each.	5301.00
9	Providing and fixing Circuit Breaker 3,5,10,15,20 , 30,40,50 & 60 Amps: TP (XS-30NS[NB]) on prepared board as required.(S.I.No. 206, Page No. 31).	1 Nos	5521.00	Each.	5521.00
10	P/F Circuit breaker 15,20,30,40,50,60,75 & 100 Amps: T.P. (XS-100NS) on prepared board as required.(S.I.No. 206, Page No. 31)	1 No	9261.00	Each.	9261.00
11	Providing & fixing Bakelite ceiling rose with two terminals. (S.I.No. 228, Page No. 33)	10 Nos	72.00	Each	720.00
12	Providing and Fixing Brass Battern Holder. (S.I.No. 232, Page No. 33)	10 Nos	70.00	Each	700.00

Total 126846.00

Add **% Above/Below**

Total **"A"**

PART "B" NON SCHEDULE ITEMS.

1	P/F Switch 5 Amps: imported Make i/c plastic board imported make etc complete.	34 Nos.		Each	
2	P/F 2 Pin 5 Amps:plug socket imported Make i/c plastic board with necessary electric connection etc complete.	4 Nos.		Each	
3	P/F fancy type 3 pin 5 Amps: S.P. plug socket switch & shoe unit imported Make with board i/c necessary connection and recessed in the wall etc, complete.	12 Nos.		Each	
4	P/F fancy type 3 pin 15 Amps: S.P. plug socket switch & shoe unit imported Make with board i/c necessary connection and recessed in the wall etc, complete.	6 Nos.		Each.	
5	P/F Fan dimmer fancy type Imported make with necessary connection.	10 Nos.		Each.	
6	P/F Ceiling Fan 56" sweep imported make with necessary electric connection etc, complete.	10 Nos.		Each	
7	P/F Ceiling Light LED 18 watt Imported make with Metal Base i/c necessary connection etc, complete.	30 Nos.		Each	
8	P/F Wall Bracket 18" sweep imported make or equalent quality i/c necessary electric connection etc, complete.	6 Nos.		Each	

9	P/F distribution board 18 SWG double shutter to accommodate circuit breakers i/c painting with enamelled paint and for other similar jobs etc complete	6.00 Sft	P.Sft
10	P/F Earthing set with 1-1/2x1-1/2"x1/4" GI plate buried in the ground at depth of 12-ft: water comes out from the ground level with salt and charcoal etc i/c providing GI pipe and copper wire 8-SWG etc complete.	1 Sets	Each
11	Providing & fixing Energy Saver 18 to 24 Watts approved quality etc, complete.	24 Nos.	Each
12	P/F Sollar Pannel 100x2= 200 watts German make or equilent it complete with G.I Breaket fixed in position i/c necessary connection with Battery, sensor with pannel testing taping etc complete	5 Nos.	Each
13	P/F Dry battery 200 amps fixed with proper it matlic box i/c cooling arangement with thermopole sheet to protect to sun heat complete with G.I Breaket fixed in position i/c necessary connection with sensor, pannel testing taping etc complete	2 Nos.	Each.
14	P/F Automatic sencer suitable for 200 amps pannel fixed in matlic box fixed in position i/c necessary connection with sensor, pannel testing taping etc complete	2 Nos.	Each.
15	P/F Ceiling Light LED 7 to 11 watts Imported make with Metal Base holder screw type i/c necessary connection etc, complete.	17 Nos.	Each
16	P/F Wall Bracket 16" sweep D.C type suitable for sollar energy imporated make i/c necessary electric connection etc, complete.	1 Nos.	Each
17	P/F Ceiling fan 56" sweep D.C type suitable for sollar energy imporated make i/c necessary electric connection etc, complete.	4 Nos.	Each
18	Provision of Solar Light compact all in one Solar Street Light integrated design Easy installation invironmental friendly Model No LRC 80 w LED Brand leadray LED power 70, 80 watts Solar panel power 36V 110 watts infared senor Availabe. Color Silver , imporated make in/c fitted on existing pole or wall etc complete	1 Nos.	Each
19	P/F Steel Tubler Pole 25'ft long (20"x5" +5'x4") with required size angle iron for search light in/c excavation of earth for fixing the pole 4'ft depth at ground level and making C.C foundation ratio 1:3:6 and coller 3 coats etc as required	1 Nos.	Each

Total B	_____
Total A	_____
Grand Total A+B	_____

CONDITIONS.

- 1 Any typographical errors in the Schedule "B" are subject to correction with the reference in the Schedule of Rates General 2012, inforced from 12.07.2012 as approved by the SRC karachi Sindh
- 2 Arbitration Clause stands from the Agreement.
- 3 No premium shall be paid on Non Schedule items
- 4 No cartage of any item of material either supplied by department of arrange by the contractor shall be paid
- 5 The contractor squoting exorbitant will be required to submit Rate Analysis to justify their rates within specified time other wise the concerned contrator shall be treated as aquality of misconduct and he shass be liable to face punitive action under the rules as per EDO (W&S) department letter No EDO/W&S/CDGK/565 dated 29-09-2004

CONTRACTOR


EXECUTIVE ENGINEER
MINORITIES AFFAIRS DEPARTMENT
GOVERNMENT OF SINDH

STANDARD BIDDING DOCUMENTS

FOR

**Repair /Renovation re- Construction of Satsang Hall Shed
Lavatory Block and wall and Flooring Filling etc of Bhagat
Hardas Astan Taluka Mithi and Construction of Satsang
Hall at Mehraj paro village Chelhar Taluka Mithi (Electric
Work)**

1.00 (M)

BIDDING DATA

(This section should be filled in by the Engineer/Procuring Agency before issuance of the Bidding Documents).

(a). **Name of Procuring Agency:-** Executive Engineer, Minorities Affairs Sindh

(b). **Brief Description of Works: 08-** Repair /Renovation re- Construction of Satsang Hall Shed Lavatory Block and wall and Flooring Filling etc of Bhagat Hardas Astan Taluka Mithi and Construction of Satsang Hall at Mehraj paro village Chelhar Taluka Mithi (Electric Work)

(c). **Procuring Agency's address:-** Barrack No. 12, Block 4-A, Sindh Secretariat Karachi .

(d). **Estimated Cost:** 1.00 (Million)

(e). **Amount of Bid Security:-** 2% (Fill in lump sum amount or in % age of bid amount /estimated cost, but not exceeding 5%)

):- 15 days after the completion

(f). **Period of Bid Validity: (15 days of Civil/ Building work** (Not more than sixty days).

(g). **Security Deposit :- (including bid security:-** 10%
(in % age of bid amount /estimated cost equal to 10%)

(h). **Percentage, if any, to be deducted from bills-** 8%


(i). **Deadline for Submission of Bids along with time:** 06-06-2018 upto 12:30 p.m.

(j). **Venue, Time, and Date of Bid Opening:-** Office of the Executive Engineer, Minorities Affairs Sindh Barrack No.12, Block 4-A, Sindh Secretariat on 06-06-2018 at 12:30 p.m.

(k). **Time for Completion from written order of commence: -** 15 days after the completion of Civil/ Building work

(L). **Liquidity damages:-** 0.05% per day (0.05 of Estimated Cost or Bid cost per day of delay, but total not exceeding 10%).

(m). **Deposit Receipt No: Date: Amount:**(in words and figures)
(Executive Engineer/ Authority issuing bidding documents)


Executive Engineer
Minorities Affairs Department
Government of Sindh

" Schedule B."

Name of Work:-Repair /Renovation re- Construction of Satsang Hall Shed Lavatory Block and wall and Flooring Filling etc of Bhagat Hardas Astan Taluka Mithi and Construction of Satsang Hall at Mehraj paro village Chelhar Taluka Mithi (Electric Work) S.No8

Lashaari nit 2018

S.No	Item of Work	Quantity.	Rate	Unit	Amount.
1	Wiring for light or fan point with 3/.029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required.(S.I.No. 124, Page No. 15).	34 Pts.	1130.00	P.Pt.	38420.00
2	Wiring for plug point with 3/.029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required. (S.I.No. 126 Page No. 15).	4 Pts.	985.00	P.Pt.	3940.00
3	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.029 copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 10 Page No. 2).	55.0 Mtrs.	222.00	P.Mtr.	12210.00
4	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.036 copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 11 Page No. 2).	25.00 Mtrs.	252.00	P.Mtr.	6300.00
5	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.044 (6mm2) copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 12 Page No. 2).	20.0 Mtrs.	341.00	P.Mtr.	6820.00
6	Providing and laying (Main or sub Main)PVC insulated with size 4-7/.064 (16mm2) copper conductor in 1-1/2" dia PVC conduit recessed in the wall or column as required. (S.I.No. 42 Page No. 2).	25.0 Mtrs.	1213.00	P.Mtr.	30325.00
7	Providing and fixing Circuit Breaker 6,10,15,20,30,40,50 & 63 Amps: SP (TB-5S) on prepared board as required.(S.I.No. 203, Page No. 31).	8 Nos	916.00	Each.	7328.00
8	Providing and fixing Circuit Breaker 3,5,10,15,20 & 30 Amps: TP (XS-30NS[NB]) on prepared board as required.(S.I.No. 205, Page No. 31).	1 Nos	5301.00	Each.	5301.00
9	Providing and fixing Circuit Breaker 3,5,10,15,20 , 30,40,50 & 60 Amps: TP (XS-30NS[NB]) on prepared board as required.(S.I.No. 206, Page No. 31).	1 Nos	5521.00	Each.	5521.00
10	P/F Circuit breaker 15,20,30,40,50,60,75 & 100 Amps: T.P. (XS-100NS) on prepared board as required.(S.I.No. 206, Page No. 31)	1 No	9261.00	Each.	9261.00
11	Providing & fixing Bakelite ceiling rose with two terminals. (S.I.No. 228, Page No. 33)	10 Nos	72.00	Each	720.00
12	Providing and Fixing Brass Battern Holder. (S.I.No. 232, Page No. 33)	10 Nos	70.00	Each	700.00
Total					126846.00
Add					% Above/Below
Total					"A"

PART "B" NON SCHEDULE ITEMS.

1	P/F Switch 5 Amps: imporated Make i/c plastic board imported make etc complete.	34 Nos.		Each	
2	P/F 2 Pin 5 Amps:plug socket imporated Make i/c plastic board with necessary electric connection etc complete.	4 Nos.		Each	
3	P/F fancy type 3 pin 5 Amps: S.P. plug socket switch & shoe unit mporated Make with board i/c necessary connection and recessed in the wall etc, complete.	12 Nos.		Each	
4	P/F fancy type 3 pin 15 Amps: S.P. plug socket switch & shoe unit mporated Make with board i/cnecessary connection and cessed in the wall etc, complete.	6 Nos.		Each.	
5	P/F Fan dimmer fancy type Imported make with necessary connection.	10 Nos.		Each.	
6	P/F Ceiling Fan 56" sweep imporated make with necessary electric connection etc, complete.	10 Nos.		Each	
7	P/F Ceiling Light LED 18 watt Imported make with Metal Base i/c necessary connection etc, complete.	30 Nos.		Each	
8	P/F Wall Bracket 18" sweep imporated make or equalent quality i/c necessary electric connection etc, complete.	6 Nos.		Each	

9	P/F distribution board 18 SWG double shutter to accommodate circuit breakers i/c painting with enamelled paint and for other similar jobs etc complete	6.00 Sft	P.Sft
10	P/F Earthing set with 1-1/2x1-1/2"x1/4" GI plate buried in the ground at depth of 12-ft: water comes out from the ground level with salt and charcoal etc i/c providing GI pipe and copper wire 8-SWG etc complete.	1 Sets	Each
11	Providing & fixing Energy Saver 18 to 24 Watts approved quality etc, complete.	24 Nos.	Each
12	P/F Sollar Pannel 100x2= 200 watts German make or equilent it complete with G.I Breaket fixed in position i/c necessary connection with Battery, sensor with pannel testing taping etc complete	5 Nos.	Each
13	P/F Dry battery 200 amps fixed with proper it matlic box i/c cooling arangment with thermopole sheet to protect to sun heat complete with G.I Breaket fixed in position i/c necessary connection with sensor, pannel testing taping etc complete	2 Nos.	Each.
14	P/F Automatic sencer suitable for 200 amps pannel fixed in matlic box fixed in position i/c necessary connection with sensor, pannel testing taping etc complete	2 Nos.	Each.
15	P/F Ceiling Light LED 7 to 11 watts Imported make with Metal Base holder screw type i/c necessary connection etc, complete.	17 Nos.	Each
16	P/F Wall Bracket 16" sweep D.C type suitable for sollar energy imporated make i/c necessary electric connection etc, complete.	1 Nos.	Each
17	P/F Ceiling fan 56" sweep D.C type suitable for sollar energy imporated make i/c necessary electric connection etc, complete.	4 Nos.	Each
18	Provision of Solar Light compact all in one Solar Street Light integrated design Easy installation invironmental friendly Model No LRC 80 w LED Brand leadray LED power 70, 80 watts Solar panel power 36V 110 watts infared senor Availabe. Color Silver , imporated make in/c fitted on existing pole or wall etc complete	1 Nos.	Each
19	P/F Steel Tubler Pole 25'ft long (20"x5" +5'x4") with required size angle iron for search light in/c excavation of earth for fixing the pole 4'ft depth at ground level and making C.C foundation ratio 1:3:6 and coller 3 coats etc as required	1 Nos.	Each

Total B	_____
Total A	_____
Grand Total A+B	_____

CONDITIONS.

- 1 Any typographical errors in the Schedule "B" are subject to correction with the reference in the Schedule of Rates General 2012, inforced from 12.07.2012 as approved by the SRC karachi Sindh
- 2 Arbitration Clause stands from the Agreement.
- 3 No premium shall be paid on Non Schedule items
- 4 No cartage of any item of material either supplied by department of arrange by the contractor shall be paid
- 5 The contractor squoting exorbitant will be required to submit Rate Analysis to justify their rates within specified time other wise the concerned contrator shall be treated as aquality of misconduct and he shass be liable to face punitive action under the rules as per EDO (W&S) department letter No EDO/W&S/CDGK/565/dated 29-09-2004

CONTRACTOR


EXECUTIVE ENGINEER
MINORITIES AFFAIRS DEPARTMENT
GOVERNMENT OF SINDH

STANDARD BIDDING DOCUMENTS

FOR

**Renovation of Guru Balpuri Astan near Thana Ahmed
Khan Taluka Thana Bula Khan District Jamshoro (Part A
Hall (Electric Work)**

1.00 (M)

BIDDING DATA

(This section should be filled in by the Engineer/Procuring Agency before issuance of the Bidding Documents).

(a). **Name of Procuring Agency:-** Executive Engineer, Minorities Affairs Sindh

(b). **Brief Description of Works: 09-** Renovation of Guru Balpuri Astan near Thana Ahmed Khan Taluka Thana Bula Khan District Jamshoro (Part A Hall (Electric Work)

(c). **Procuring Agency's address:-** Barrack No. 12, Block 4-A, Sindh Secretariat Karachi .

(d). **Estimated Cost:** 1.00 (Million)

(e). **Amount of Bid Security:-** 2% (Fill in lump sum amount or in % age of bid amount /estimated cost, but not exceeding 5%)

):- 15 days after the completion

(f). **Period of Bid Validity: (15 days** of Civil/ Building work (Not more than sixty days).

(g). **Security Deposit :- (including bid security:-** 10% .
(in % age of bid amount /estimated cost equal to 10%)

(h). **Percentage, if any, to be deducted from bills-** 8% .

(i). **Deadline for Submission of Bids along with time:** 06-06-2018 upto 12:30 p.m.

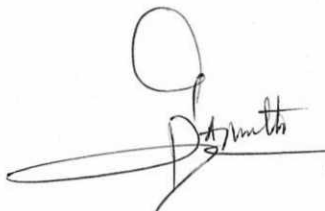
(j). **Venue, Time, and Date of Bid Opening:-** Office of the Executive Engineer, Minorities Affairs Sindh Barrack No.12, Block 4-A, Sindh Secretariat on 06-06-2018 at 12:30 p.m.

(k). **Time for Completion from written order of commence: -** 15 days after the completion of Civil/ Building work

(L). **Liquidity damages:-** 0.05% per day (0.05 of Estimated Cost or Bid cost per day of delay, but total not exceeding 10%).

(m). **Deposit Receipt No: Date: Amount:(in words and figures)**

(Executive Engineer/ Authority issuing bidding documents)


Executive Engineer
Minorities Affairs Department
Government of Sindh

" Schedule B."

Name of Work:- Renovation of Guru Balpuri Astan near Thana Ahmed Khan Taluka Thana Bula Khan District Jamshoro (Part A Hall (Electric Work)S.No 9

Lashaari nit 2018

S.No	Item of Work	Quantity.	Rate	Unit	Amount.
1	Wiring for light or fan point with 3/.029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required.(S.I.No. 124, Page No. 15).	34 Pts.	1130.00	P.Pt.	38420.00
2	Wiring for plug point with 3/.029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required. (S.I.No. 126 Page No. 15).	4 Pts.	985.00	P.Pt.	3940.00
3	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.029 copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 10 Page No. 2).	55.0 Mtrs.	222.00	P.Mtr.	12210.00
4	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.036 copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 11 Page No. 2).	25.00 Mtrs.	252.00	P.Mtr.	6300.00
5	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.044 (6mm ²) copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 12 Page No. 2).	20.0 Mtrs.	341.00	P.Mtr.	6820.00
6	Providing and laying (Main or sub Main)PVC insulated with size 4-7/.064 (16mm ²) copper conductor in 1-1/2" dia PVC conduit recessed in the wall or column as required. (S.I.No. 42 Page No. 2).	25.0 Mtrs.	1213.00	P.Mtr.	30325.00
7	Providing and fixing Circuit Breaker 6,10,15,20,30,40,50 & 63 Amps: SP (TB-5S) on prepared board as required.(S.I.No. 203, Page No. 31).	8 Nos	916.00	Each.	7328.00
8	Providing and fixing Circuit Breaker 3,5,10,15,20 & 30 Amps: TP (XS-30NS[NB]) on prepared board as required.(S.I.No. 205, Page No. 31).	1 Nos	5301.00	Each.	5301.00
9	Providing and fixing Circuit Breaker 3,5,10,15,20 , 30,40,50 & 60 Amps: TP (XS-30NS[NB]) on prepared board as required.(S.I.No. 206, Page No. 31).	1 Nos	5521.00	Each.	5521.00
10	P/F Circuit breaker 15,20,30,40,50,60,75 & 100 Amps: T.P. (XS-100NS) on prepared board as required.(S.I.No. 206, Page No. 31)	1 No	9261.00	Each.	9261.00
11	Providing & fixing Bakelite ceiling rose with two terminals. (S.I.No. 228, Page No. 33)	10 Nos	72.00	Each	720.00
12	Providing and Fixing Brass Battern Holder. (S.I.No. 232, Page No. 33)	10 Nos	70.00	Each	700.00

Total 126846.00

Add **% Above/Below**

Total **"A"**

PART "B" NON SCHEDULE ITEMS.

1	P/F Switch 5 Amps: imported Make i/c plastic board imported make etc complete.	34 Nos.		Each	
2	P/F 2 Pin 5 Amps:plug socket imported Make i/c plastic board with necessary electric connection etc complete.	4 Nos.		Each	
3	P/F fancy type 3 pin 5 Amps: S.P. plug socket switch & shoe unit imported Make with board i/c necessary connection and recessed in the wall etc, complete.	12 Nos.		Each	
4	P/F fancy type 3 pin 15 Amps: S.P. plug socket switch & shoe unit imported Make with board i/c necessary connection and recessed in the wall etc, complete.	6 Nos.		Each.	
5	P/F Fan dimmer fancy type Imported make with necessary connection.	10 Nos.		Each.	
6	P/F Ceiling Fan 56" sweep imported make with necessary electric connection etc, complete.	10 Nos.		Each	
7	P/F Ceiling Light LED 18 watt Imported make with Metal Base i/c necessary connection etc, complete.	30 Nos.		Each	
8	P/F Wall Bracket 18" sweep imported make or equalent quality i/c necessary electric connection etc, complete.	6 Nos.		Each	


9	P/F distribution board 18 SWG double shutter to accommodate circuit breakers i/c painting with enamelled paint and for other similar jobs etc complete	6.00 Sft	P.Sft
10	P/F Earthing set with 1-1/2x1-1/2"x1/4" GI plate buried in the ground at depth of 12-ft: water comes out from the ground level with salt and charcoal etc i/c providing GI pipe and copper wire 8-SWG etc complete.	1 Sets	Each
11	Providing & fixing Energy Saver 18 to 24 Watts approved quality etc, complete.	24 Nos.	Each
12	P/F Sollar Pannel 100x2= 200 watts German make or equilent it complete with G.I Bracket fixed in position i/c necessary connection with Battery, sensor with pannel testing taping etc complete	5 Nos.	Each
13	P/F Dry battery 200 amps fixed with proper it matlic box i/c cooling arangment with thermopole sheet to protect to sun heat complete with G.I Bracket fixed in position i/c necessary connection with sensor, pannel testing taping etc complete	2 Nos.	Each.
14	P/F Automatic sencer suitable for 200 amps pannel fixed in matlic box fixed in position i/c necessary connection with sensor, pannel testing taping etc complete	2 Nos.	Each.
15	P/F Ceiling Light LED 7 to 11 watts Imported make with Metal Base holder screw type i/c necessary connection etc, complete.	17 Nos.	Each
16	P/F Wall Bracket 16" sweep D.C type suitable for sollar energy imporated make i/c necessary electric connection etc, complete.	1 Nos.	Each
17	P/F Ceiling fan 56" sweep D.C type suitable for sollar energy imporated make i/c necessary electric connection etc, complete.	4 Nos.	Each
18	Provision of Solar Light compact all in one Solar Street Light integrated design Easy installation invironmental friendly Model No LRC 80 w LED Brand leadray LED power 70, 80 watts Solar panel power 36V 110 watts infared senor Availabe. Color Silver , imporated make in/c fitted on existing pole or wall etc complete	1 Nos.	Each
19	P/F Steel Tubler Pole 25'ft long (20"x5" +5'x4") with required size angle iron for search light in/c excavation of earth for fixing the pole 4'ft depth at ground level and making C.C foundation ratio 1:3:6 and coller 3 coats etc as required	1 Nos.	Each

Total B _____
 Total A _____
Grand Total A+B _____

CONDITIONS.

- 1 Any typographical errors in the Schedule "B" are subject to correction with the reference in the Schedule of Rates General 2012, inforced from 12.07.2012 as approved by the SRC karachi Sindh
- 2 Arbitration Clause stands from the Agreement.
- 3 No premium shall be paid on Non Schedule items
- 4 No cartage of any item of material either supplied by department of arrange by the contractor shall be paid
- 5 The contractor squoting exorbitant will be required to submit Rate Analysis to justify their rates within specified time other wise the concerned contrator shall be treated as aquality of misconduct and he shass be liable to face punitive action under the rules as per EDO (W&S) department letter No EDO/W&S/CDGK/565 dated 29-09-2004

CONTRACTOR


 EXECUTIVE ENGINEER
 MINORITIES AFFAIRS DEPARTMENT
 GOVERNMENT OF SINDH

STANDARD BIDDING DOCUMENTS

FOR

**Renovation of Guru Balpuri Aastan near Thana Ahmed
Taluka Thana Bula Khan District Jamshoro (Part B
External Development)**

1.00 (M)

BIDDING DATA

(This section should be filled in by the Engineer/Procuring Agency before issuance of the Bidding Documents).

(a). **Name of Procuring Agency:-** Executive Engineer, Minorities Affairs Sindh

(b). **Brief Description of Works: 10-** Renovation of Guru Balpuri Aastan near Thana Ahmed Taluka Thana Bula Khan District Jamshoro (Part B External Development)

(c). **Procuring Agency's address:-** Barrack No. 12, Block 4-A, Sindh Secretariat Karachi .

(d). **Estimated Cost:** 1.00 (Million)

(e). **Amount of Bid Security:-** 2% (Fill in lump sum amount or in % age of bid amount /estimated cost, but not exceeding 5%)

):- 15 days after the completion

(f). **Period of Bid Validity: (15 days** of Civil/ Building work (Not more than sixty days).

(g). **Security Deposit :- (including bid security:-** 10% .
(in % age of bid amount /estimated cost equal to 10%)

(h). **Percentage, if any, to be deducted from bills-** 8% .

(i). **Deadline for Submission of Bids along with time:** 06-06-2018 upto 12:30 p.m.

(j). **Venue, Time, and Date of Bid Opening:-** Office of the Executive Engineer, Minorities Affairs Sindh Barrack No.12, Block 4-A, Sindh Secretariat on 06-06-2018 at 12:30 p.m.

(k). **Time for Completion from written order of commence: -** 15 days after the completion of Civil/ Building work

(L). **Liquidity damages:-** 0.05% per day (0.05 of Estimated Cost or Bid cost per day of delay, but total not exceeding 10%).

(m). **Deposit Receipt No: Date: Amount:(in words and figures)**

(Executive Engineer/ Authority issuing bidding documents)


Executive Engineer
Minorities Affairs Department
Government of Sindh

" Schedule B."

**Name of Work:- Renovation of Guru Balpuri Aastan near Thana Ahmed Taluka Thana Bula Khan
District Jamshoro (Part B External Development) S.No 10**

Lashaari nit 2018

S.No	Item of Work	Quantity.	Rate	Unit	Amount.
1	Wiring for light or fan point with 3/.029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required.(S.I.No. 124, Page No. 15).	34 Pts.	1130.00	P.Pt.	38420.00
2	Wiring for plug point with 3/.029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required. (S.I.No. 126 Page No. 15).	4 Pts.	985.00	P.Pt.	3940.00
3	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.029 copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 10 Page No. 2).	55.0 Mtrs.	222.00	P.Mtr.	12210.00
4	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.036 copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 11 Page No. 2).	25.00 Mtrs.	252.00	P.Mtr.	6300.00
5	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.044 (6mm ²) copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 12 Page No. 2).	20.0 Mtrs.	341.00	P.Mtr.	6820.00
6	Providing and laying (Main or sub Main)PVC insulated with size 4-7/.064 (16mm ²) copper conductor in 1-1/2" dia PVC conduit recessed in the wall or column as required. (S.I.No. 42 Page No. 2).	25.0 Mtrs.	1213.00	P.Mtr.	30325.00
7	Providing and fixing Circuit Breaker 6,10,15,20,30,40,50 & 63 Amps: SP (TB-5S) on prepared board as required.(S.I.No. 203, Page No. 31).	8 Nos	916.00	Each.	7328.00
8	Providing and fixing Circuit Breaker 3,5,10,15,20 & 30 Amps: TP (XS-30NS[NB]) on prepared board as required.(S.I.No. 205, Page No. 31).	1 Nos	5301.00	Each.	5301.00
9	Providing and fixing Circuit Breaker 3,5,10,15,20 , 30,40,50 & 60 Amps: TP (XS-30NS[NB]) on prepared board as required.(S.I.No. 206, Page No. 31).	1 Nos	5521.00	Each.	5521.00
10	P/F Circuit breaker 15,20,30,40,50,60,75 & 100 Amps: T.P. (XS-100NS) on prepared board as required.(S.I.No. 206, Page No. 31)	1 No	9261.00	Each.	9261.00
11	Providing & fixing Bakelite ceiling rose with two terminals. (S.I.No. 228, Page No. 33)	10 Nos	72.00	Each	720.00
12	Providing and Fixing Brass Battern Holder. (S.I.No. 232, Page No. 33)	10 Nos	70.00	Each	700.00
Total					126846.00
Add					
% Above/Below					
Total					"A"

PART "B" NON SCHEDULE ITEMS.

1	P/F Switch 5 Amps: imported Make i/c plastic board imported make etc complete.	34 Nos.		Each	
2	P/F 2 Pin 5 Amps:plug socket imported Make i/c plastic board with necessary electric connection etc complete.	4 Nos.		Each	
3	P/F fancy type 3 pin 5 Amps: S.P. plug socket switch & shoe unit imported Make with board i/c necessary connection and recessed in the wall etc, complete.	12 Nos.		Each	
4	P/F fancy type 3 pin 15 Amps: S.P. plug socket switch & shoe unit imported Make with board i/c necessary connection and recessed in the wall etc, complete.	6 Nos.		Each.	
5	P/F Fan dimmer fancy type Imported make with necessary connection.	10 Nos.		Each.	
6	P/F Ceiling Fan 56" sweep imported make with necessary electric connection etc, complete.	10 Nos.		Each	
7	P/F Ceiling Light LED 18 watt Imported make with Metal Base i/c necessary connection etc, complete.	30 Nos.		Each	
8	P/F Wall Bracket 18" sweep imported make or equalent quality i/c necessary electric connection etc, complete.	6 Nos.		Each	

9	P/F distribution board 18 SWG double shutter to accommodate circuit breakers i/c painting with enamelled paint and for other similar jobs etc complete	6.00 Sft	P.Sft
10	P/F Earthing set with 1-1/2x1-1/2"x1/4" GI plate buried in the ground at depth of 12-ft: water comes out from the ground level with salt and charcoal etc i/c providing GI pipe and copper wire 8-SWG etc complete.	1 Sets	Each
11	Providing & fixing Energy Saver 18 to 24 Watts approved quality etc, complete.	24 Nos.	Each
12	P/F Sollar Pannel 100x2= 200 watts German make or equivalent it complete with G.I Breaket fixed in position i/c necessary connection with Battery, sensor with pannel testing taping etc complete	5 Nos.	Each
13	P/F Dry battery 200 amps fixed with proper it matlic box i/c cooling arangment with thermopole sheet to protect to sun heat complete with G.I Breaket fixed in position i/c necessary connection with sensor, pannel testing taping etc complete	2 Nos.	Each.
14	P/F Automatic sencer suitable for 200 amps pannel fixed in matlic box fixed in position i/c necessary connection with sensor, pannel testing taping etc complete	2 Nos.	Each.
15	P/F Ceiling Light LED 7 to 11 watts Imported make with Metal Base holder screw type i/c necessary connection etc, complete.	17 Nos.	Each
16	P/F Wall Bracket 16" sweep D.C type suitable for sollar energy imporated make i/c necessary electric connection etc, complete.	1 Nos.	Each
17	P/F Ceiling fan 56" sweep D.C type suitable for sollar energy imporated make i/c necessary electric connection etc, complete.	4 Nos.	Each
18	Provision of Solar Light compact all in one Solar Street Light integrated design Easy installation invironmental friendly Model No LRC 80 w LED Brand leadray LED power 70, 80 watts Solar panel power 36V 110 watts infared senor Availabe. Color Silver , imporated make in/c fitted on existing pole or wall etc complete	1 Nos.	Each
19	P/F Steel Tubler Pole 25'ft long (20"x5" +5"x4") with required size angle iron for search light in/c excavation of earth for fixing the pole 4'ft depth at ground level and making C.C foundation ratio 1:3:6 and coller 3 coats etc as required	1 Nos.	Each

Each _____
Total B _____
Total A _____
Grand Total A+B _____

CONDITIONS.

- 1 Any typographical errors in the Schedule "B" are subject to correction with the reference in the Schedule of Rates General 2012, inforced from 12.07.2012 as approved by the SRC karachi Sindh
- 2 Arbitration Clause stands from the Agreement.
- 3 No premium shall be paid on Non Schedule items
- 4 No cartage of any item of material either supplied by department of arrange by the contractor shall be paid
- 5 The contractor squoting exorbitant will be required to submit Rate Analysis to justify their rates within specified time other wise the concerned contrator shall be treated as aquality of misconduct and he shass be liable to face punitive action under the rules as per EDO (W&S) department letter No EDO/W&S/CDGK/565 dated 29-09-2004

CONTRACTOR


EXECUTIVE ENGINEER
MINORITIES AFFAIRS DEPARTMENT
GOVERNMENT OF SINDH

STANDARD BIDDING DOCUMENTS

FOR

**Renovation of Guru Balpuri Aastan near Thana Ahmed
Taluka Thana Bula Khan District Jamshoro (Part C Bath
Room)**

1.00 (M)

BIDDING DATA

(This section should be filled in by the Engineer/Procuring Agency before issuance of the Bidding Documents).

(a). **Name of Procuring Agency:-** Executive Engineer, Minorities Affairs Sindh

(b). **Brief Description of Works: 11-** Renovation of Guru Balpuri Aastan near Thana Ahmed Taluka Thana Bula Khan District Jamshoro (Part C Bath Room)

(c). **Procuring Agency's address:-** Barrack No. 12, Block 4-A, Sindh Secretariat Karachi .

(d). **Estimated Cost:** 1.00 (Million)

(e). **Amount of Bid Security:-** 2% (Fill in lump sum amount or in % age of bid amount /estimated cost, but not exceeding 5%)

):- 15 days after the completion

(f). **Period of Bid Validity: (15 days of Civil/ Building work** (Not more than sixty days).

(g). **Security Deposit :- (including bid security:-** 10%
(in % age of bid amount /estimated cost equal to 10%)

(h). **Percentage, if any, to be deducted from bills-** 8%

(i). **Deadline for Submission of Bids along with time:** 06-06-2018 upto 12:30 p.m.

(j). **Venue, Time, and Date of Bid Opening:-** Office of the Executive Engineer, Minorities Affairs Sindh Barrack No.12, Block 4-A, Sindh Secretariat on 06-06-2018 at 12:30 p.m.

(k). **Time for Completion from written order of commence: -** 15 days after the completion of Civil/ Building work

(L). **Liquidity damages:-** 0.05% per day (0.05 of Estimated Cost or Bid cost per day of delay, but total not exceeding 10%).

(m). **Deposit Receipt No: Date: Amount:(in words and figures)**

(Executive Engineer/ Authority issuing bidding documents)


Executive Engineer
Minorities Affairs Department
Government of Sindh

" Schedule B."

**Name of Work:Renovation of Guru Balpuri Aastan near Thana Ahmed Taluka Thana Bula Khan
District Jamshoro (Part C Bath Room)S.No 11**

Lashaari nit 2018

S.No	Item of Work	Quantity.	Rate	Unit	Amount.
1	Wiring for light or fan point with 3/.029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required.(S.I.No. 124, Page No. 15).	34 Pts.	1130.00	P.Pt.	38420.00
2	Wiring for plug point with 3/.029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required. (S.I.No. 126 Page No. 15).	4 Pts.	985.00	P.Pt.	3940.00
3	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.029 copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 10 Page No. 2).	55.0 Mtrs.	222.00	P.Mtr.	12210.00
4	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.036 copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 11 Page No. 2).	25.00 Mtrs.	252.00	P.Mtr.	6300.00
5	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.044 (6mm ²) copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 12 Page No. 2).	20.0 Mtrs.	341.00	P.Mtr.	6820.00
6	Providing and laying (Main or sub Main)PVC insulated with size 4-7/.064 (16mm ²) copper conductor in 1-1/2" dia PVC conduit recessed in the wall or column as required. (S.I.No. 42 Page No. 2).	25.0 Mtrs.	1213.00	P.Mtr.	30325.00
7	Providing and fixing Circuit Breaker 6,10,15,20,30,40,50 & 63 Amps: SP (TB-5S) on prepared board as required.(S.I.No. 203, Page No. 31).	8 Nos	916.00	Each.	7328.00
8	Providing and fixing Circuit Breaker 3,5,10,15,20 & 30 Amps: TP (XS-30NS[NB]) on prepared board as required.(S.I.No. 205, Page No. 31).	1 Nos	5301.00	Each.	5301.00
9	Providing and fixing Circuit Breaker 3,5,10,15,20 , 30,40,50 & 60 Amps: TP (XS-30NS[NB]) on prepared board as required.(S.I.No. 206, Page No. 31).	1 Nos	5521.00	Each.	5521.00
10	P/F Circuit breaker 15,20,30,40,50,60,75 & 100 Amps: T.P. (XS-100NS) on prepared board as required.(S.I.No. 206, Page No. 31)	1 No	9261.00	Each.	9261.00
11	Providing & fixing Bakelite ceiling rose with two terminals. (S.I.No. 228, Page No. 33)	10 Nos	72.00	Each	720.00
12	Providing and Fixing Brass Battern Holder. (S.I.No. 232, Page No. 33)	10 Nos	70.00	Each	700.00
Total					126846.00
Add					
% Above/Below					
Total					"A"

PART "B" NON SCHEDULE ITEMS.

1	P/F Switch 5 Amps: imported Make i/c plastic board imported make etc complete.	34 Nos.		Each	
2	P/F 2 Pin 5 Amps:plug socket imported Make i/c plastic board with necessary electric connection etc complete.	4 Nos.		Each	
3	P/F fancy type 3 pin 5 Amps: S.P. plug socket switch & shoe unit imported Make with board i/c necessary connection and recessed in the wall etc, complete.	12 Nos.		Each	
4	P/F fancy type 3 pin 15 Amps: S.P. plug socket switch & shoe unit imported Make with board i/c necessary connection and recessed in the wall etc, complete.	6 Nos.		Each.	
5	P/F Fan dimmer fancy type Imported make with necessary connection.	10 Nos.		Each.	
6	P/F Ceiling Fan 56" sweep imported make with necessary electric connection etc, complete.	10 Nos.		Each	
7	P/F Ceiling Light LED 18 watt Imported make with Metal Base i/c necessary connection etc, complete.	30 Nos.		Each	
8	P/F Wall Bracket 18" sweep imported make or equalent quality i/c necessary electric connection etc, complete.	6 Nos.		Each	

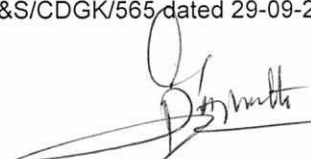
9	P/F distribution board 18 SWG double shutter to accommodate circuit breakers i/c painting with enamelled paint and for other similar jobs etc complete	6.00 Sft	P.Sft
10	P/F Earthing set with 1-1/2x1-1/2"x1/4" GI plate buried in the ground at depth of 12-ft: water comes out from the ground level with salt and charcoal etc i/c providing GI pipe and copper wire 8-SWG etc complete.	1 Sets	Each
11	Providing & fixing Energy Saver 18 to 24 Watts approved quality etc, complete.	24 Nos.	Each
12	P/F Sollar Pannel 100x2= 200 watts German make or equilent it complete with G.I Breaket fixed in position i/c necessary connection with Battery, sensor with pannel testing taping etc complete	5 Nos.	Each
13	P/F Dry battery 200 amps fixed with proper it matlic box i/c cooling arangment with thermopole sheet to protect to sun heat complete with G.I Breaket fixed in position i/c necessary connection with sensor, pannel testing taping etc complete	2 Nos.	Each.
14	P/F Automatic sencer suitable for 200 amps pannel fixed in matlic box fixed in position i/c necessary connection with sensor, pannel testing taping etc complete	2 Nos.	Each.
15	P/F Ceiling Light LED 7 to 11 watts Imported make with Metal Base holder screw type i/c necessary connection etc, complete.	17 Nos.	Each
16	P/F Wall Bracket 16" sweep D.C type suitable for sollar energy imporated make i/c necessary electric connection etc, complete.	1 Nos.	Each
17	P/F Ceiling fan 56" sweep D.C type suitable for sollar energy imporated make i/c necessary electric connection etc, complete.	4 Nos.	Each
18	Provision of Solar Light compact all in one Solar Street Light integrated design Easy installation invironmental friendly Model No LRC 80 w LED Brand leadray LED power 70, 80 watts Solar panel power 36V 110 watts infared senor Availabe. Color Silver , imporated make in/c fitted on existing pole or wall etc complete	1 Nos.	Each
19	P/F Steel Tubler Pole 25ft long (20"x5" +5"x4") with required size angle iron for search light in/c excavation of earth for fixing the pole 4ft depth at ground level and making C.C foundation ratio 1:3:6 and coller 3 coats etc as required	1 Nos.	Each

Total B _____
 Total A _____
Grand Total A+B _____

CONDITIONS.

- 1 Any typographical errors in the Schedule "B" are subject to correction with the reference in the Schedule of Rates General 2012, inforced from 12.07.2012 as approved by the SRC karachi Sindh
- 2 Arbitration Clause stands from the Agreement.
- 3 No premium shall be paid on Non Schedule items
- 4 No cartage of any item of material either supplied by department of arrange by the contractor shall be paid
- 5 The contractor squoting exorbitant will be required to submit Rate Analysis to justify their rates within specified time other wise the concerned contrator shall be treated as aquality of misconduct and he shass be liable to face punitive action under the rules as per EDO (W&S) department letter No EDO/W&S/CDGK/565 dated 29-09-2004

CONTRACTOR


EXECUTIVE ENGINEER
MINORITIES AFFAIRS DEPARTMENT
GOVERNMENT OF SINDH

STANDARD BIDDING DOCUMENTS

FOR

**Renovation & External Development of shri Mangal Gir
Ashram Thana Bula khan District Jamshoro**

1.00 (M)

BIDDING DATA

(This section should be filled in by the Engineer/Procuring Agency before issuance of the Bidding Documents).

(a). **Name of Procuring Agency:-** Executive Engineer, Minorities Affairs Sindh

(b). **Brief Description of Works: 12-** Renovation & External Development of shri Mangal Gir Ashram Thana Bula khan District Jamshoro

(c). **Procuring Agency's address:-** Barrack No. 12, Block 4-A, Sindh Secretariat Karachi .

(d). **Estimated Cost:** 1.00 (Million)

(e). **Amount of Bid Security:-** 2% (Fill in lump sum amount or in % age of bid amount /estimated cost, but not exceeding 5%)

):- 15 days after the completion

(f). **Period of Bid Validity: (15 days of Civil/ Building work** (Not more than sixty days).

(g). **Security Deposit :- (including bid security:-** 10%
(in % age of bid amount /estimated cost equal to 10%)

(h). **Percentage, if any, to be deducted from bills-** 8%

(i). **Deadline for Submission of Bids along with time:** 06-06-2018 upto 12:30 p.m.


(j). **Venue, Time, and Date of Bid Opening:-** Office of the Executive Engineer, Minorities Affairs Sindh Barrack No.12, Block 4-A, Sindh Secretariat on 06-06-2018 at 12:30 p.m.

(k). **Time for Completion from written order of commence: -** 15 days after the completion of Civil/ Building work

(L). **Liquidity damages:-** 0.05% per day (0.05 of Estimated Cost or Bid cost per day of delay, but total not exceeding 10%).

(m). **Deposit Receipt No: Date: Amount:(in words and figures)**

(Executive Engineer/ Authority issuing bidding documents)


Executive Engineer
Minorities Affairs Department
Government of Sindh

" Schedule B."

**Name of Work:- Renovation & External Development of shri Mangal Gir Ashram Thana Bula khan
District Jamshoro S.No 12**

Lashaari nit 2018

S.No	Item of Work	Quantity.	Rate	Unit	Amount.
1	Wiring for light or fan point with 3/.029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required.(S.I.No. 124, Page No. 15).	34 Pts.	1130.00	P.Pt.	38420.00
2	Wiring for plug point with 3/.029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required. (S.I.No. 126 Page No. 15).	4 Pts.	985.00	P.Pt.	3940.00
3	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.029 copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 10 Page No. 2).	55.0 Mtrs.	222.00	P.Mtr.	12210.00
4	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.036 copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 11 Page No. 2).	25.00 Mtrs.	252.00	P.Mtr.	6300.00
5	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.044 (6mm ²) copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 12 Page No. 2).	20.0 Mtrs.	341.00	P.Mtr.	6820.00
6	Providing and laying (Main or sub Main)PVC insulated with size 4-7/.064 (16mm ²) copper conductor in 1-1/2" dia PVC conduit recessed in the wall or column as required. (S.I.No. 42 Page No. 2).	25.0 Mtrs.	1213.00	P.Mtr.	30325.00
7	Providing and fixing Circuit Breaker 6,10,15,20,30,40,50 & 63 Amps: SP (TB-5S) on prepared board as required.(S.I.No. 203, Page No. 31).	8 Nos	916.00	Each.	7328.00
8	Providing and fixing Circuit Breaker 3,5,10,15,20 & 30 Amps: TP (XS-30NS[NB]) on prepared board as required.(S.I.No. 205, Page No. 31).	1 Nos	5301.00	Each.	5301.00
9	Providing and fixing Circuit Breaker 3,5,10,15,20 , 30,40,50 & 60 Amps: TP (XS-30NS[NB]) on prepared board as required.(S.I.No. 206, Page No. 31).	1 Nos	5521.00	Each.	5521.00
10	P/F Circuit breaker 15,20,30,40,50,60,75 & 100 Amps: T.P. (XS-100NS) on prepared board as required.(S.I.No. 206, Page No. 31)	1 No	9261.00	Each.	9261.00
11	Providing & fixing Bakelite ceiling rose with two terminals. (S.I.No. 228, Page No. 33)	10 Nos	72.00	Each	720.00
12	Providing and Fixing Brass Battern Holder. (S.I.No. 232, Page No. 33)	10 Nos	70.00	Each	700.00

Total				126846.00
Add	% Above/Below			
	Total	"A"		

PART "B" NON SCHEDULE ITEMS.

1	P/F Switch 5 Amps: imported Make i/c plastic board imported make etc complete.	34 Nos.		Each	
2	P/F 2 Pin 5 Amps:plug socket imported Make i/c plastic board with necessary electric connection etc complete.	4 Nos.		Each	
3	P/F fancy type 3 pin 5 Amps: S.P. plug socket switch & shoe unit imported Make with board i/c necessary connection and recessed in the wall etc, complete.	12 Nos.		Each	
4	P/F fancy type 3 pin 15 Amps: S.P. plug socket switch & shoe unit imported Make with board i/c necessary connection and recessed in the wall etc, complete.	6 Nos.		Each.	
5	P/F Fan dimmer fancy type Imported make with necessary connection.	10 Nos.		Each.	
6	P/F Ceiling Fan 56" sweep imported make with necessary electric connection etc, complete.	10 Nos.		Each	
7	P/F Ceiling Light LED 18 watt Imported make with Metal Base i/c necessary connection etc, complete.	30 Nos.		Each	
8	P/F Wall Bracket 18" sweep imported make or equalent quality i/c necessary electric connection etc, complete.	6 Nos.		Each	

9	P/F distribution board 18 SWG double shutter to accommodate circuit breakers i/c painting with enamelled paint and for other similar jobs etc complete	6.00 Sft	P.Sft
10	P/F Earthing set with 1-1/2x1-1/2"x1/4" GI plate buried in the ground at depth of 12-ft: water comes out from the ground level with salt and charcoal etc i/c providing GI pipe and copper wire 8-SWG etc complete.	1 Sets	Each
11	Providing & fixing Energy Saver 18 to 24 Watts approved quality etc, complete.	24 Nos.	Each
12	P/F Sollar Pannel 100x2= 200 watts German make or equivalent it complete with G.I Breaket fixed in position i/c necessary connection with Battery, sensor with pannel testing taping etc complete	5 Nos.	Each
13	P/F Dry battery 200 amps fixed with proper it matlic box i/c cooling arangement with thermopole sheet to protect to sun heat complete with G.I Breaket fixed in position i/c necessary connection with sensor, pannel testing taping etc complete	2 Nos.	Each.
14	P/F Automatic sencer suitable for 200 amps pannel fixed in matlic box fixed in position i/c necessary connection with sensor, pannel testing taping etc complete	2 Nos.	Each.
15	P/F Ceiling Light LED 7 to 11 watts Imported make with Metal Base holder screw type i/c necessary connection etc, complete.	17 Nos.	Each
16	P/F Wall Bracket 16" sweep D.C type suitable for sollar energy imported make i/c necessary electric connection etc, complete.	1 Nos.	Each
17	P/F Ceiling fan 56" sweep D.C type suitable for sollar energy imported make i/c necessary electric connection etc, complete.	4 Nos.	Each
18	Provision of Solar Light compact all in one Solar Street Light integrated design Easy installation invironmental friendly Model No LRC 80 w LED Brand leadray LED power 70, 80 watts Solar panel power 36V 110 watts infared senor Availabe. Color Silver , imported make in/c fitted on existing pole or wall etc complete	1 Nos.	Each
19	P/F Steel Tubler Pole 25'ft long (20"x5" +5'x4") with required size angle iron for search light in/c excavation of earth for fixing the pole 4'ft depth at ground level and making C.C foundation ratio 1:3:6 and coller 3 coats etc as required	1 Nos.	Each

Each _____
Total B _____
Total A _____
Grand Total A+B _____

CONDITIONS.

- 1 Any typographical errors in the Schedule "B" are subject to correction with the reference in the Schedule of Rates General 2012, inforced from 12.07.2012 as approved by the SRC karachi Sindh
- 2 Arbitration Clause stands from the Agreement.
- 3 No premium shall be paid on Non Schedule items
- 4 No cartage of any item of material either supplied by department of arrange by the contractor shall be paid
- 5 The contractor squoting exorbitant will be required to submit Rate Analysis to justify their rates within specified time other wise the concerned contrator shall be treated as aquality of misconduct and he shass be liable to face punitive action under the rules as per EDO (W&S) department letter No EDO/W&S/CDGK/565 dated 29-09-2004

CONTRACTOR


EXECUTIVE ENGINEER
MINORITIES AFFAIRS DEPARTMENT
GOVERNMENT OF SINDH

STANDARD BIDDING DOCUMENTS

FOR

**Repair/Renovation & Construction of Anand Nawaz Darbar
Thana Bula Khan City**

1.00 (M)

BIDDING DATA

(This section should be filled in by the Engineer/Procuring Agency before issuance of the Bidding Documents).

(a). **Name of Procuring Agency:-** Executive Engineer, Minorities Affairs Sindh

(b). **Brief Description of Works: 13-** Repair/Renovation & Construction of Anand Nawaz Darbar Thana Bula Khan City

(c). **Procuring Agency's address:-** Barrack No. 12, Block 4-A, Sindh Secretariat Karachi .

(d). **Estimated Cost:** 1.00 (Million)

(e). **Amount of Bid Security:-** 2% (Fill in lump sum amount or in % age of bid amount /estimated cost, but not exceeding 5%)

):- 15 days after the completion

(f). **Period of Bid Validity: (15 days** of Civil/ Building work (Not more than sixty days).

(g). **Security Deposit :- (including bid security:-** 10%
(in % age of bid amount /estimated cost equal to 10%)

(h). **Percentage, if any, to be deducted from bills-** 8%

(i). **Deadline for Submission of Bids along with time:** 06-06-2018 upto 12:30 p.m.


(j). **Venue, Time, and Date of Bid Opening:-** Office of the Executive Engineer, Minorities Affairs Sindh Barrack No.12, Block 4-A, Sindh Secretariat on 06-06-2018 at 12:30 p.m.

(k). **Time for Completion from written order of commence: -** 15 days after the completion of Civil/ Building work

(L). **Liquidity damages:-** 0.05% per day (0.05 of Estimated Cost or Bid cost per day of delay, but total not exceeding 10%).

(m). **Deposit Receipt No: Date: Amount:(in words and figures)**

(Executive Engineer/ Authority issuing bidding documents)


Executive Engineer
Minorities Affairs Department
Government of Sindh

" Schedule B."

**Name of Work:- Repair/Renovation & Construction of Anand Nawaz Darbar Thana Bula Khan City
S.No 13**

Lashaari nit 2018

S.No	Item of Work	Quantity.	Rate	Unit	Amount.
1	Wiring for light or fan point with 3/.029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required.(S.I.No. 124, Page No. 15).	34 Pts.	1130.00	P.Pt.	38420.00
2	Wiring for plug point with 3/.029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required. (S.I.No. 126 Page No. 15).	4 Pts.	985.00	P.Pt.	3940.00
3	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.029 copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 10 Page No. 2).	55.0 Mtrs.	222.00	P.Mtr.	12210.00
4	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.036 copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 11 Page No. 2).	25.00 Mtrs.	252.00	P.Mtr.	6300.00
5	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.044 (6mm2) copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 12 Page No. 2).	20.0 Mtrs.	341.00	P.Mtr.	6820.00
6	Providing and laying (Main or sub Main)PVC insulated with size 4-7/.064 (16mm2) copper conductor in 1-1/2" dia PVC conduit recessed in the wall or column as required. (S.I.No. 42 Page No. 2).	25.0 Mtrs.	1213.00	P.Mtr.	30325.00
7	Providing and fixing Circuit Breaker 6,10,15,20,30,40,50 & 63 Amps: SP (TB-5S) on prepared board as required.(S.I.No. 203, Page No. 31).	8 Nos	916.00	Each.	7328.00
8	Providing and fixing Circuit Breaker 3,5,10,15,20 & 30 Amps: TP (XS-30NS[NB]) on prepared board as required.(S.I.No. 205, Page No. 31).	1 Nos	5301.00	Each.	5301.00
9	Providing and fixing Circuit Breaker 3,5,10,15,20 , 30,40,50 & 60 Amps: TP (XS-30NS[NB]) on prepared board as required.(S.I.No. 206, Page No. 31).	1 Nos	5521.00	Each.	5521.00
10	P/F Circuit breaker 15,20,30,40,50,60,75 & 100 Amps: T.P. (XS-100NS) on prepared board as required.(S.I.No. 206, Page No. 31)	1 No	9261.00	Each.	9261.00
11	Providing & fixing Bakelite ceiling rose with two terminals. (S.I.No. 228, Page No. 33)	10 Nos	72.00	Each	720.00
12	Providing and Fixing Brass Battern Holder. (S.I.No. 232, Page No. 33)	10 Nos	70.00	Each	700.00

Total 126846.00

Add % Above/Below

Total **"A"**

PART "B" NON SCHEDULE ITEMS.

1	P/F Switch 5 Amps: imported Make i/c plastic board imported make etc complete.	34 Nos.		Each	
2	P/F 2 Pin 5 Amps:plug socket imported Make i/c plastic board with necessary electric connection etc complete.	4 Nos.		Each	
3	P/F fancy type 3 pin 5 Amps: S.P. plug socket switch & shoe unit imported Make with board i/c necessary connection and recessed in the wall etc, complete.	12 Nos.		Each	
4	P/F fancy type 3 pin 15 Amps: S.P. plug socket switch & shoe unit imported Make with board i/c necessary connection and recessed in the wall etc, complete.	6 Nos.		Each.	
5	P/F Fan dimmer fancy type Imported make with necessary connection.	10 Nos.		Each.	
6	P/F Ceiling Fan 56" sweep imported make with necessary electric connection etc, complete.	10 Nos.		Each	
7	P/F Ceiling Light LED 18 watt Imported make with Metal Base i/c necessary connection etc, complete.	30 Nos.		Each	
8	P/F Wall Bracket 18" sweep imported make or equalent quality i/c necessary electric connection etc, complete.	6 Nos.		Each	


9	P/F distribution board 18 SWG double shutter to accommodate circuit breakers i/c painting with enamelled paint and for other similar jobs etc complete	6.00 Sft	P.Sft
10	P/F Earthing set with 1-1/2x1-1/2"x1/4" GI plate buried in the ground at depth of 12-ft: water comes out from the ground level with salt and charcoal etc i/c providing GI pipe and copper wire 8-SWG etc complete.	1 Sets	Each
11	Providing & fixing Energy Saver 18 to 24 Watts approved quality etc, complete.	24 Nos.	Each
12	P/F Sollar Pannel 100x2= 200 watts German make or equilent it complete with G.I Breaket fixed in position i/c necessary connection with Battery, sensor with pannel testing taping etc complete	5 Nos.	Each
13	P/F Dry battery 200 amps fixed with proper it matlic box i/c cooling arangement with thermopole sheet to protect to sun heat complete with G.I Breaket fixed in position i/c necessary connection with sensor, pannel testing taping etc complete	2 Nos.	Each.
14	P/F Automatic sencer suitable for 200 amps pannel fixed in matlic box fixed in position i/c necessary connection with sensor, pannel testing taping etc complete	2 Nos.	Each.
15	P/F Ceiling Light LED 7 to 11 watts Imported make with Metal Base holder screw type i/c necessary connection etc, complete.	17 Nos.	Each
16	P/F Wall Bracket 16" sweep D.C type suitable for sollar energy imporated make i/c necessary electric connection etc, complete.	1 Nos.	Each
17	P/F Ceiling fan 56" sweep D.C type suitable for sollar energy imporated make i/c necessary electric connection etc, complete.	4 Nos.	Each
18	Provision of Solar Light compact all in one Solar Street Light integrated design Easy installation invironmental friendly Model No LRC 80 w LED Brand leadray LED power 70, 80 watts Solar panel power 36V 110 watts infared senor Availabe. Color Silver , imporated make in/c fitted on existing pole or wall etc complete	1 Nos.	Each
19	P/F Steel Tubler Pole 25'ft long (20"x5" +5'x4") with required size angle iron for search light in/c excavation of earth for fixing the pole 4'ft depth at ground level and making C.C foundation ratio 1:3:6 and coller 3 coats etc as required	1 Nos.	Each

Total B _____
 Total A _____
 Grand Total A+B _____

CONDITIONS.

- 1 Any typographical errors in the Schedule "B" are subject to correction with the reference in the Schedule of Rates General 2012, inforced from 12.07.2012 as approved by the SRC karachi Sindh
- 2 Arbitration Clause stands from the Agreement.
- 3 No premium shall be paid on Non Schedule items
- 4 No cartage of any item of material either supplied by department of arrange by the contractor shall be paid
- 5 The contractor squoting exorbitant will be required to submit Rate Analysis to justify their rates within specified time other wise the concerned contrator shall be treated as aquality of misconduct and he shass be liable to face punitive action under the rules as per EDO (W&S) department letter No EDO/W&S/CDGK/565 dated 29-09-2004

CONTRACTOR


EXECUTIVE ENGINEER
MINORITIES AFFAIRS DEPARTMENT
GOVERNMENT OF SINDH

STANDARD BIDDING DOCUMENTS

FOR

**Reconstruction of Hindu Panchati Hall @ Ratedero District
Larkana**

1.00 (M)

BIDDING DATA

(This section should be filled in by the Engineer/Procuring Agency before issuance of the Bidding Documents).

(a). **Name of Procuring Agency:-** Executive Engineer, Minorities Affairs Sindh

(b). **Brief Description of Works:** 14-Reconstruction of Hindu Panchati Hall @ Ratero District Larkana

(c). **Procuring Agency's address:-** Barrack No. 12, Block 4-A, Sindh Secretariat Karachi .

(d). **Estimated Cost:** 1.00 (Million)

(e). **Amount of Bid Security:-** 2% (Fill in lump sum amount or in % age of bid amount /estimated cost, but not exceeding 5%)

):- 15 days after the completion

(f). **Period of Bid Validity:** (15 days of Civil/ Building work (Not more than sixty days).

(g). **Security Deposit :- (including bid security:-** 10%
(in % age of bid amount /estimated cost equal to 10%)

(h). **Percentage, if any, to be deducted from bills-** 8%

(i). **Deadline for Submission of Bids along with time:** 06-06-2018 upto 12:30 p.m.


(j). **Venue, Time, and Date of Bid Opening:-** Office of the Executive Engineer, Minorities Affairs Sindh Barrack No.12, Block 4-A, Sindh Secretariat on 06-06-2018 at 12:30 p.m.

(k). **Time for Completion from written order of commence:** - 15 days after the completion of Civil/ Building work

(L). **Liquidity damages:-** 0.05% per day (0.05 of Estimated Cost or Bid cost per day of delay, but total not exceeding 10%).

(m). **Deposit Receipt No: Date: Amount:**(in words and figures)

(Executive Engineer/ Authority issuing bidding documents)


Executive Engineer
Minorities Affairs Department
Government of Sindh

" Schedule B."

Name of Work:- Reconstruction of Hindu Panchati Hall @ Ratedero District LarkanaS.No 14

Lashaari nit 2018

S.No	Item of Work	Quantity.	Rate	Unit	Amount.
1	Wiring for light or fan point with 3/.029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required.(S.I.No. 124, Page No. 15).	34 Pts.	1130.00	P.Pt.	38420.00
2	Wiring for plug point with 3/.029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required. (S.I.No. 126 Page No. 15).	4 Pts.	985.00	P.Pt.	3940.00
3	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.029 copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 10 Page No. 2).	55.0 Mtrs.	222.00	P.Mtr.	12210.00
4	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.036 copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 11 Page No. 2).	25.00 Mtrs.	252.00	P.Mtr.	6300.00
5	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.044 (6mm ²) copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 12 Page No. 2).	20.0 Mtrs.	341.00	P.Mtr.	6820.00
6	Providing and laying (Main or sub Main)PVC insulated with size 4-7/.064 (16mm ²) copper conductor in 1-1/2" dia PVC conduit recessed in the wall or column as required. (S.I.No. 42 Page No. 2).	25.0 Mtrs.	1213.00	P.Mtr.	30325.00
7	Providing and fixing Circuit Breaker 6,10,15,20,30,40,50 & 63 Amps: SP (TB-5S) on prepared board as required.(S.I.No. 203, Page No. 31).	8 Nos	916.00	Each.	7328.00
8	Providing and fixing Circuit Breaker 3,5,10,15,20 & 30 Amps: TP (XS-30NS[NB]) on prepared board as required.(S.I.No. 205, Page No. 31).	1 Nos	5301.00	Each.	5301.00
9	Providing and fixing Circuit Breaker 3,5,10,15,20 , 30,40,50 & 60 Amps: TP (XS-30NS[NB]) on prepared board as required.(S.I.No. 206, Page No. 31).	1 Nos	5521.00	Each.	5521.00
10	P/F Circuit breaker 15,20,30,40,50,60,75 & 100 Amps: T.P. (XS-100NS) on prepared board as required.(S.I.No. 206, Page No. 31)	1 No	9261.00	Each.	9261.00
11	Providing & fixing Bakelite ceiling rose with two terminals. (S.I.No. 228, Page No. 33)	10 Nos	72.00	Each	720.00
12	Providing and Fixing Brass Battern Holder. (S.I.No. 232, Page No. 33)	10 Nos	70.00	Each	700.00
Total					126846.00
Add					
% Above/Below					
Total					"A"

PART "B" NON SCHEDULE ITEMS.

1	P/F Switch 5 Amps: imporated Make i/c plastic board imported make etc complete.	34 Nos.		Each	
2	P/F 2 Pin 5 Amps:plug socket imporated Make i/c plastic board with necessary electric connection etc complete.	4 Nos.		Each	
3	P/F fancy type 3 pin 5 Amps: S.P. plug socket switch & shoe unit mporated Make with board i/c necessary connection and recessed in the wall etc, complete.	12 Nos.		Each	
4	P/F fancy type 3 pin 15 Amps: S.P. plug socket switch & shoe unit mporated Make with board i/cnecessary connection and cessed in the wall etc, complete.	6 Nos.		Each.	
5	P/F Fan dimmer fancy type Imported make with necessary connection.	10 Nos.		Each.	
6	P/F Ceiling Fan 56" sweep imporated make with necessary electric connection etc, complete.	10 Nos.		Each	
7	P/F Ceiling Light LED 18 watt Imported make with Metal Base i/c necessary connection etc, complete.	30 Nos.		Each	
8	P/F Wall Bracket 18" sweep imporated make or equalent quality i/c necessary electric connection etc, complete.	6 Nos.		Each	

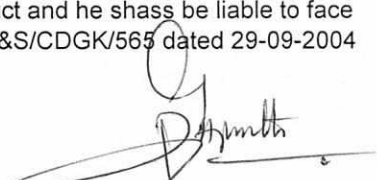
9	P/F distribution board 18 SWG double shutter to accommodate circuit breakers i/c painting with enamelled paint and for other similar jobs etc complete	6.00 Sft	P.Sft
10	P/F Earthing set with 1-1/2x1-1/2"x1/4" GI plate buried in the ground at depth of 12-ft: water comes out from the ground level with salt and charcoal etc i/c providing GI pipe and copper wire 8-SWG etc complete.	1 Sets	Each
11	Providing & fixing Energy Saver 18 to 24 Watts approved quality etc, complete.	24 Nos.	Each
12	P/F Sollar Pannel 100x2= 200 watts German make or equilent it complete with G.I Breaket fixed in position i/c necessary connection with Battery, sensor with pannel testing taping etc complete	5 Nos.	Each
13	P/F Dry battery 200 amps fixed with proper it matlic box i/c cooling arangment with thermopole sheet to protect to sun heat complete with G.I Breaket fixed in position i/c necessary connection with sensor, pannel testing taping etc complete	2 Nos.	Each.
14	P/F Automatic sencer suitable for 200 amps pannel fixed in matlic box fixed in position i/c necessary connection with sensor, pannel testing taping etc complete	2 Nos.	Each.
15	P/F Ceiling Light LED 7 to 11 watts Imported make with Metal Base holder screw type i/c necessary connection etc, complete.	17 Nos.	Each
16	P/F Wall Bracket 16" sweep D.C type suitable for sollar energy imporated make i/c necessary electric connection etc, complete.	1 Nos.	Each
17	P/F Ceiling fan 56" sweep D.C type suitable for sollar energy imporated make i/c necessary electric connection etc, complete.	4 Nos.	Each
18	Provision of Solar Light compact all in one Solar Street Light integrated design Easy installation invironmental friendly Model No LRC 80 w LED Brand leadray LED power 70, 80 watts Solar panel power 36V 110 watts infared senor Availabe. Color Silver , imporated make in/c fitted on existing pole or wall etc complete	1 Nos.	Each
19	P/F Steel Tubler Pole 25'ft long (20"x5" +5"x4") with required size angle iron for search light in/c excavation of earth for fixing the pole 4'ft depth at ground level and making C.C foundation ratio 1:3:6 and coller 3 coats etc as required	1 Nos.	Each

Total B	_____
Total A	_____
Grand Total A+B	_____

CONDITIONS.

- 1 Any typographical errors in the Schedule "B" are subject to correction with the reference in the Schedule of Rates General 2012, inforced from 12.07.2012 as approved by the SRC karachi Sindh
- 2 Arbitration Clause stands from the Agreement.
- 3 No premium shall be paid on Non Schedule items
- 4 No cartage of any item of material either supplied by department of arrange by the contractor shall be paid
- 5 The contractor squoting exorbitant will be required to submit Rate Analysis to justify their rates within specified time other wise the concerned contrator shall be treated as aquality of misconduct and he shass be liable to face punitive action under the rules as per EDO (W&S) department letter No EDO/W&S/CDGK/565 dated 29-09-2004

CONTRACTOR


EXECUTIVE ENGINEER
MINORITIES AFFAIRS DEPARTMENT
GOVERNMENT OF SINDH

STANDARD BIDDING DOCUMENTS

FOR

**Repair/Renovation & Reconstruction of Akshan Satsang
Hall @ District Sanghar**

1.00 (M)

BIDDING DATA

(This section should be filled in by the Engineer/Procuring Agency before issuance of the Bidding Documents).

(a). **Name of Procuring Agency:-** Executive Engineer, Minorities Affairs Sindh

(b). **Brief Description of Works: 15-** Repair/Renovation & Reconstruction of Akshan Satsang Hall @ District Sanghar

(c). **Procuring Agency's address:-** Barrack No. 12, Block 4-A, Sindh Secretariat Karachi.

(d). **Estimated Cost:** 1.00 (Million)

(e). **Amount of Bid Security:-** 2% (Fill in lump sum amount or in % age of bid amount /estimated cost, but not exceeding 5%)

):- 15 days after the completion

(f). **Period of Bid Validity: (15 days of Civil/ Building work** (Not more than sixty days).

(g). **Security Deposit :- (including bid security:-** 10%
(in % age of bid amount /estimated cost equal to 10%)

(h). **Percentage, if any, to be deducted from bills-** 8%

(i). **Deadline for Submission of Bids along with time:** 06-06-2018 upto 12:30 p.m.

(j). **Venue, Time, and Date of Bid Opening:-** Office of the Executive Engineer, Minorities Affairs Sindh Barrack No.12, Block 4-A, Sindh Secretariat on 06-06-2018 at 12:30 p.m.

(k). **Time for Completion from written order of commence: -** 15 days after the completion of Civil/ Building work

(L). **Liquidity damages:-** 0.05% per day (0.05 of Estimated Cost or Bid cost per day of delay, but total not exceeding 10%).

(m). **Deposit Receipt No: Date: Amount:(in words and figures)**

(Executive Engineer/ Authority issuing bidding documents)


Executive Engineer
Minorities Affairs Department
Government of Sindh

" Schedule B."

**Name of Work:- Repair/Renovation & Reconstruction of Akshan Satsang Hall @ District Sanghar
S.No 15**

Lashaani nit 2018

S.No	Item of Work	Quantity.	Rate	Unit	Amount.
1	Wiring for light or fan point with 3/.029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required.(S.I.No. 124, Page No. 15).	34 Pts.	1130.00	P.Pt.	38420.00
2	Wiring for plug point with 3/.029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required. (S.I.No. 126 Page No. 15).	4 Pts.	985.00	P.Pt.	3940.00
3	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.029 copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 10 Page No. 2).	55.0 Mtrs.	222.00	P.Mtr.	12210.00
4	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.036 copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 11 Page No. 2).	25.00 Mtrs.	252.00	P.Mtr.	6300.00
5	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.044 (6mm ²) copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 12 Page No. 2).	20.0 Mtrs.	341.00	P.Mtr.	6820.00
6	Providing and laying (Main or sub Main)PVC insulated with size 4-7/.064 (16mm ²) copper conductor in 1-1/2" dia PVC conduit recessed in the wall or column as required. (S.I.No. 42 Page No. 2).	25.0 Mtrs.	1213.00	P.Mtr.	30325.00
7	Providing and fixing Circuit Breaker 6,10,15,20,30,40,50 & 63 Amps: SP (TB-5S) on prepared board as required.(S.I.No. 203, Page No. 31).	8 Nos	916.00	Each.	7328.00
8	Providing and fixing Circuit Breaker 3,5,10,15,20 & 30 Amps: TP (XS-30NS[NB]) on prepared board as required.(S.I.No. 205, Page No. 31).	1 Nos	5301.00	Each.	5301.00
9	Providing and fixing Circuit Breaker 3,5,10,15,20 , 30,40,50 & 60 Amps: TP (XS-30NS[NB]) on prepared board as required.(S.I.No. 206, Page No. 31).	1 Nos	5521.00	Each.	5521.00
10	P/F Circuit breaker 15,20,30,40,50,60,75 & 100 Amps: T.P. (XS-100NS) on prepared board as required.(S.I.No. 206, Page No. 31)	1 No	9261.00	Each.	9261.00
11	Providing & fixing Bakelite ceiling rose with two terminals. (S.I.No. 228, Page No. 33)	10 Nos	72.00	Each	720.00
12	Providing and Fixing Brass Battern Holder. (S.I.No. 232, Page No. 33)	10 Nos	70.00	Each	700.00
Total					126846.00
Add					% Above/Below
Total					"A"

PART "B" NON SCHEDULE ITEMS.

1	P/F Switch 5 Amps: imported Make i/c plastic board imported make etc complete.	34 Nos.		Each	
2	P/F 2 Pin 5 Amps:plug socket imported Make i/c plastic board with necessary electric connection etc complete.	4 Nos.		Each	
3	P/F fancy type 3 pin 5 Amps: S.P. plug socket switch & shoe unit imported Make with board i/c necessary connection and recessed in the wall etc, complete.	12 Nos.		Each	
4	P/F fancy type 3 pin 15 Amps: S.P. plug socket switch & shoe unit imported Make with board i/c necessary connection and recessed in the wall etc, complete.	6 Nos.		Each.	
5	P/F Fan dimmer fancy type Imported make with necessary connection.	10 Nos.		Each.	
6	P/F Ceiling Fan 56" sweep imported make with necessary electric connection etc, complete.	10 Nos.		Each	
7	P/F Ceiling Light LED 18 watt Imported make with Metal Base i/c necessary connection etc, complete.	30 Nos.		Each	
8	P/F Wall Bracket 18" sweep imported make or equalent quality i/c necessary electric connection etc, complete.	6 Nos.		Each	

9	P/F distribution board 18 SWG double shutter to accommodate circuit breakers i/c painting with enamelled paint and for other similar jobs etc complete	6.00 Sft	P.Sft
10	P/F Earthing set with 1-1/2x1-1/2"x1/4" GI plate buried in the ground at depth of 12-ft: water comes out from the ground level with salt and charcoal etc i/c providing GI pipe and copper wire 8-SWG etc complete.	1 Sets	Each
11	Providing & fixing Energy Saver 18 to 24 Watts approved quality etc, complete.	24 Nos.	Each
12	P/F Sollar Pannel 100x2= 200 watts German make or equilent it complete with G.I Breaket fixed in position i/c necessary connection with Battery, sensor with pannel testing taping etc complete	5 Nos.	Each
13	P/F Dry battery 200 amps fixed with proper it matlic box i/c cooling arangment with thermopole sheet to protect to sun heat complete with G.I Breaket fixed in position i/c necessary connection with sensor, pannel testing taping etc complete	2 Nos.	Each.
14	P/F Automatic sencer suitable for 200 amps pannel fixed in matlic box fixed in position i/c necessary connection with sensor, pannel testing taping etc complete	2 Nos.	Each.
15	P/F Ceiling Light LED 7 to 11 watts Imported make with Metal Base holder screw type i/c necessary connection etc, complete.	17 Nos.	Each
16	P/F Wall Bracket 16" sweep D.C type suitable for sollar energy imporated make i/c necessary electric connection etc, complete.	1 Nos.	Each
17	P/F Ceiling fan 56" sweep D.C type suitable for sollar energy imporated make i/c necessary electric connection etc, complete.	4 Nos.	Each
18	Provision of Solar Light compact all in one Solar Street Light integrated design Easy installation invironmental friendly Model No LRC 80 w LED Brand leadray LED power 70, 80 watts Solar panel power 36V 110 watts infared senor Availabe. Color Silver , imporated make in/c fitted on existing pole or wall etc complete	1 Nos.	Each
19	P/F Steel Tubler Pole 25'ft long (20"x5" +5'x4") with required size angle iron for search light in/c excavation of earth for fixing the pole 4'ft depth at ground level and making C.C foundation ratio 1:3:6 and coller 3 coats etc as required	1 Nos.	Each

Total B
Total A
Grand Total A+B

CONDITIONS.

- 1 Any typographical errors in the Schedule "B" are subject to correction with the reference in the Schedule of Rates General 2012, inforced from 12.07.2012 as approved by the SRC karachi Sindh
- 2 Arbitration Clause stands from the Agreement.
- 3 No premium shall be paid on Non Schedule items
- 4 No cartage of any item of material either supplied by department of arrange by the contractor shall be paid
- 5 The contractor squoting exorbitant will be required to submit Rate Analysis to justify their rates within specified time other wise the concerned contrator shall be treated as aquality of misconduct and he shass be liable to face punitive action under the rules as per EDO (W&S) department letter No EDO/W&S/CDGK/565 dated 29-09-2004

CONTRACTOR


EXECUTIVE ENGINEER
MINORITIES AFFAIRS DEPARTMENT
GOVERNMENT OF SINDH

STANDARD BIDDING DOCUMENTS

FOR

**Construction of Satsang Hall at Wado Hasabo UC Thana
Ahmed Khan District Jamshoro**

1.00 (M)

BIDDING DATA

(This section should be filled in by the Engineer/Procuring Agency before issuance of the Bidding Documents).

(a). **Name of Procuring Agency:-** Executive Engineer, Minorities Affairs Sindh

(b). **Brief Description of Works: 16-** Construction of Satsang Hall at Wado Hasabo UC Thana Ahmed Khan District Jamshoro

(c). **Procuring Agency's address:-** Barrack No. 12, Block 4-A, Sindh Secretariat Karachi .

(d). **Estimated Cost:** 1.00 (Million)

(e). **Amount of Bid Security:-** 2% (Fill in lump sum amount or in % age of bid amount /estimated cost, but not exceeding 5%)

):- 15 days after the completion

(f). **Period of Bid Validity: (15 days of Civil/ Building work** (Not more than sixty days).

(g). **Security Deposit :- (including bid security:-** 10%
(in % age of bid amount /estimated cost equal to 10%)

(h). **Percentage, if any, to be deducted from bills-** 8%

(i). **Deadline for Submission of Bids along with time:** 06-06-2018 upto 12:30 p.m.

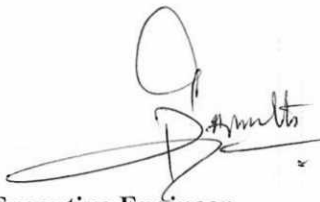
(j). **Venue, Time, and Date of Bid Opening:-** Office of the Executive Engineer, Minorities Affairs Sindh Barrack No.12, Block 4-A, Sindh Secretariat on 06-06-2018 at 12:30 p.m.

(k). **Time for Completion from written order of commence: -** 15 days after the completion of Civil/ Building work

(L). **Liquidity damages:-** 0.05% per day (0.05 of Estimated Cost or Bid cost per day of delay, but total not exceeding 10%).

(m). **Deposit Receipt No: Date: Amount:(in words and figures)**

(Executive Engineer/ Authority issuing bidding documents)


Executive Engineer
Minorities Affairs Department
Government of Sindh

" Schedule B."

**Name of Work:-Construction of Satsang Hall at Wado Hasabo UC Thana Ahmed Khan District
Jamshoro S.No 16**

Lashaari nit 2018

S.No	Item of Work	Quantity.	Rate	Unit	Amount.
1	Wiring for light or fan point with 3/.029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required.(S.I.No. 124, Page No. 15).	34 Pts.	1130.00	P.Pt.	38420.00
2	Wiring for plug point with 3/.029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required. (S.I.No. 126 Page No. 15).	4 Pts.	985.00	P.Pt.	3940.00
3	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.029 copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 10 Page No. 2).	55.0 Mtrs.	222.00	P.Mtr.	12210.00
4	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.036 copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 11 Page No. 2).	25.00 Mtrs.	252.00	P.Mtr.	6300.00
5	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.044 (6mm ²) copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 12 Page No. 2).	20.0 Mtrs.	341.00	P.Mtr.	6820.00
6	Providing and laying (Main or sub Main)PVC insulated with size 4-7/.064 (16mm ²) copper conductor in 1-1/2" dia PVC conduit recessed in the wall or column as required. (S.I.No. 42 Page No. 2).	25.0 Mtrs.	1213.00	P.Mtr.	30325.00
7	Providing and fixing Circuit Breaker 6,10,15,20,30,40,50 & 63 Amps: SP (TB-5S) on prepared board as required.(S.I.No. 203, Page No. 31).	8 Nos	916.00	Each.	7328.00
8	Providing and fixing Circuit Breaker 3,5,10,15,20 & 30 Amps: TP (XS-30NS[NB]) on prepared board as required.(S.I.No. 205, Page No. 31).	1 Nos	5301.00	Each.	5301.00
9	Providing and fixing Circuit Breaker 3,5,10,15,20 , 30,40,50 & 60 Amps: TP (XS-30NS[NB]) on prepared board as required.(S.I.No. 206, Page No. 31).	1 Nos	5521.00	Each.	5521.00
10	P/F Circuit breaker 15,20,30,40,50,60,75 & 100 Amps: T.P. (XS-100NS) on prepared board as required.(S.I.No. 206, Page No. 31)	1 No	9261.00	Each.	9261.00
11	Providing & fixing Bakelite ceiling rose with two terminals. (S.I.No. 228, Page No. 33)	10 Nos	72.00	Each	720.00
12	Providing and Fixing Brass Battern Holder. (S.I.No. 232, Page No. 33)	10 Nos	70.00	Each	700.00
				Total	126846.00
				Add	% Above/Below
				Total	"A"

PART "B" NON SCHEDULE ITEMS.

1	P/F Switch 5 Amps: imported Make i/c plastic board imported make etc complete.	34 Nos.		Each	
2	P/F 2 Pin 5 Amps:plug socket imported Make i/c plastic board with necessary electric connection etc complete.	4 Nos.		Each	
3	P/F fancy type 3 pin 5 Amps: S.P. plug socket switch & shoe unit imported Make with board i/c necessary connection and recessed in the wall etc, complete.	12 Nos.		Each	
4	P/F fancy type 3 pin 15 Amps: S.P. plug socket switch & shoe unit imported Make with board i/c necessary connection and recessed in the wall etc, complete.	6 Nos.		Each.	
5	P/F Fan dimmer fancy type Imported make with necessary connection.	10 Nos.		Each.	
6	P/F Ceiling Fan 56" sweep imported make with necessary electric connection etc, complete.	10 Nos.		Each	
7	P/F Ceiling Light LED 18 watt Imported make with Metal Base i/c necessary connection etc, complete.	30 Nos.		Each	
8	P/F Wall Bracket 18" sweep imported make or equalent quality i/c necessary electric connection etc, complete.	6 Nos.		Each	

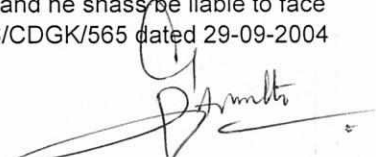
9	P/F distribution board 18 SWG double shutter to accommodate circuit breakers i/c painting with enamelled paint and for other similar jobs etc complete	6.00 Sft	P.Sft
10	P/F Earthing set with 1-1/2x1-1/2"x1/4" GI plate buried in the ground at depth of 12-ft: water comes out from the ground level with salt and charcoal etc i/c providing GI pipe and copper wire 8-SWG etc complete.	1 Sets	Each
11	Providing & fixing Energy Saver 18 to 24 Watts approved quality etc, complete.	24 Nos.	Each
12	P/F Sollar Pannel 100x2= 200 watts German make or equilent it complete with G.I Breaket fixed in position i/c necessary connection with Battery, sensor with pannel testing taping etc complete	5 Nos.	Each
13	P/F Dry battery 200 amps fixed with proper it matlic box i/c cooling arangement with thermopole sheet to protect to sun heat complete with G.I Breaket fixed in position i/c necessary connection with sensor, pannel testing taping etc complete	2 Nos.	Each.
14	P/F Automatic sencer suitable for 200 amps pannel fixed in matlic box fixed in position i/c necessary connection with sensor, pannel testing taping etc complete	2 Nos.	Each.
15	P/F Ceiling Light LED 7 to 11 watts Imported make with Metal Base holder screw type i/c necessary connection etc, complete.	17 Nos.	Each
16	P/F Wall Bracket 16" sweep D.C type suitable for sollar energy imporated make i/c necessary electric connection etc, complete.	1 Nos.	Each
17	P/F Ceiling fan 56" sweep D.C type suitable for sollar energy imporated make i/c necessary electric connection etc, complete.	4 Nos.	Each
18	Provision of Solar Light compact all in one Solar Street Light integrated design Easy installation invironmental friendly Model No LRC 80 w LED Brand leadray LED power 70, 80 watts Solar panel power 36V 110 watts infared senor Availabe. Color Silver , imporated make in/c fitted on existing pole or wall etc complete	1 Nos.	Each
19	P/F Steel Tubler Pole 25'ft long (20"x5" +5'x4") with required size angle iron for search light in/c excavation of earth for fixing the pole 4'ft depth at ground level and making C.C foundation ratio 1:3:6 and coller 3 coats etc as required	1 Nos.	Each

Total B	_____
Total A	_____
Grand Total A+B	_____

CONDITIONS.

- 1 Any typographical errors in the Schedule "B" are subject to correction with the reference in the Schedule of Rates General 2012, inforced from 12.07.2012 as approved by the SRC karachi Sindh
- 2 Arbitration Clause stands from the Agreement.
- 3 No premium shall be paid on Non Schedule items
- 4 No cartage of any item of material either supplied by department of arrange by the contractor shall be paid
- 5 The contractor squoting exorbitant will be required to submit Rate Analysis to justify their rates within specified time other wise the concerned contractor shall be treated as aquality of misconduct and he shass be liable to face punitive action under the rules as per EDO (W&S) department letter No EDO/W&S/CDGK/565 dated 29-09-2004

CONTRACTOR


EXECUTIVE ENGINEER
MINORITIES AFFAIRS DEPARTMENT
GOVERNMENT OF SINDH

STANDARD BIDDING DOCUMENTS

FOR

**Construction of Lavatory Blocks for yatries @ Shr Duga
Devi Mandir Near Abdullah Shah Ashabi Dargah Thatta**

1.00 (M)

BIDDING DATA

(This section should be filled in by the Engineer/Procuring Agency before issuance of the Bidding Documents).

(a). **Name of Procuring Agency:-** Executive Engineer, Minorities Affairs Sindh

(b). **Brief Description of Works: 17-** Construction of Lavatory Blocks for yatrics @ Shr Duga Devi Mandir Near Abdullah Shah Ashabi Dargah Thatta

(c). **Procuring Agency's address:-** Barrack No. 12, Block 4-A, Sindh Secretariat Karachi .

(d). **Estimated Cost:** 1.00 (Million)

(e). **Amount of Bid Security:-** 2% (Fill in lump sum amount or in % age of bid amount /estimated cost, but not exceeding 5%)

):- 15 days after the completion

(f). **Period of Bid Validity: (15 days of Civil/ Building work** (Not more than sixty days).

(g). **Security Deposit :- (including bid security:-** 10%
(in % age of bid amount /estimated cost equal to 10%)

(h). **Percentage, if any, to be deducted from bills-** 8%

(i). **Deadline for Submission of Bids along with time:** 06-06-2018 upto 12:30 p.m.


(j). **Venue, Time, and Date of Bid Opening:-** Office of the Executive Engineer, Minorities Affairs Sindh Barrack No.12, Block 4-A, Sindh Secretariat on 06-06-2018 at 12:30 p.m.

(k). **Time for Completion from written order of commence: -** 15 days after the completion of Civil/ Building work

(L). **Liquidity damages:-** 0.05% per day (0.05 of Estimated Cost or Bid cost per day of delay, but total not exceeding 10%).

(m). **Deposit Receipt No: Date: Amount:(in words and figures)**

(Executive Engineer/ Authority issuing bidding documents)


Executive Engineer
Minorities Affairs Department
Government of Sindh

" Schedule B."

Name of Work:- Construction of Lavatory Blocks for yatrias @ Shr Duga Devi Mandir Near Abdullah Shah Ashabi Dargah Thatta S.No 17

Lashaari nit 2018

S.No	Item of Work	Quantity.	Rate	Unit	Amount.
1	Wiring for light or fan point with 3/.029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required.(S.I.No. 124, Page No. 15).	34 Pts.	1130.00	P.Pt.	38420.00
2	Wiring for plug point with 3/.029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required. (S.I.No. 126 Page No. 15).	4 Pts.	985.00	P.Pt.	3940.00
3	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.029 copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 10 Page No. 2).	55.0 Mtrs.	222.00	P.Mtr.	12210.00
4	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.036 copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 11 Page No. 2).	25.00 Mtrs.	252.00	P.Mtr.	6300.00
5	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.044 (6mm ²) copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 12 Page No. 2).	20.0 Mtrs.	341.00	P.Mtr.	6820.00
6	Providing and laying (Main or sub Main)PVC insulated with size 4-7/.064 (16mm ²) copper conductor in 1-1/2" dia PVC conduit recessed in the wall or column as required. (S.I.No. 42 Page No. 2).	25.0 Mtrs.	1213.00	P.Mtr.	30325.00
7	Providing and fixing Circuit Breaker 6,10,15,20,30,40,50 & 63 Amps: SP (TB-5S) on prepared board as required.(S.I.No. 203, Page No. 31).	8 Nos	916.00	Each.	7328.00
8	Providing and fixing Circuit Breaker 3,5,10,15,20 & 30 Amps: TP (XS-30NS[NB]) on prepared board as required.(S.I.No. 205, Page No. 31).	1 Nos	5301.00	Each.	5301.00
9	Providing and fixing Circuit Breaker 3,5,10,15,20 , 30,40,50 & 60 Amps: TP (XS-30NS[NB]) on prepared board as required.(S.I.No. 206, Page No. 31).	1 Nos	5521.00	Each.	5521.00
10	P/F Circuit breaker 15,20,30,40,50,60,75 & 100 Amps: T.P. (XS-100NS) on prepared board as required.(S.I.No. 206, Page No. 31)	1 No	9261.00	Each.	9261.00
11	Providing & fixing Bakelite ceiling rose with two terminals. (S.I.No. 228, Page No. 33)	10 Nos	72.00	Each	720.00
12	Providing and Fixing Brass Battern Holder. (S.I.No. 232, Page No. 33)	10 Nos	70.00	Each	700.00

Total				126846.00
Add	% Above/Below			
	Total	"A"		

PART "B" NON SCHEDULE ITEMS.

1	P/F Switch 5 Amps: imported Make i/c plastic board imported make etc complete.	34 Nos.		Each	
2	P/F 2 Pin 5 Amps:plug socket imported Make i/c plastic board with necessary electric connection etc complete.	4 Nos.		Each	
3	P/F fancy type 3 pin 5 Amps: S.P. plug socket switch & shoe unit imported Make with board i/c necessary connection and recessed in the wall etc, complete.	12 Nos.		Each	
4	P/F fancy type 3 pin 15 Amps: S.P. plug socket switch & shoe unit imported Make with board i/c necessary connection and recessed in the wall etc, complete.	6 Nos.		Each.	
5	P/F Fan dimmer fancy type Imported make with necessary connection.	10 Nos.		Each.	
6	P/F Ceiling Fan 56" sweep imported make with necessary electric connection etc, complete.	10 Nos.		Each	
7	P/F Ceiling Light LED 18 watt Imported make with Metal Base i/c necessary connection etc, complete.	30 Nos.		Each	
8	P/F Wall Bracket 18" sweep imported make or equalent quality i/c necessary electric connection etc, complete.	6 Nos.		Each	

9	P/F distribution board 18 SWG double shutter to accommodate circuit breakers i/c painting with enamelled paint and for other similar jobs etc complete	6.00 Sft	P.Sft
10	P/F Earthing set with 1-1/2x1-1/2"x1/4" GI plate buried in the ground at depth of 12-ft: water comes out from the ground level with salt and charcoal etc i/c providing GI pipe and copper wire 8-SWG etc complete.	1 Sets	Each
11	Providing & fixing Energy Saver 18 to 24 Watts approved quality etc, complete.	24 Nos.	Each
12	P/F Sollar Pannel 100x2= 200 watts German make or equilent it complete with G.I Breaket fixed in position i/c necessary connection with Battery, sensor with pannel testing taping etc complete	5 Nos.	Each
13	P/F Dry battery 200 amps fixed with proper it matlic box i/c cooling arangment with thermopole sheet to protect to sun heat complete with G.I Breaket fixed in position i/c necessary connection with sensor, pannel testing taping etc complete	2 Nos.	Each.
14	P/F Automatic sencer suitable for 200 amps pannel fixed in matlic box fixed in position i/c necessary connection with sensor, pannel testing taping etc complete	2 Nos.	Each.
15	P/F Ceiling Light LED 7 to 11 watts Imported make with Metal Base holder screw type i/c necessary connection etc, complete.	17 Nos.	Each
16	P/F Wall Bracket 16" sweep D.C type suitable for sollar energy imporated make i/c necessary electric connection etc, complete.	1 Nos.	Each
17	P/F Ceiling fan 56" sweep D.C type suitable for sollar energy imporated make i/c necessary electric connection etc, complete.	4 Nos.	Each
18	Provision of Solar Light compact all in one Solar Street Light integrated design Easy installation invironmental friendly Model No LRC 80 w LED Brand leadray LED power 70, 80 watts Solar panel power 36V 110 watts infared senor Availabe. Color Silver , imporated make in/c fitted on existing pole or wall etc complete	1 Nos.	Each
19	P/F Steel Tubler Pole 25'ft long (20"x5" +5'x4") with required size angle iron for search light in/c excavation of earth for fixing the pole 4'ft depth at ground level and making C.C foundation ratio 1:3:6 and coller 3 coats etc as required	1 Nos.	Each

Total B
Total A _____
Grand Total A+B _____

CONDITIONS.

- 1 Any typographical errors in the Schedule "B" are subject to correction with the reference in the Schedule of Rates General 2012, inforced from 12.07.2012 as approved by the SRC karachi Sindh
- 2 Arbitration Clause stands from the Agreement.
- 3 No premium shall be paid on Non Schedule items
- 4 No cartage of any item of material either supplied by department of arrange by the contractor shall be paid
- 5 The contractor squoting exorbitant will be required to submit Rate Analysis to justify their rates within specified time other wise the concerned contrator shall be treated as aquality of misconduct and he shass be liable to face punitive action under the rules as per EDO (W&S) department letter No EDOW&S/CDGK/565 dated 29-09-2004

CONTRACTOR


EXECUTIVE ENGINEER
MINORITIES AFFAIRS DEPARTMENT
GOVERNMENT OF SINDH

STANDARD BIDDING DOCUMENTS

FOR

**Construction of Satsang Hall at Mandir Odera lal d\station
District Matiari**

1.00 (M)

BIDDING DATA

(This section should be filled in by the Engineer/Procuring Agency before issuance of the Bidding Documents).

(a). **Name of Procuring Agency:-** Executive Engineer, Minorities Affairs Sindh

(b). **Brief Description of Works: 18-** Construction of Satsang Hall at Mandir Odero lal d\station District Matiari

(c). **Procuring Agency's address:-** Barrack No. 12, Block 4-A, Sindh Secretariat Karachi .

(d). **Estimated Cost:** 1.00 (Million)

(e). **Amount of Bid Security:-** 2% (Fill in lump sum amount or in % age of bid amount /estimated cost, but not exceeding 5%)

):- 15 days after the completion

(f). **Period of Bid Validity: (15 days of Civil/ Building work** (Not more than sixty days).

(g). **Security Deposit :- (including bid security:-** 10%
(in % age of bid amount /estimated cost equal to 10%)

(h). **Percentage, if any, to be deducted from bills-** 8%

(i). **Deadline for Submission of Bids along with time:** 06-06-2018 upto 12:30 p.m.


(j). **Venue, Time, and Date of Bid Opening:-** Office of the Executive Engineer, Minorities Affairs Sindh Barrack No.12, Block 4-A, Sindh Secretariat on 06-06-2018 at 12:30 p.m.

(k). **Time for Completion from written order of commence: -** 15 days after the completion of Civil/ Building work

(L). **Liquidity damages:-** 0.05% per day (0.05 of Estimated Cost or Bid cost per day of delay, but total not exceeding 10%).

(m). **Deposit Receipt No: Date: Amount:(in words and figures)**

(Executive Engineer/ Authority issuing bidding documents)


Executive Engineer
Minorities Affairs Department
Government of Sindh

" Schedule B."

Name of Work:-Construction of Satsang Hall at Mandir Odero lal d'station District Matiari S.No 18

Lashaari nit 2018

S.No	Item of Work	Quantity.	Rate	Unit	Amount.
1	Wiring for light or fan point with 3/.029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required.(S.I.No. 124, Page No. 15).	34 Pts.	1130.00	P.Pt.	38420.00
2	Wiring for plug point with 3/.029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required. (S.I.No. 126 Page No. 15).	4 Pts.	985.00	P.Pt.	3940.00
3	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.029 copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 10 Page No. 2).	55.0 Mtrs.	222.00	P.Mtr.	12210.00
4	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.036 copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 11 Page No. 2).	25.00 Mtrs.	252.00	P.Mtr.	6300.00
5	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.044 (6mm ²) copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 12 Page No. 2).	20.0 Mtrs.	341.00	P.Mtr.	6820.00
6	Providing and laying (Main or sub Main)PVC insulated with size 4-7/.064 (16mm ²) copper conductor in 1-1/2" dia PVC conduit recessed in the wall or column as required. (S.I.No. 42 Page No. 2).	25.0 Mtrs.	1213.00	P.Mtr.	30325.00
7	Providing and fixing Circuit Breaker 6,10,15,20,30,40,50 & 63 Amps: SP (TB-5S) on prepared board as required.(S.I.No. 203, Page No. 31).	8 Nos	916.00	Each.	7328.00
8	Providing and fixing Circuit Breaker 3,5,10,15,20 & 30 Amps: TP (XS-30NS[NB]) on prepared board as required.(S.I.No. 205, Page No. 31).	1 Nos	5301.00	Each.	5301.00
9	Providing and fixing Circuit Breaker 3,5,10,15,20 , 30,40,50 & 60 Amps: TP (XS-30NS[NB]) on prepared board as required.(S.I.No. 206, Page No. 31).	1 Nos	5521.00	Each.	5521.00
10	P/F Circuit breaker 15,20,30,40,50,60,75 & 100 Amps: T.P. (XS-100NS) on prepared board as required.(S.I.No. 206, Page No. 31)	1 No	9261.00	Each.	9261.00
11	Providing & fixing Bakelite ceiling rose with two terminals. (S.I.No. 228, Page No. 33)	10 Nos	72.00	Each	720.00
12	Providing and Fixing Brass Battern Holder. (S.I.No. 232, Page No. 33)	10 Nos	70.00	Each	700.00
				Total	126846.00
				Add	% Above/Below
				Total	"A"

PART "B" NON SCHEDULE ITEMS.

1	P/F Switch 5 Amps: imported Make i/c plastic board imported make etc complete.	34 Nos.		Each	
2	P/F 2 Pin 5 Amps:plug socket imported Make i/c plastic board with necessary electric connection etc complete.	4 Nos.		Each	
3	P/F fancy type 3 pin 5 Amps: S.P. plug socket switch & shoe unit imported Make with board i/c necessary connection and recessed in the wall etc, complete.	12 Nos.		Each	
4	P/F fancy type 3 pin 15 Amps: S.P. plug socket switch & shoe unit imported Make with board i/c necessary connection and recessed in the wall etc, complete.	6 Nos.		Each.	
5	P/F Fan dimmer fancy type Imported make with necessary connection.	10 Nos.		Each.	
6	P/F Ceiling Fan 56" sweep imported make with necessary electric connection etc, complete.	10 Nos.		Each	
7	P/F Ceiling Light LED 18 watt Imported make with Metal Base i/c necessary connection etc, complete.	30 Nos.		Each	
8	P/F Wall Bracket 18" sweep imported make or equalent quality i/c necessary electric connection etc, complete.	6 Nos.		Each	


9	P/F distribution board 18 SWG double shutter to accommodate circuit breakers i/c painting with enamelled paint and for other similar jobs etc complete	6.00 Sft	P.Sft
10	P/F Earthing set with 1-1/2x1-1/2"x1/4" GI plate buried in the ground at depth of 12-ft: water comes out from the ground level with salt and charcoal etc i/c providing GI pipe and copper wire 8-SWG etc complete.	1 Sets	Each
11	Providing & fixing Energy Saver 18 to 24 Watts approved quality etc, complete.	24 Nos.	Each
12	P/F Sollar Pannel 100x2= 200 watts German make or equilent it complete with G.I Breaket fixed in position i/c necessary connection with Battery, sensor with pannel testing taping etc complete	5 Nos.	Each
13	P/F Dry battery 200 amps fixed with proper it matlic box i/c cooling arangement with thermopole sheet to protect to sun heat complete with G.I Breaket fixed in position i/c necessary connection with sensor, pannel testing taping etc complete	2 Nos.	Each.
14	P/F Automatic sencer suitable for 200 amps pannel fixed in matlic box fixed in position i/c necessary connection with sensor, pannel testing taping etc complete	2 Nos.	Each.
15	P/F Ceiling Light LED 7 to 11 watts Imported make with Metal Base holder screw type i/c necessary connection etc, complete.	17 Nos.	Each
16	P/F Wall Bracket 16" sweep D.C type suitable for sollar energy imporated make i/c necessary electric connection etc, complete.	1 Nos.	Each
17	P/F Ceiling fan 56" sweep D.C type suitable for sollar energy imporated make i/c necessary electric connection etc, complete.	4 Nos.	Each
18	Provision of Solar Light compact all in one Solar Street Light integrated design Easy installation invironmental friendly Model No LRC 80 w LED Brand leadray LED power 70, 80 watts Solar panel power 36V 110 watts infared senor Availabe. Color Silver , imporated make in/c fitted on existing pole or wall etc complete	1 Nos.	Each
19	P/F Steel Tubler Pole 25'ft long (20"x5" +5'x4") with required size angle iron for search light in/c excavation of earth for fixing the pole 4'ft depth at ground level and making C.C foundation ratio 1:3:6 and coller 3 coats etc as required	1 Nos.	Each

Total B	_____
Total A	_____
Grand Total A+B	_____

CONDITIONS.

- 1 Any typographical errors in the Schedule "B" are subject to correction with the reference in the Schedule of Rates General 2012, inforced from 12.07.2012 as approved by the SRC karachi Sindh
- 2 Arbitration Clause stands from the Agreement.
- 3 No premium shall be paid on Non Schedule items
- 4 No cartage of any item of material either supplied by department of arrange by the contractor shall be paid
- 5 The contractor squoting exorbitant will be required to submit Rate Analysis to justify their rates within specified time other wise the concerned contrator shall be treated as aquality of misconduct and he shass be liable to face punitive action under the rules as per EDO (W&S) department letter No EDO/W&S/CDGK/565 dated 29-09-2004

CONTRACTOR


EXECUTIVE ENGINEER
MINORITIES AFFAIRS DEPARTMENT
GOVERNMENT OF SINDH

STANDARD BIDDING DOCUMENTS

FOR

**Construction of Satsang Hall wisham Das Darbar @
Babarloi City Taluka Khairpus Mir's**

1.00 (M)

BIDDING DATA

(This section should be filled in by the Engineer/Procuring Agency before issuance of the Bidding Documents).

(a). **Name of Procuring Agency:-** Executive Engineer, Minorities Affairs Sindh

(b). **Brief Description of Works: 19-** Construction of Satsang Hall wisham Das Darbar @ Babarloi City Taluka Khairpus Mir's

(c). **Procuring Agency's address:-** Barrack No. 12, Block 4-A, Sindh Secretariat Karachi .

(d). **Estimated Cost:** 1.00 (Million)

(e). **Amount of Bid Security:-** 2% (Fill in lump sum amount or in % age of bid amount /estimated cost, but not exceeding 5%)

):- 15 days after the completion

(f). **Period of Bid Validity: (15 days of Civil/ Building work** (Not more than sixty days).

(g). **Security Deposit :- (including bid security:-** 10%
(in % age of bid amount /estimated cost equal to 10%)

(h). **Percentage, if any, to be deducted from bills-** 8%

(i). **Deadline for Submission of Bids along with time:** 06-06-2018 upto 12:30 p.m.


(j). **Venue, Time, and Date of Bid Opening:-** Office of the Executive Engineer, Minorities Affairs Sindh Barrack No.12, Block 4-A, Sindh Secretariat on 06-06-2018 at 12:30 p.m.

(k). **Time for Completion from written order of commence: -** 15 days after the completion of Civil/ Building work

(L). **Liquidity damages:-** 0.05% per day (0.05 of Estimated Cost or Bid cost per day of delay, but total not exceeding 10%).

(m). **Deposit Receipt No: Date: Amount:(in words and figures)**

(Executive Engineer/ Authority issuing bidding documents)


Executive Engineer
Minorities Affairs Department
Government of Sindh

" Schedule B."

**Name of Work:- Construction of Satsang Hall wisham Das Darbar @ Babarloi City Taluka Khairpus
Mir'sS.No 19**

Lashaari nit 2018

S.No	Item of Work	Quantity.	Rate	Unit	Amount.
1	Wiring for light or fan point with 3/.029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required.(S.I.No. 124, Page No. 15).	34 Pts.	1130.00	P.Pt.	38420.00
2	Wiring for plug point with 3/.029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required. (S.I.No. 126 Page No. 15).	4 Pts.	985.00	P.Pt.	3940.00
3	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.029 copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 10 Page No. 2).	55.0 Mtrs.	222.00	P.Mtr.	12210.00
4	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.036 copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 11 Page No. 2).	25.00 Mtrs.	252.00	P.Mtr.	6300.00
5	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.044 (6mm2) copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 12 Page No. 2).	20.0 Mtrs.	341.00	P.Mtr.	6820.00
6	Providing and laying (Main or sub Main)PVC insulated with size 4-7/.064 (16mm2) copper conductor in 1-1/2" dia PVC conduit recessed in the wall or column as required. (S.I.No. 42 Page No. 2).	25.0 Mtrs.	1213.00	P.Mtr.	30325.00
7	Providing and fixing Circuit Breaker 6,10,15,20,30,40,50 & 63 Amps: SP (TB-5S) on prepared board as required.(S.I.No. 203, Page No. 31).	8 Nos	916.00	Each.	7328.00
8	Providing and fixing Circuit Breaker 3,5,10,15,20 & 30 Amps: TP (XS-30NS[NB]) on prepared board as required.(S.I.No. 205, Page No. 31).	1 Nos	5301.00	Each.	5301.00
9	Providing and fixing Circuit Breaker 3,5,10,15,20 , 30,40,50 & 60 Amps: TP (XS-30NS[NB]) on prepared board as required.(S.I.No. 206, Page No. 31).	1 Nos	5521.00	Each.	5521.00
10	P/F Circuit breaker 15,20,30,40,50,60,75 & 100 Amps: T.P. (XS-100NS) on prepared board as required.(S.I.No. 206, Page No. 31)	1 No	9261.00	Each.	9261.00
11	Providing & fixing Bakelite ceiling rose with two terminals. (S.I.No. 228, Page No. 33)	10 Nos	72.00	Each	720.00
12	Providing and Fixing Brass Battern Holder. (S.I.No. 232, Page No. 33)	10 Nos	70.00	Each	700.00

Total				126846.00
Add	% Above/Below	Total	"A"	

PART "B" NON SCHEDULE ITEMS.

1	P/F Switch 5 Amps: imported Make i/c plastic board imported make etc complete.	34 Nos.		Each	
2	P/F 2 Pin 5 Amps:plug socket imported Make i/c plastic board with necessary electric connection etc complete.	4 Nos.		Each	
3	P/F fancy type 3 pin 5 Amps: S.P. plug socket switch & shoe unit imported Make with board i/c necessary connection and recessed in the wall etc, complete.	12 Nos.		Each	
4	P/F fancy type 3 pin 15 Amps: S.P. plug socket switch & shoe unit imported Make with board i/c necessary connection and cessed in the wall etc, complete.	6 Nos.		Each.	
5	P/F Fan dimmer fancy type Imported make with necessary connection.	10 Nos.		Each.	
6	P/F Ceiling Fan 56" sweep imported make with necessary electric connection etc, complete.	10 Nos.		Each	
7	P/F Ceiling Light LED 18 watt Imported make with Metal Base i/c necessary connection etc, complete.	30 Nos.		Each	
8	P/F Wall Bracket 18" sweep imported make or equalent quality i/c necessary electric connection etc, complete.	6 Nos.		Each	

9	P/F distribution board 18 SWG double shutter to accommodate circuit breakers i/c painting with enamelled paint and for other similar jobs etc complete	6.00 Sft	P.Sft
10	P/F Earthing set with 1-1/2x1-1/2"x1/4" GI plate buried in the ground at depth of 12-ft: water comes out from the ground level with salt and charcoal etc i/c providing GI pipe and copper wire 8-SWG etc complete.	1 Sets	Each
11	Providing & fixing Energy Saver 18 to 24 Watts approved quality etc, complete.	24 Nos.	Each
12	P/F Sollar Pannel 100x2= 200 watts German make or equilent it complete with G.I Breaket fixed in position i/c necessary connection with Battery, sensor with pannel testing taping etc complete	5 Nos.	Each
13	P/F Dry battery 200 amps fixed with proper it matlic box i/c cooling arangement with thermopole sheet to protect to sun heat complete with G.I Breaket fixed in position i/c necessary connection with sensor, pannel testing taping etc complete	2 Nos.	Each.
14	P/F Automatic sencer suitable for 200 amps pannel fixed in matlic box fixed in position i/c necessary connection with sensor, pannel testing taping etc complete	2 Nos.	Each.
15	P/F Ceiling Light LED 7 to 11 watts Imported make with Metal Base holder screw type i/c necessary connection etc, complete.	17 Nos.	Each
16	P/F Wall Bracket 16" sweep D.C type suitable for sollar energy imporated make i/c necessary electric connection etc, complete.	1 Nos.	Each
17	P/F Ceiling fan 56" sweep D.C type suitable for sollar energy imporated make i/c necessary electric connection etc, complete.	4 Nos.	Each
18	Provision of Solar Light compact all in one Solar Street Light integrated design Easy installation invironmental friendly Model No LRC 80 w LED Brand leadray LED power 70, 80 watts Solar panel power 36V 110 watts infared sensor Availabe. Color Silver , imporated make in/c fitted on existing pole or wall etc complete	1 Nos.	Each
19	P/F Steel Tubler Pole 25'ft long (20"x5" +5'x4") with required size angle iron for search light in/c excavation of earth for fixing the pole 4'ft depth at ground level and making C.C foundation ratio 1:3:6 and coller 3 coats etc as required	1 Nos.	Each

Total B	_____
Total A	_____
Grand Total A+B	_____

CONDITIONS.

- 1 Any typographical errors in the Schedule "B" are subject to correction with the reference in the Schedule of Rates General 2012, inforced from 12.07.2012 as approved by the SRC karachi Sindh
- 2 Arbitration Clause stands from the Agreement.
- 3 No premium shall be paid on Non Schedule items
- 4 No cartage of any item of material either supplied by department or arrange by the contractor shall be paid
- 5 The contractor squoting exorbitant will be required to submit Rate Analysis to justify their rates within specified time other wise the concerned contractor shall be treated as a quality of misconduct and he shall be liable to face punitive action under the rules as per EDO (W&S) department letter No EDO/W&S/CDGK/565 dated 29-09-2004

CONTRACTOR


EXECUTIVE ENGINEER
MINORITIES AFFAIRS DEPARTMENT
GOVERNMENT OF SINDH

STANDARD BIDDING DOCUMENTS

FOR

**Repair/Renovation/Reconstruction of satsang Hall @
Naserabad Larkana**

1.00 (M)

BIDDING DATA

(This section should be filled in by the Engineer/Procuring Agency before issuance of the Bidding Documents).

(a). **Name of Procuring Agency:-** Executive Engineer, Minorities Affairs Sindh

(b). **Brief Description of Works: 20-** Repair/Renovation/Reconstruction of satsang Hall @ Naserabad Larkana

(c). **Procuring Agency's address:-** Barrack No. 12, Block 4-A, Sindh Secretariat Karachi .

(d). **Estimated Cost:** 1.00 (Million)

(e). **Amount of Bid Security:-** 2% (Fill in lump sum amount or in % age of bid amount /estimated cost, but not exceeding 5%)

):- 15 days after the completion

(f). **Period of Bid Validity: (15 days of Civil/ Building work** (Not more than sixty days).

(g). **Security Deposit :- (including bid security:-** 10%
(in % age of bid amount /estimated cost equal to 10%)

(h). **Percentage, if any, to be deducted from bills-** 8%

(i). **Deadline for Submission of Bids along with time:** 06-06-2018 upto 12:30 p.m.

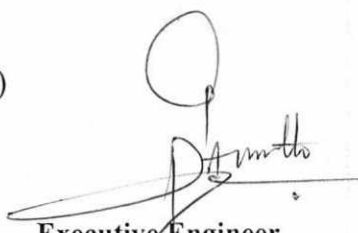
(j). **Venue, Time, and Date of Bid Opening:-** Office of the Executive Engineer, Minorities Affairs Sindh Barrack No.12, Block 4-A, Sindh Secretariat on 06-06-2018 at 12:30 p.m.

(k). **Time for Completion from written order of commence: -** 15 days after the completion of Civil/ Building work

(L). **Liquidity damages:-** 0.05% per day (0.05 of Estimated Cost or Bid cost per day of delay, but total not exceeding 10%).

(m). **Deposit Receipt No: Date: Amount:(in words and figures)**

(Executive Engineer/ Authority issuing bidding documents)


Executive Engineer
Minorities Affairs Department
Government of Sindh

" Schedule B."

Name of Work:-Repair/Renovation/Reconstruction of satsang Hall @ Naserabad Larkana S.No 20

Lashaari nit 2018

S.No	Item of Work	Quantity.	Rate	Unit	Amount.
1	Wiring for light or fan point with 3/.029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required.(S.I.No. 124, Page No. 15).	34 Pts.	1130.00	P.Pt.	38420.00
2	Wiring for plug point with 3/.029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required. (S.I.No. 126 Page No. 15).	4 Pts.	985.00	P.Pt.	3940.00
3	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.029 copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 10 Page No. 2).	55.0 Mtrs.	222.00	P.Mtr.	12210.00
4	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.036 copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 11 Page No. 2).	25.00 Mtrs.	252.00	P.Mtr.	6300.00
5	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.044 (6mm ²) copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 12 Page No. 2).	20.0 Mtrs.	341.00	P.Mtr.	6820.00
6	Providing and laying (Main or sub Main)PVC insulated with size 4-7/.064 (16mm ²) copper conductor in 1-1/2" dia PVC conduit recessed in the wall or column as required. (S.I.No. 42 Page No. 2).	25.0 Mtrs.	1213.00	P.Mtr.	30325.00
7	Providing and fixing Circuit Breaker 6,10,15,20,30,40,50 & 63 Amps: SP (TB-5S) on prepared board as required.(S.I.No. 203, Page No. 31).	8 Nos	916.00	Each.	7328.00
8	Providing and fixing Circuit Breaker 3,5,10,15,20 & 30 Amps: TP (XS-30NS[NB]) on prepared board as required.(S.I.No. 205, Page No. 31).	1 Nos	5301.00	Each.	5301.00
9	Providing and fixing Circuit Breaker 3,5,10,15,20 , 30,40,50 & 60 Amps: TP (XS-30NS[NB]) on prepared board as required.(S.I.No. 206, Page No. 31).	1 Nos	5521.00	Each.	5521.00
10	P/F Circuit breaker 15,20,30,40,50,60,75 & 100 Amps: T.P. (XS-100NS) on prepared board as required.(S.I.No. 206, Page No. 31)	1 No	9261.00	Each.	9261.00
11	Providing & fixing Bakelite ceiling rose with two terminals. (S.I.No. 228, Page No. 33)	10 Nos	72.00	Each	720.00
12	Providing and Fixing Brass Battern Holder. (S.I.No. 232, Page No. 33)	10 Nos	70.00	Each	700.00

Total 126846.00

Add **% Above/Below**

Total **"A"**

PART "B" NON SCHEDULE ITEMS.

1	P/F Switch 5 Amps: imported Make i/c plastic board imported make etc complete.	34 Nos.		Each	
2	P/F 2 Pin 5 Amps:plug socket imported Make i/c plastic board with necessary electric connection etc complete.	4 Nos.		Each	
3	P/F fancy type 3 pin 5 Amps: S.P. plug socket switch & shoe unit imported Make with board i/c necessary connection and recessed in the wall etc, complete.	12 Nos.		Each	
4	P/F fancy type 3 pin 15 Amps: S.P. plug socket switch & shoe unit imported Make with board i/c necessary connection and recessed in the wall etc, complete.	6 Nos.		Each.	
5	P/F Fan dimmer fancy type Imported make with necessary connection.	10 Nos.		Each.	
6	P/F Ceiling Fan 56" sweep imported make with necessary electric connection etc, complete.	10 Nos.		Each	
7	P/F Ceiling Light LED 18 watt Imported make with Metal Base i/c necessary connection etc, complete.	30 Nos.		Each	
8	P/F Wall Bracket 18" sweep imported make or equalent quality i/c necessary electric connection etc, complete.	6 Nos.		Each	


9	P/F distribution board 18 SWG double shutter to accommodate circuit breakers i/c painting with enamelled paint and for other similar jobs etc complete	6.00 Sft	P.Sft
10	P/F Earthing set with 1-1/2x1-1/2"x1/4" GI plate buried in the ground at depth of 12-ft: water comes out from the ground level with salt and charcoal etc i/c providing GI pipe and copper wire 8-SWG etc complete.	1 Sets	Each
11	Providing & fixing Energy Saver 18 to 24 Watts approved quality etc, complete.	24 Nos.	Each
12	P/F Sollar Pannel 100x2= 200 watts German make or equivalent it complete with G.I Bracket fixed in position i/c necessary connection with Battery, sensor with pannel testing taping etc complete	5 Nos.	Each
13	P/F Dry battery 200 amps fixed with proper it matlic box i/c cooling arangement with thermopole sheet to protect to sun heat complete with G.I Bracket fixed in position i/c necessary connection with sensor, pannel testing taping etc complete	2 Nos.	Each.
14	P/F Automatic sencer suitable for 200 amps pannel fixed in matlic box fixed in position i/c necessary connection with sensor, pannel testing taping etc complete	2 Nos.	Each.
15	P/F Ceiling Light LED 7 to 11 watts Imported make with Metal Base holder screw type i/c necessary connection etc, complete.	17 Nos.	Each
16	P/F Wall Bracket 16" sweep D.C type suitable for sollar energy imporated make i/c necessary electric connection etc, complete.	1 Nos.	Each
17	P/F Ceiling fan 56" sweep D.C type suitable for sollar energy imporated make i/c necessary electric connection etc, complete.	4 Nos.	Each
18	Provision of Solar Light compact all in one Solar Street Light integrated design Easy installation invironmental friendly Model No LRC 80 w LED Brand leadray LED power 70, 80 watts Solar panel power 36V 110 watts infared senor Availabe. Color Silver , imporated make in/c fitted on existing pole or wall etc complete	1 Nos.	Each
19	P/F Steel Tubler Pole 25'ft long (20"x5" +5"x4") with required size angle iron for search light in/c excavation of earth for fixing the pole 4'ft depth at ground level and making C.C foundation ratio 1:3:6 and coller 3 coats etc as required	1 Nos.	Each

Total B	_____
Total A	_____
Grand Total A+B	_____

CONDITIONS.

- 1 Any typographical errors in the Schedule "B" are subject to correction with the reference in the Schedule of Rates General 2012, inforced from 12.07.2012 as approved by the SRC karachi Sindh
- 2 Arbitration Clause stands from the Agreement.
- 3 No premium shall be paid on Non Schedule items
- 4 No cartage of any item of material either supplied by department of arrange by the contractor shall be paid
- 5 The contractor squoting exorbitant will be required to submit Rate Analysis to justify their rates within specified time other wise the concerned contrator shall be treated as aquality of misconduct and he shass be liable to face punitive action under the rules as per EDO (W&S) department letter No EDO/W&S/CDGK/565 dated 29-09-2004

CONTRACTOR


EXECUTIVE ENGINEER
MINORITIES AFFAIRS DEPARTMENT
GOVERNMENT OF SINDH

STANDARD BIDDING DOCUMENTS

FOR

**Construction of Compound wall @ Maloo pir Dargah
Taluka Thana Bula Khan District Jamshoro**

1.00 (M)

BIDDING DATA

(This section should be filled in by the Engineer/Procuring Agency before issuance of the Bidding Documents).

(a). **Name of Procuring Agency:-** Executive Engineer, Minorities Affairs Sindh

(b). **Brief Description of Works: 21-** Construction of Compound wall @ Maloo pir Dargah Taluka Thana Bula Khan District Jamshoro

(c). **Procuring Agency's address:-** Barrack No. 12, Block 4-A, Sindh Secretariat Karachi .

(d). **Estimated Cost:** 1.00 (Million)

(e). **Amount of Bid Security:-** 2% (Fill in lump sum amount or in % age of bid amount /estimated cost, but not exceeding 5%)

):- 15 days after the completion

(f). **Period of Bid Validity: (15 days** of Civil/ Building work (Not more than sixty days).

(g). **Security Deposit :- (including bid security:-** 10% (in % age of bid amount /estimated cost equal to 10%)

(h). **Percentage, if any, to be deducted from bills-** 8%

(i). **Deadline for Submission of Bids along with time:** 06-06-2018 upto 12:30 p.m.



(j). **Venue, Time, and Date of Bid Opening:-** Office of the Executive Engineer, Minorities Affairs Sindh Barrack No.12, Block 4-A, Sindh Secretariat on 06-06-2018 at 12:30 p.m.

(k). **Time for Completion from written order of commence: -** 15 days after the completion of Civil/ Building work

(L). **Liquidity damages:-** 0.05% per day (0.05 of Estimated Cost or Bid cost per day of delay, but total not exceeding 10%).

(m). **Deposit Receipt No: Date: Amount:(in words and figures)**

(Executive Engineer/ Authority issuing bidding documents)



Executive Engineer
Minorities Affairs Department
Government of Sindh

" Schedule B."

**Name of Work:- Construction of Compound wall @ Maloo pir Dargah Taluka Thana Bula Khan
District Jamshoro S.No 21**

Lashaari nit 2018

S.No	Item of Work	Quantity.	Rate	Unit	Amount.
1	Wiring for light or fan point with 3/.029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required.(S.I.No. 124, Page No. 15).	34 Pts.	1130.00	P.Pt.	38420.00
2	Wiring for plug point with 3/.029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required. (S.I.No. 126 Page No. 15).	4 Pts.	985.00	P.Pt.	3940.00
3	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.029 copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 10 Page No. 2).	55.0 Mtrs.	222.00	P.Mtr.	12210.00
4	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.036 copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 11 Page No. 2).	25.00 Mtrs.	252.00	P.Mtr.	6300.00
5	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.044 (6mm ²) copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 12 Page No. 2).	20.0 Mtrs.	341.00	P.Mtr.	6820.00
6	Providing and laying (Main or sub Main)PVC insulated with size 4-7/.064 (16mm ²) copper conductor in 1-1/2" dia PVC conduit recessed in the wall or column as required. (S.I.No. 42 Page No. 2).	25.0 Mtrs.	1213.00	P.Mtr.	30325.00
7	Providing and fixing Circuit Breaker 6,10,15,20,30,40,50 & 63 Amps: SP (TB-5S) on prepared board as required.(S.I.No. 203, Page No. 31).	8 Nos	916.00	Each.	7328.00
8	Providing and fixing Circuit Breaker 3,5,10,15,20 & 30 Amps: TP (XS-30NS[NB]) on prepared board as required.(S.I.No. 205, Page No. 31).	1 Nos	5301.00	Each.	5301.00
9	Providing and fixing Circuit Breaker 3,5,10,15,20 , 30,40,50 & 60 Amps: TP (XS-30NS[NB]) on prepared board as required.(S.I.No. 206, Page No. 31).	1 Nos	5521.00	Each.	5521.00
10	P/F Circuit breaker 15,20,30,40,50,60,75 & 100 Amps: T.P. (XS-100NS) on prepared board as required.(S.I.No. 206, Page No. 31)	1 No	9261.00	Each.	9261.00
11	Providing & fixing Bakelite ceiling rose with two terminals. (S.I.No. 228, Page No. 33)	10 Nos	72.00	Each	720.00
12	Providing and Fixing Brass Battern Holder. (S.I.No. 232, Page No. 33)	10 Nos	70.00	Each	700.00

Total 126846.00

Add % Above/Below

Total "A"

PART "B" NON SCHEDULE ITEMS.

1	P/F Switch 5 Amps: imported Make i/c plastic board imported make etc complete.	34 Nos.		Each	
2	P/F 2 Pin 5 Amps:plug socket imported Make i/c plastic board with necessary electric connection etc complete.	4 Nos.		Each	
3	P/F fancy type 3 pin 5 Amps: S.P. plug socket switch & shoe unit imported Make with board i/c necessary connection and recessed in the wall etc, complete.	12 Nos.		Each	
4	P/F fancy type 3 pin 15 Amps: S.P. plug socket switch & shoe unit imported Make with board i/c necessary connection and recessed in the wall etc, complete.	6 Nos.		Each.	
5	P/F Fan dimmer fancy type Imported make with necessary connection.	10 Nos.		Each.	
6	P/F Ceiling Fan 56" sweep imported make with necessary electric connection etc, complete.	10 Nos.		Each	
7	P/F Ceiling Light LED 18 watt Imported make with Metal Base i/c necessary connection etc, complete.	30 Nos.		Each	
8	P/F Wall Bracket 18" sweep imported make or equalent quality i/c necessary electric connection etc, complete.	6 Nos.		Each	


9	P/F distribution board 18 SWG double shutter to accommodate circuit breakers i/c painting with enamelled paint and for other similar jobs etc complete	6.00 Sft	P.Sft
10	P/F Earthing set with 1-1/2x1-1/2"x1/4" GI plate buried in the ground at depth of 12-ft: water comes out from the ground level with salt and charcoal etc i/c providing GI pipe and copper wire 8-SWG etc complete.	1 Sets	Each
11	Providing & fixing Energy Saver 18 to 24 Watts approved quality etc, complete.	24 Nos.	Each
12	P/F Sollar Pannel 100x2= 200 watts German make or equilent it complete with G.I Bracket fixed in position i/c necessary connection with Battery, sensor with pannel testing taping etc complete	5 Nos.	Each
13	P/F Dry battery 200 amps fixed with proper it matlic box i/c cooling arangement with thermopole sheet to protect to sun heat complete with G.I Bracket fixed in position i/c necessary connection with sensor, pannel testing taping etc complete	2 Nos.	Each.
14	P/F Automatic sencer suitable for 200 amps pannel fixed in matlic box fixed in position i/c necessary connection with sensor, pannel testing taping etc complete	2 Nos.	Each.
15	P/F Ceiling Light LED 7 to 11 watts Imported make with Metal Base holder screw type i/c necessary connection etc, complete.	17 Nos.	Each
16	P/F Wall Bracket 16" sweep D.C type suitable for sollar energy imporated make i/c necessary electric connection etc, complete.	1 Nos.	Each
17	P/F Ceiling fan 56" sweep D.C type suitable for sollar energy imporated make i/c necessary electric connection etc, complete.	4 Nos.	Each
18	Provision of Solar Light compact all in one Solar Street Light integrated design Easy installation invironmental friendly Model No LRC 80 w LED Brand leadray LED power 70, 80 watts Solar panel power 36V 110 watts infared senor Availabe. Color Silver , imporated make in/c fitted on existing pole or wall etc complete	1 Nos.	Each
19	P/F Steel Tubler Pole 25'ft long (20"x5" +5"x4") with required size angle iron for search light in/c excavation of earth for fixing the pole 4'ft depth at ground level and making C.C foundation ratio 1:3:6 and coller 3 coats etc as required	1 Nos.	Each

Total B
Total A
Grand Total A+B

CONDITIONS.

- 1 Any typographical errors in the Schedule "B" are subject to correction with the reference in the Schedule of Rates General 2012, inforced from 12.07.2012 as approved by the SRC karachi Sindh
- 2 Arbitration Clause stands from the Agreement.
- 3 No premium shall be paid on Non Schedule items
- 4 No cartage of any item of material either supplied by department of arrange by the contractor shall be paid
- 5 The contractor squoting exorbitant will be required to submit Rate Analysis to justify their rates within specified time other wise the concerned contrator shall be treated as aquality of misconduct and he shasse be liable to face punitive action under the rules as per EDO (W&S) department letter No EDO/W&S/CDGK/565 dated 29-09-2004

CONTRACTOR


EXECUTIVE ENGINEER
MINORITIES AFFAIRS DEPARTMENT
GOVERNMENT OF SINDH

STANDARD BIDDING DOCUMENTS

FOR

**Construction of Maharaj vikram Sharma & Repair of saint
swami at Taluka Thana Bula khan District Jamshoro**

1.00 (M)

BIDDING DATA

(This section should be filled in by the Engineer/Procuring Agency before issuance of the Bidding Documents).

(a). **Name of Procuring Agency:-** Executive Engineer, Minorities Affairs Sindh

(b). **Brief Description of Works: 22-** Construction of Maharaj vikram Sharma & Repair of saint swami at Taluka Thana Bula khan District Jamshoro

(c). **Procuring Agency's address:-** Barrack No. 12, Block 4-A, Sindh Secretariat Karachi .

(d). **Estimated Cost:** 1.00 (Million)

(e). **Amount of Bid Security:-** 2% (Fill in lump sum amount or in % age of bid amount /estimated cost, but not exceeding 5%)

):- 15 days after the completion

(f). **Period of Bid Validity: (15 days of Civil/ Building work** (Not more than sixty days).

(g). **Security Deposit :- (including bid security:-** 10%
(in % age of bid amount /estimated cost equal to 10%)

(h). **Percentage, if any, to be deducted from bills-** 8%

(i). **Deadline for Submission of Bids along with time:** 06-06-2018 upto 12:30 p.m.


(j). **Venue, Time, and Date of Bid Opening:-** Office of the Executive Engineer, Minorities Affairs Sindh Barrack No.12, Block 4-A, Sindh Secretariat on 06-06-2018 at 12:30 p.m.

(k). **Time for Completion from written order of commence: -** 15 days after the completion of Civil/ Building work

(L). **Liquidity damages:-** 0.05% per day (0.05 of Estimated Cost or Bid cost per day of delay, but total not exceeding 10%).

(m). **Deposit Receipt No: Date: Amount:**(in words and figures)

(Executive Engineer/ Authority issuing bidding documents)


Executive Engineer
Minorities Affairs Department
Government of Sindh

" Schedule B."

**Name of Work:- Construction of Maharaj vikram Sharma & Repair of saint swami at Taluka Thana
Bula khan District Jamshoro S.No 22**

Lashaari nit 2018

S.No	Item of Work	Quantity.	Rate	Unit	Amount.
1	Wiring for light or fan point with 3/.029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required.(S.I.No. 124, Page No. 15).	34 Pts.	1130.00	P.Pt.	38420.00
2	Wiring for plug point with 3/.029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required. (S.I.No. 126 Page No. 15).	4 Pts.	985.00	P.Pt.	3940.00
3	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.029 copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 10 Page No. 2).	55.0 Mtrs.	222.00	P.Mtr.	12210.00
4	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.036 copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 11 Page No. 2).	25.00 Mtrs.	252.00	P.Mtr.	6300.00
5	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.044 (6mm2) copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 12 Page No. 2).	20.0 Mtrs.	341.00	P.Mtr.	6820.00
6	Providing and laying (Main or sub Main)PVC insulated with size 4-7/.064 (16mm2) copper conductor in 1-1/2" dia PVC conduit recessed in the wall or column as required. (S.I.No. 42 Page No. 2).	25.0 Mtrs.	1213.00	P.Mtr.	30325.00
7	Providing and fixing Circuit Breaker 6,10,15,20,30,40,50 & 63 Amps: SP (TB-5S) on prepared board as required.(S.I.No. 203, Page No. 31).	8 Nos	916.00	Each.	7328.00
8	Providing and fixing Circuit Breaker 3,5,10,15,20 & 30 Amps: TP (XS-30NS[NB]) on prepared board as required.(S.I.No. 205, Page No. 31).	1 Nos	5301.00	Each.	5301.00
9	Providing and fixing Circuit Breaker 3,5,10,15,20 , 30,40,50 & 60 Amps: TP (XS-30NS[NB]) on prepared board as required.(S.I.No. 206, Page No. 31).	1 Nos	5521.00	Each.	5521.00
10	P/F Circuit breaker 15,20,30,40,50,60,75 & 100 Amps: T.P. (XS-100NS) on prepared board as required.(S.I.No. 206, Page No. 31)	1 No	9261.00	Each.	9261.00
11	Providing & fixing Bakelite ceiling rose with two terminals. (S.I.No. 228, Page No. 33)	10 Nos	72.00	Each	720.00
12	Providing and Fixing Brass Battern Holder. (S.I.No. 232, Page No. 33)	10 Nos	70.00	Each	700.00

Total 126846.00

Add % Above/Below

Total **"A"**

PART "B" NON SCHEDULE ITEMS.

1	P/F Switch 5 Amps: imported Make i/c plastic board imported make etc complete.	34 Nos.		Each	
2	P/F 2 Pin 5 Amps:plug socket imported Make i/c plastic board with necessary electric connection etc complete.	4 Nos.		Each	
3	P/F fancy type 3 pin 5 Amps: S.P. plug socket switch & shoe unit imported Make with board i/c necessary connection and recessed in the wall etc, complete.	12 Nos.		Each	
4	P/F fancy type 3 pin 15 Amps: S.P. plug socket switch & shoe unit imported Make with board i/c necessary connection and recessed in the wall etc, complete.	6 Nos.		Each.	
5	P/F Fan dimmer fancy type Imported make with necessary connection.	10 Nos.		Each.	
6	P/F Ceiling Fan 56" sweep imported make with necessary electric connection etc, complete.	10 Nos.		Each	
7	P/F Ceiling Light LED 18 watt Imported make with Metal Base i/c necessary connection etc, complete.	30 Nos.		Each	
8	P/F Wall Bracket 18" sweep imported make or equalent quality i/c necessary electric connection etc, complete.	6 Nos.		Each	


9	P/F distribution board 18 SWG double shutter to accommodate circuit breakers i/c painting with enamelled paint and for other similar jobs etc complete	6.00 Sft	P.Sft
10	P/F Earthing set with 1-1/2x1-1/2"x1/4" GI plate buried in the ground at depth of 12-ft: water comes out from the ground level with salt and charcoal etc i/c providing GI pipe and copper wire 8-SWG etc complete.	1 Sets	Each
11	Providing & fixing Energy Saver 18 to 24 Watts approved quality etc, complete.	24 Nos.	Each
12	P/F Sollar Pannel 100x2= 200 watts German make or equivalent it complete with G.I Bracket fixed in position i/c necessary connection with Battery, sensor with pannel testing taping etc complete	5 Nos.	Each
13	P/F Dry battery 200 amps fixed with proper it matlic box i/c cooling arangement with thermopole sheet to protect to sun heat complete with G.I Bracket fixed in position i/c necessary connection with sensor, pannel testing taping etc complete	2 Nos.	Each.
14	P/F Automatic sencer suitable for 200 amps pannel fixed in matlic box fixed in position i/c necessary connection with sensor, pannel testing taping etc complete	2 Nos.	Each.
15	P/F Ceiling Light LED 7 to 11 watts Imported make with Metal Base holder screw type i/c necessary connection etc, complete.	17 Nos.	Each
16	P/F Wall Bracket 16" sweep D.C type suitable for sollar energy imporated make i/c necessary electric connection etc, complete.	1 Nos.	Each
17	P/F Ceiling fan 56" sweep D.C type suitable for sollar energy imporated make i/c necessary electric connection etc, complete.	4 Nos.	Each
18	Provision of Solar Light compact all in one Solar Street Light integrated design Easy installation invironmental friendly Model No LRC 80 w LED Brand leadray LED power 70, 80 watts Solar panel power 36V 110 watts infared senor Availabe. Color Silver , imporated make in/c fitted on existing pole or wall etc complete	1 Nos.	Each
19	P/F Steel Tubler Pole 25'ft long (20"x5" +5"x4") with required size angle iron for search light in/c excavation of earth for fixing the pole 4'ft depth at ground level and making C.C foundation ratio 1:3:6 and coller 3 coats etc as required	1 Nos.	Each

Total B _____
 Total A _____
Grand Total A+B _____

CONDITIONS.

- 1 Any typographical errors in the Schedule "B" are subject to correction with the reference in the Schedule of Rates General 2012, inforced from 12.07.2012 as approved by the SRC karachi Sindh
- 2 Arbitration Clause stands from the Agreement.
- 3 No premium shall be paid on Non Schedule items
- 4 No cartage of any item of material either supplied by department of arrange by the contractor shall be paid
- 5 The contractor squoting exorbitant will be required to submit Rate Analysis to justify their rates within specified time other wise the concerned contrator shall be treated as aquality of misconduct and he shall be liable to face punitive action under the rules as per EDO (W&S) department letter No EDO/W&S/CDGK/565 dated 29-09-2004

CONTRACTOR


EXECUTIVE ENGINEER
MINORITIES AFFAIRS DEPARTMENT
GOVERNMENT OF SINDH

STANDARD BIDDING DOCUMENTS

FOR

Repair/Renovation/Reconstruction of Gaushalla Larkana

1.00 (M)

BIDDING DATA

(This section should be filled in by the Engineer/Procuring Agency before issuance of the Bidding Documents).

(a). **Name of Procuring Agency:-** Executive Engineer, Minorities Affairs Sindh

(b). **Brief Description of Works: 23-** Repair/Renovation/Reconstruction of Gaushalla Larkana

(c). **Procuring Agency's address:-** Barrack No. 12, Block 4-A, Sindh Secretariat Karachi .

(d). **Estimated Cost:** 1.00 (Million)

(e). **Amount of Bid Security:-** 2% (Fill in lump sum amount or in % age of bid amount /estimated cost, but not exceeding 5%)

):- 15 days after the completion

(f). **Period of Bid Validity: (15 days** of Civil/ Building work (Not more than sixty days).

(g). **Security Deposit :- (including bid security:-** 10%
(in % age of bid amount /estimated cost equal to 10%)

(h). **Percentage, if any, to be deducted from bills-** 8%

(i). **Deadline for Submission of Bids along with time:** 06-06-2018 upto 12:30 p.m.

(j). **Venue, Time, and Date of Bid Opening:-** Office of the Executive Engineer, Minorities Affairs Sindh Barrack No.12, Block 4-A, Sindh Secretariat on 06-06-2018 at 12:30 p.m.

(k). **Time for Completion from written order of commence: -** 15 days after the completion of Civil/ Building work

(L). **Liquidity damages:-** 0.05% per day (0.05 of Estimated Cost or Bid cost per day of delay, but total not exceeding 10%).

(m). **Deposit Receipt No: Date: Amount:(in words and figures)**

(Executive Engineer/ Authority issuing bidding documents)



**Executive Engineer
Minorities Affairs Department
Government of Sindh**

" Schedule B."

Name of Work:- Repair/Renovation/Reconstruction of Gaushalla Larkana S.No 23

Lashaari nit 2018

S.No	Item of Work	Quantity.	Rate	Unit	Amount.
1	Wiring for light or fan point with 3/.029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required.(S.I.No. 124, Page No. 15).	34 Pts.	1130.00	P.Pt.	38420.00
2	Wiring for plug point with 3/.029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required. (S.I.No. 126 Page No. 15).	4 Pts.	985.00	P.Pt.	3940.00
3	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.029 copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 10 Page No. 2).	55.0 Mtrs.	222.00	P.Mtr.	12210.00
4	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.036 copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 11 Page No. 2).	25.00 Mtrs.	252.00	P.Mtr.	6300.00
5	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.044 (6mm ²) copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 12 Page No. 2).	20.0 Mtrs.	341.00	P.Mtr.	6820.00
6	Providing and laying (Main or sub Main)PVC insulated with size 4-7/.064 (16mm ²) copper conductor in 1-1/2" dia PVC conduit recessed in the wall or column as required. (S.I.No. 42 Page No. 2).	25.0 Mtrs.	1213.00	P.Mtr.	30325.00
7	Providing and fixing Circuit Breaker 6,10,15,20,30,40,50 & 63 Amps: SP (TB-5S) on prepared board as required.(S.I.No. 203, Page No. 31).	8 Nos	916.00	Each.	7328.00
8	Providing and fixing Circuit Breaker 3,5,10,15,20 & 30 Amps: TP (XS-30NS[NB]) on prepared board as required.(S.I.No. 205, Page No. 31).	1 Nos	5301.00	Each.	5301.00
9	Providing and fixing Circuit Breaker 3,5,10,15,20 , 30,40,50 & 60 Amps: TP (XS-30NS[NB]) on prepared board as required.(S.I.No. 206, Page No. 31).	1 Nos	5521.00	Each.	5521.00
10	P/F Circuit breaker 15,20,30,40,50,60,75 & 100 Amps: T.P. (XS-100NS) on prepared board as required.(S.I.No. 206, Page No. 31)	1 No	9261.00	Each.	9261.00
11	Providing & fixing Bakelite ceiling rose with two terminals. (S.I.No. 228, Page No. 33)	10 Nos	72.00	Each	720.00
12	Providing and Fixing Brass Battern Holder. (S.I.No. 232, Page No. 33)	10 Nos	70.00	Each	700.00

Total 126846.00

Add **% Above/Below**

Total **"A"**

PART "B" NON SCHEDULE ITEMS.

1	P/F Switch 5 Amps: imported Make i/c plastic board imported make etc complete.	34 Nos.		Each	
2	P/F 2 Pin 5 Amps: plug socket imported Make i/c plastic board with necessary electric connection etc complete.	4 Nos.		Each	
3	P/F fancy type 3 pin 5 Amps: S.P. plug socket switch & shoe unit imported Make with board i/c necessary connection and recessed in the wall etc, complete.	12 Nos.		Each	
4	P/F fancy type 3 pin 15 Amps: S.P. plug socket switch & shoe unit imported Make with board i/c necessary connection and recessed in the wall etc, complete.	6 Nos.		Each.	
5	P/F Fan dimmer fancy type Imported make with necessary connection.	10 Nos.		Each.	
6	P/F Ceiling Fan 56" sweep imported make with necessary electric connection etc, complete.	10 Nos.		Each	
7	P/F Ceiling Light LED 18 watt Imported make with Metal Base i/c necessary connection etc, complete.	30 Nos.		Each	
8	P/F Wall Bracket 18" sweep imported make or equalent quality i/c necessary electric connection etc, complete.	6 Nos.		Each	

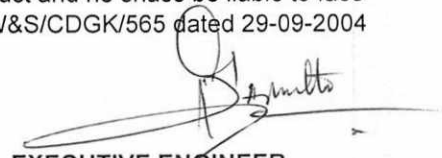
9	P/F distribution board 18 SWG double shutter to accommodate circuit breakers i/c painting with enamelled paint and for other similar jobs etc complete	6.00 Sft	P.Sft
10	P/F Earthing set with 1-1/2x1-1/2"x1/4" GI plate buried in the ground at depth of 12-ft: water comes out from the ground level with salt and charcoal etc i/c providing GI pipe and copper wire 8-SWG etc complete.	1 Sets	Each
11	Providing & fixing Energy Saver 18 to 24 Watts approved quality etc, complete.	24 Nos.	Each
12	P/F Sollar Pannel 100x2= 200 watts German make or equilent it complete with G.I Bracket fixed in position i/c necessary connection with Battery, sensor with pannel testing taping etc complete	5 Nos.	Each
13	P/F Dry battery 200 amps fixed with proper it matlic box i/c cooling arangement with thermopole sheet to protect to sun heat complete with G.I Bracket fixed in position i/c necessary connection with sensor, pannel testing taping etc complete	2 Nos.	Each.
14	P/F Automatic sencer suitable for 200 amps pannel fixed in matlic box fixed in position i/c necessary connection with sensor, pannel testing taping etc complete	2 Nos.	Each.
15	P/F Ceiling Light LED 7 to 11 watts Imported make with Metal Base holder screw type i/c necessary connection etc, complete.	17 Nos.	Each
16	P/F Wall Bracket 16" sweep D.C type suitable for sollar energy imporated make i/c necessary electric connection etc, complete.	1 Nos.	Each
17	P/F Ceiling fan 56" sweep D.C type suitable for sollar energy imporated make i/c necessary electric connection etc, complete.	4 Nos.	Each
18	Provision of Solar Light compact all in one Solar Street Light integrated design Easy installation invironmental friendly Model No LRC 80 w LED Brand leadray LED power 70, 80 watts Solar panel power 36V 110 watts infared senor Availabe. Color Silver , imporated make i/c fitted on existing pole or wall etc complete	1 Nos.	Each
19	P/F Steel Tubler Pole 25'ft long (20"x5" +5'x4") with required size angle iron for search light in/c excavation of earth for fixing the pole 4'ft depth at ground level and making C.C foundation ratio 1:3:6 and coller 3 coats etc as required	1 Nos.	Each

Each _____
Total B _____
Total A _____
Grand Total A+B _____

CONDITIONS.

- 1 Any typographical errors in the Schedule "B" are subject to correction with the reference in the Schedule of Rates General 2012, inforced from 12.07.2012 as approved by the SRC karachi Sindh
- 2 Arbitration Clause stands from the Agreement.
- 3 No premium shall be paid on Non Schedule items
- 4 No cartage of any item of material either supplied by department of arrange by the contractor shall be paid
- 5 The contractor squoting exorbitant will be required to submit Rate Analysis to justify their rates within specified time other wise the concerned contrator shall be treated as aquality of misconduct and he shass be liable to face punitive action under the rules as per EDO (W&S) department letter No EDOW&S/CDGK/565 dated 29-09-2004

CONTRACTOR


EXECUTIVE ENGINEER
MINORITIES AFFAIRS DEPARTMENT
GOVERNMENT OF SINDH

STANDARD BIDDING DOCUMENTS

FOR

**Construction of Satsang Hall and compound wall at Pooj
Shri Mami Dev (Mitho Pir) at Makli.(Electric work)**

1.00 (M)

BIDDING DATA

(This section should be filled in by the Engineer/Procuring Agency before issuance of the Bidding Documents).

(a). **Name of Procuring Agency:-** Executive Engineer, Minorities Affairs Sindh

(b). **Brief Description of Works: 06-** Construction of Satsang Hall and compound wall at Pooj Shri Mami Dev (Mitho Pir) at Makli.(Electric work)

(c). **Procuring Agency's address:-** Barrack No. 12, Block 4-A, Sindh Secretariat Karachi .

(d). **Estimated Cost:** 1.00 (Million)

(e). **Amount of Bid Security:-** 2% (Fill in lump sum amount or in % age of bid amount /estimated cost, but not exceeding 5%)

):- 15 days after the completion

(f). **Period of Bid Validity: (15 days** of Civil/ Building work (Not more than sixty days).

(g). **Security Deposit :- (including bid security:-** 10% .
(in % age of bid amount /estimated cost equal to 10%)

(h). **Percentage, if any, to be deducted from bills-** 8% .

(i). **Deadline for Submission of Bids along with time:** 06-06-2018 upto 12:30 p.m.


(j). **Venue, Time, and Date of Bid Opening:-** Office of the Executive Engineer, Minorities Affairs Sindh Barrack No.12, Block 4-A, Sindh Secretariat on 06-06-2018 at 12:30 p.m.

(k). **Time for Completion from written order of commence: -** 15 days after the completion of Civil/ Building work

(L). **Liquidity damages:-** 0.05% per day (0.05 of Estimated Cost or Bid cost per day of delay, but total not exceeding 10%).

(m). **Deposit Receipt No: Date: Amount:(in words and figures)**

(Executive Engineer/ Authority issuing bidding documents)


Executive Engineer
Minorities Affairs Department
Government of Sindh

" Schedule B."

Name of Work:- Construction of Satsang Hall and compound wall at Pooj Shri Mami Dev (Mitho Pir) at Makli.(Electric work) S.No 6

Lashaari nit 2018

S.No	Item of Work	Quantity.	Rate	Unit	Amount.
1	Wiring for light or fan point with 3/.029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required.(S.I.No. 124, Page No. 15).	34 Pts.	1130.00	P.Pt.	38420.00
2	Wiring for plug point with 3/.029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required. (S.I.No. 126 Page No. 15).	4 Pts.	985.00	P.Pt.	3940.00
3	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.029 copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 10 Page No. 2).	55.0 Mtrs.	222.00	P.Mtr.	12210.00
4	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.036 copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 11 Page No. 2).	25.00 Mtrs.	252.00	P.Mtr.	6300.00
5	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.044 (6mm2) copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 12 Page No. 2).	20.0 Mtrs.	341.00	P.Mtr.	6820.00
6	Providing and laying (Main or sub Main)PVC insulated with size 4-7/.064 (16mm2) copper conductor in 1-1/2" dia PVC conduit recessed in the wall or column as required. (S.I.No. 42 Page No. 2).	25.0 Mtrs.	1213.00	P.Mtr.	30325.00
7	Providing and fixing Circuit Breaker 6,10,15,20,30,40,50 & 63 Amps: SP (TB-5S) on prepared board as required.(S.I.No. 203, Page No. 31).	8 Nos	916.00	Each.	7328.00
8	Providing and fixing Circuit Breaker 3,5,10,15,20 & 30 Amps: TP (XS-30NS[NB]) on prepared board as required.(S.I.No. 205, Page No. 31).	1 Nos	5301.00	Each.	5301.00
9	Providing and fixing Circuit Breaker 3,5,10,15,20 , 30,40,50 & 60 Amps: TP (XS-30NS[NB]) on prepared board as required.(S.I.No. 206, Page No. 31).	1 Nos	5521.00	Each.	5521.00
10	P/F Circuit breaker 15,20,30,40,50,60,75 & 100 Amps: T.P. (XS-100NS) on prepared board as required.(S.I.No. 206, Page No. 31)	1 No	9261.00	Each.	9261.00
11	Providing & fixing Bakelite ceiling rose with two terminals. (S.I.No. 228, Page No. 33)	10 Nos	72.00	Each	720.00
12	Providing and Fixing Brass Battern Holder. (S.I.No. 232, Page No. 33)	10 Nos	70.00	Each	700.00
			Total		126846.00
		Add	% Above/Below		
			Total	"A"	

PART "B" NON SCHEDULE ITEMS.

1	P/F Switch 5 Amps: imported Make i/c plastic board imported make etc complete.	34 Nos.		Each	
2	P/F 2 Pin 5 Amps:plug socket imported Make i/c plastic board with necessary electric connection etc complete.	4 Nos.		Each	
3	P/F fancy type 3 pin 5 Amps: S.P. plug socket switch & shoe unit imported Make with board i/c necessary connection and recessed in the wall etc, complete.	12 Nos.		Each	
4	P/F fancy type 3 pin 15 Amps: S.P. plug socket switch & shoe unit imported Make with board i/c necessary connection and recessed in the wall etc, complete.	6 Nos.		Each.	
5	P/F Fan dimmer fancy type Imported make with necessary connection.	10 Nos.		Each.	
6	P/F Ceiling Fan 56" sweep imported make with necessary electric connection etc, complete.	10 Nos.		Each	
7	P/F Ceiling Light LED 18 watt Imported make with Metal Base i/c necessary connection etc, complete.	30 Nos.		Each	
8	P/F Wall Bracket 18" sweep imported make or equalent quality i/c necessary electric connection etc, complete.	6 Nos.		Each	

9	P/F distribution board 18 SWG double shutter to accommodate circuit breakers i/c painting with enamelled paint and for other similar jobs etc complete	6.00 Sft	P.Sft
10	P/F Earthing set with 1-1/2x1-1/2"x1/4" GI plate buried in the ground at depth of 12-ft: water comes out from the ground level with salt and charcoal etc i/c providing GI pipe and copper wire 8-SWG etc complete.	1 Sets	Each
11	Providing & fixing Energy Saver 18 to 24 Watts approved quality etc, complete.	24 Nos.	Each
12	P/F Sollar Pannel 100x2= 200 watts German make or equilent it complete with G.I Bracket fixed in position i/c necessary connection with Battery, sensor with pannel testing taping etc complete	5 Nos.	Each
13	P/F Dry battery 200 amps fixed with proper it matlic box i/c cooling arangement with thermopole sheet to protect to sun heat complete with G.I Bracket fixed in position i/c necessary connection with sensor, pannel testing taping etc complete	2 Nos.	Each.
14	P/F Automatic sencer suitable for 200 amps pannel fixed in matlic box fixed in position i/c necessary connection with sensor, pannel testing taping etc complete	2 Nos.	Each.
15	P/F Ceiling Light LED 7 to 11 watts Imported make with Metal Base holder screw type i/c necessary connection etc, complete.	17 Nos.	Each
16	P/F Wall Bracket 16" sweep D.C type suitable for sollar energy imporated make i/c necessary electric connection etc, complete.	1 Nos.	Each
17	P/F Ceiling fan 56" sweep D.C type suitable for sollar energy imporated make i/c necessary electric connection etc, complete.	4 Nos.	Each
18	Provision of Solar Light compact all in one Solar Street Light integrated design Easy installation invironmental friendly Model No LRC 80 w LED Brand leadray LED power 70, 80 watts Solar panel power 36V 110 watts infared senor Availabe. Color Silver , imporated make in/c fitted on existing pole or wall etc complete	1 Nos.	Each
19	P/F Steel Tubler Pole 25'ft long (20"x5" +5'x4") with required size angle iron for search light in/c excavation of earth for fixing the pole 4'ft depth at ground level and making C.C foundation ratio 1:3:6 and coller 3 coats etc as required	1 Nos.	Each

Total B	_____
Total A	_____
Grand Total A+B	_____

CONDITIONS.

- 1 Any typographical errors in the Schedule "B" are subject to correction with the reference in the Schedule of Rates General 2012, inforced from 12.07.2012 as approved by the SRC karachi Sindh
- 2 Arbitration Clause stands from the Agreement.
- 3 No premium shall be paid on Non Schedule items
- 4 No cartage of any item of material either supplied by department of arrange by the contractor shall be paid
- 5 The contractor squoting exorbitant will be required to submit Rate Analysis to justify their rates within specified time other wise the concerned contrator shall be treated as aquality of misconduct and he shass be liable to face punitive action under the rules as per EDO (W&S) department letter No EDO/W&S/CDGK/565 dated 29-09-2004

CONTRACTOR


EXECUTIVE ENGINEER
MINORITIES AFFAIRS DEPARTMENT
GOVERNMENT OF SINDH

STANDARD BIDDING DOCUMENTS

FOR

Construction of Satsang Hall in Kandyari .(Electric work)

1.00 (M)

BIDDING DATA

(This section should be filled in by the Engineer/Procuring Agency before issuance of the Bidding Documents).

(a). Name of Procuring Agency:- Executive Engineer, Minorities Affairs Sindh

(b). Brief Description of Works: **07-** Construction of Satsang Hall in Kandyari. (Electric work)

(c). Procuring Agency's address:- Barrack No. 12, Block 4-A, Sindh Secretariat Karachi .

(d). Estimated Cost: 1.00 (Million)

(e). Amount of Bid Security:- 2% (Fill in lump sum amount or in % age of bid amount /estimated cost, but not exceeding 5%)

):- 15 days after the completion

(f). Period of Bid Validity: (**15 days** of Civil/ Building work (Not more than sixty days).

(g). Security Deposit :- (including bid security:- 10% .
(in % age of bid amount /estimated cost equal to 10%)

(h). Percentage, if any, to be deducted from bills- 8% .

(i). Deadline for Submission of Bids along with time: 06-06-2018 upto 12:30 p.m.

(j). Venue, Time, and Date of Bid Opening:- Office of the Executive Engineer, Minorities Affairs Sindh Barrack No.12, Block 4-A, Sindh Secretariat on 06-06-2018 at 12:30 p.m.

(k). Time for Completion from written order of commence: - 15 days after the completion of Civil/ Building work

(L). Liquidity damages:- 0.05% per day (0.05 of Estimated Cost or Bid cost per day of delay, but total not exceeding 10%).

(m). Deposit Receipt No: Date: Amount:(in words and figures)

(Executive Engineer/ Authority issuing bidding documents)


Executive Engineer
Minorities Affairs Department
Government of Sindh

" Schedule B."

Name of Work: Construction of Satsang Hall in Kandiyari .(Electric work) S.No7

Lashaari nit 2018

S.No	Item of Work	Quantity.	Rate	Unit	Amount.
1	Wiring for light or fan point with 3/.029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required.(S.I.No. 124, Page No. 15).	34 Pts.	1130.00	P.Pt.	38420.00
2	Wiring for plug point with 3/.029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required. (S.I.No. 126 Page No. 15).	4 Pts.	985.00	P.Pt.	3940.00
3	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.029 copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 10 Page No. 2).	55.0 Mtrs.	222.00	P.Mtr.	12210.00
4	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.036 copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 11 Page No. 2).	25.00 Mtrs.	252.00	P.Mtr.	6300.00
5	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.044 (6mm ²) copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 12 Page No. 2).	20.0 Mtrs.	341.00	P.Mtr.	6820.00
6	Providing and laying (Main or sub Main)PVC insulated with size 4-7/.064 (16mm ²) copper conductor in 1-1/2" dia PVC conduit recessed in the wall or column as required. (S.I.No. 42 Page No. 2).	25.0 Mtrs.	1213.00	P.Mtr.	30325.00
7	Providing and fixing Circuit Breaker 6,10,15,20,30,40,50 & 63 Amps: SP (TB-5S) on prepared board as required.(S.I.No. 203, Page No. 31).	8 Nos	916.00	Each.	7328.00
8	Providing and fixing Circuit Breaker 3,5,10,15,20 & 30 Amps: TP (XS-30NS[NB]) on prepared board as required.(S.I.No. 205, Page No. 31).	1 Nos	5301.00	Each.	5301.00
9	Providing and fixing Circuit Breaker 3,5,10,15,20 , 30,40,50 & 60 Amps: TP (XS-30NS[NB]) on prepared board as required.(S.I.No. 206, Page No. 31).	1 Nos	5521.00	Each.	5521.00
10	P/F Circuit breaker 15,20,30,40,50,60,75 & 100 Amps: T.P. (XS-100NS) on prepared board as required.(S.I.No. 206, Page No. 31)	1 No	9261.00	Each.	9261.00
11	Providing & fixing Bakelite ceiling rose with two terminals. (S.I.No. 228, Page No. 33)	10 Nos	72.00	Each	720.00
12	Providing and Fixing Brass Battern Holder. (S.I.No. 232, Page No. 33)	10 Nos	70.00	Each	700.00

Total 126846.00

Add % Above/Below

Total "A"

PART "B" NON SCHEDULE ITEMS.

1	P/F Switch 5 Amps: imported Make i/c plastic board imported make etc complete.	34 Nos.		Each	
2	P/F 2 Pin 5 Amps:plug socket imported Make i/c plastic board with necessary electric connection etc complete.	4 Nos.		Each	
3	P/F fancy type 3 pin 5 Amps: S.P. plug socket switch & shoe unit imported Make with board i/c necessary connection and recessed in the wall etc, complete.	12 Nos.		Each	
4	P/F fancy type 3 pin 15 Amps: S.P. plug socket switch & shoe unit imported Make with board i/c necessary connection and recessed in the wall etc, complete.	6 Nos.		Each.	
5	P/F Fan dimmer fancy type Imported make with necessary connection.	10 Nos.		Each.	
6	P/F Ceiling Fan 56" sweep imported make with necessary electric connection etc, complete.	10 Nos.		Each	
7	P/F Ceiling Light LED 18 watt Imported make with Metal Base i/c necessary connection etc, complete.	30 Nos.		Each	
8	P/F Wall Bracket 18" sweep imported make or equalent quality i/c necessary electric connection etc, complete.	6 Nos.		Each	
9	P/F distribution board 18 SWG double shutter to accommodate circuit breakers i/c painting with enamelled paint and for other similar jobs etc complete	6.00 Sft		P.Sft	


10	P/F Earthing set with 1-1/2x1-1/2"x1/4" GI plate buried in the ground at depth of 12-ft: water comes out from the ground level with salt and charcoal etc i/c providing GI pipe and copper wire 8-SWG etc complete.	1 Sets	Each
11	Providing & fixing Energy Saver 18 to 24 Watts approved quality etc, complete.	24 Nos.	Each
12	P/F Sollar Pannel 100x2= 200 watts German make or equilent it complete with G.I Bracket fixed in position i/c necessary connection with Battery, sensor with pannel testing taping etc complete	5 Nos.	Each
13	P/F Dry battery 200 amps fixed with proper it matlic box i/c cooling arangement with thermopole sheet to protect to sun heat complete with G.I Bracket fixed in position i/c necessary connection with sensor, pannel testing taping etc complete	2 Nos.	Each.
14	P/F Automatic sencer suitable for 200 amps pannel fixed in matlic box fixed in position i/c necessary connection with sensor, pannel testing taping etc complete	2 Nos.	Each.
15	P/F Ceiling Light LED 7 to 11 watts Imported make with Metal Base holder screw type i/c necessary connection etc, complete.	17 Nos.	Each
16	P/F Wall Bracket 16" sweep D.C type suitable for sollar energy imporated make i/c necessary electric connection etc, complete.	1 Nos.	Each
17	P/F Ceiling fan 56" sweep D.C type suitable for sollar energy imporated make i/c necessary electric connection etc, complete.	4 Nos.	Each
18	Provision of Solar Light compact all in one Solar Street Light integrated design Easy installation invironmental friendly Model No LRC 80 w LED Brand leadray LED power 70, 80 watts Solar panel power 36V 110 watts infared senor Availabe. Color Silver , imporated make in/c fitted on existing pole or wall etc complete	1 Nos.	Each
19	P/F Steel Tubler Pole 25'ft long (20"x5" +5'x4") with required size angle iron for search light in/c excavation of earth for fixing the pole 4'ft depth at ground level and making C.C foundation ratio 1:3:6 and coller 3 coats etc as required	1 Nos.	Each

Total B _____
Total A _____
Grand Total A+B _____

CONDITIONS.

- 1 Any typographical errors in the Schedule "B" are subject to correction with the reference in the Schedule of Rates General 2012, inforced from 12.07.2012 as approved by the SRC karachi Sindh
- 2 Arbitration Clause stands from the Agreement.
- 3 No premium shall be paid on Non Schedule items
- 4 No cartage of any item of material either supplied by department of arrange by the contractor shall be paid
- 5 The contractor squoting exorbitant will be required to submit Rate Analysis to justify their rates within specified time other wise the concerned contrator shall be treated as aquality of misconduct and he shass be liable to face punitive action under the rules as per EDO (W&S) department letter No EDO/W&S/CDGK/565 dated 29-09-2004

CONTRACTOR


EXECUTIVE ENGINEER
MINORITIES AFFAIRS DEPARTMENT
GOVERNMENT OF SINDH

STANDARD BIDDING DOCUMENTS

FOR

**Repair/Renovation/Reconstruction of Shamshan Ghat
(Massan) @ Larkana**

1.00 (M)

BIDDING DATA

(This section should be filled in by the Engineer/Procuring Agency before issuance of the Bidding Documents).

(a). Name of Procuring Agency:- Executive Engineer, Minorities Affairs Sindh

(b). Brief Description of Works: **24-** Repair/Renovation/Reconstruction of Shamshan Ghat (Massan) @ Larkana

(c). Procuring Agency's address:- Barrack No. 12, Block 4-A, Sindh Secretariat Karachi .

(d). Estimated Cost: 1.00 (Million)

(e). Amount of Bid Security:- 2% (Fill in lump sum amount or in % age of bid amount /estimated cost, but not exceeding 5%)

):- 15 days after the completion

(f). Period of Bid Validity: (15 days of Civil/ Building work (Not more than sixty days).

(g). Security Deposit :- (including bid security:- 10% .
(in % age of bid amount /estimated cost equal to 10%)

(h). Percentage, if any, to be deducted from bills- 8% .

(i). Deadline for Submission of Bids along with time: 06-06-2018 upto 12:30 p.m.


(j). Venue, Time, and Date of Bid Opening:- Office of the Executive Engineer, Minorities Affairs Sindh Barrack No.12, Block 4-A, Sindh Secretariat on 06-06-2018 at 12:30 p.m.

(k). Time for Completion from written order of commence: - 15 days after the completion of Civil/ Building work

(L). Liquidity damages:- 0.05% per day (0.05 of Estimated Cost or Bid cost per day of delay, but total not exceeding 10%).

(m). Deposit Receipt No: Date: Amount:(in words and figures)

(Executive Engineer/ Authority issuing bidding documents)


Executive Engineer
Minorities Affairs Department
Government of Sindh

" Schedule B."

Name of Work:-Repair/Renovation/Reconstruction of Shamshan Ghat (Massan) @ Larkana S.No 24

Lashaari nit 2018

S.No	Item of Work	Quantity.	Rate	Unit	Amount.
1	Wiring for light or fan point with 3/.029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required.(S.I.No. 124, Page No. 15).	34 Pts.	1130.00	P.Pt.	38420.00
2	Wiring for plug point with 3/.029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required. (S.I.No. 126 Page No. 15).	4 Pts.	985.00	P.Pt.	3940.00
3	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.029 copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 10 Page No. 2).	55.0 Mtrs.	222.00	P.Mtr.	12210.00
4	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.036 copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 11 Page No. 2).	25.00 Mtrs.	252.00	P.Mtr.	6300.00
5	Providing and laying (Main or sub Main)PVC insulated with size 2-7/.044 (6mm2) copper conductor in 3/4" dia PVC conduit recessed in the wall or column as required. (S.I.No. 12 Page No. 2).	20.0 Mtrs.	341.00	P.Mtr.	6820.00
6	Providing and laying (Main or sub Main)PVC insulated with size 4-7/.064 (16mm2) copper conductor in 1-1/2" dia PVC conduit recessed in the wall or column as required. (S.I.No. 42 Page No. 2).	25.0 Mtrs.	1213.00	P.Mtr.	30325.00
7	Providing and fixing Circuit Breaker 6,10,15,20,30,40,50 & 63 Amps: SP (TB-5S) on prepared board as required.(S.I.No. 203, Page No. 31).	8 Nos	916.00	Each.	7328.00
8	Providing and fixing Circuit Breaker 3,5,10,15,20 & 30 Amps: TP (XS-30NS[NB]) on prepared board as required.(S.I.No. 205, Page No. 31).	1 Nos	5301.00	Each.	5301.00
9	Providing and fixing Circuit Breaker 3,5,10,15,20 , 30,40,50 & 60 Amps: TP (XS-30NS[NB]) on prepared board as required.(S.I.No. 206, Page No. 31).	1 Nos	5521.00	Each.	5521.00
10	P/F Circuit breaker 15,20,30,40,50,60,75 & 100 Amps: T.P. (XS-100NS) on prepared board as required.(S.I.No. 206, Page No. 31)	1 No	9261.00	Each.	9261.00
11	Providing & fixing Bakelite ceiling rose with two terminals. (S.I.No. 228, Page No. 33)	10 Nos	72.00	Each	720.00
12	Providing and Fixing Brass Battern Holder. (S.I.No. 232, Page No. 33)	10 Nos	70.00	Each	700.00

Total 126846.00

Add % Above/Below
Total "A"

PART "B" NON SCHEDULE ITEMS.

1	P/F Switch 5 Amps: imported Make i/c plastic board imported make etc complete.	34 Nos.		Each	
2	P/F 2 Pin 5 Amps:plug socket imported Make i/c plastic board with necessary electric connection etc complete.	4 Nos.		Each	
3	P/F fancy type 3 pin 5 Amps: S.P. plug socket switch & shoe unit imported Make with board i/c necessary connection and recessed in the wall etc, complete.	12 Nos.		Each	
4	P/F fancy type 3 pin 15 Amps: S.P. plug socket switch & shoe unit imported Make with board i/c necessary connection and recessed in the wall etc, complete.	6 Nos.		Each.	
5	P/F Fan dimmer fancy type Imported make with necessary connection.	10 Nos.		Each.	
6	P/F Ceiling Fan 56" sweep imported make with necessary electric connection etc, complete.	10 Nos.		Each	
7	P/F Ceiling Light LED 18 watt Imported make with Metal Base i/c necessary connection etc, complete.	30 Nos.		Each	
8	P/F Wall Bracket 18" sweep imported make or equalent quality i/c necessary electric connection etc, complete.	6 Nos.		Each	


9	P/F distribution board 18 SWG double shutter to accommodate circuit breakers i/c painting with enamelled paint and for other similar jobs etc complete	6.00 Sft	P.Sft
10	P/F Earthing set with 1-1/2x1-1/2"x1/4" GI plate buried in the ground at depth of 12-ft: water comes out from the ground level with salt and charcoal etc i/c providing GI pipe and copper wire 8-SWG etc complete.	1 Sets	Each
11	Providing & fixing Energy Saver 18 to 24 Watts approved quality etc, complete.	24 Nos.	Each
12	P/F Sollar Pannel 100x2= 200 watts German make or equilent it complete with G.I Bracket fixed in position i/c necessary connection with Battery, sensor with pannel testing taping etc complete	5 Nos.	Each
13	P/F Dry battery 200 amps fixed with proper it matlic box i/c cooling arangement with thermopole sheet to protect to sun heat complete with G.I Bracket fixed in position i/c necessary connection with sensor, pannel testing taping etc complete	2 Nos.	Each.
14	P/F Automatic sencer suitable for 200 amps pannel fixed in matlic box fixed in position i/c necessary connection with sensor, pannel testing taping etc complete	2 Nos.	Each.
15	P/F Ceiling Light LED 7 to 11 watts Imported make with Metal Base holder screw type i/c necessary connection etc, complete.	17 Nos.	Each
16	P/F Wall Bracket 16" sweep D.C type suitable for sollar energy imporated make i/c necessary electric connection etc, complete.	1 Nos.	Each
17	P/F Ceiling fan 56" sweep D.C type suitable for sollar energy imporated make i/c necessary electric connection etc, complete.	4 Nos.	Each
18	Provision of Solar Light compact all in one Solar Street Light integrated design Easy installation invironmental friendly Model No LRC 80 w LED Brand leadray LED power 70, 80 watts Solar panel power 36V 110 watts infared senor Availabe. Color Silver , imporated make in/c fitted on existing pole or wall etc complete	1 Nos.	Each
19	P/F Steel Tubler Pole 25'ft long (20"x5" +5"x4") with required size angle iron for search light in/c excavation of earth for fixing the pole 4'ft depth at ground level and making C.C foundation ratio 1:3:6 and coller 3 coats etc as required	1 Nos.	

Total B	_____
Total A	_____
Grand Total A+B	_____

CONDITIONS.

- 1 Any typographical errors in the Schedule "B" are subject to correction with the reference in the Schedule of Rates General 2012, inforced from 12.07.2012 as approved by the SRC karachi Sindh
- 2 Arbitration Clause stands from the Agreement.
- 3 No premium shall be paid on Non Schedule items
- 4 No cartage of any item of material either supplied by department of arrange by the contractor shall be paid
- 5 The contractor squoting exorbitant will be required to submit Rate Analysis to justyfy their rates within specified time other wise the concerned contrator shall be treated as aquality of misconduct and he shass/be liable to face punitive action under the rules as per EDO (W&S) department letter No EDO/W&S/CDGK/565 dated 29-09-2004

CONTRACTOR


EXECUTIVE ENGINEER
MINORITIES AFFAIRS DEPARTMENT
GOVERNMENT OF SINDH

SPPRA BIDDING DOCUMENT

STANDARD BIDDING DOCUMENT

PROCUREMENT OF WORKS

(For Contracts Costing up to Rs 2.5 MILLION)

Standard Bidding Document is intended as a model for admeasurements (Percentage Rate/unit price for unit rates in a Bill of Quantities) types of contract. The main text refers to admeasurements contracts.

Instructions to Bidders/ Procuring Agencies.

General Rules and Directions for the Guidance of Contractors.

This section of the bidding documents should provide the information necessary for bidders to prepare responsive bids, in accordance with the requirements of the Procuring Agency. It should also give information on bid submission, opening and evaluation, and on the award of contract.

Matters governing the performance of the Contract or payments under the Contract, or matters affecting the risks, rights, and obligations of the parties under the Contract are included as Conditions of Contract and *Contract Data*.

The *Instructions to Bidders* will not be part of the Contract and will cease to have effect once the contract is signed.

1. All work proposed to be executed by contract shall be notified in a form of Notice Inviting Tender (NIT)/Invitation for Bid (IFB) hoisted on website of Authority and Procuring Agency and also in printed media where ever required as per rules.

NIT must state the description of the work, dates, time and place of issuing, submission, opening of bids, completion time, cost of bidding document and bid security either in lump sum or percentage of Estimated Cost/Bid Cost. The interested bidder must have valid NTN also.

2. Content of Bidding Documents must include but not limited to: Conditions of contract, Contract Data, specifications or its reference, Bill of Quantities containing description of items with scheduled/item rates with premium to be filled in form of percentage above/ below or on item rates to be quoted, Form of Agreement and drawings.

3. **Fixed Price Contracts:** The Bid prices and rates are fixed during currency of contract and under no circumstance shall any contractor be entitled to claim enhanced rates for any item in this contract.

4. The Procuring Agency shall have right of rejecting all or any of the tenders as per provisions of SPP Rules 2010.

5. **Conditional Offer:** Any person who submits a tender shall fill up the usual printed form stating at what percentage above or below on the rates specified in Bill of Quantities for items of work to be carried out: he is willing to undertake the work and also quote the rates for those items which are based on market rates. Only one rate of such percentage, on all the Scheduled Rates shall be framed. Tenders, which propose any alternative in the works specified in the said form of invitation to tender or in the time

allowed for carrying out the work, or which contain any other conditions, will be liable to rejection. No printed form of tender shall include a tender for more than one work, but if contractor wish to tender for two or more works, they shall submit a separate tender for each.

The envelope containing the tender documents shall refer the name and number of the work.

6. All works shall be measured by standard instruments according to the rules.
7. Bidders shall provide evidence of their eligibility as and when requested by the Procuring Agency.
8. Any bid received by the Agency after the deadline for submission of bids shall be rejected and returned unopened to the bidder.
9. Prior to the detailed evaluation of bids, the Procuring Agency will determine whether the bidder fulfills all codal requirements of eligibility criteria given in the tender notice such as registration with tax authorities, registration with PEC (where applicable), turnover statement, experience statement, and any other condition mentioned in the NIT and bidding document. If the bidder does not fulfill any of these conditions, it shall not be evaluated further.
10. Bid without bid security of required amount and prescribed form shall be rejected.
11. Bids determined to be substantially responsive shall be checked for any arithmetic errors. Arithmetical errors shall be rectified on the following basis;
 - (A) **In case of schedule rates**, the amount of percentage quoted above or below will be checked and added or subtracted from amount of bill of quantities to arrive the final bid cost.
 - (B) **In case of item rates**, .If there is a discrepancy between the unit rate and the total cost that is obtained by multiplying the unit rate and quantity, the unit rate shall prevail and the total cost will be corrected unless in the opinion of the Agency there is an obvious misplacement of the decimal point in the unit rate, in which case the total cost as quoted will govern and the unit rate corrected. If there is a discrepancy between the total bid amount and the sum of total costs, the sum of the total costs shall prevail and the total bid amount shall be corrected.
 - (C) Where there is a discrepancy between the amounts in figures and in words, the amount in words will govern.

BIDDING DATA

(This section should be filled in by the Engineer/Procuring Agency before issuance of the Bidding Documents).

- (a). Name of Procuring Agency _____
- (b). Brief Description of Works _____
- (c). Procuring Agency's address:- _____
- (d). Estimated Cost:- _____
- (e). Amount of Bid Security:- _____ (Fill in lump sum amount
or in % age of bid amount /estimated cost, but not exceeding 5%)
- (f). Period of Bid Validity (days):- _____ (Not more than sixty days).
- (g). Security Deposit:- (including bid security):- _____
(in % age of bid amount /estimated cost equal to 10%)
- (h). Percentage, if any, to be deducted from bills :- _____
- (i). Deadline for Submission of Bids along with time :- _____
- (j). Venue, Time, and Date of Bid Opening:- _____
- (k). Time for Completion from written order of commence: - _____
- (L). Liquidity damages:- _____ (0.05 of Estimated Cost or Bid cost
per day of delay, but total not exceeding 10%).
- (m). Deposit Receipt No: Date: Amount: (in words and figures)

(Executive Engineer/Authority issuing bidding document)

Conditions of Contract

Clause – 1: Commencement & Completion Dates of work. The contractor shall not enter upon or commence any portion or work except with the written authority and instructions of the Engineer-in-charge or of in subordinate-in-charge of the work. Failing such authority the contractor shall have no claim to ask for measurements of or payment for work.

The contractor shall proceed with the works with due expedition and without delay and complete the works in the time allowed for carrying out the work as entered in the tender shall be strictly observed by the contractor and shall reckoned from the date on which the order to commence work is given to the contractor. And further to ensure good progress during the execution of the work, contractor shall be bound, in all in which the time allowed for completion of any work exceeds one month, to achieve progress on the prorate basis.

Clause – 2: Liquidated Damages. The contractor shall pay liquidated damages to the Agency at the rate per day stated in the bidding data for each day that the completion date is later than the Intended completion date; the amount of liquidated damage paid by the contractor to the Agency shall not exceed 10 per cent of the contract price. Agency may deduct liquidated damages from payments due to the contractor. Payment of liquidated damages does not affect the contractor's liabilities.

Clause – 3: Termination of the Contract.

- (A) Procuring Agency/Executive Engineer may terminate the contract if either of the following conditions exists:-
- (i) contractor causes a breach of any clause of the Contract;
 - (ii) the progress of any particular portion of the work is unsatisfactory and notice of 10 days has expired;
 - (iii) in the case of abandonment of the work owing to the serious illness or death of the contractor or any other cause.
 - (iv) contractor can also request for termination of contract if a payment certified by the Engineer is not paid to the contractor within 60 days of the date of the submission of the bill;
- (B) The Executive Engineer/Procuring Agency has power to adopt any of the following courses as may deem fit:-
- (i) to forfeit the security deposit available except conditions mentioned at A (iii) and (iv) above;
 - (ii) to finalize the work by measuring the work done by the contractor.

(C) In the event of any of the above courses being adopted by the Executive Engineer/Procuring Agency, the contractor shall have:-

- (i) no claim to compensation for any loss sustained by him by reason of his having purchased or procured any materials, or entered into any engagements, or made any advances on account of, or with a view to the execution of the work or the performance of the contract,
- (ii) however, the contractor can claim for the work done at site duly certified by the executive engineer in writing regarding the performance of such work and has not been paid.

Procuring Agency/Engineer may invite fresh bids for remaining work.

Clause 4: Possession of the site and claims for compensation for delay. The Engineer shall give possession of all parts of the site to the contractor. If possession of site is not given by the date stated in the contract data, no compensation shall be allowed for any delay caused in starting of the work on account of any acquisition of land, water standing in borrow pits/ compartments or in according sanction to estimates. In such case, either date of commencement will be changed or period of completion is to be extended accordingly.

Clause -5: Extension of Intended Completion Date. The Procuring Agency either at its own initiatives before the date of completion or on desire of the contractor may extend the intended completion date, if an event (which hinders the execution of contract) occurs or a variation order is issued which makes it impossible to complete the work by the intended completion date for such period as he may think necessary or proper. The decision of the Executive Engineer in this matter shall be final; where time has been extended under this or any other clause of this agreement, the date for completion of the work shall be the date fixed by the order giving the extension or by the aggregate of all such orders, made under this agreement.

When time has been extended as aforesaid, it shall continue to be the essence of the contract and all clauses of the contract shall continue to be operative during the extended period.

Clause -6: Specifications. The contractor shall execute the whole and every part of the work in the most substantial and work-man-like manner and both as regards materials and all other matters in strict accordance with the specifications lodged in the office of the Executive Engineer and initialed by the parties, the said specification being a part of the contract. The contractor shall also confirm exactly, fully and faithfully to the designs, drawing, and instructions in writing relating to the work signed by the Engineer-in-charge and lodge in his office and to which the contractor shall be entitled to have access at such office or on the site of work for the purpose of inspection during office hours and the contractor shall, if he so requires, be entitled at his own expense to make or cause to be made copies of the specifications, and of all such designs, drawings, and instructions as aforesaid.

Clause – 7: Payments.

- (A) **Interim/Running Bill.** A bill shall be submitted by the contractor as frequently as the progress of the work may justify for all work executed and not included in any previous bill at least once in a month and the Engineer-in-charge shall take or cause to be taken the requisite measurements for the purpose of having the same verified and the claim, as far as admissible, adjusted, if possible before the expiry of ten days from the presentation of the bill, at any time depute a subordinate to measure up the said work in the presence of the contractor or his authorized agent, whose countersignature to the measurement list will be sufficient to warrant and the Engineer-in-charge may prepare a bill from such list which shall be binding on the contractor in all respects.

The Engineer /Procuring Agency shall pass/certify the amount to be paid to the contractor, which he considers due and payable in respect thereof, subject to deduction of security deposit, advance payment if any made to him and taxes.

All such intermediate payment shall be regarded as payments by way of advance against the final payment only and not as payments for work actually done and completed, and shall not preclude the Engineer-in-charge from recoveries from final bill and rectification of defects and unsatisfactory items of works pointed out to him during defect liability period.

- (B) **The Final Bill.** A bill shall be submitted by the contractor within one month of the date fixed for the completion of the work otherwise Engineer-in-charge's certificate of the measurements and of the total amount payable for the works shall be final and binding on all parties.

Clause – 8: Reduced Rates. In cases where the items of work are not accepted as so completed, the Engineer-in-charge may make payment on account of such items at such reduced rates as he may consider reasonable in the preparation of final or on running account bills with reasons recorded in writing.

Clause – 9: Issuance of Variation and Repeat Orders.

- (A) Agency may issue a Variation Order for procurement of works, physical services from the original contractor to cover any increase or decrease in quantities, including the introduction of new work items that are either due to change of plans, design or alignment to suit actual field conditions, within the general scope and physical boundaries of the contract.
- (B) Contractor shall not perform a variation until the Procuring Agency has authorized the variation in writing subject to the limit not exceeding the contract cost by of 15% on the same conditions in all respects on which he agreed to do them in the

work, and at the same rates, as are specified in the tender for the main work. The contractor has no right to claim for compensation by reason of alterations or curtailment of the work.

- (C) In case the nature of the work in the variation does not correspond with items in the Bill of Quantities, the quotation by the contractor is to be in the form of new rates for the relevant items of work, and if the Engineer-in-charge is satisfied that the rate quoted is within the rate worked out by him on detailed rate analysis, and then only he shall allow him that rate after approval from higher authority.
- (D) The time for the completion of the work shall be extended in the proportion that the additional work bear to the original contact work.
- (E) In case of quantities of work executed result the Initial Contract Price to be xceeded by more than 15%, and then Engineer can adjust the rates for those quantities causing excess the cost of contract beyond 15% after approval of Superintending Engineer.
- (F) **Repeat Order:** Any cumulative variation, beyond the 15% of initial contract amount, shall be subject of another contract to be tendered out if the works are separable from the original contract.

Clause-10: Quality Control.

- (A) **Identifying Defects:** If at any time before the security deposit is refunded to the contractor/during defect liability period mentioned in bid data, the Engineer-in-charge or his subordinate-in-charge of the work may instruct the contractor to uncover and test any part of the works which he considers may have a defect due to use of unsound materials or unskillful workmanship and the contractor has to carry out a test at his own cost irrespective of work already approved or paid.
- (B) **Correction of Defects:** The contractor shall be bound forthwith to rectify or remove and reconstruct the work so specified in whole or in part, as the case may require. The contractor shall correct the notified defect within the Defects Correction Period mentioned in notice.
- (C) **Uncorrected Defects:**
 - (i) In the case of any such failure, the Engineer-in-charge shall give the contractor at least 14 days notice of his intention to use a third party to correct a defect. He may rectify or remove, and re-execute the work or remove and replace the materials or articles complained of as the case may be at the risk and expense in all respects of the contractor.

- (ii) If the Engineer considers that rectification/correction of a defect is not essential and it may be accepted or made use of; it shall be within his discretion to accept the same at such reduced rates as he may fix therefore.

Clause – 11:

- (A) **Inspection of Operations.** The Engineer and his subordinates, shall at all reasonable times have access to the site for supervision and inspection of works under or in course of execution in pursuance of the contract and the contractor shall afford every facility for and every assistance in obtaining the right to such access.
- (B) **Dates for Inspection and Testing.** The Engineer shall give the contractor reasonable notice of the intention of the Engineer-in-charge or his subordinate to visit the work shall have been given to the contractor, then he either himself be present to receive orders and instructions, or have a responsible agent duly accredited in writing present for that purpose, orders given to the contractor's duly authorized agent shall be considered to have the same force an effect as if they had been given to the contractor himself.

Clause – 12: Examination of work before covering up.

- (A) No part of the works shall be covered up or put out of view/beyond the reach without giving notice of not less than five days to the Engineer whenever any such part of the works or foundations is or are ready or about to be ready for examination and the Engineer shall, without delay, unless he considers it unnecessary and advises the contractor accordingly, attend for the purpose of examining and measuring such part of the works or of examining such foundations;
- (B) If any work is covered up or placed beyond the reach of measurement without such notice having been given, the same shall be uncovered at the contractor's expense, and in default thereof no payment or allowance shall be made for such work, or for the materials with which the same was executed.

Clause – 13: Risks. The contractor shall be responsible for all risks of loss of or damage to physical property or facilities or related services at the premises and of personal injury and death which arise during and in consequence of its performance of the contract. if any damage is caused while the work is in progress or become apparent within three months of the grant of the certificate of completion, final or otherwise, the contractor shall make good the same at his own expense, or in default the Engineer may cause the same to be made good by other workmen, and deduct the expenses from retention money lying with the Engineer.

Clause-14: Measures for prevention of fire and safety measures. The contractor shall not set fire to any standing jungle, trees, bush-wood or grass without a written permit from the Executive Engineer. When such permit is given, and also in all cases when destroying, cutting or uprooting trees, bush-wood, grass, etc by fire, the contractor shall take necessary measures to prevent such fire spreading to or otherwise damaging surrounding property. The contractor is responsible for the safety of all its activities including protection of the environment on and off the site. Compensation of all damage done intentionally or unintentionally on or off the site by the contractor's labour shall be paid by him.

Clause-15:Sub-contracting. The contractor shall not subcontract the whole of the works, except where otherwise provided by the contract. The contractor shall not subcontract any part of the works without the prior consent of the Engineer. Any such consent shall not relieve the contractor from any liability or obligation under the contract and he shall be responsible for the acts, defaults and neglects of any subcontractor, his agents, servants or workmen as if these acts, defaults or neglects were those of the contractor, his agents' servants or workmen. The provisions of this contract shall apply to such subcontractor or his employees as if he or it were employees of the contractor.

Clause – 16: Disputes. All disputes arising in connection with the present contract, and which cannot be amicably settled between the parties, , the decision of the Superintending Engineer of the circle/officer/one grade higher to awarding authority shall be final, conclusive and binding on all parties to the contract upon all questions relating to the meaning of the specifications, designs drawings, and instructions, hereinbefore mentioned and as to the quality of workmanship, or materials used on the work or as to any other questions, claim, right, matter, or thing whatsoever in any way arising out of, or relating to the contract design, drawings, specifications, estimates, instructions, orders or these conditions or otherwise concerning the works, or the execution, of failure to execute the same, whether arising, during the progress of the work, or after the completion or abandonment thereof.

Clause –17: Site Clearance. On completion of the work, the contractor shall be furnished with a certificate by the Executive Engineer (hereinafter called the Engineer in-charge) of such completion, but neither such certificate shall be given nor shall the work be considered to be complete until the contractor shall have removed all temporary structures and materials brought at site either for use or for operation facilities including cleaning debris and dirt at the site. If the contractor fails to comply with the requirements of this clause then Engineer-in-charge, may at the expense of the contractor remove and dispose of the same as he thinks fit and shall deduct the amount of all expenses so incurred from the contractor's retention money. The contractor shall have no claim in respect of any surplus materials as aforesaid except for any sum actually realized by the sale thereof.

Clause –18: Financial Assistance /Advance Payment.

(A) **Mobilization advance** is not allowed.

(B) **Secured Advance against materials brought at site.**

- (i) Secured Advance may be permitted only against imperishable materials/quantities anticipated to be consumed/utilized on the work within a period of three months from the date of issue of secured advance and definitely not for full quantities of materials for the entire work/contract. The sum payable for such materials on site shall not exceed 75% of the market price of materials;
- (ii) Recovery of Secured Advance paid to the contractor under the above provisions shall be affected from the monthly payments on actual consumption basis, but not later than period more than three months (even if unutilized).

Clause –19: Recovery as arrears of Land Revenue. Any sum due to the Government by the contractor shall be liable for recovery as arrears of Land Revenue.

Clause –20: Refund of Security Deposit/Retention Money. On completion of the whole of the works (a work should be considered as complete for the purpose of refund of security deposit to a contractor from the last date on which its final measurements are checked by a competent authority, if such check is necessary otherwise from the last date of recording the final measurements), the defects notice period has also passed and the Engineer has certified that all defects notified to the contractor before the end of this period have been corrected, the security deposit lodged by a contractor (in cash or recovered in installments from his bills) shall be refunded to him after the expiry of three months from the date on which the work is completed.

Divisional Accountant

Contractor

Executive Engineer/Procuring Agency

BILL OF QUANTITIES

(A) Description and rate of Items based on Composite Schedule of Rates.

Item No	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees
1	2	3	4	5	6

Amount TOTAL (a)

----- % above/below on the rates of CSR.

Amount to be added/deducted on the basis
Of premium quoted. TOTAL (b)

Total (A) = a+b in words & figures:

Contractor

Executive Engineer/Procuring Agency

(B) Description and rate of Items based on Market (Offered rates)

Item No	Quantities	Description of item to be executed at site	Rate	Unit	Amount in Rupees

Total (B) in words & figures:

Contractor

Executive Engineer/Procuring Agency

Summary of Bill of Quantities.

Cost of Bid Amount

1. (A) Cost based on Composite Schedule of Rates.

2. (B) Cost based on Non/Offered Schedule of Rates.

TOTAL COST OF BID (C) = Total (A) + Total (B)

Contractor

Executive Engineer/Procuring Agency